


## Technical data for your configuration

---

**Solution ID.: SKPQR**

**Product range: PTA 1,5**

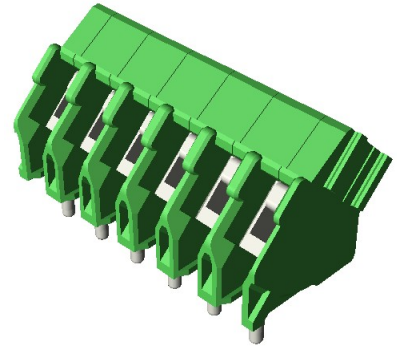

Due to the production process the appearance of the shown characters/symbols may vary from the original!

---

### 1 Main features

- |                                     |                     |                                  |        |
|-------------------------------------|---------------------|----------------------------------|--------|
| • Number of positions               | 6.0                 | • Nominal current                | 17.5 A |
| • Conductor cross section           | 1.5 mm <sup>2</sup> | • Nominal voltage                | 200 V  |
| • Color of housing (similar to RAL) | 6021                | • Conductor connection direction | 0 °    |
| • Pitch                             | 3.5 mm              | • Number of levels               | 1      |
| • Connection method                 | schraub_buegel      |                                  |        |

## 2 Item properties

Solution ID:		SKPQR
Product range		PTA 1,5
Pitch		3.5 mm
Number of positions		6.0
Connection method		schraub_buegel

### 2.1 Connection capacity

Conductor cross section solid		0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross section flexible		0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross section AWG / kcmil		26 ... 16
Conductor cross section flexible, with ferrule without plastic sleeve		0.25 mm <sup>2</sup> ... 0.75 mm <sup>2</sup>
Conductor cross section flexible, with ferrule with plastic sleeve		0.25 mm <sup>2</sup> ... 0.75 mm <sup>2</sup>
Stripping length		5 mm

### 2.2 Material data

Material of metal parts		
Note		WEEE/RoHS-compliant, free of whiskers according to IEC 60068-2-82/JEDEC JESD 201
Contact material		Cu alloy

Insulating material data		Housing
Insulating material		PA
CTI according to IEC 60112		600
Inflammability class in acc. with UL 94		V0
Color of housing (similar to RAL)		6021

### 3. Configuration information

Due to the production process the appearance of the shown characters/symbols may vary from the original!

