
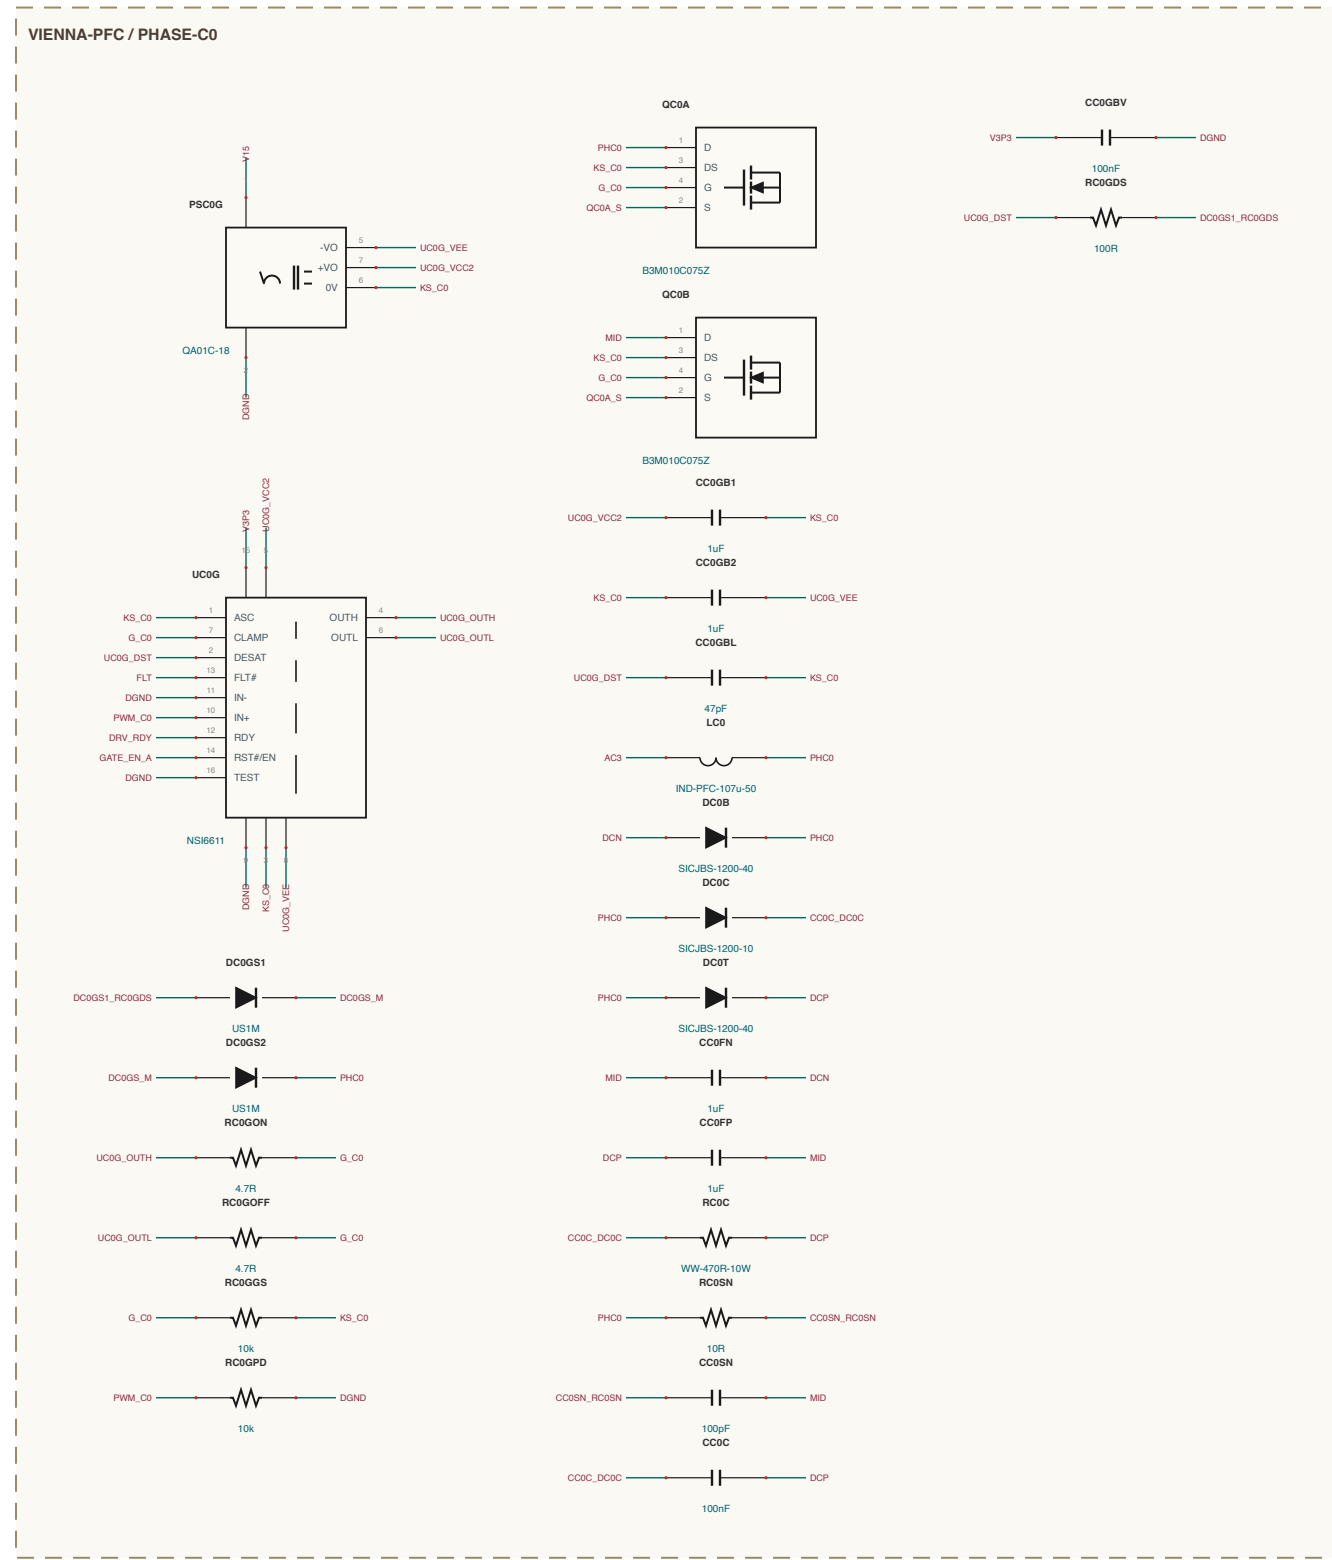
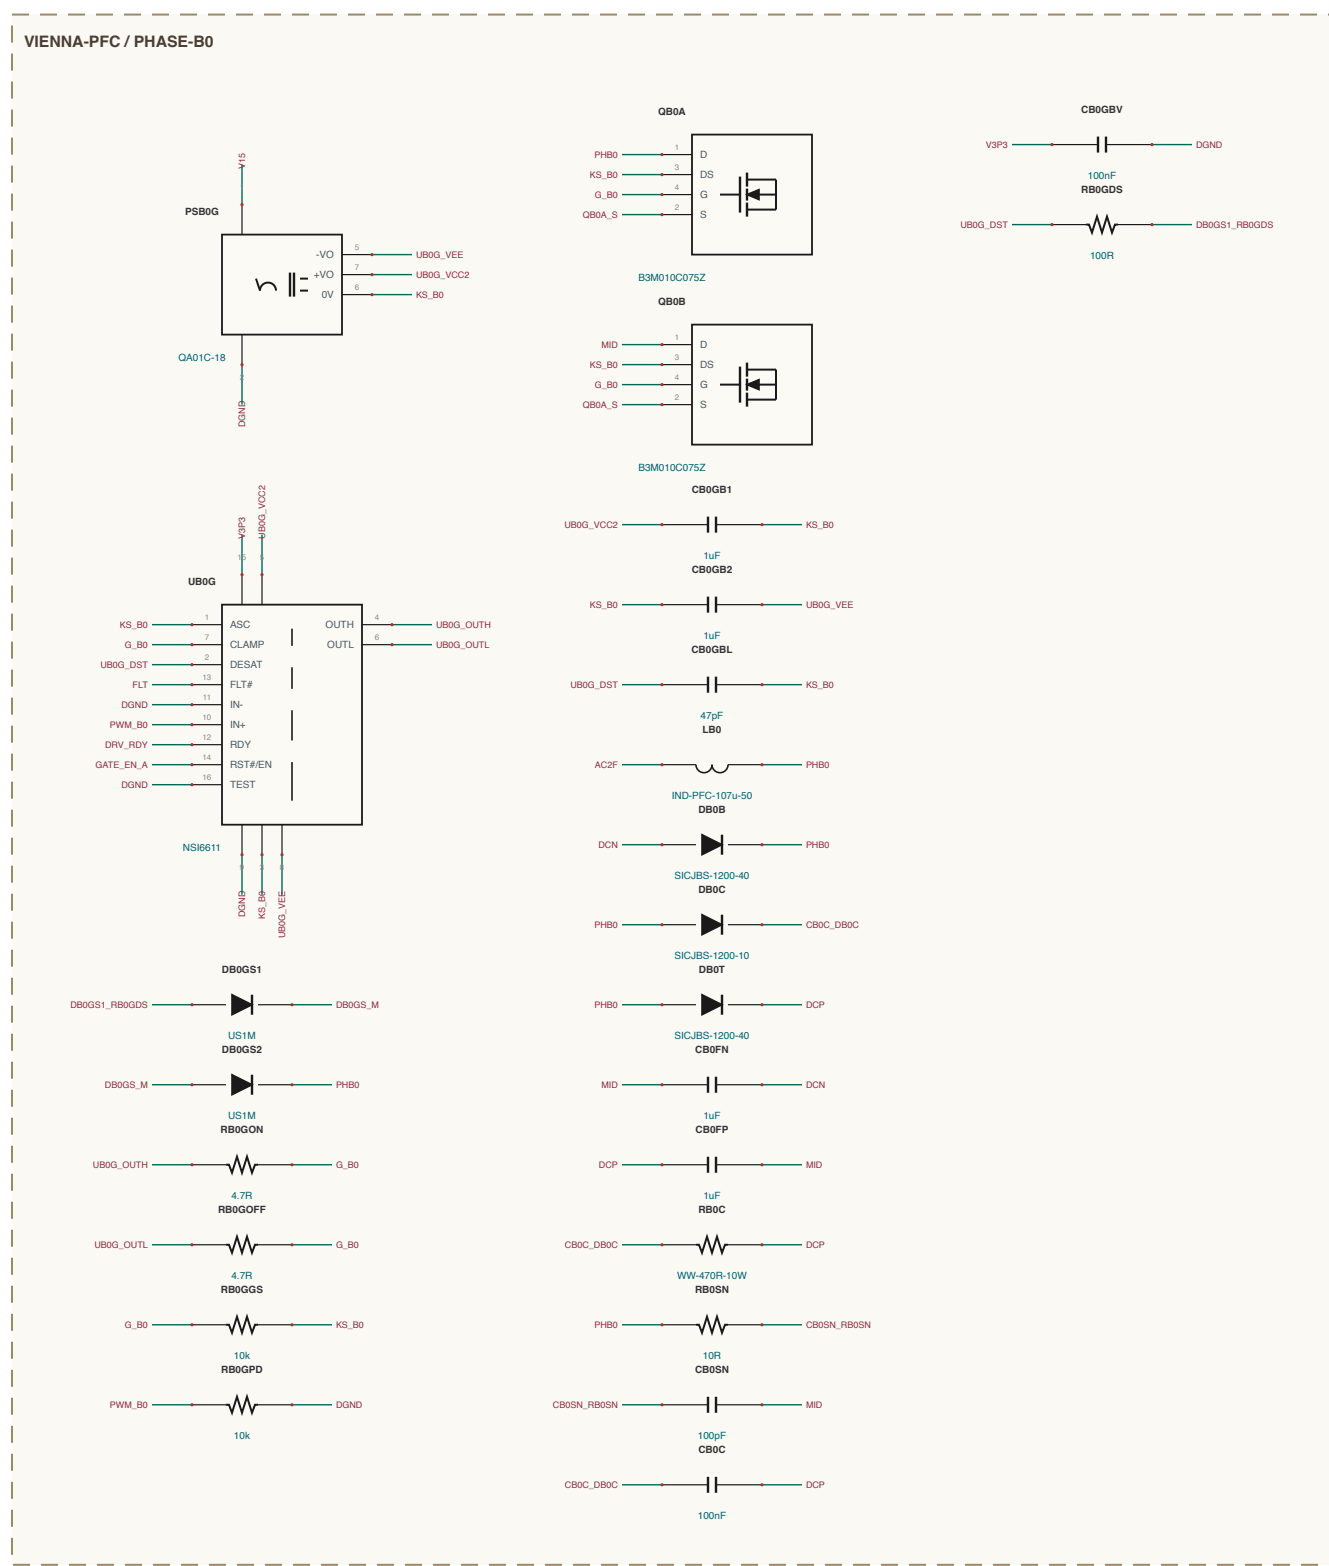
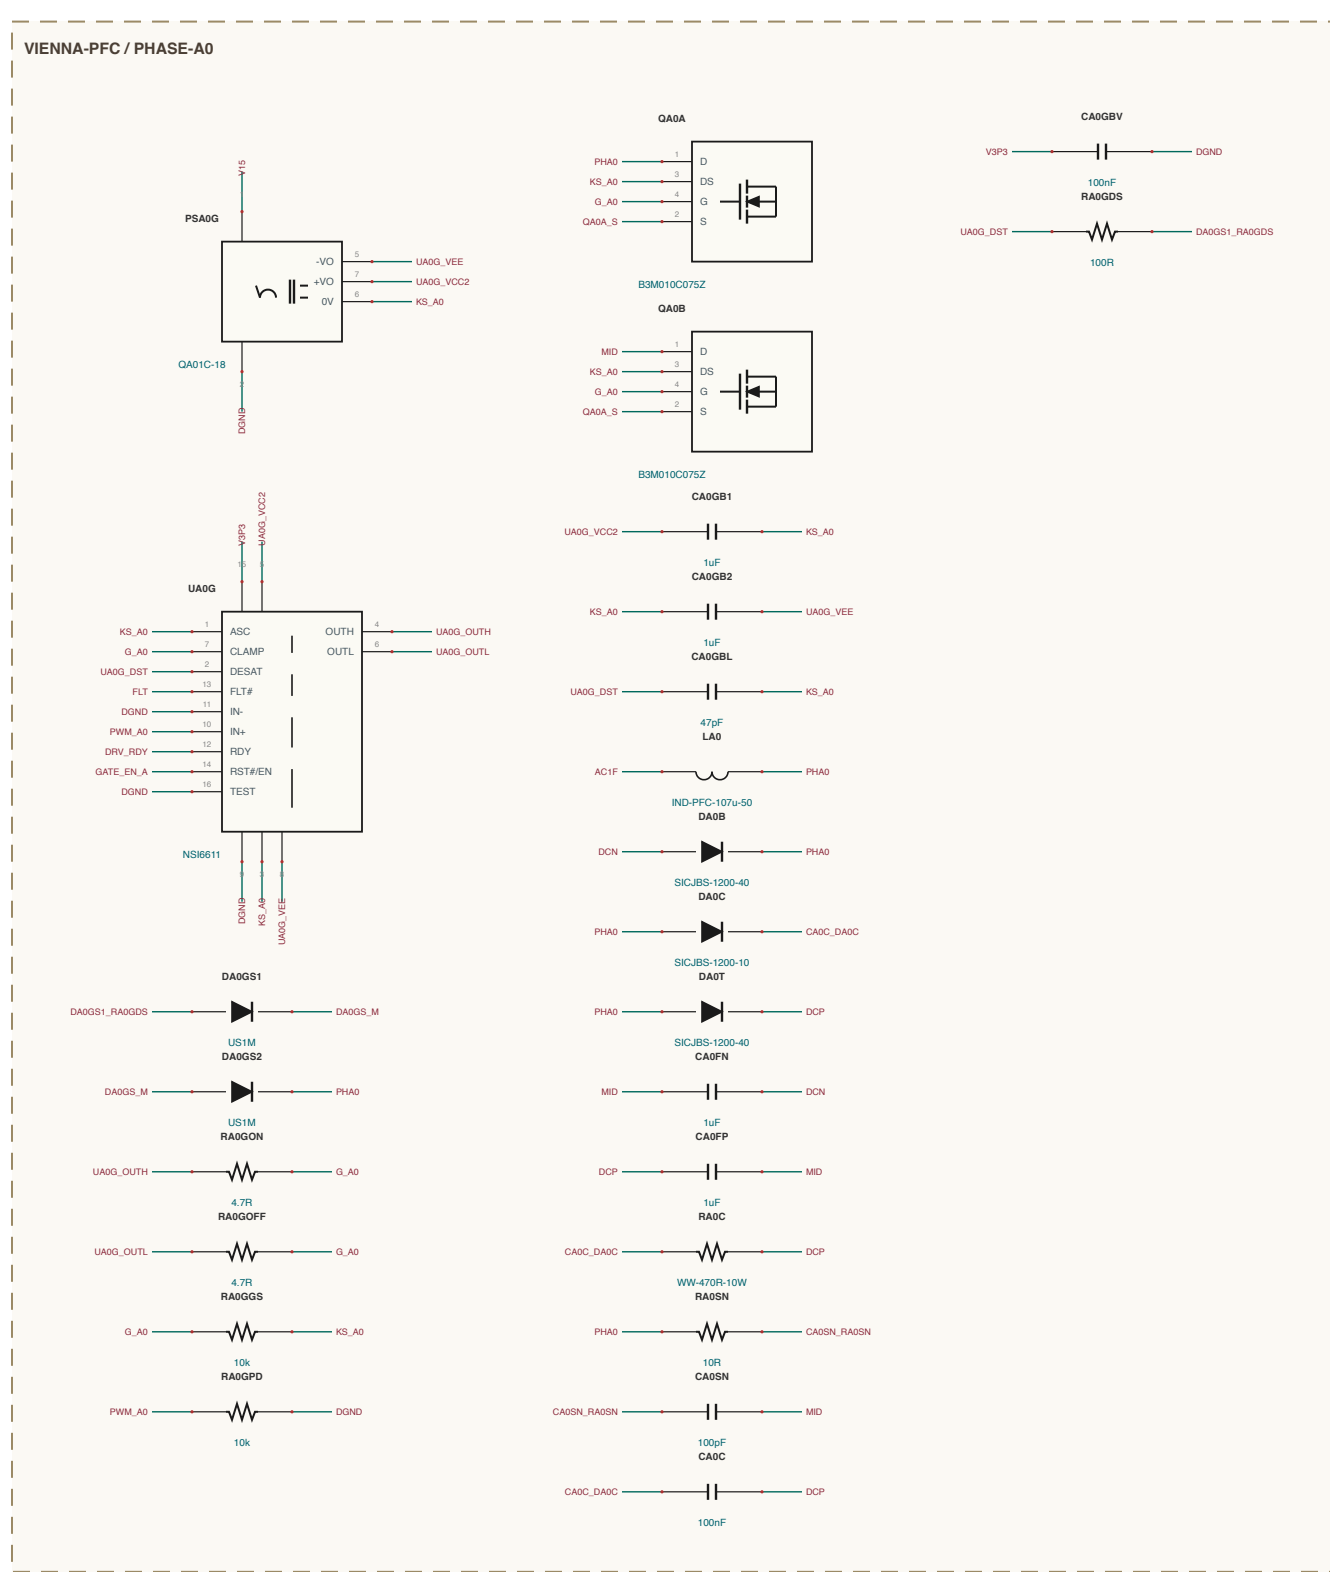
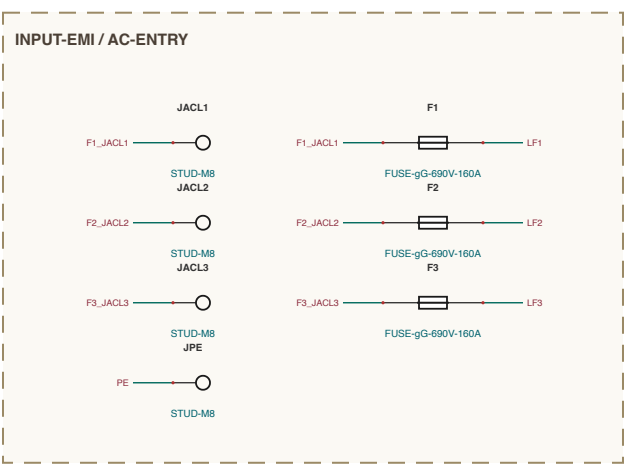
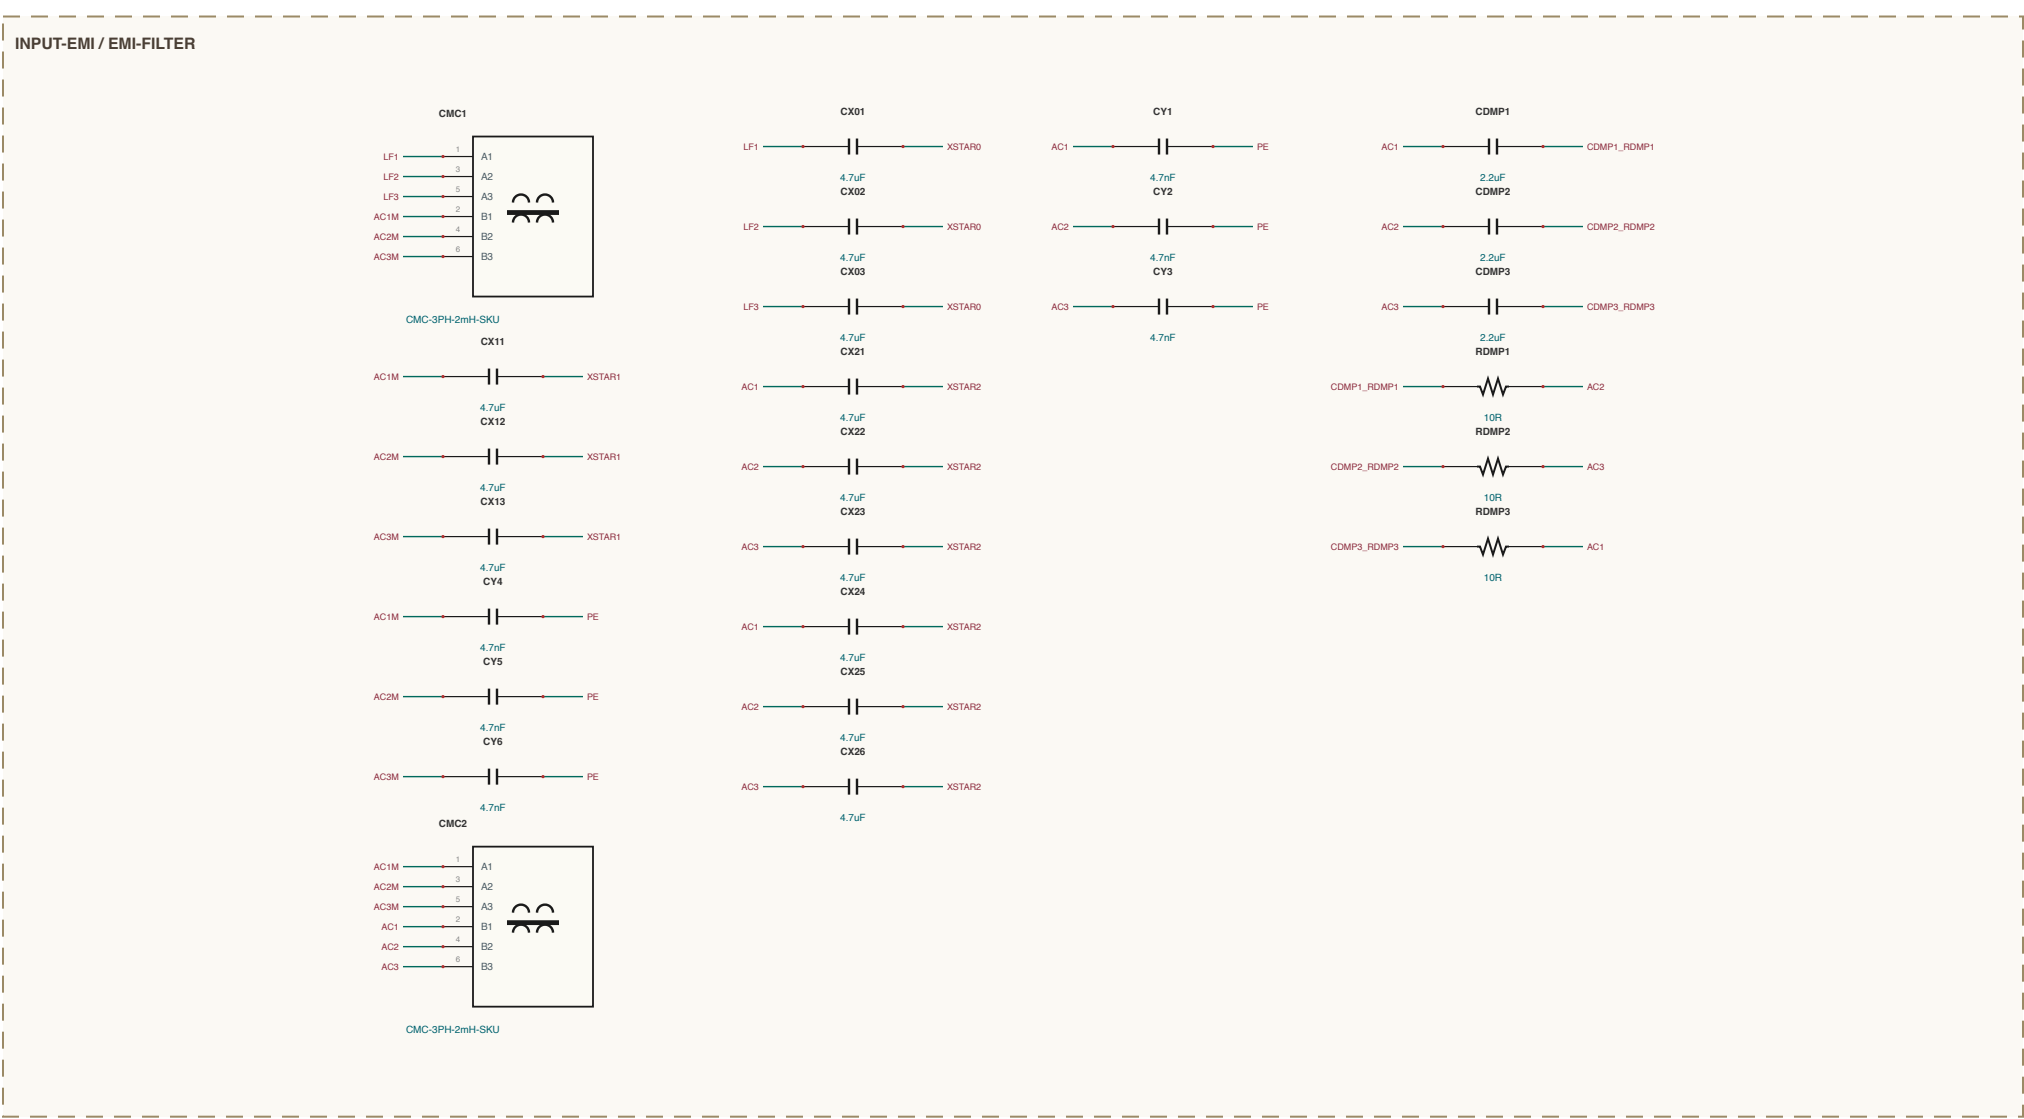
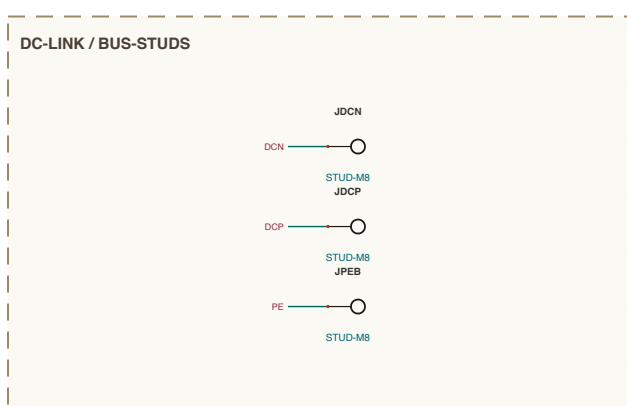
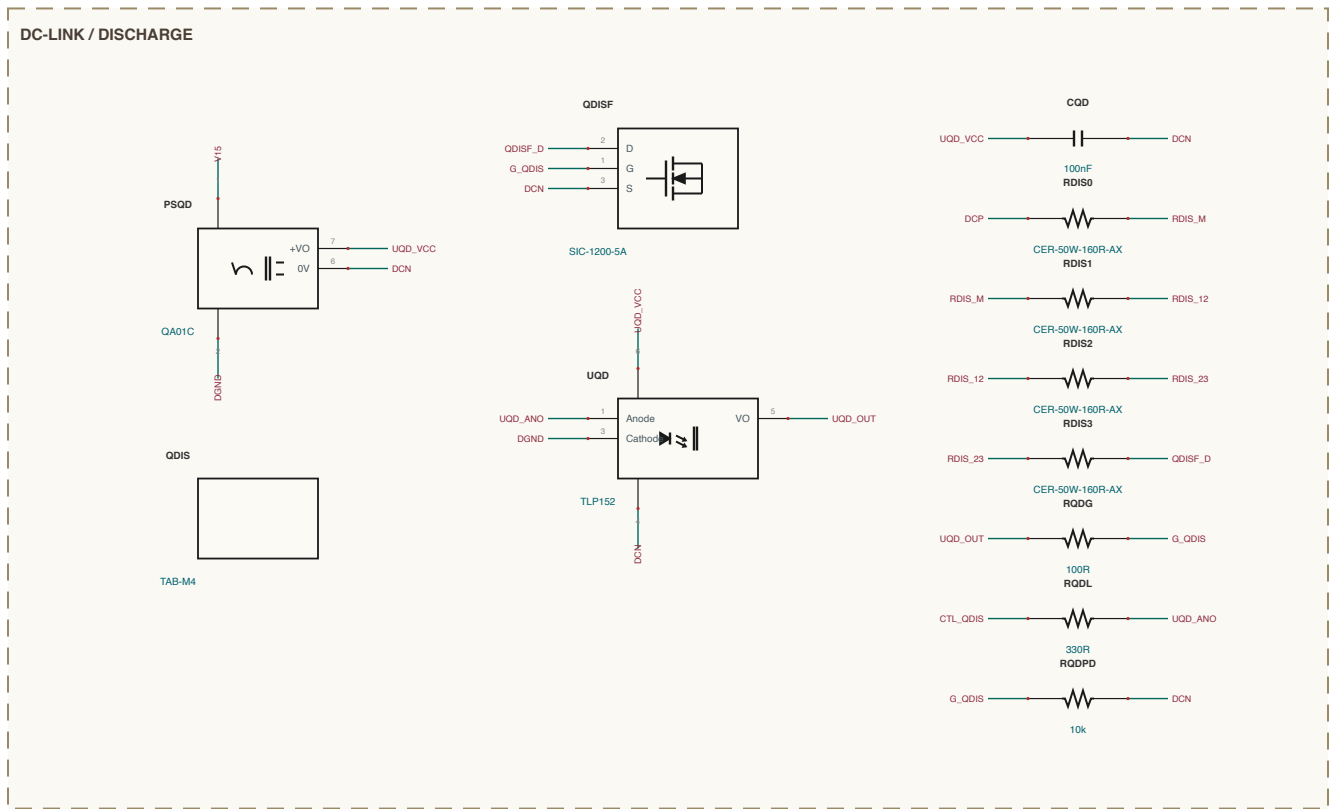
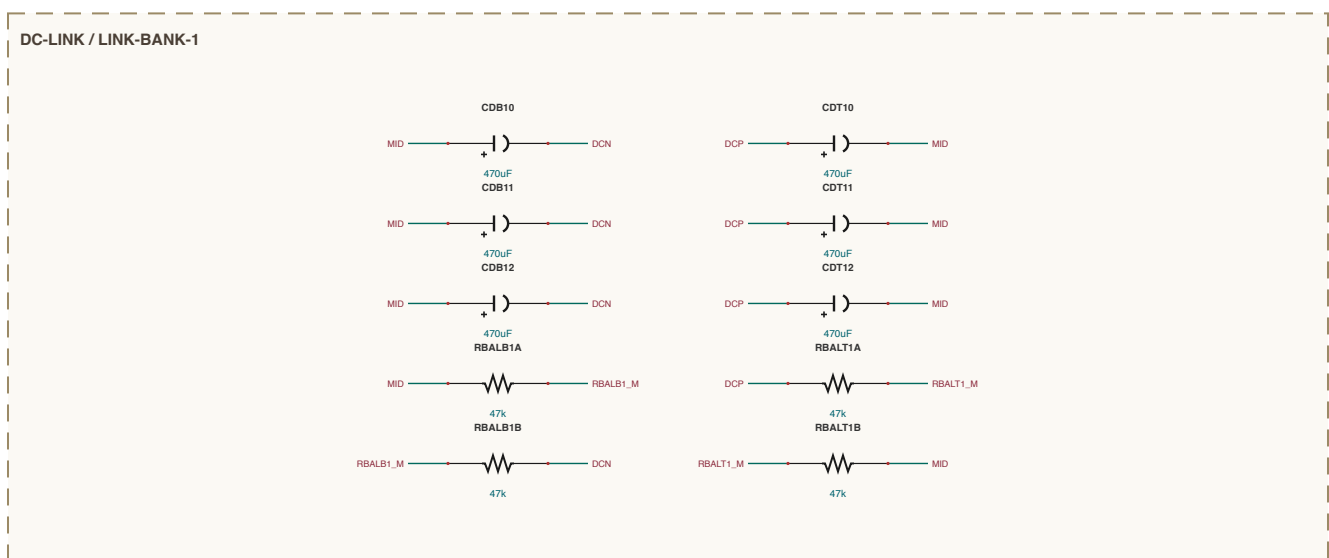
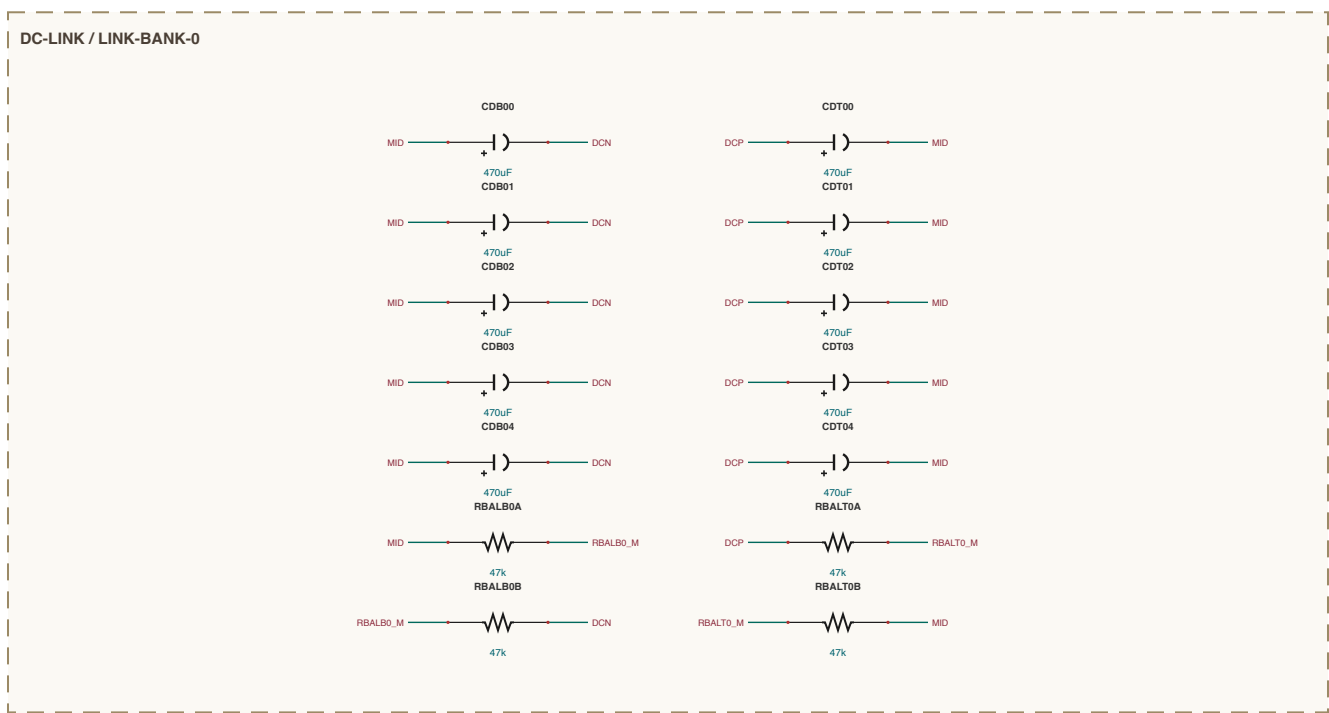
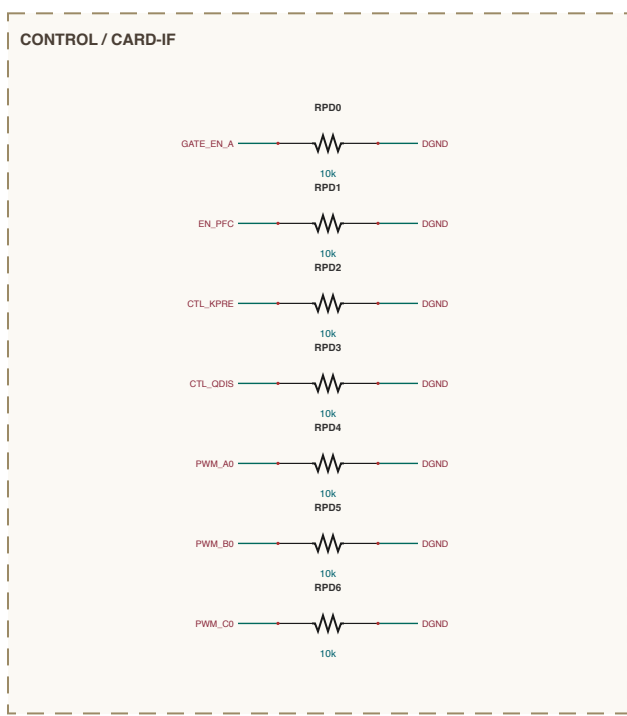
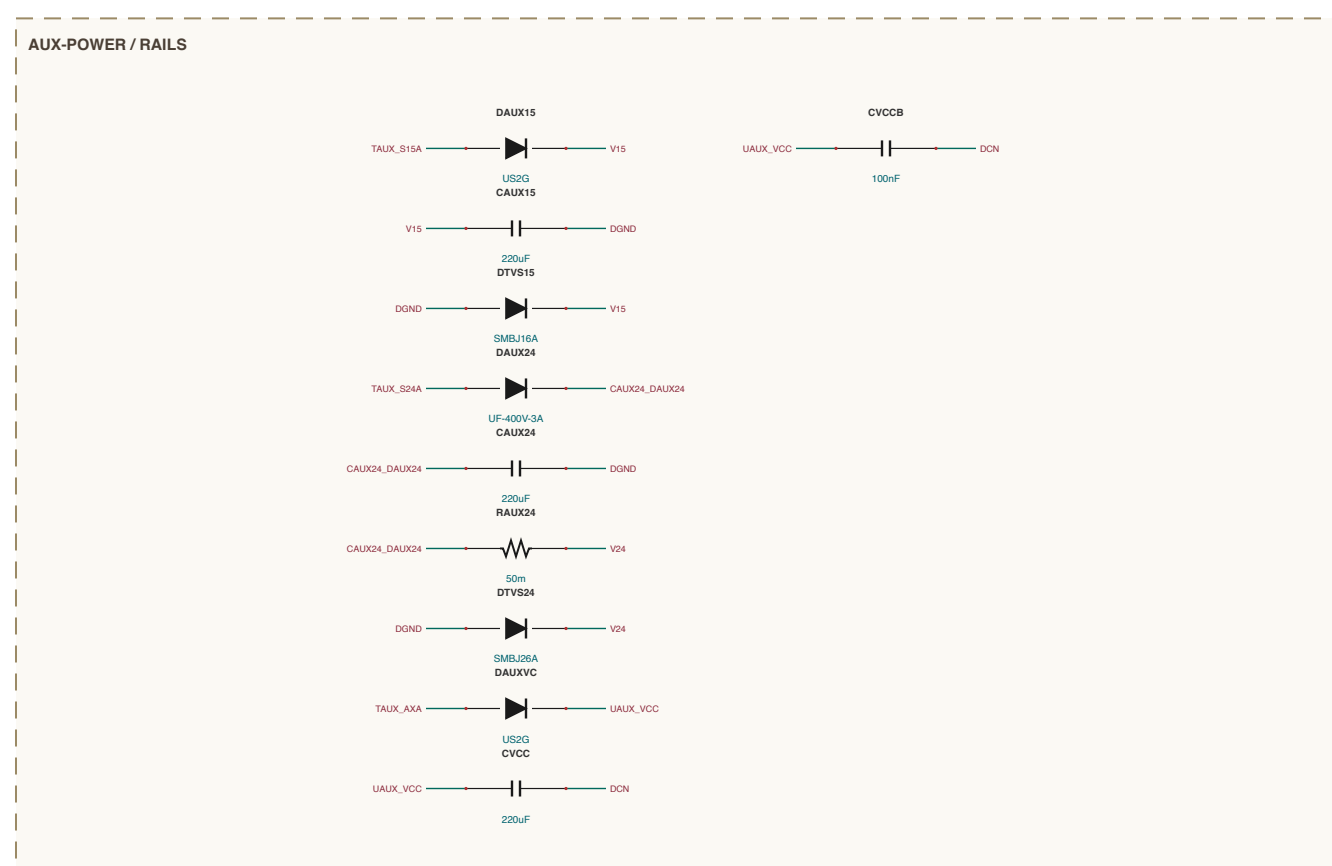
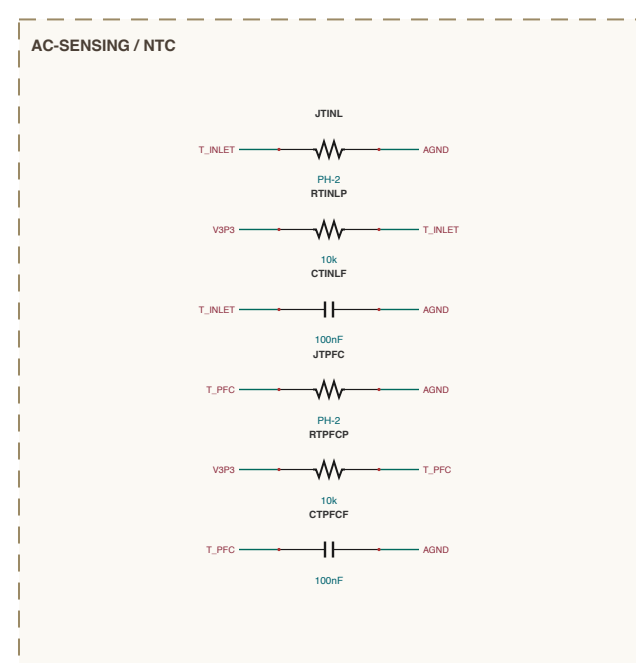
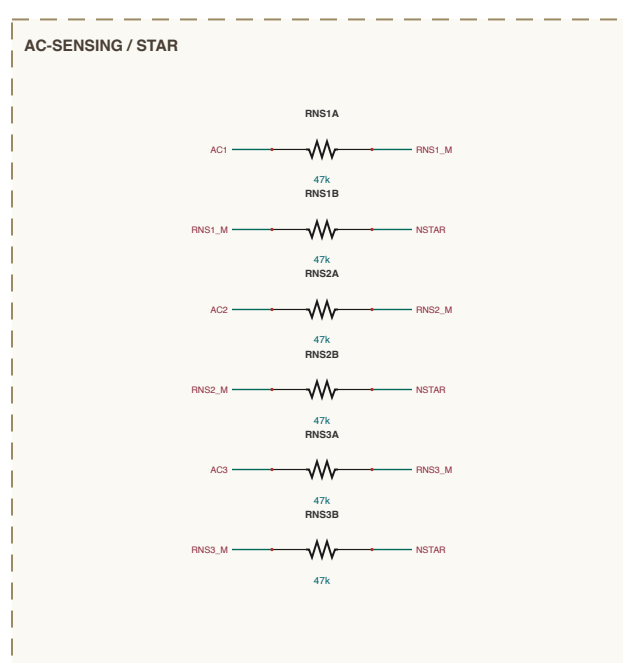
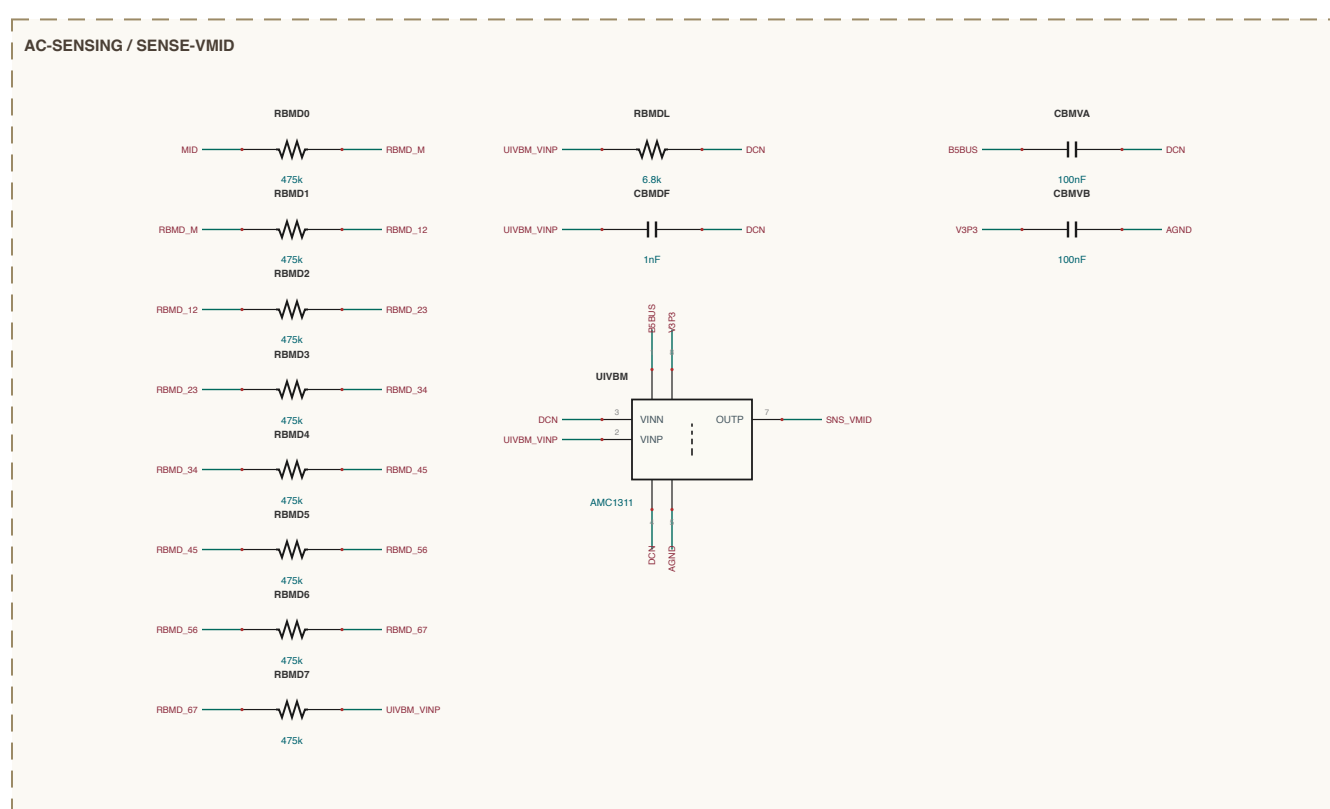
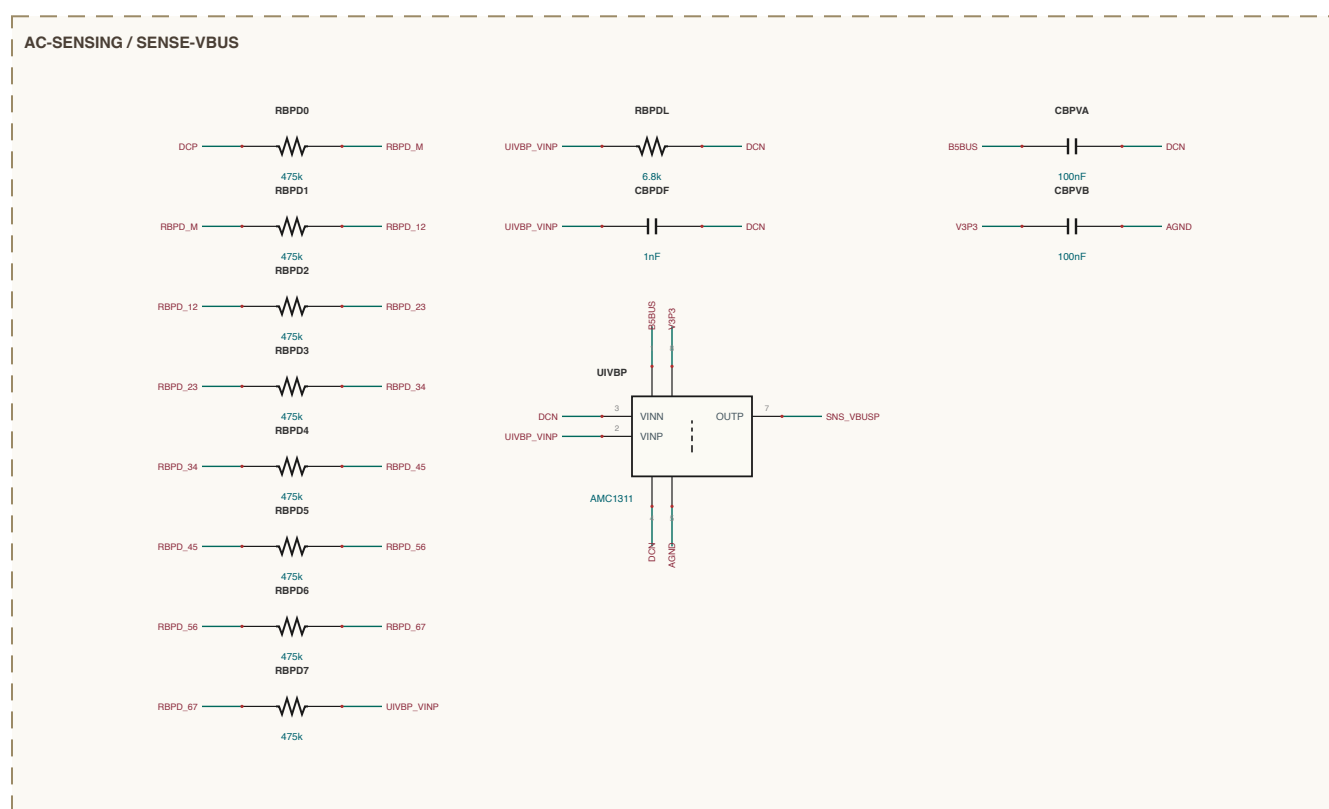
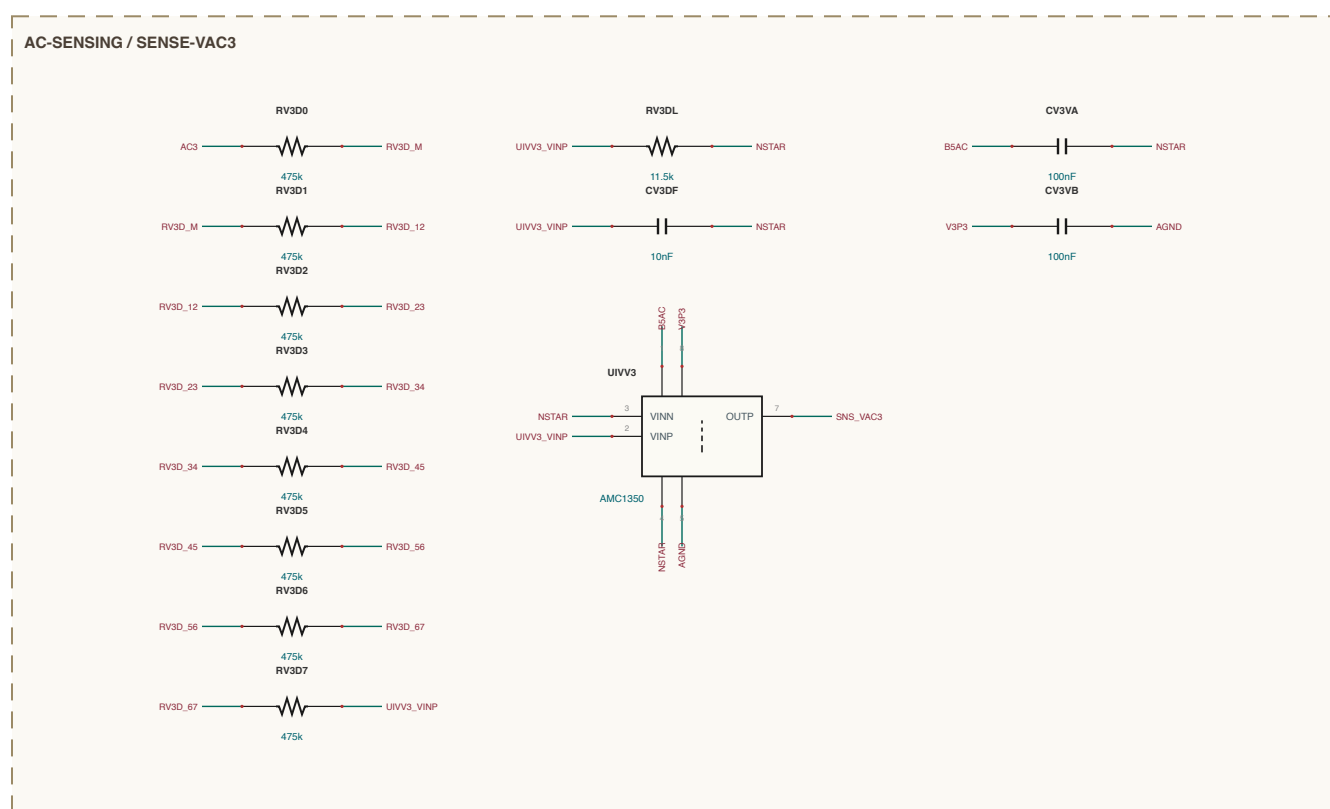
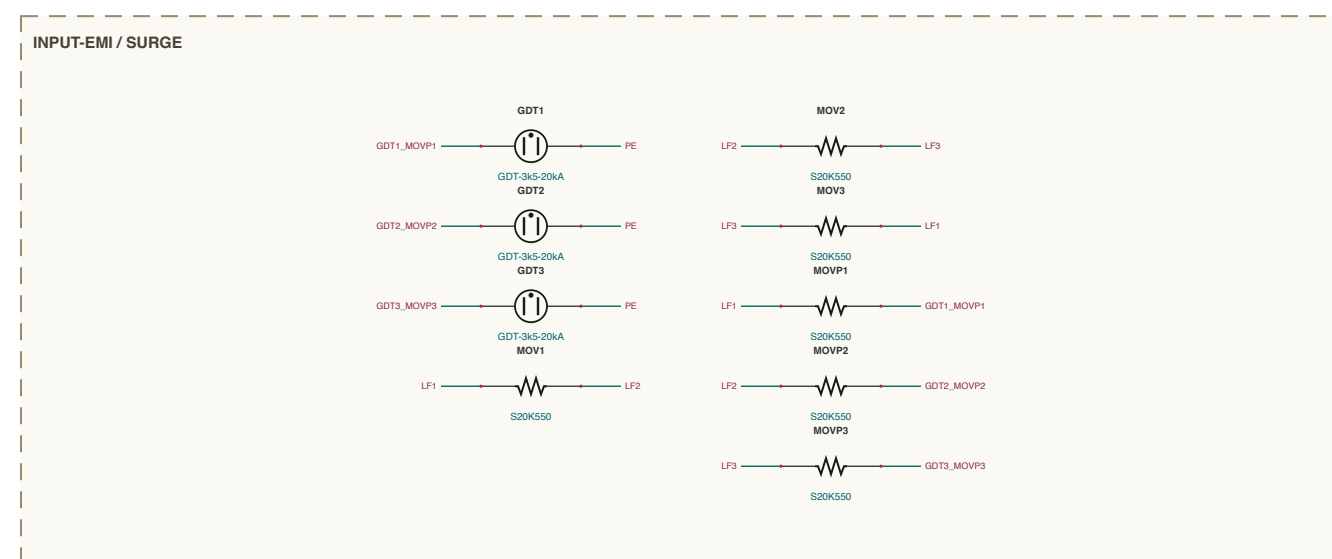
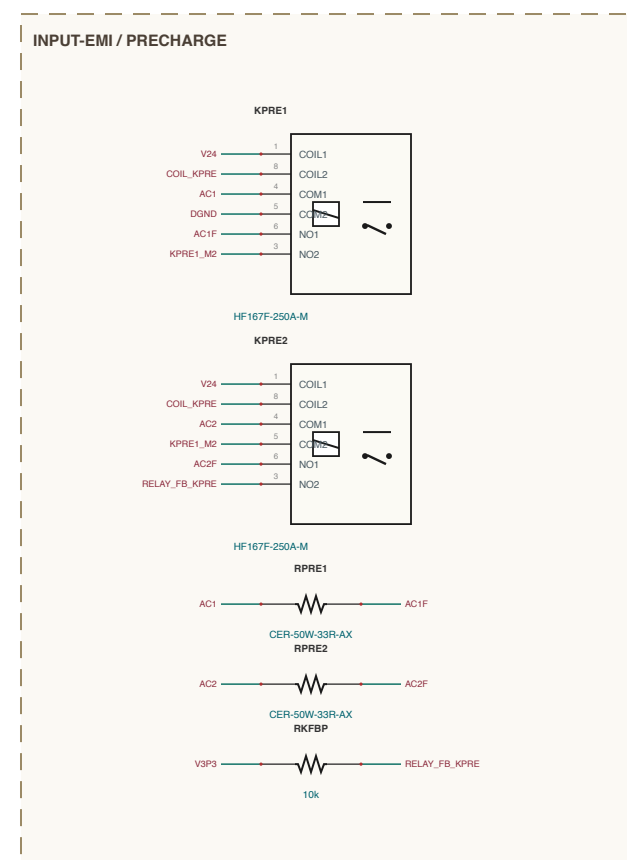
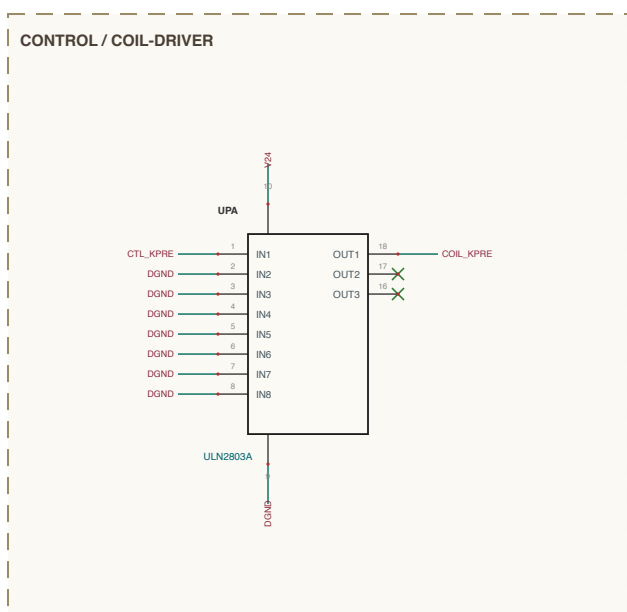
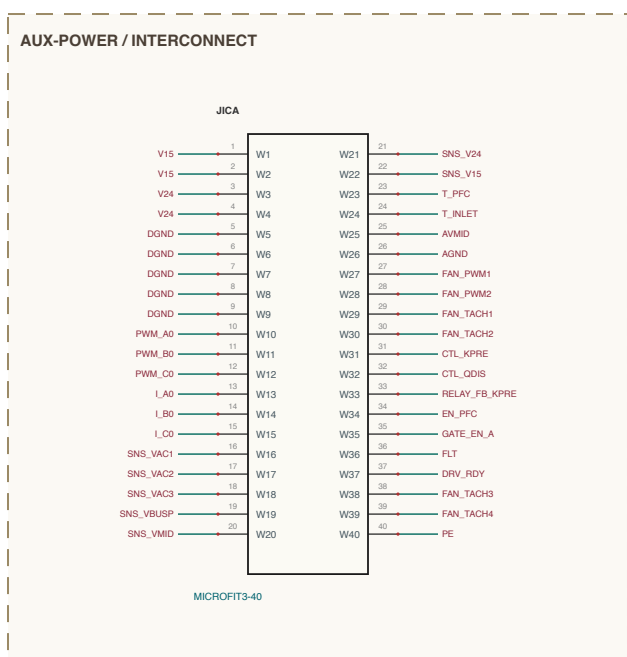
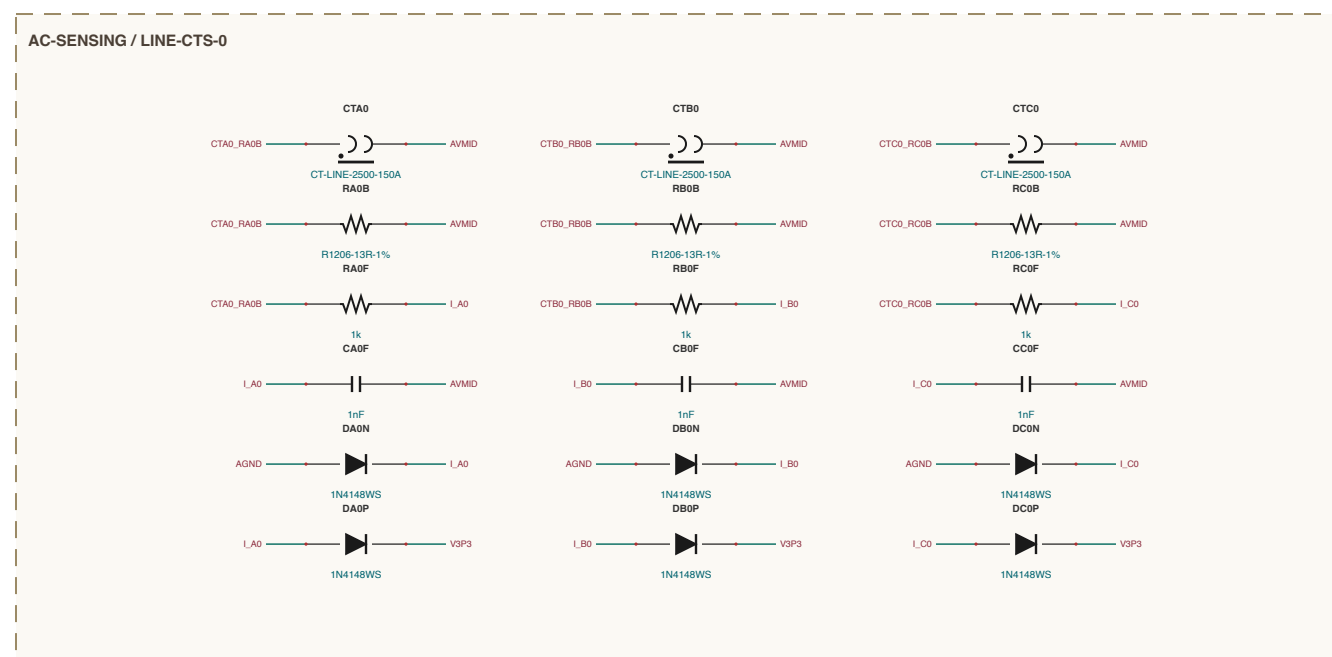
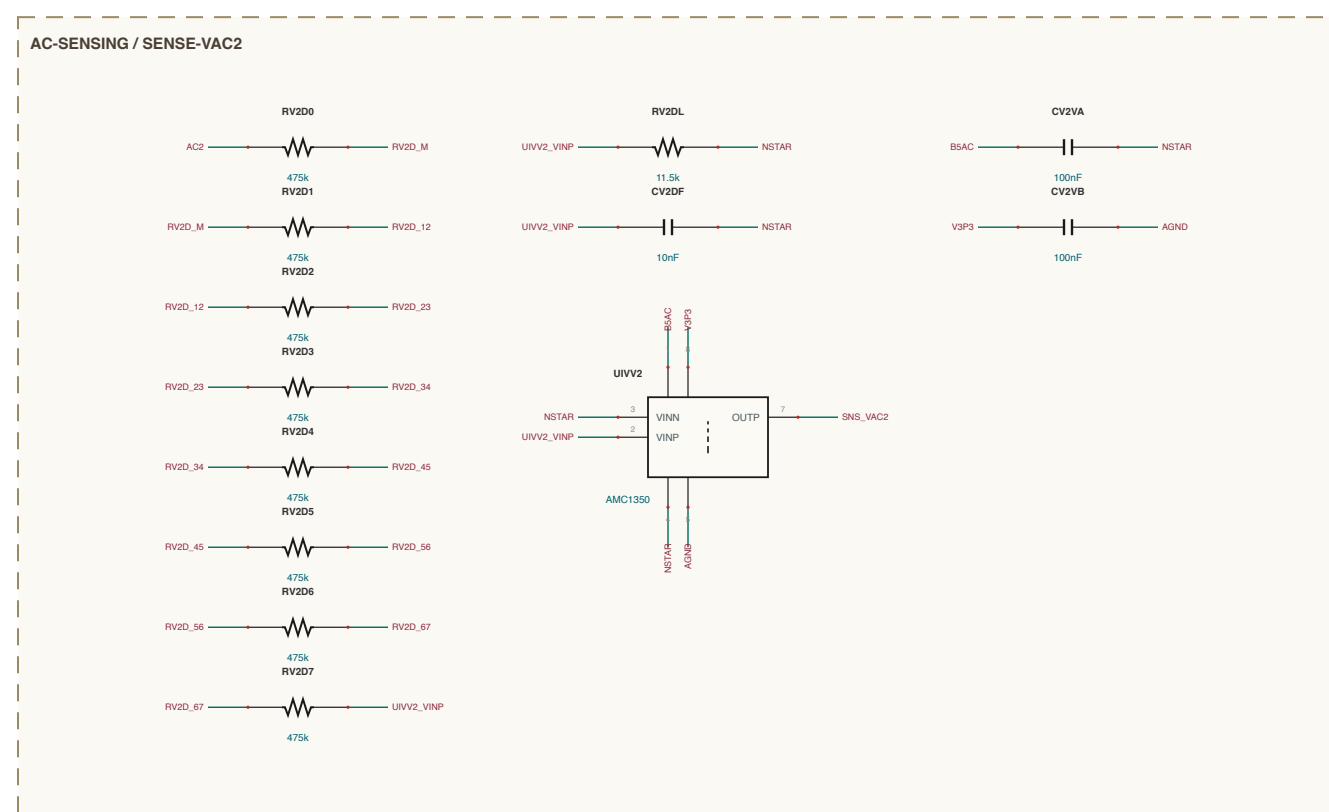
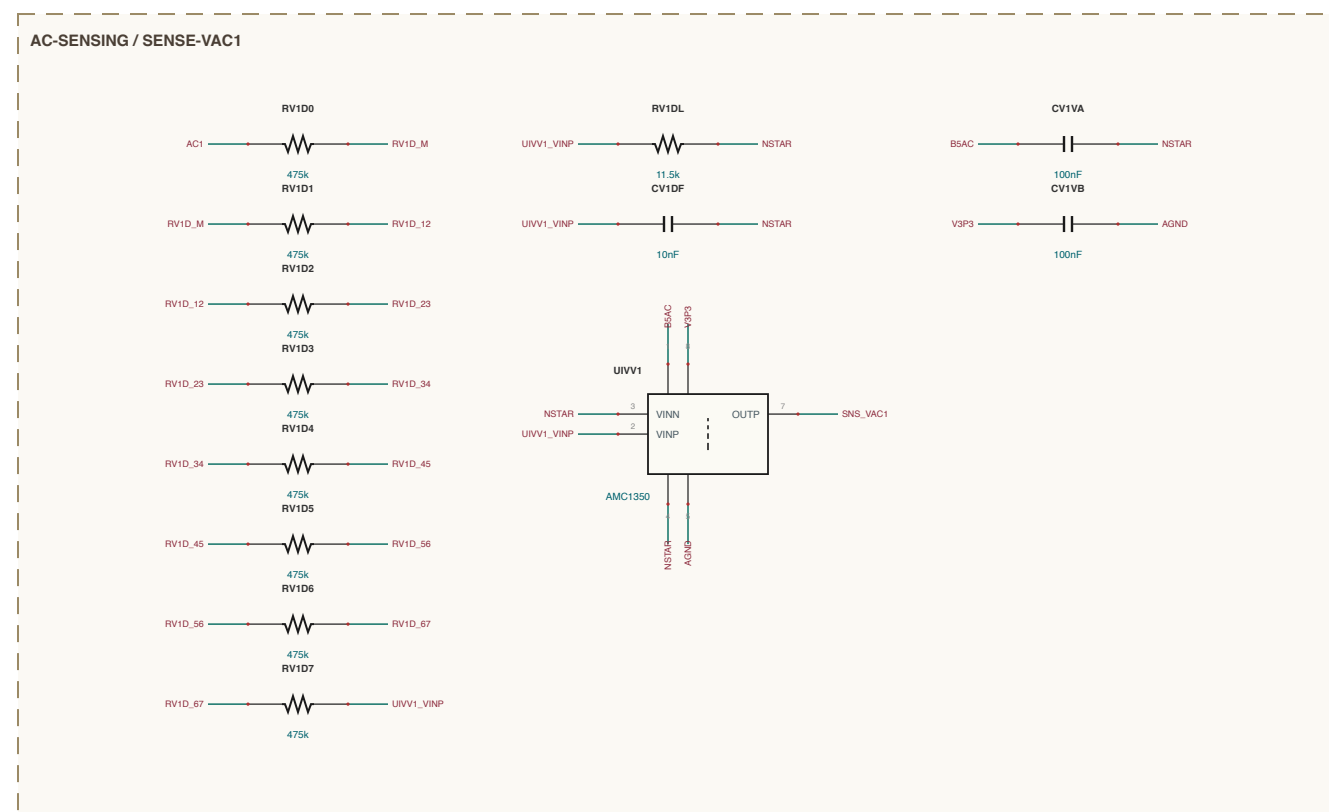


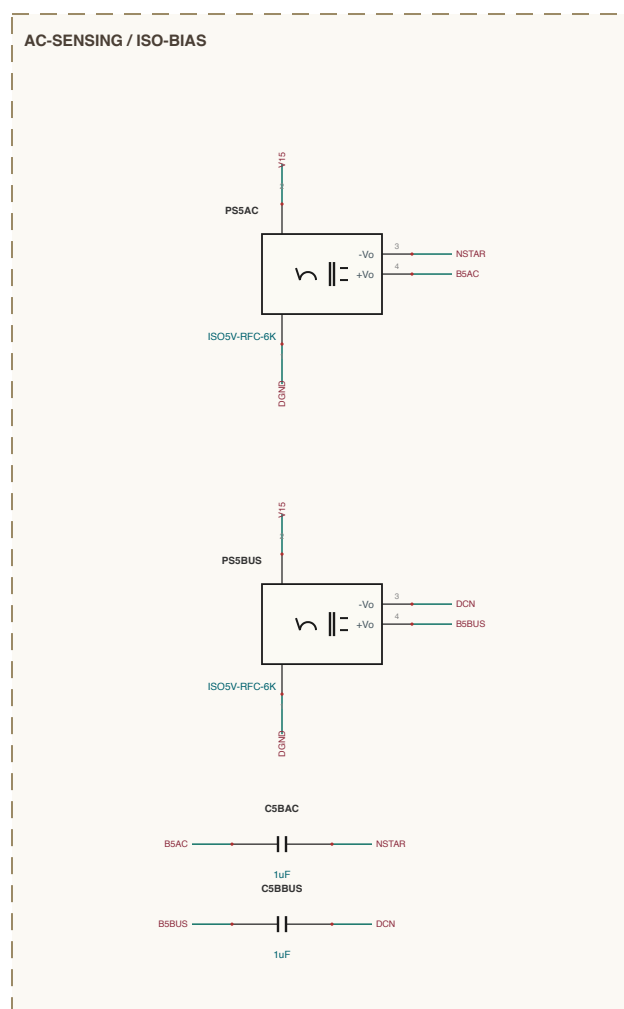

```
SHEET INDEX
|
| 05 KW 7 - 7 of 2
|
|
| AC SCHWING - 9 sections
|
| KOLPOVED - 6 sections
|
| CONTROL - 4 sections
|
| DC LPM - 4 sections
|
| RNPV BSH - 4 sections
|
| VERBOD PFC - 3 sections
|
|
|
|
| res-0.4 - 28 sections - 332 components
```

NET NAMING

Internal junctions are named for what they join

junctions, nFiles route at that IC pin e.g. UNICA_VMP

Systems, M midpoint of a series pair e.g. SBALTA_M

Systems, vmtm tap between Systems with e.g. RVND_01

all others are explicit design nets

MAGNETIC CONSTRUCTION

Identify per [doc/magnetics.aid](#) (turns, gap, IRL, acceptance lines etc there)

D1 LAD L02: 5x 179 28u sanduot (C97AL00 162), NdFe ≈ 1 x2 101 to LO L07AL, μ =0.041 0/129.5A μ (E31)

E88 E88: CNE1 + 13x 82 4.7u f in 3 star stages + CNE2 + PC damper; D4 DM shoken dished

at TAMM facilities