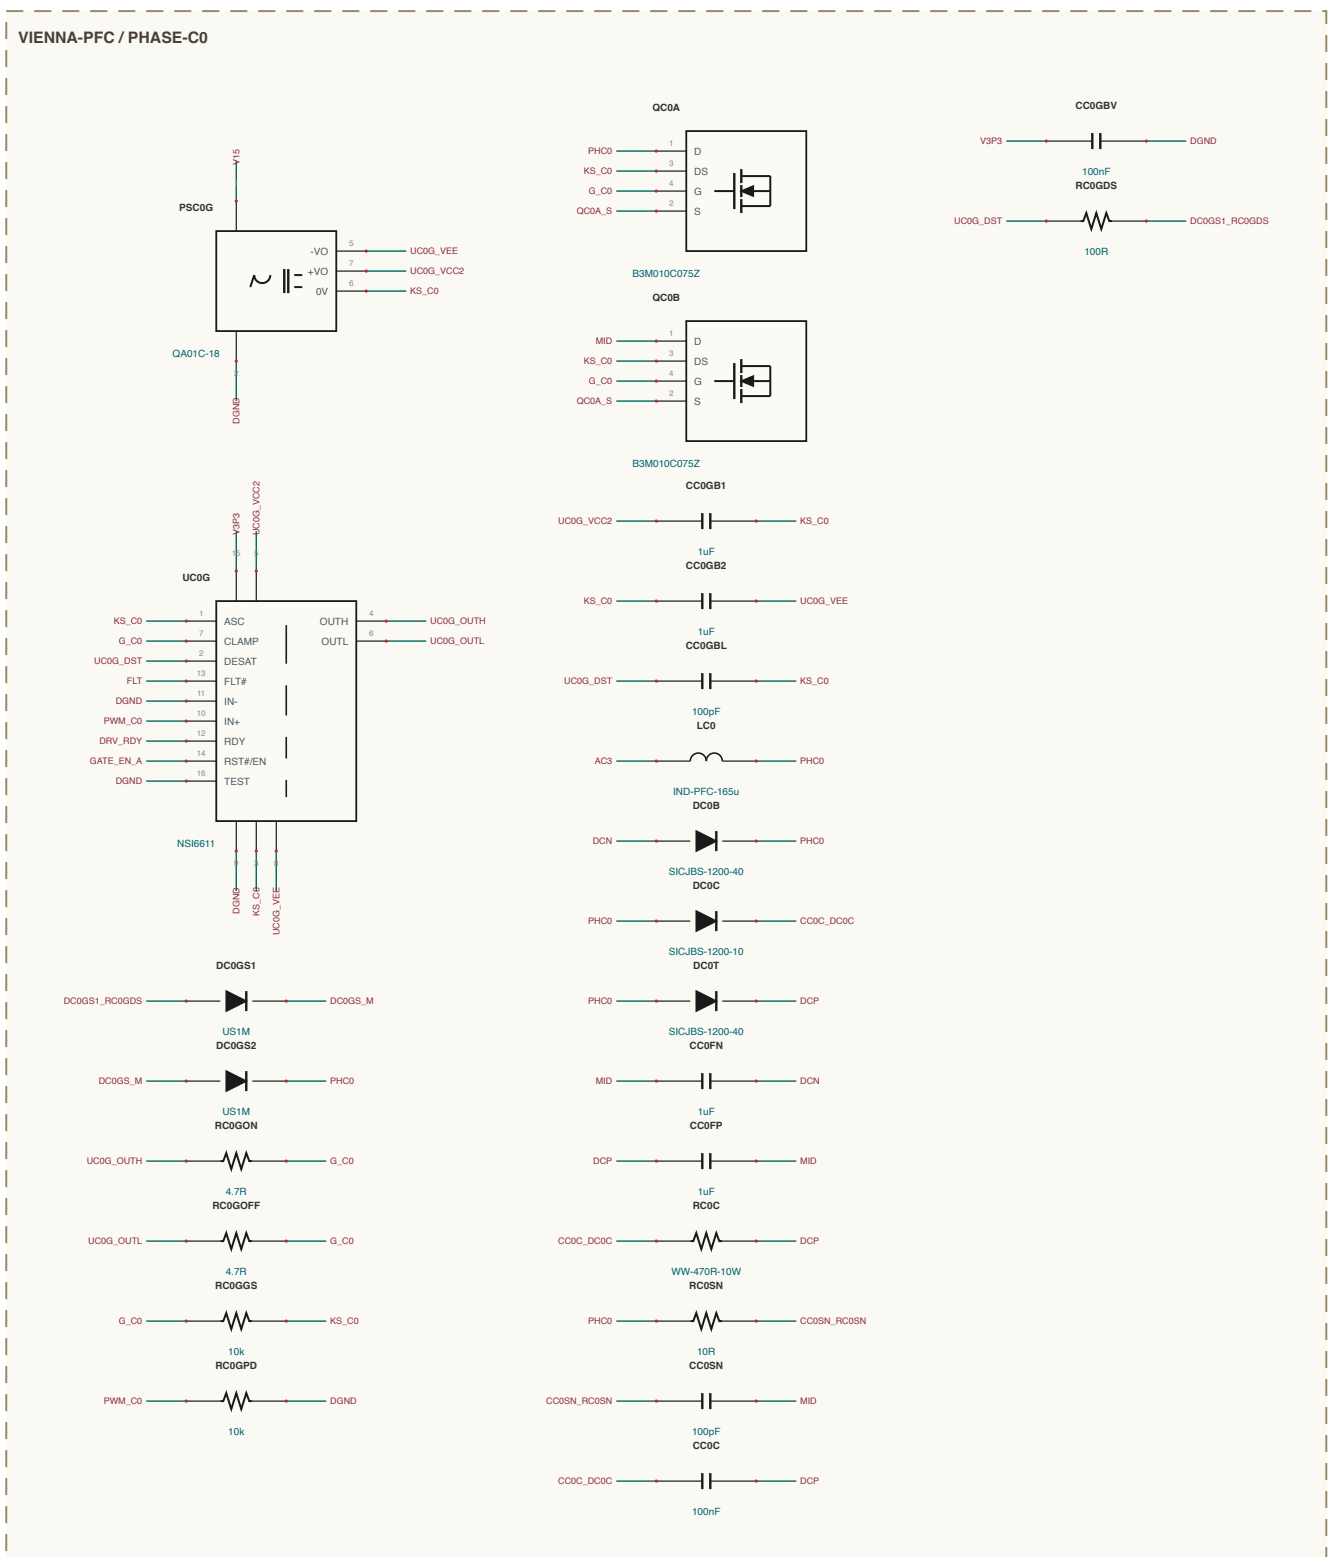
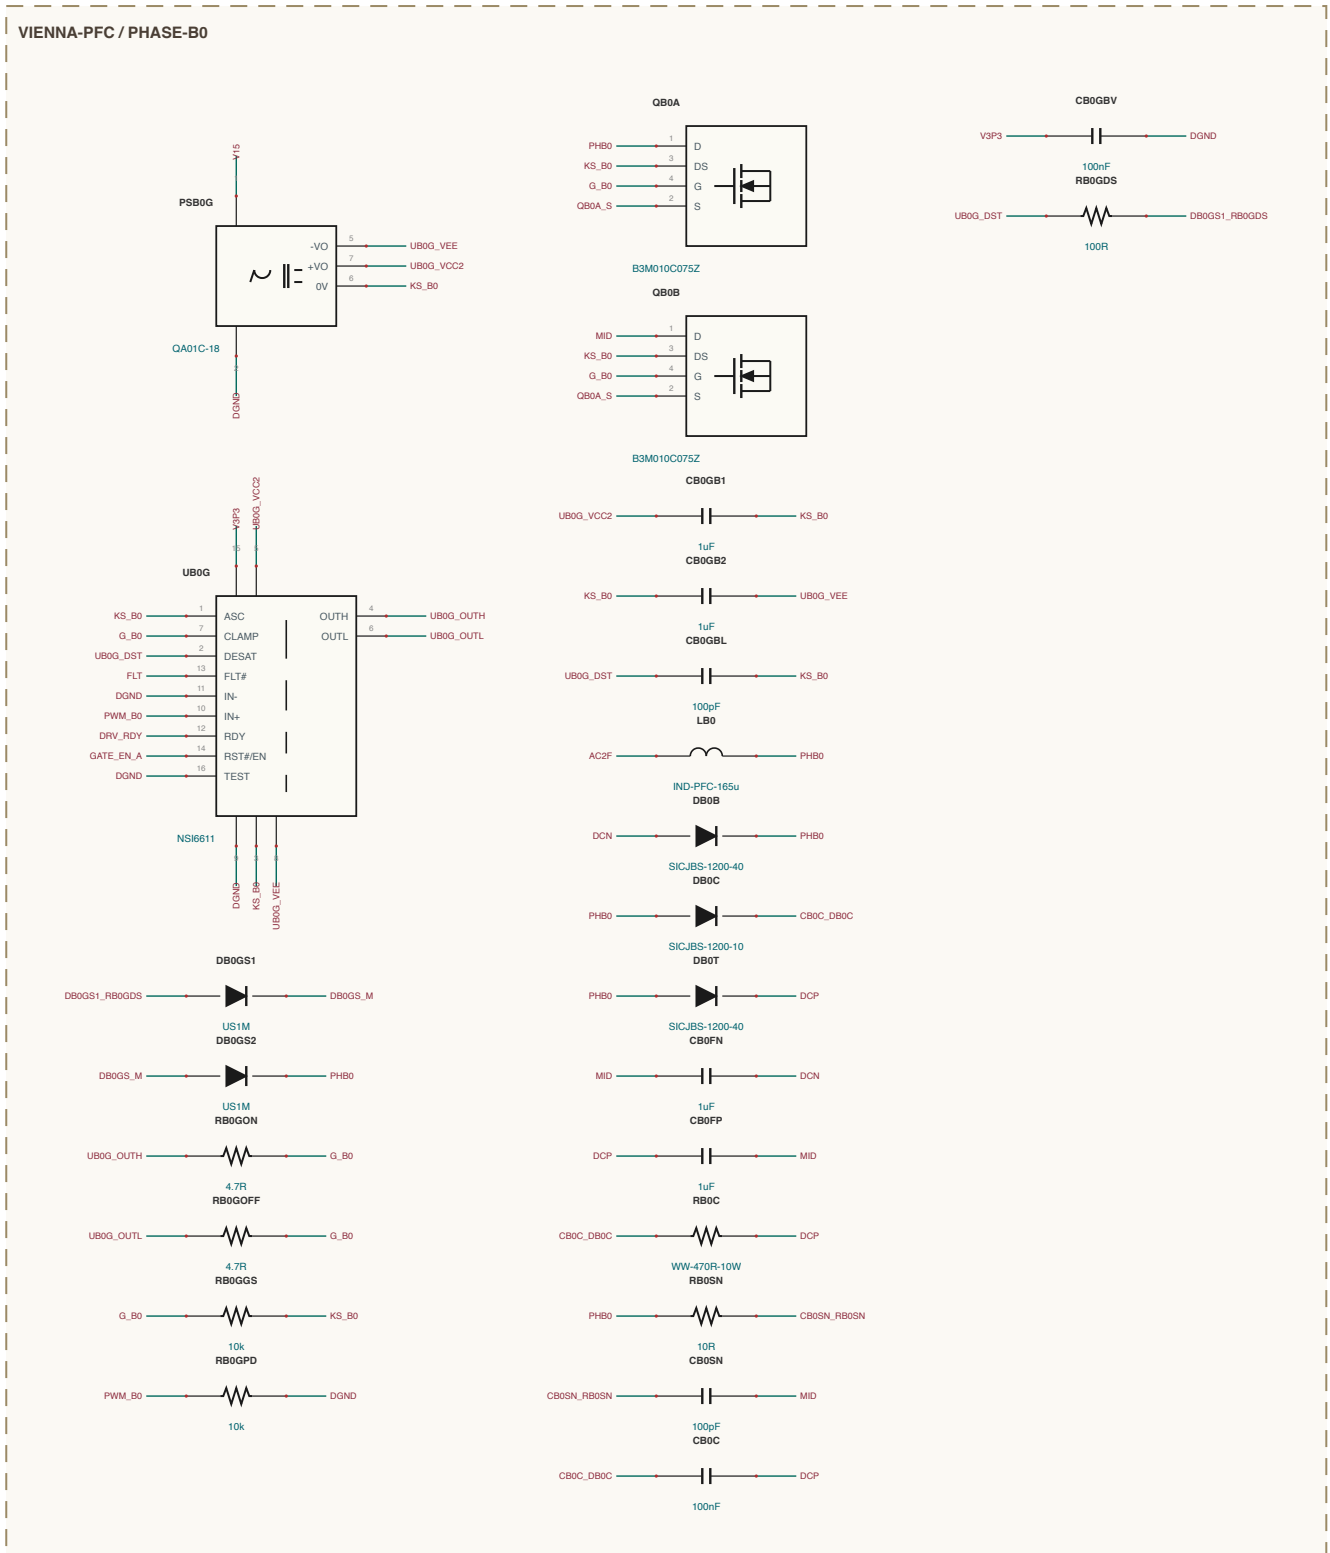
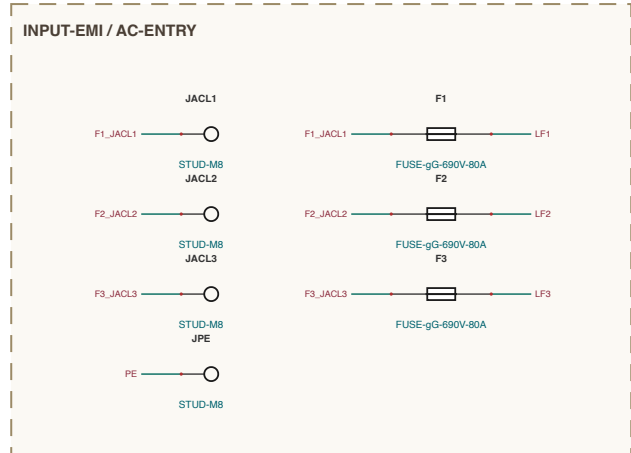
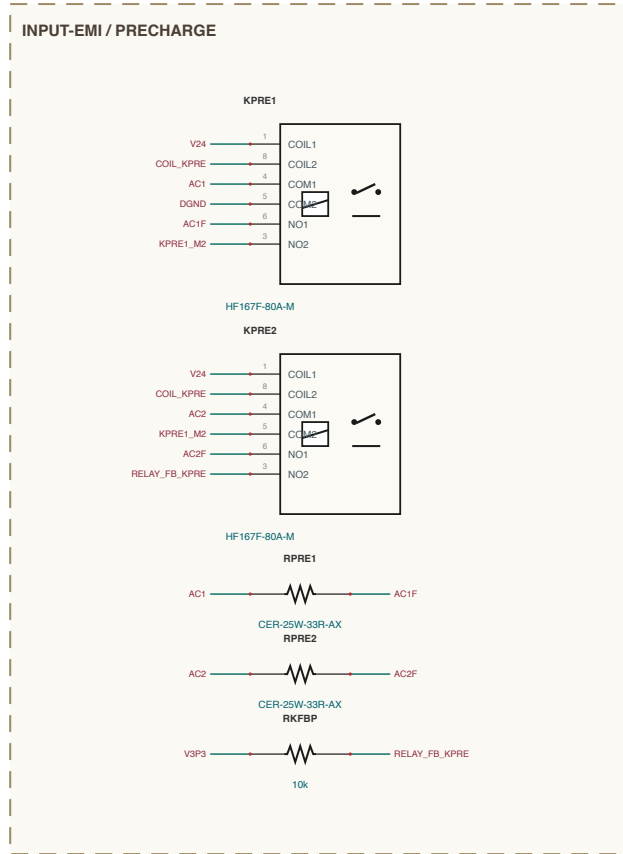
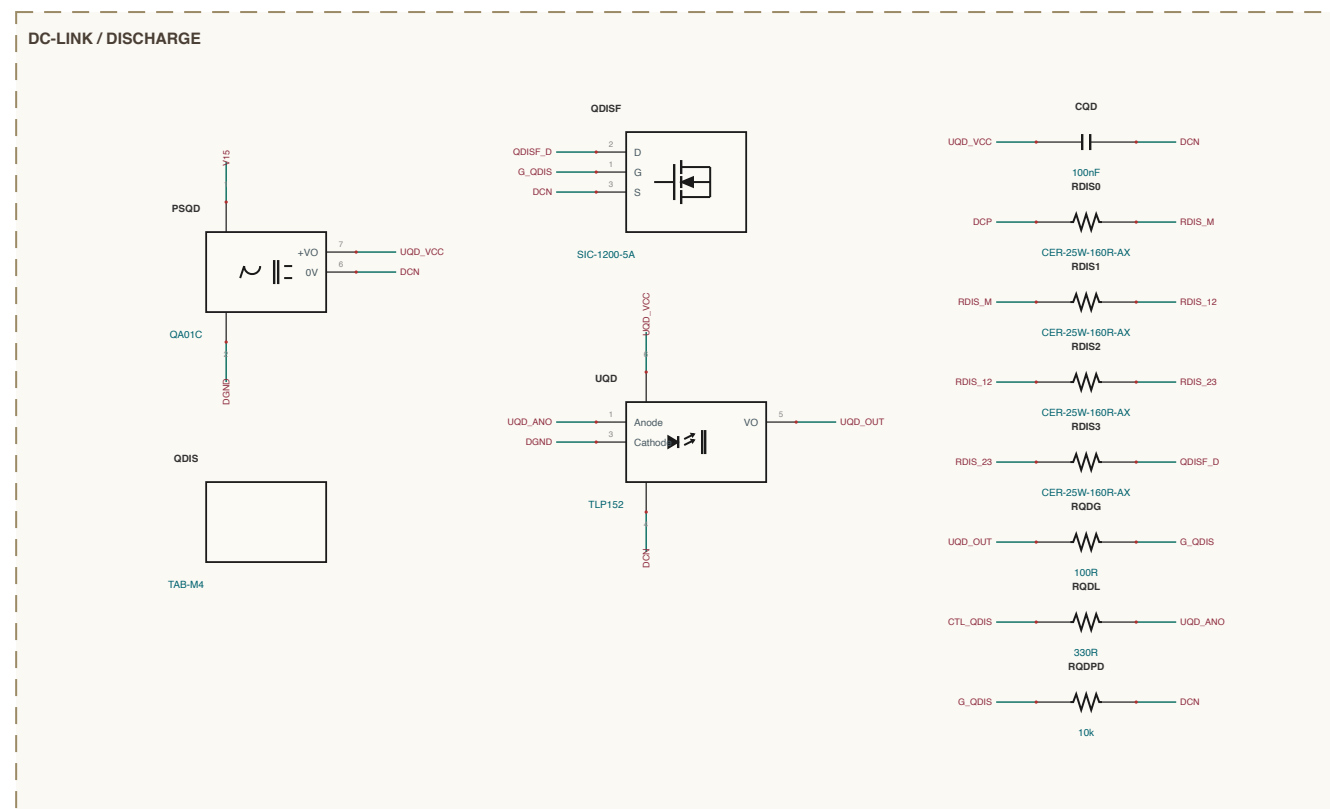
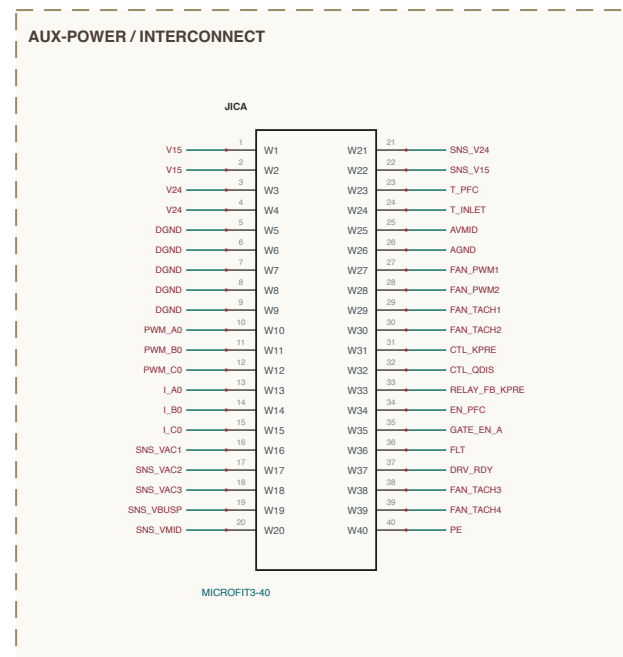
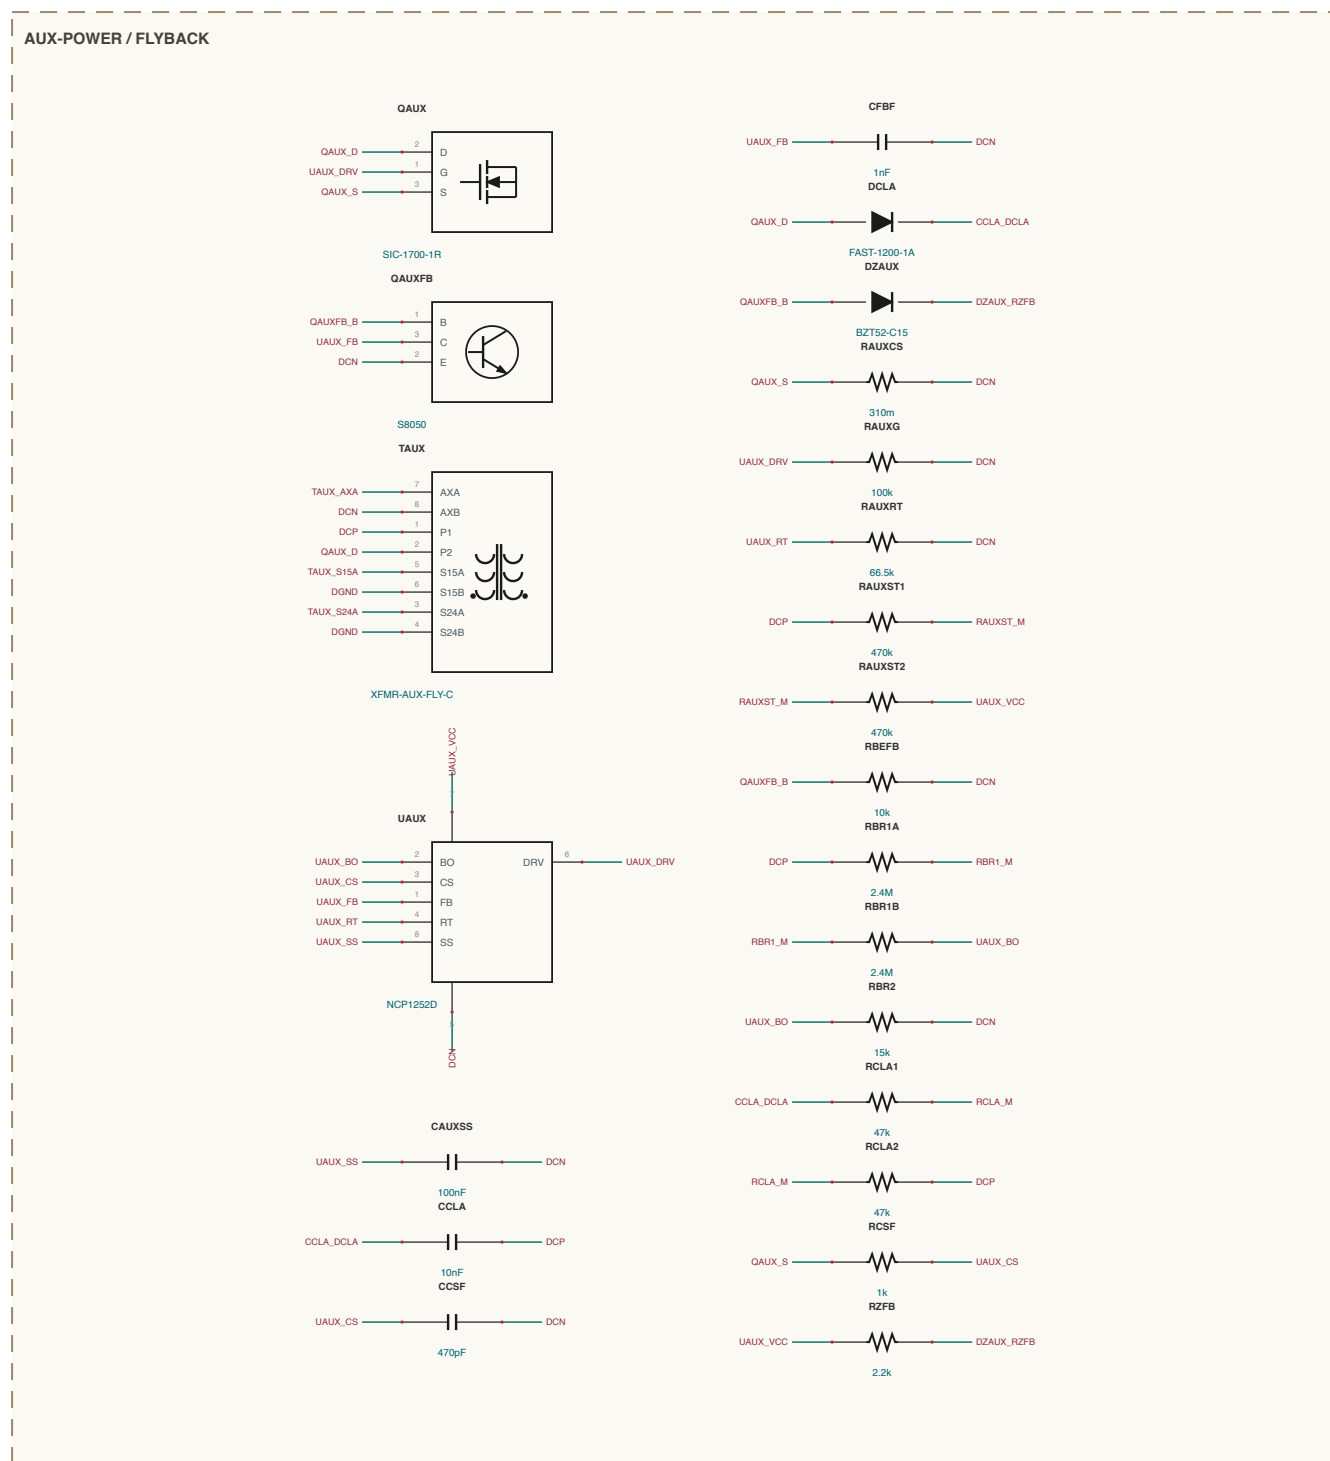
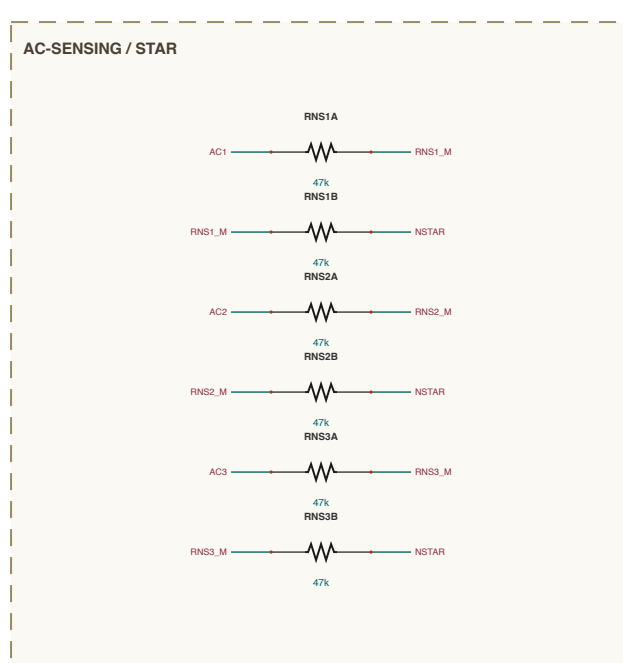
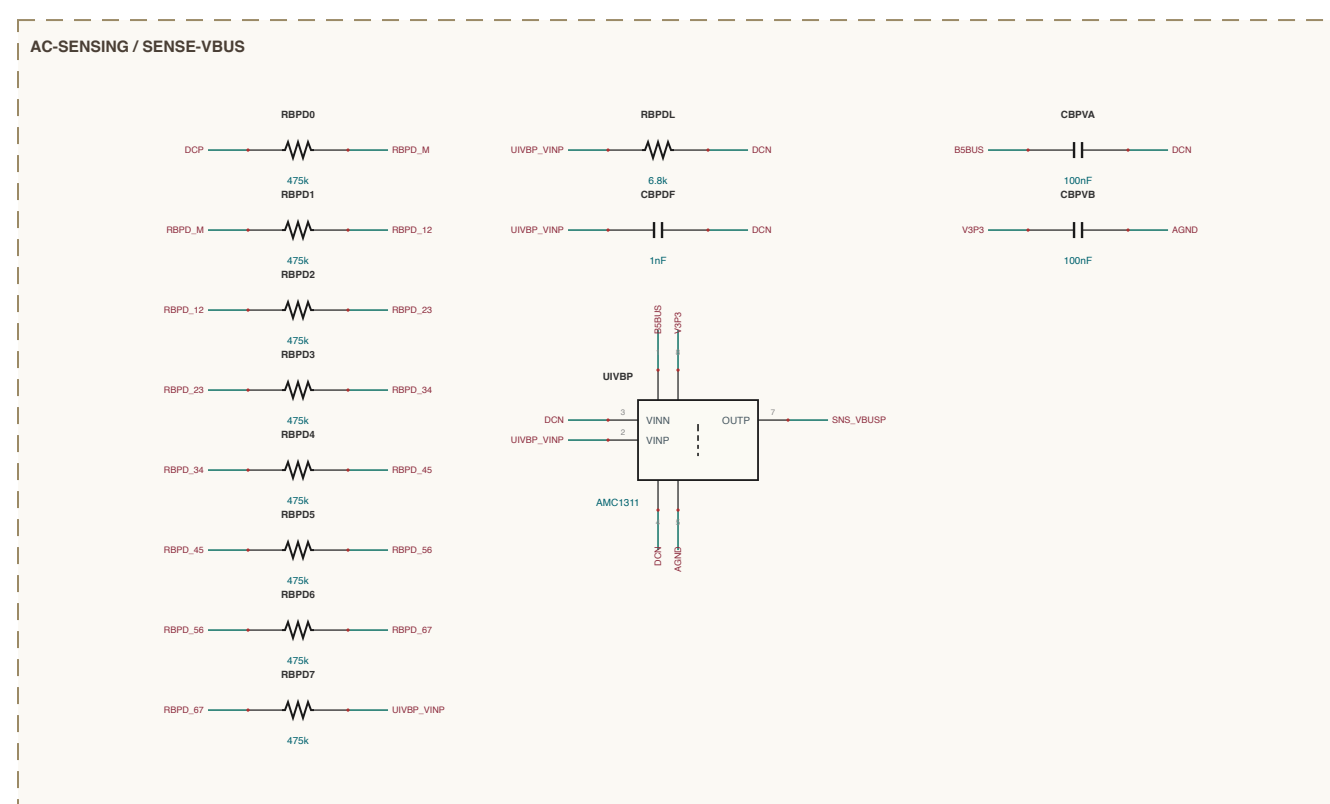
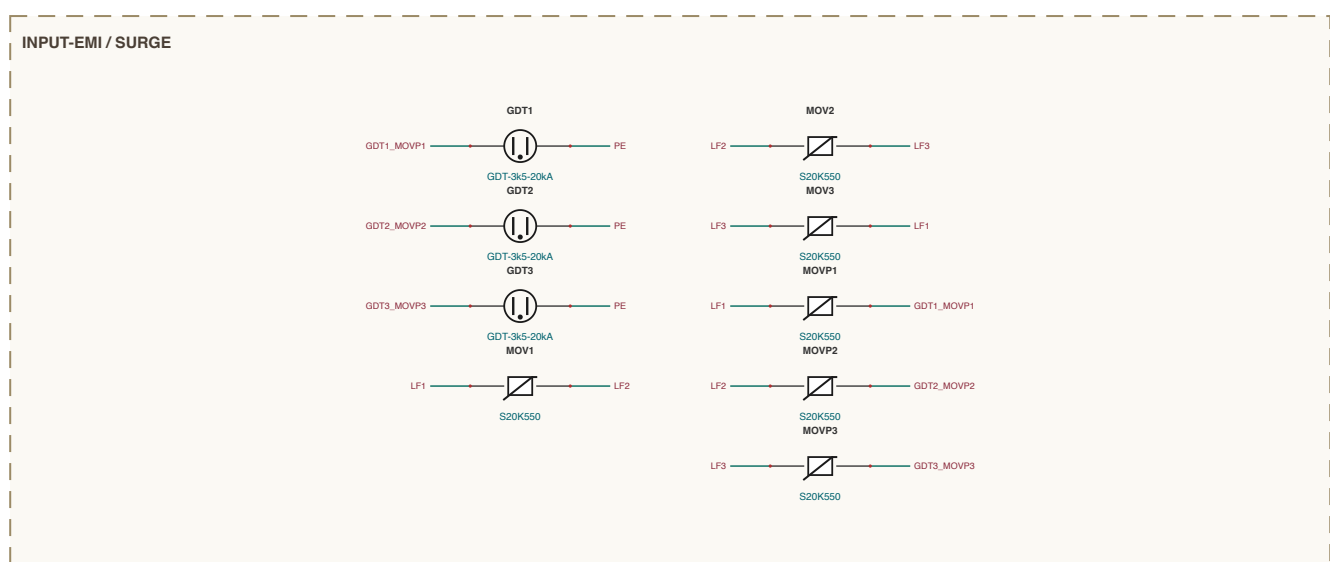
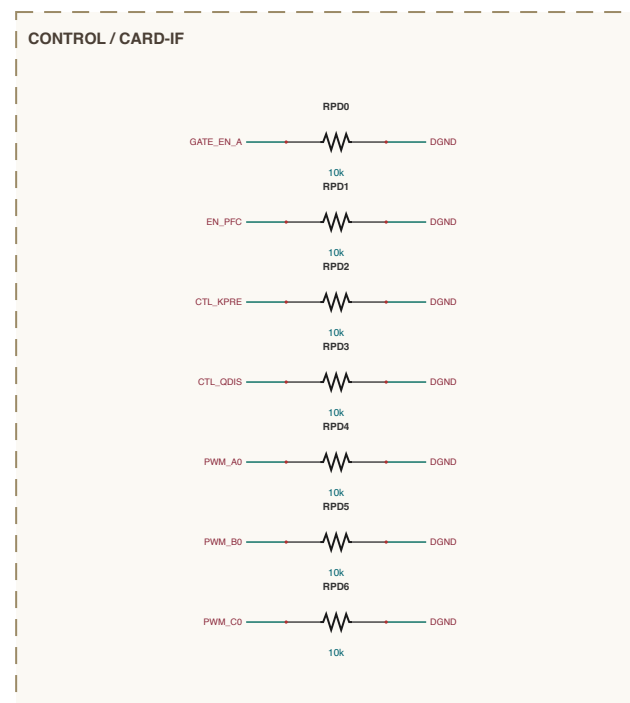
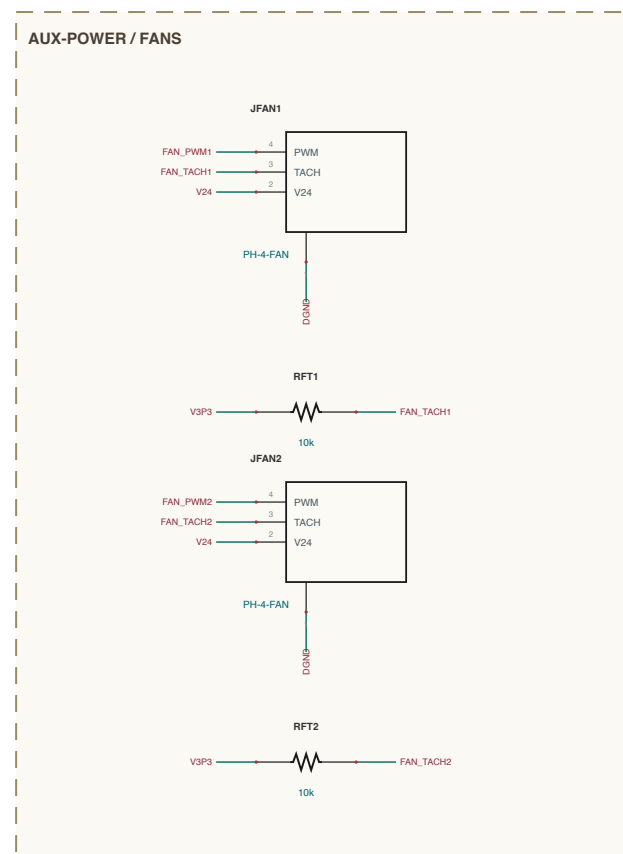
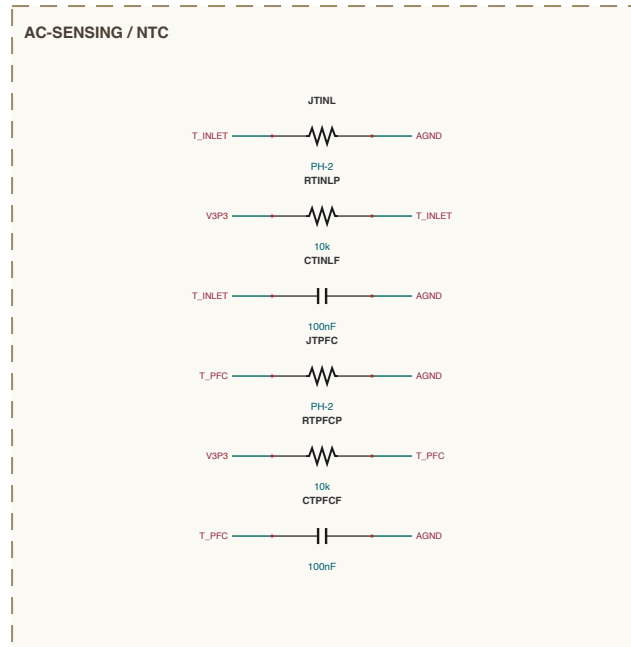
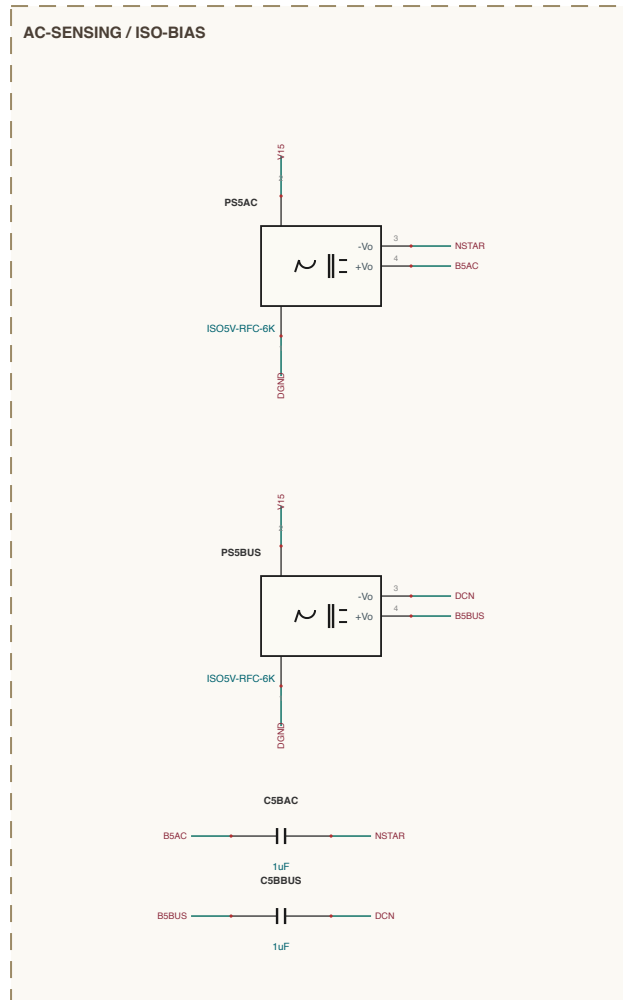
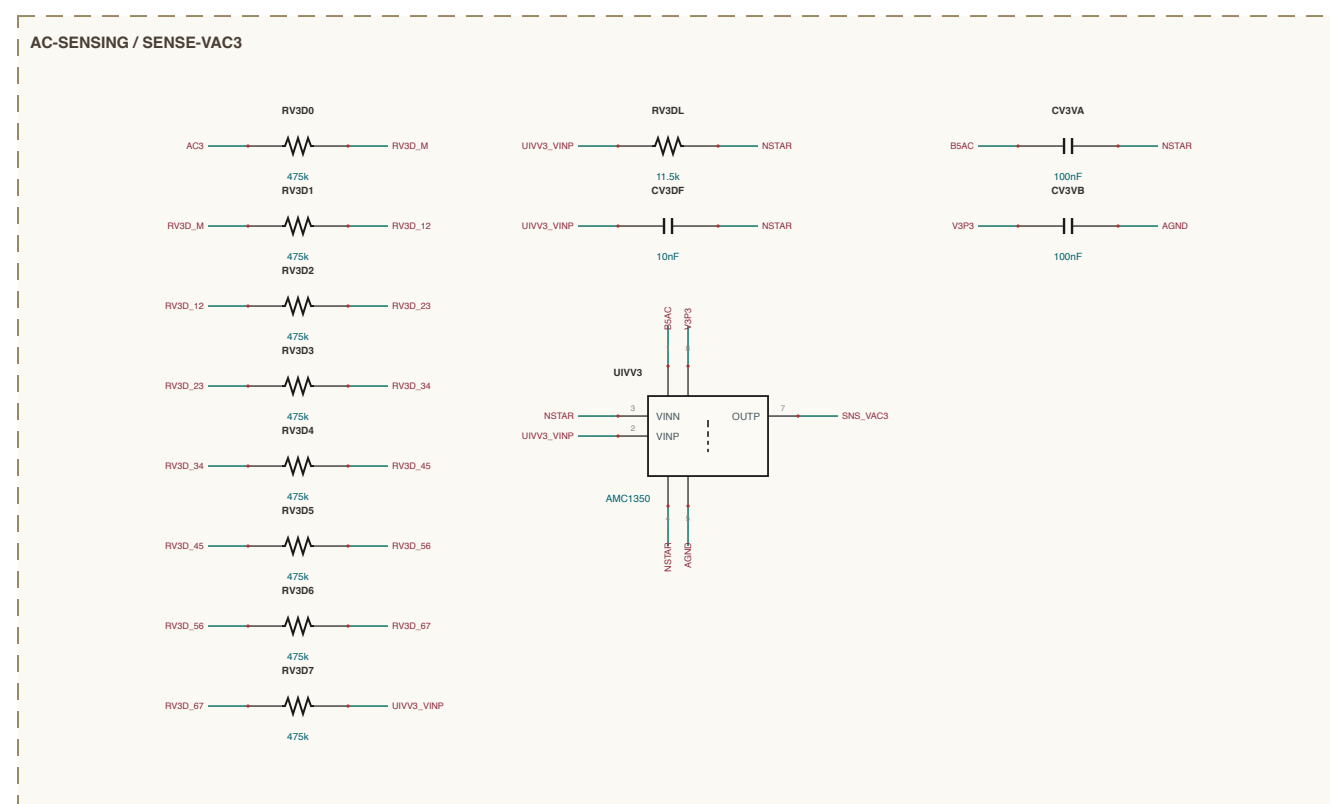
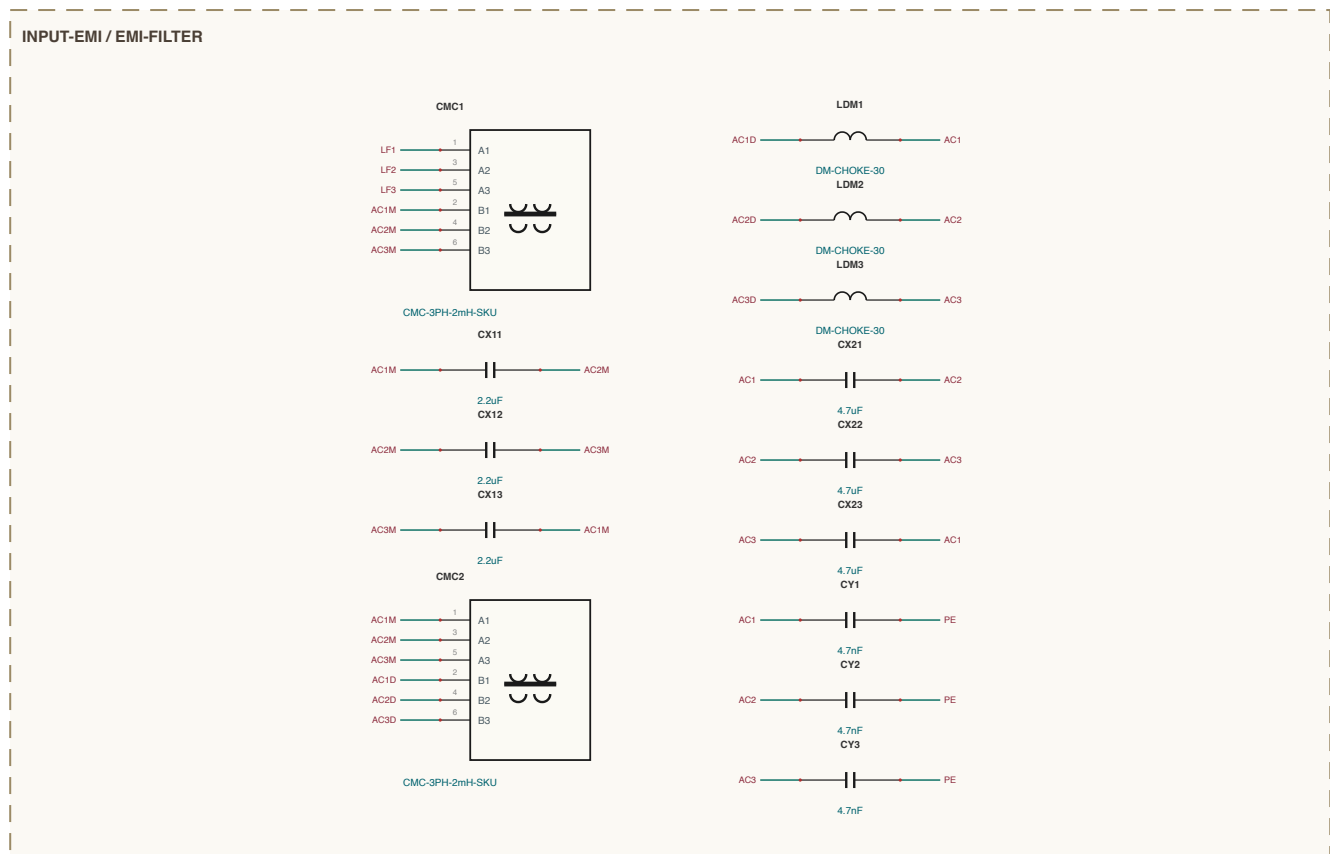
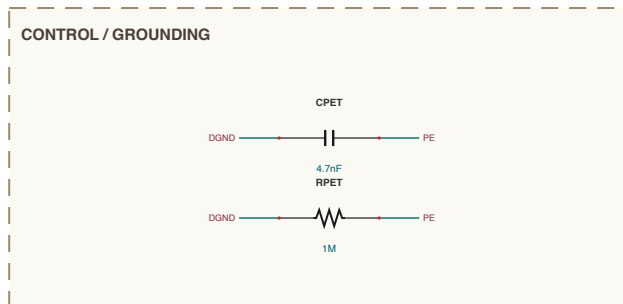
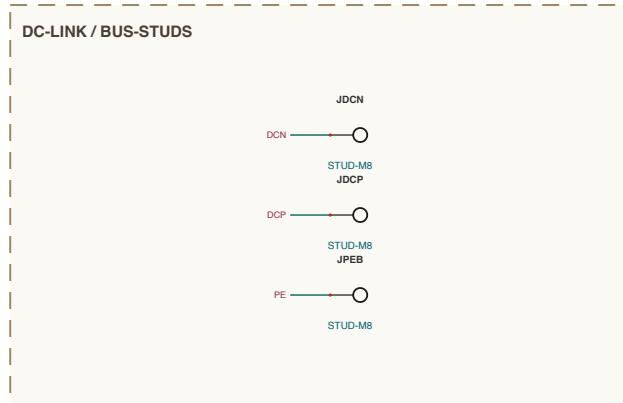
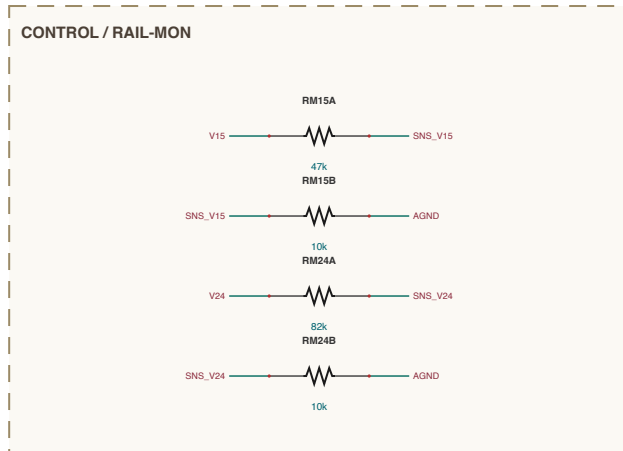
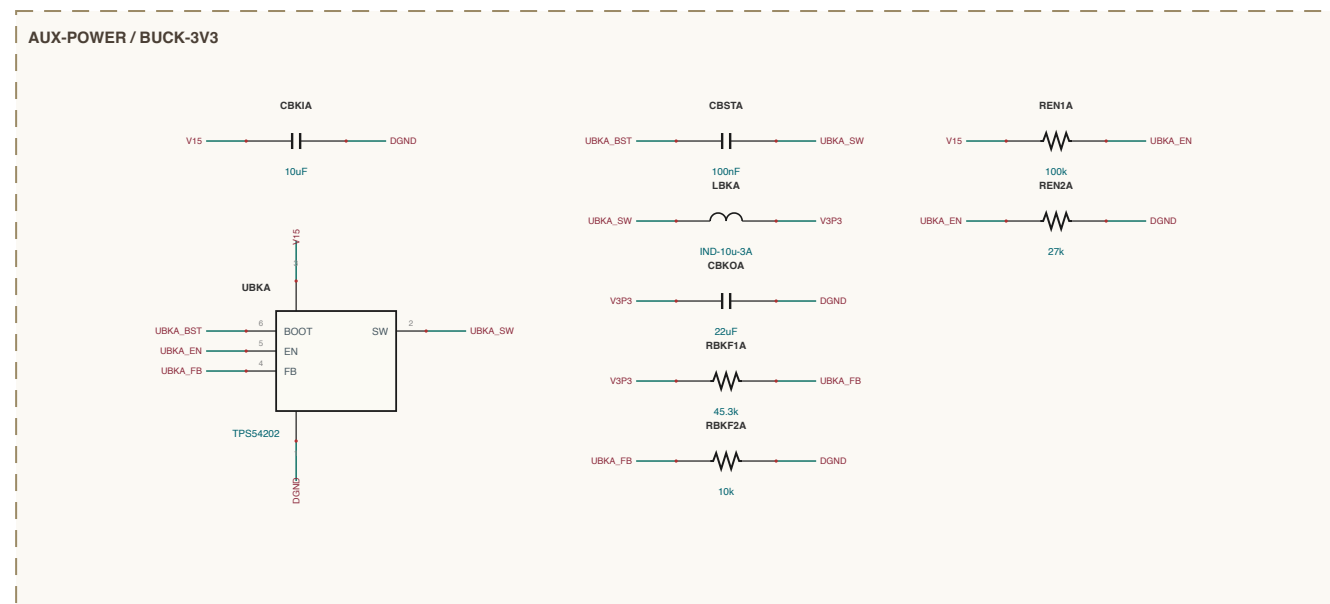
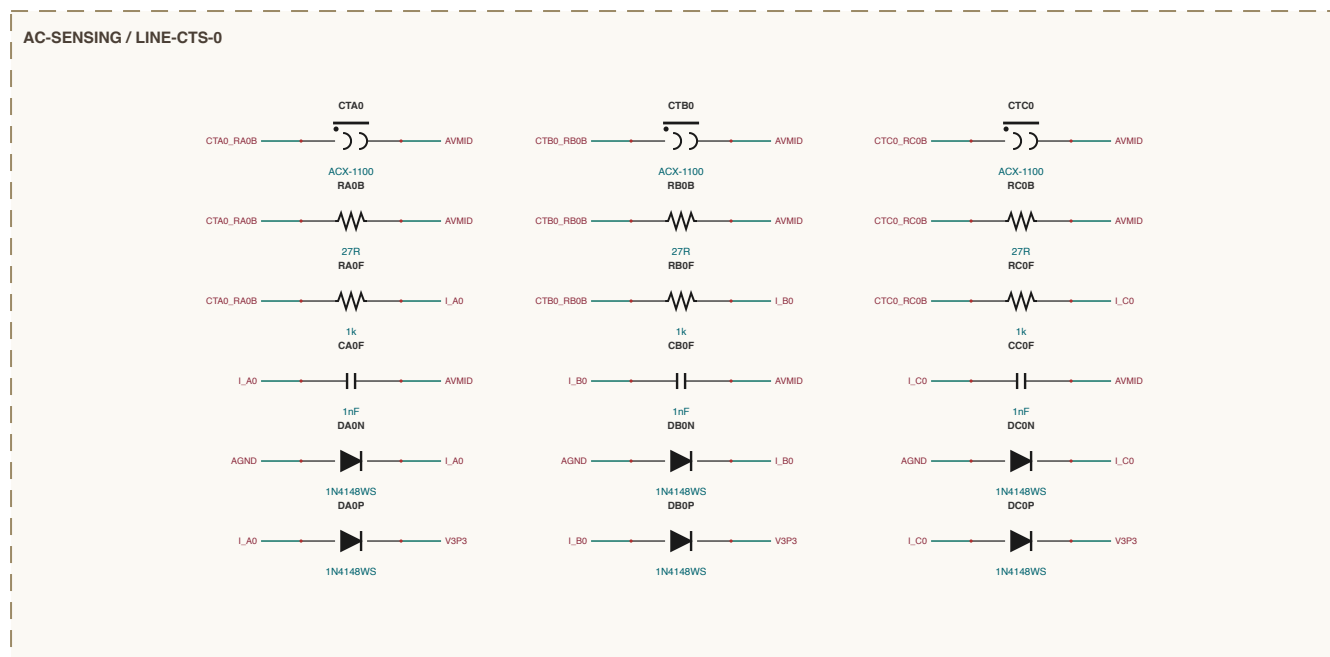
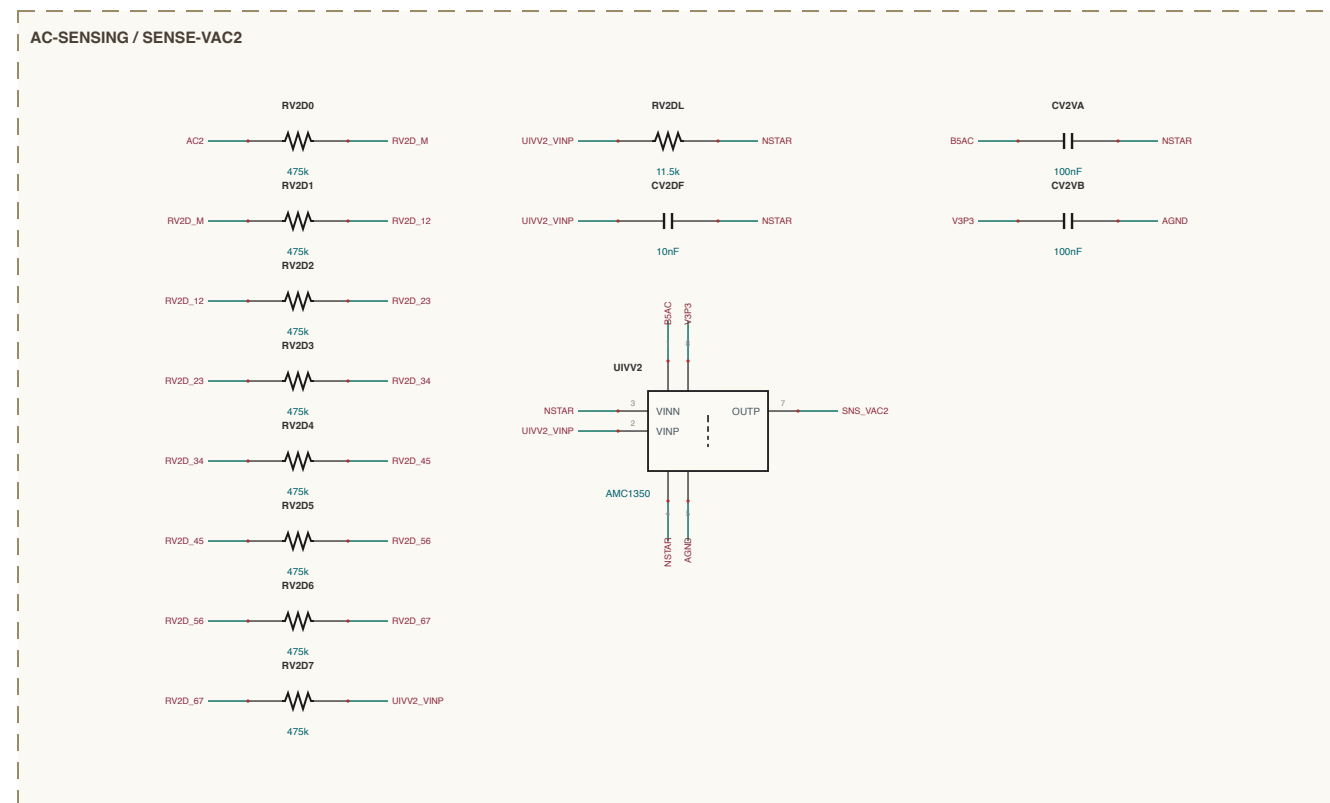
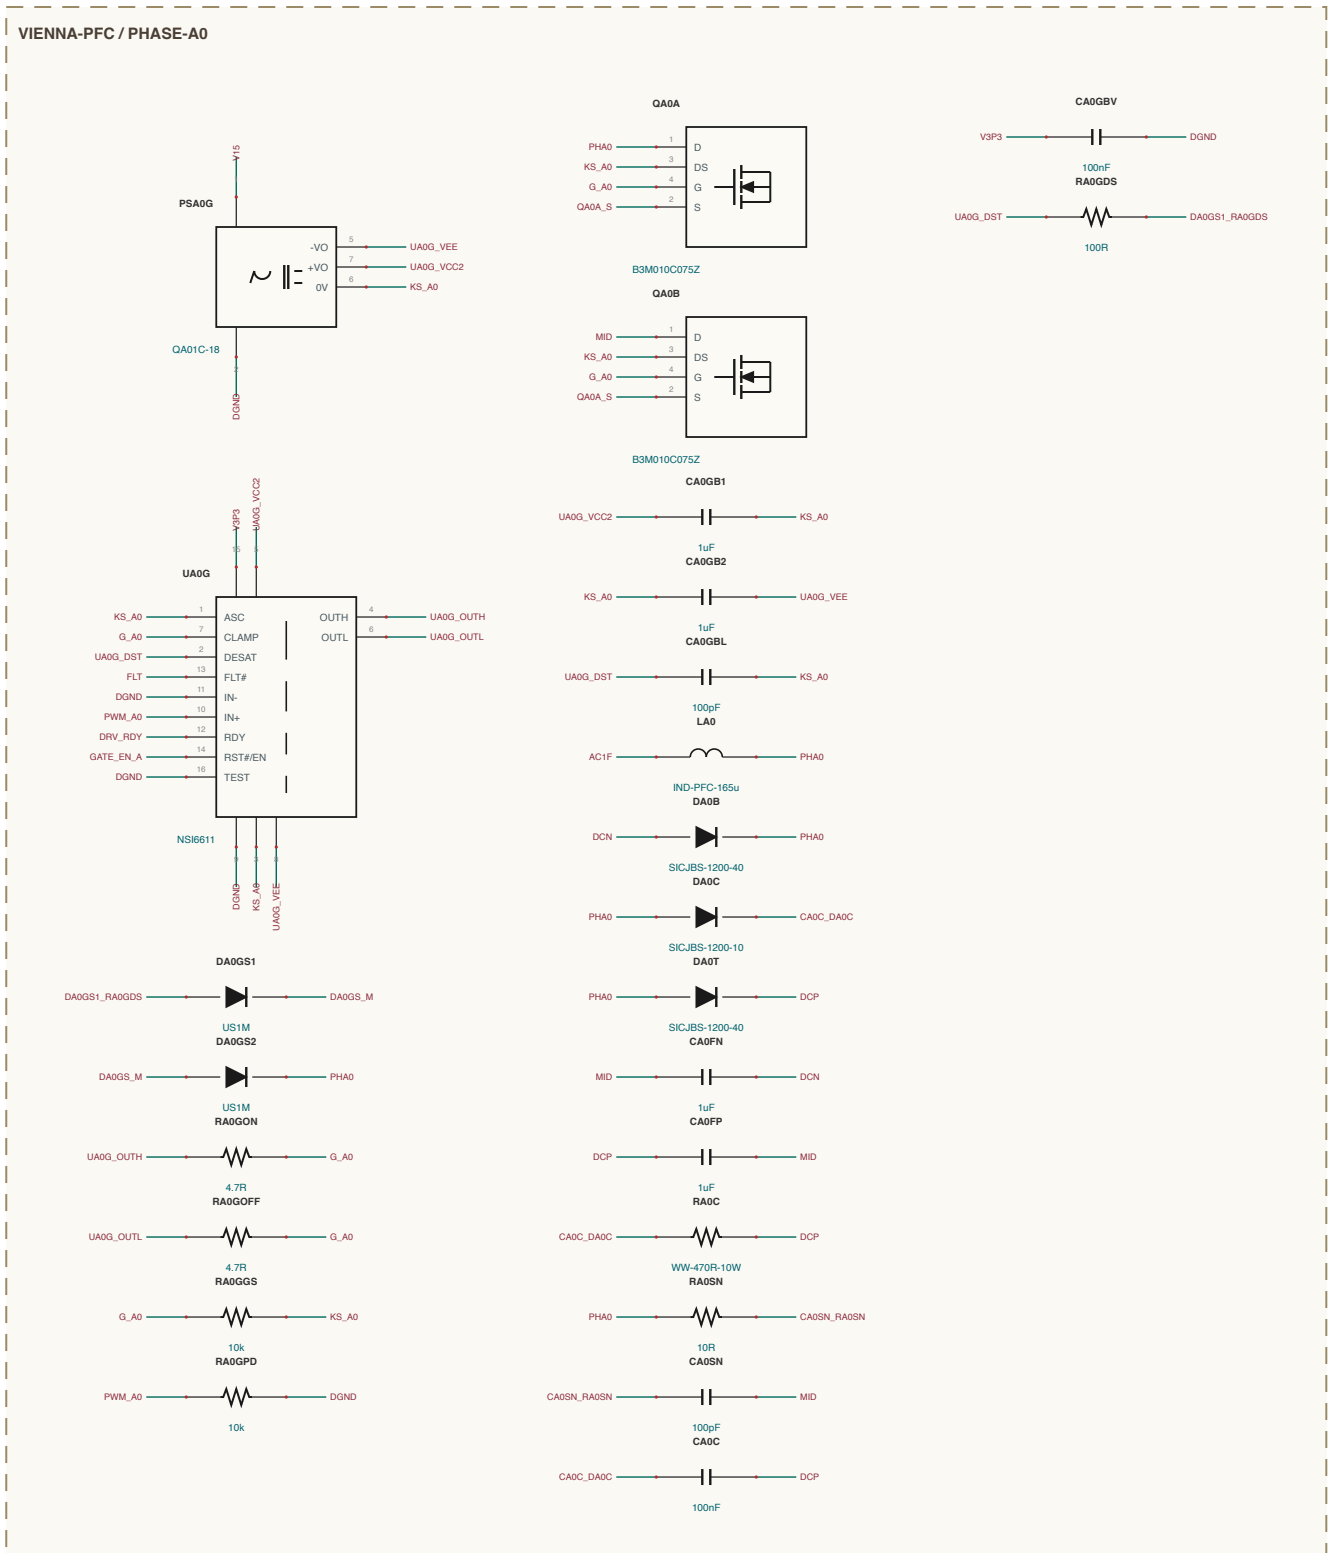
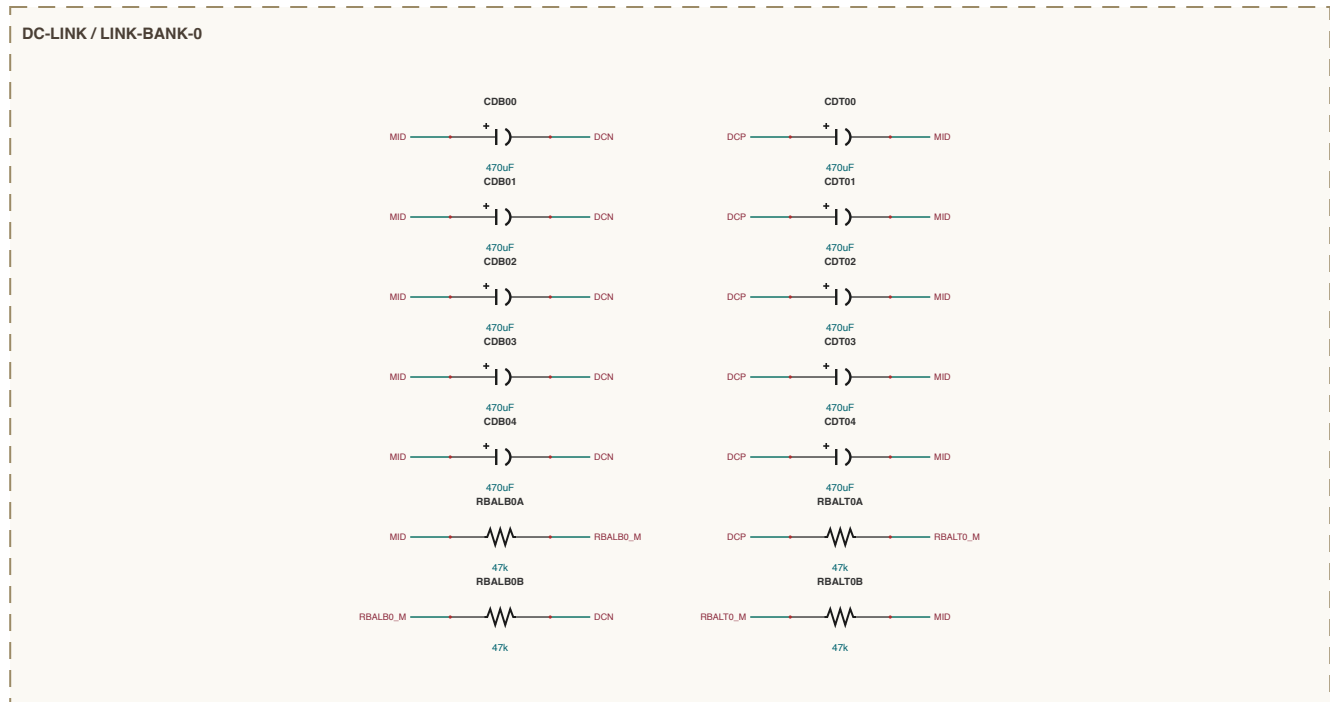
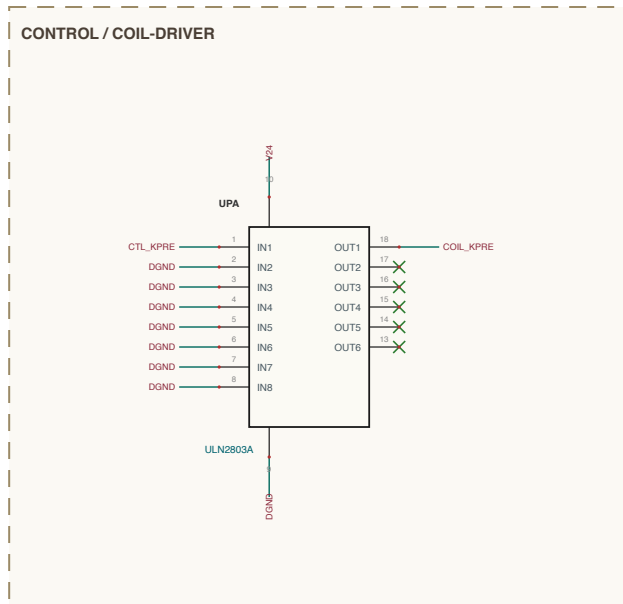
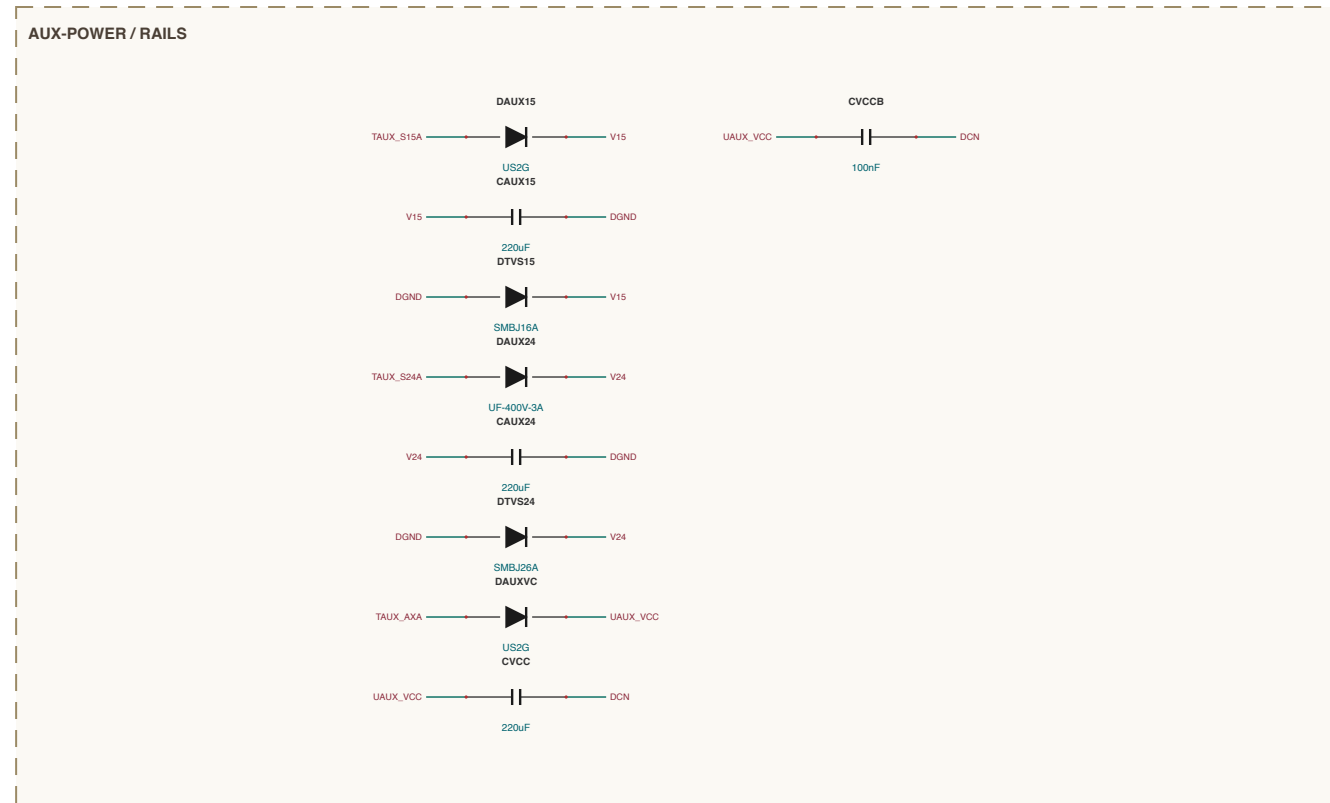
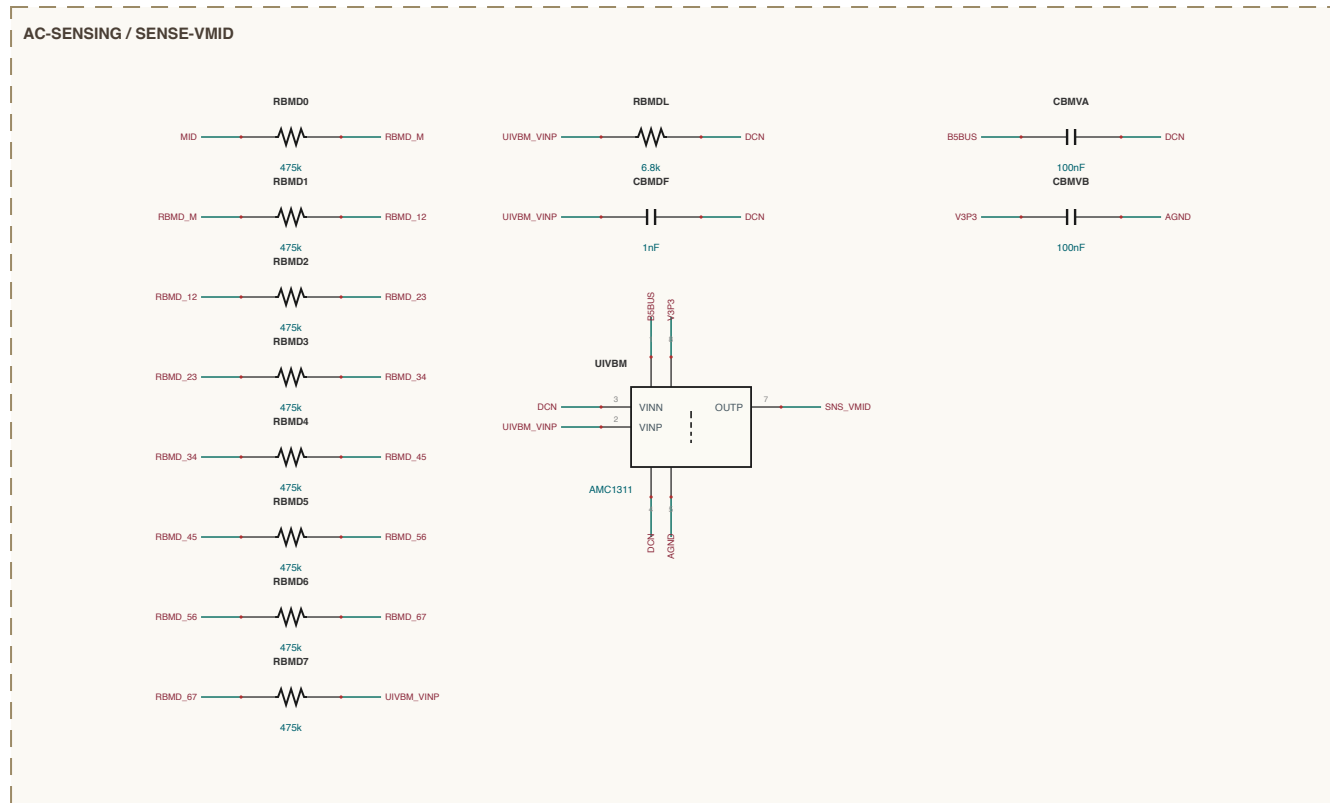
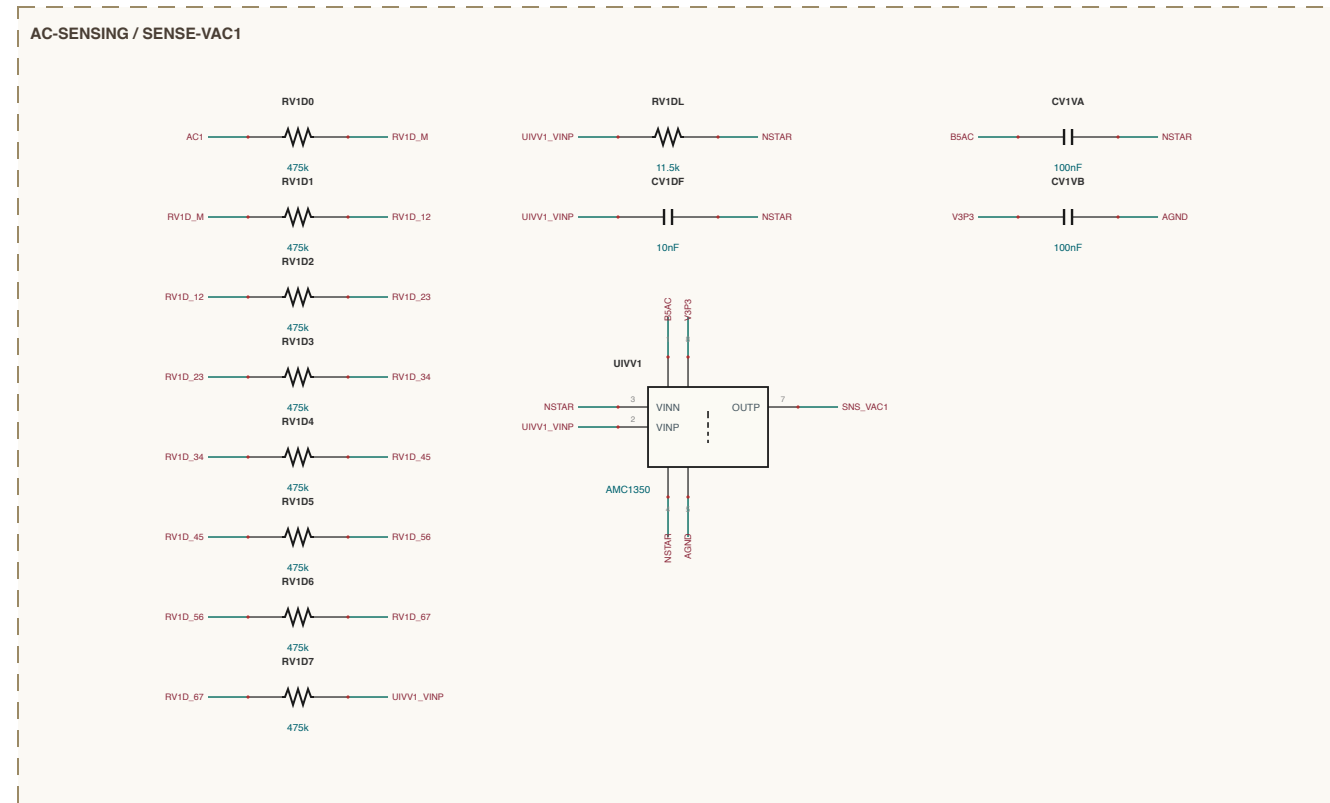


[illegible]

NET NAMING

internal prefixes are named for what they join

Locals: often made at that IC join e.g. UPOCA_VMP

Router: M midpoint of a service pair e.g. HBA32A_M

Backbone: cross link between Router-to-Router e.g. R01C2_H

all others are explicit design units

```
MAGNETICS CONSTRUCTION
```

```
Identify your characteristics and derive, gap, fit, acceptance from live theory)


DSI LAD LOO: In ROTTENKAT Kocilik, kucuk (cu' t kul), TelleTrom? DimeZ= 1.8 fEduH; --Mauri OUSA pu (BASED value governs rapidly/cosine)
```

```
DSS LBMR-D: To YHS Mda, Na,t, Ma Stronoz = J-Anti OUSA pu (Place 3 date)
```

```
Total Lu-Y bns + measured after leakage (bars COMPENSATE leakage spread); Or at TANk sections
```