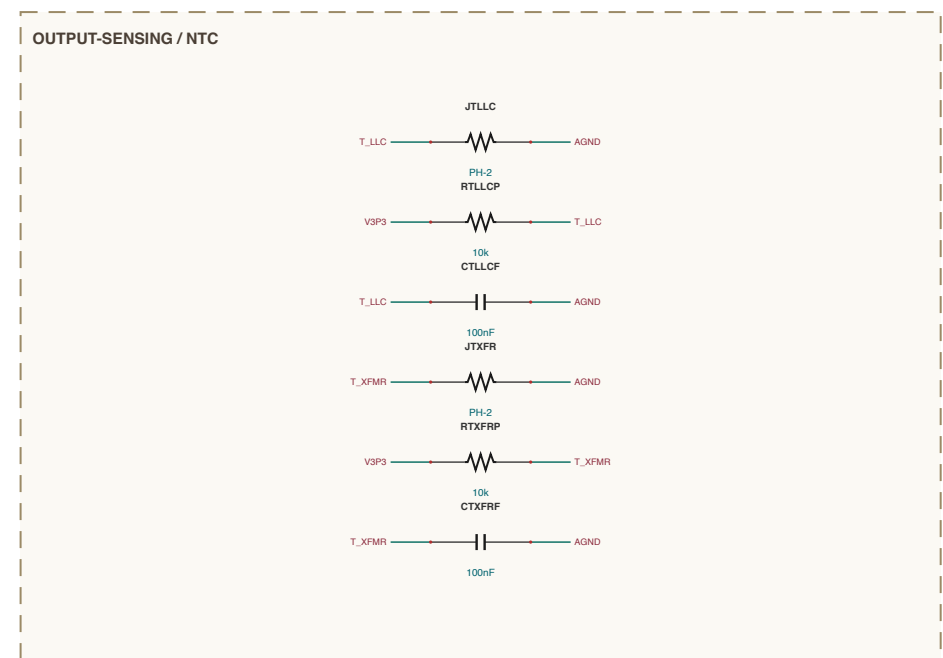
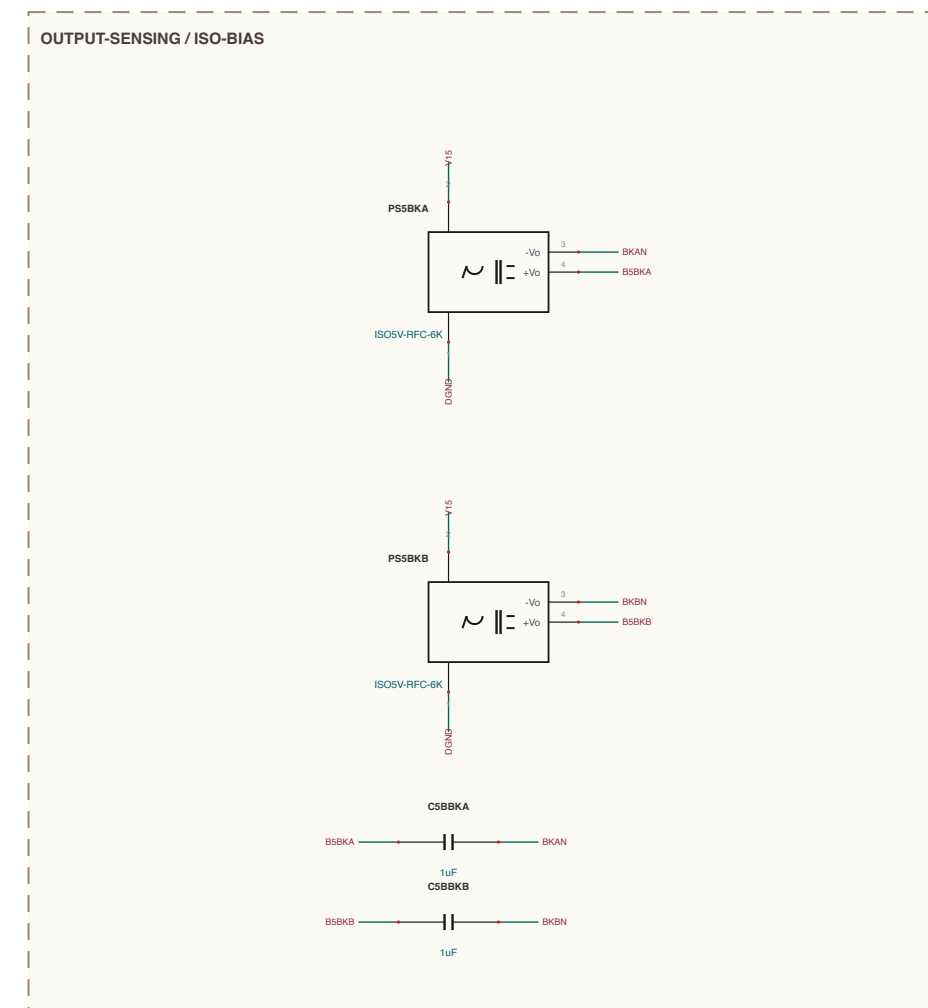
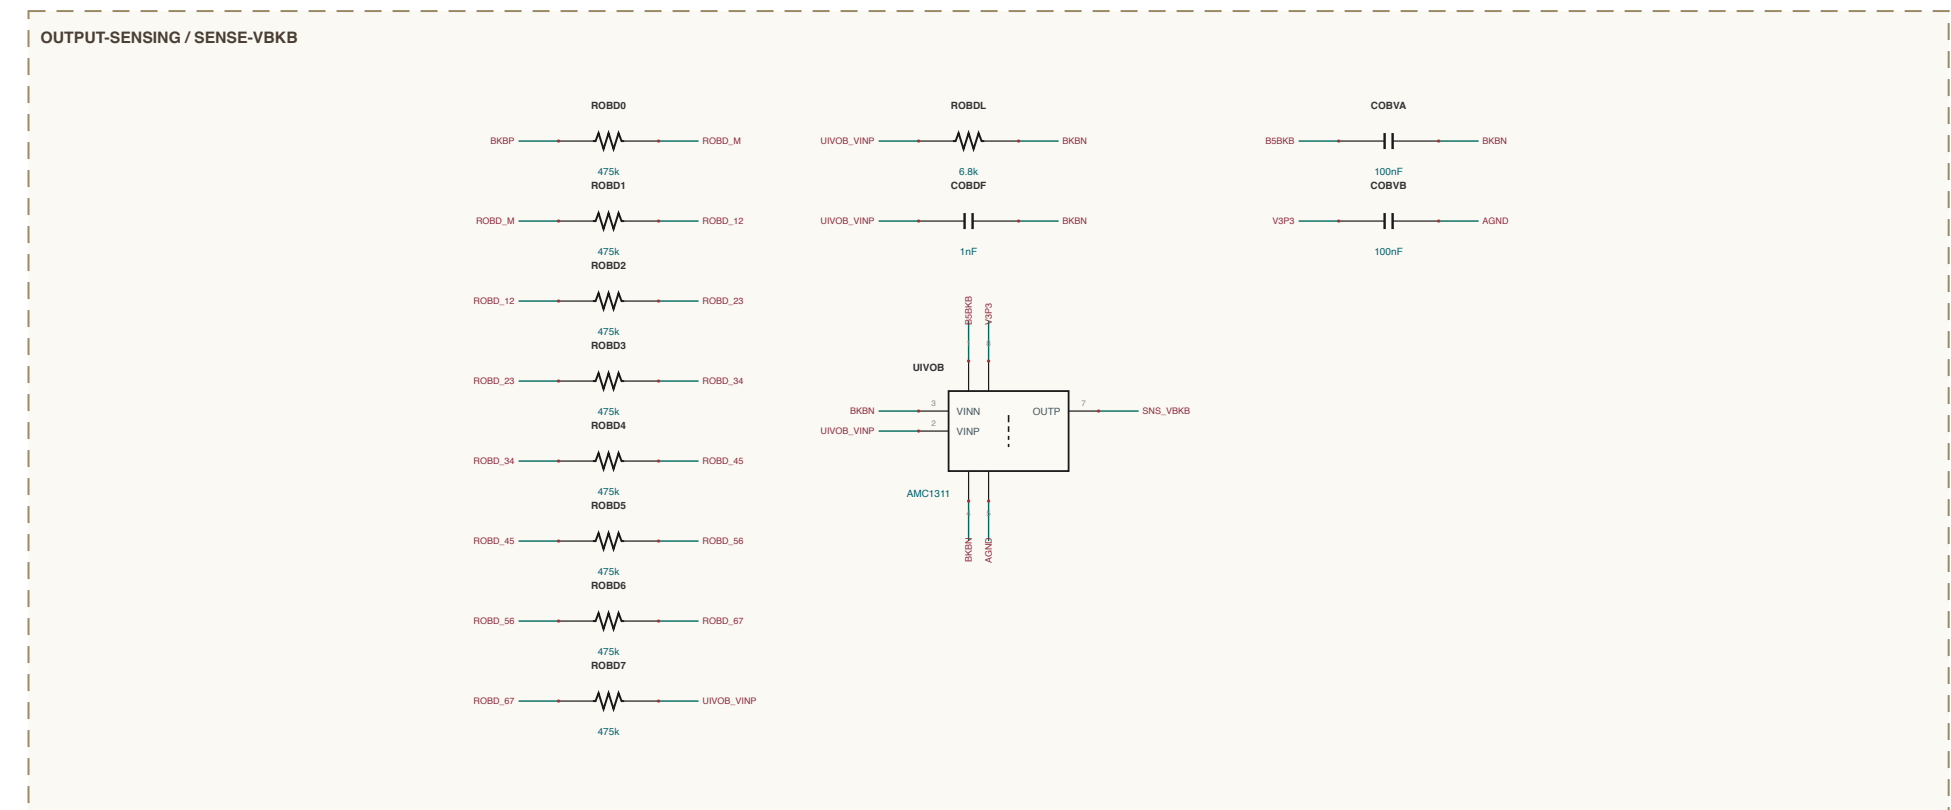
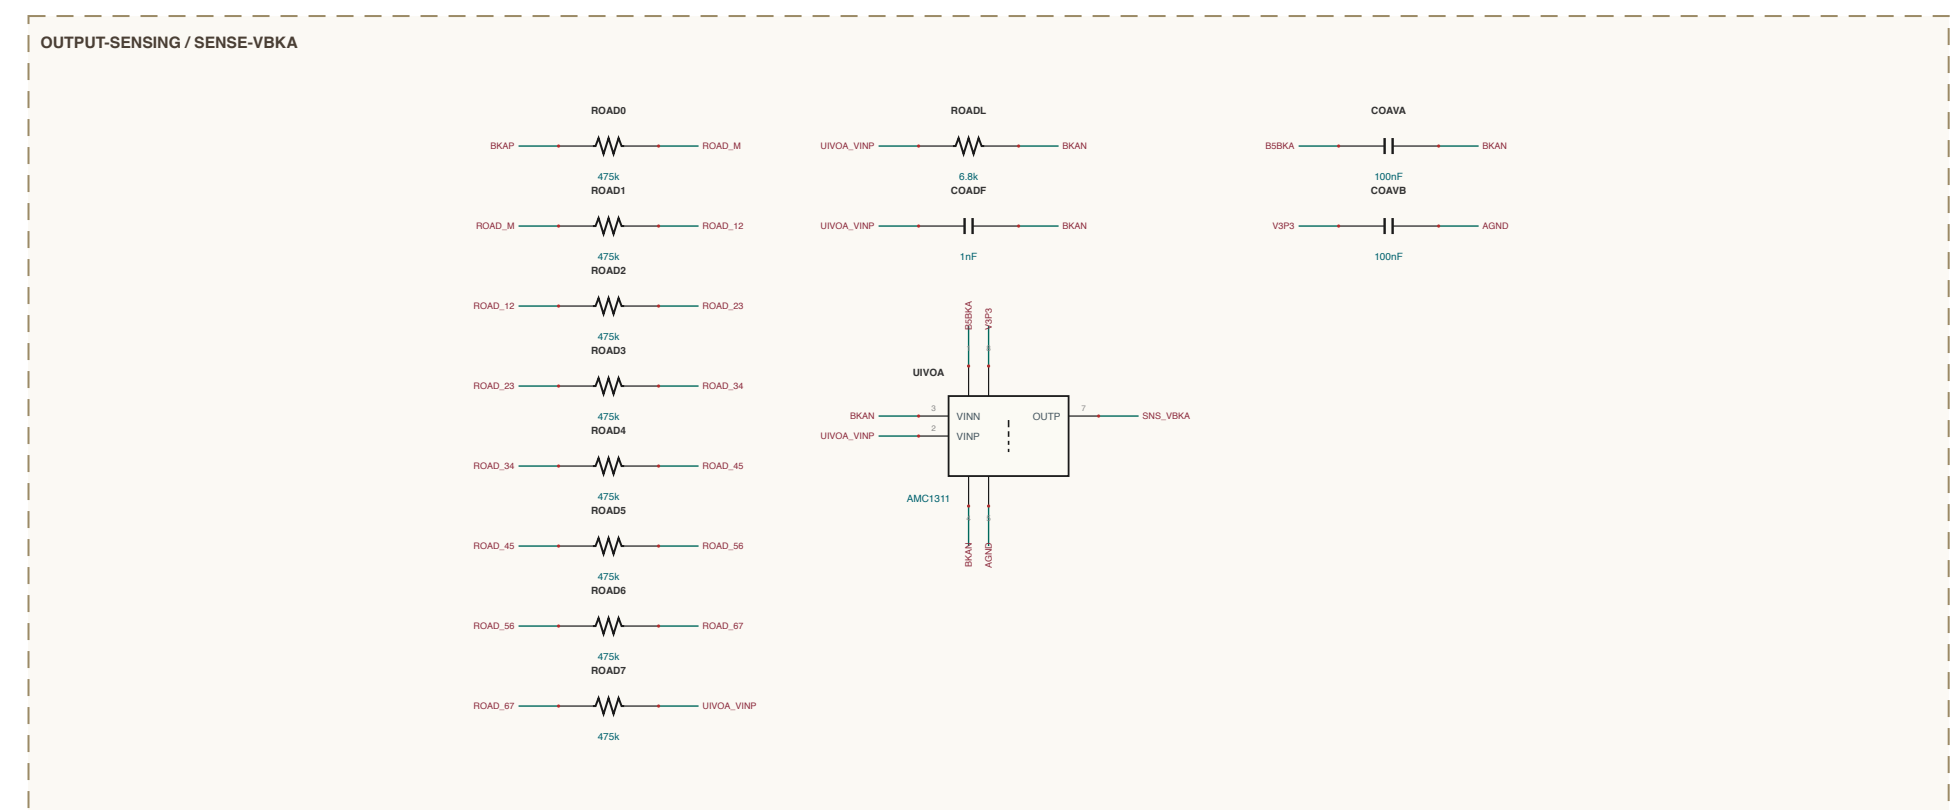
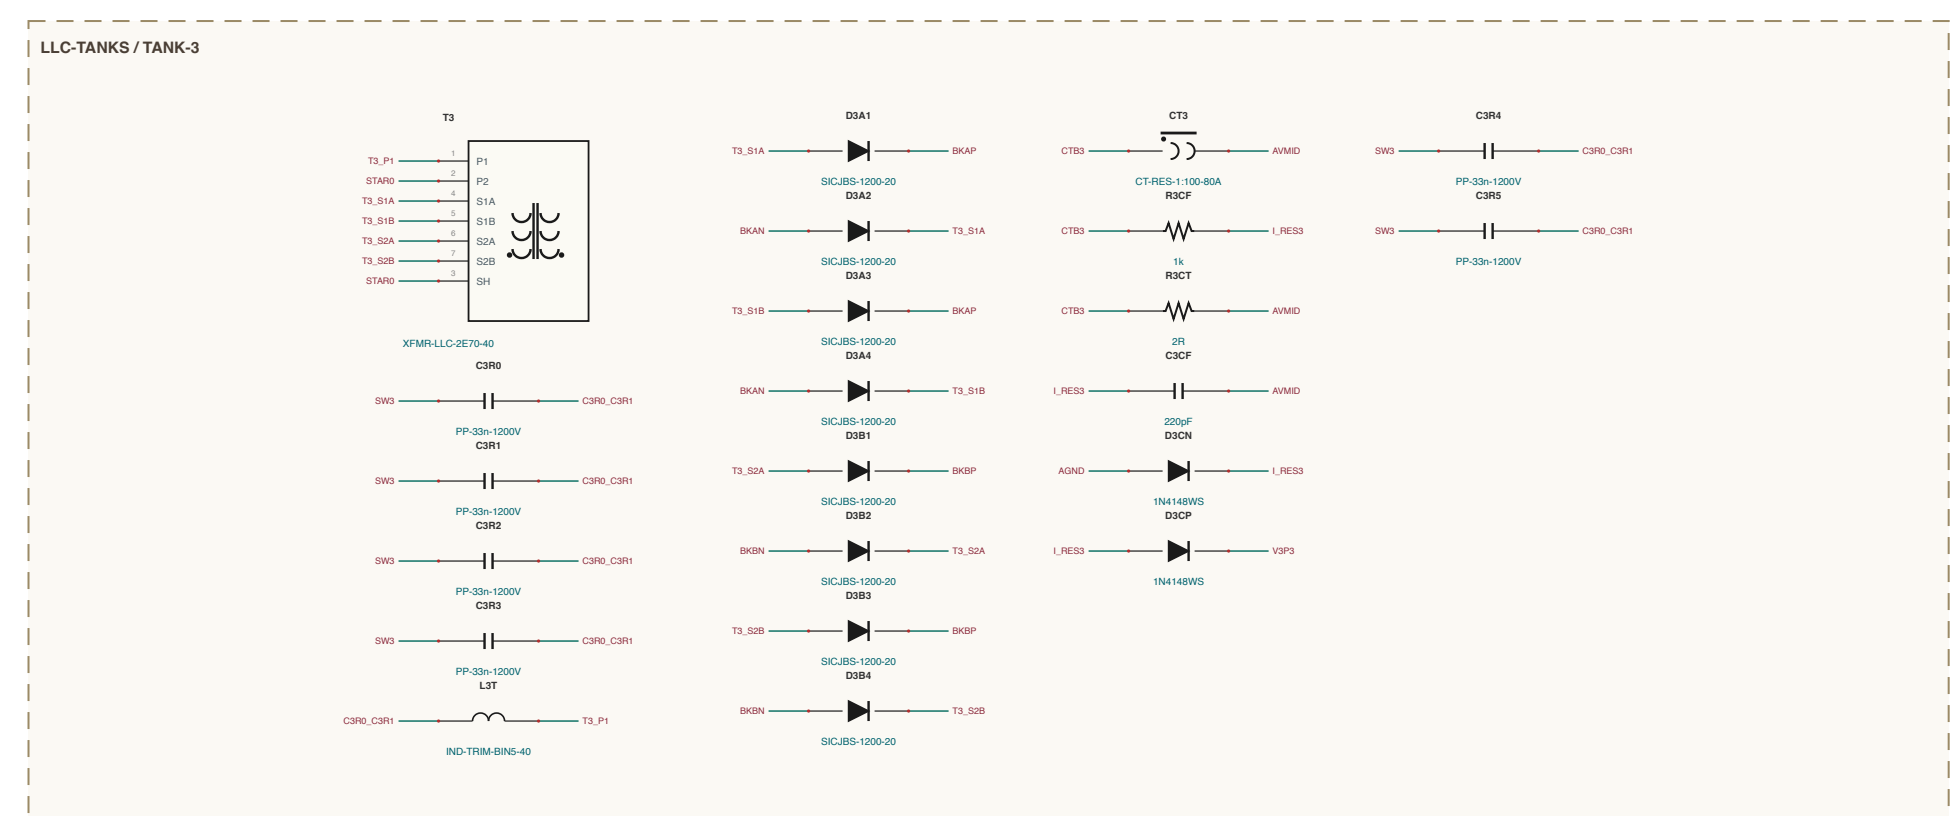
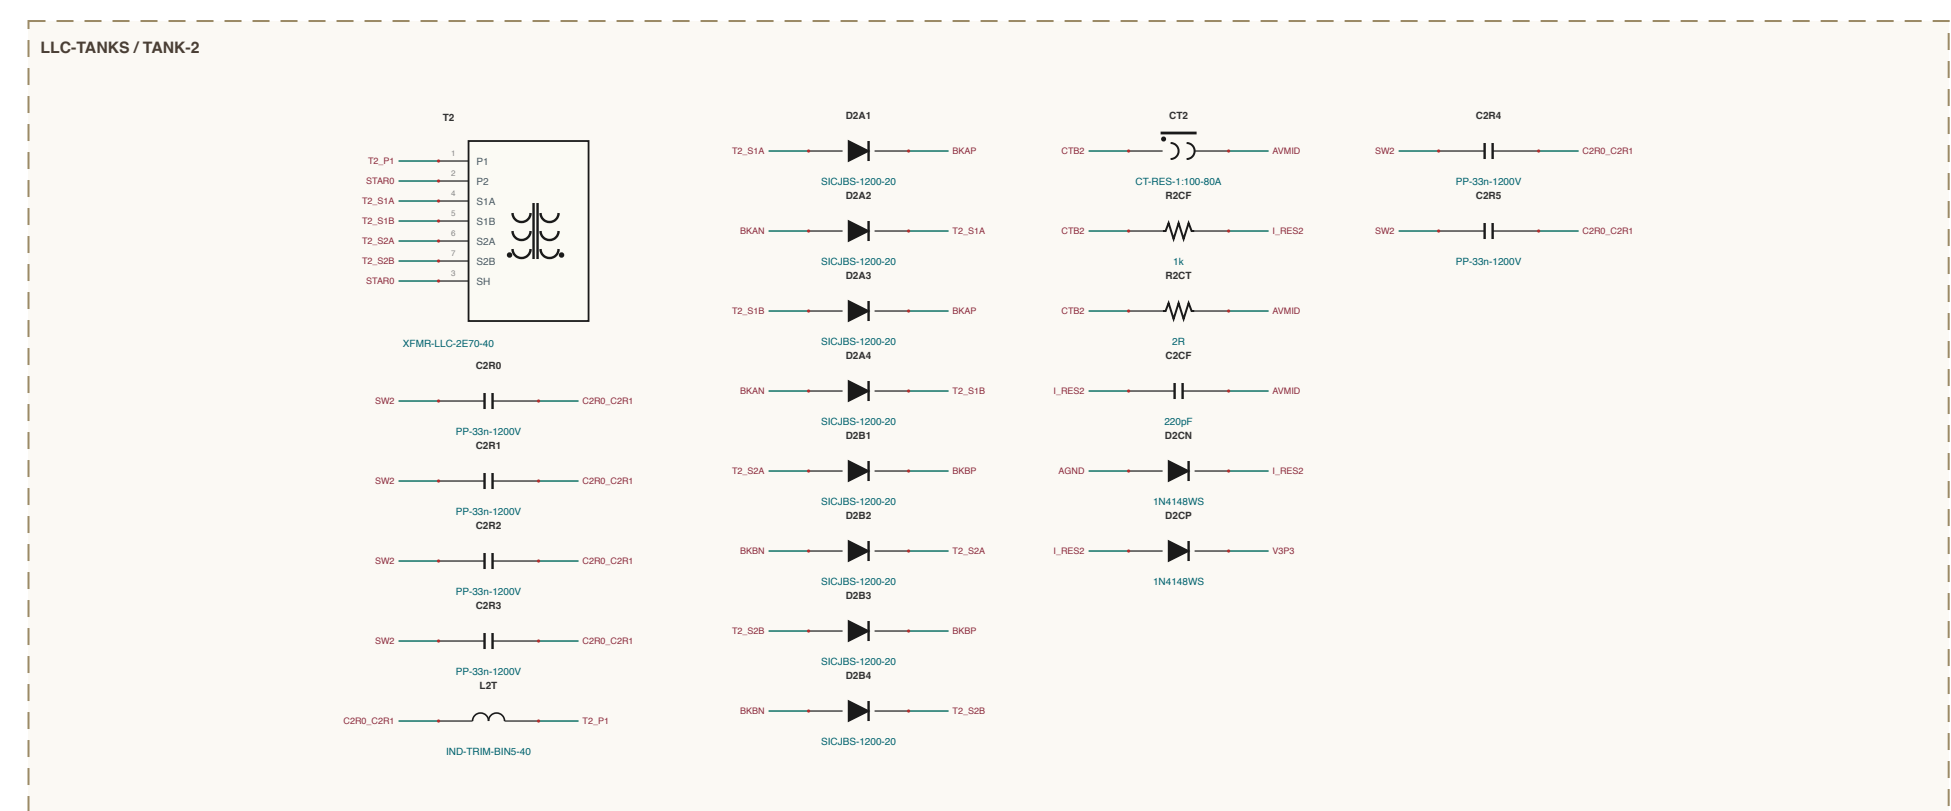
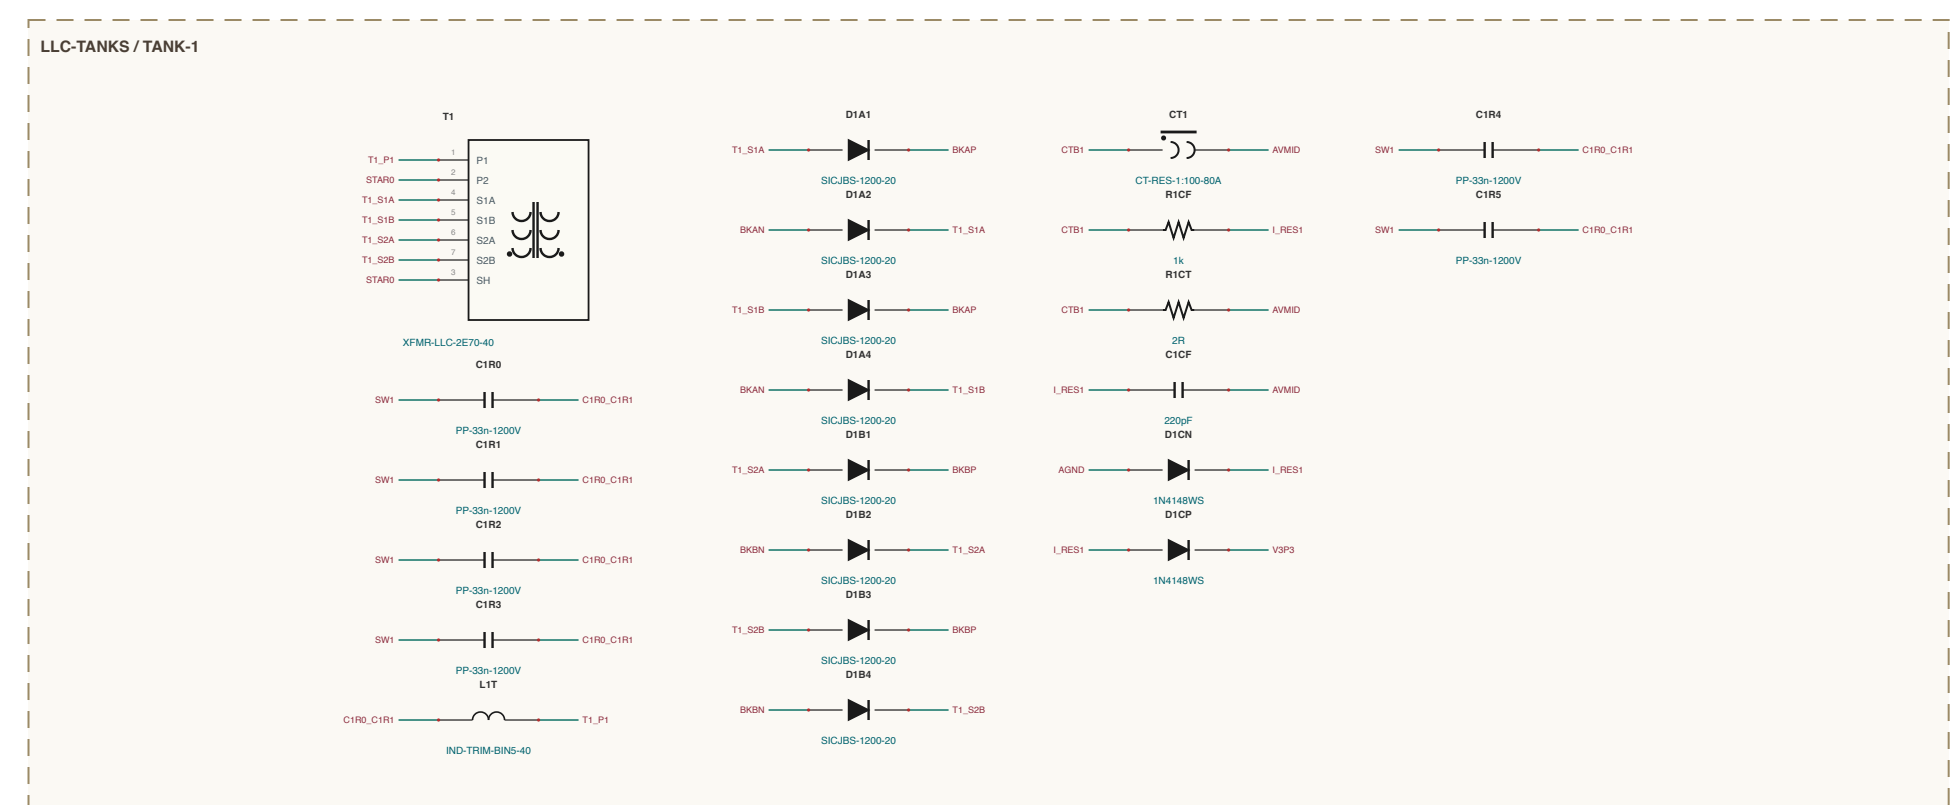
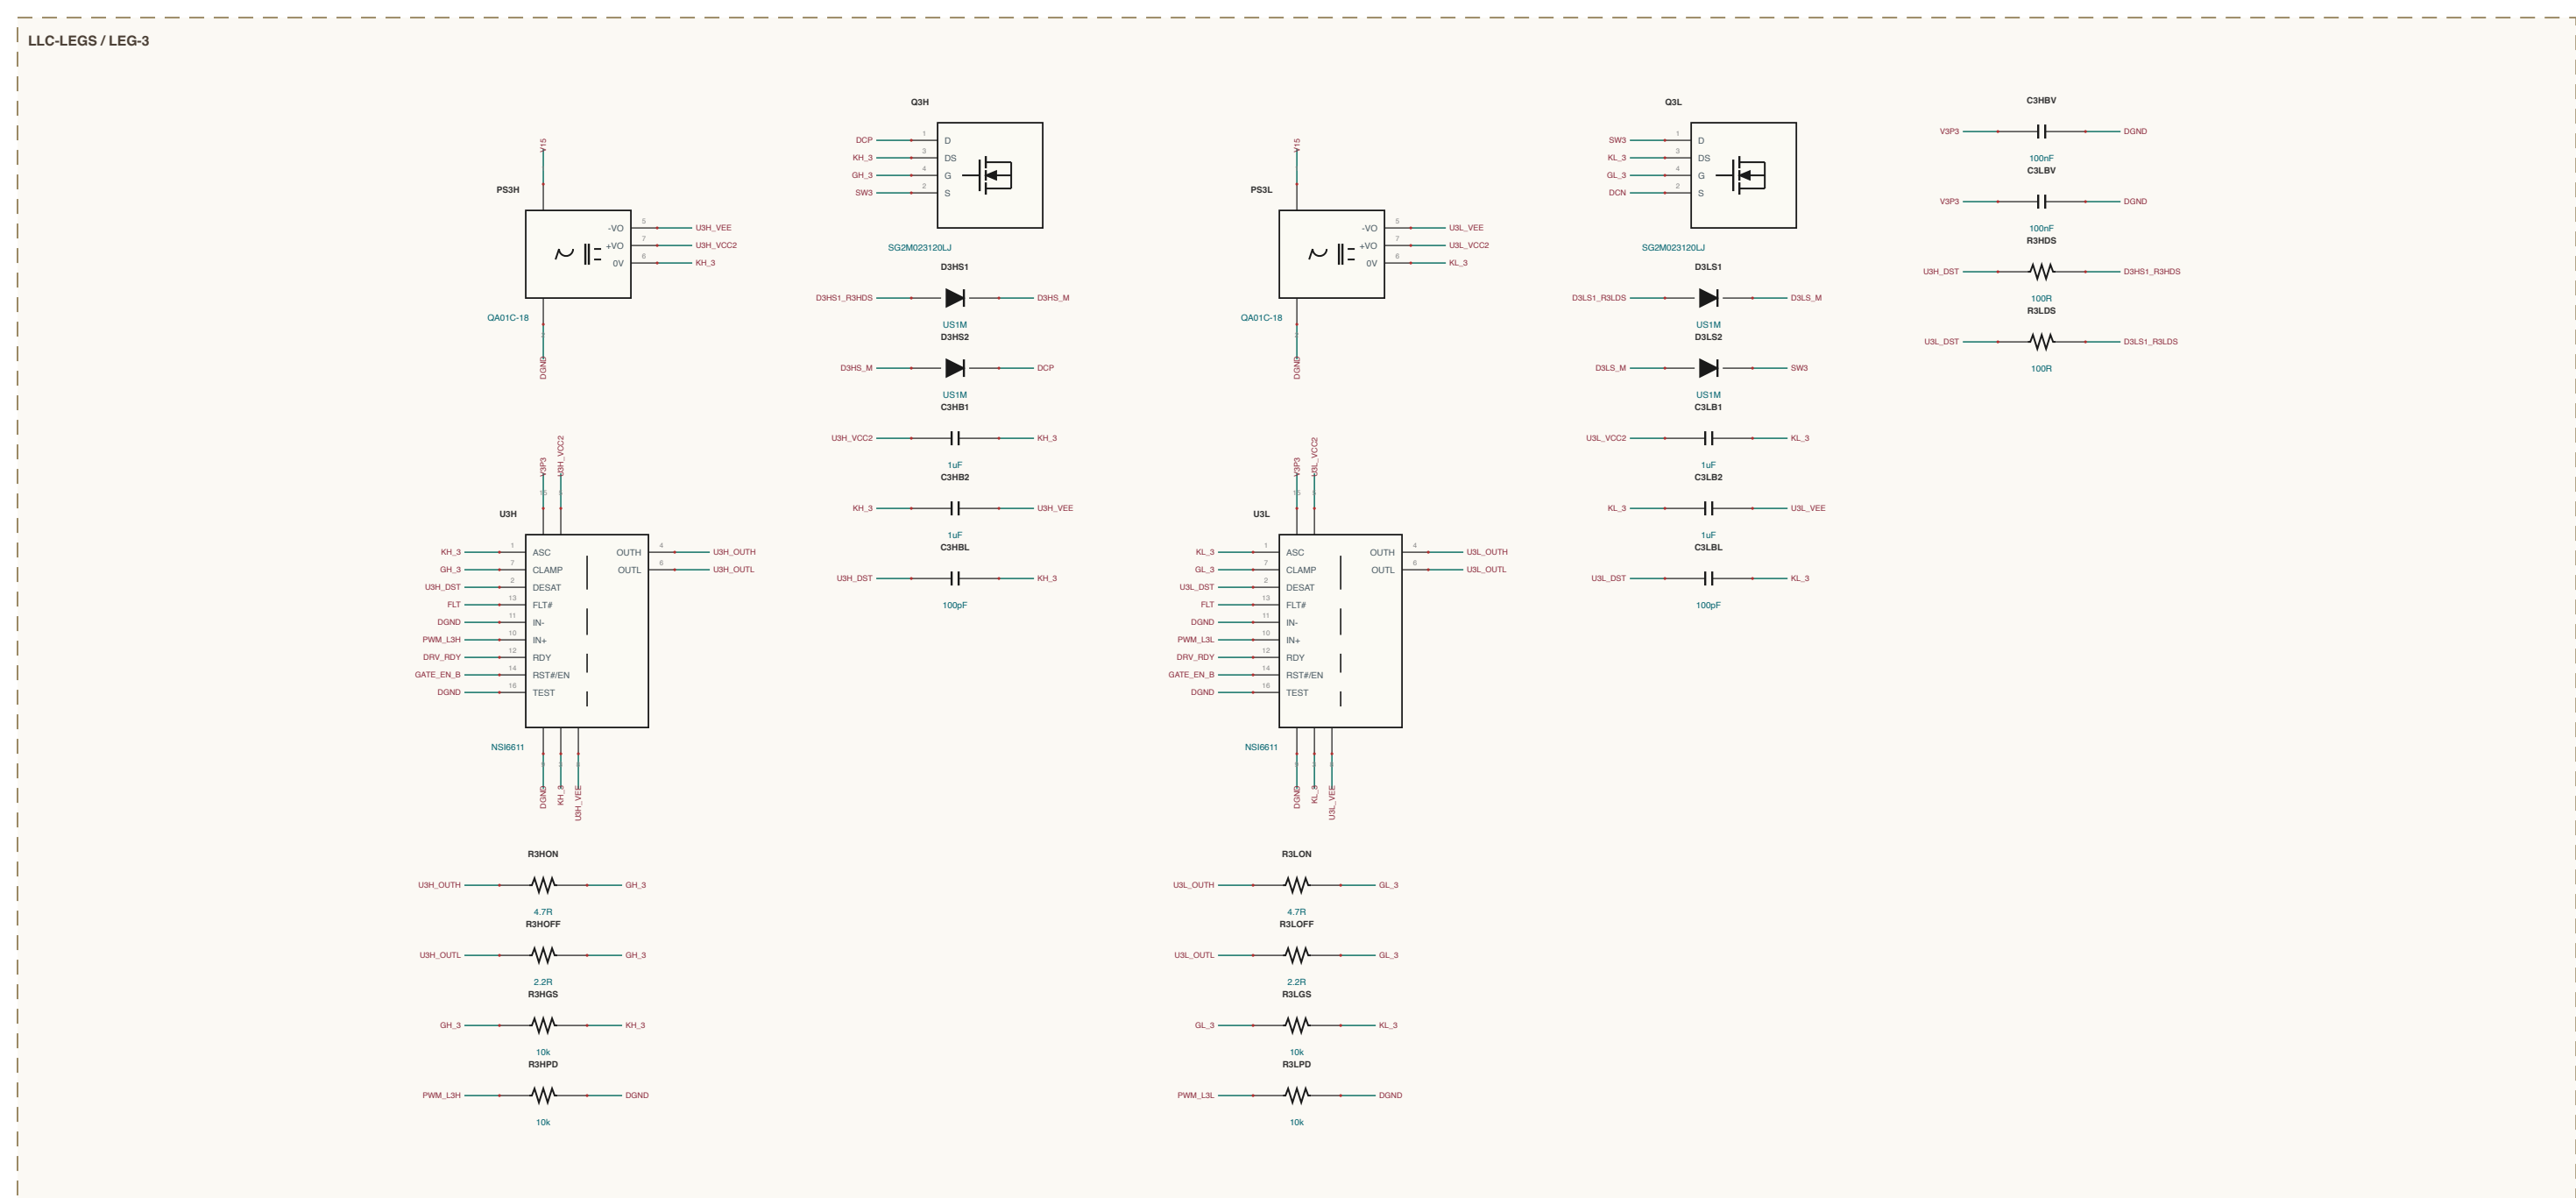
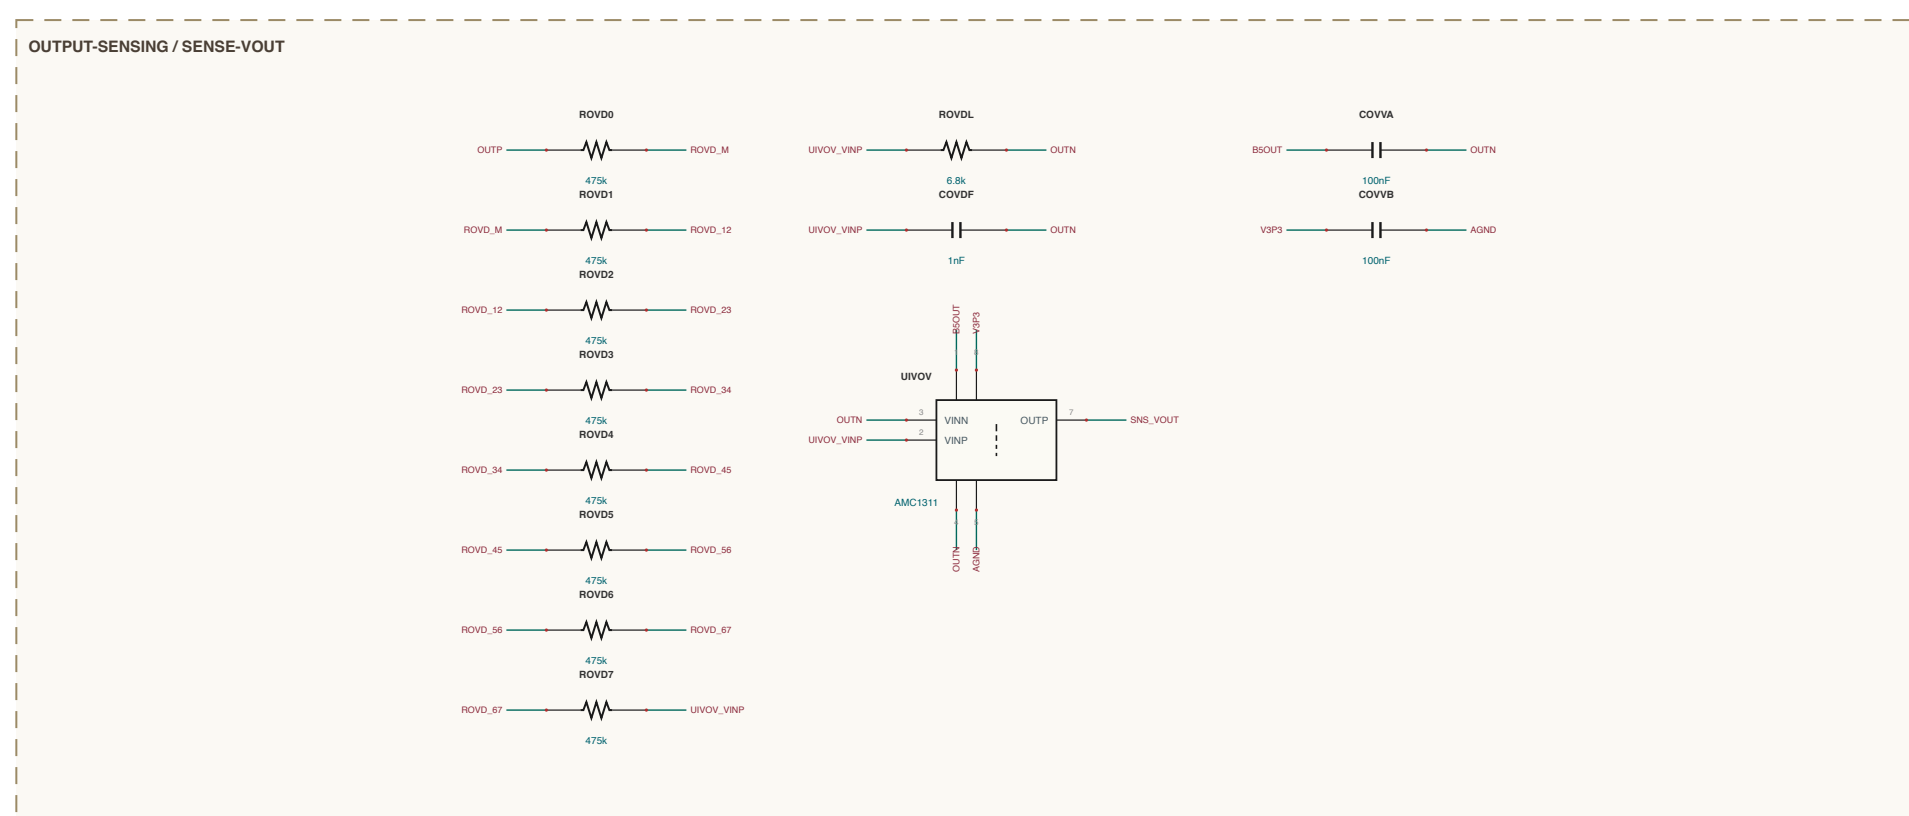
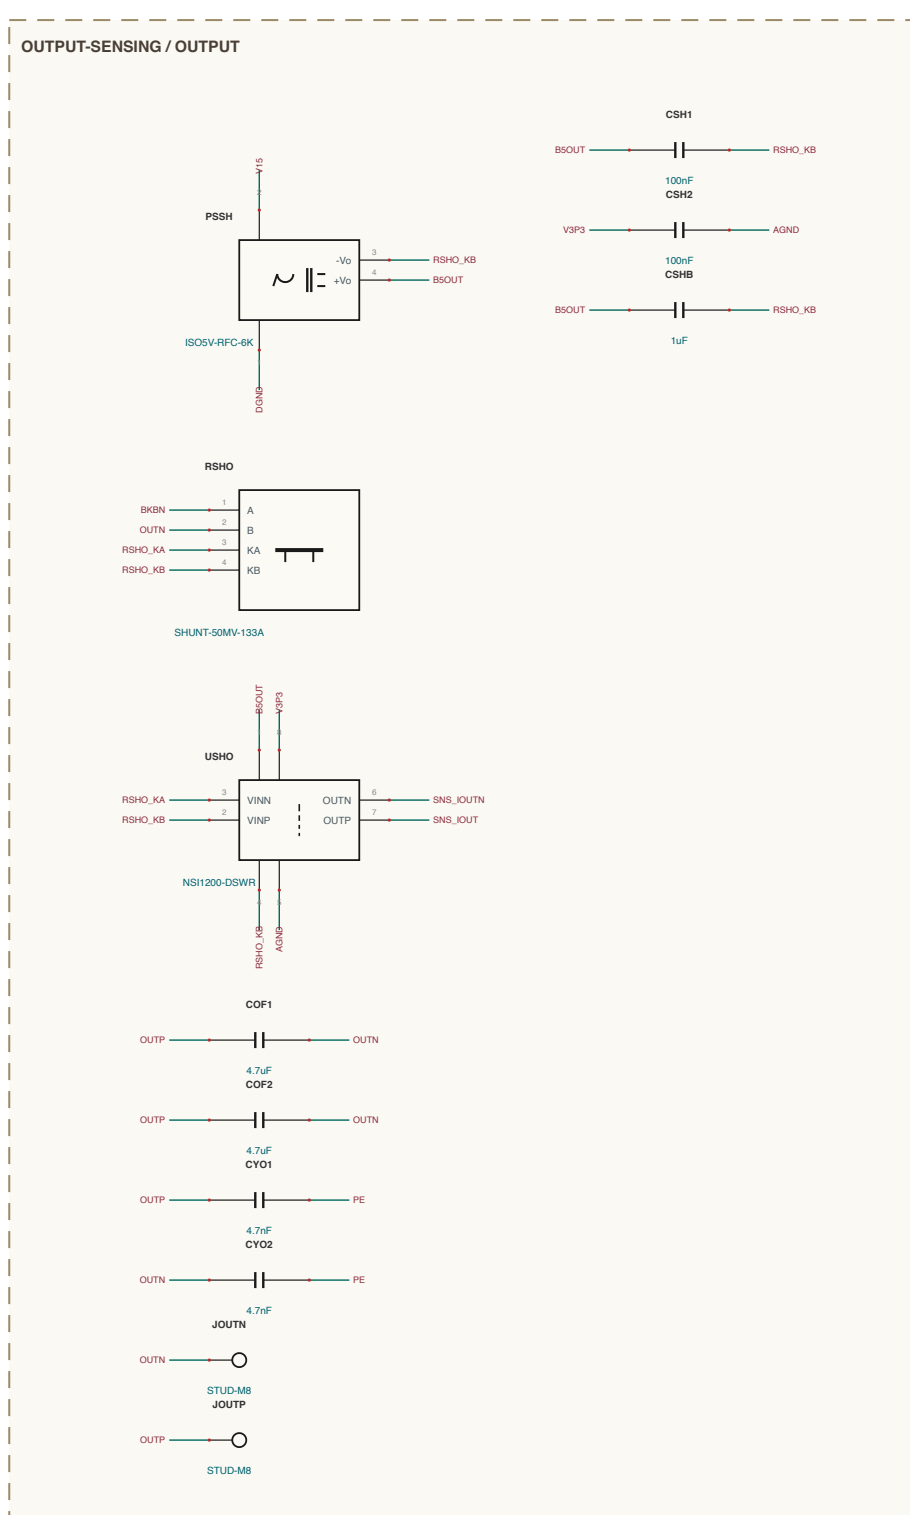
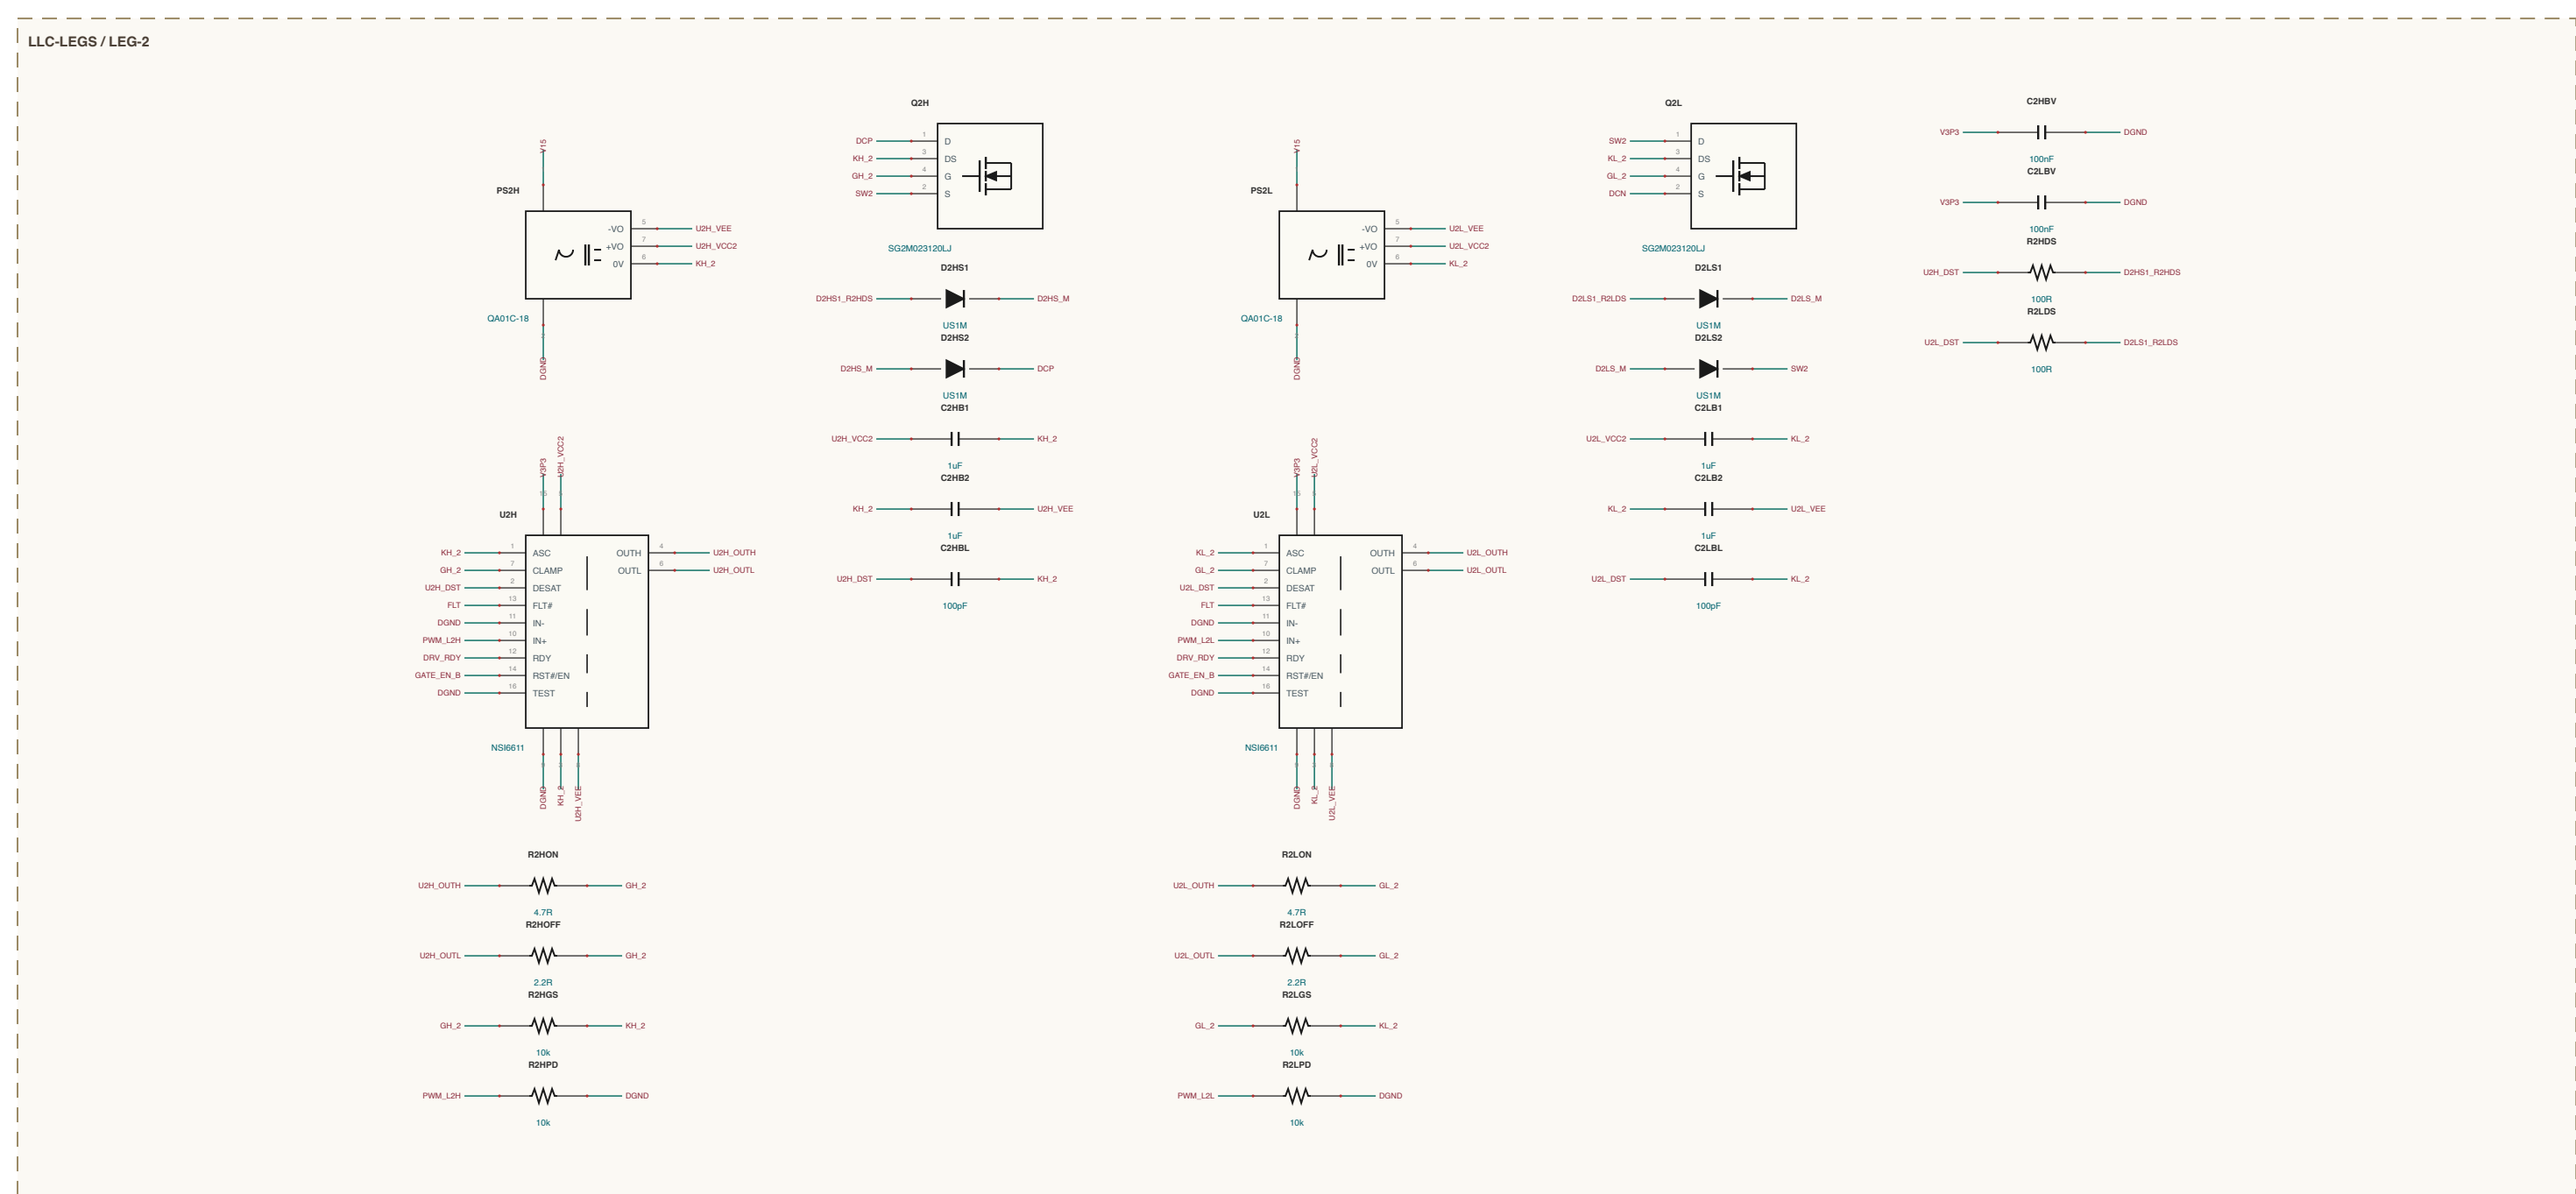
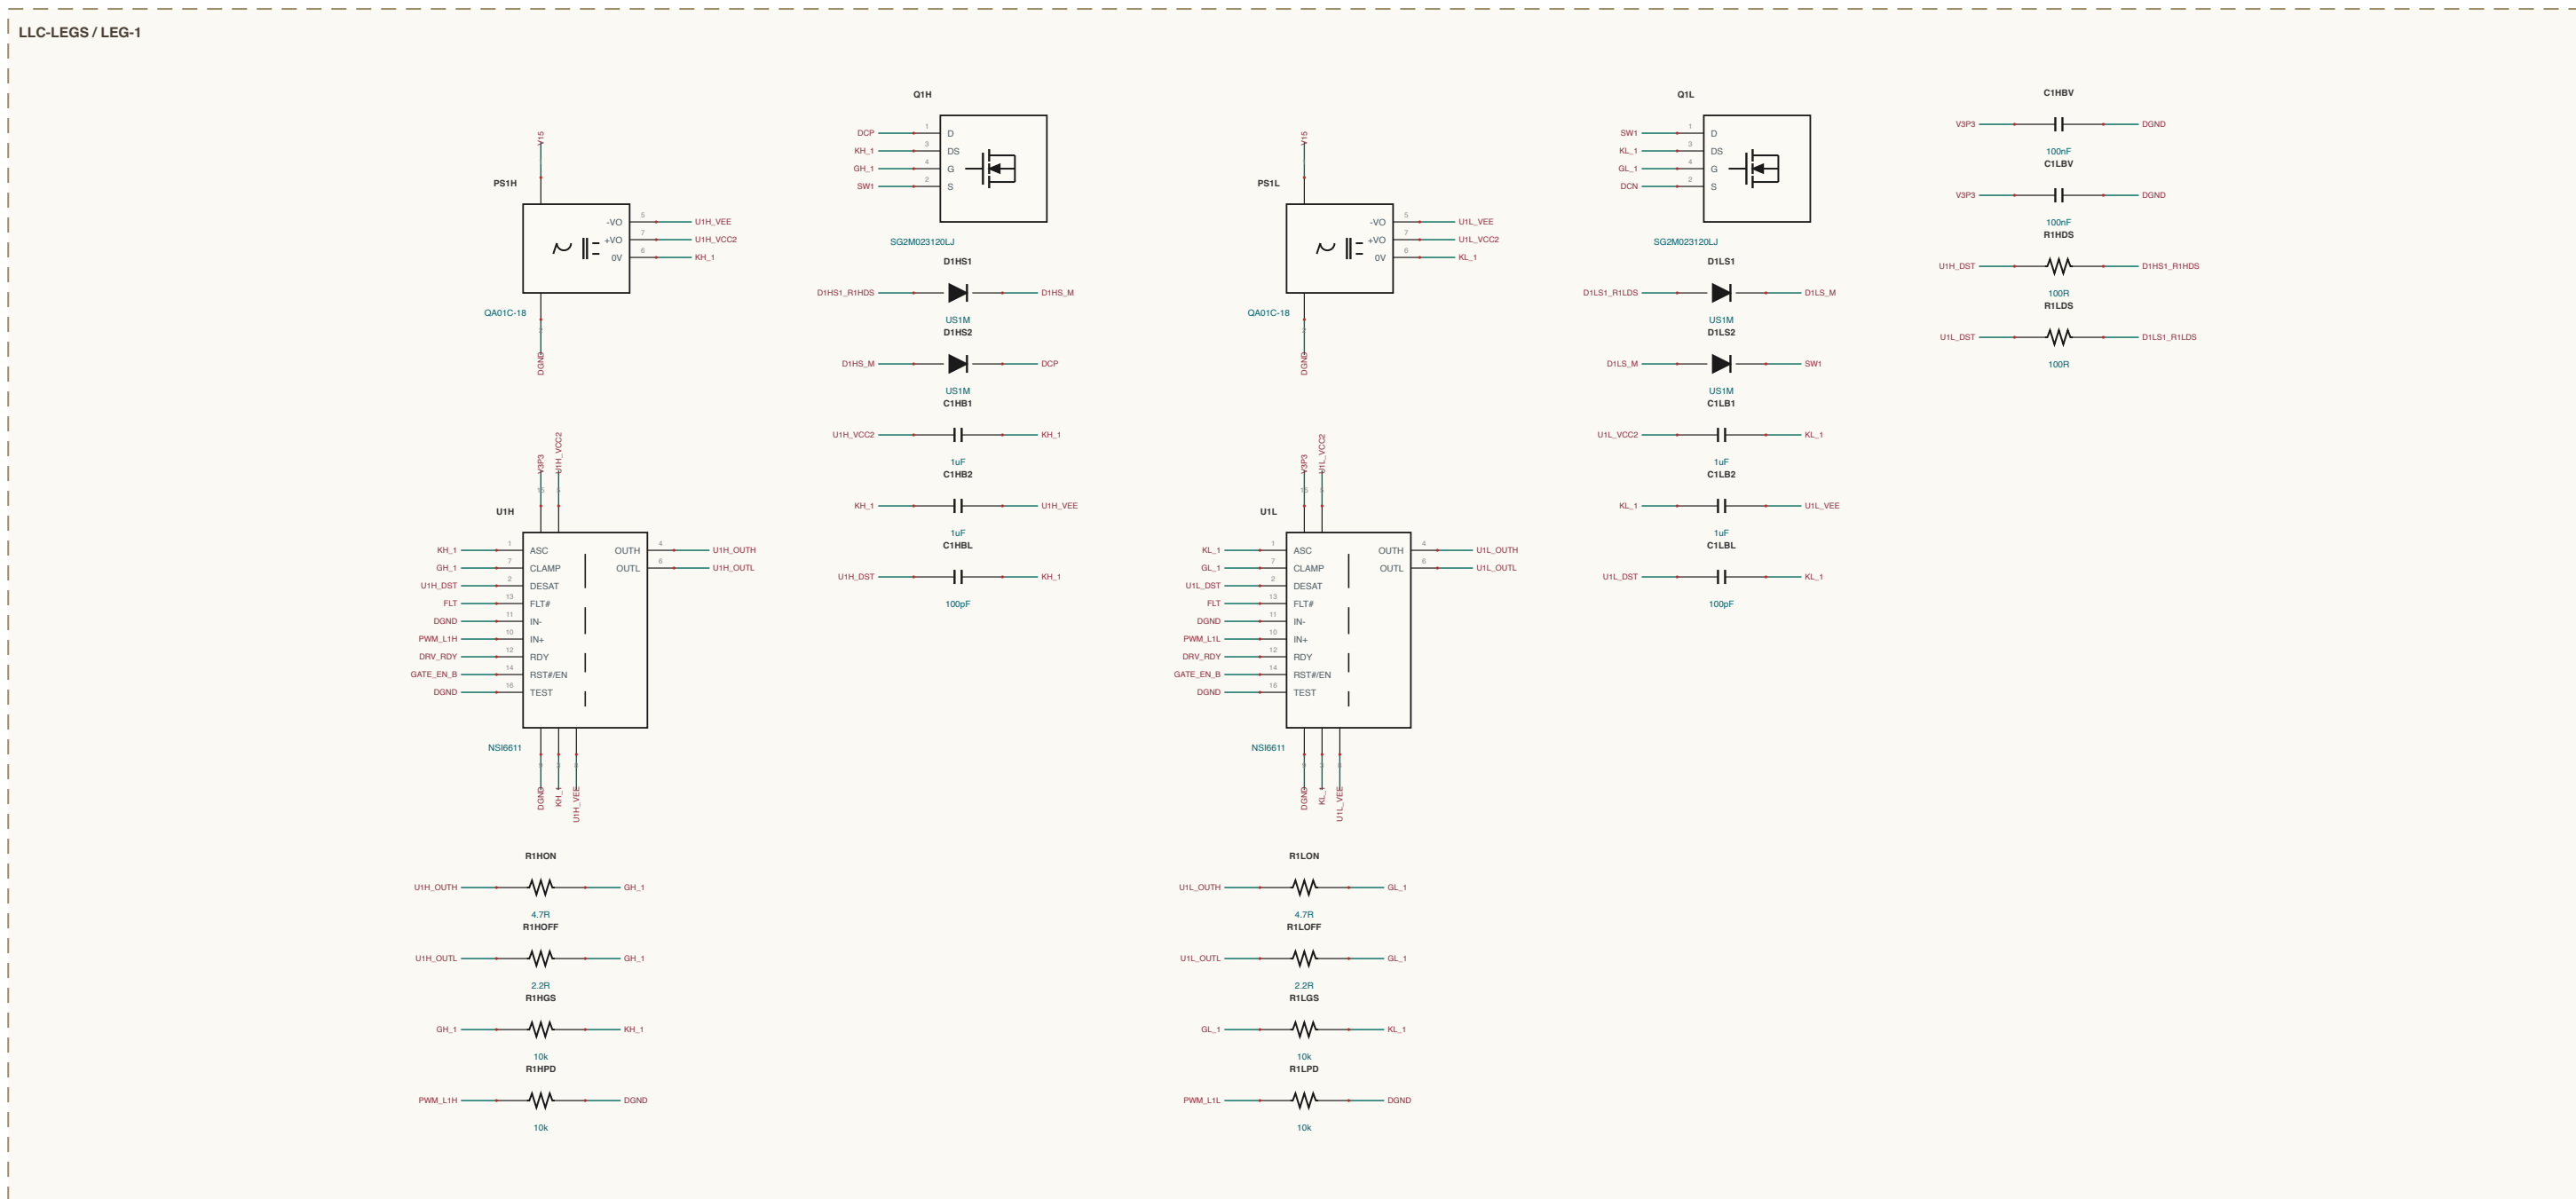
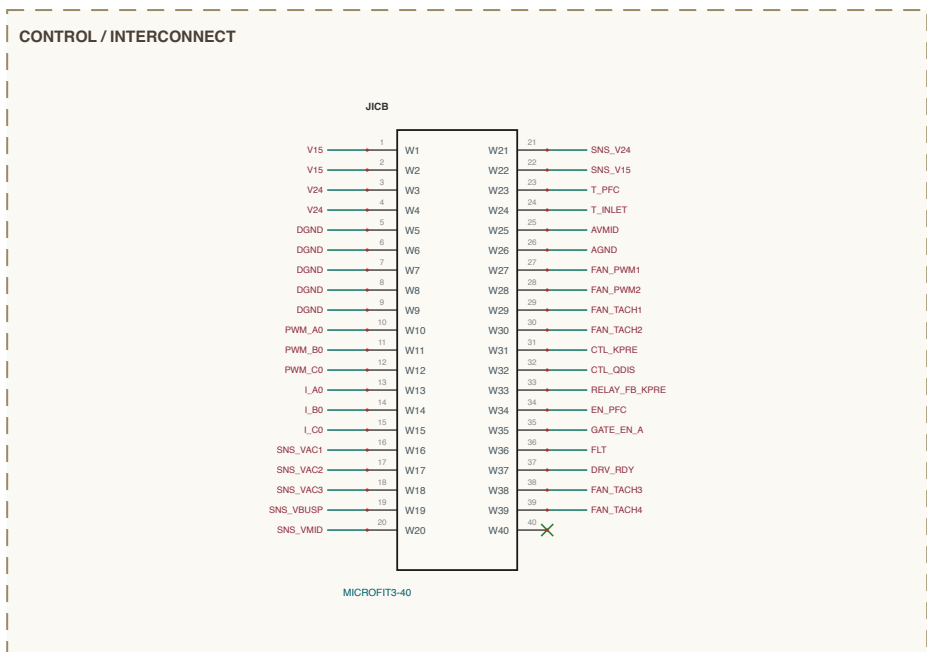
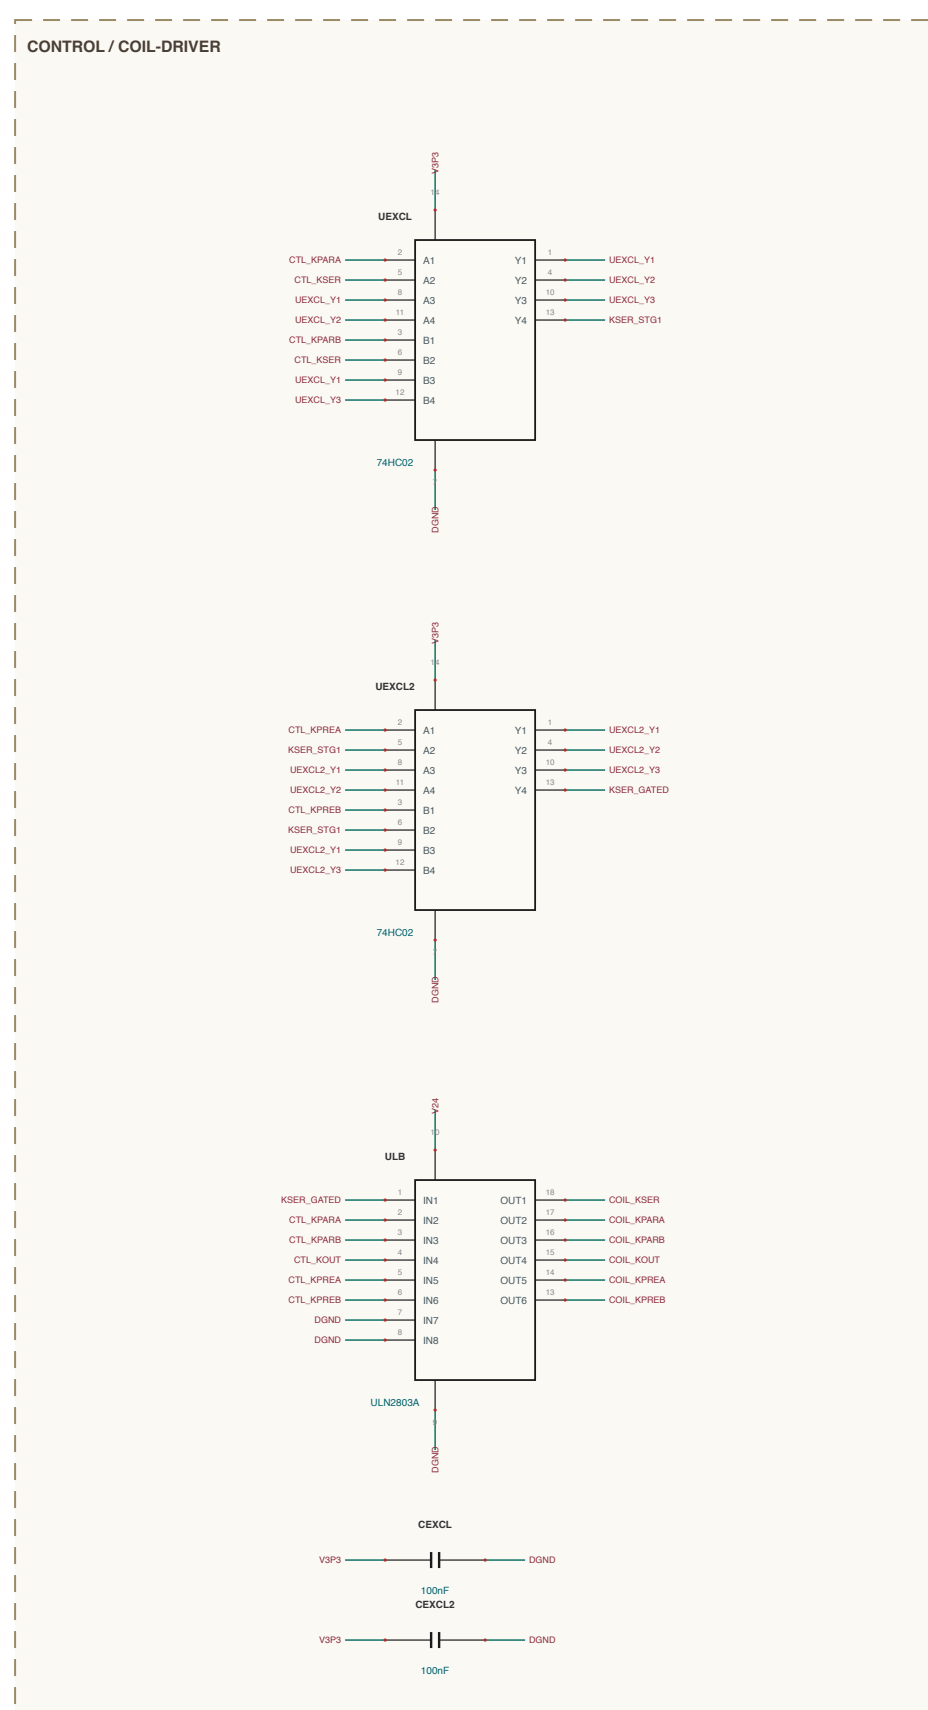
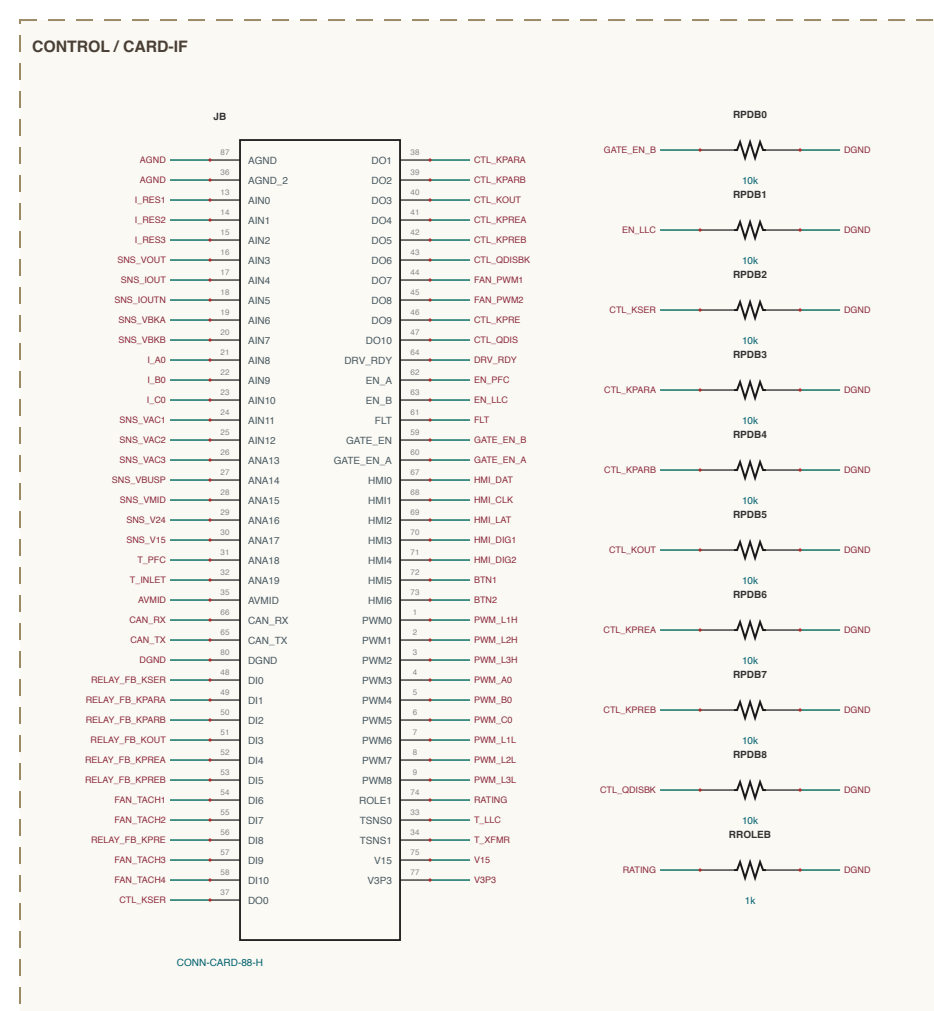
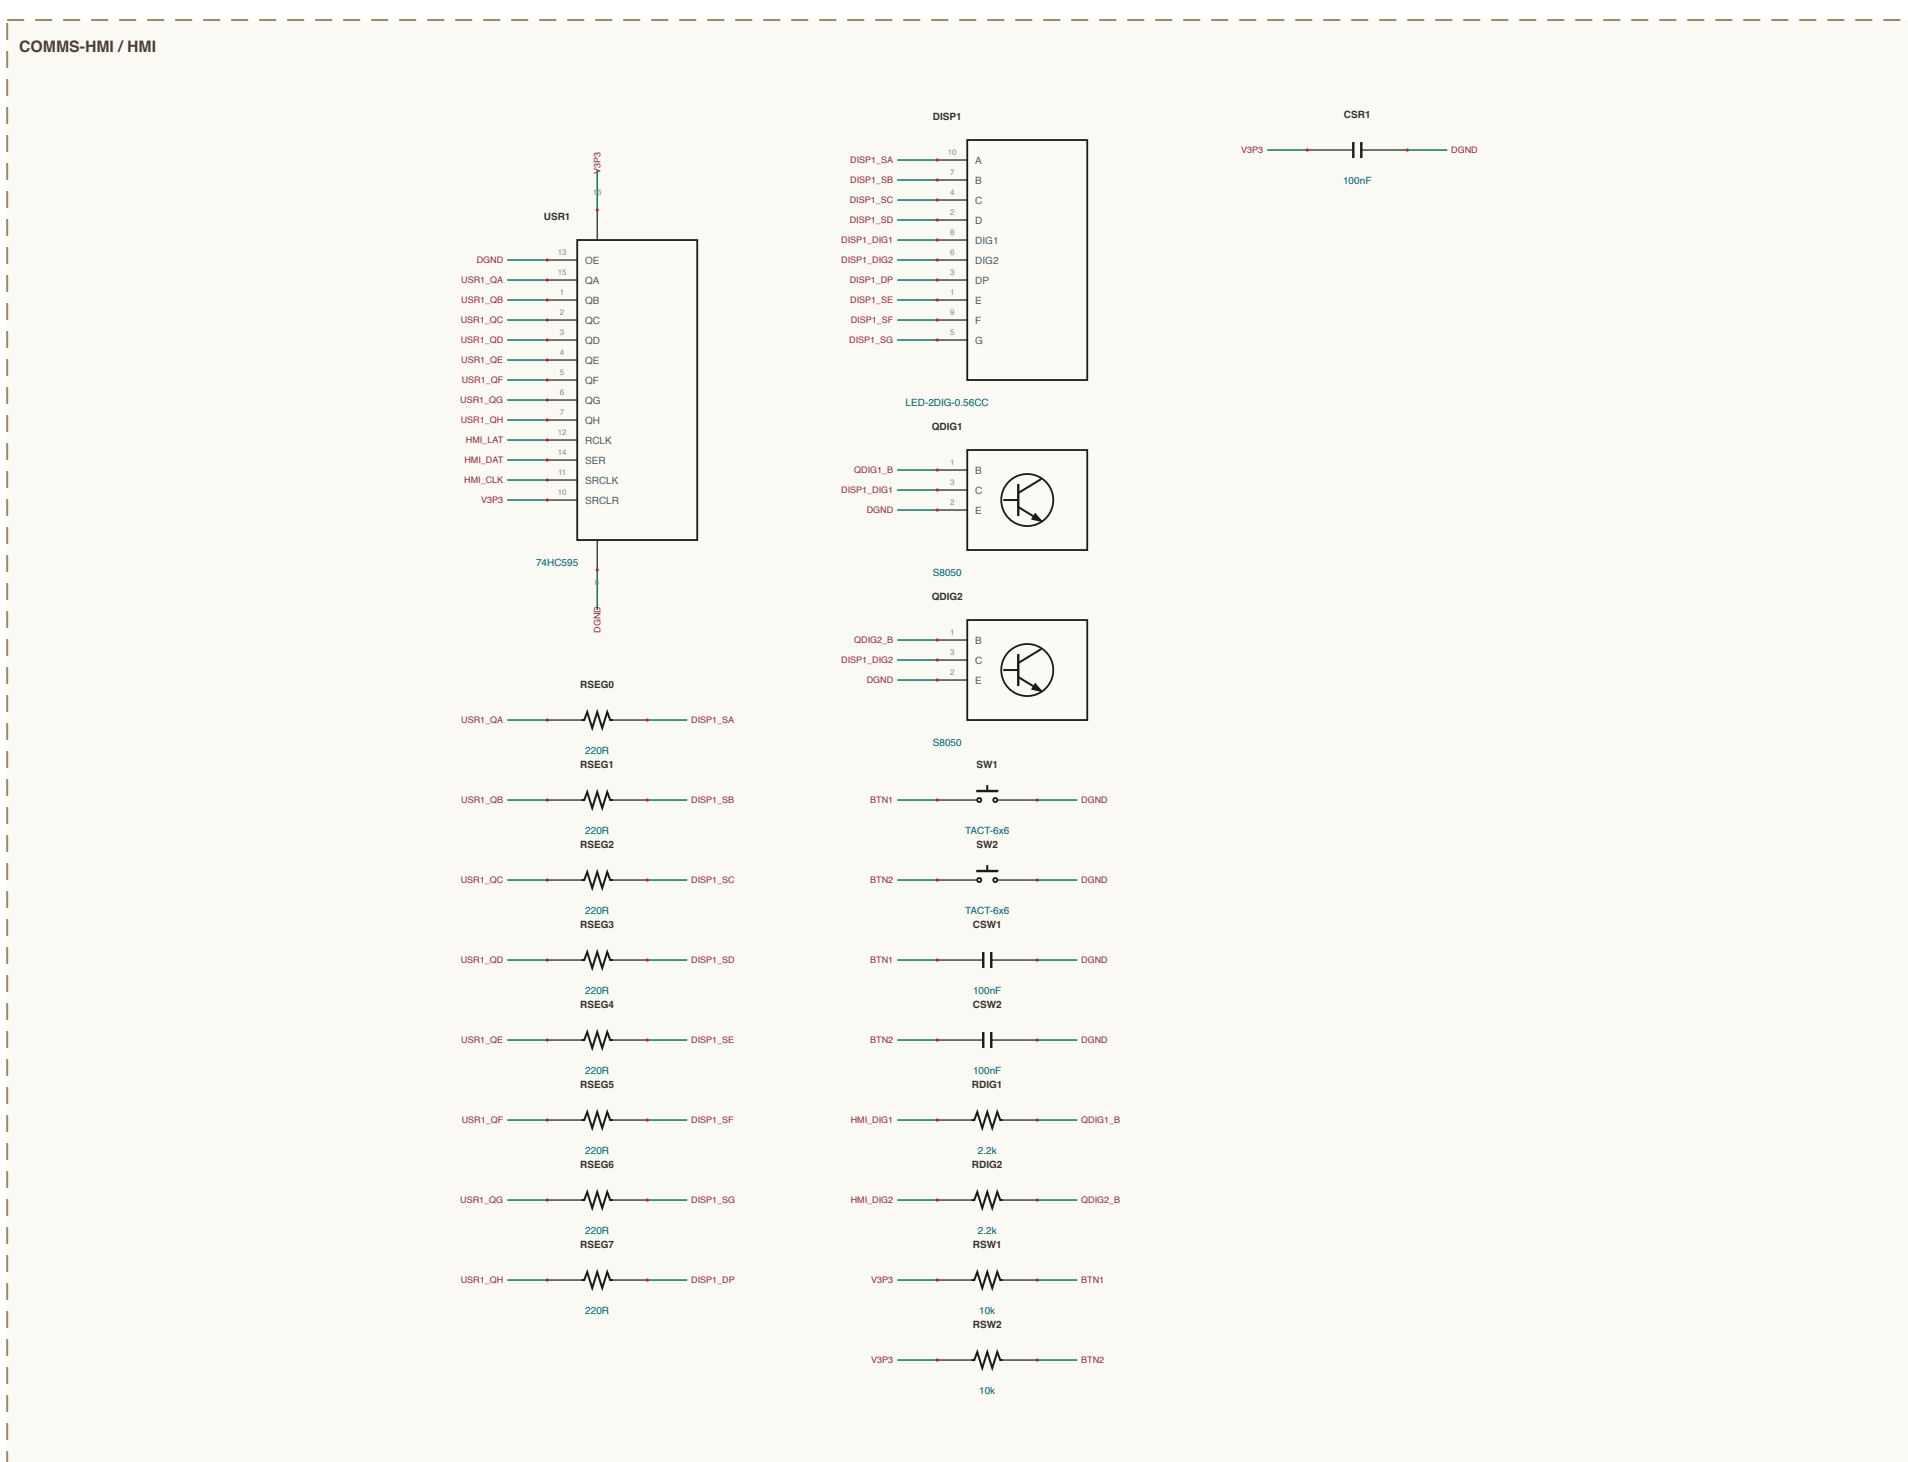
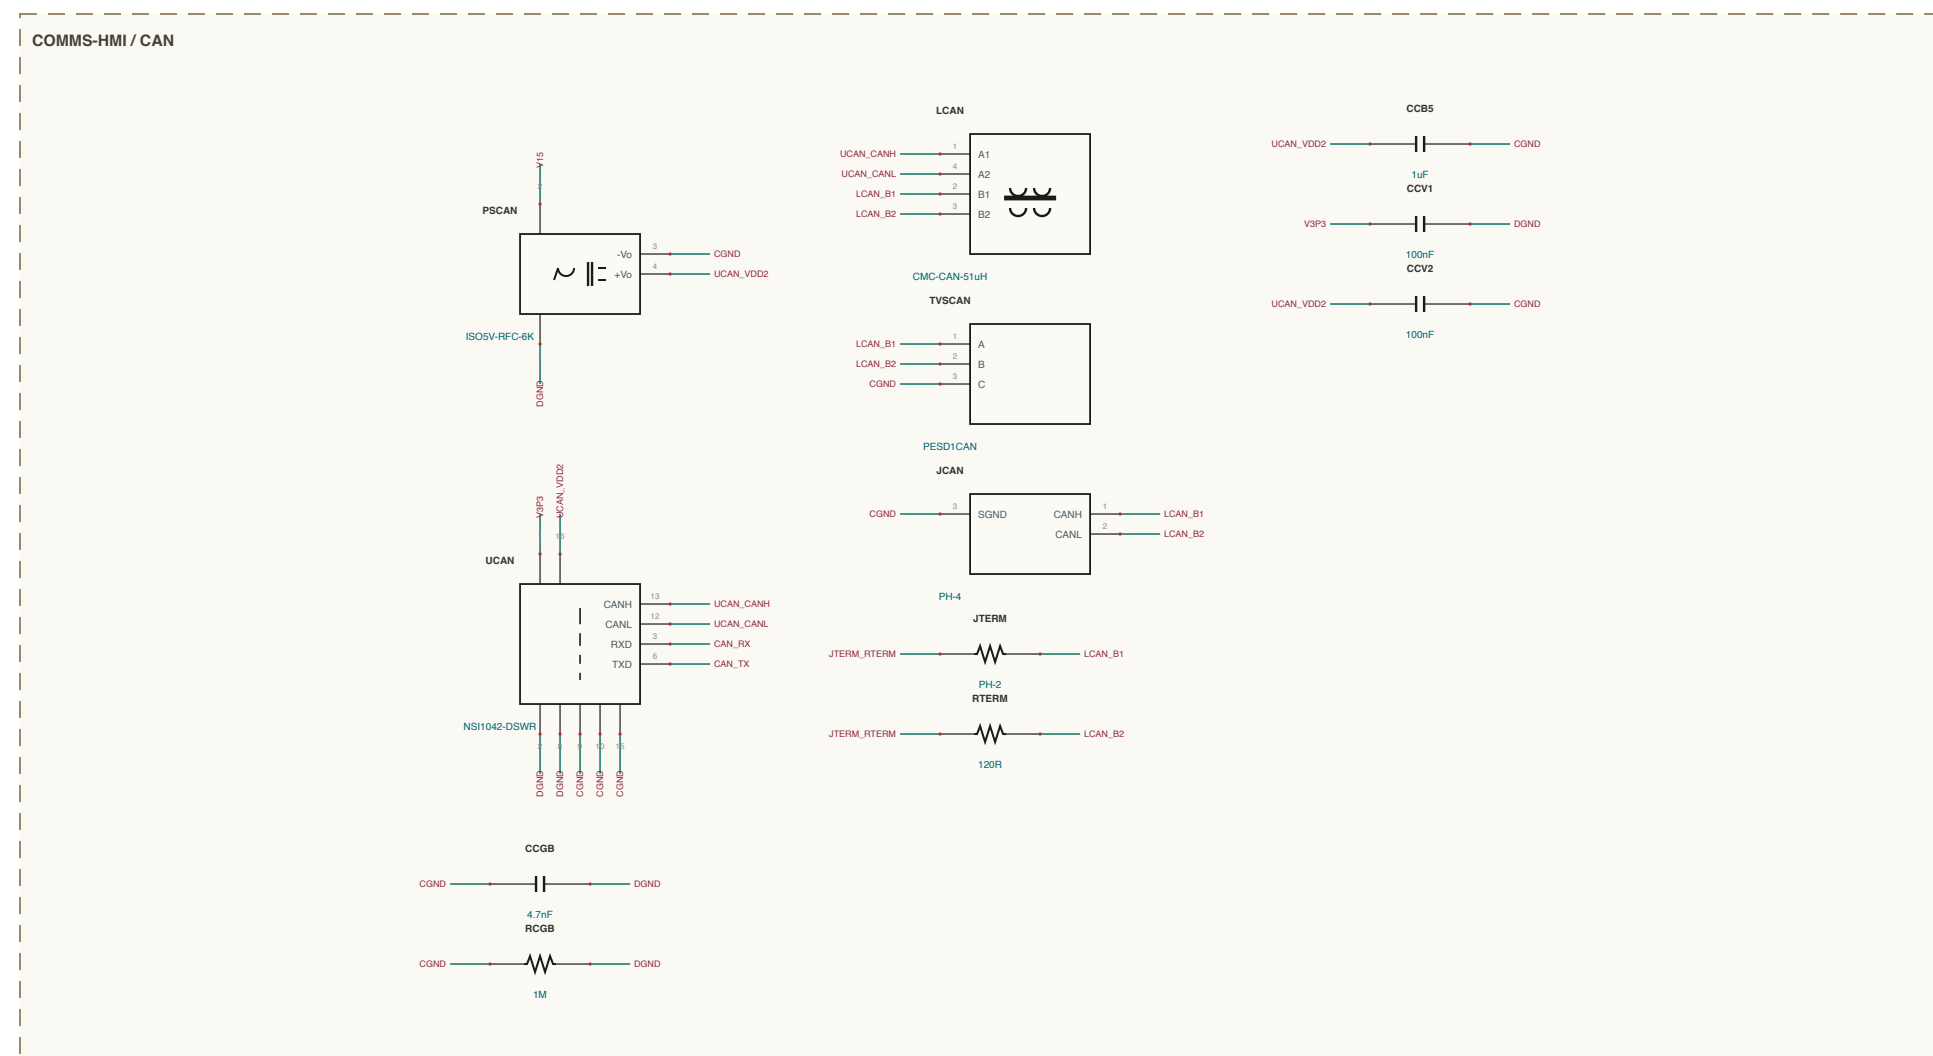
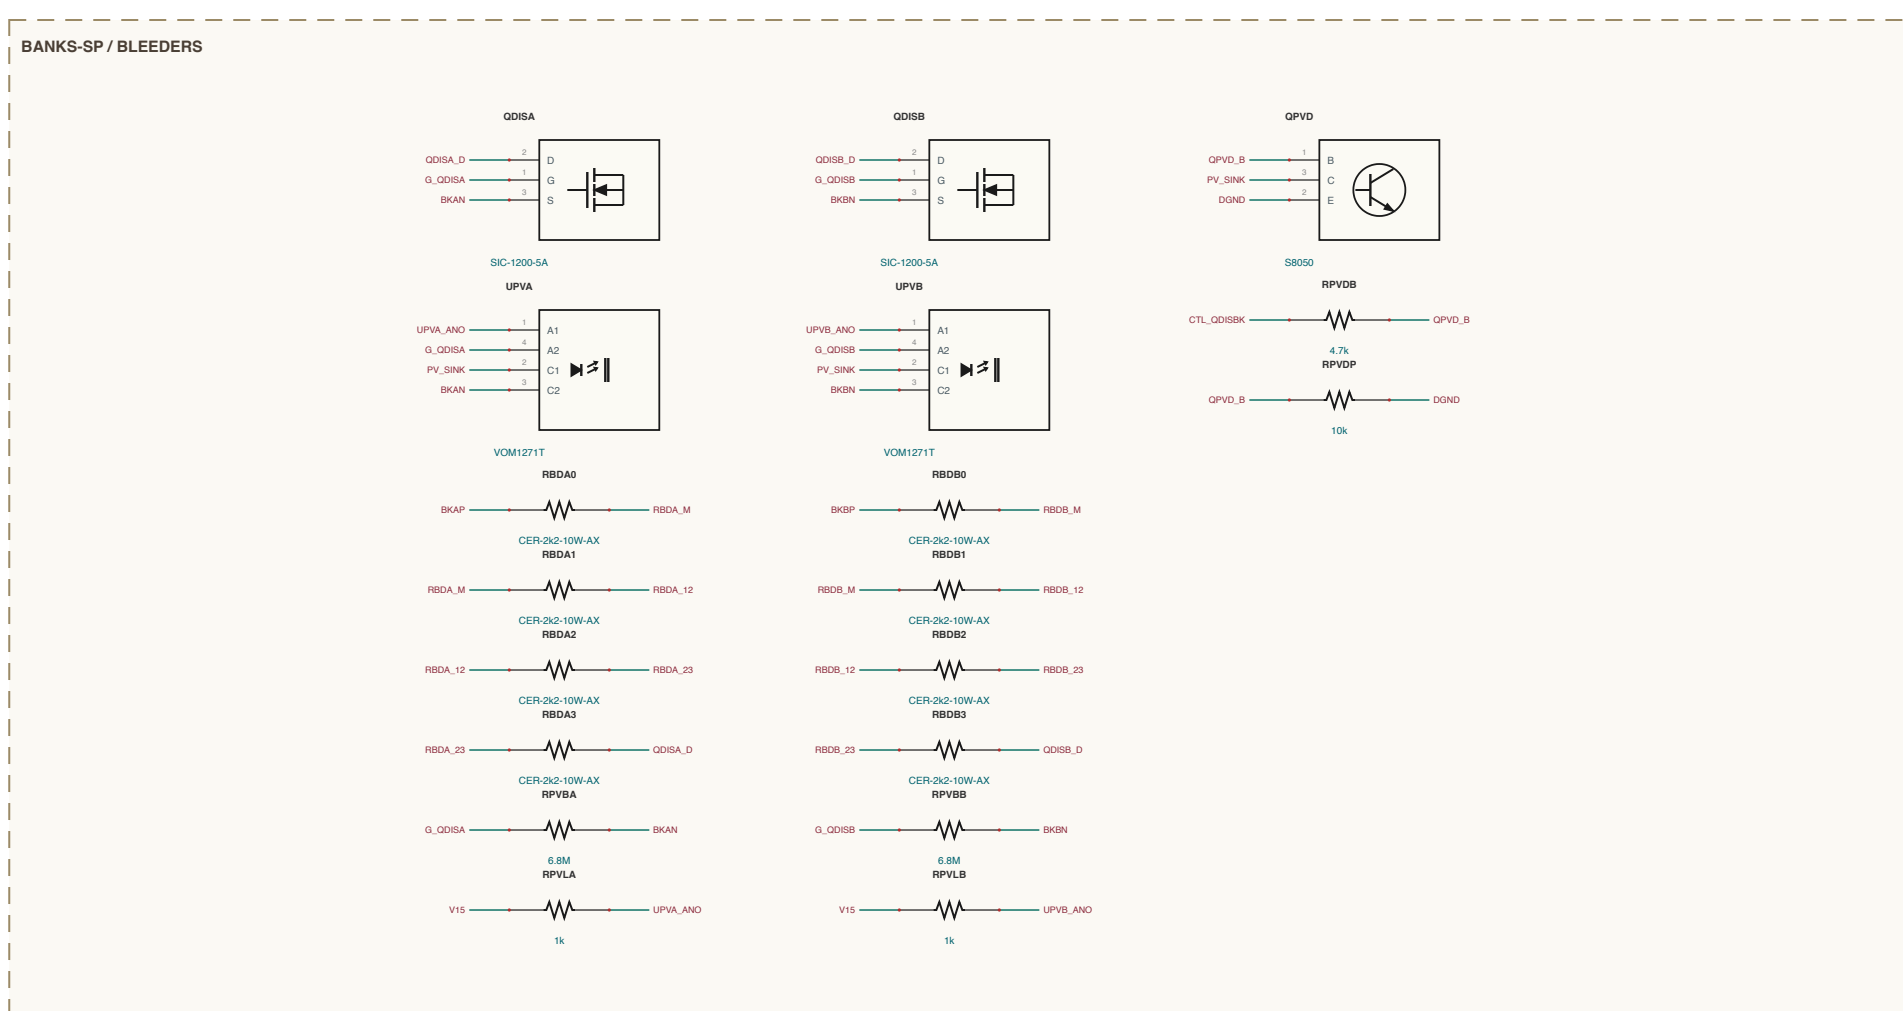
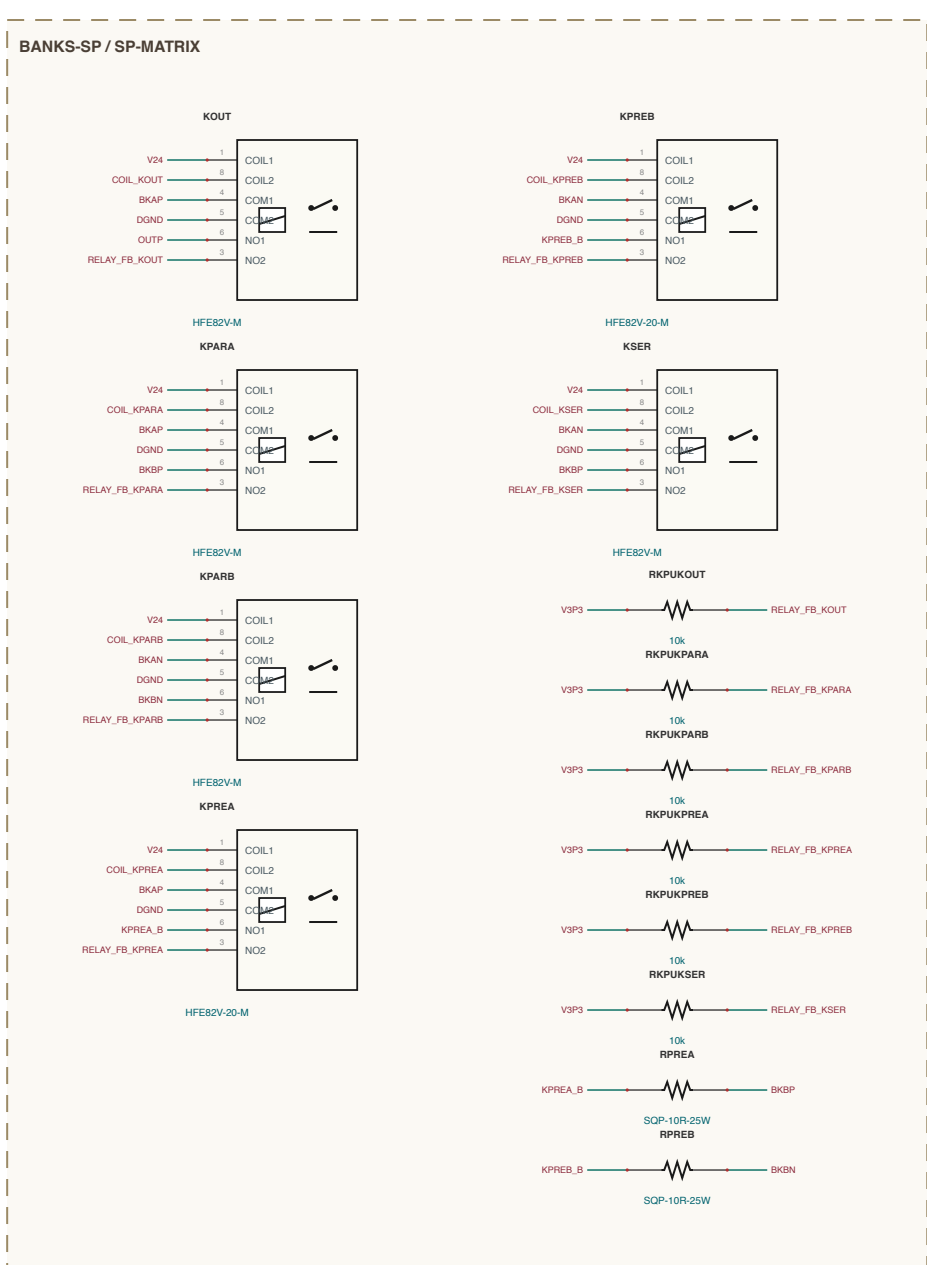
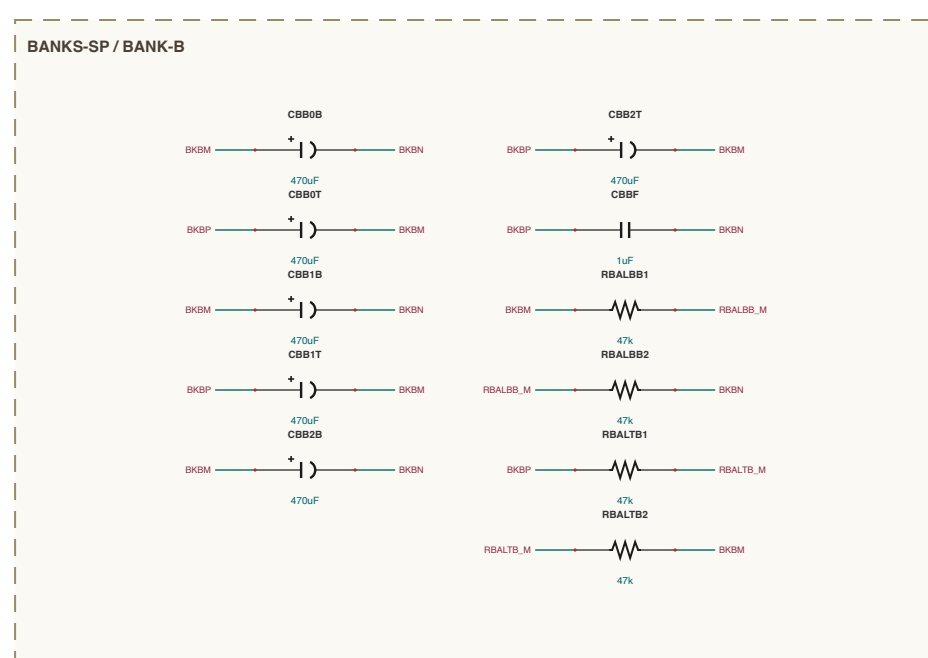
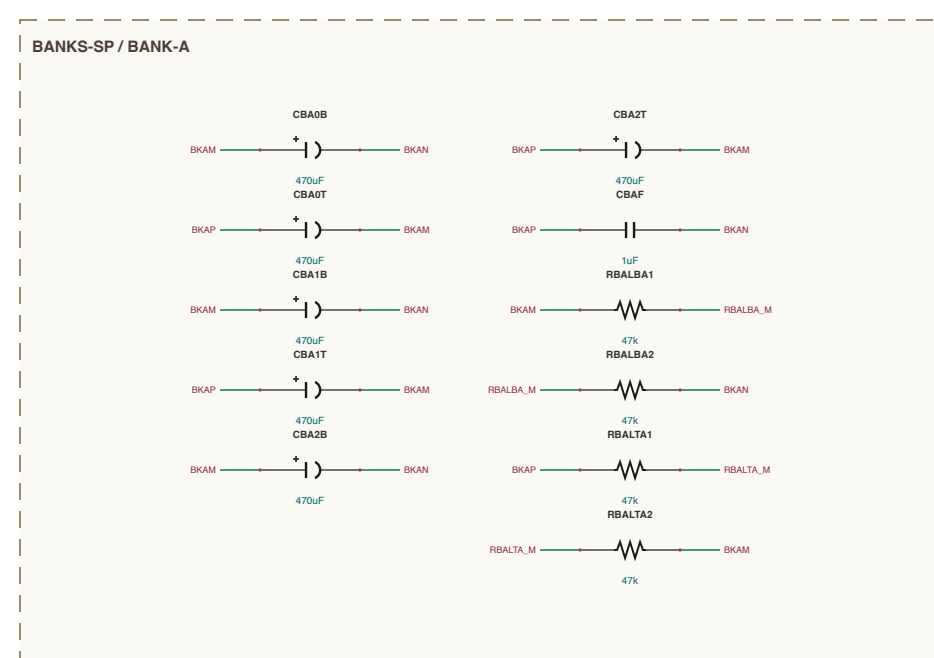


[illegible]

NET NAMING

Internal positions are named for what they join

Locals: *off* to the nodes at that C₂ join e.g. *LOCAL_VMP*

Peers: *3d* midpoint of a source pipe e.g. *REAL7C_M*

Neighbors: *cross* to the nearest footcandle e.g. *INDV-01*

All others are explicit design notes

MAGNETICS CONSTRUCTION

(density per disc/magnetic media format, gpg, file, compliance times line length)

50 75 10 3in E339352 per section, 30-0-0 (25-40), windows 8000, L=600 (400-700) gpg-ground

50 75 10 3in 400-0-0 (25-40), 30000-0-0 (25-40), 30000-0-0 (25-40)

total L = 9174 + measured after leakage (30000-0-0 leakage approx), Or at TANK sections