
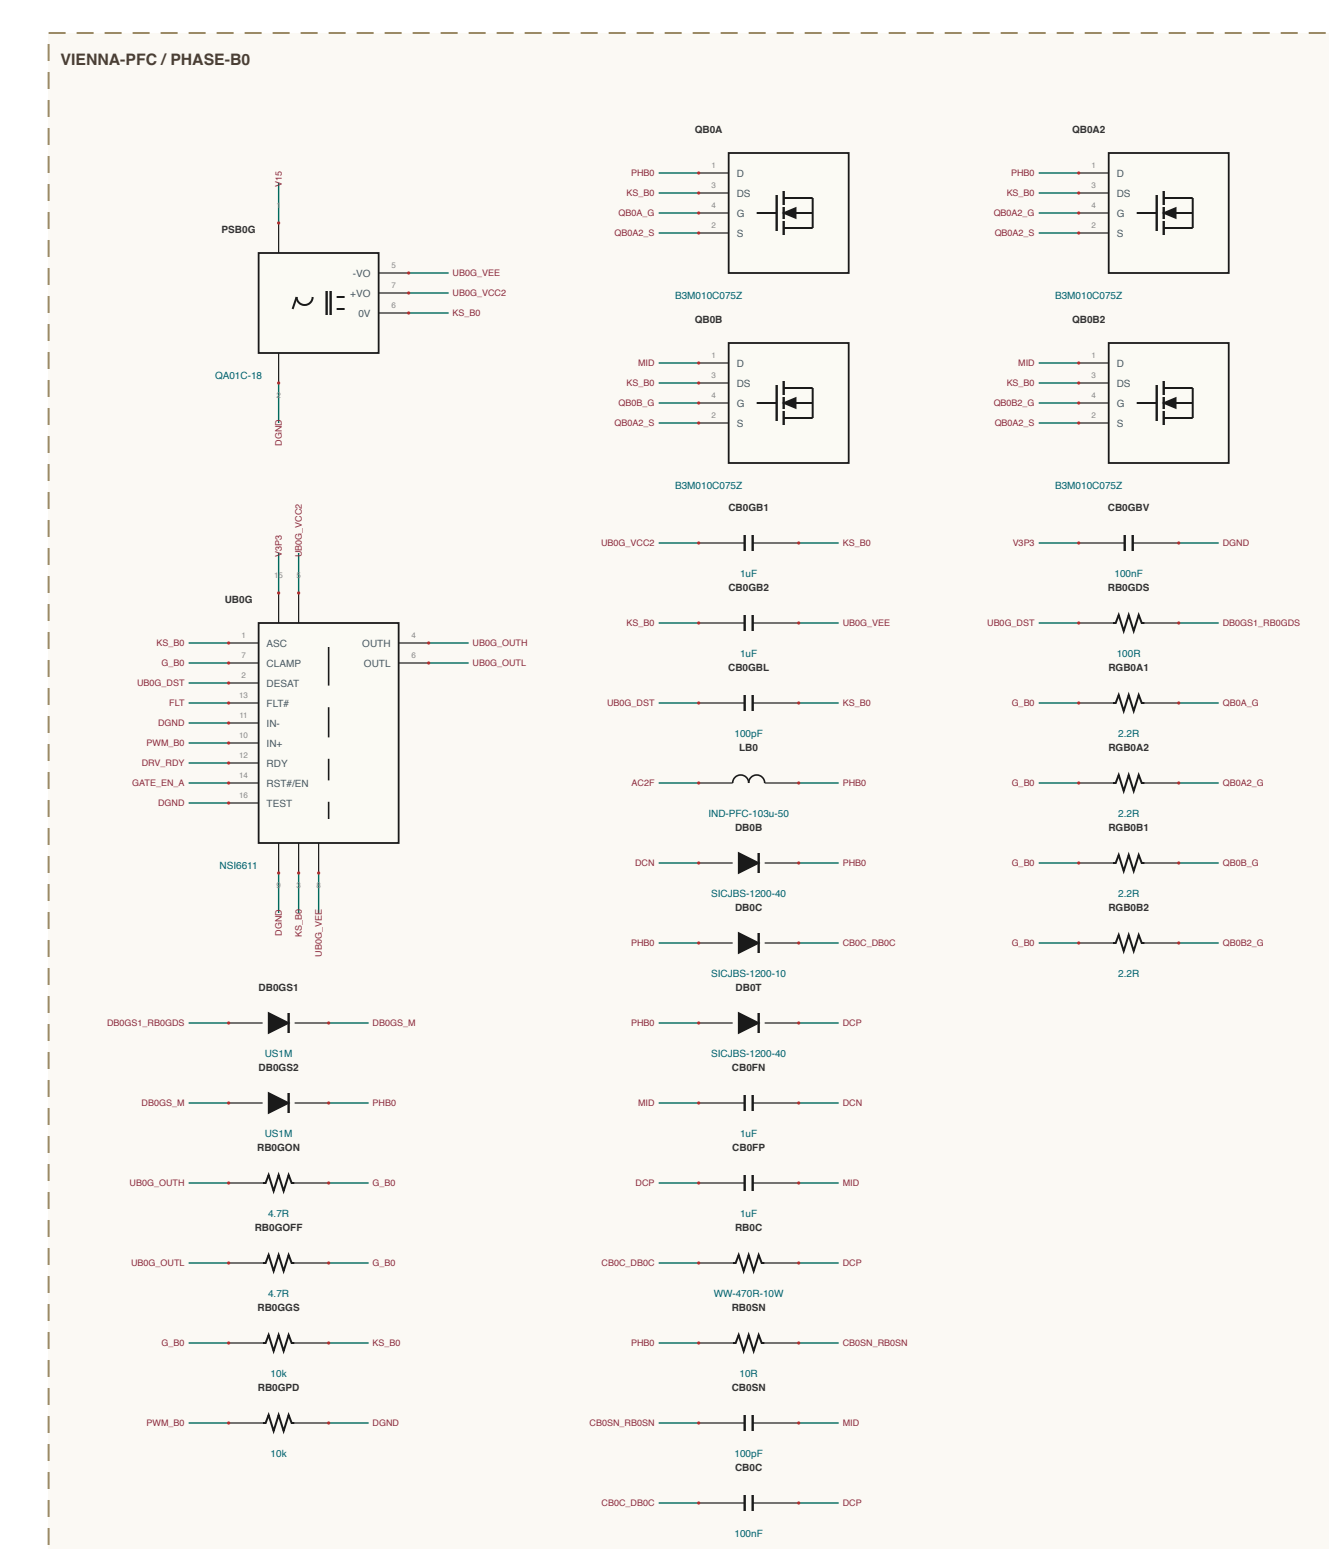
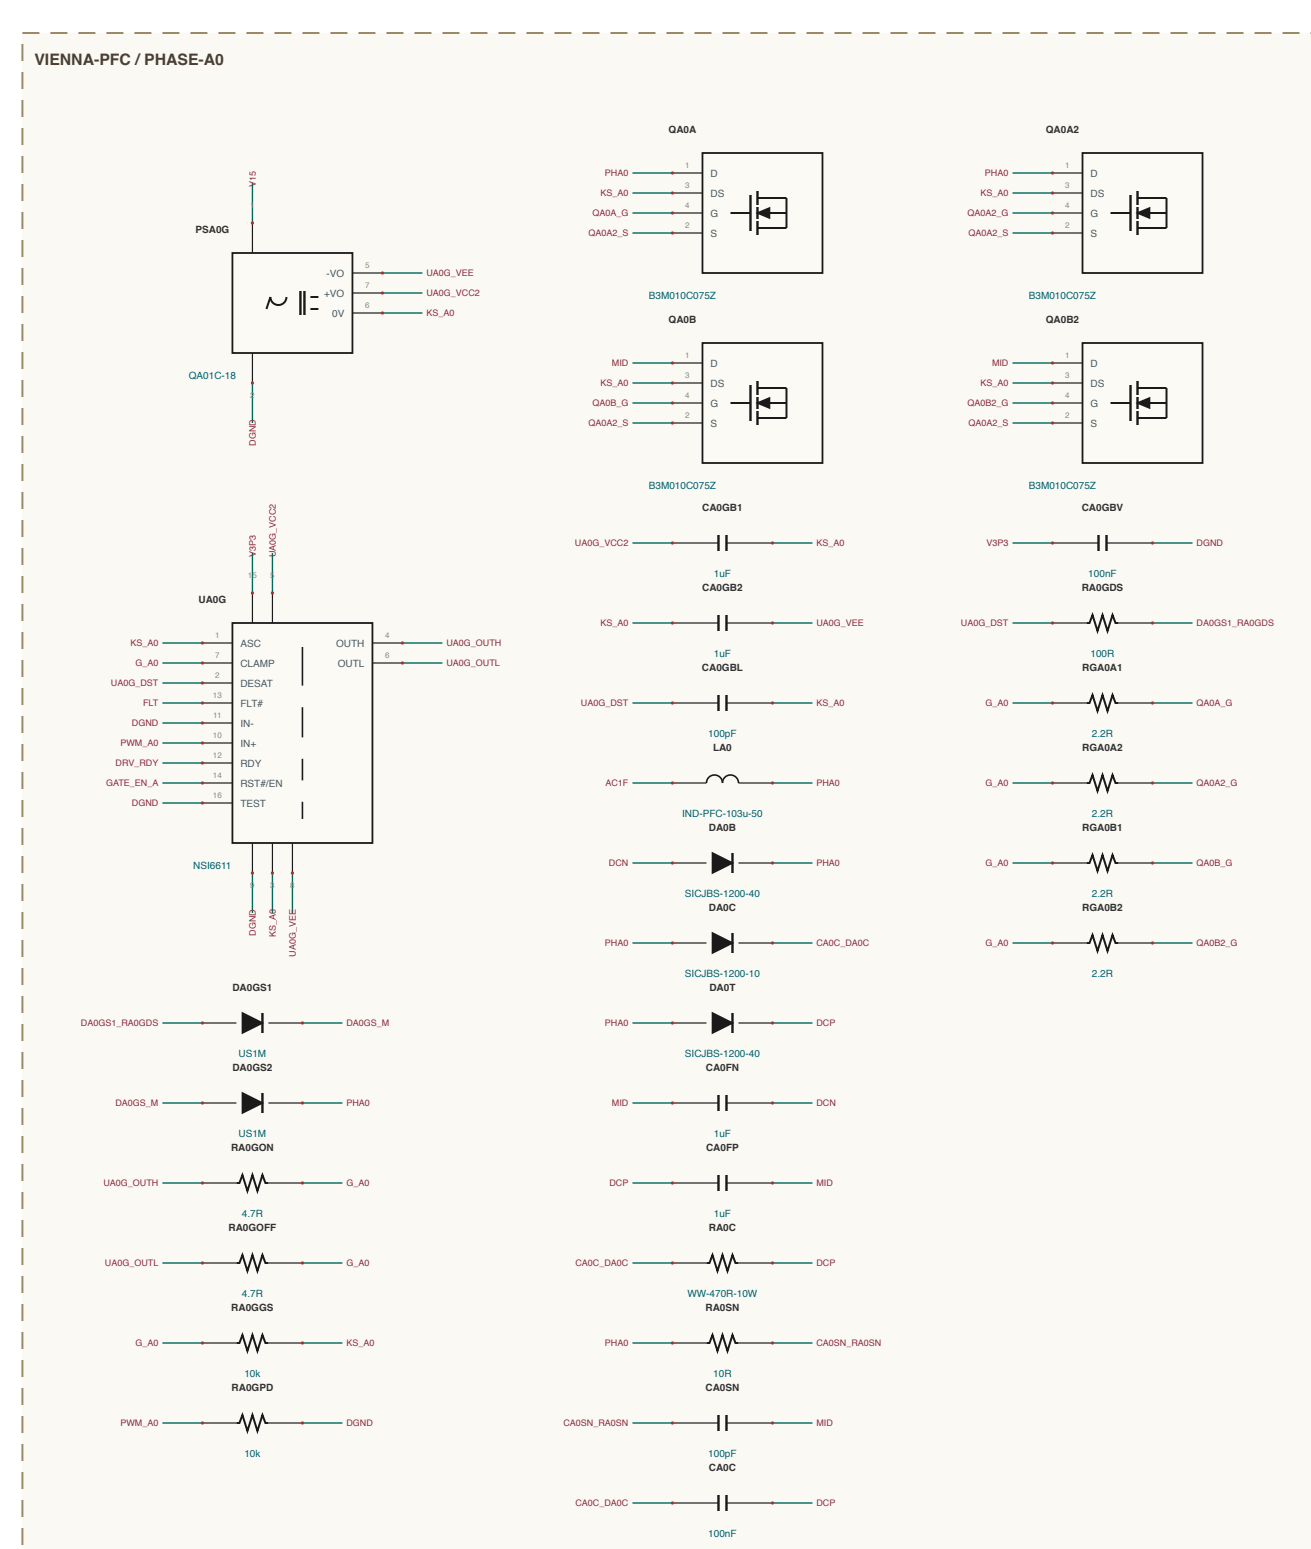
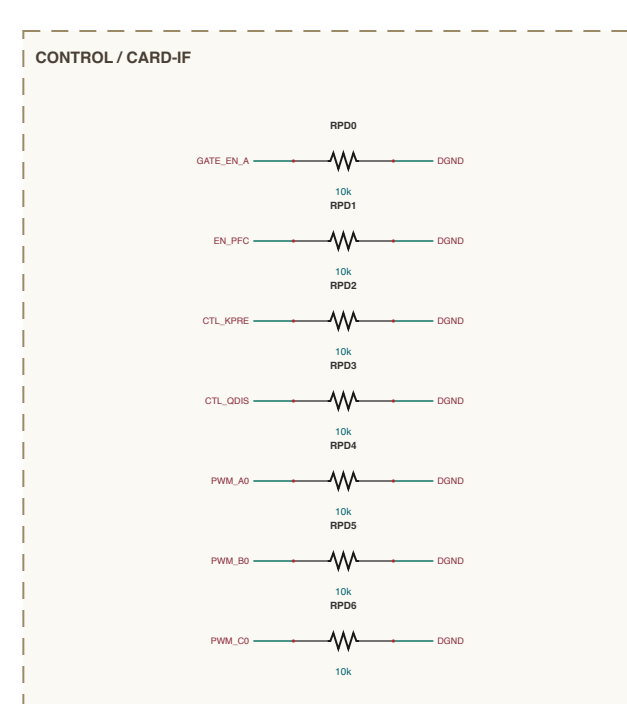
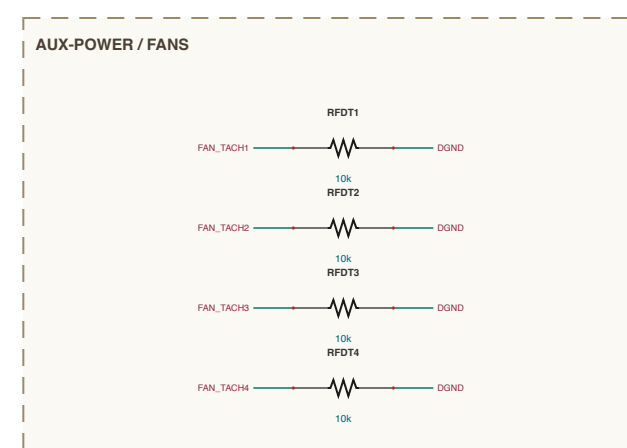
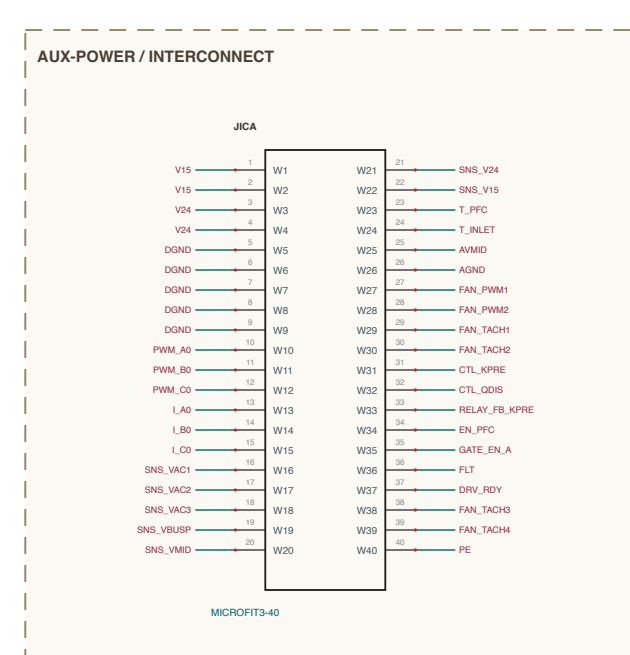
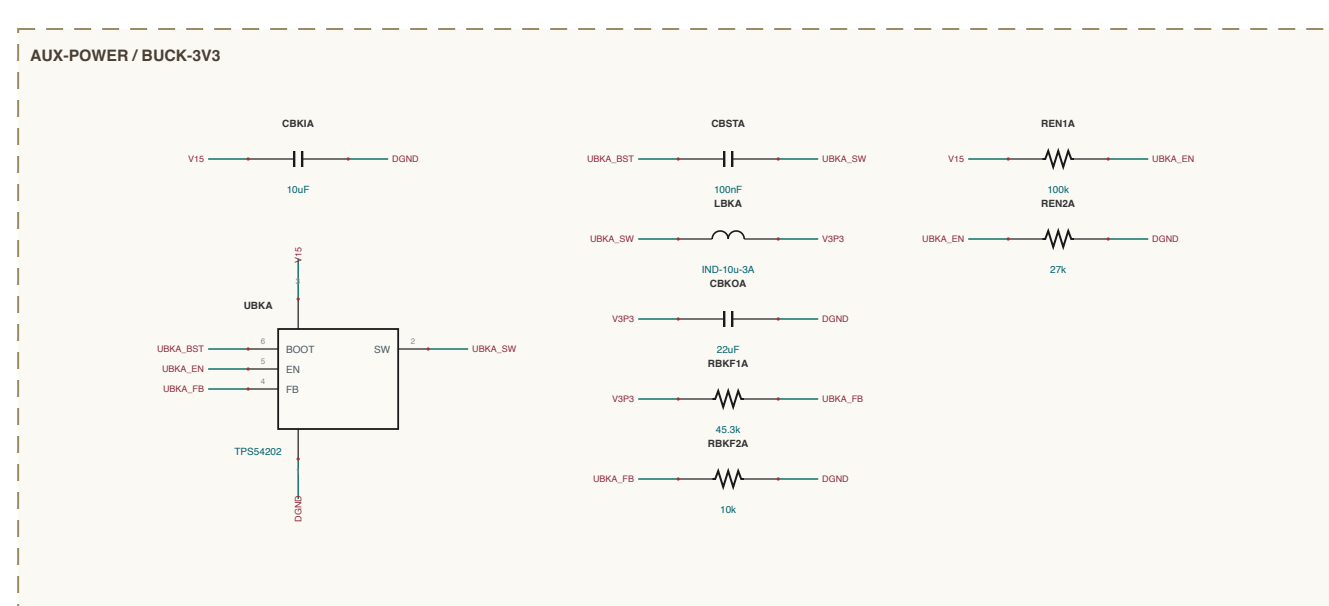
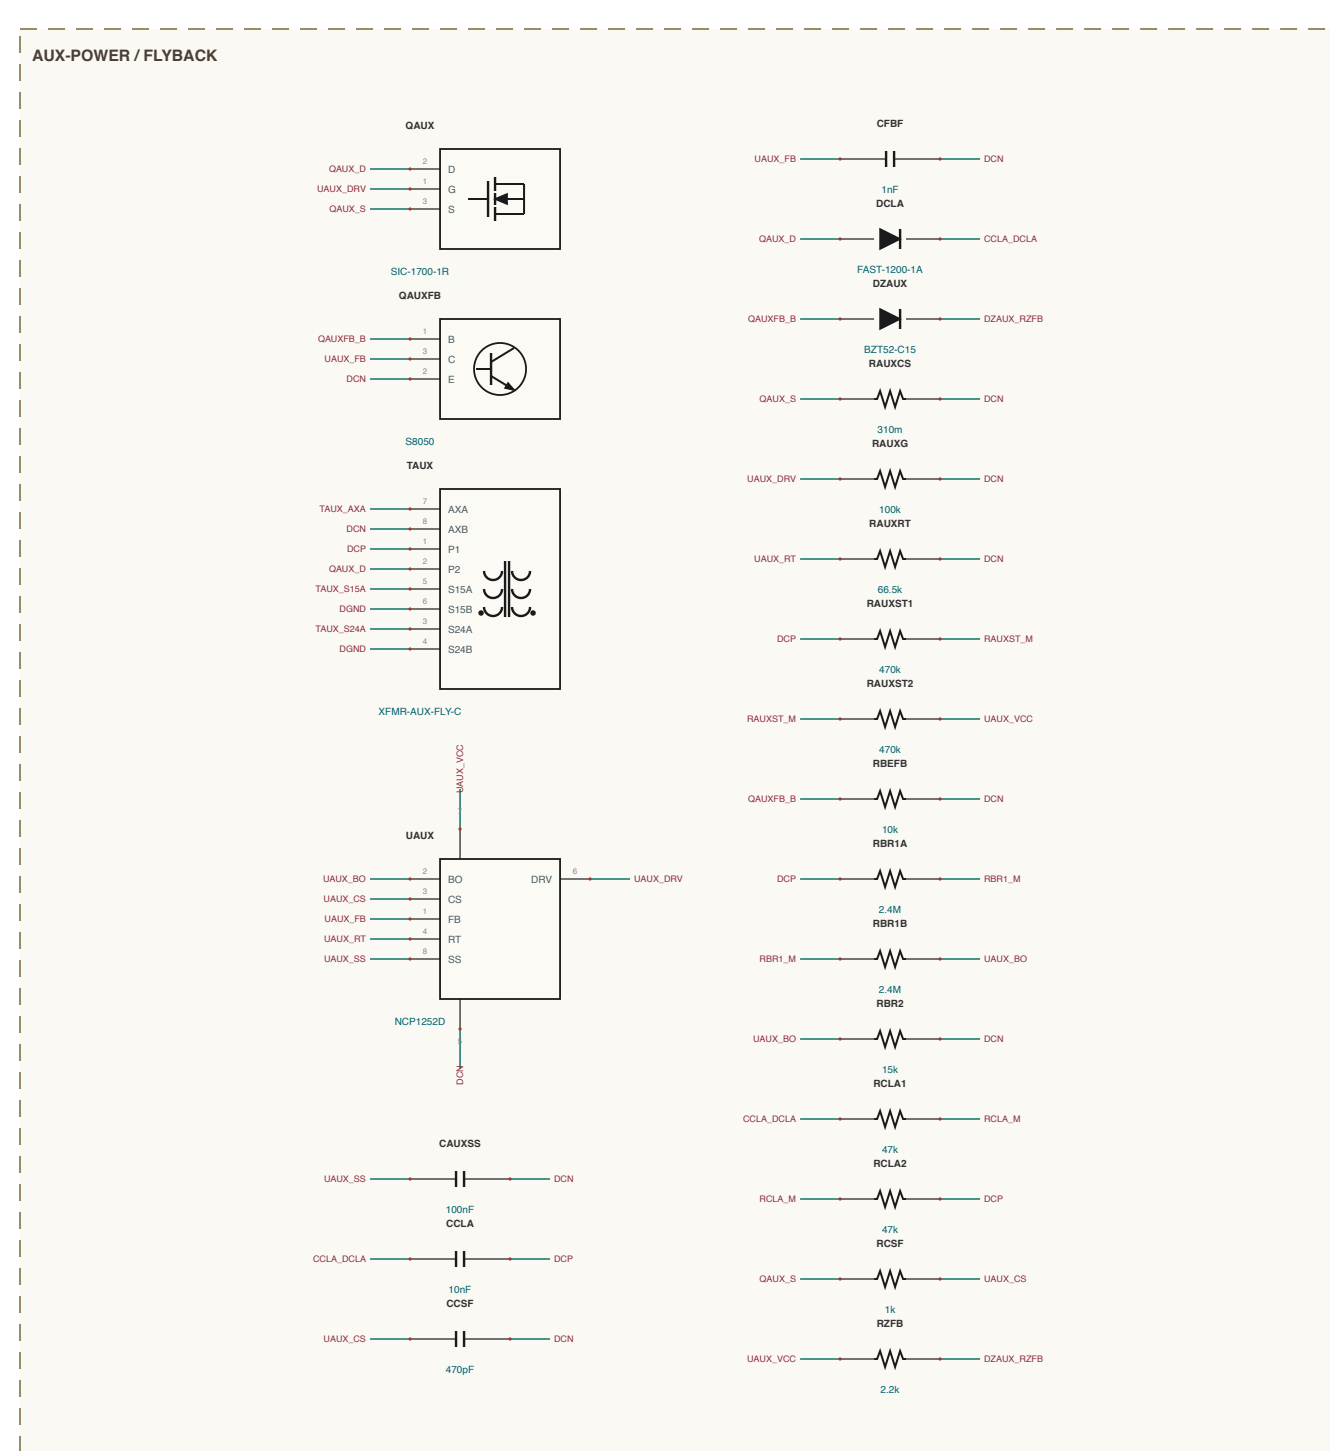
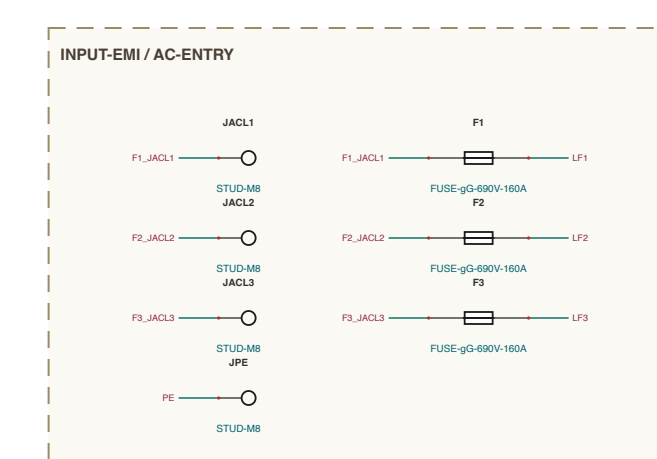
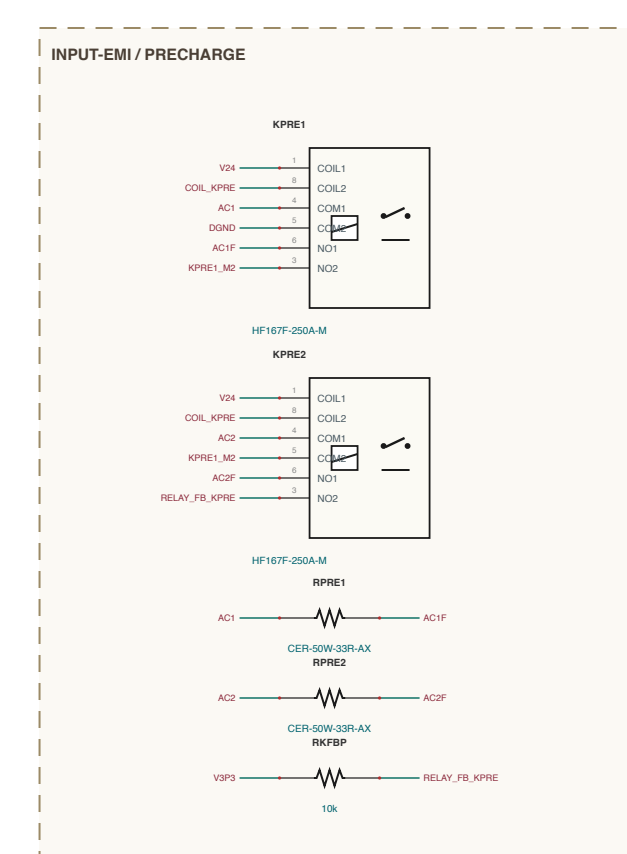
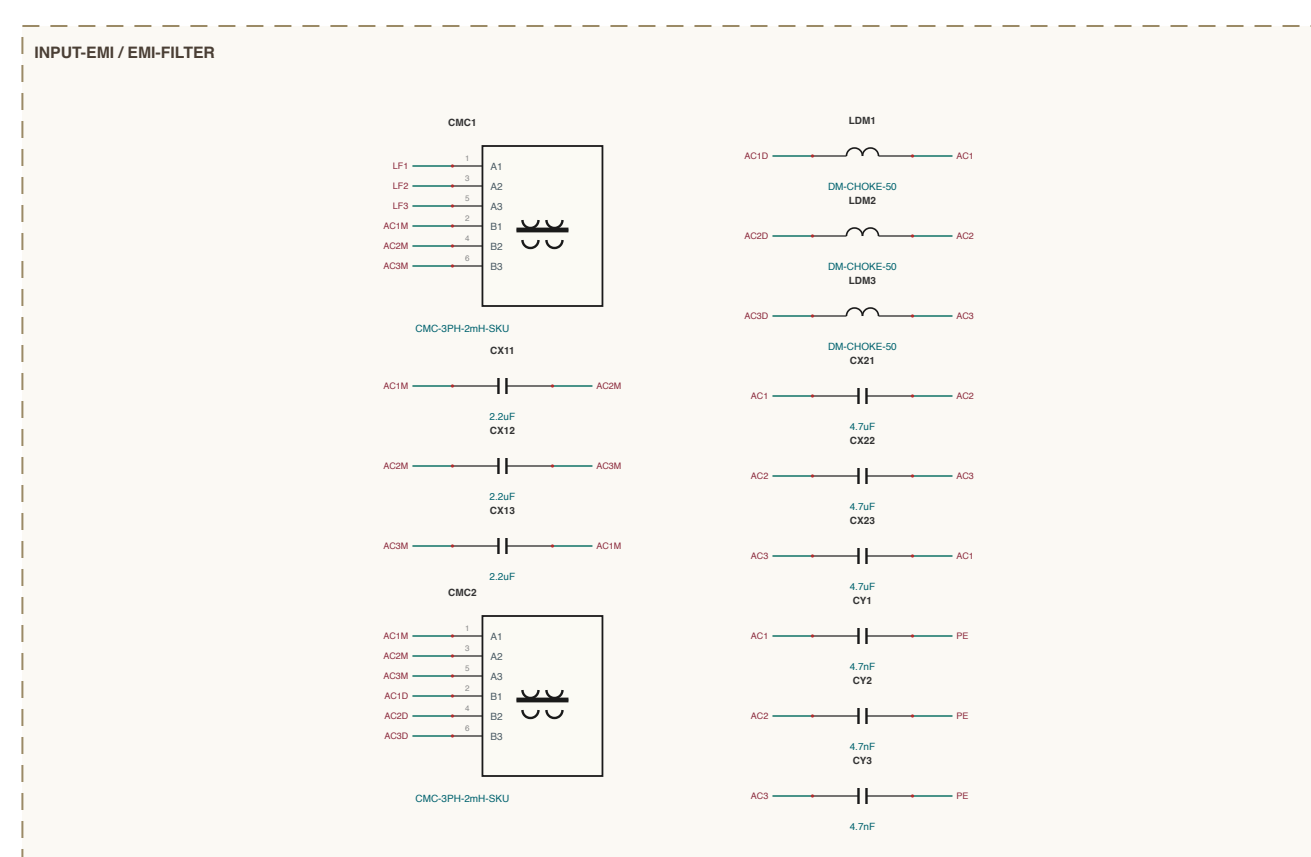
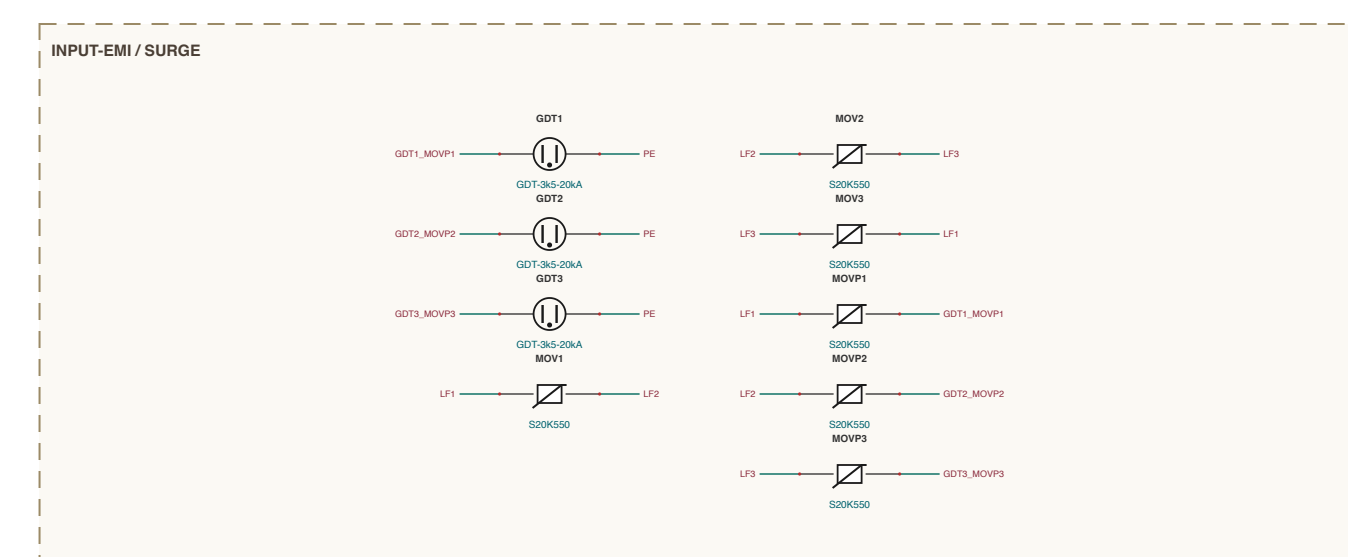
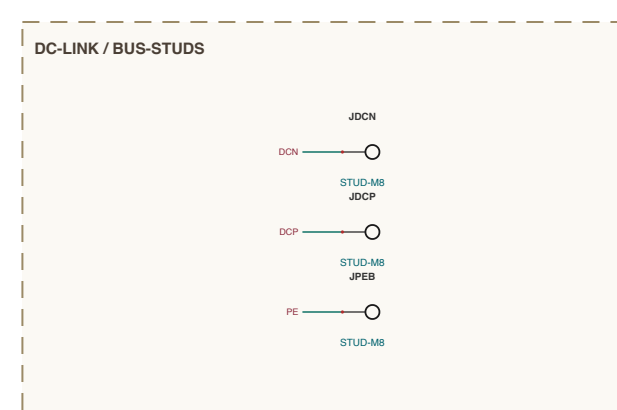
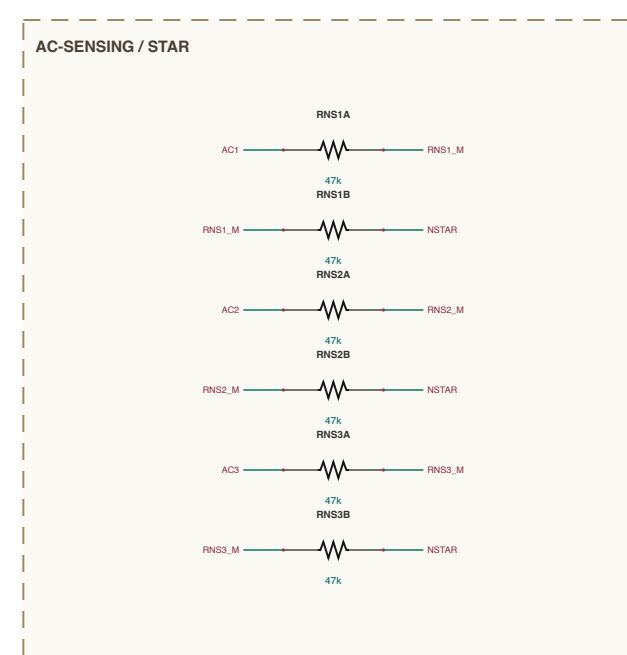
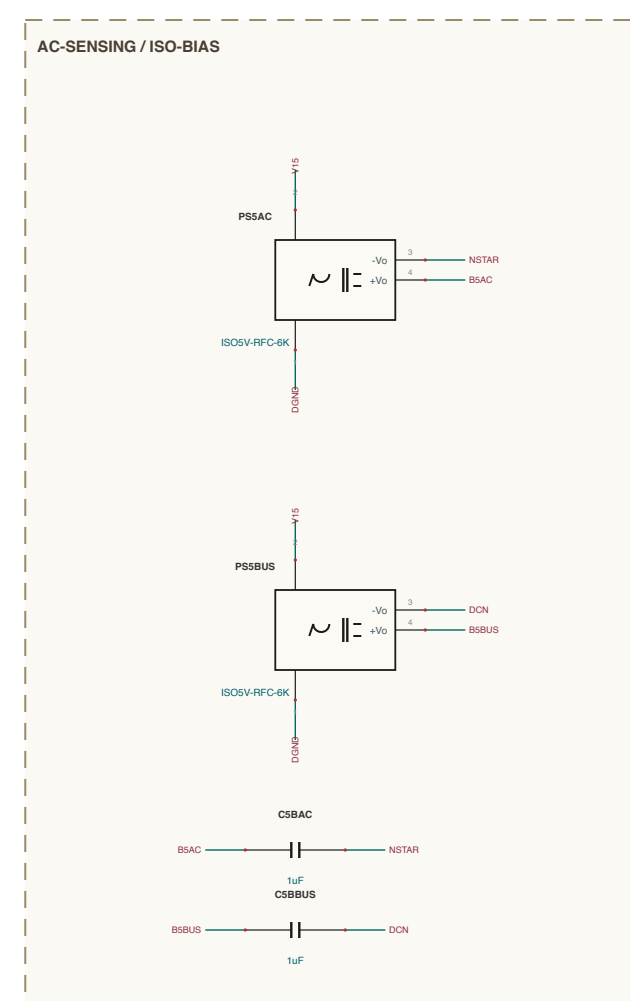
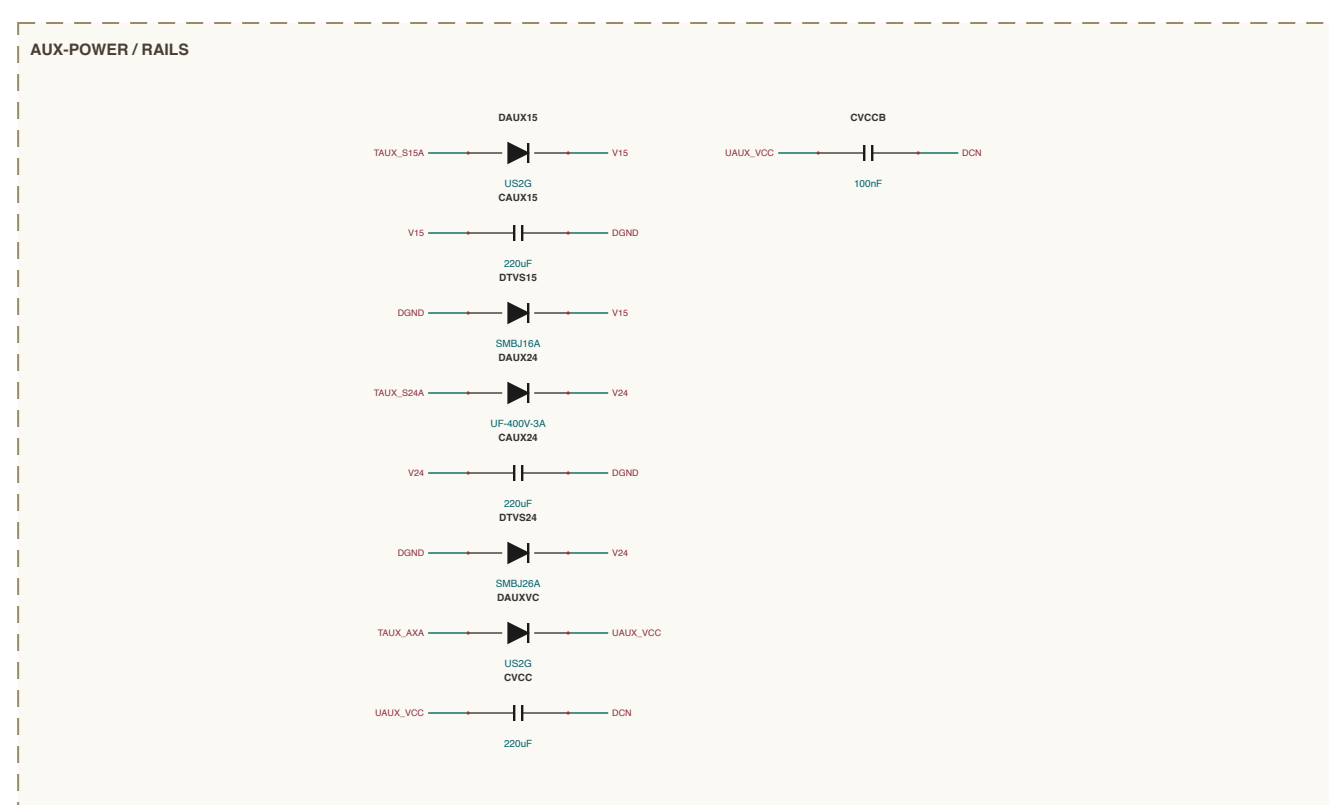
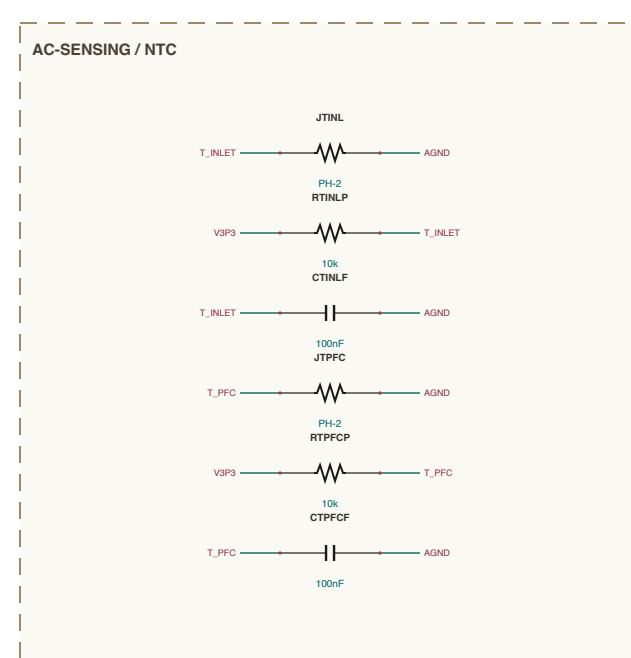
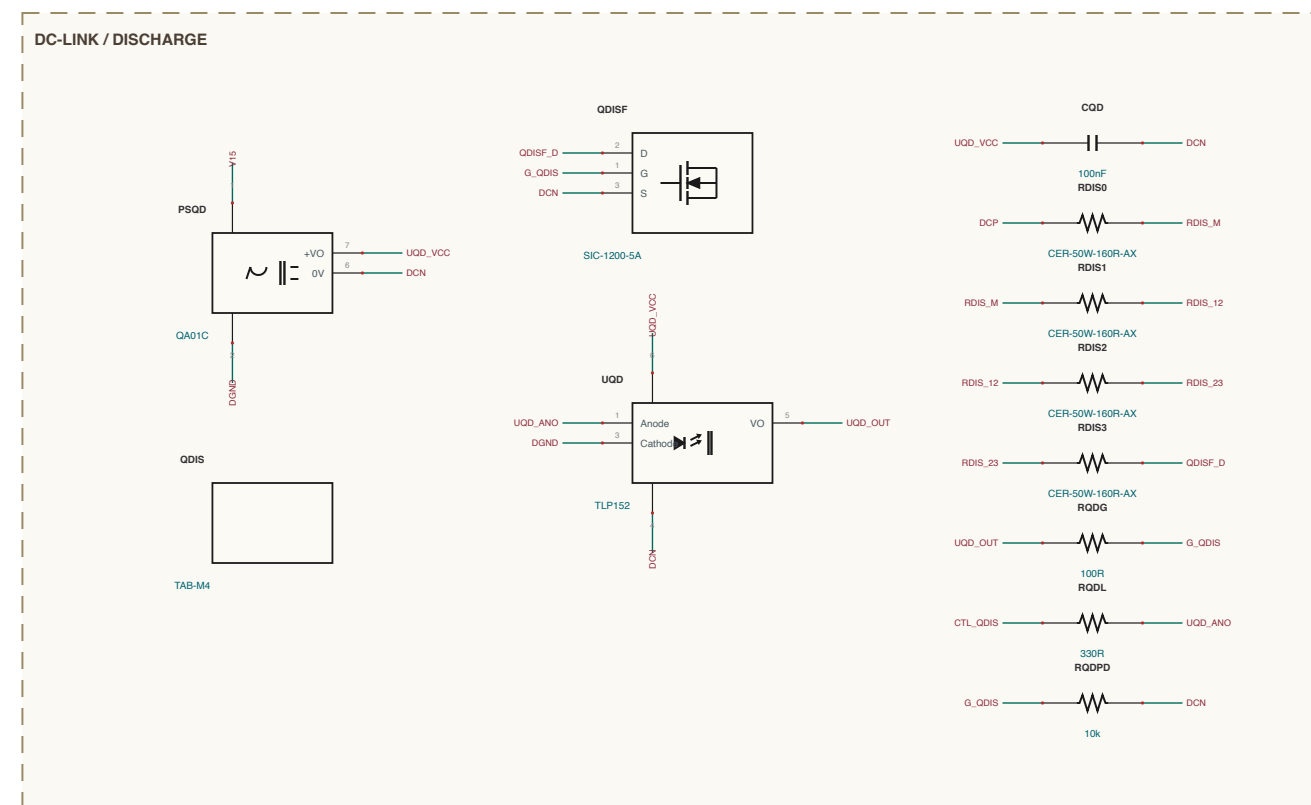
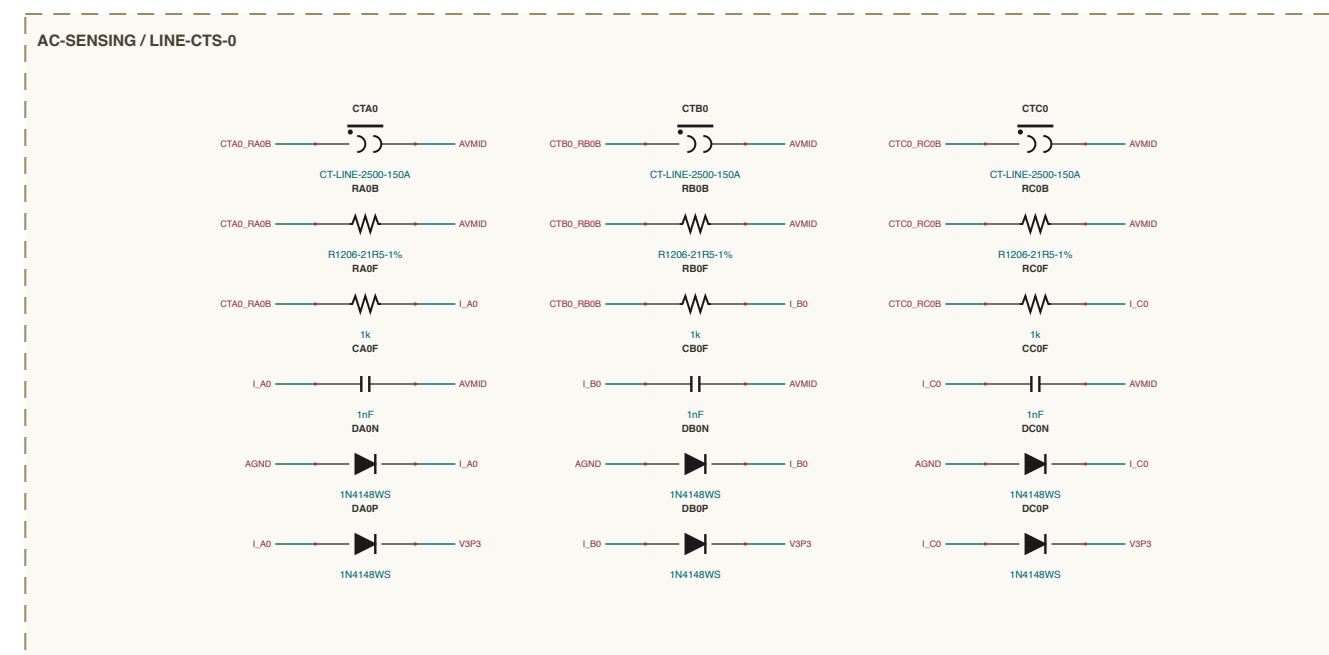
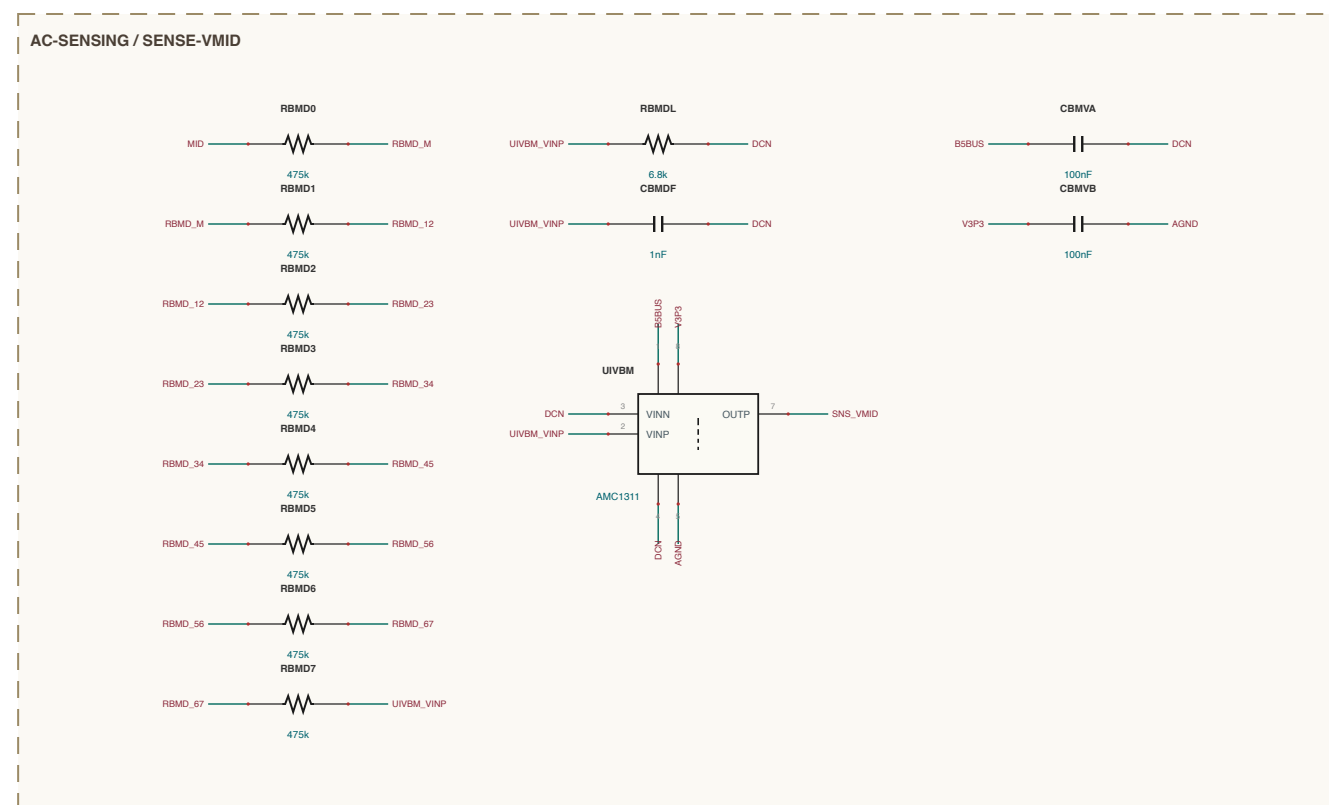
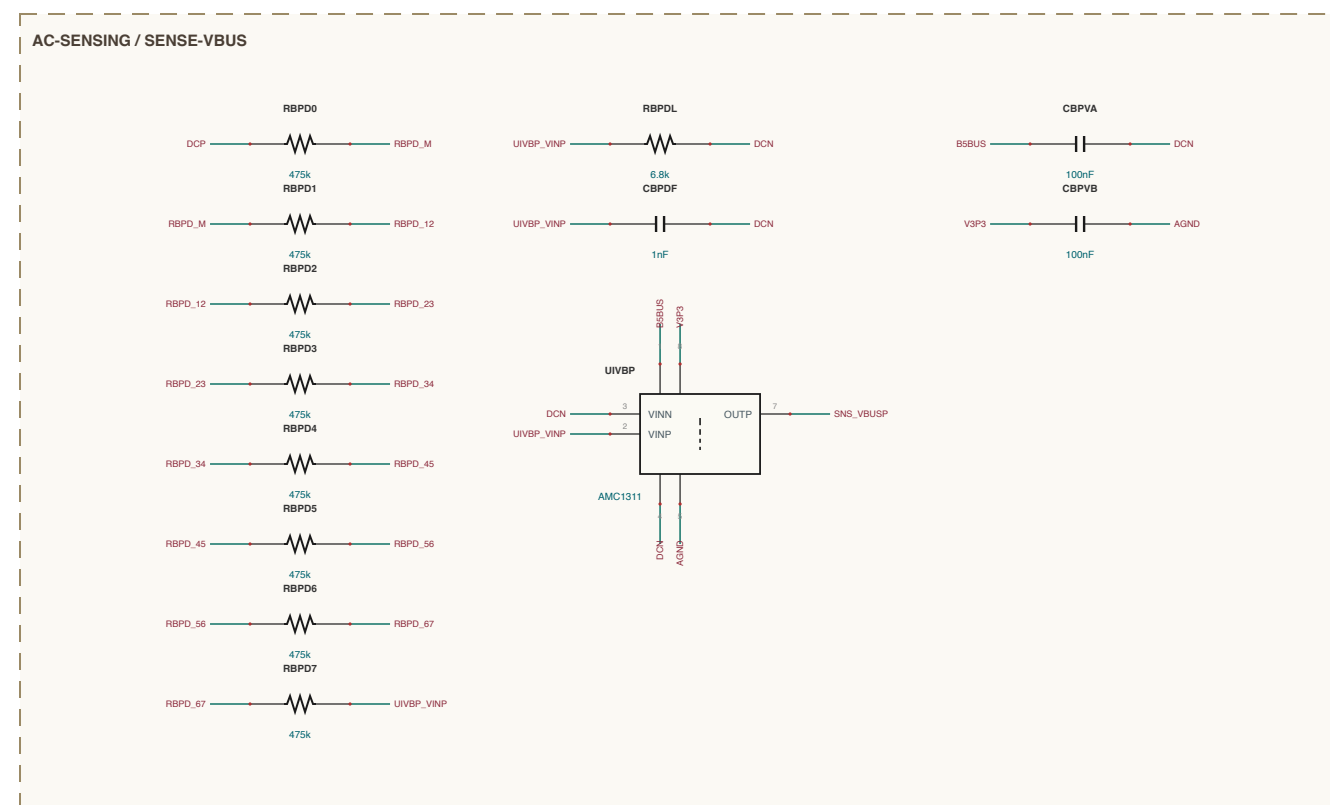
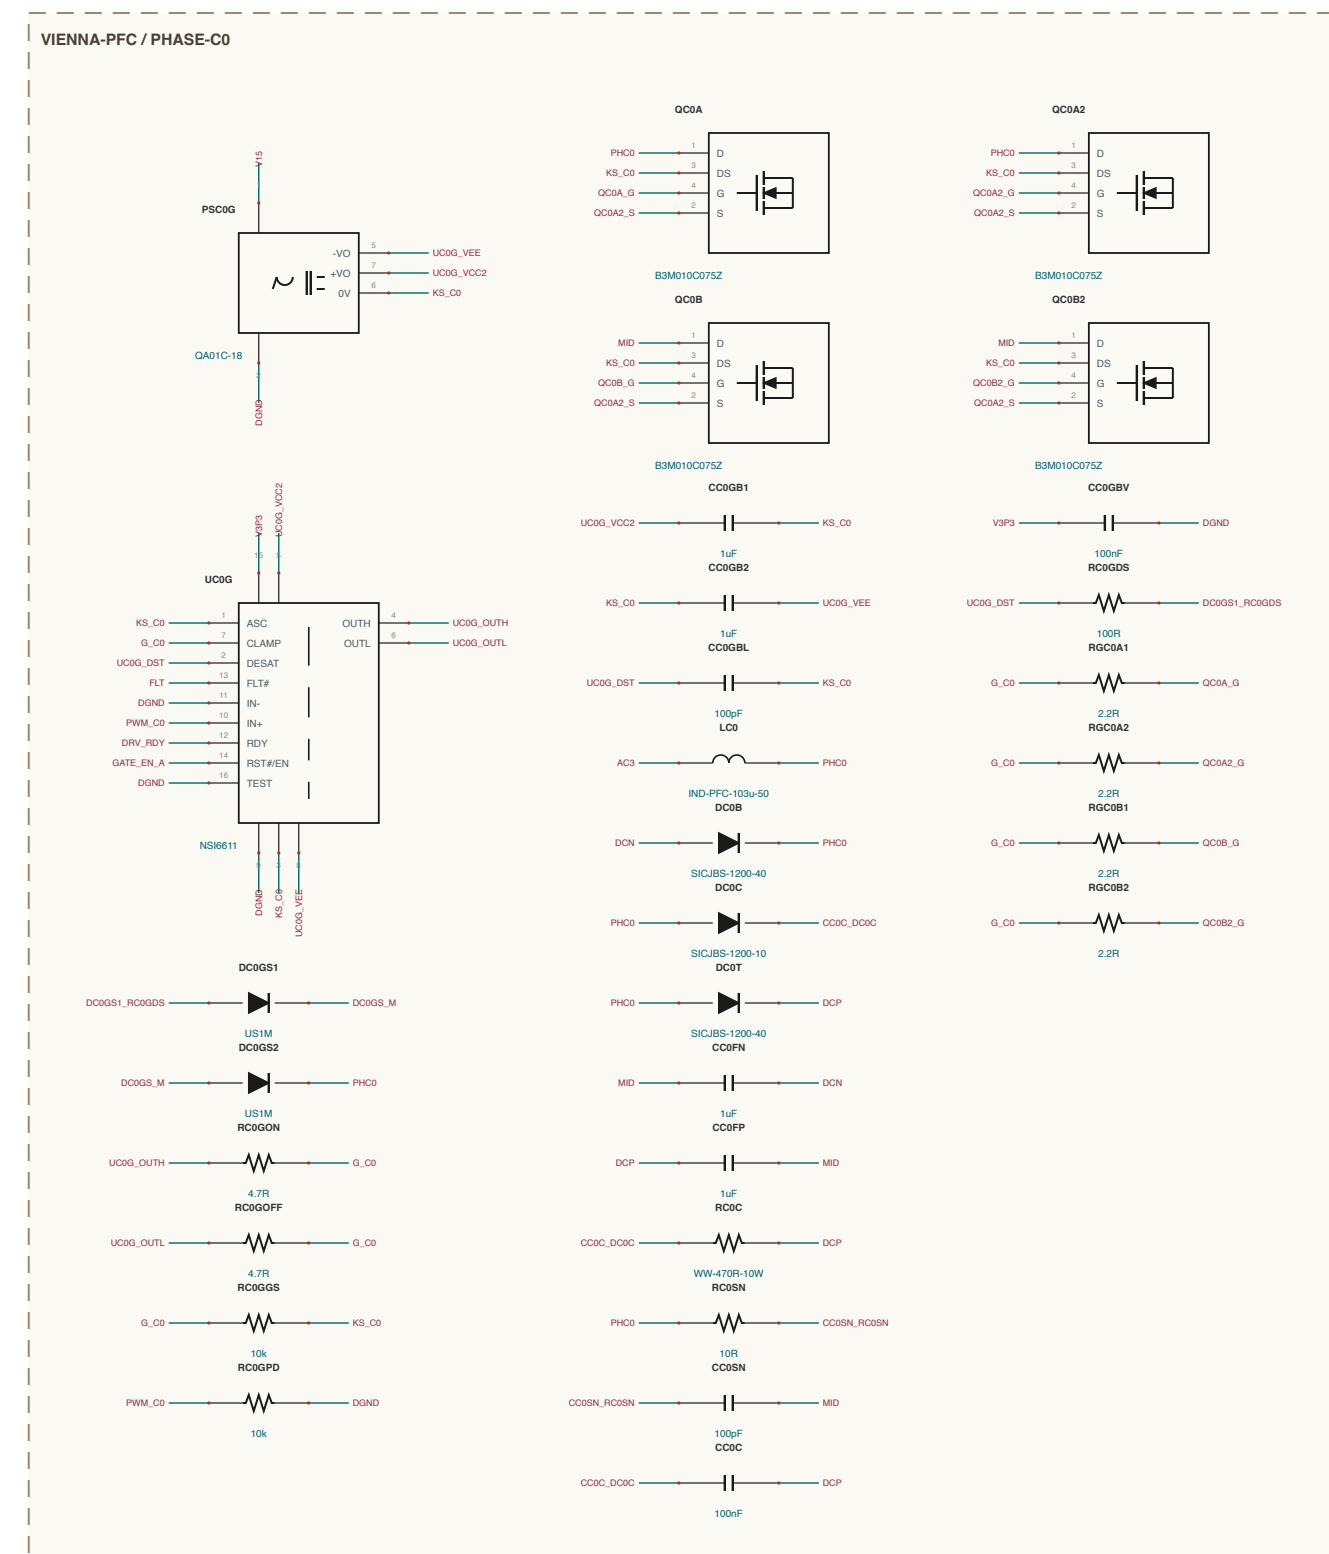
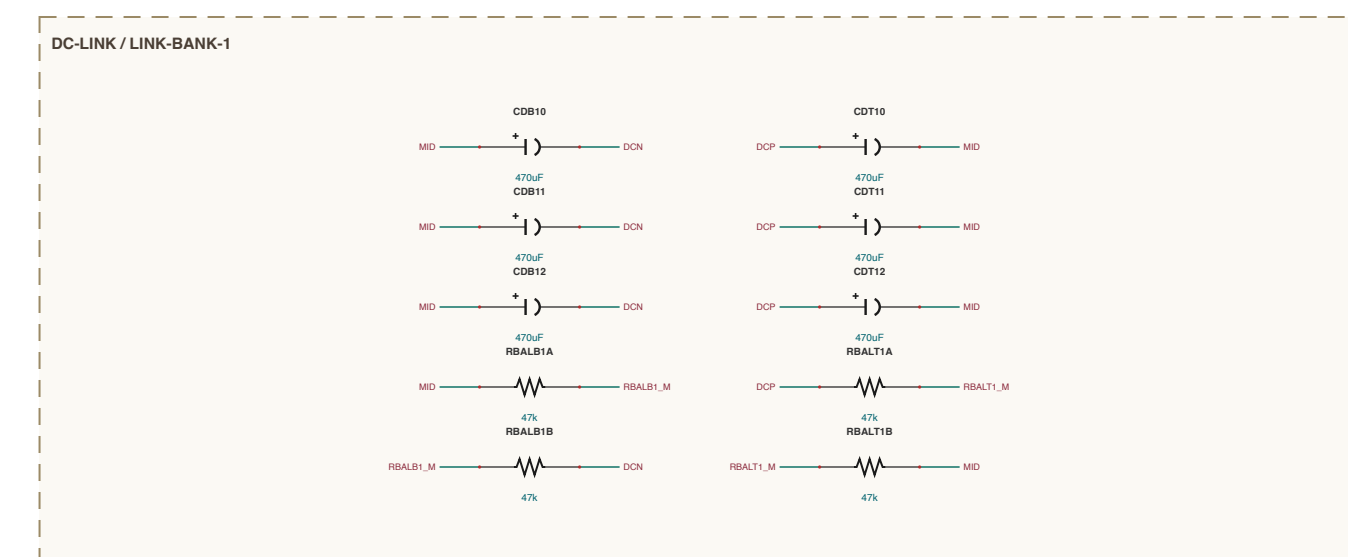
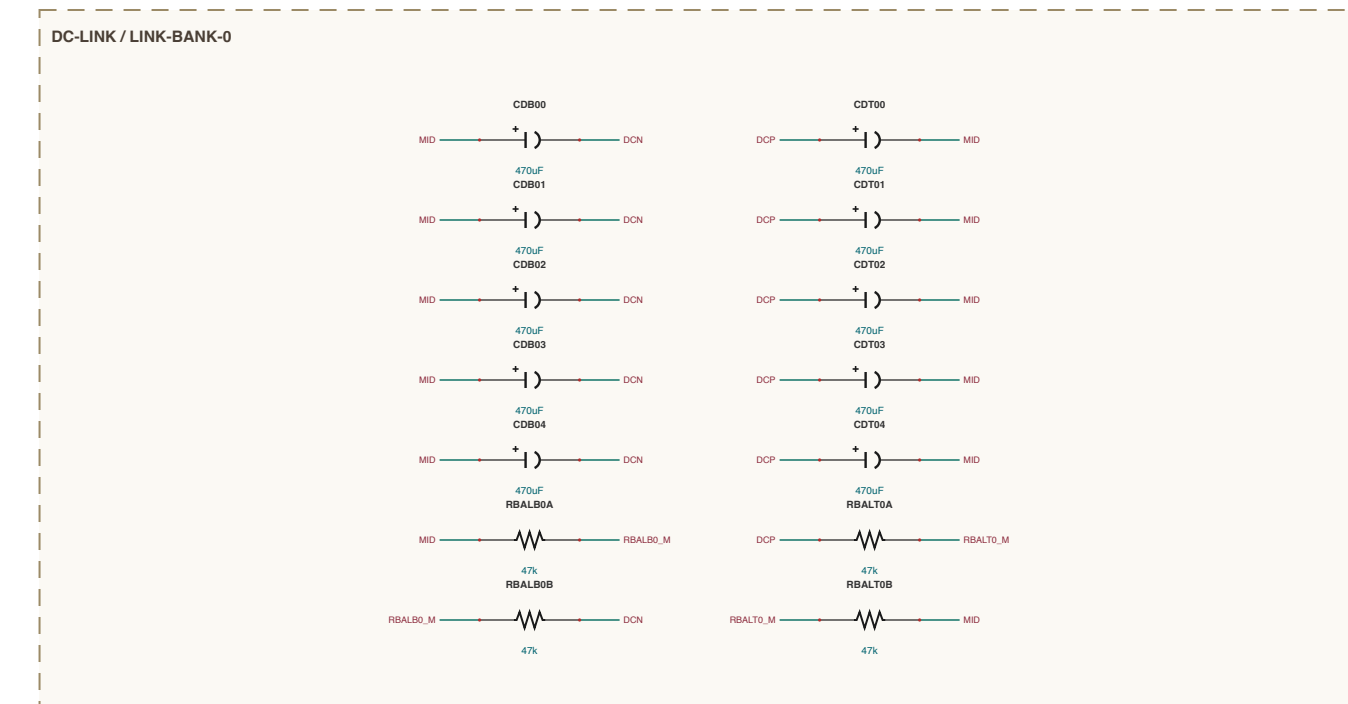
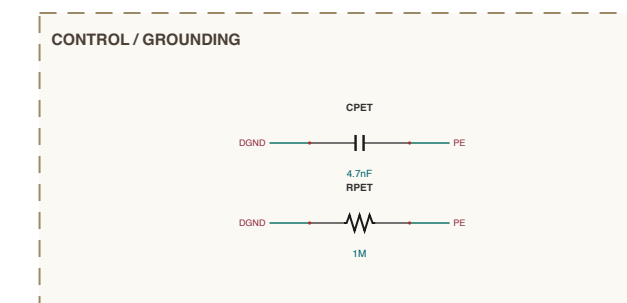
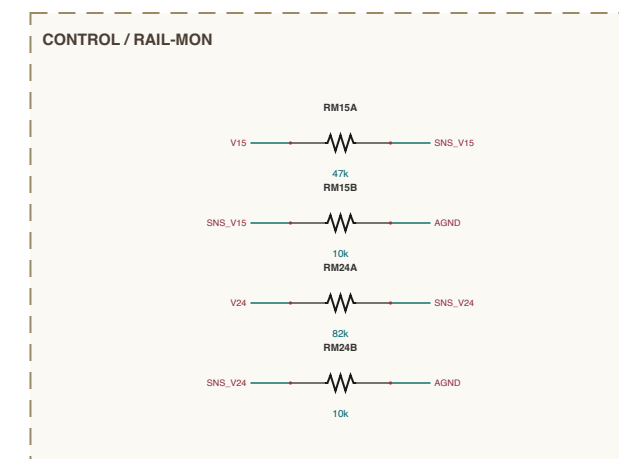
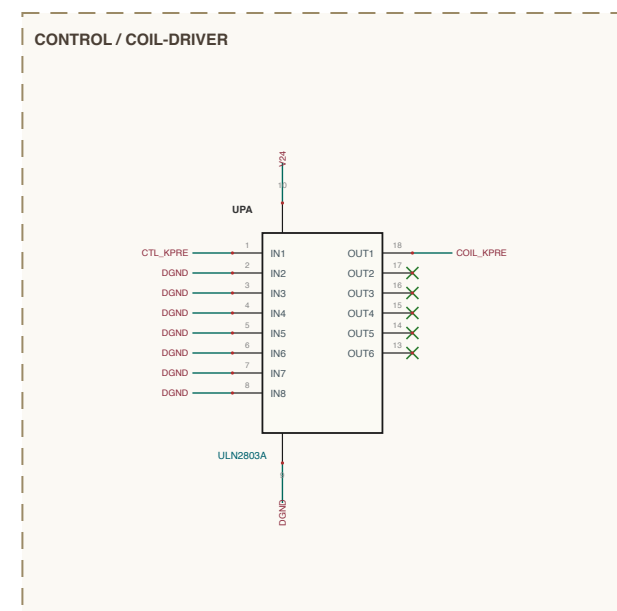
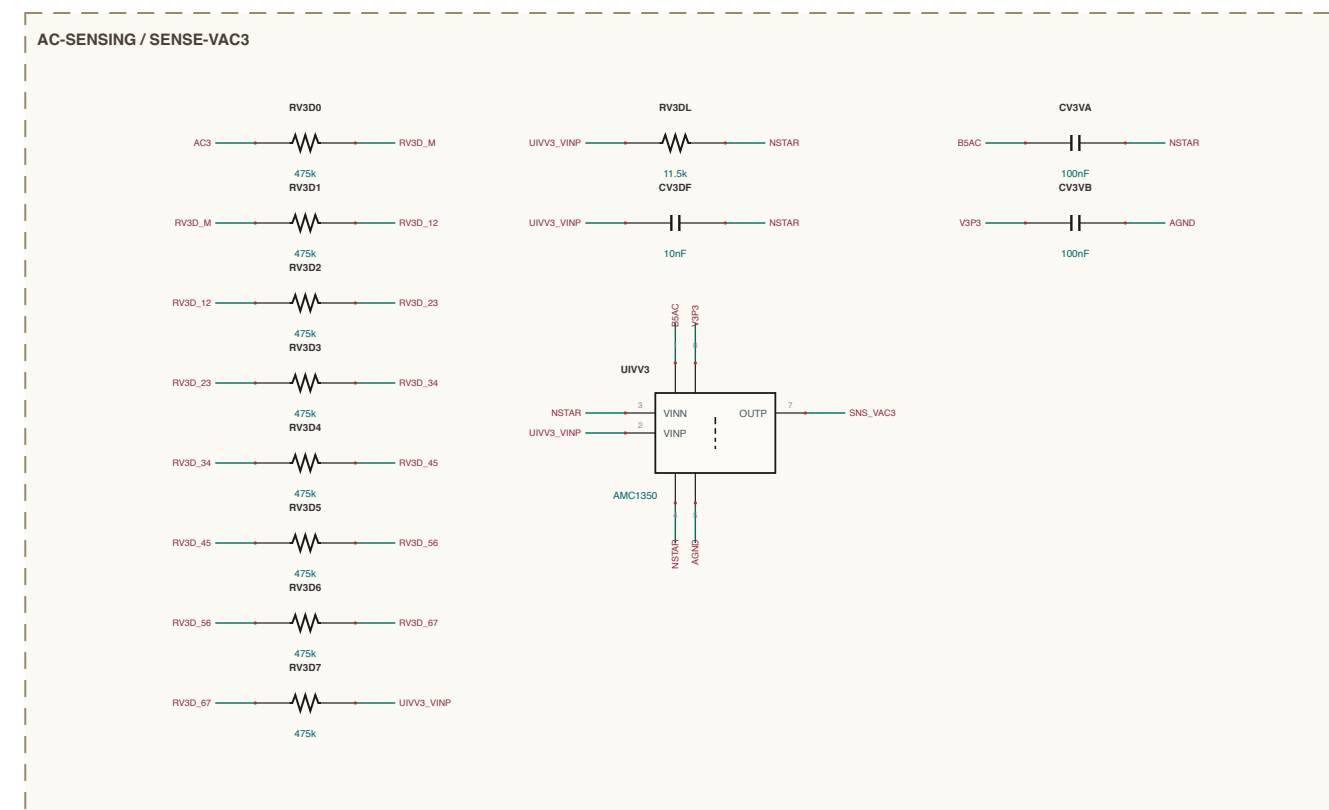
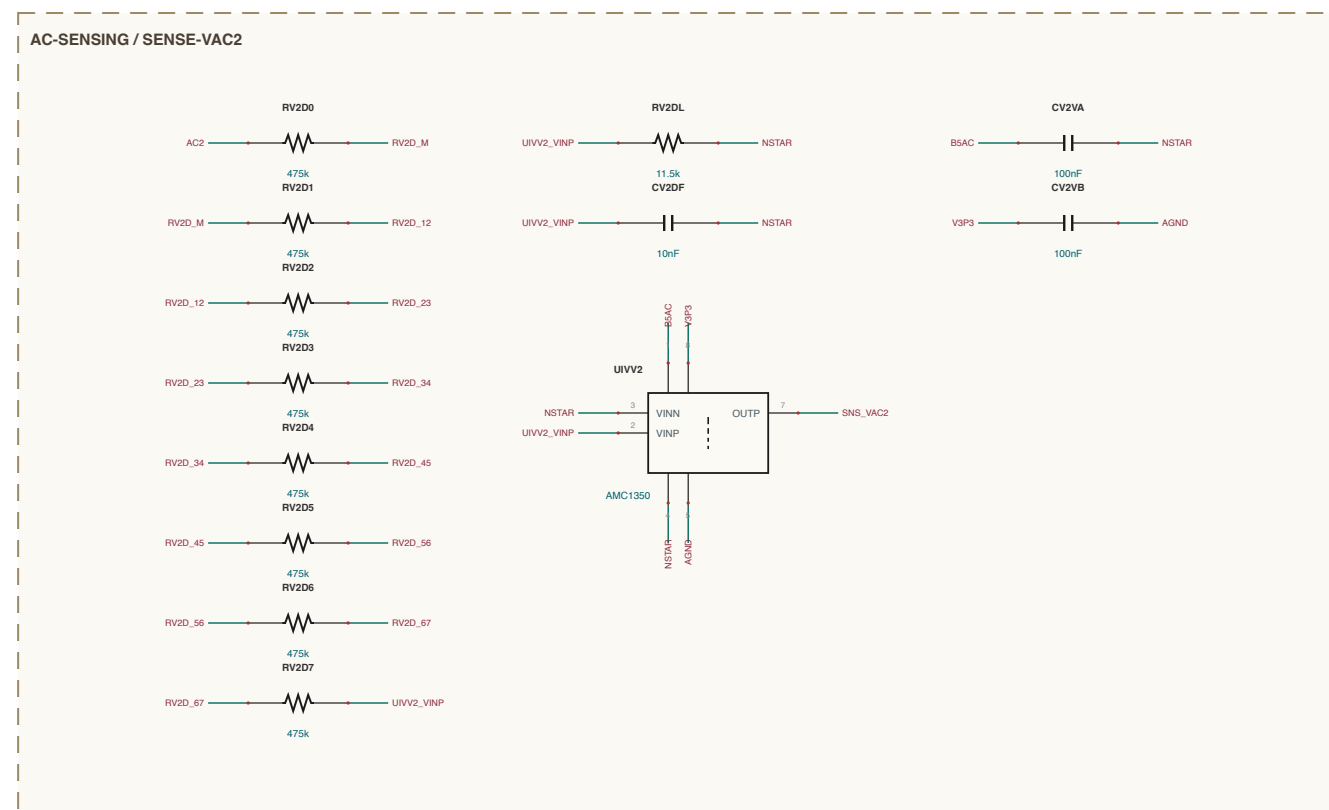


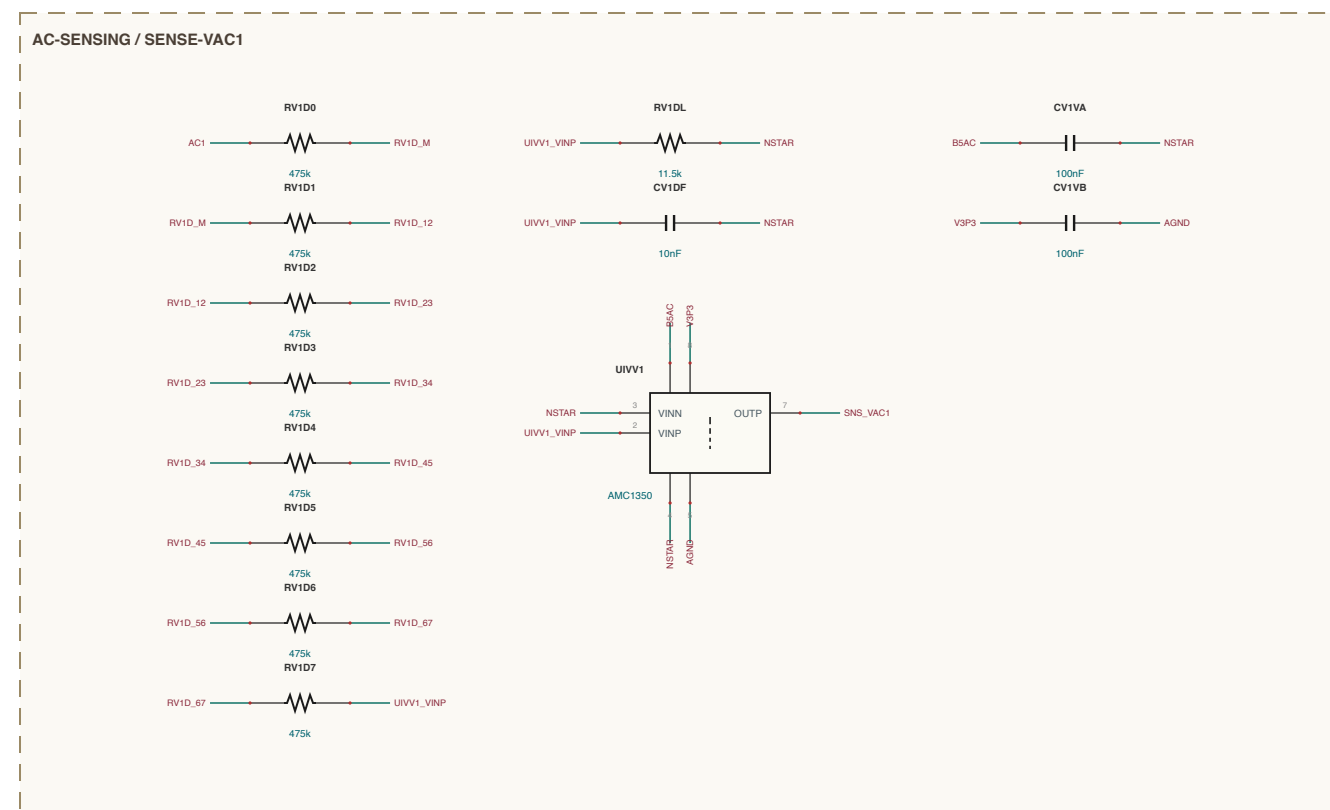

SHEET INDEX

DISK-7-1 x2
AC-SERVO - 1 section
AJD-POWER - 1 section
CONTROL - 4 sections
DC-LINK - 4 sections
INVERTER - 4 sections
VARIABLE-FREQ - 2 sections

ans D-6 : 28 sheets + 202 components

NET NAMING

internal junctions are named for what they join

Usual, *o*Phs node at that IC join e.g. UFD1A, SMP

Problem: *is* equivalent of a sorted pair e.g. RBA.75, 3

Problem: *order* key between *Readers* e.g. RFD1.01

all others are explicit design links

MAGNETICS CONSTRUCTION

Identify per electro-magnetics and (Jarda, gpr, Ws, acceptance times (see Bant)

D1 LAR L20 to 170 Hz sensor, No22, 15.0mm) = 50.0uH @ 1025.54 ps

DL LEMH = 0.3u TSD 60u, No16, 20.0mm) = 12.5uH @ 1354 ps (Show 1u.4u)

Initial L = line + measured after leakage (line COMPENSATE leakage spread), Cr or TANK section