
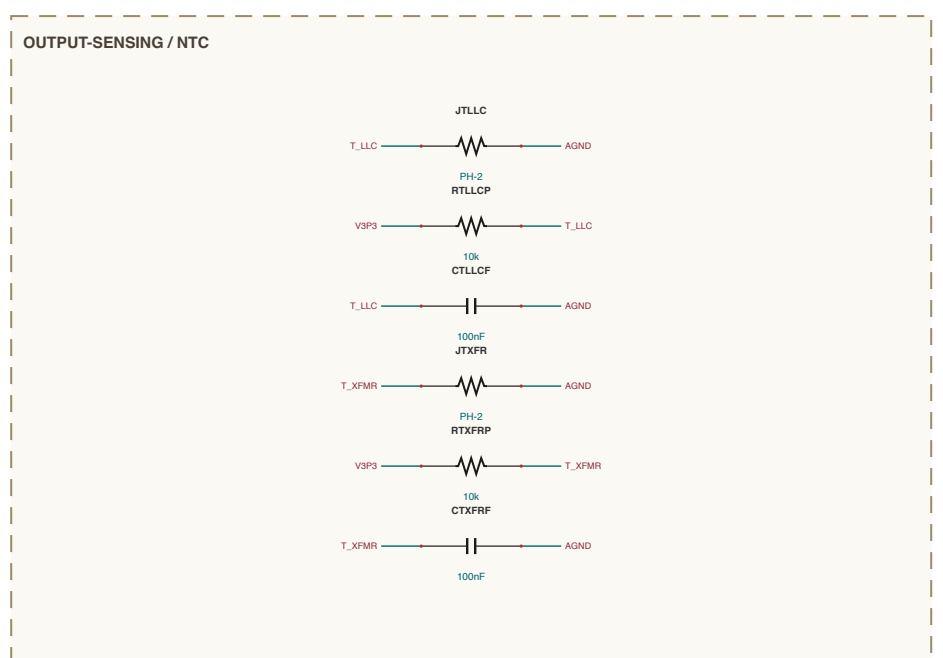
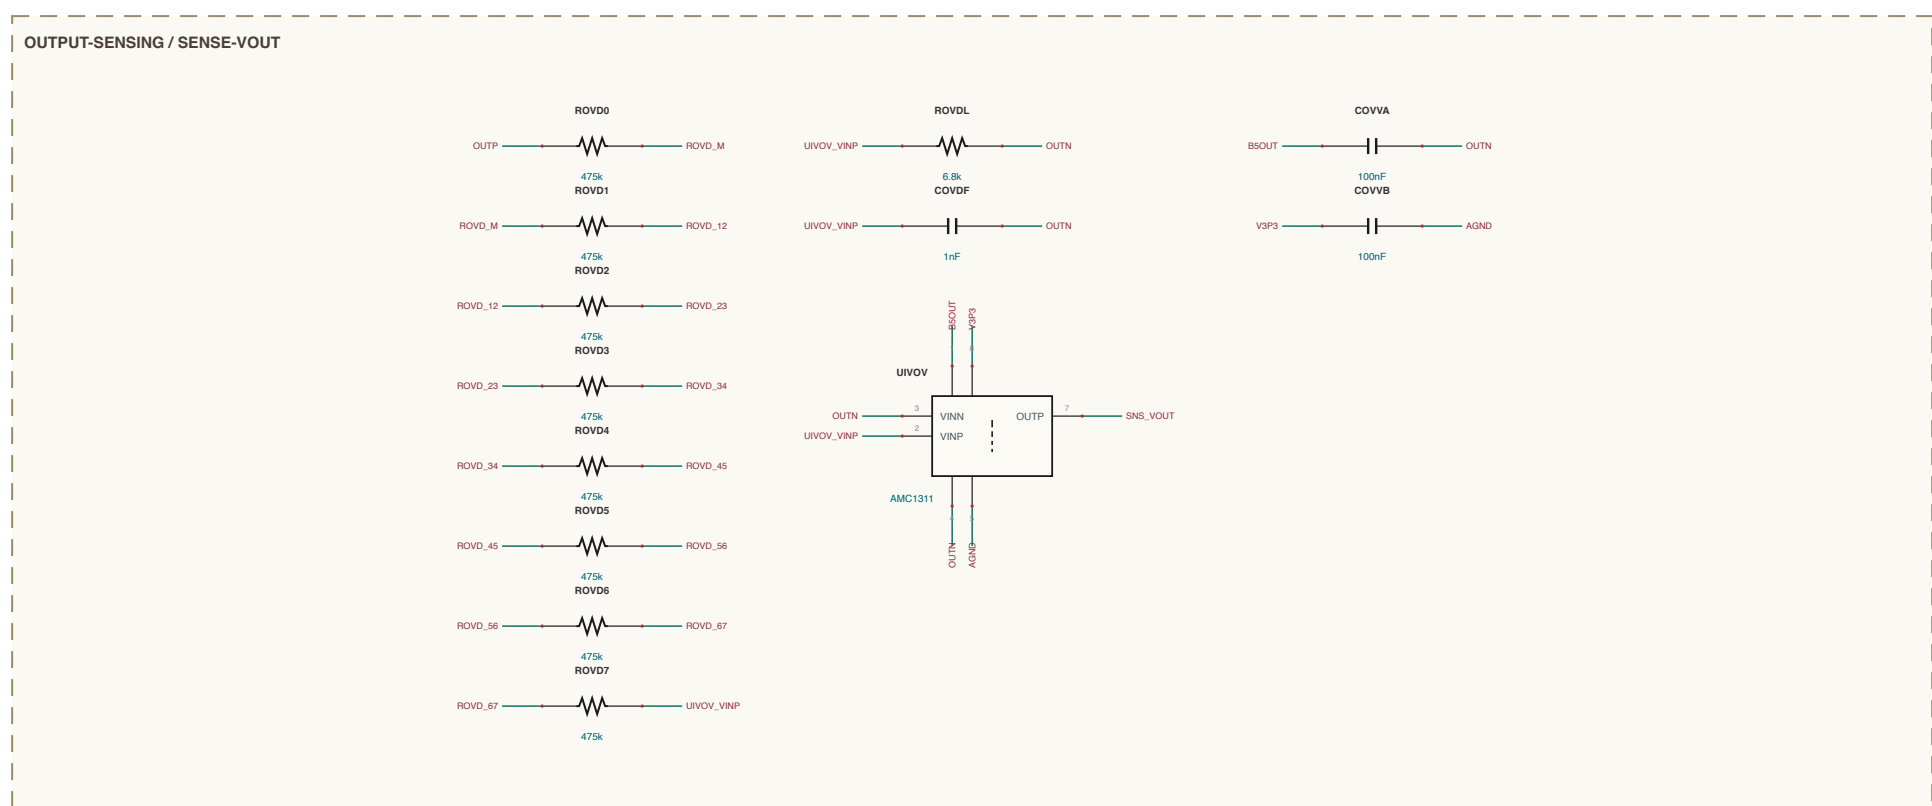
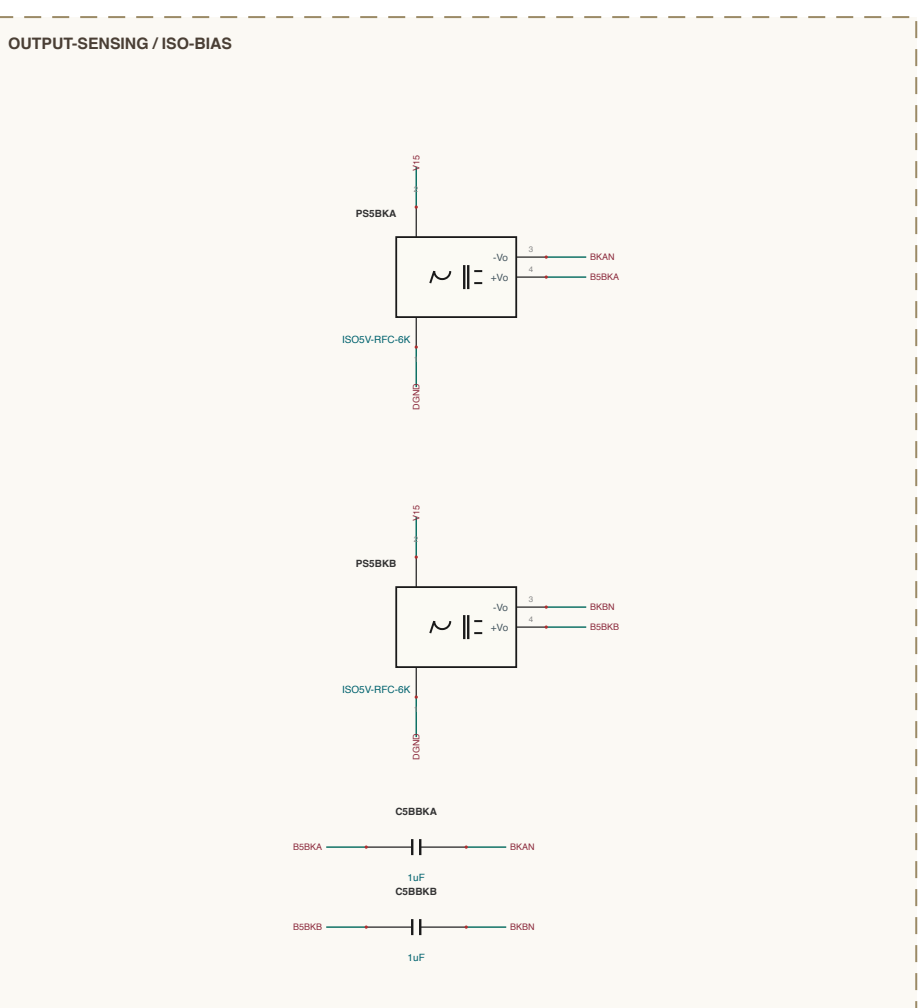
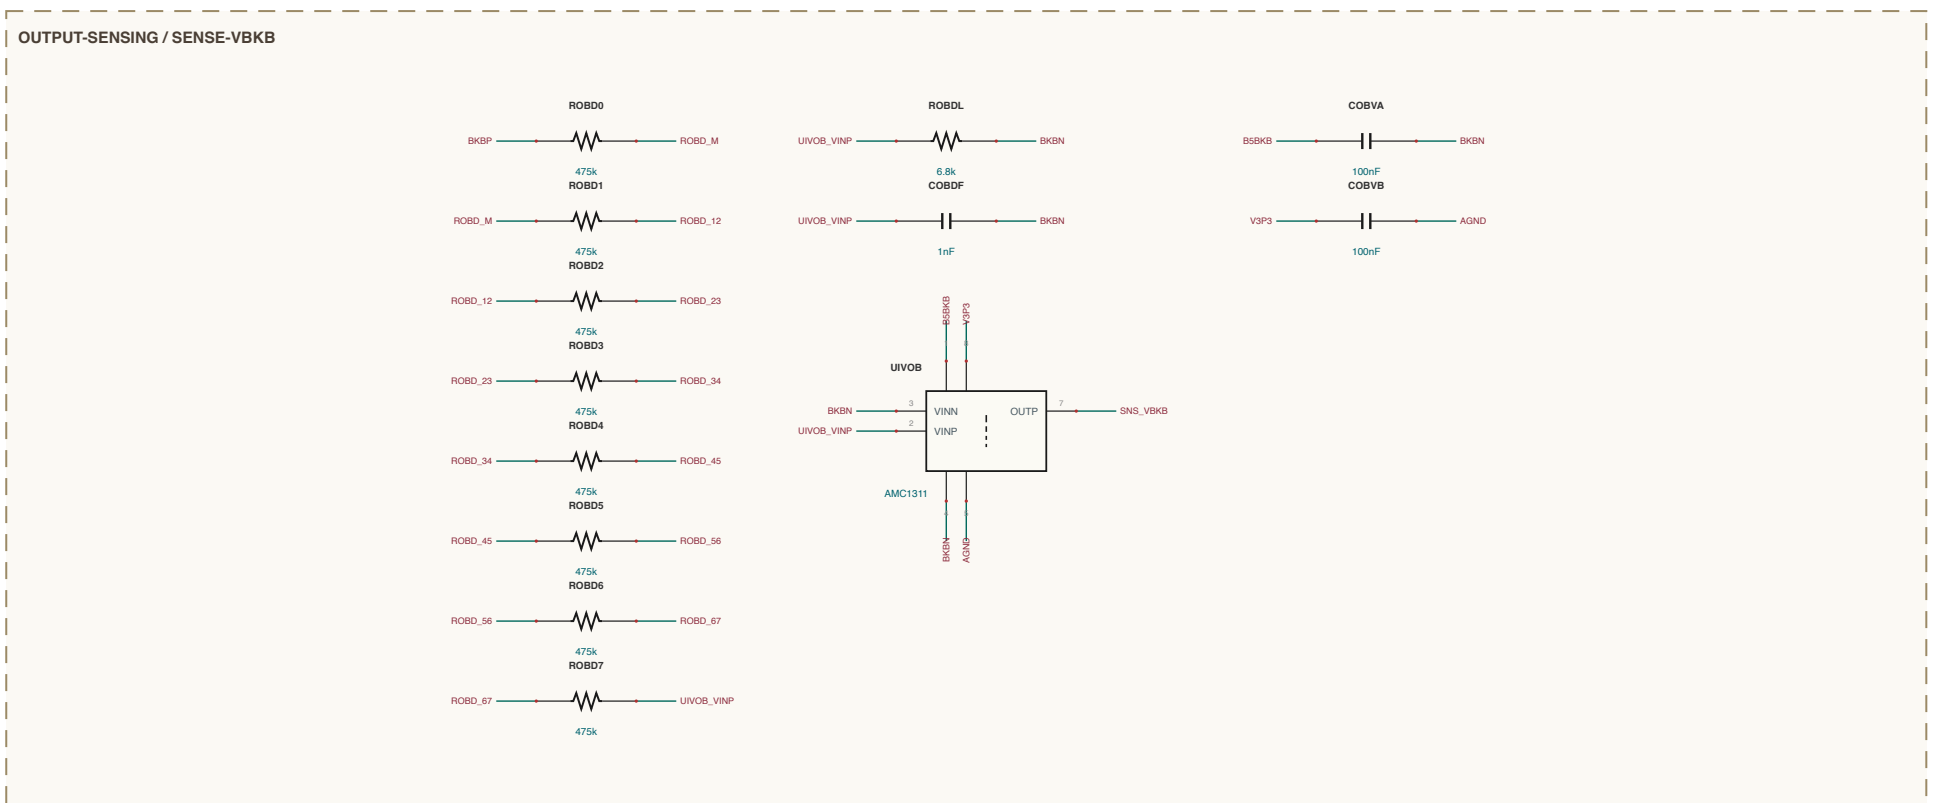
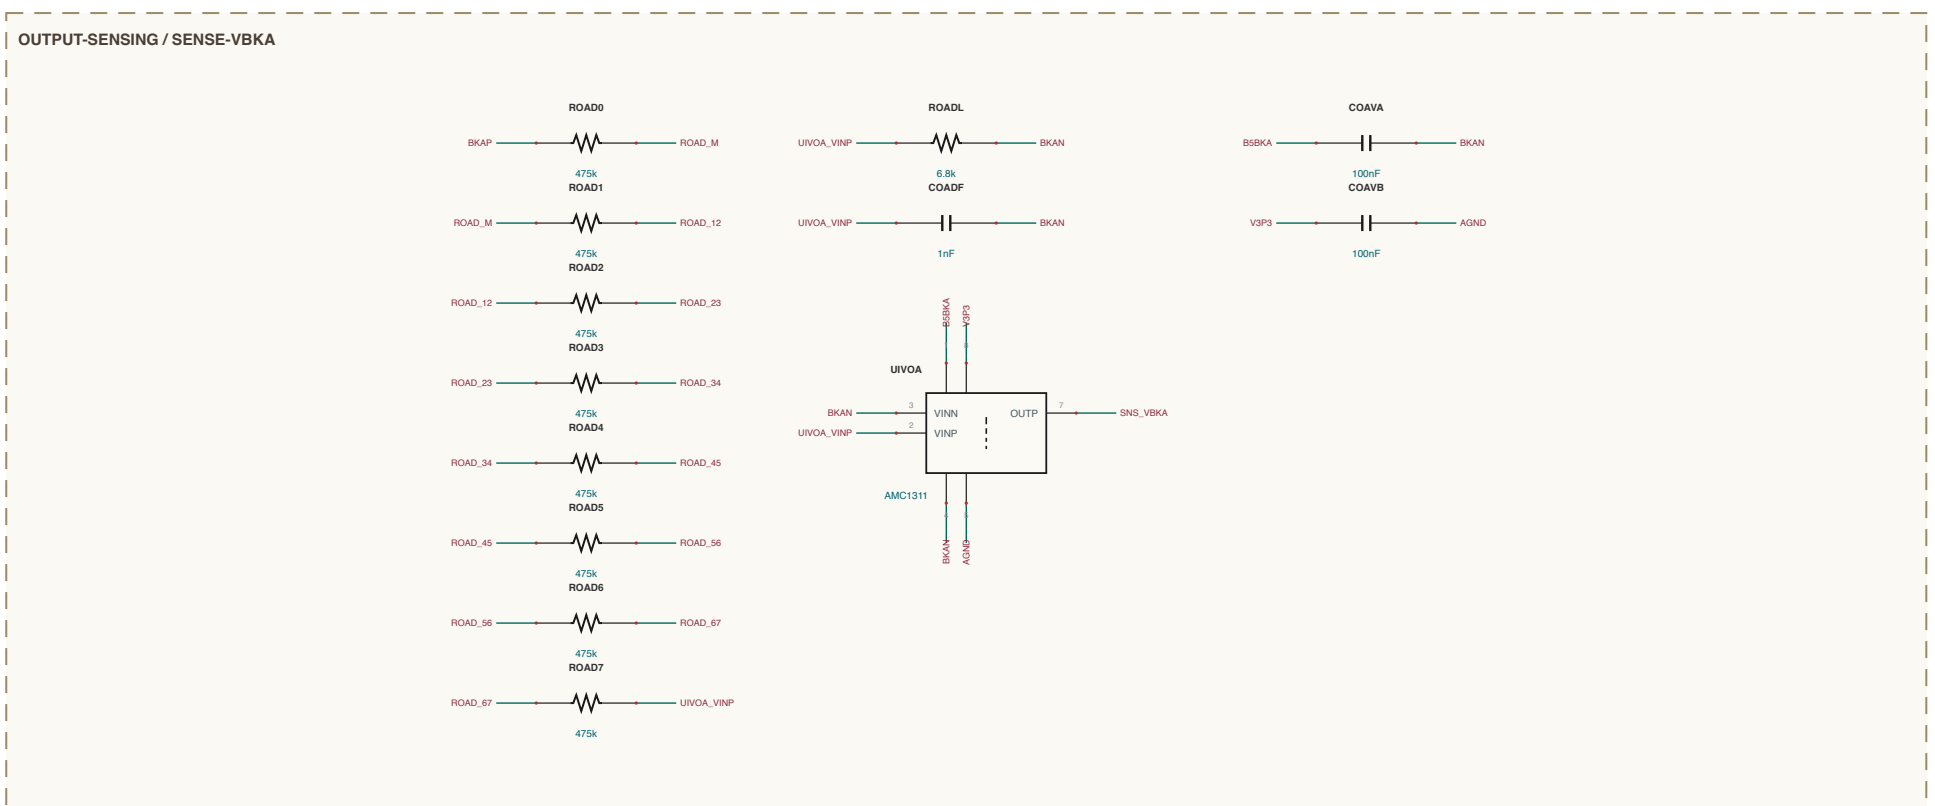
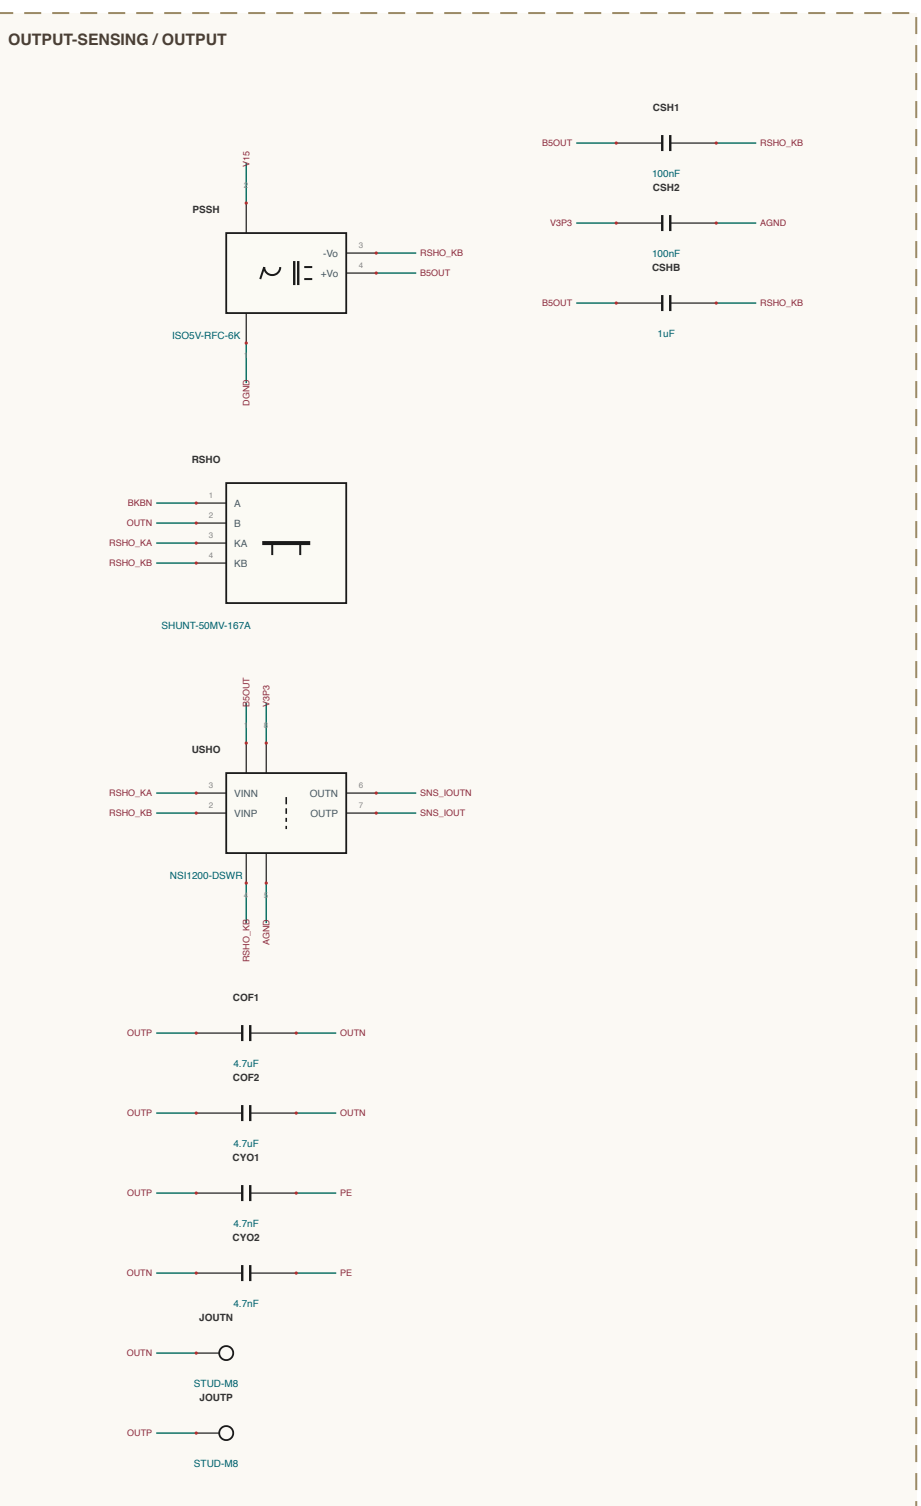
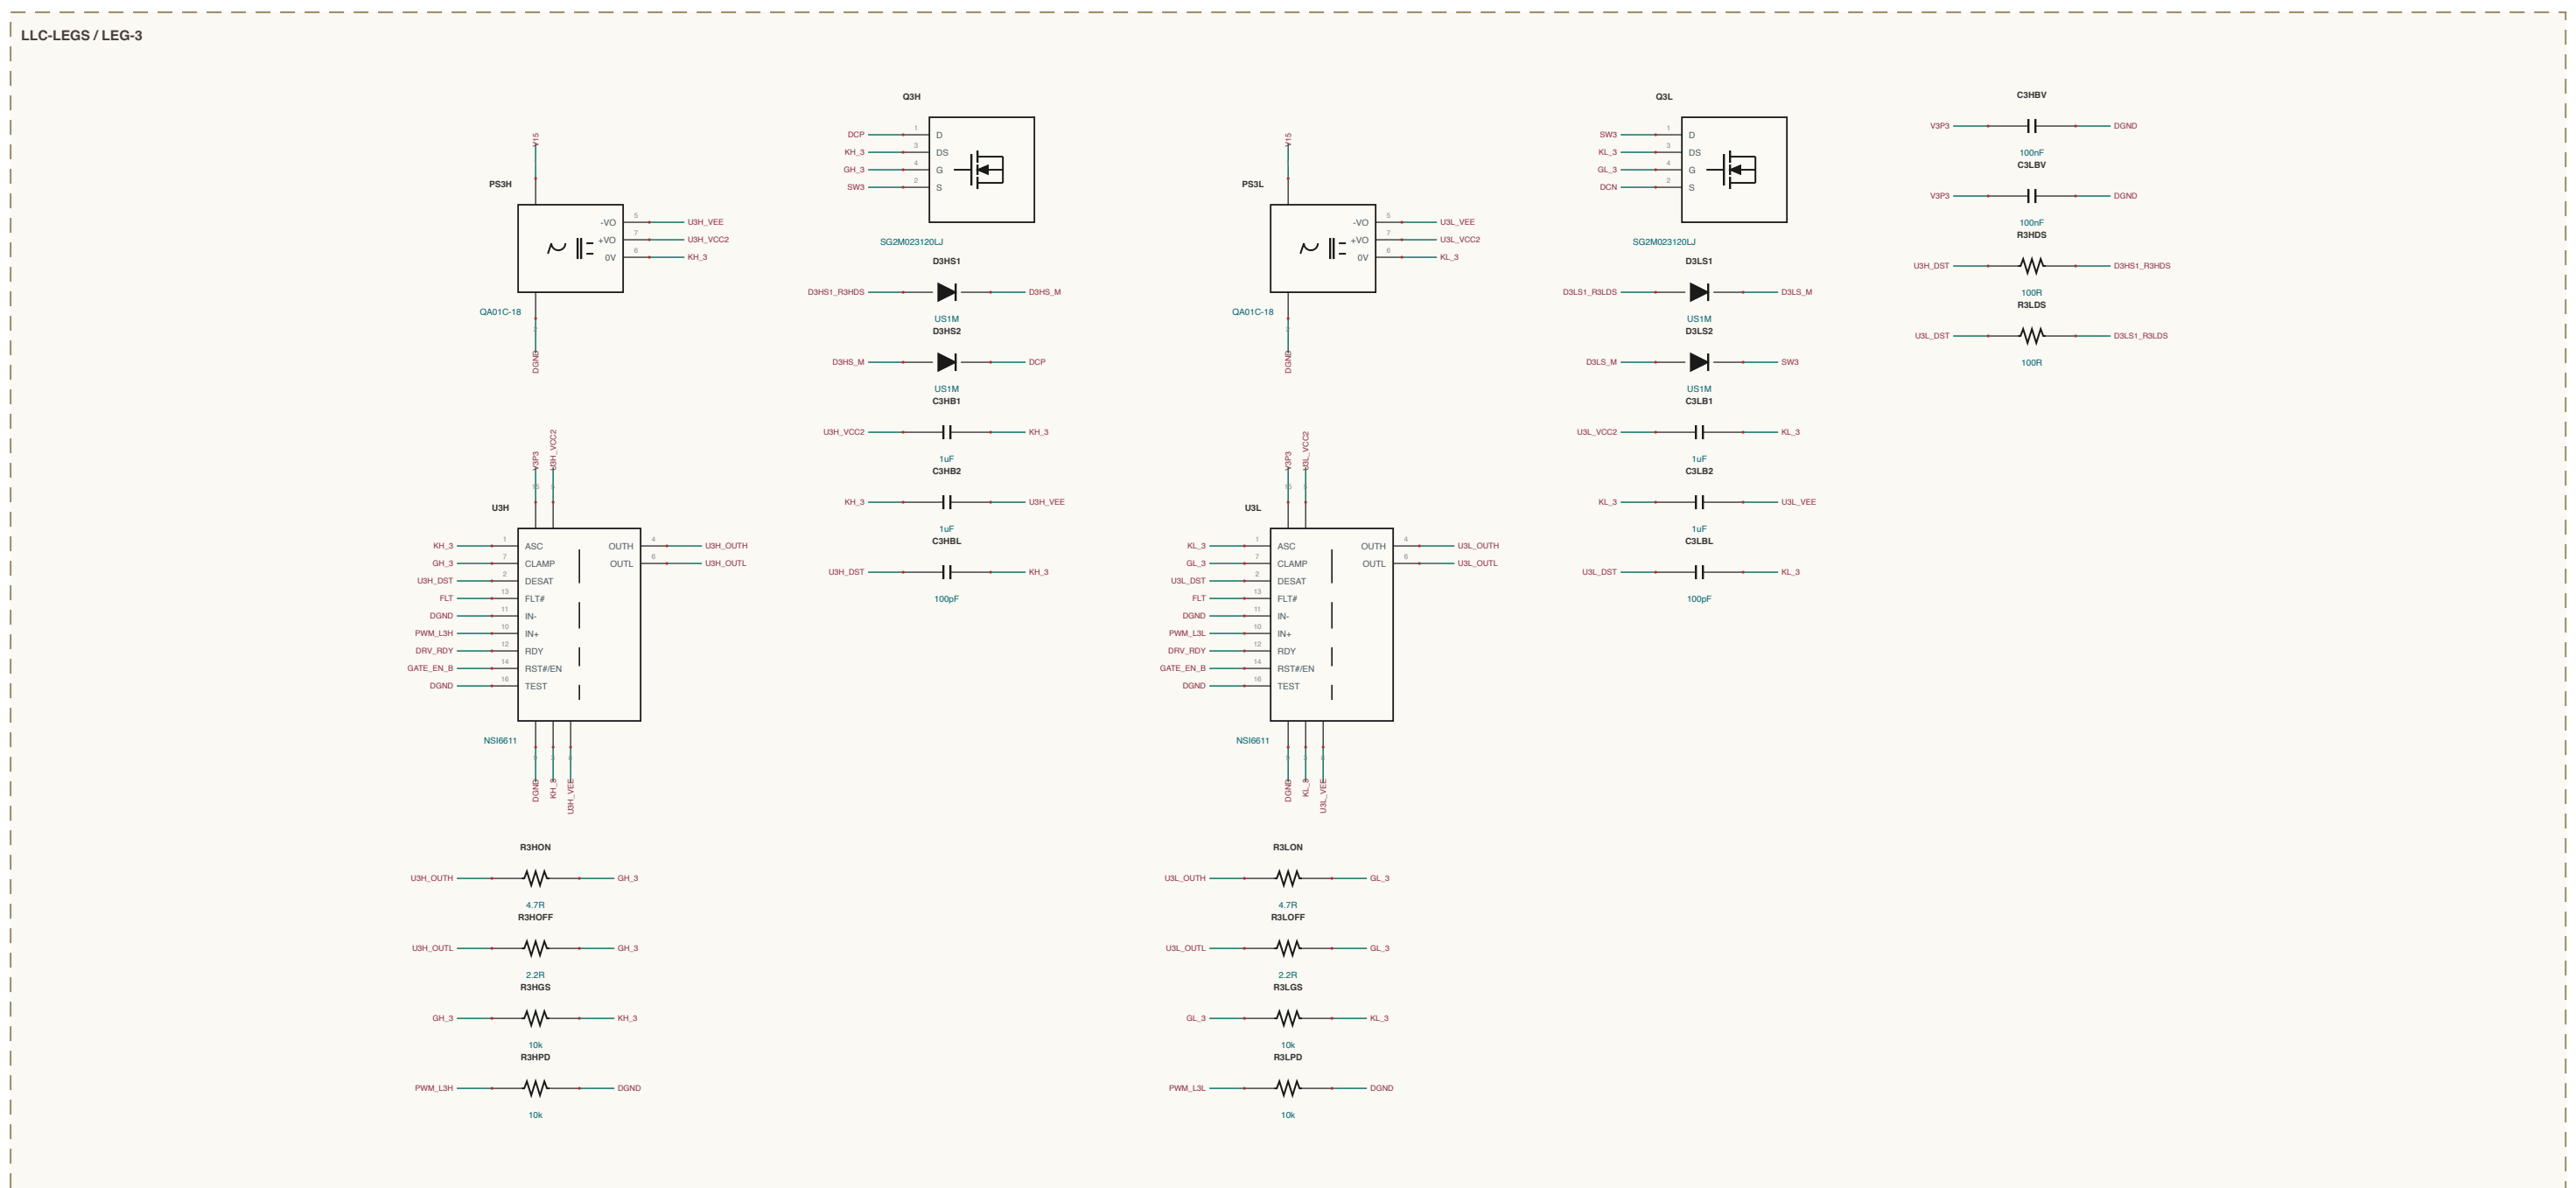
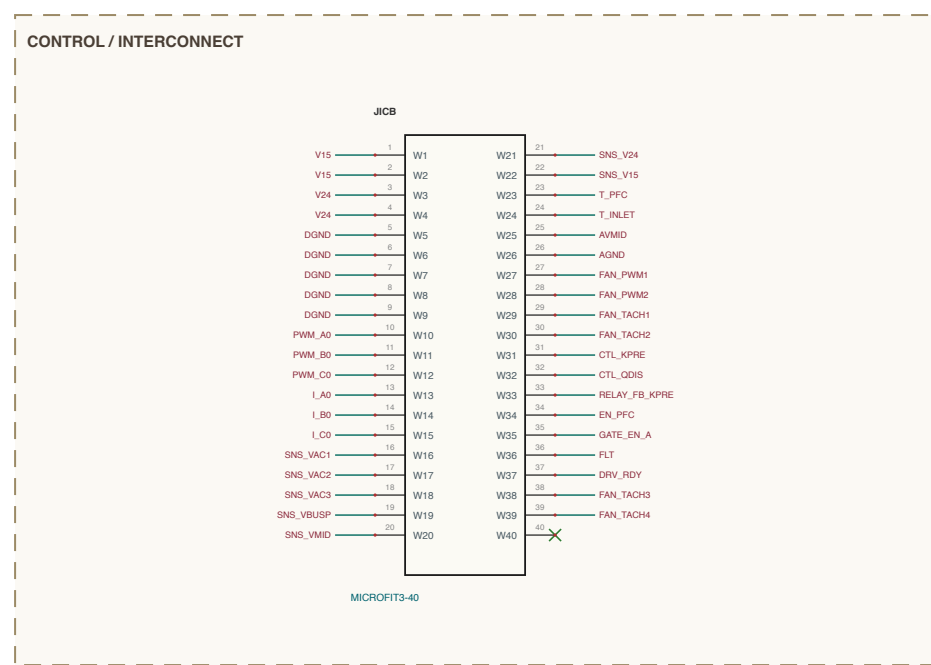
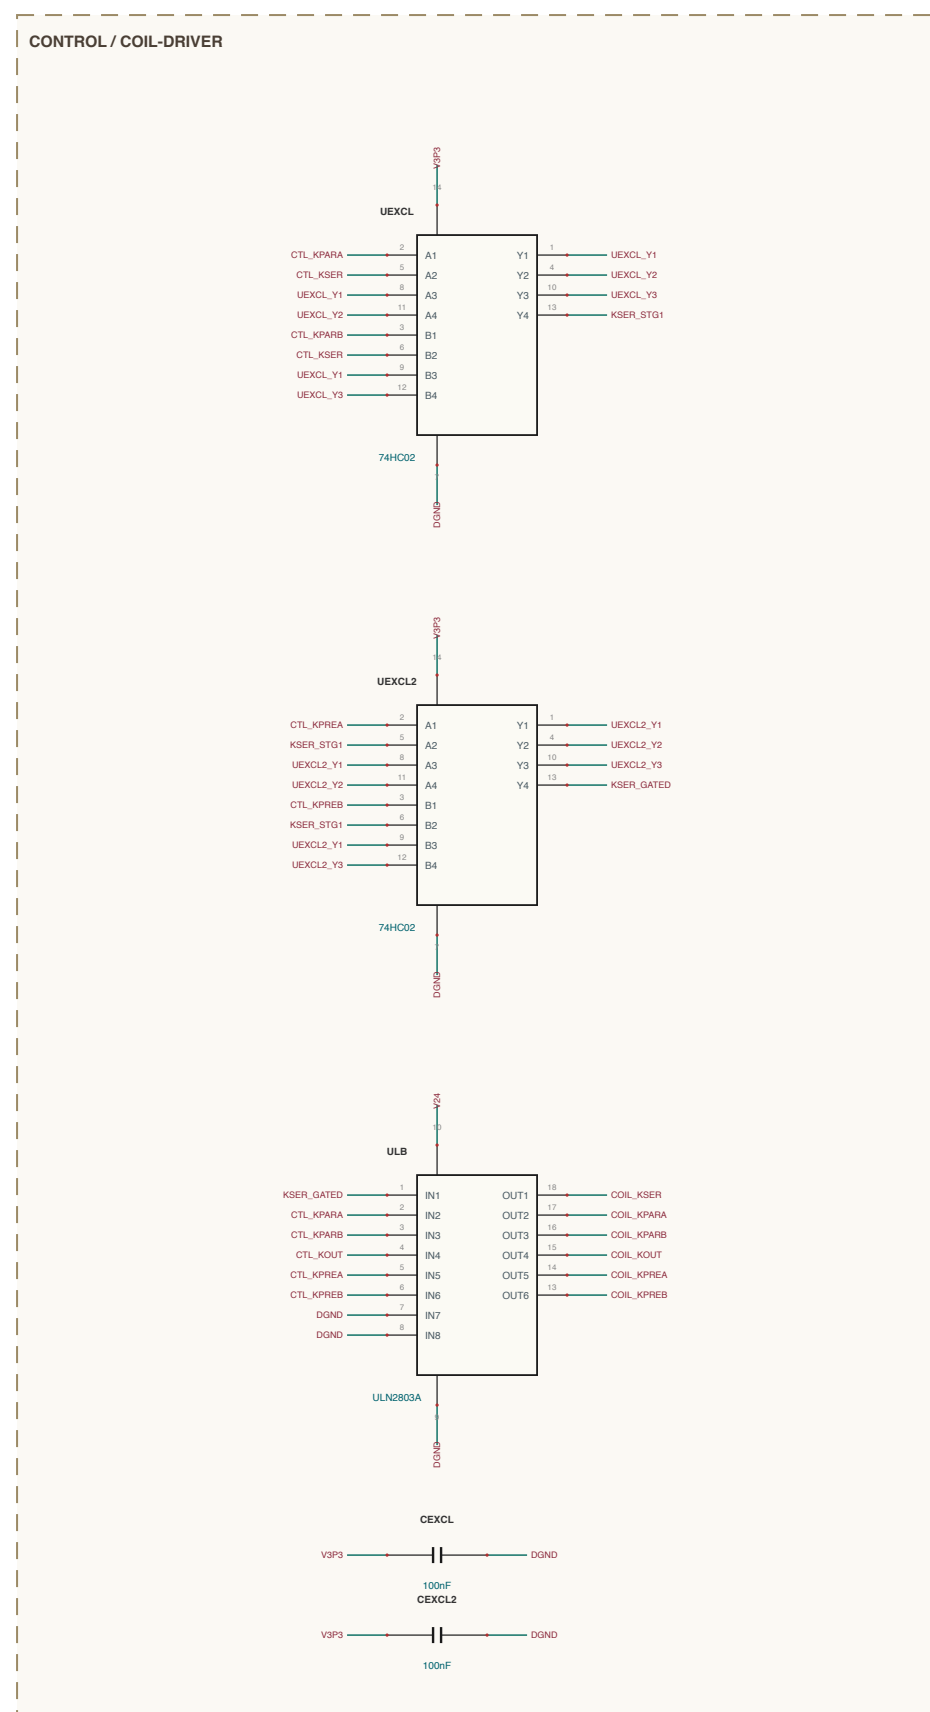
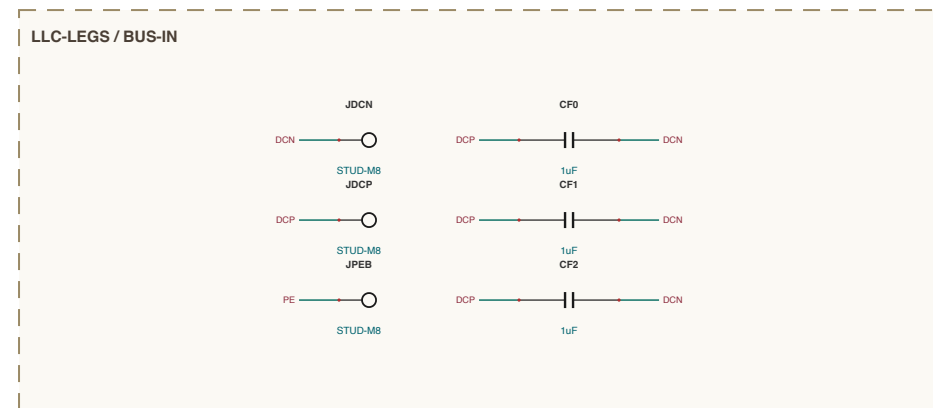
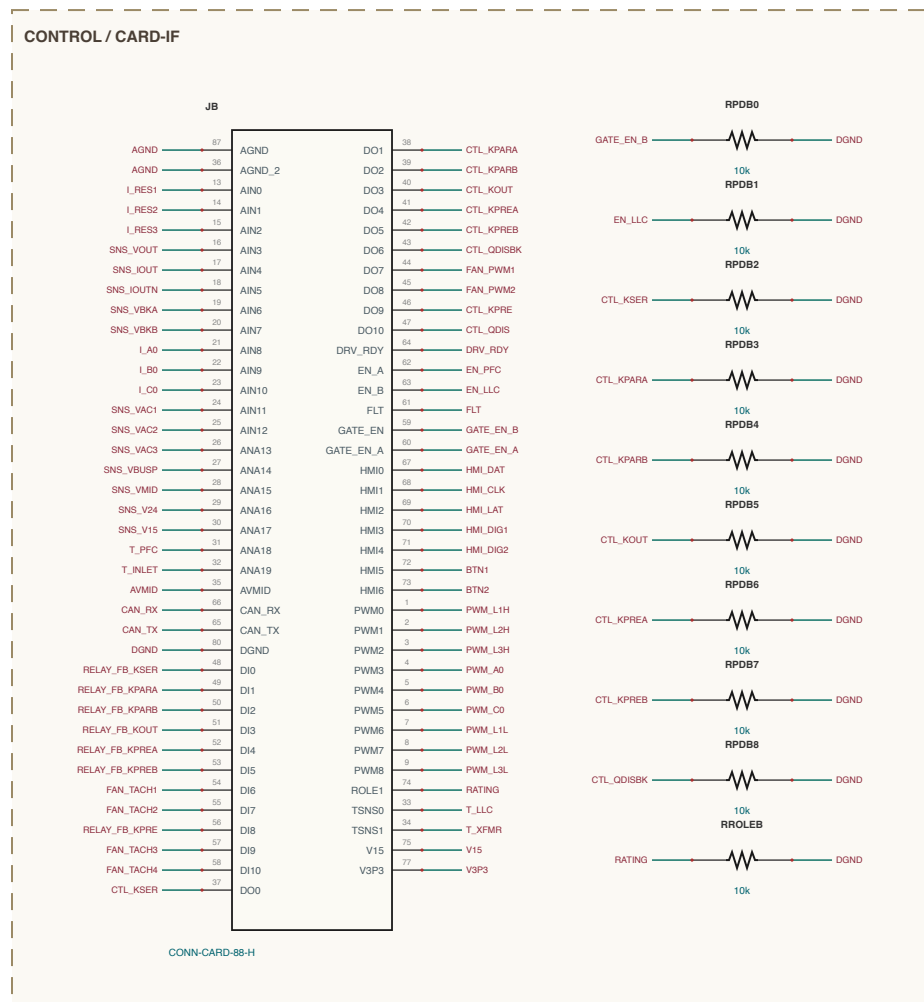
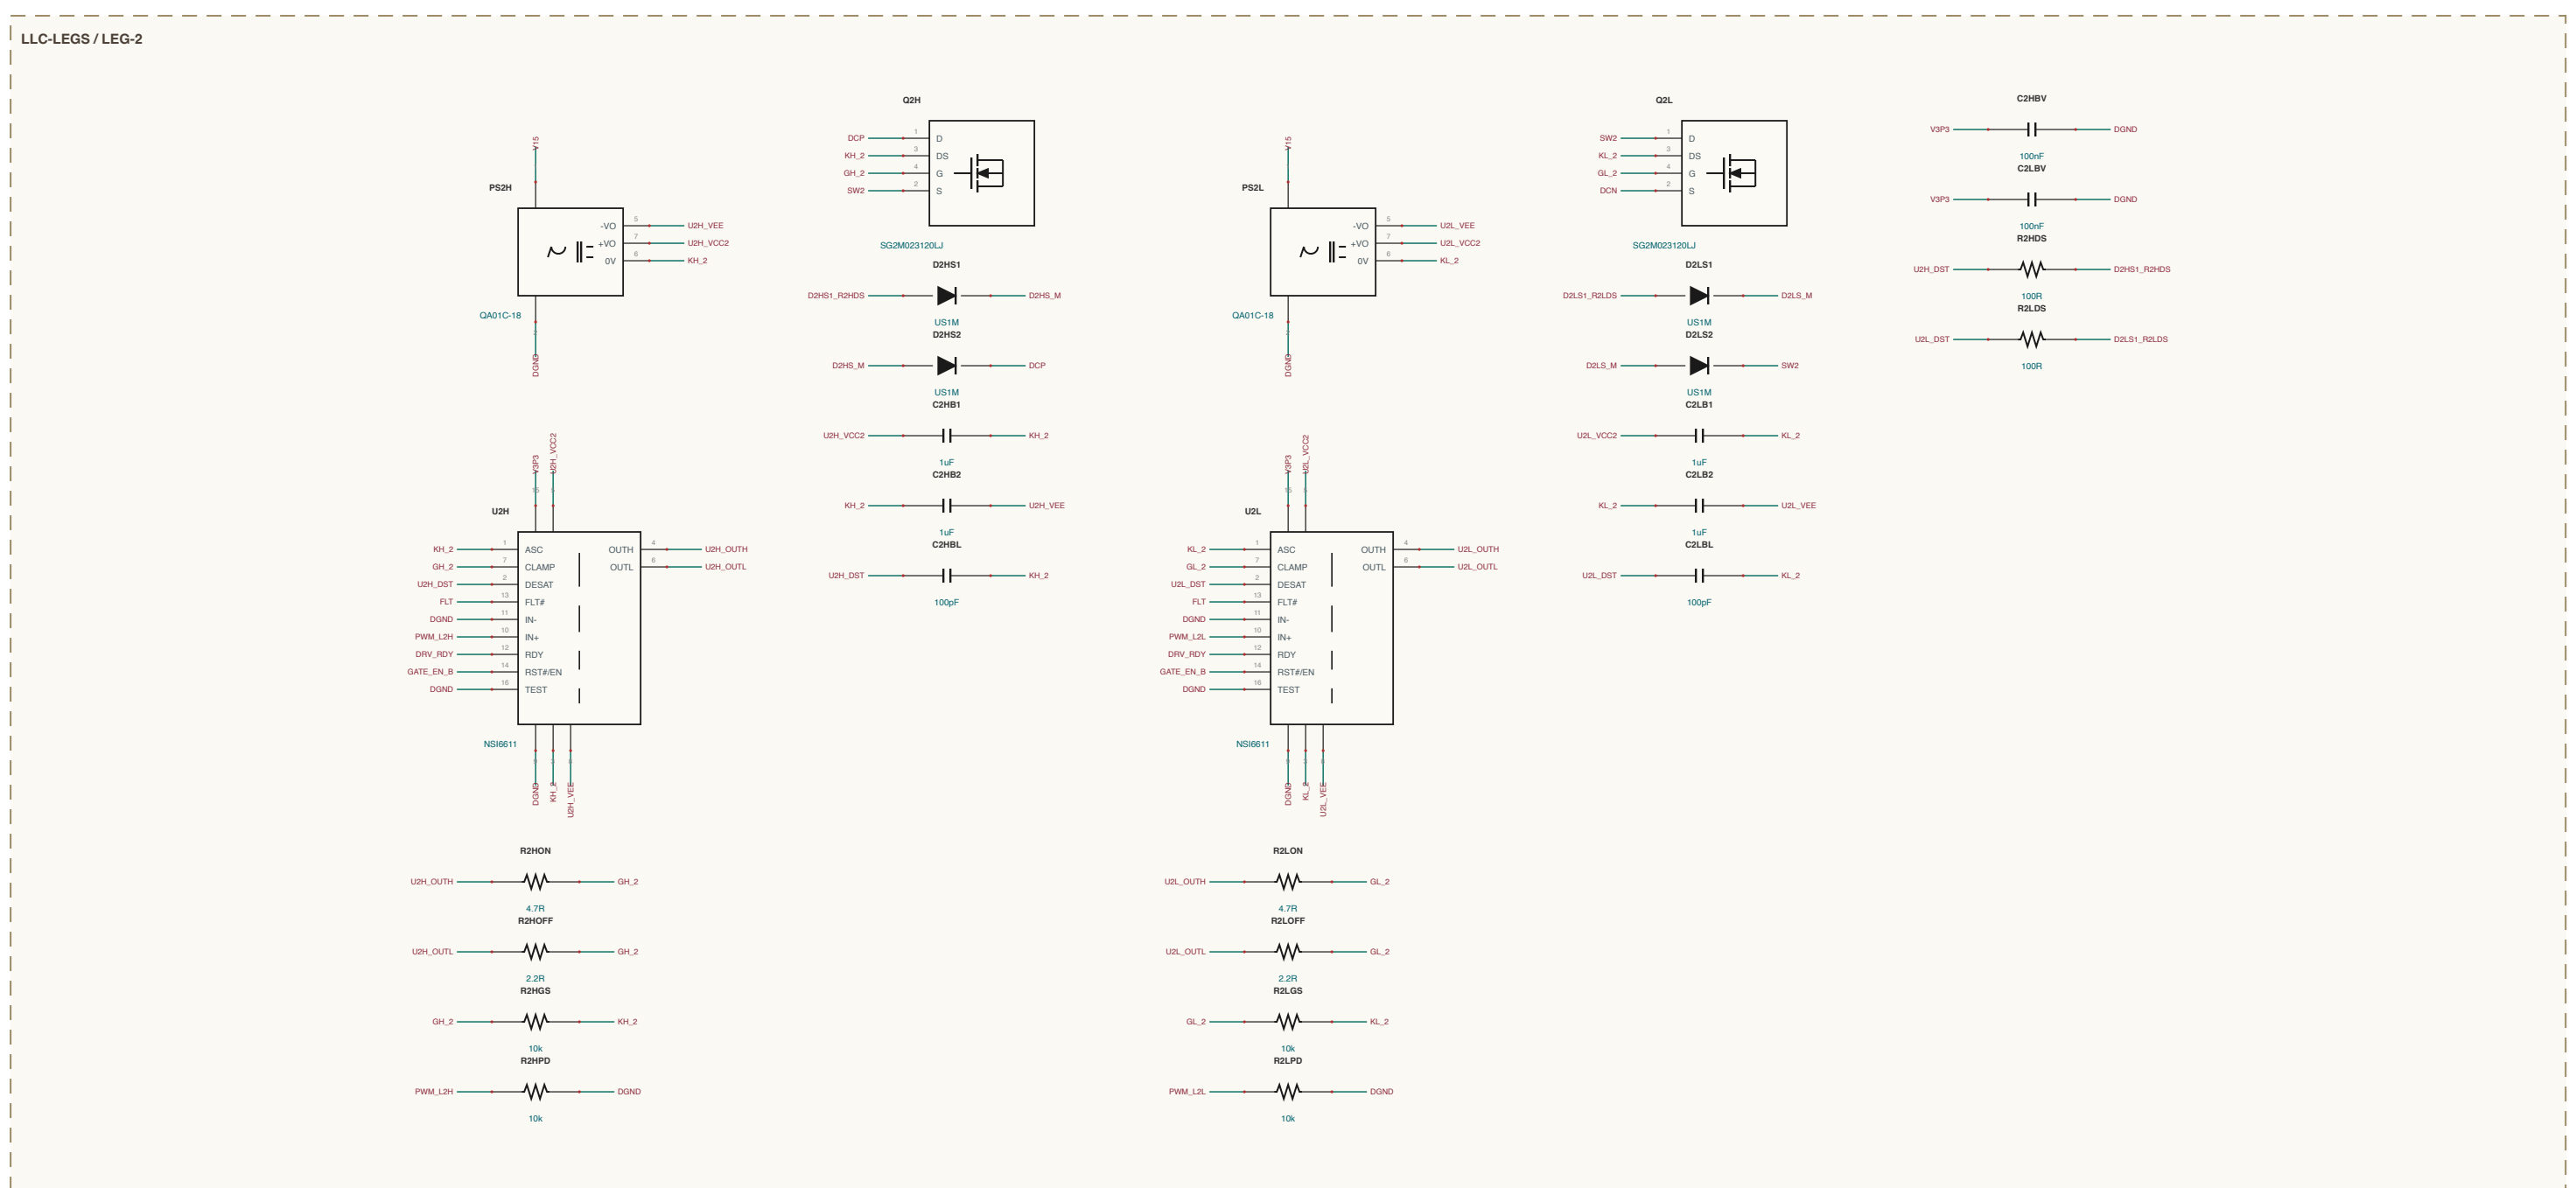
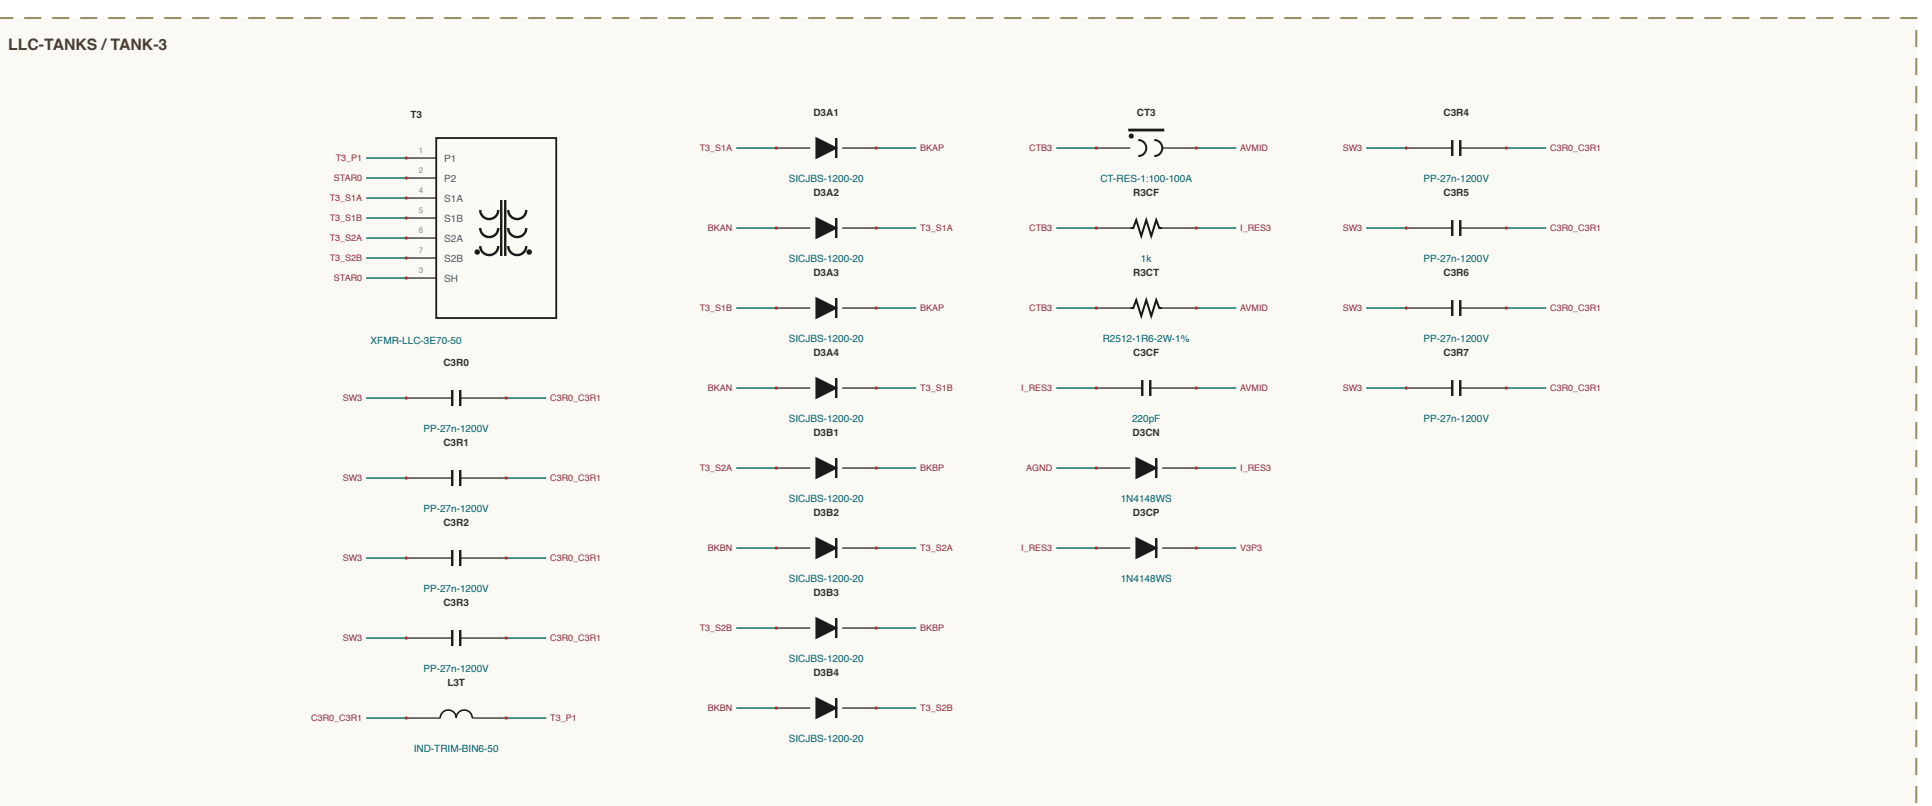
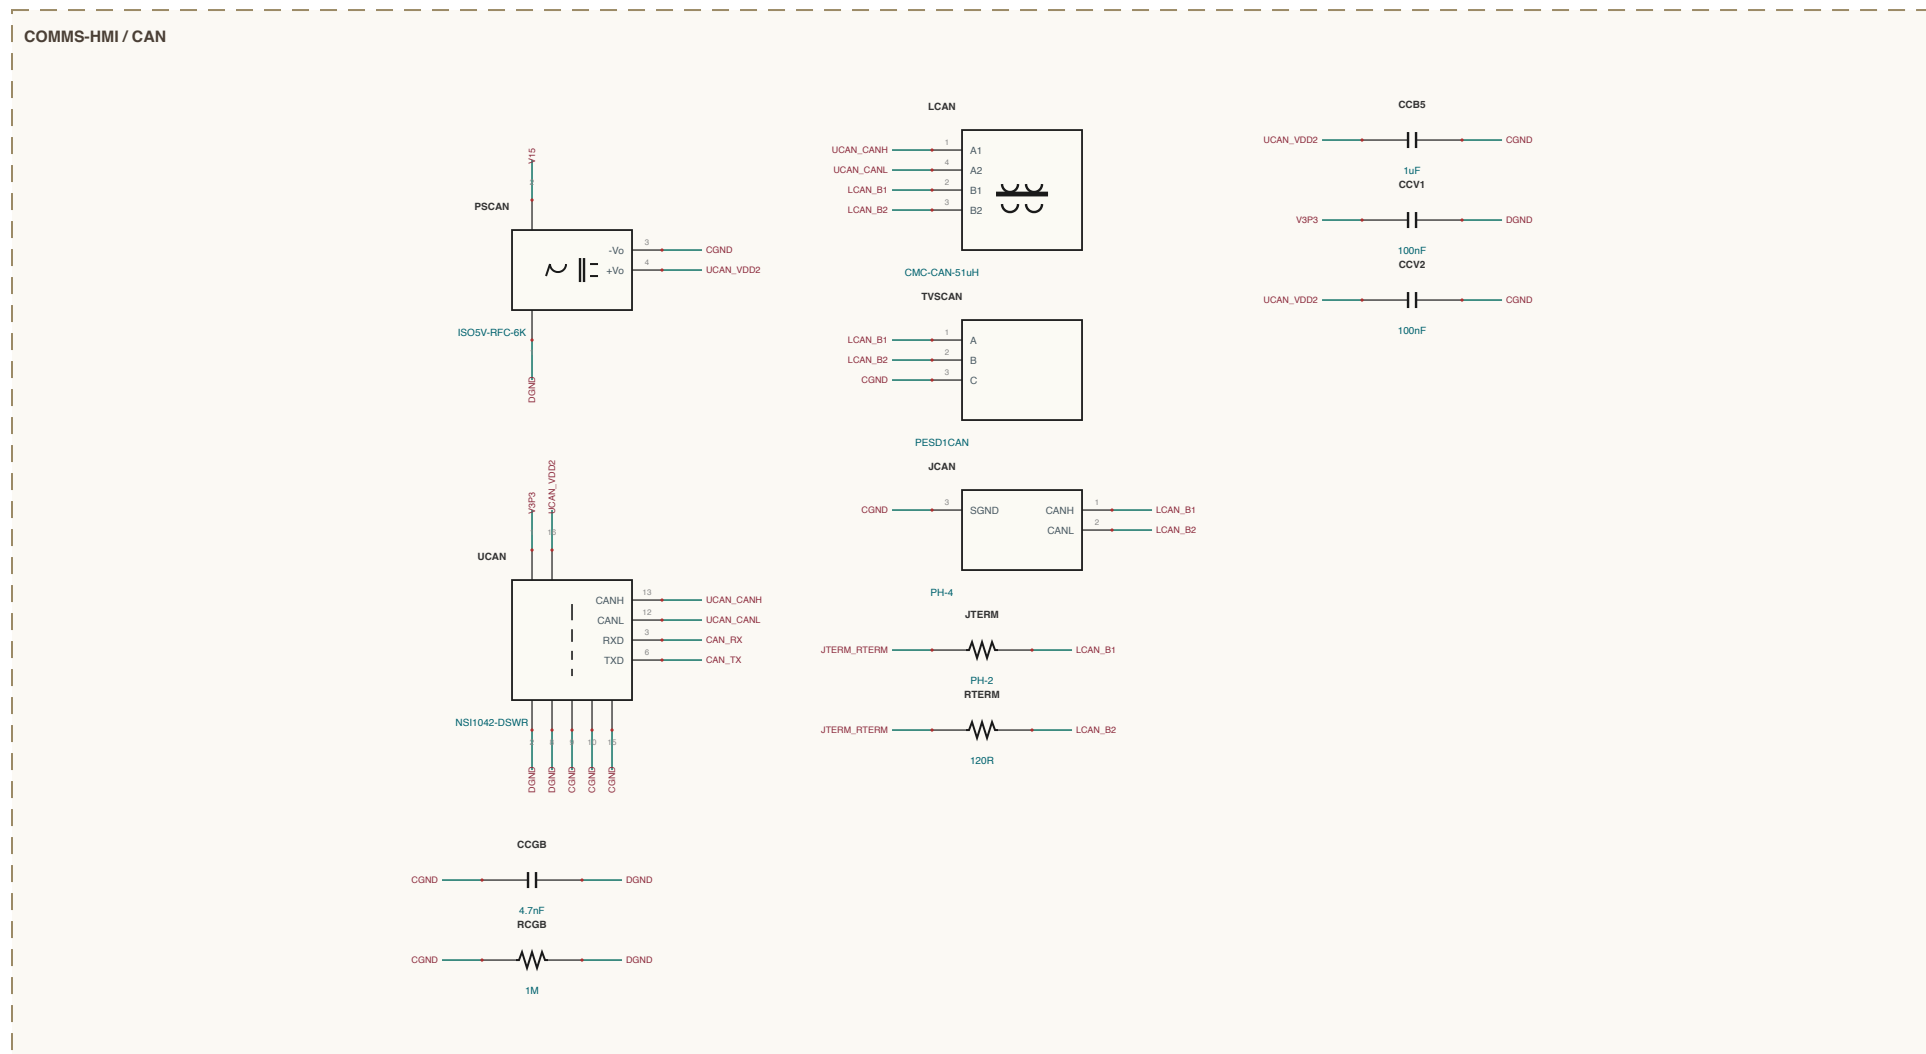
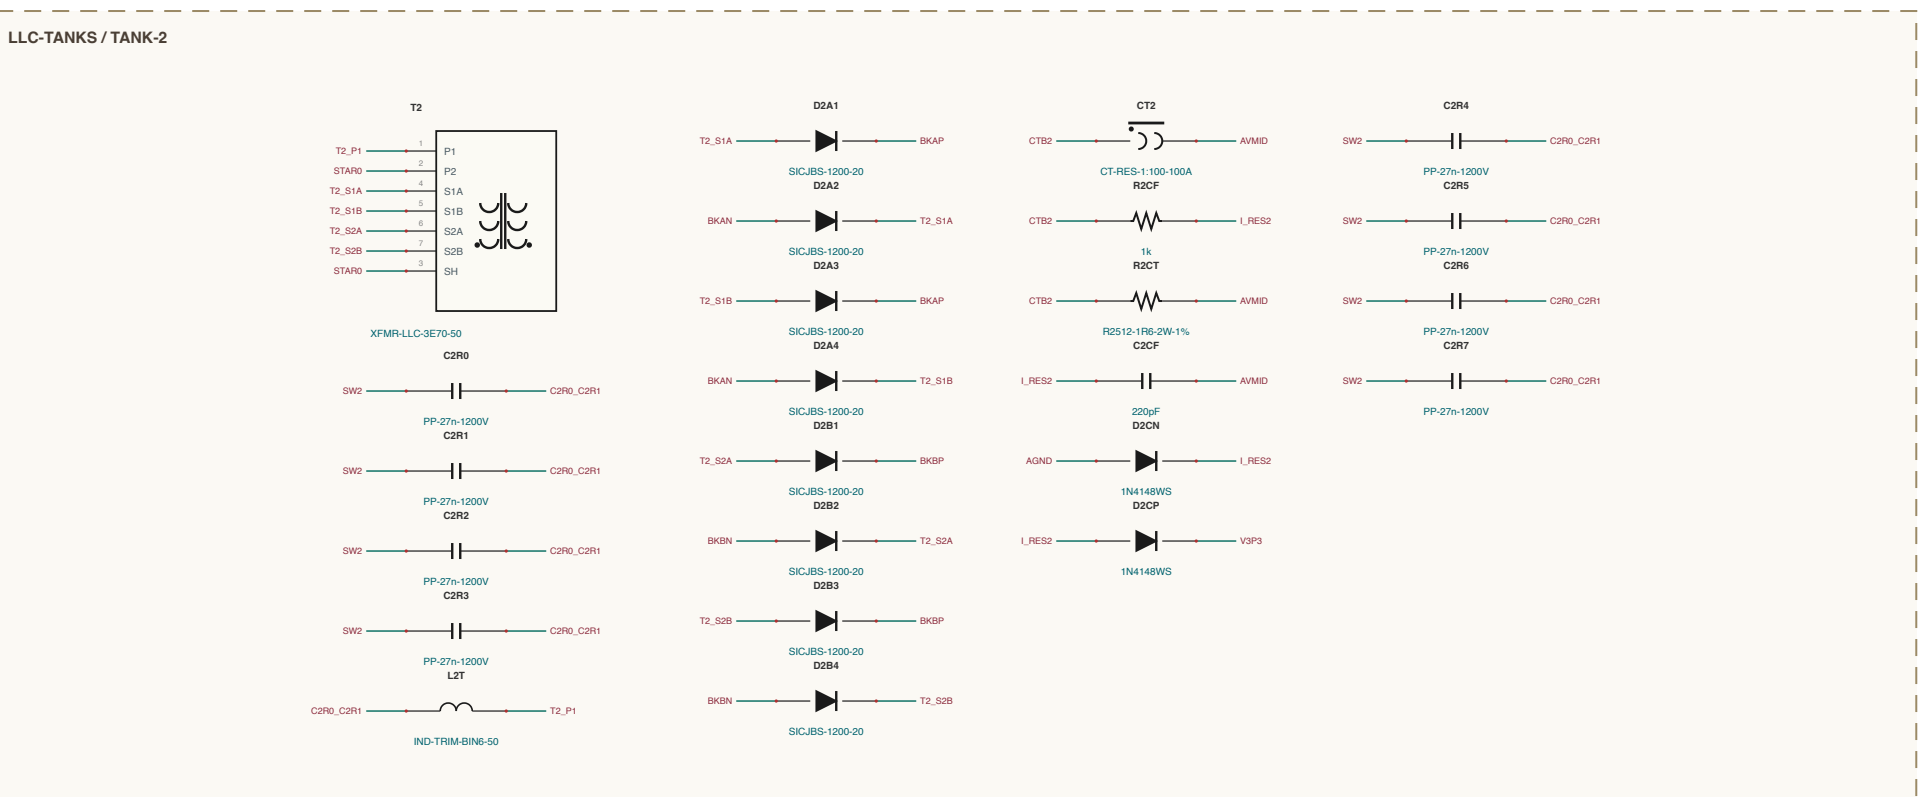
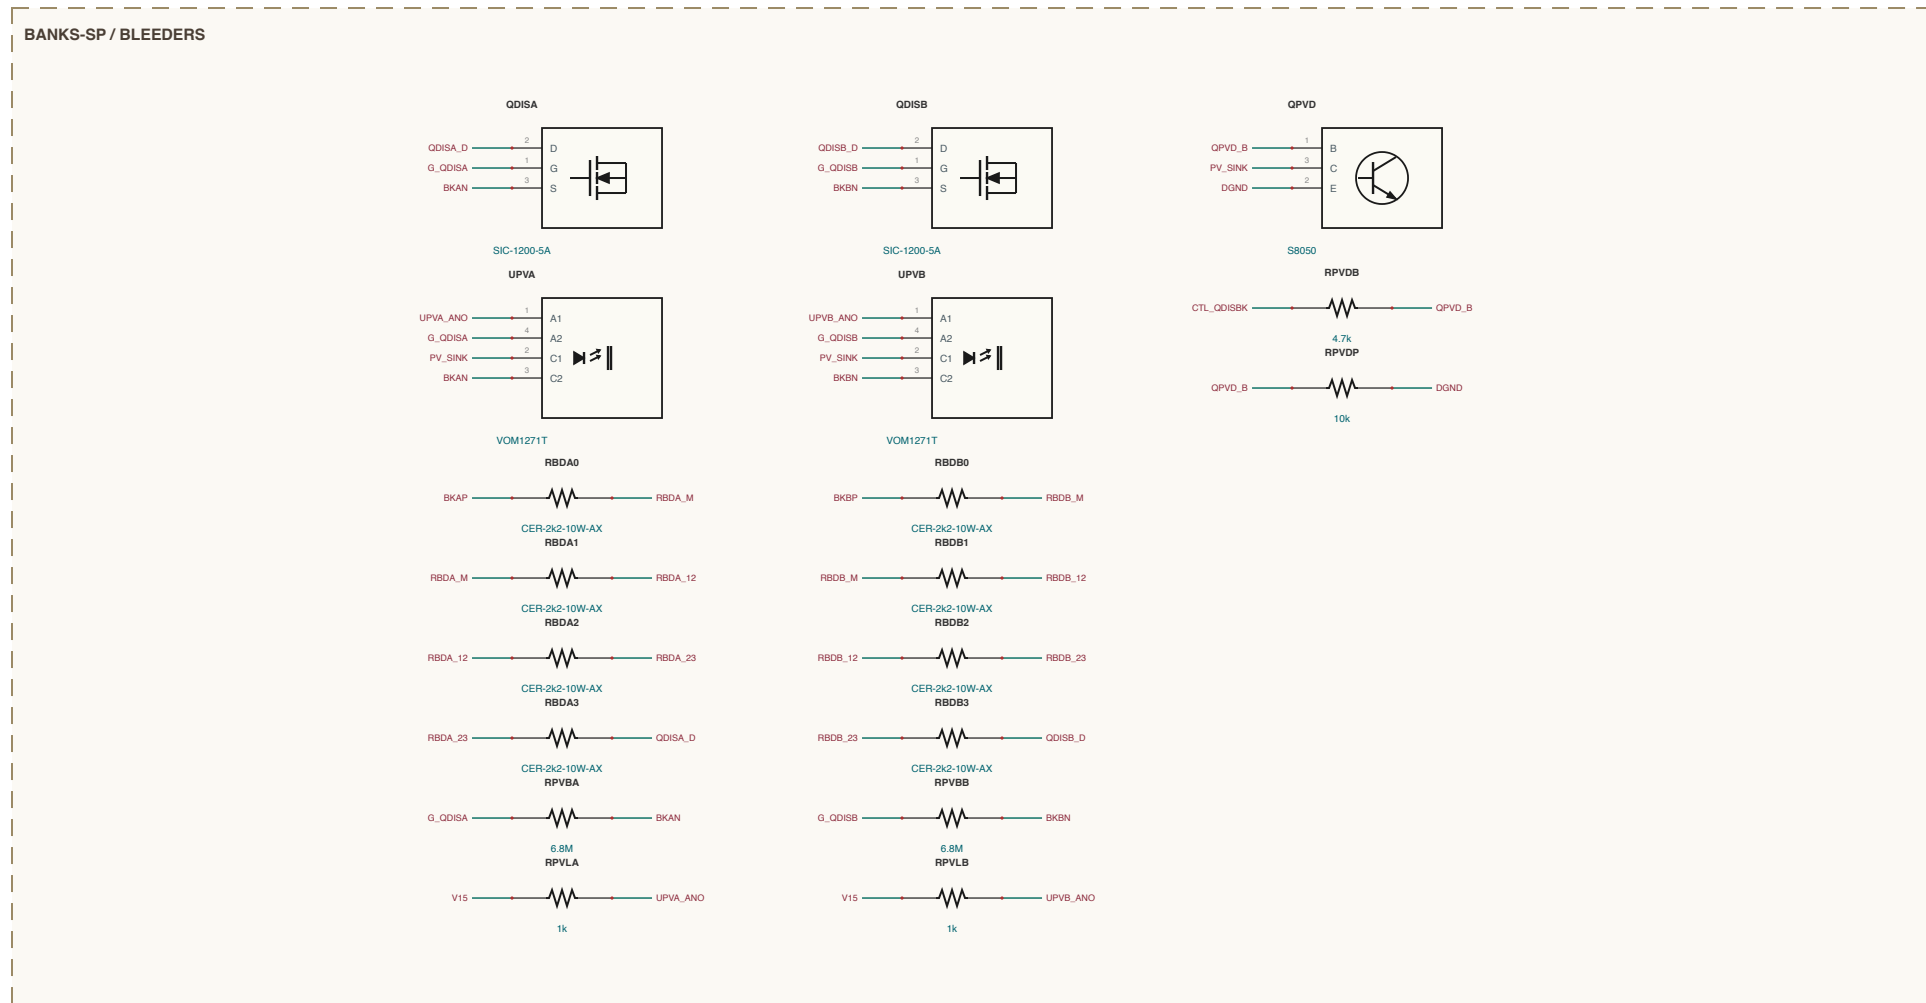
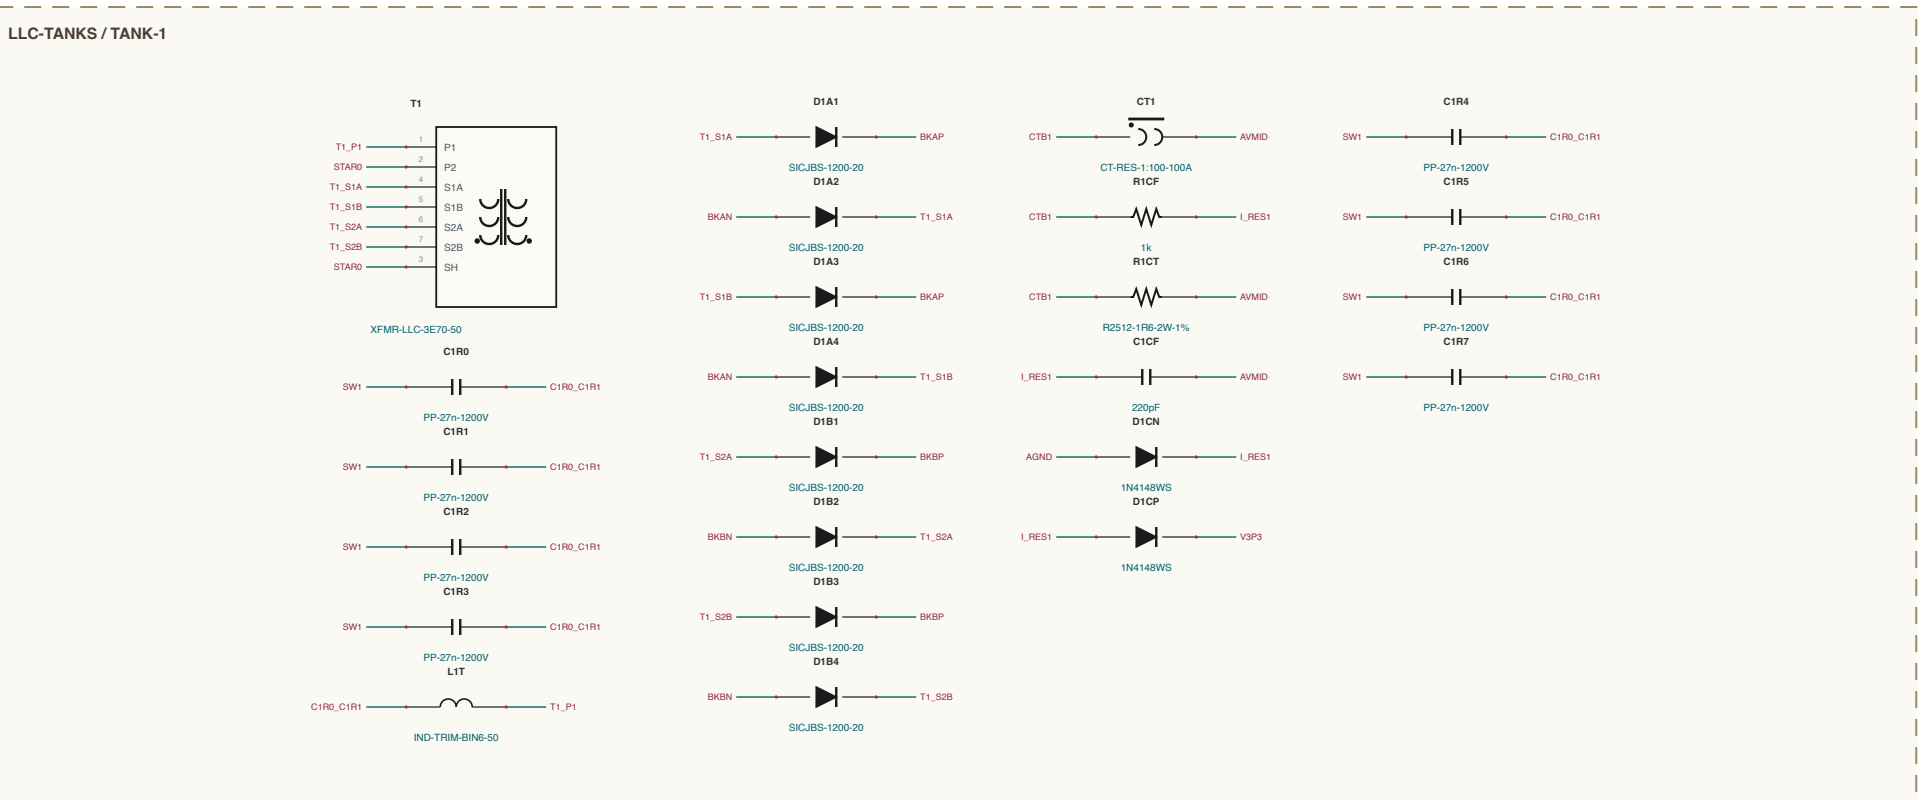
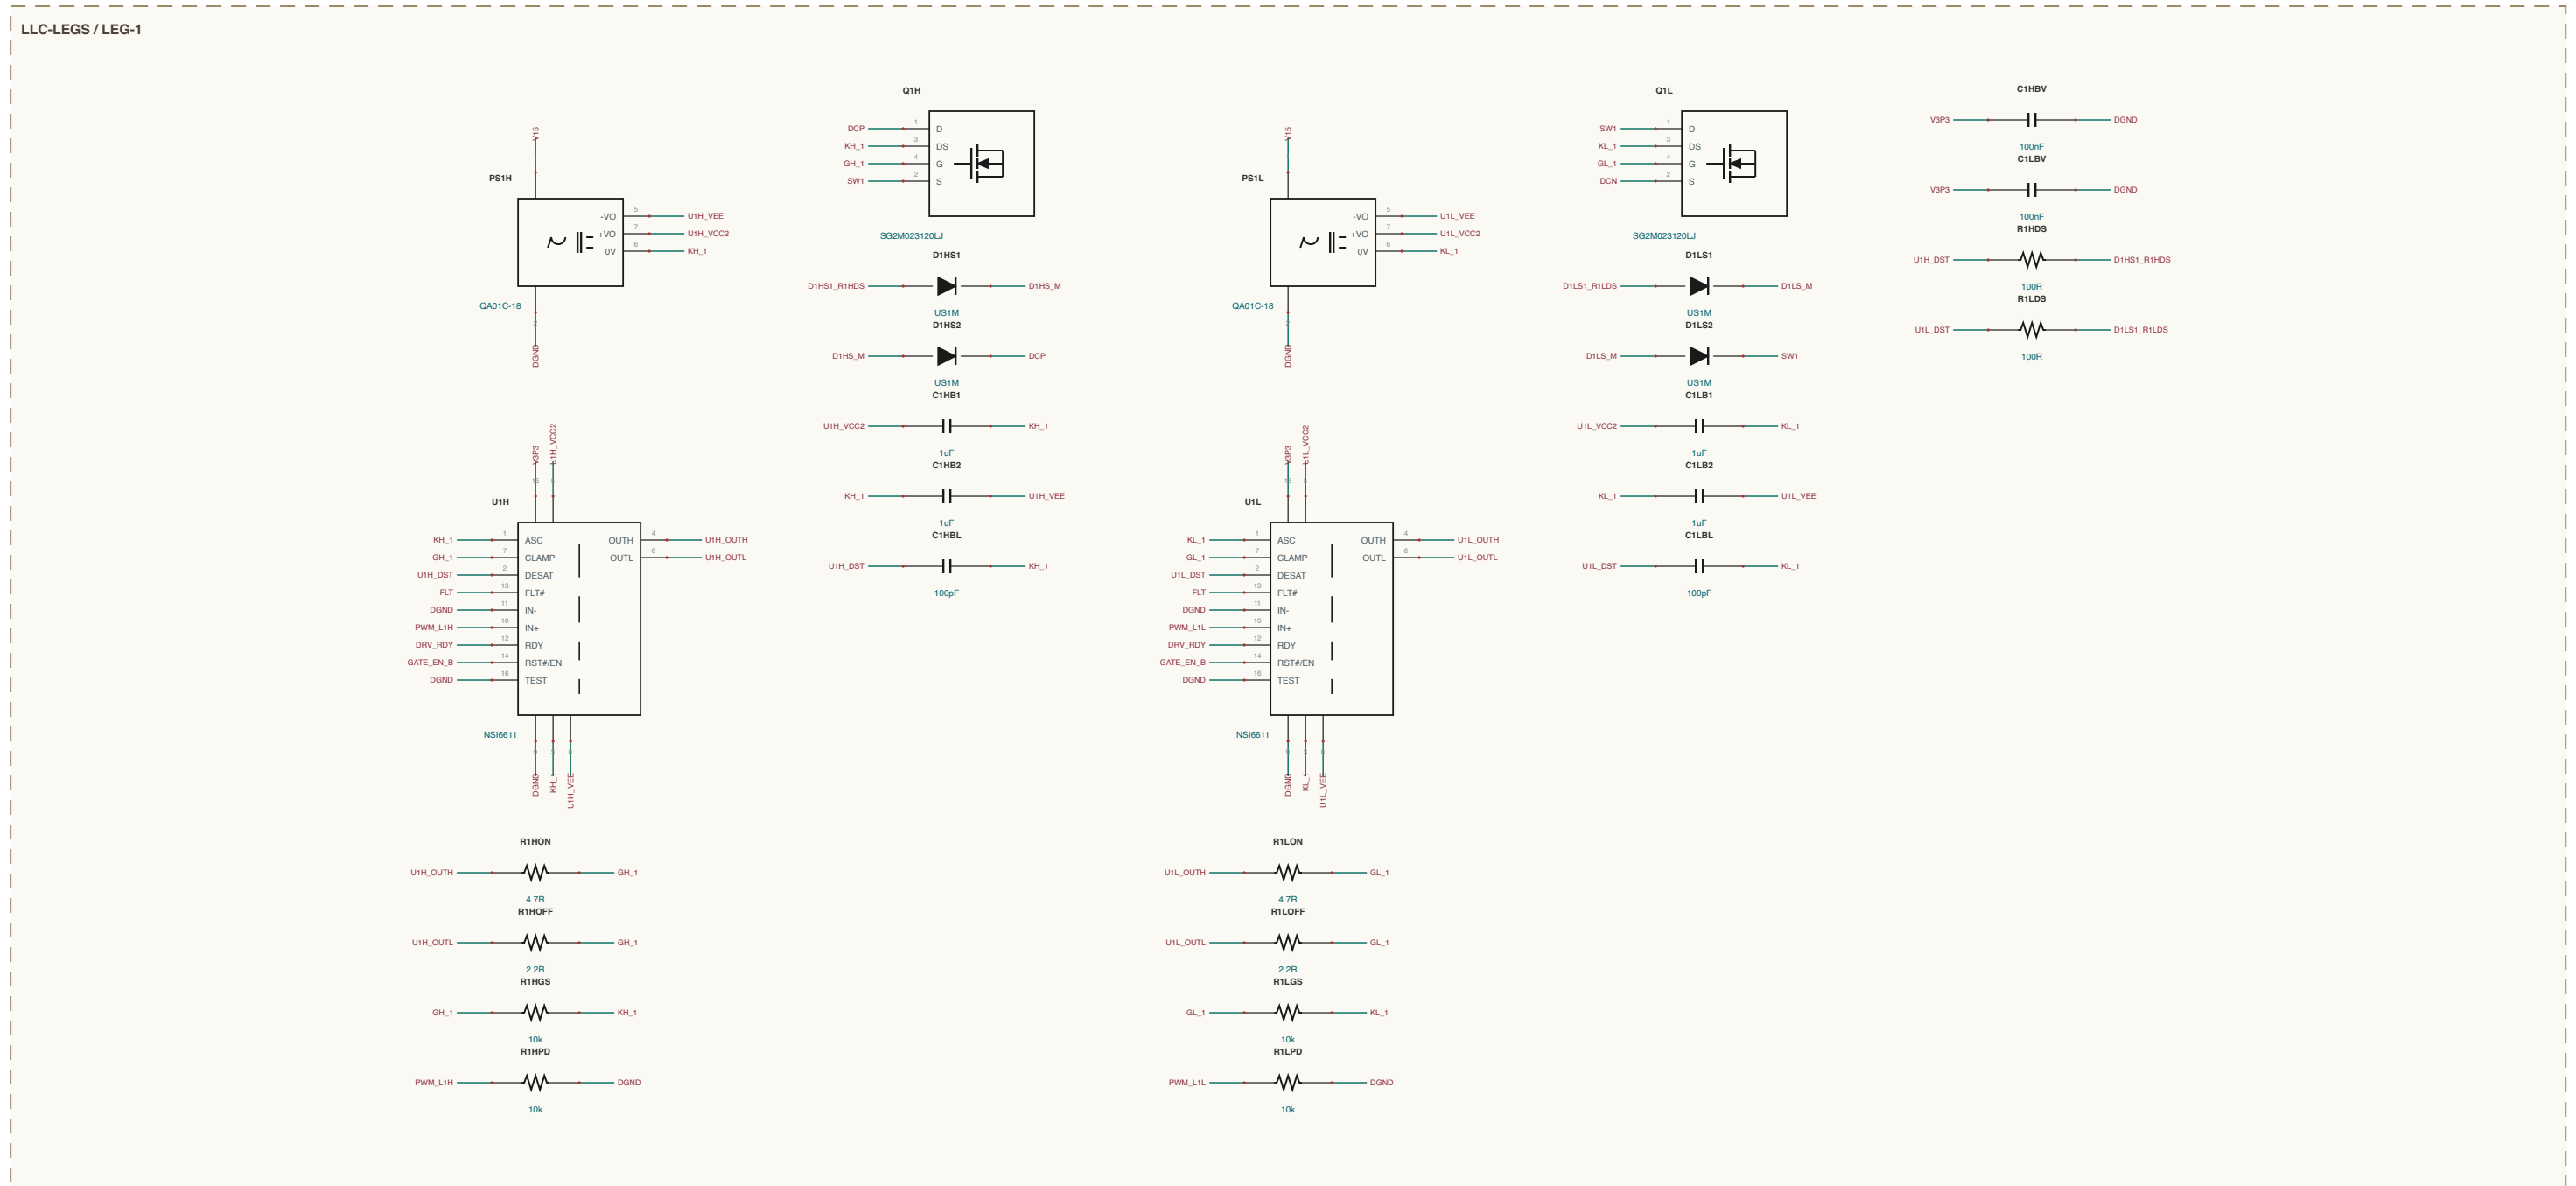
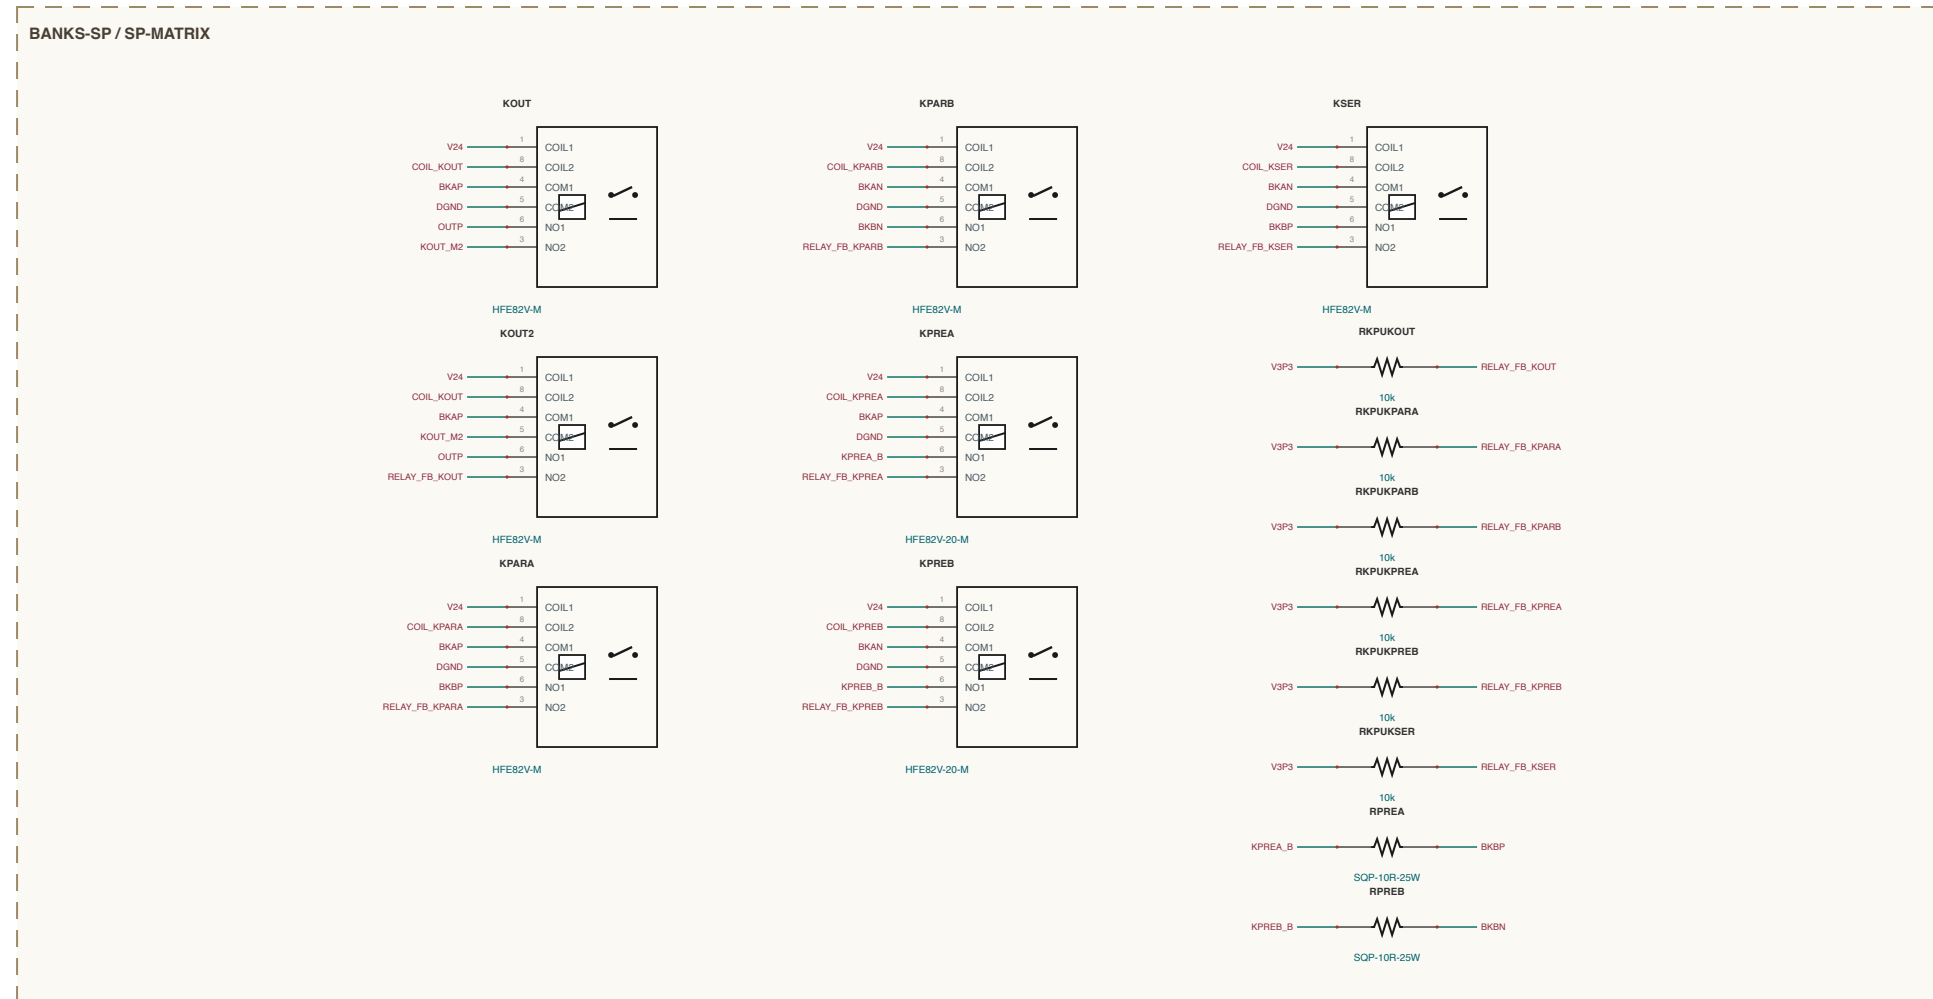
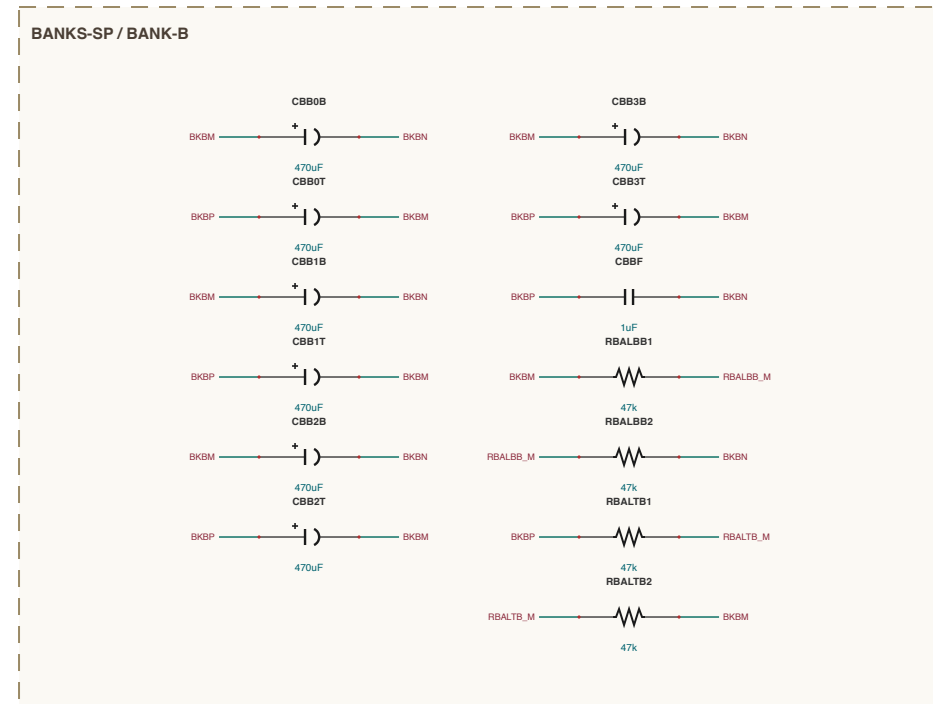


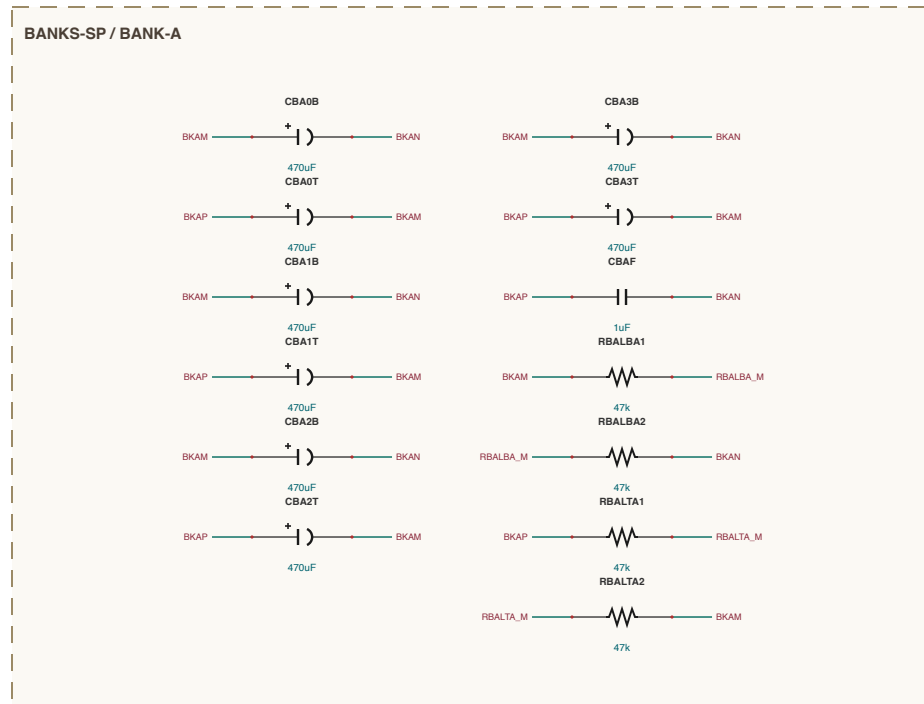

NET NAMING

Internal junctions are named for what they join

Green, «Bills code at that IC pin e.g. `W5DQA_VDDP`

Redden, M (output of a series pair e.g. `FEALC7A_M`)

Redden, series leg between Reddenwire e.g. `PC1D_21`

all others are explicit design notes

MAGNETICS CONSTRUCTION

Identify your diagnostic machine, not Duran, glass, YtO, acceptance times from there)

0.0 74.73 (in 0750000 per section, 6.6-6.030-60, Ar wt 8.1-8.145, 1000°C uncharged), Len 0.040 wt 7%

0.0 174.07 (red, blue 2.05-2.01, blue 2000-64) (30-0000)

Initial 10 x 10 mm x measured after bakeage (don't COMPENSATE bakeage spread), 0 or 1000 sections

SHEET INDEX

SECTION 1 - 1 of 2
OUTLINE SHEETING - 6 sections
BASIS OF PL - 4 sections
LLC LAROS - 4 sections
CONCRETE - 1 section
LLC FORMS - 1 section
CONCRETE-WEB - 2 sections
see 2.0 - 32 sections, 333 components