




BANKS-SP / BANK-A

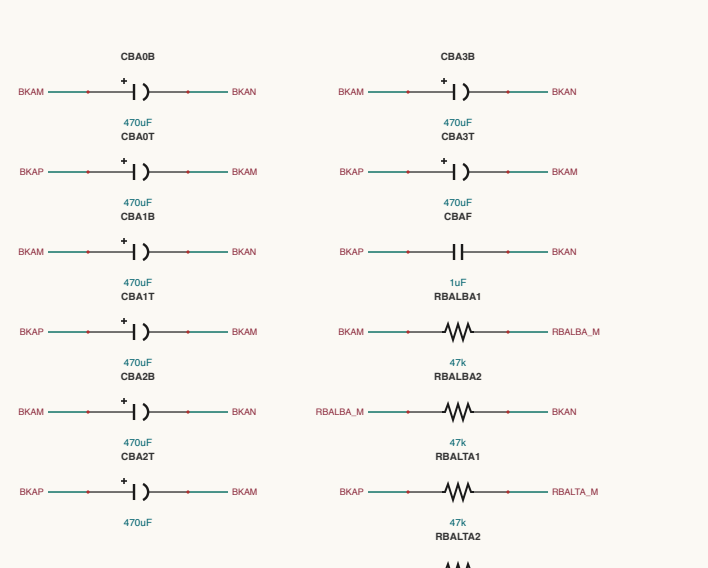


BANKS-SP / BANK-B

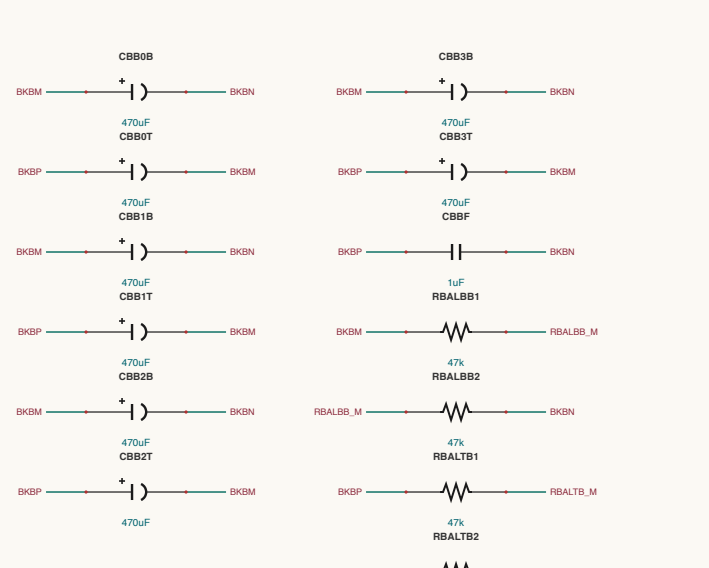


BANKS-SP / SP-MATRIX

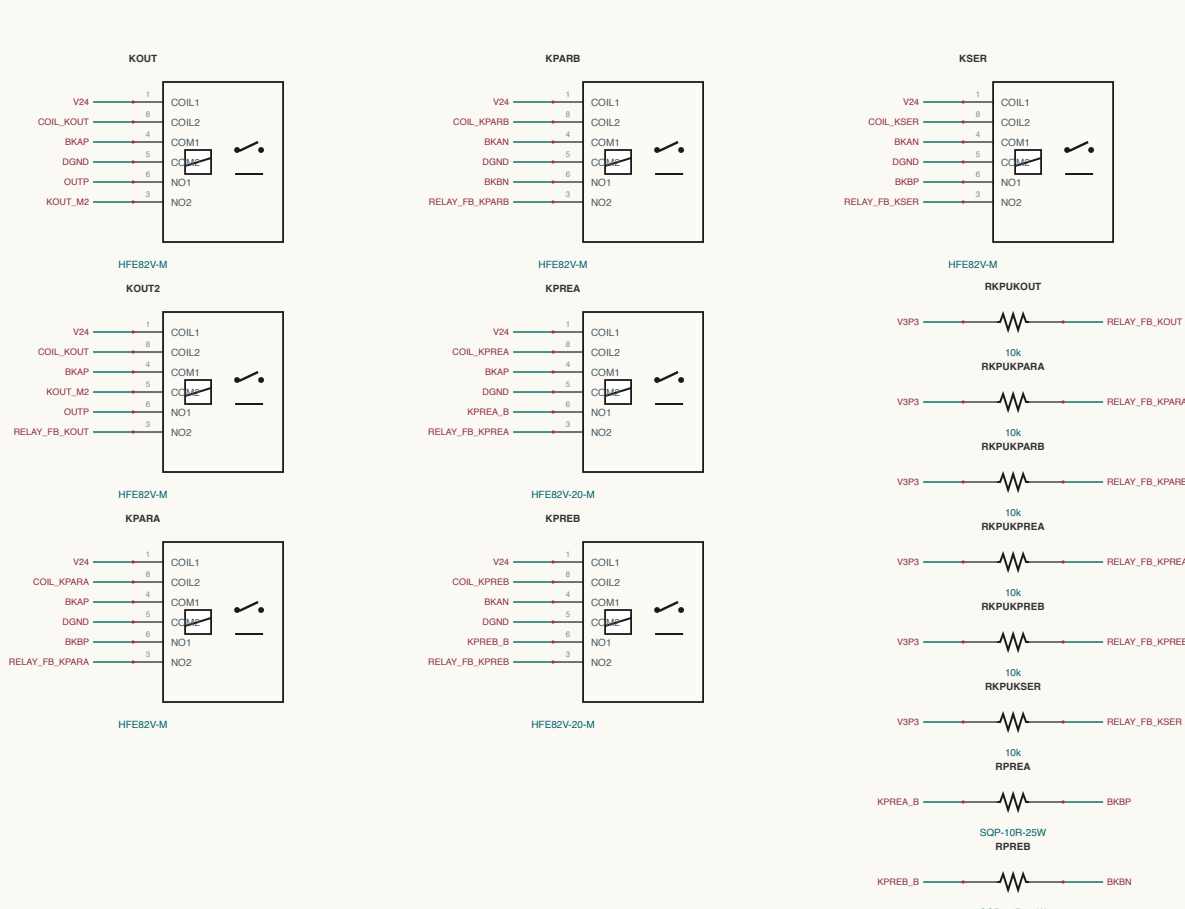


LLC-LESS / LEO-1

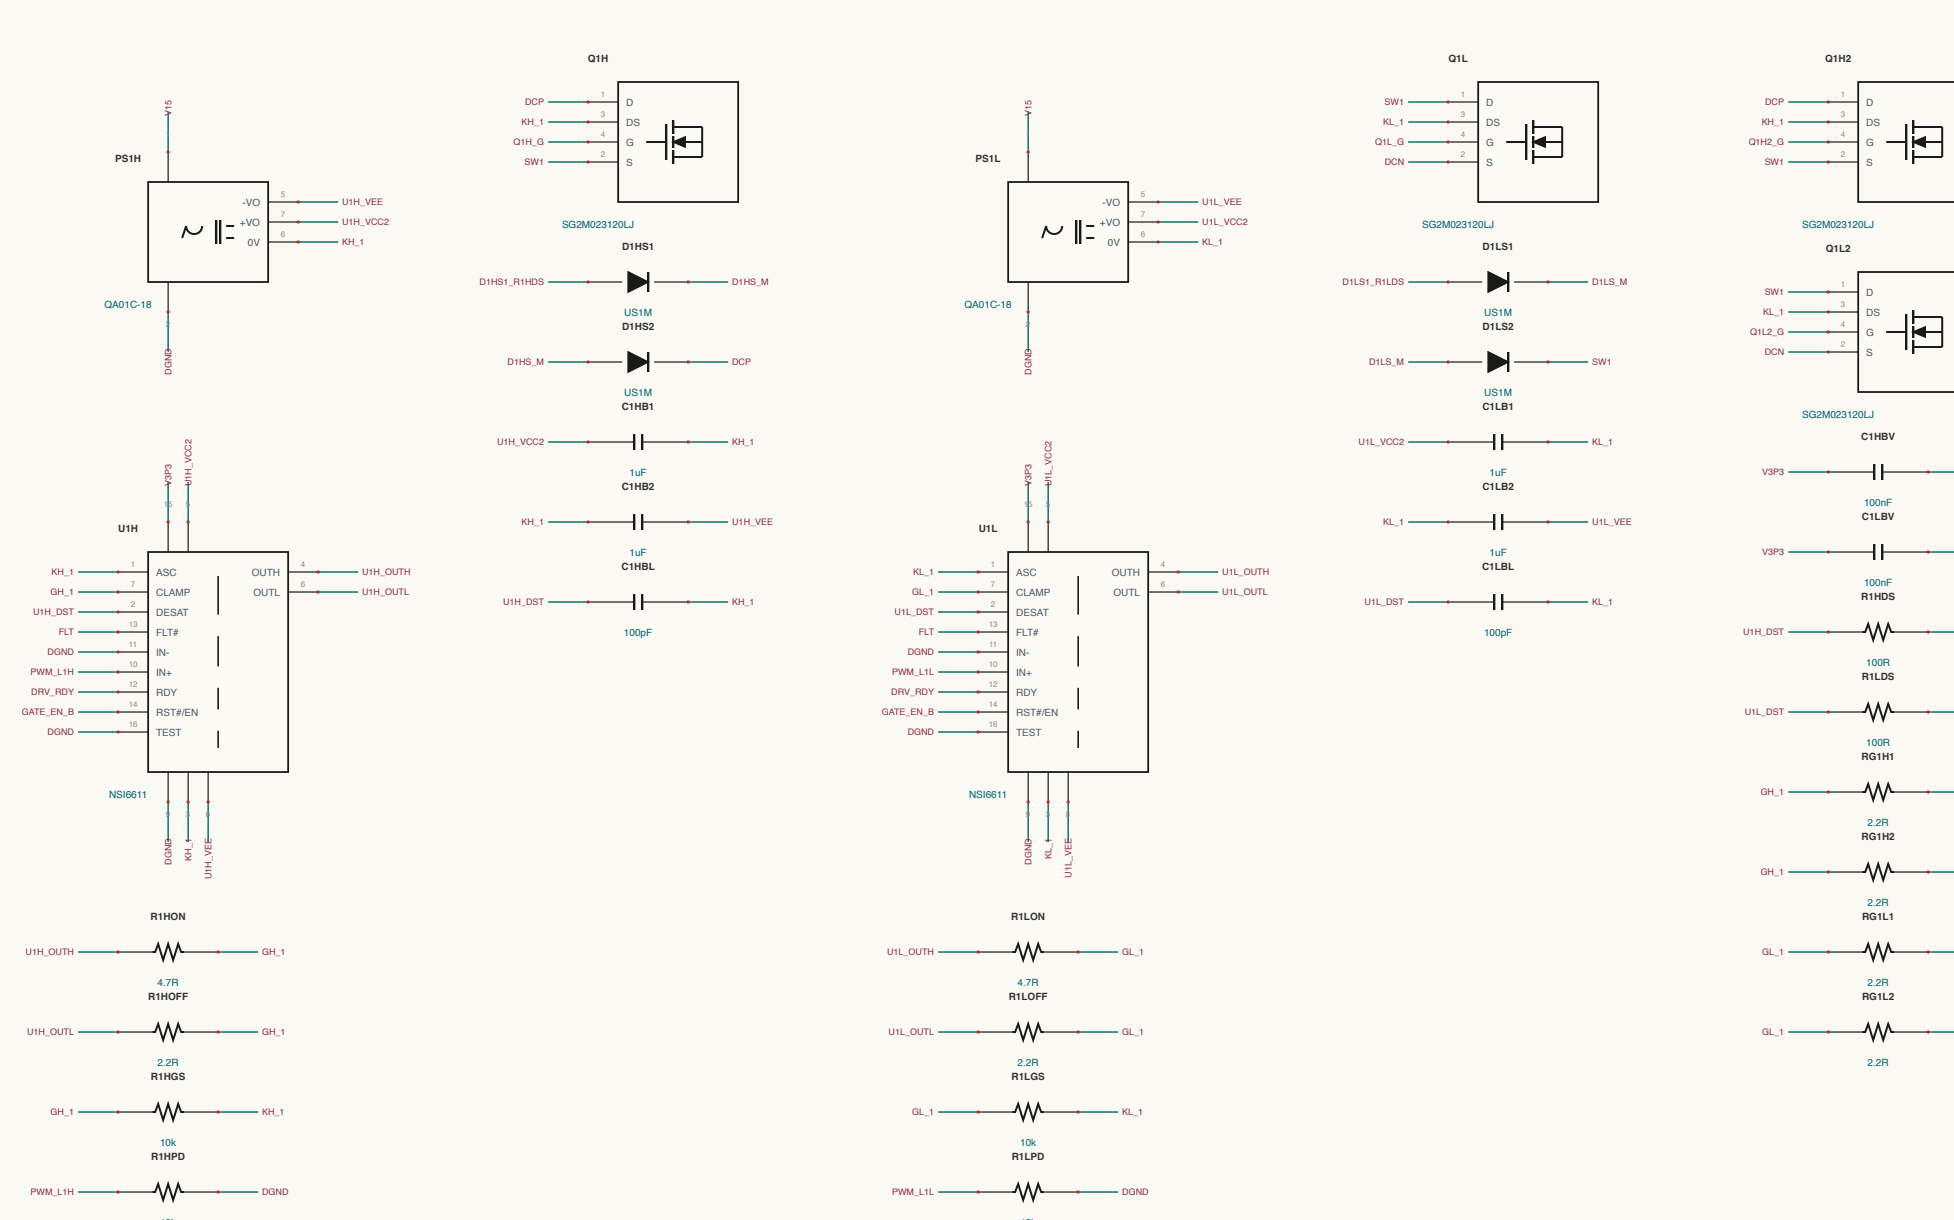


LLC-TANKS / TANK-1

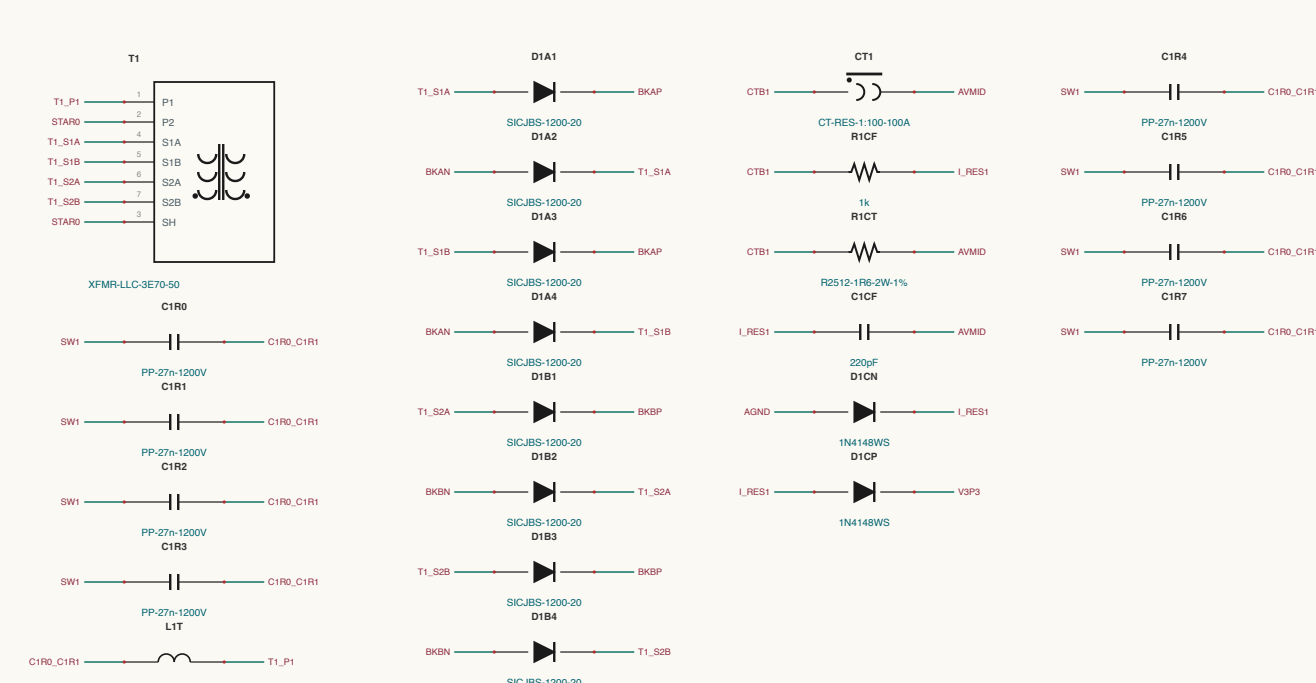


BANKS-SP / BLEEDERS

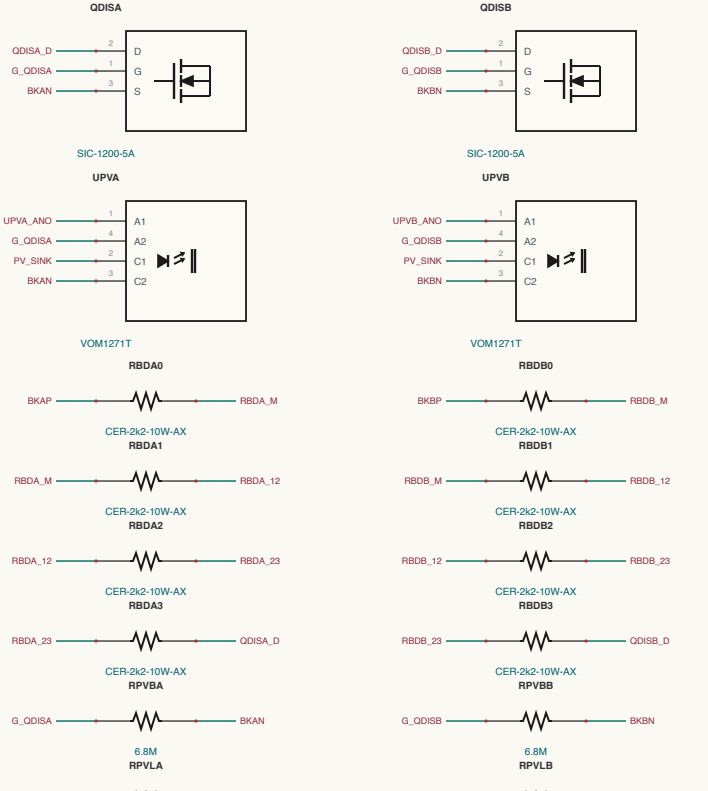


COMMS-HUB / HUB

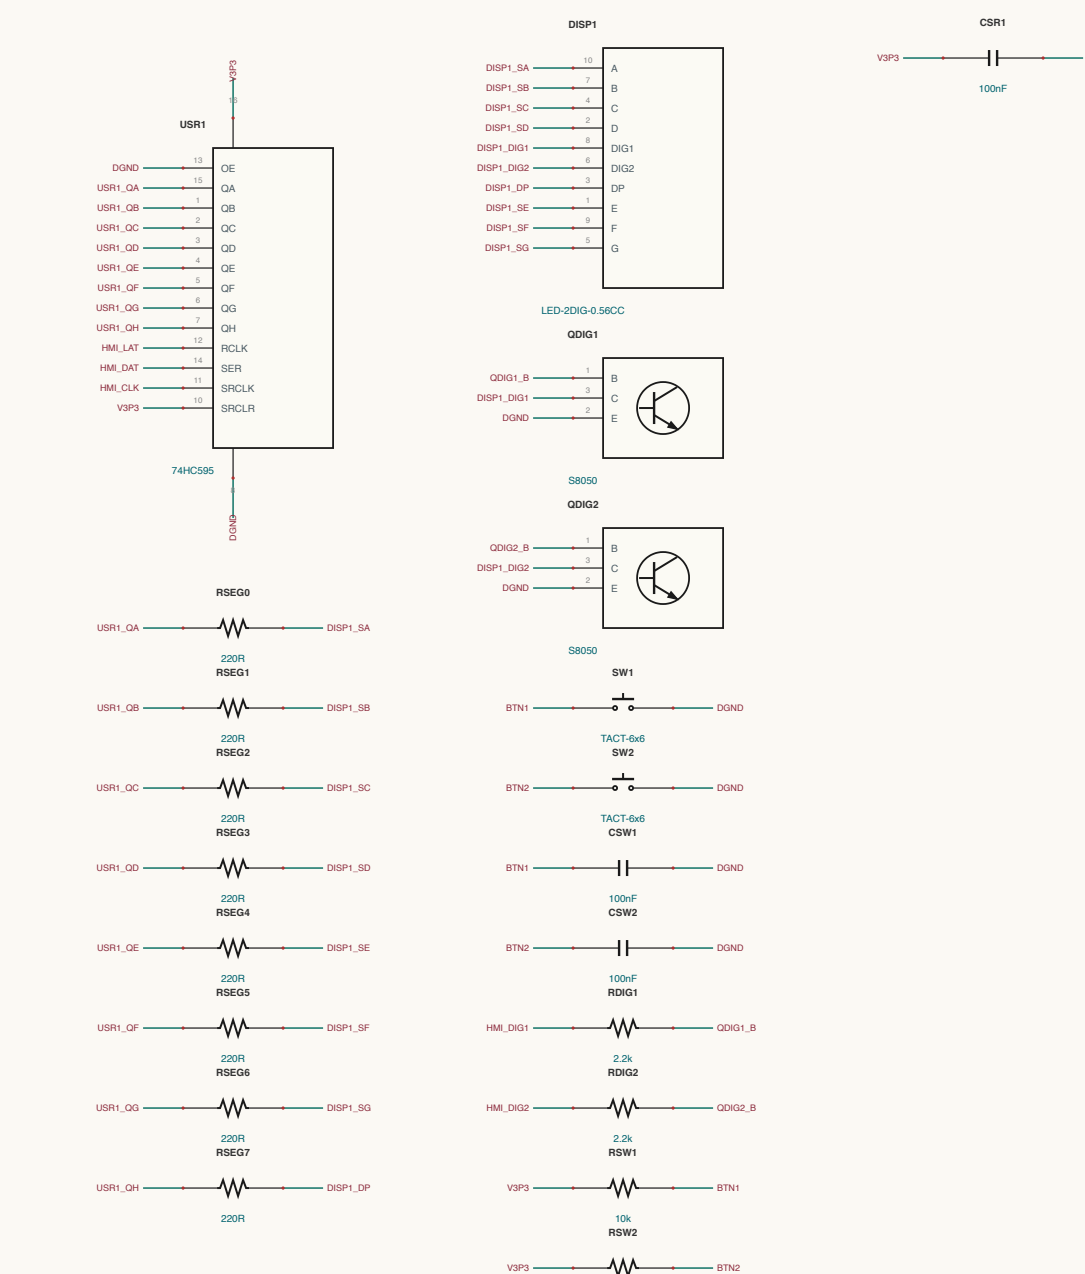


COMMS-HUB / CAN

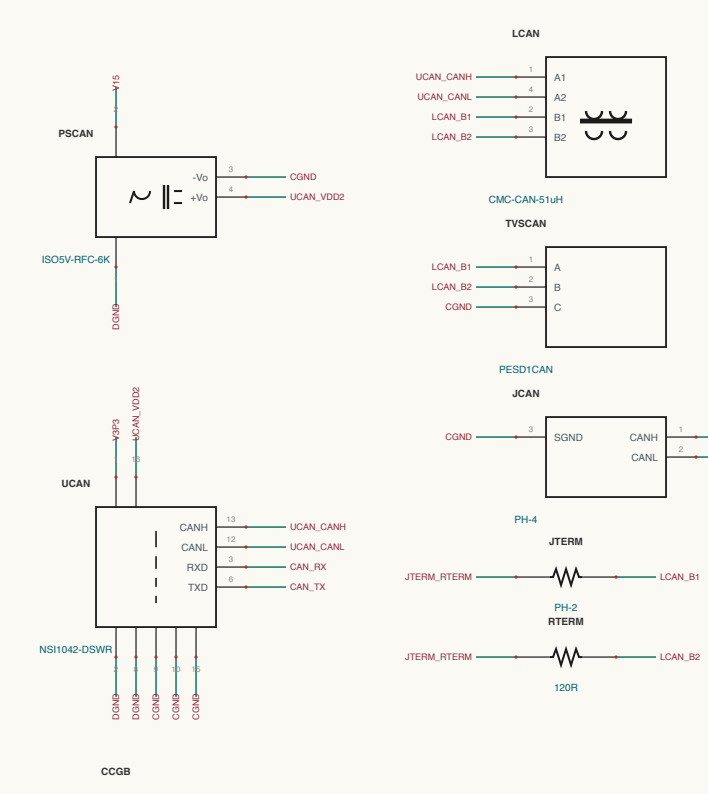


CONTROL / COL-DRIVER

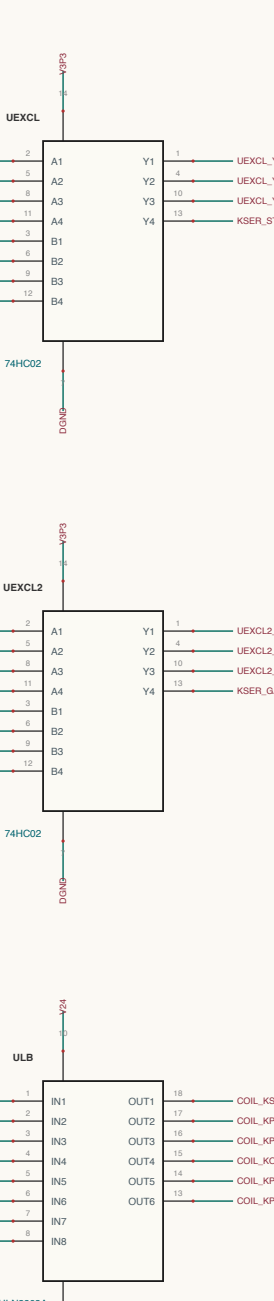


CONTROL / INTERCONNECT

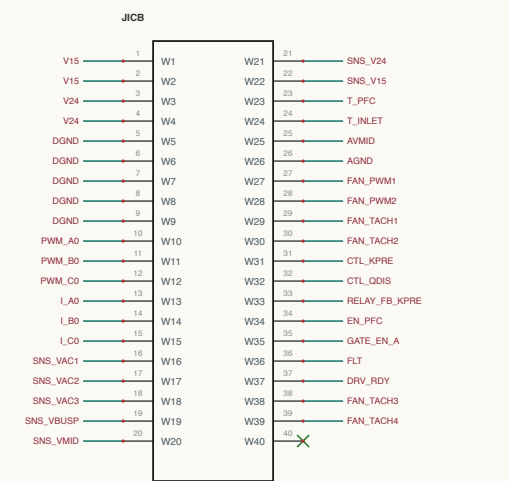


LLC-LESS / LEO-2

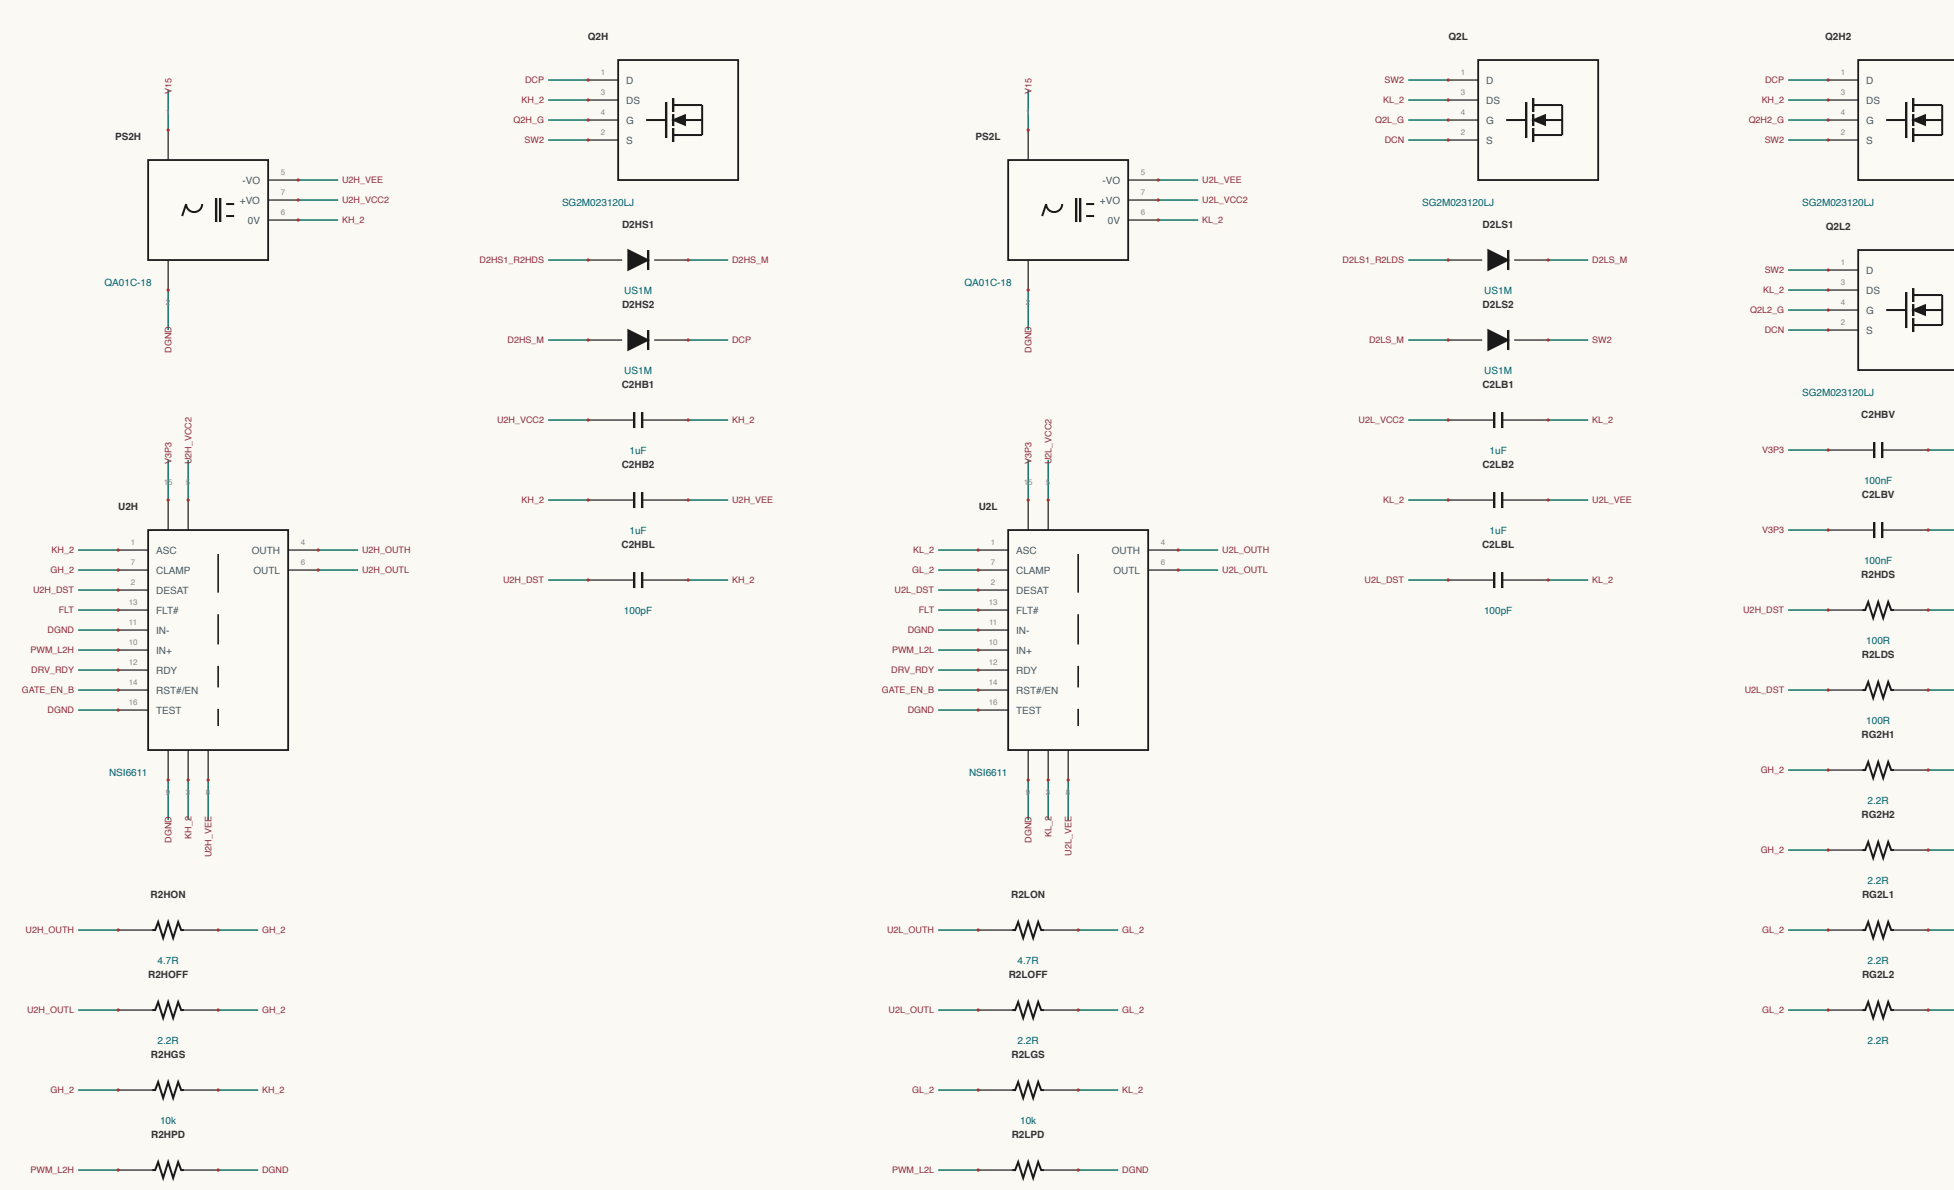


LLC-TANKS / TANK-2

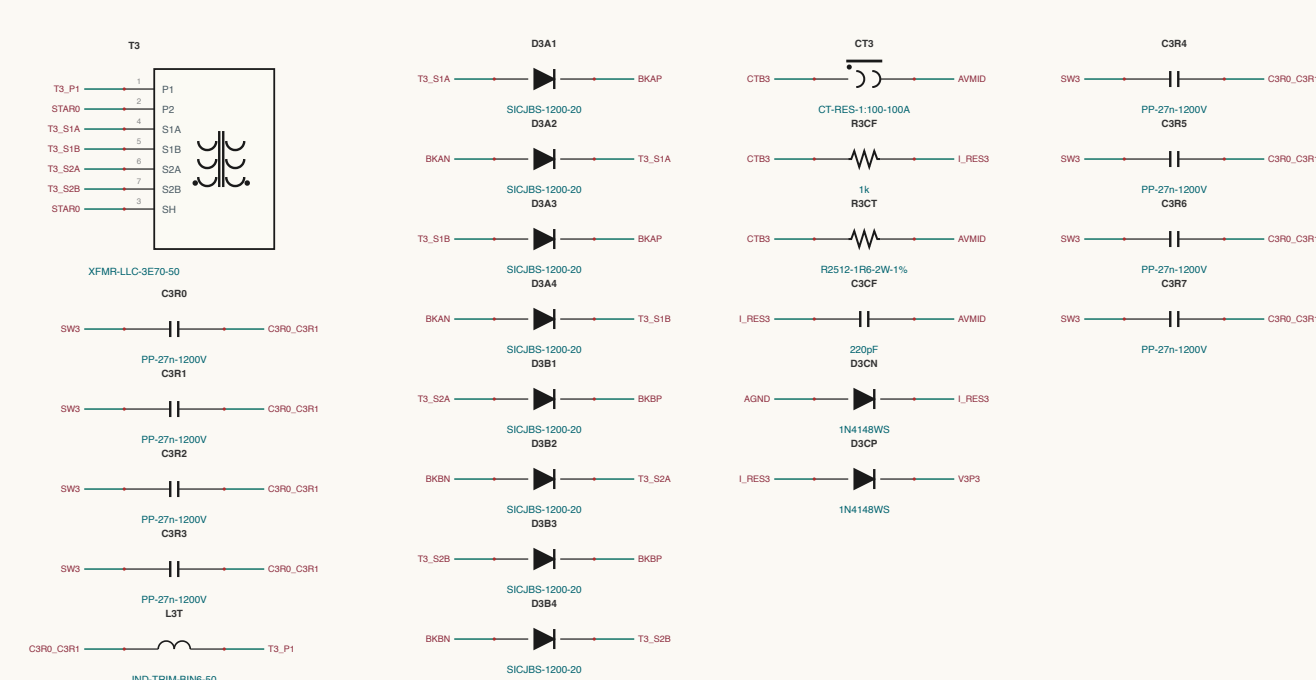


OUTPUT-SENSING / OUTPUT

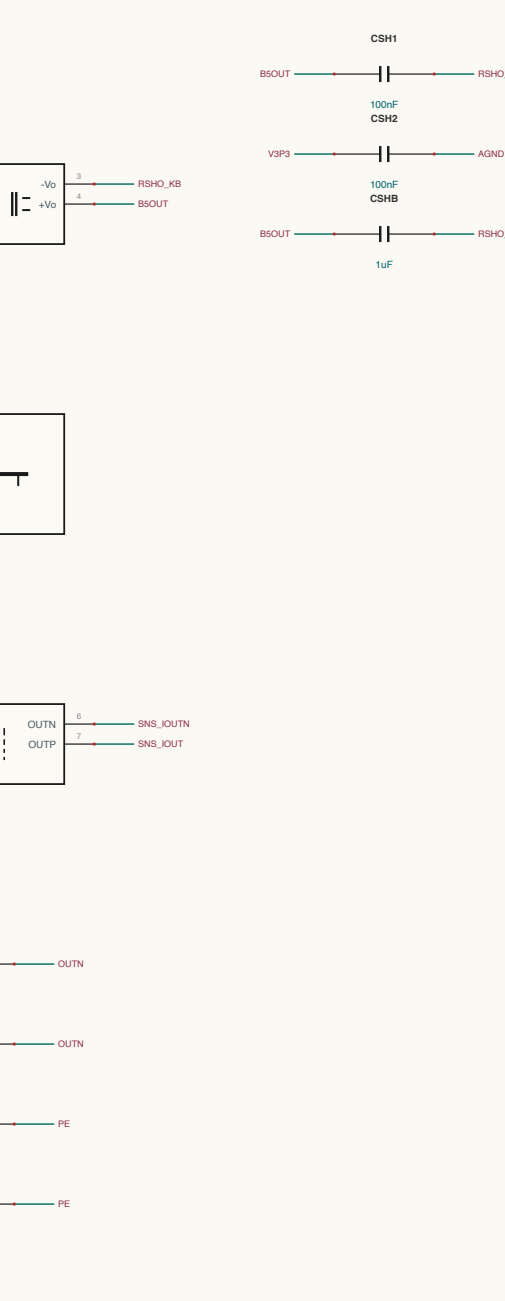

OUTPUT-SENSING / SENSE-VOLTA

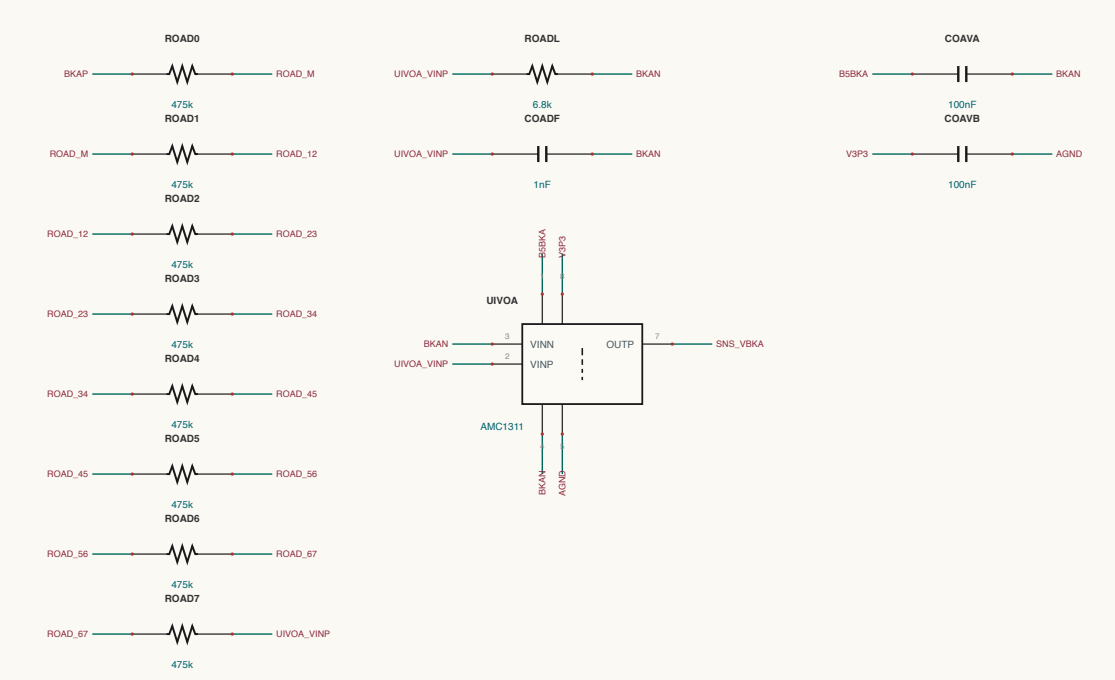

OUTPUT-SENSING / SENSE-VOLTA

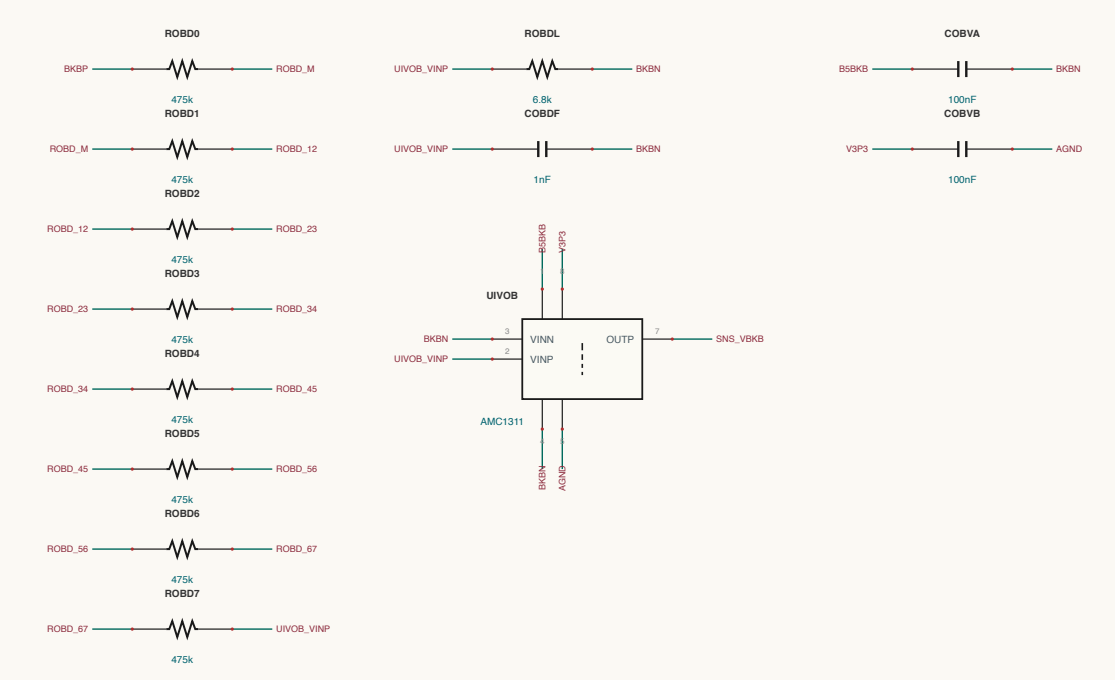


NET NAMING

Internal positions are named for what they do.
Location: 4000 nodes at 100k (e.g. 1000k, 100k, 100k).
Position: 3000 nodes at 100k (e.g. 1000k, 100k, 100k).
Position: 3000 nodes at 100k (e.g. 1000k, 100k, 100k).
All others are regular design rules.


MAGNETICS CONSTRUCTION

Identify per design/requirements and design, per the requirements from the design.
Design: 1000 nodes at 100k (e.g. 1000k, 100k, 100k).
Design: 1000 nodes at 100k (e.g. 1000k, 100k, 100k).
Design: 1000 nodes at 100k (e.g. 1000k, 100k, 100k).
Design: 1000 nodes at 100k (e.g. 1000k, 100k, 100k).


OUTPUT-SENSING / SENSE-VOUT

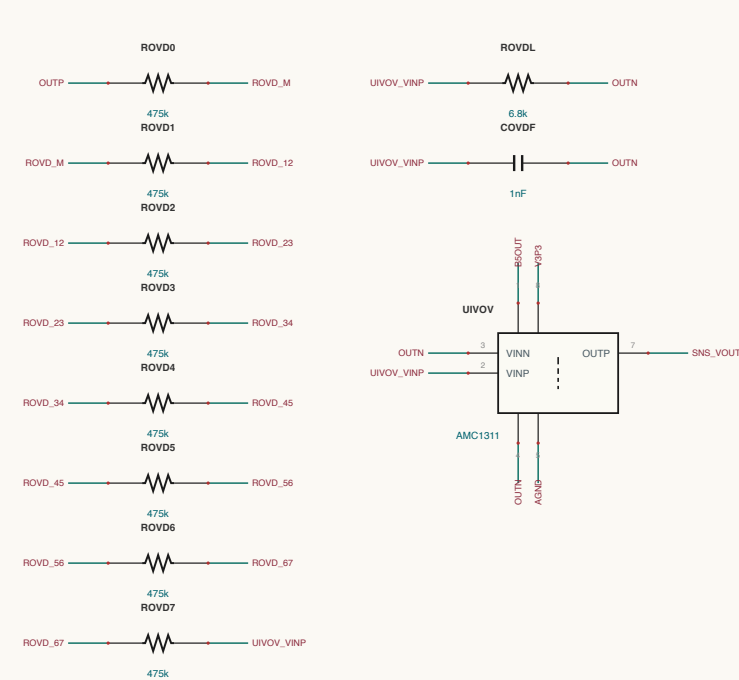

OUTPUT-SENSING / ATC

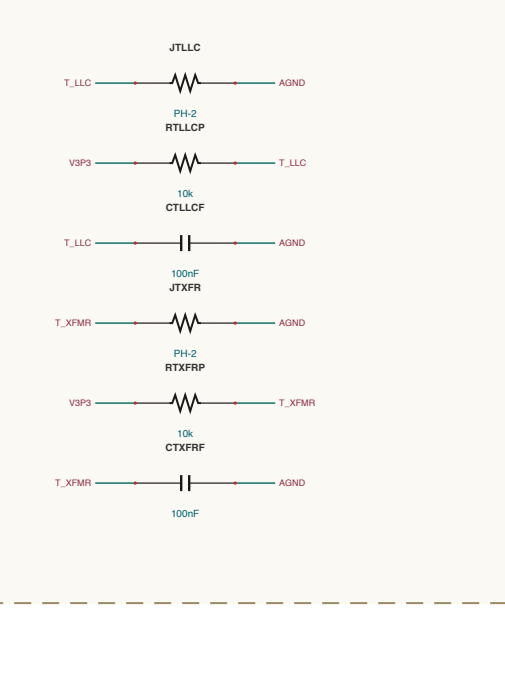

OUTPUT-SENSING / ISO-MAX

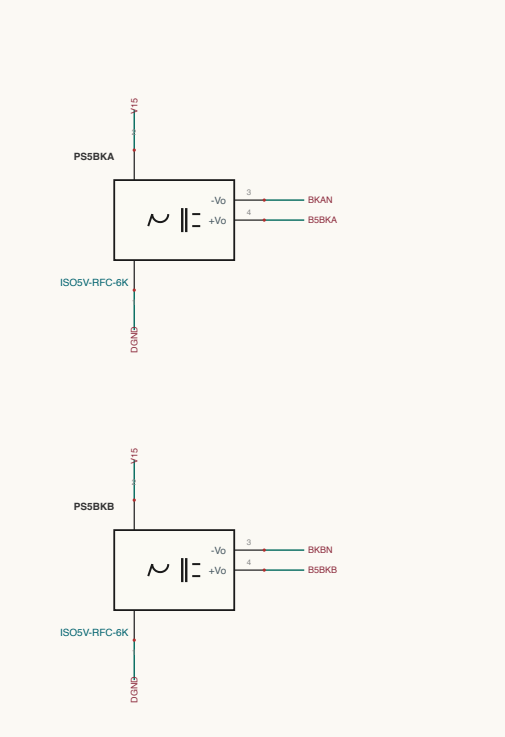

SHEET INDEX

Sheet 1 of 1
OUTPUT-SENSING - 1 modules
BANKS-SP - 1 modules
LLC-LESS - 1 modules
CONTROL - 1 modules
COMMS-HUB - 1 modules
All others are regular design rules.