
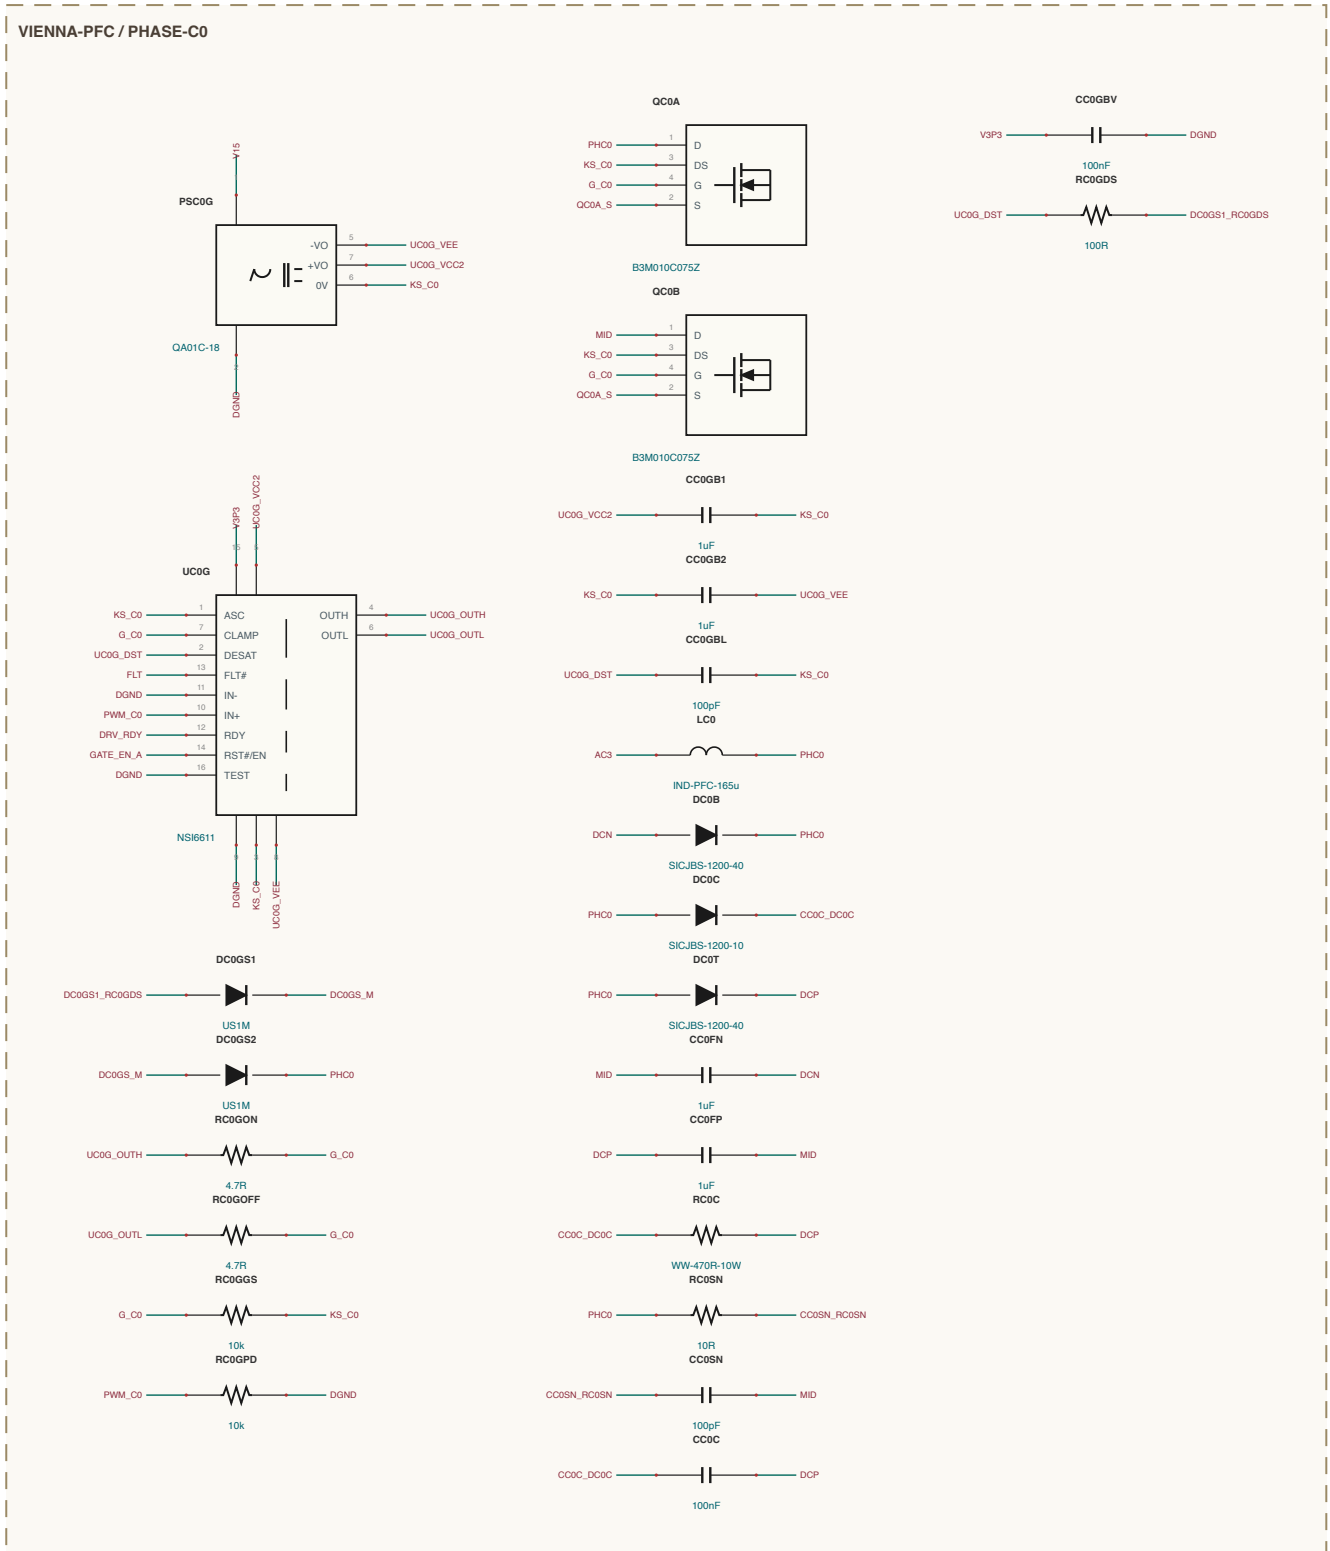
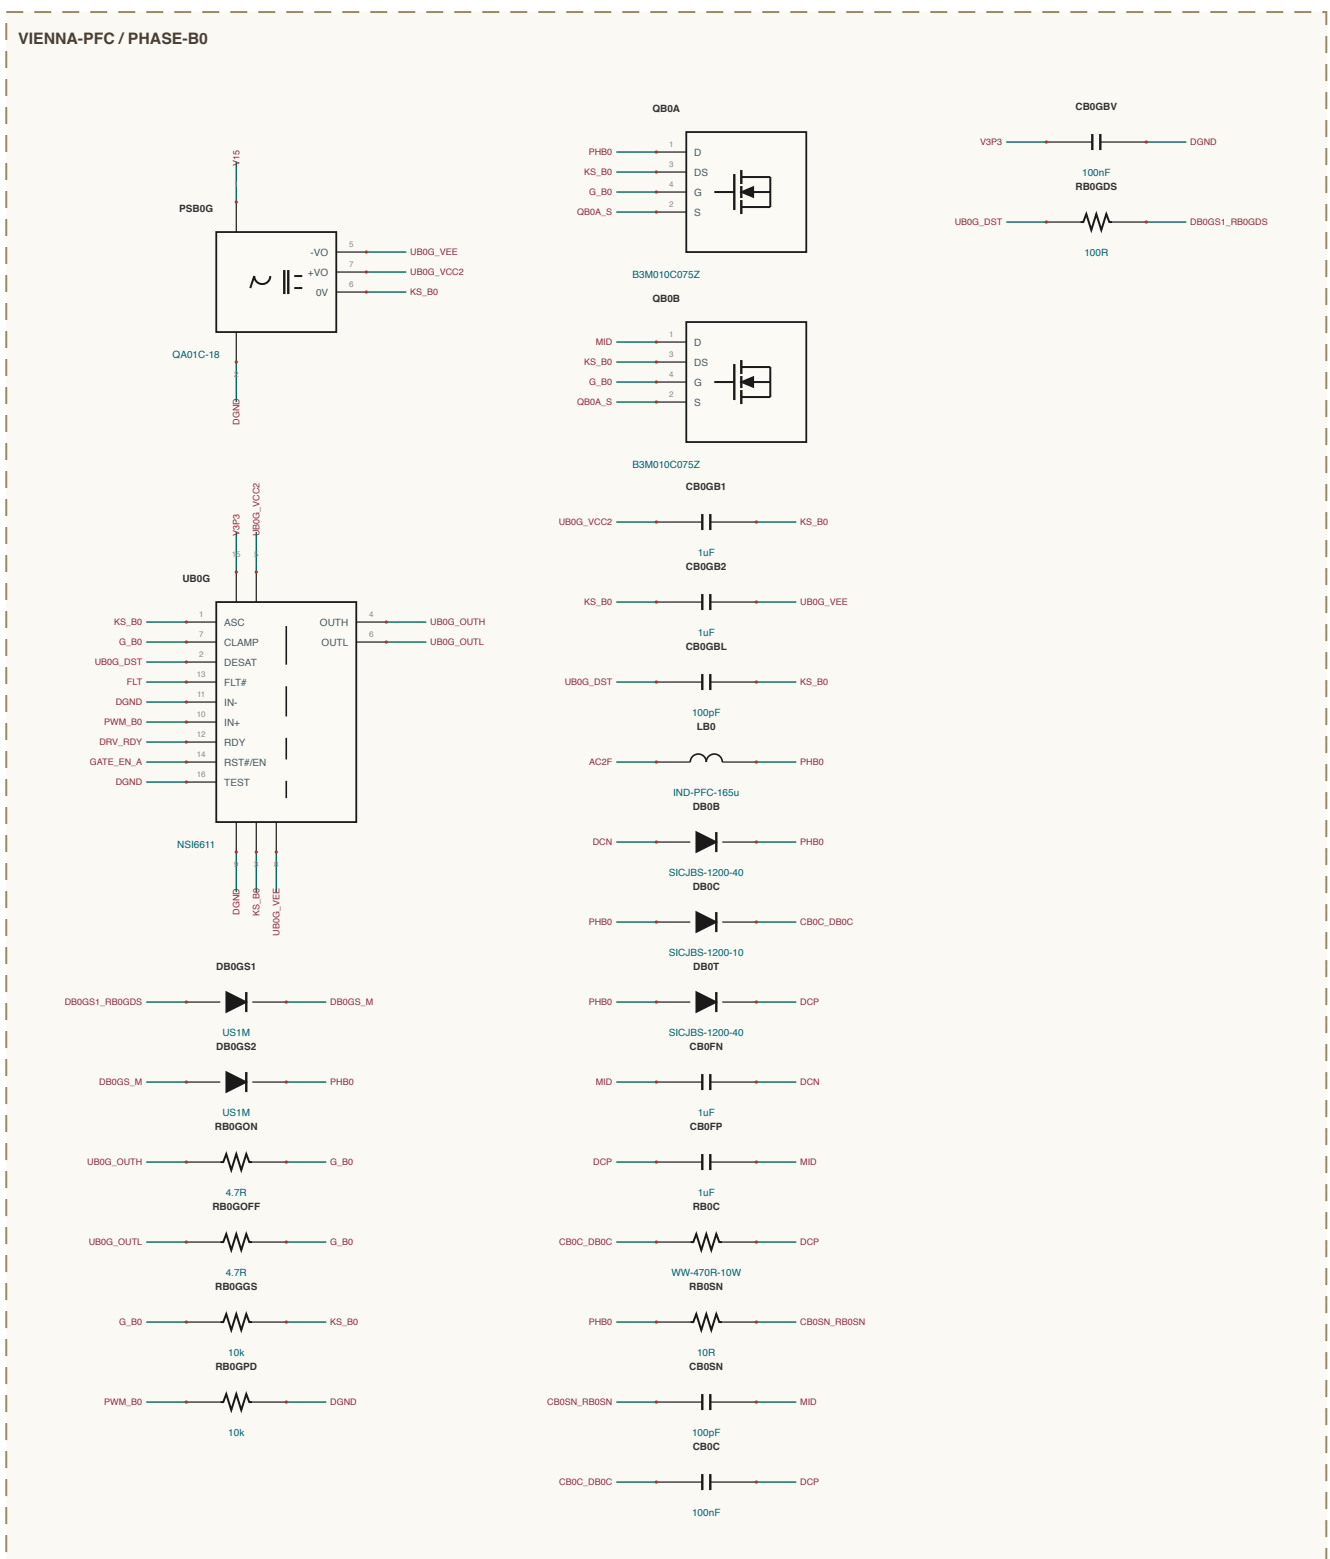
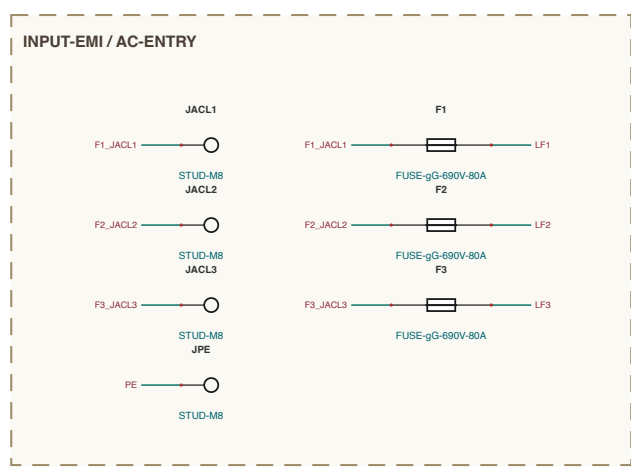
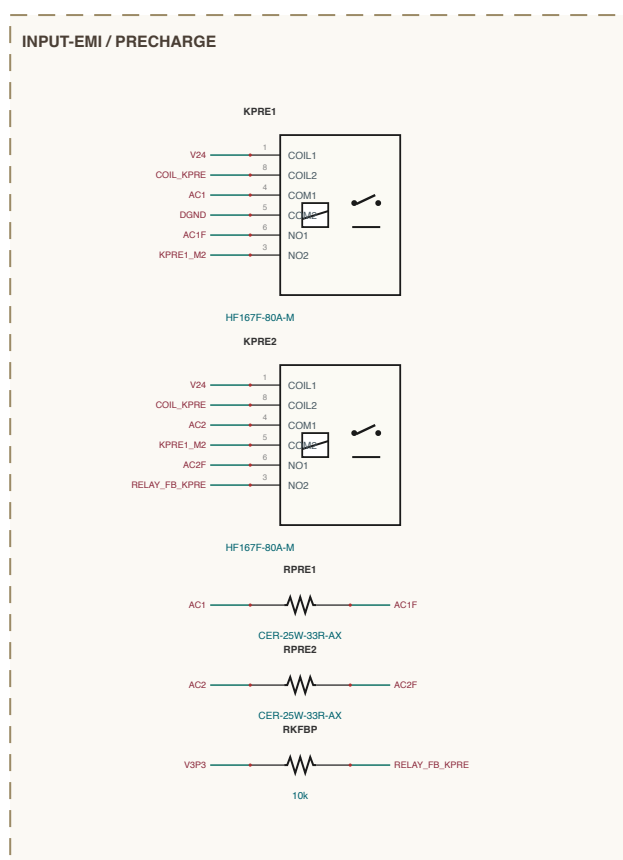
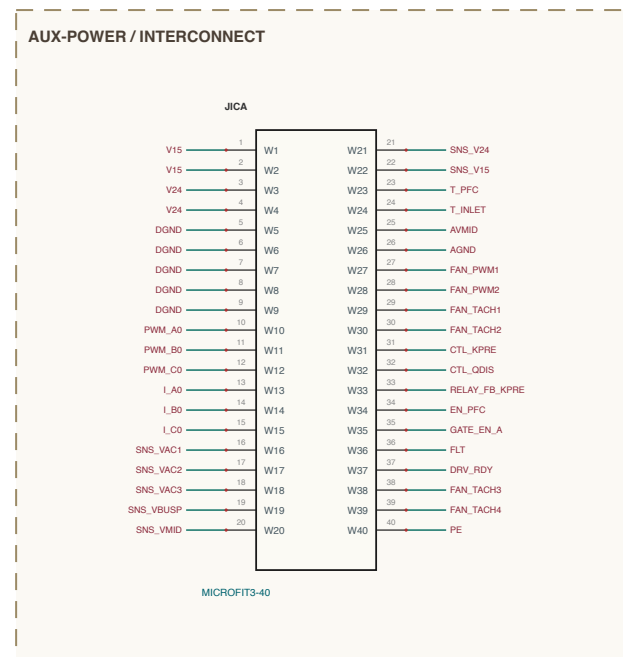
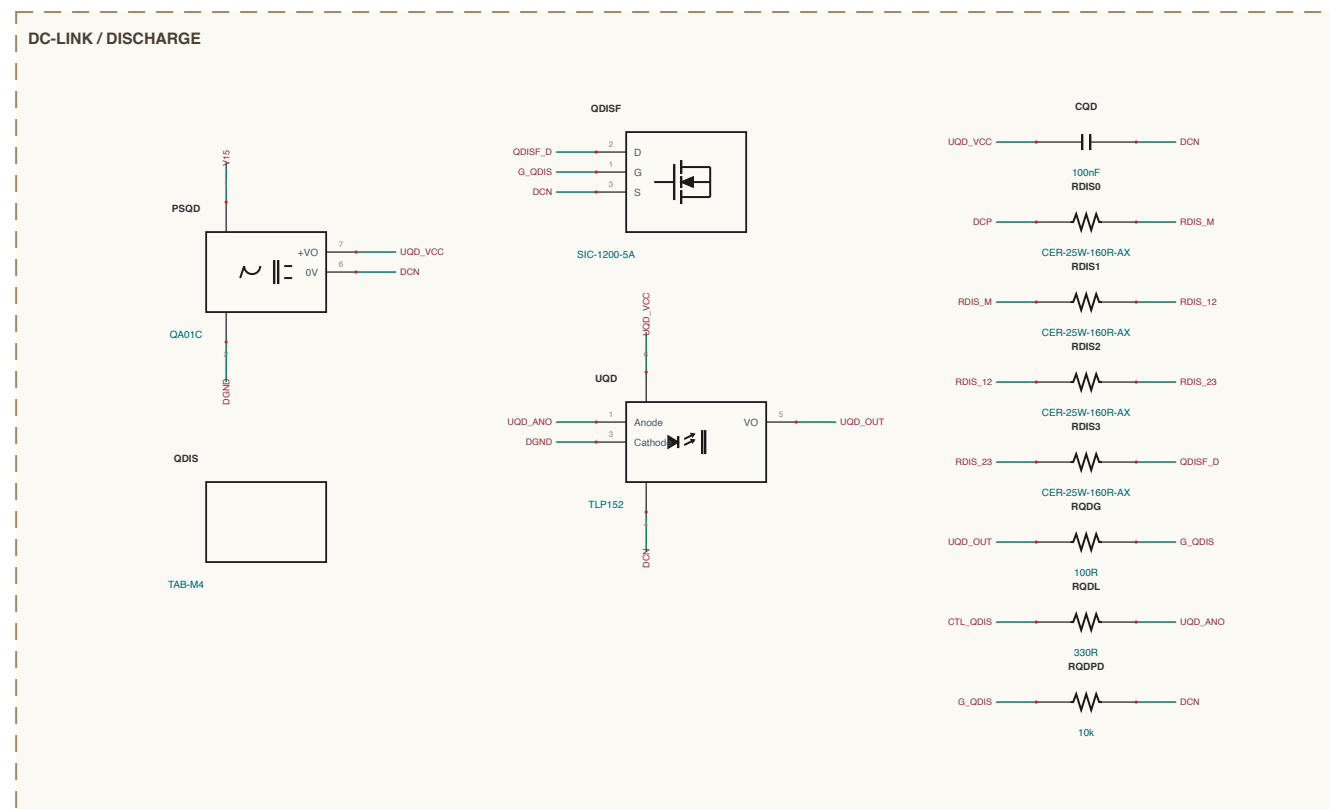
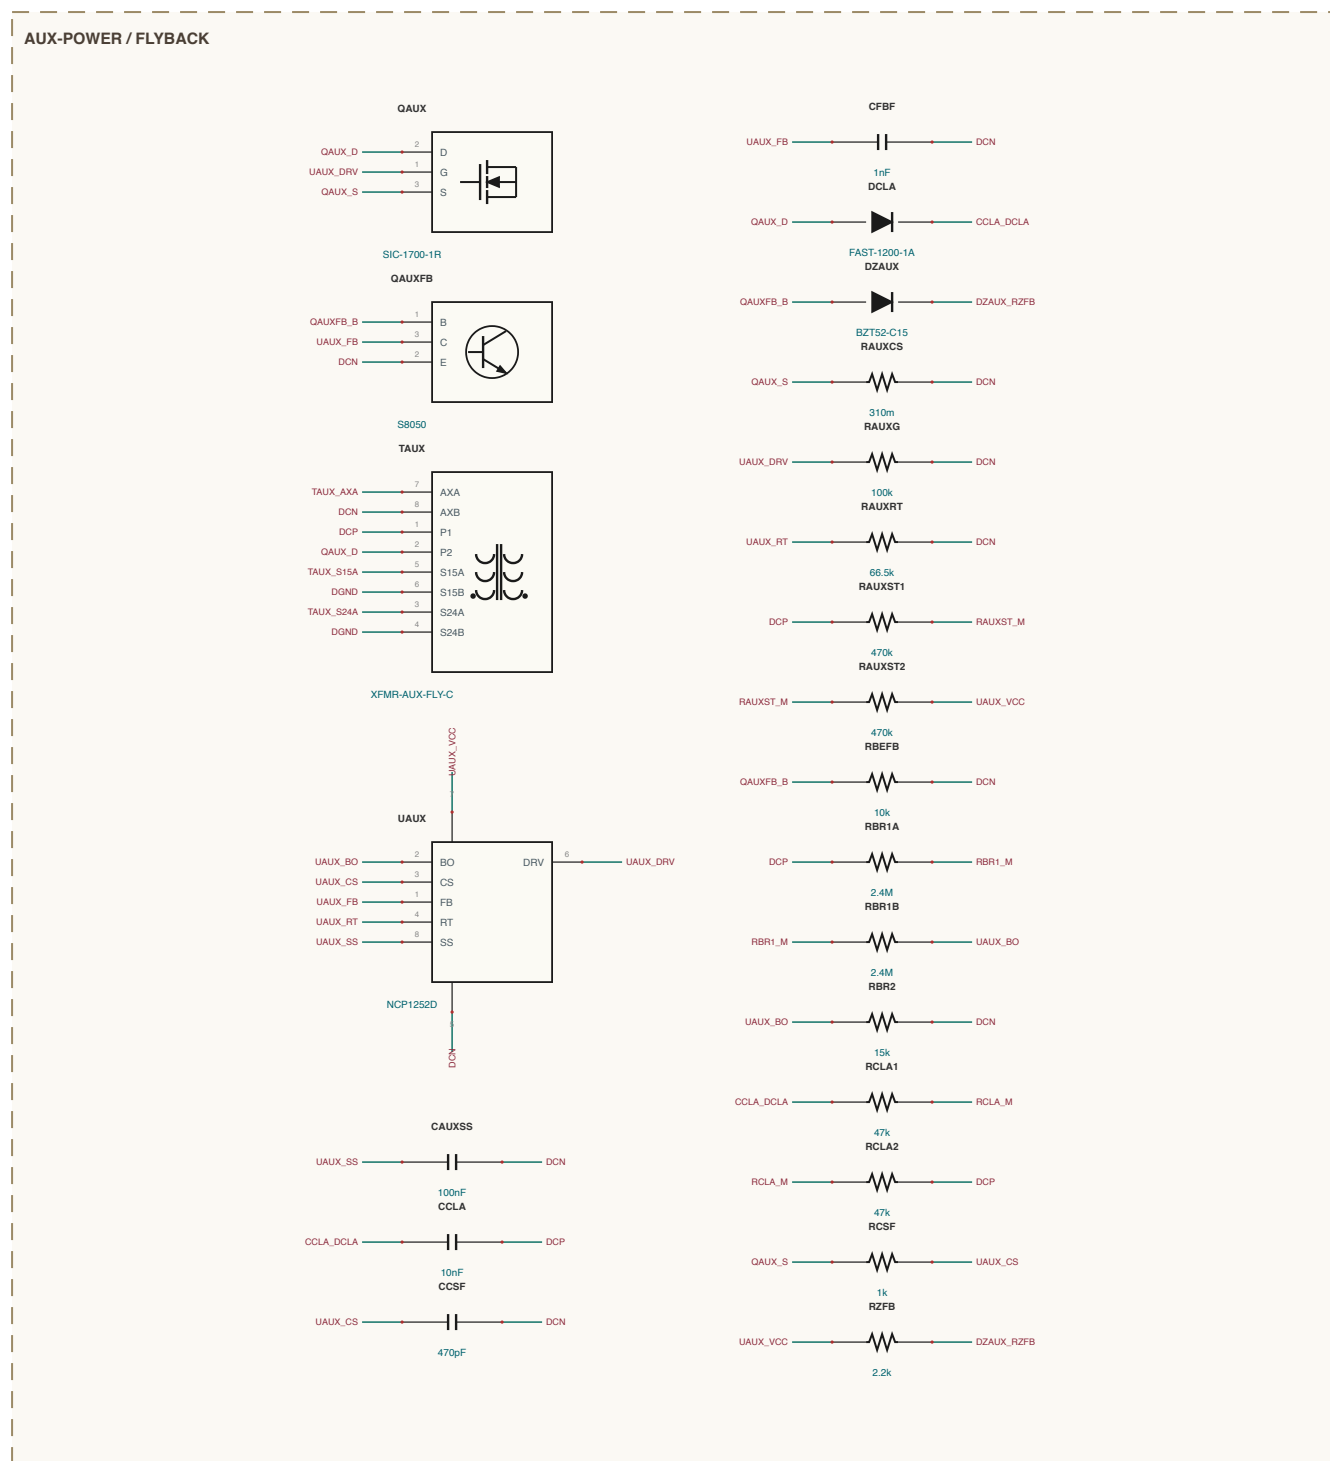
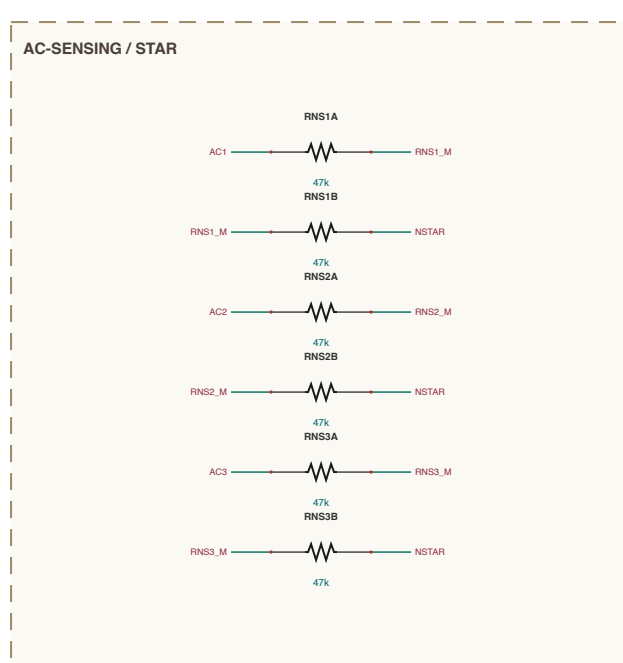
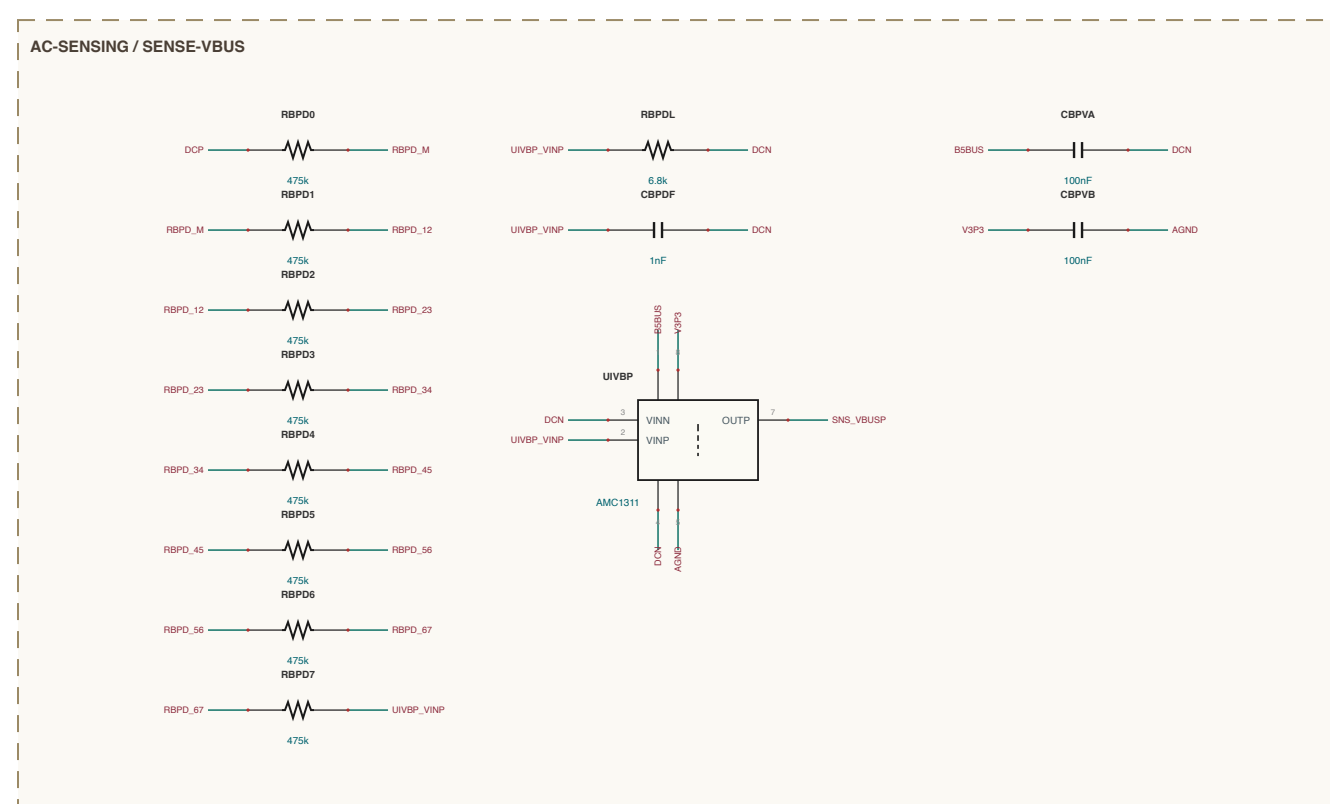
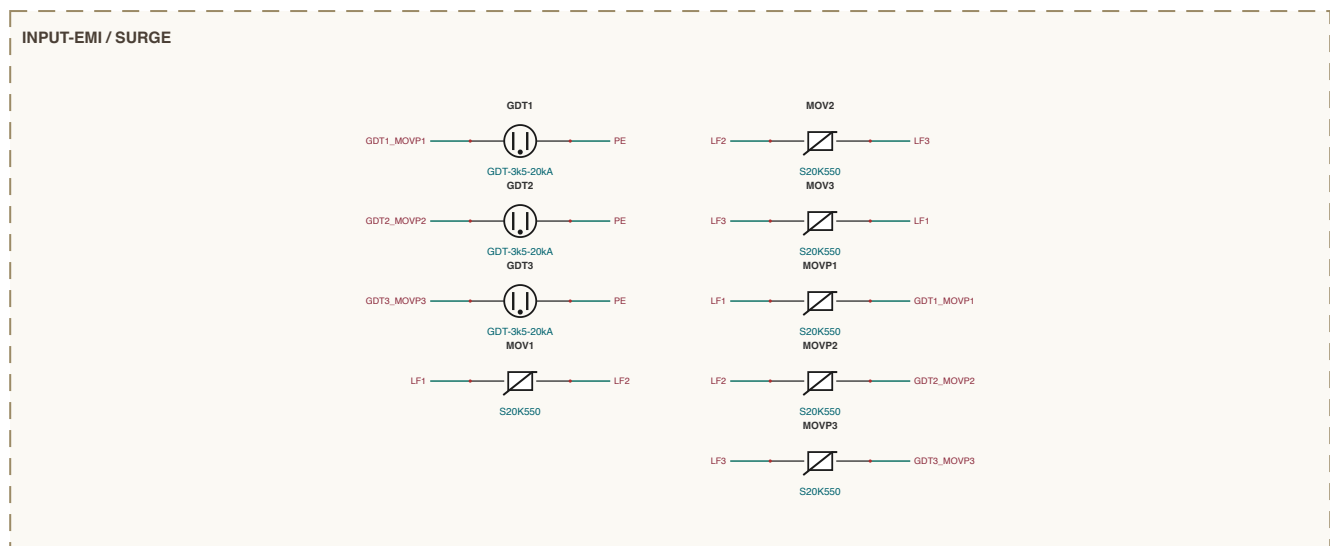
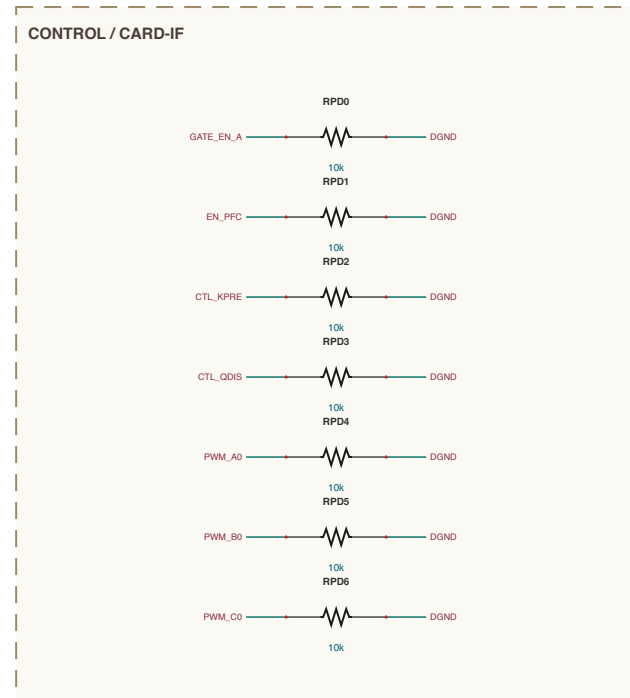
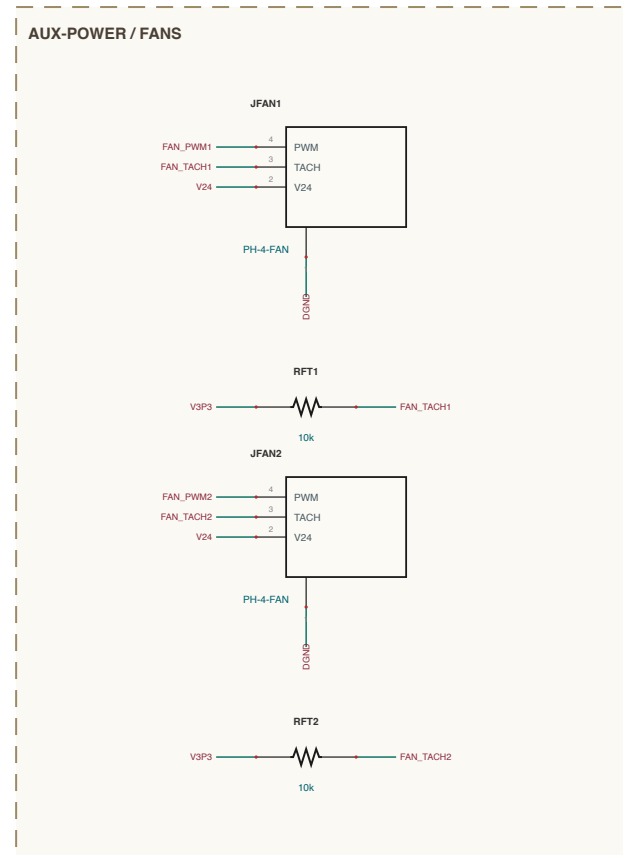
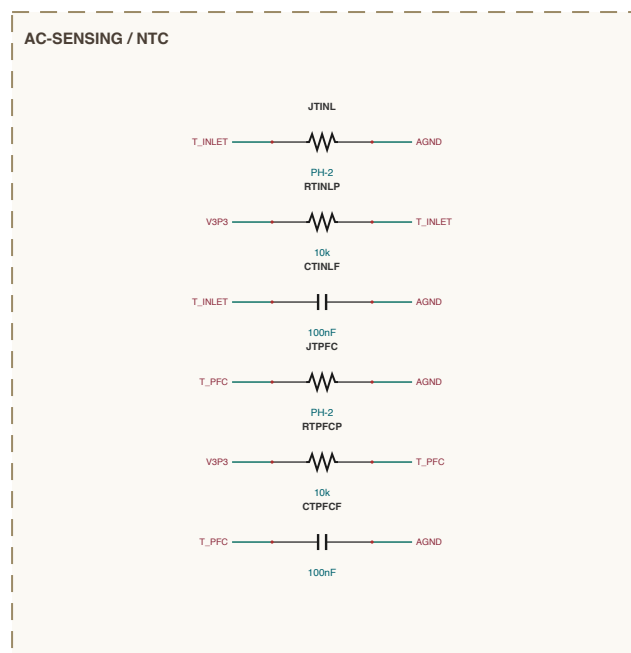
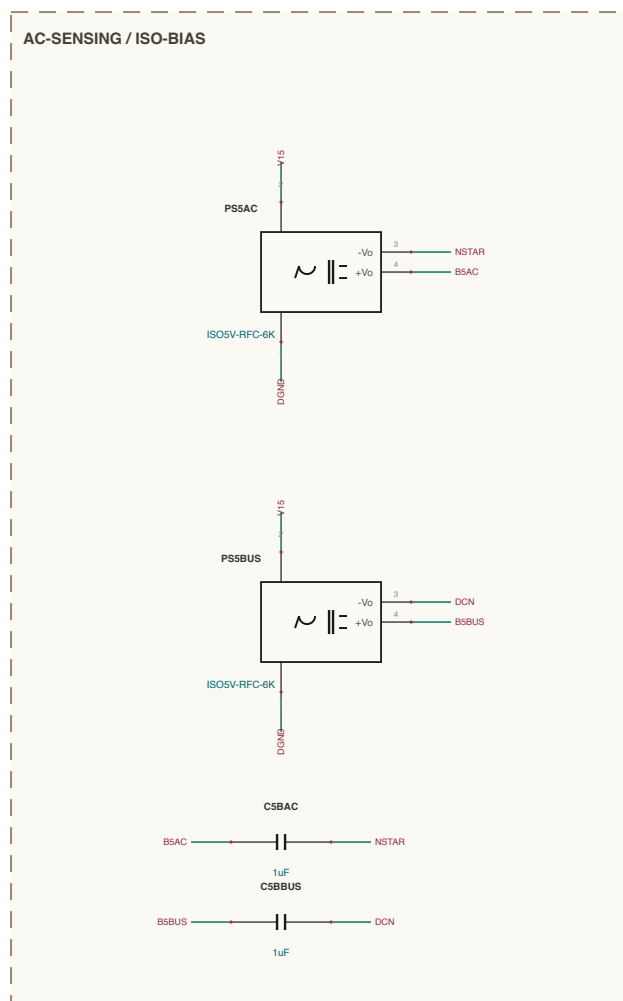
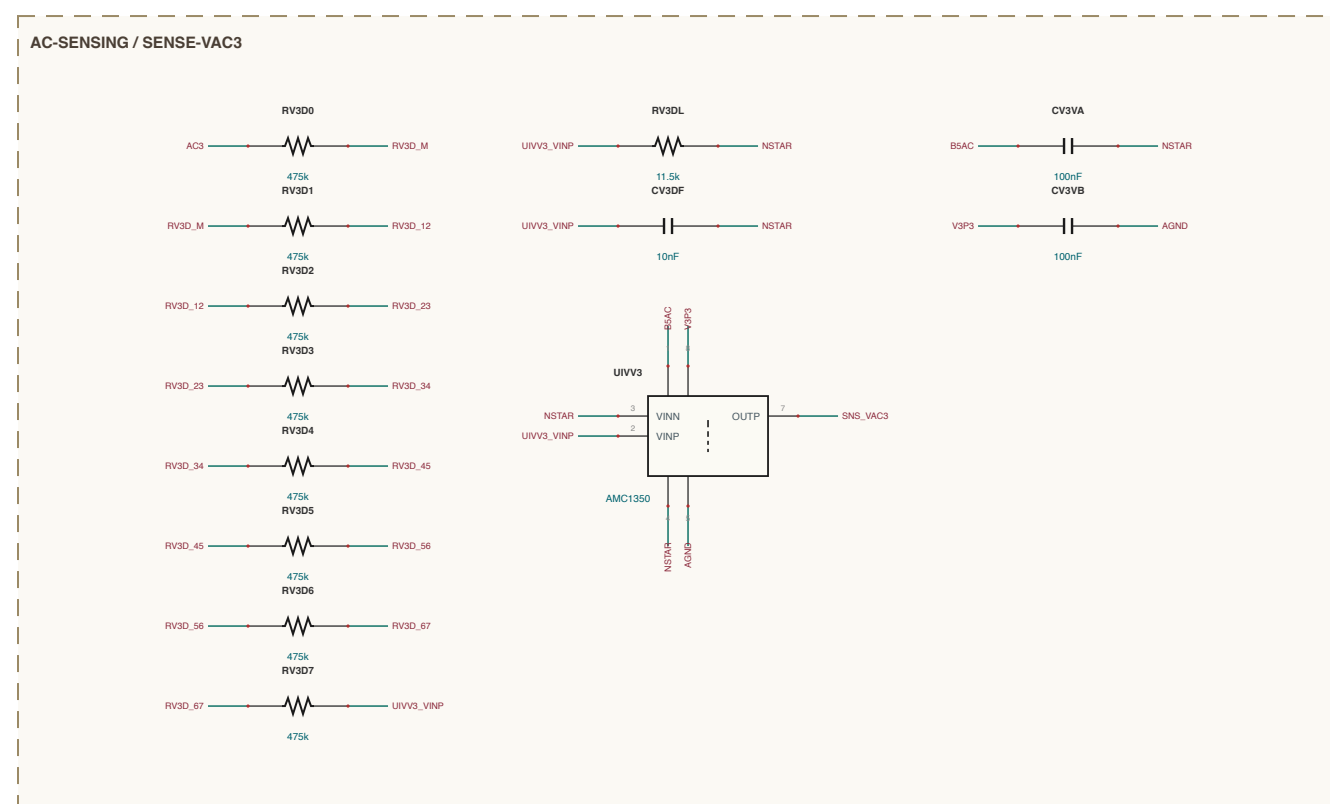
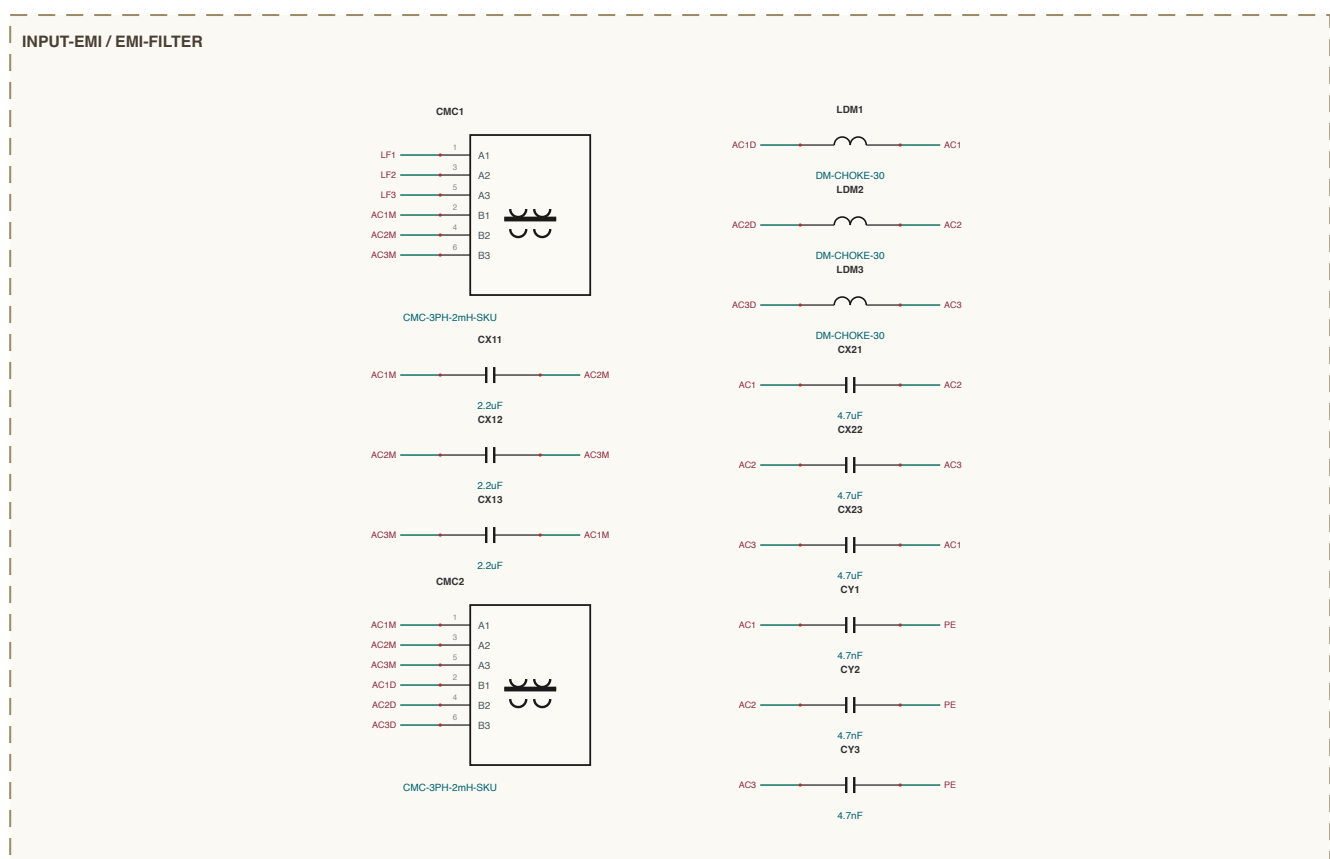
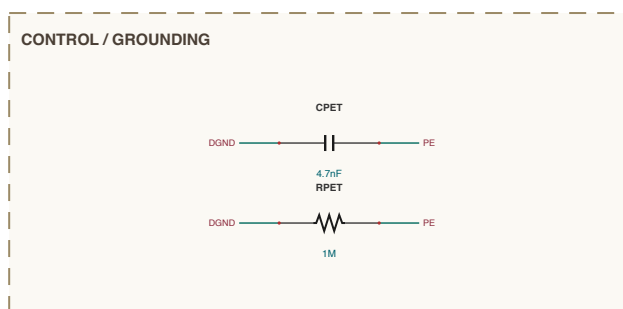
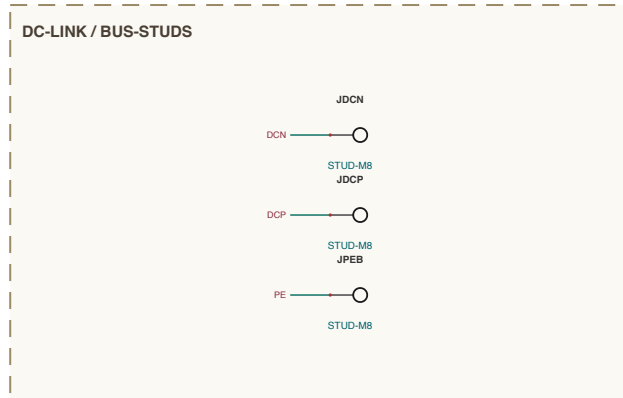
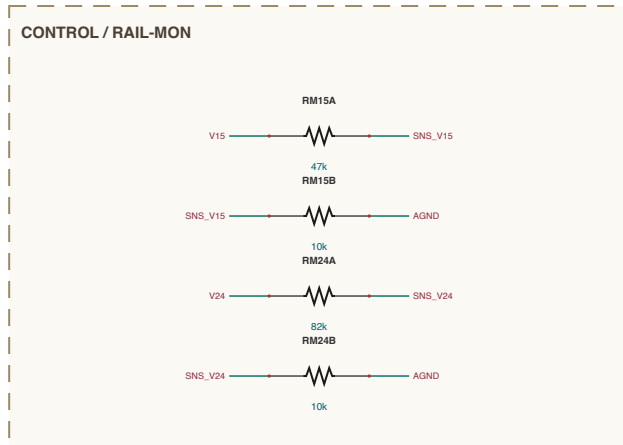
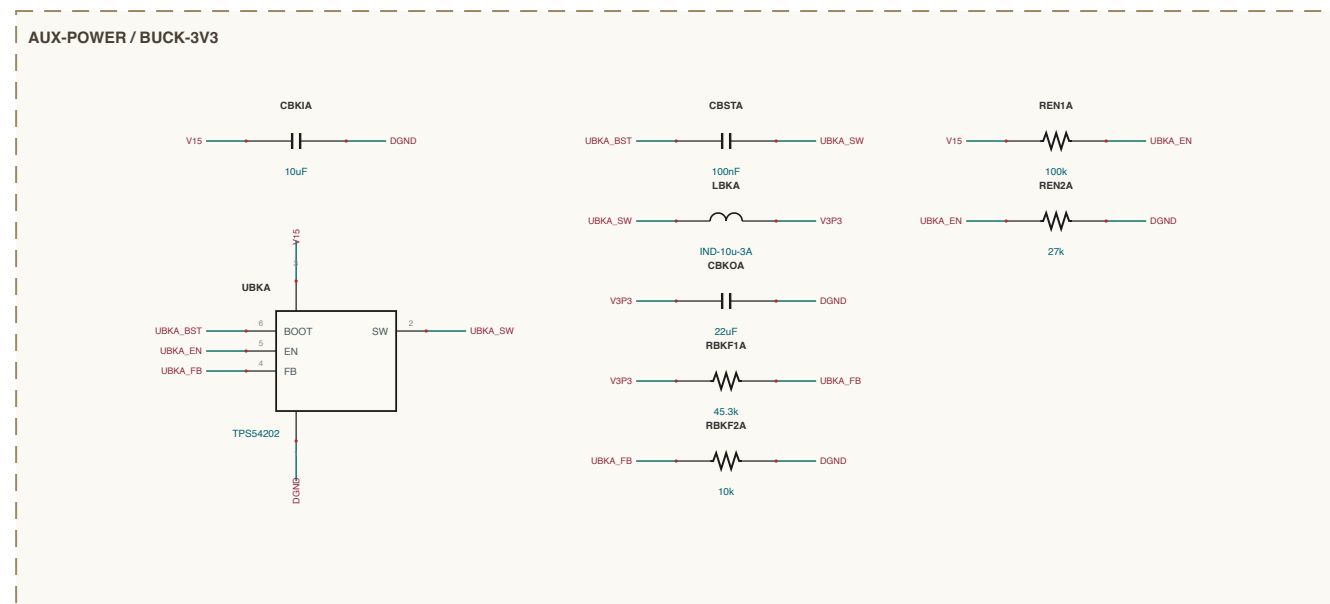
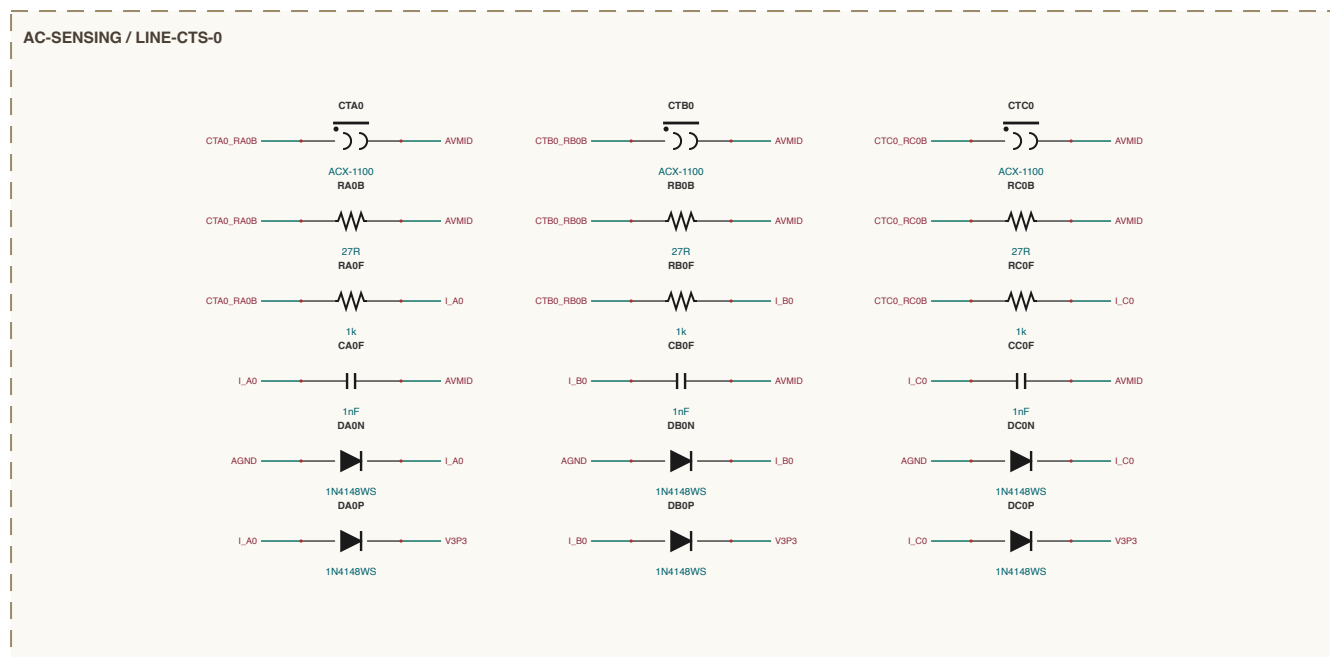
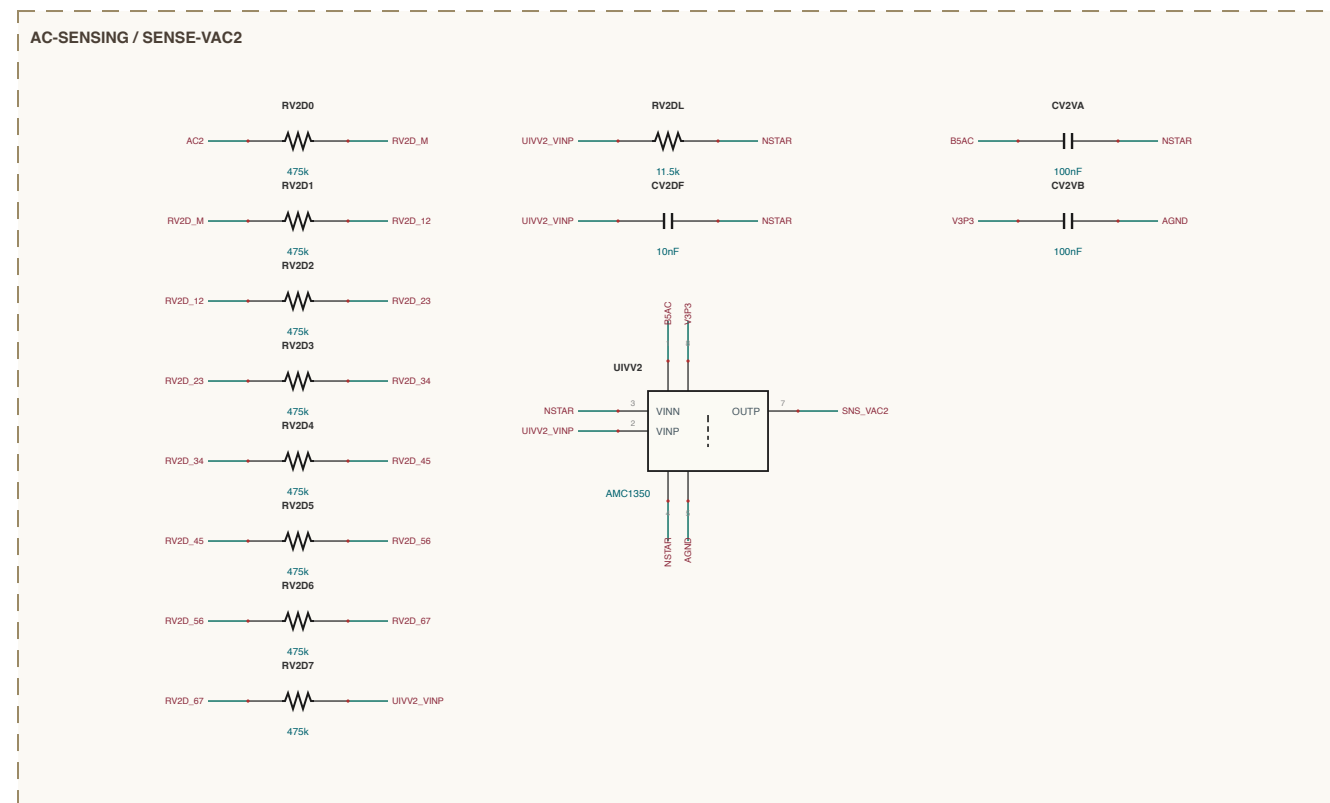
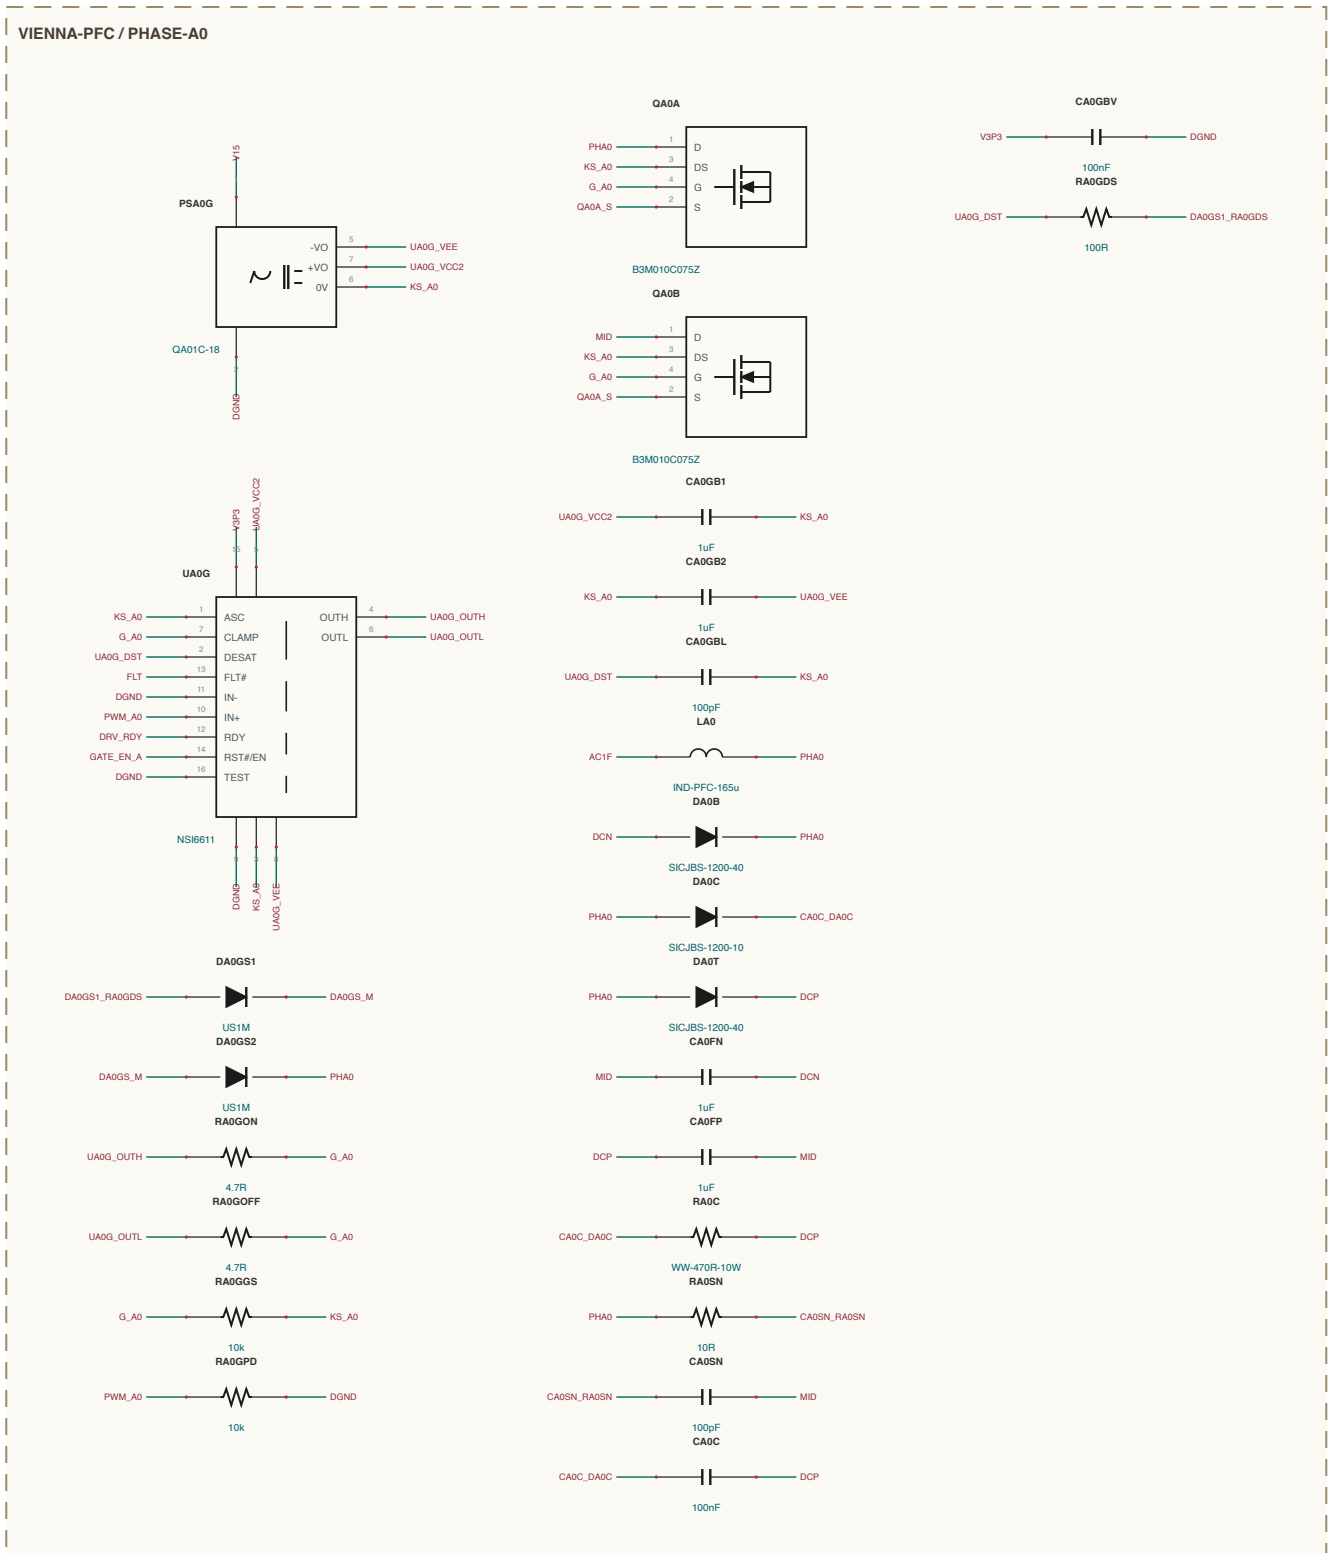
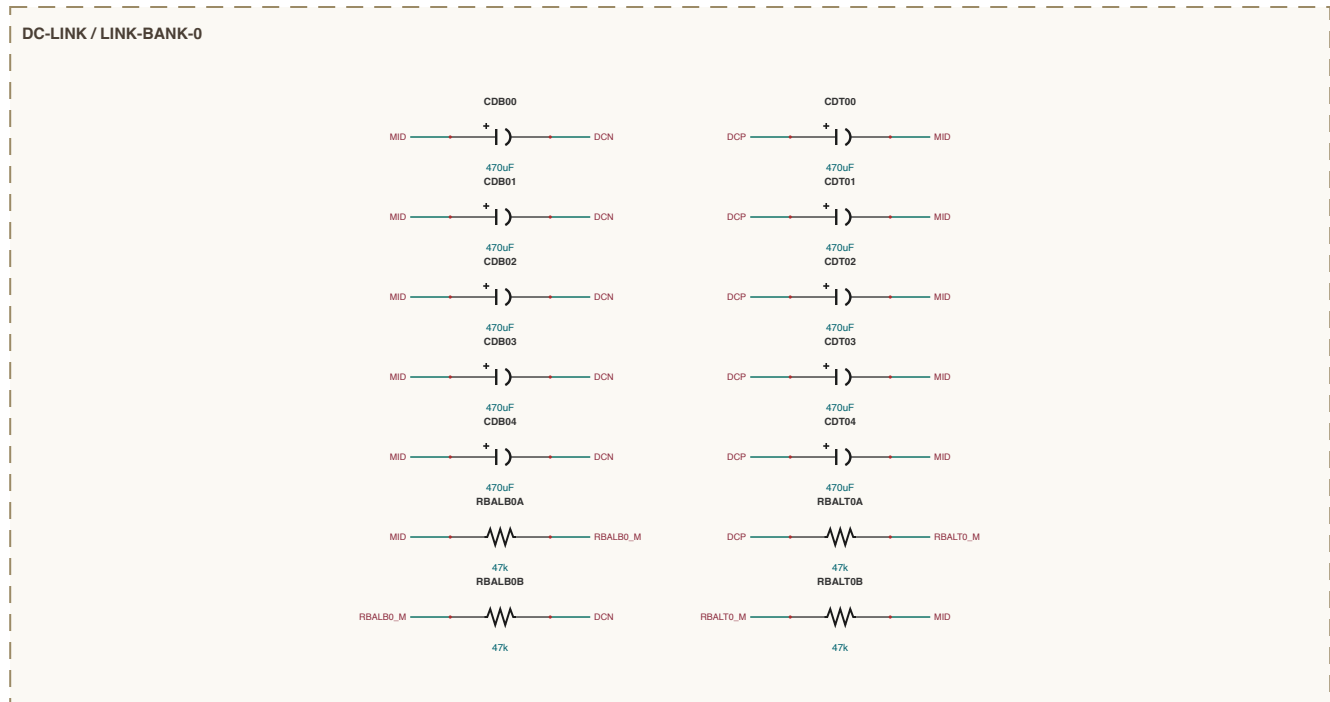
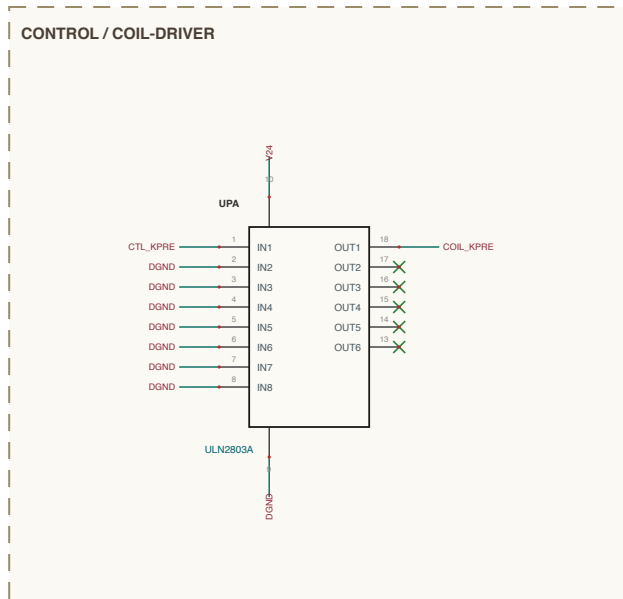
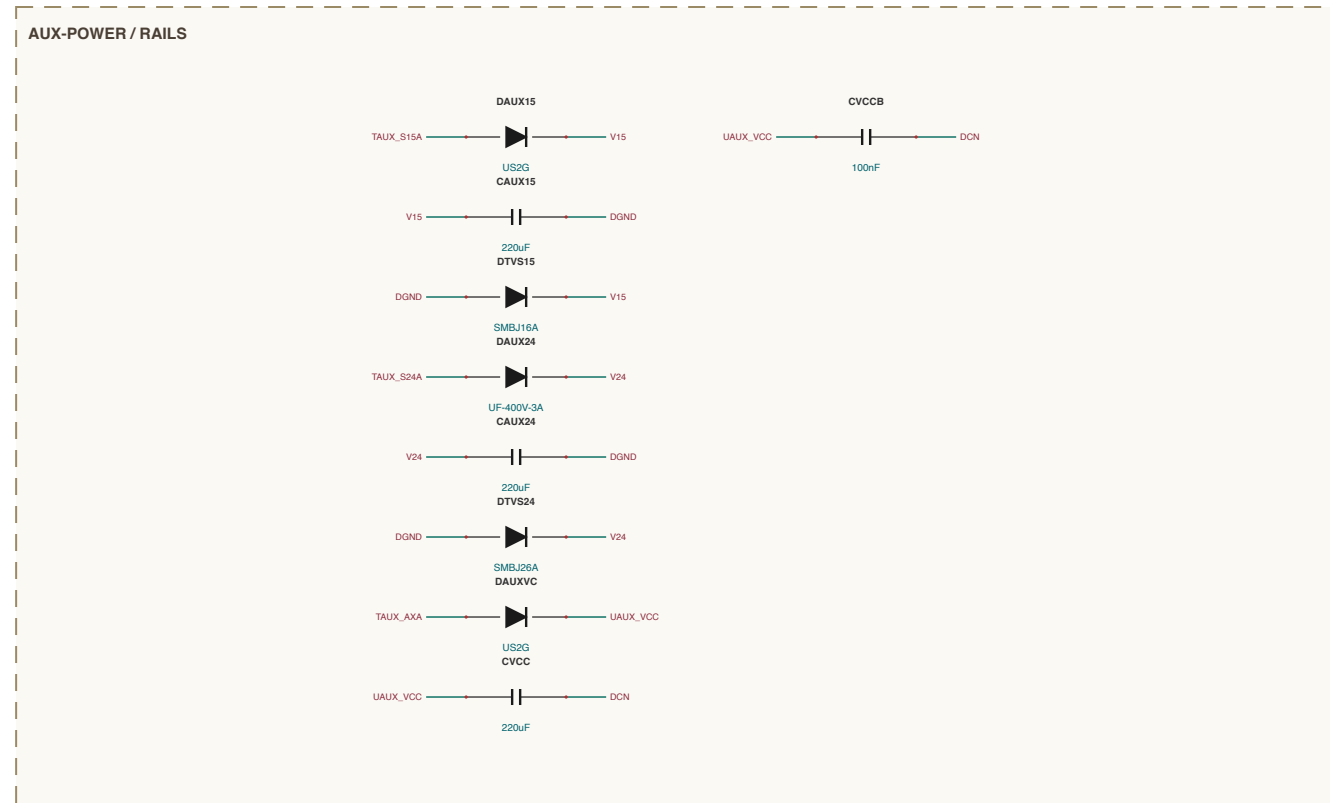
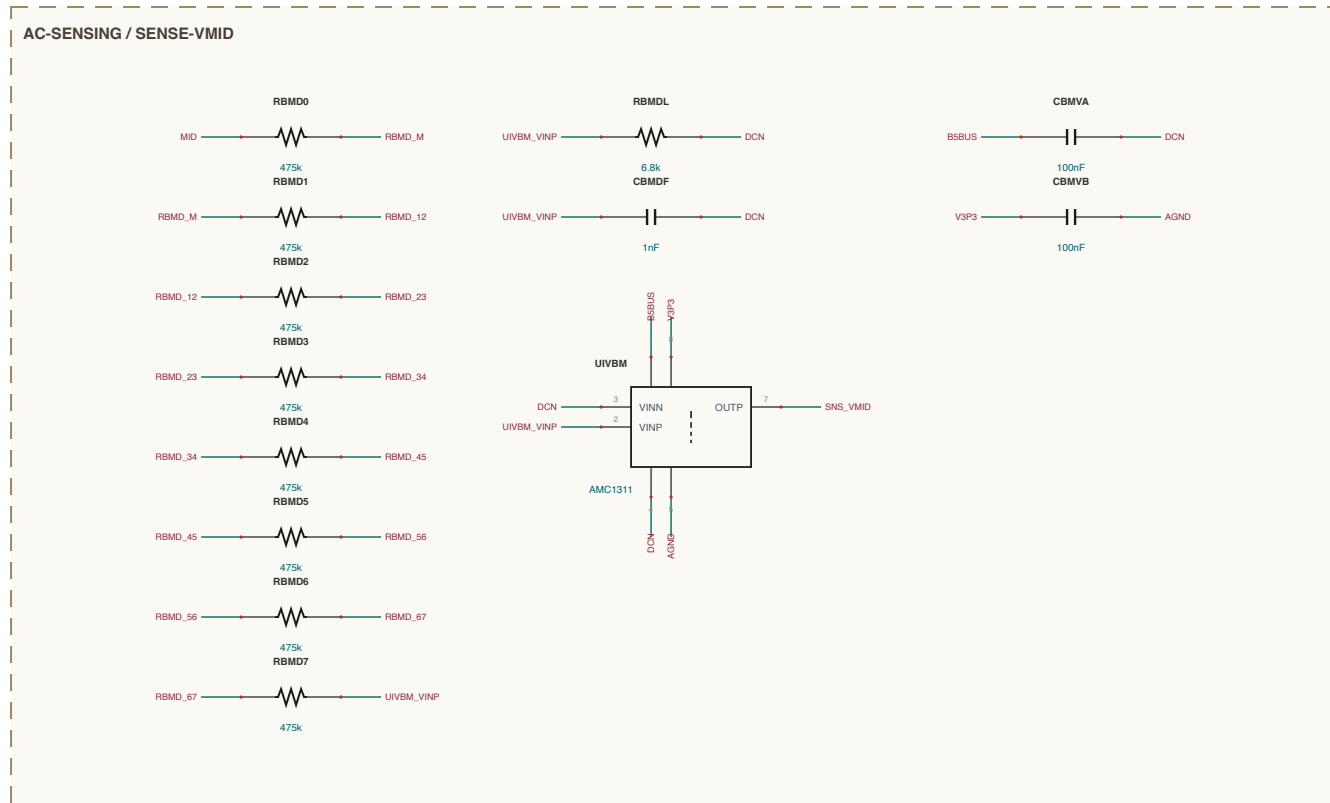


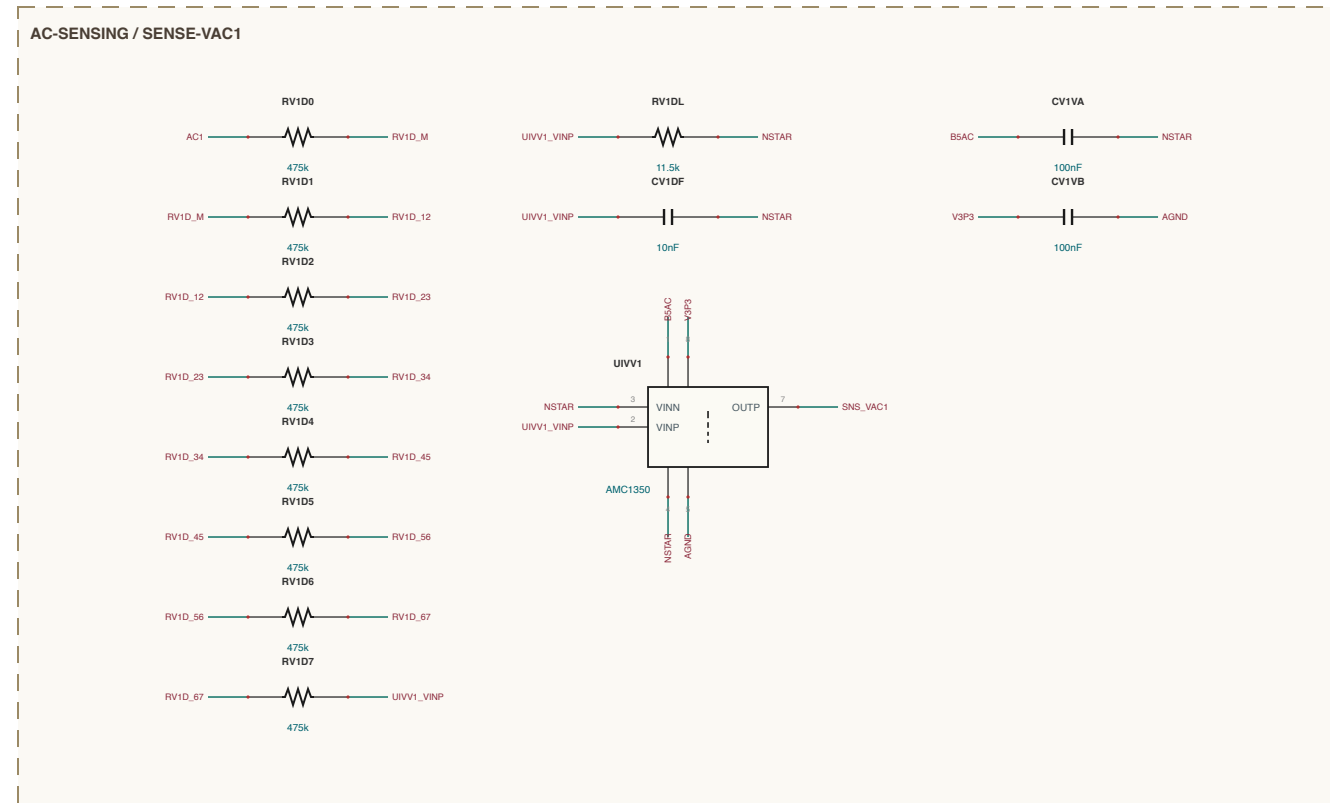

**SHEET INDEX**

1. MAIN AC/DC POWER - 1 of 3

2.

3. AC-DC/DCS - 9 sections

4.

5. AUX POWER - 5 sections

6.

7. CONTROL - 4 sections

8.

9. RPA/VIDEO - 4 sections

10.

11. SIGNAL - 3 sections

12.

13. WEAR/PTC - 3 sections

14.

15.

16. DLA - 38 sections - 288 components

## NET NAMING

internal junctions are named for what they join

Length\_0Pin node at that IC pin e.g. U10C4\_V18P

Resistor\_R6 output of a source pair e.g. R6A6\_CIN\_H

Resistor\_vccin tap between Resistorvccin e.g. R1F1D\_01

all others are explicit design nets

## MAGNETICS CONSTRUCTION

density per dose/charge/area and Burn, gas, fill, acceptance (break free limit)

1 LAD:LO: 3n 80776847 Kc000b, Ne03 (u' 1n 91n), S010170m) (break = 1.0 180u, u=70u) 002A pu (BASED value given per/step/ release)

LO001-2 to 118 00u, Ne0, 00 00000 = 7 00u (00u' 7 00u)

and L1 = 91n + measured after leakage (this COMPENSATE leakage spread); Or at TASK sections