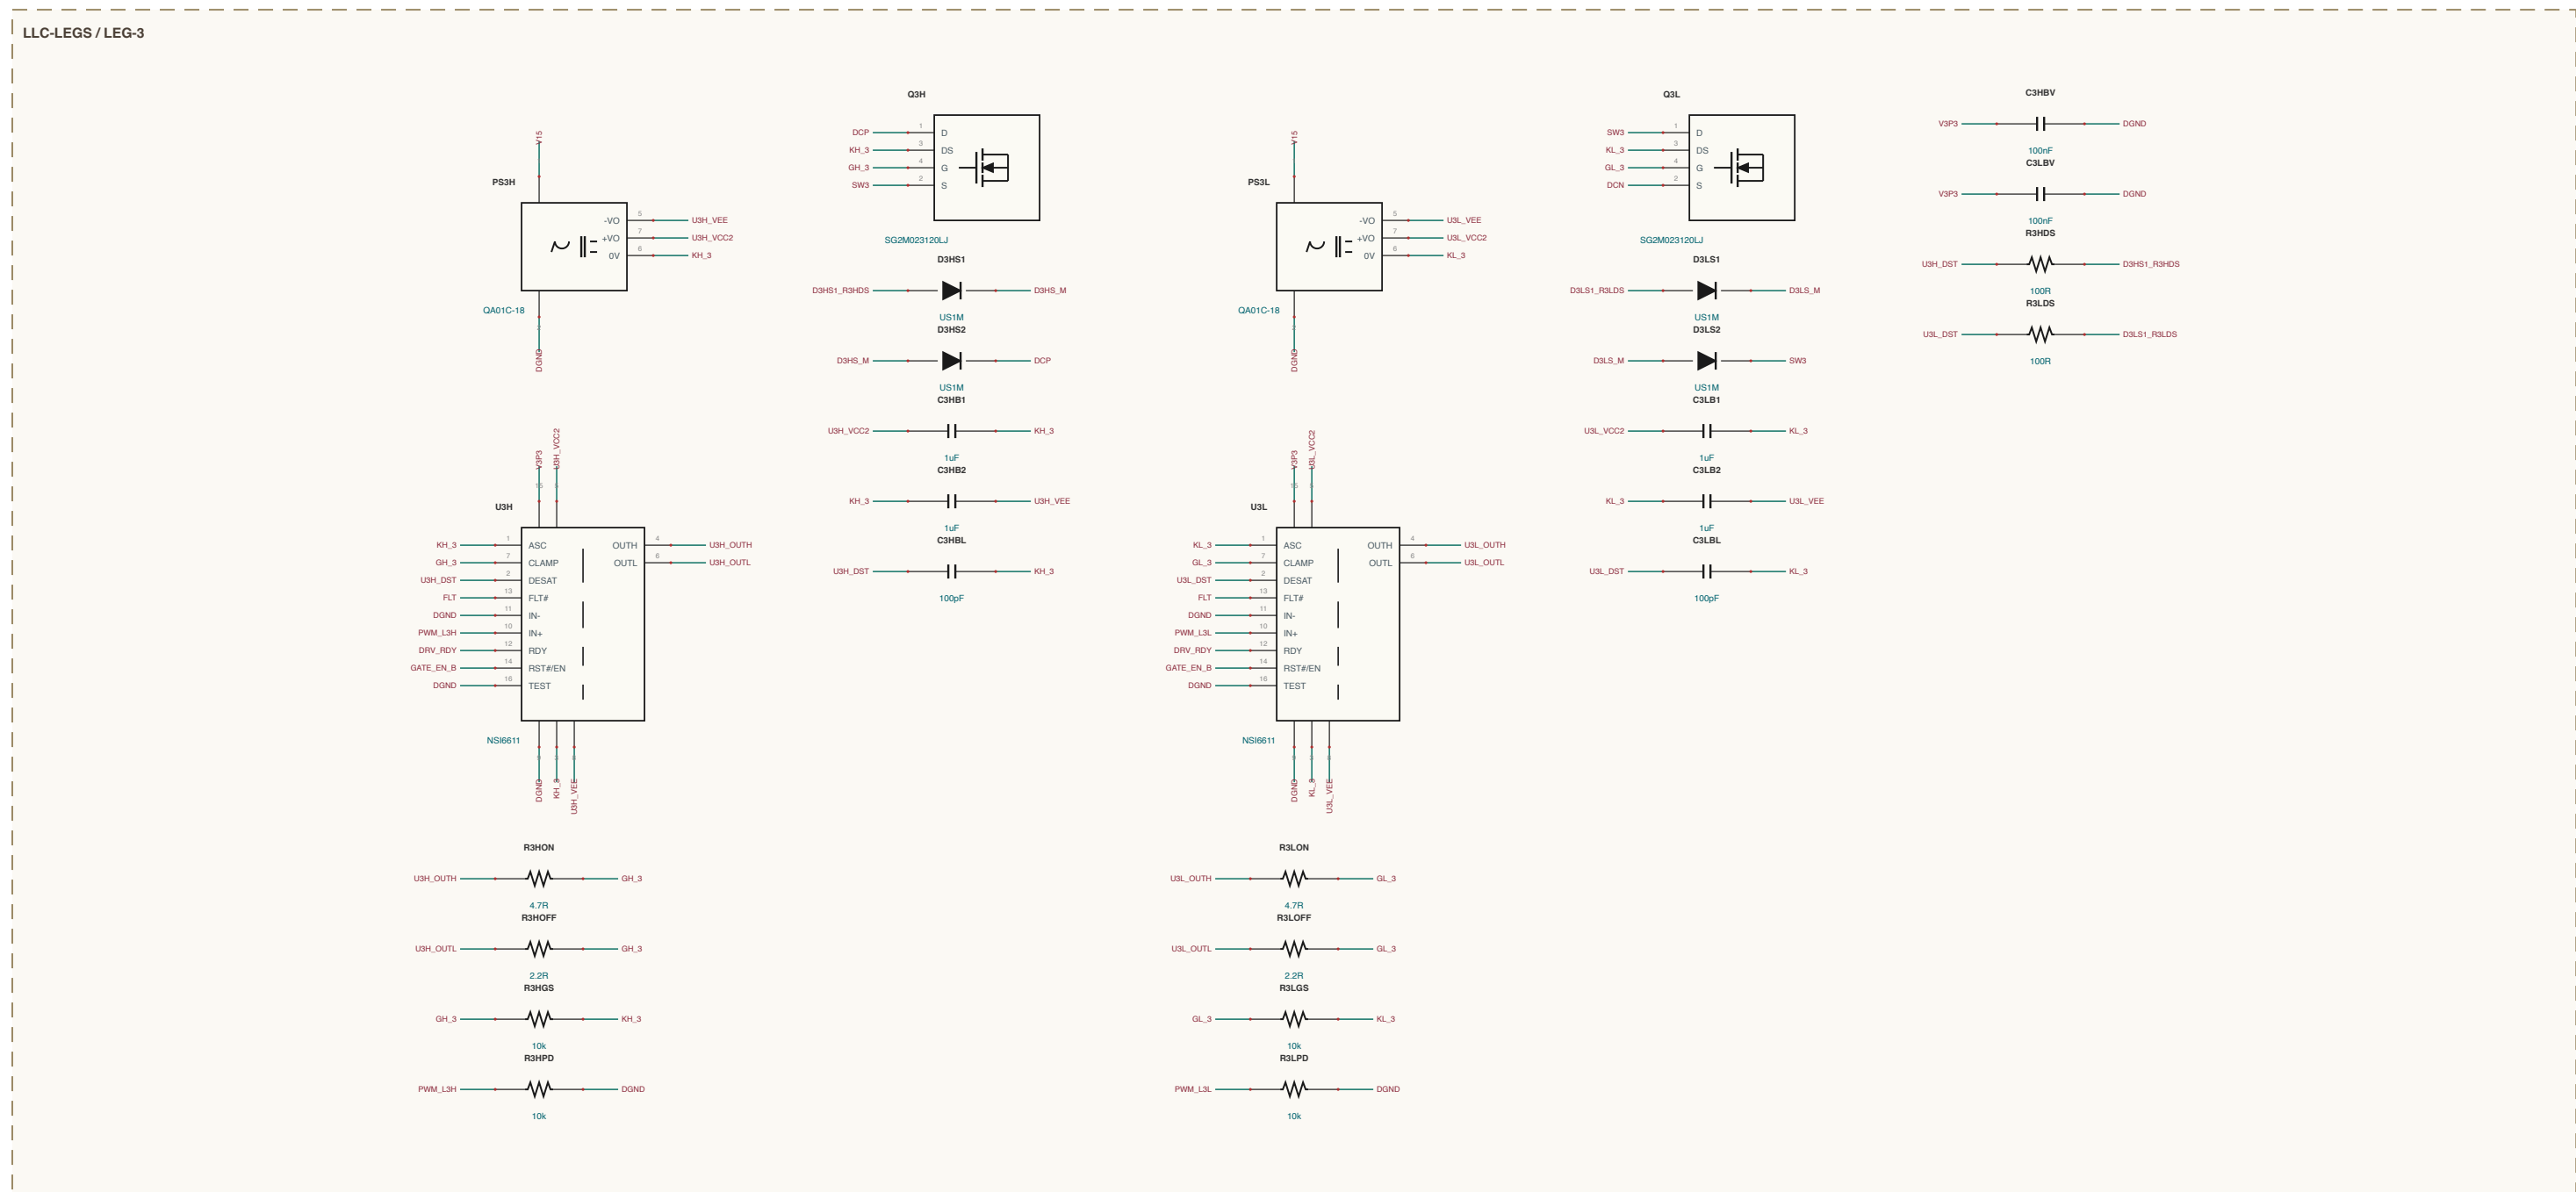
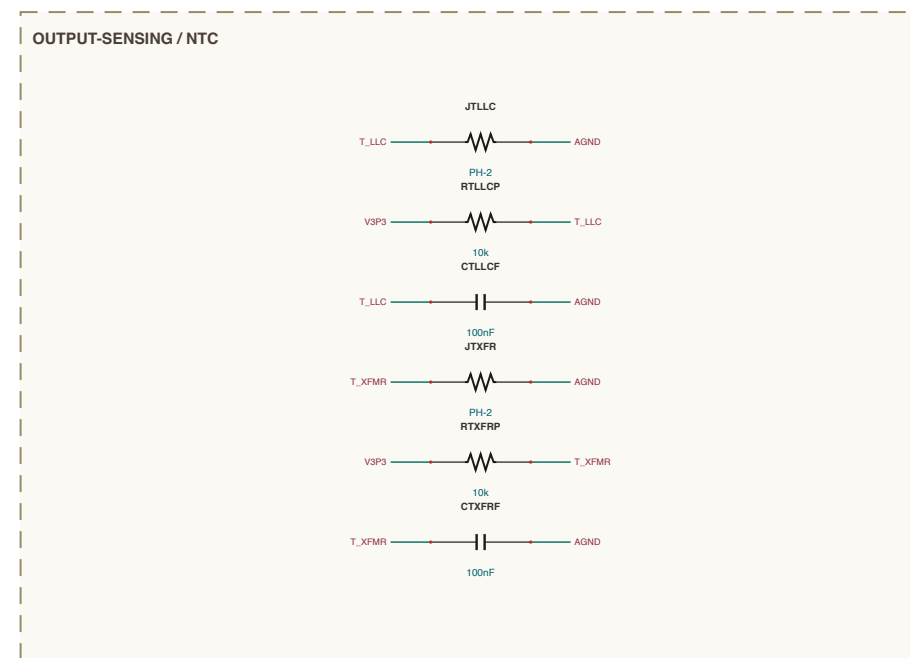
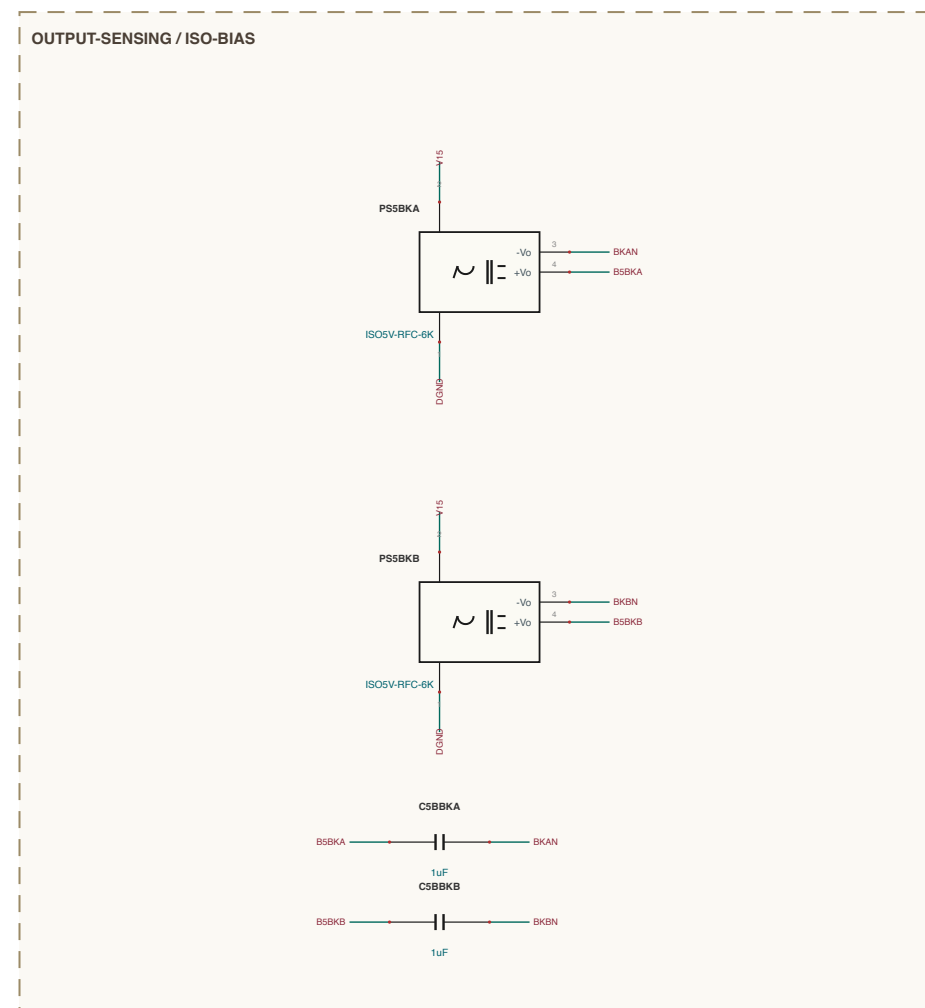
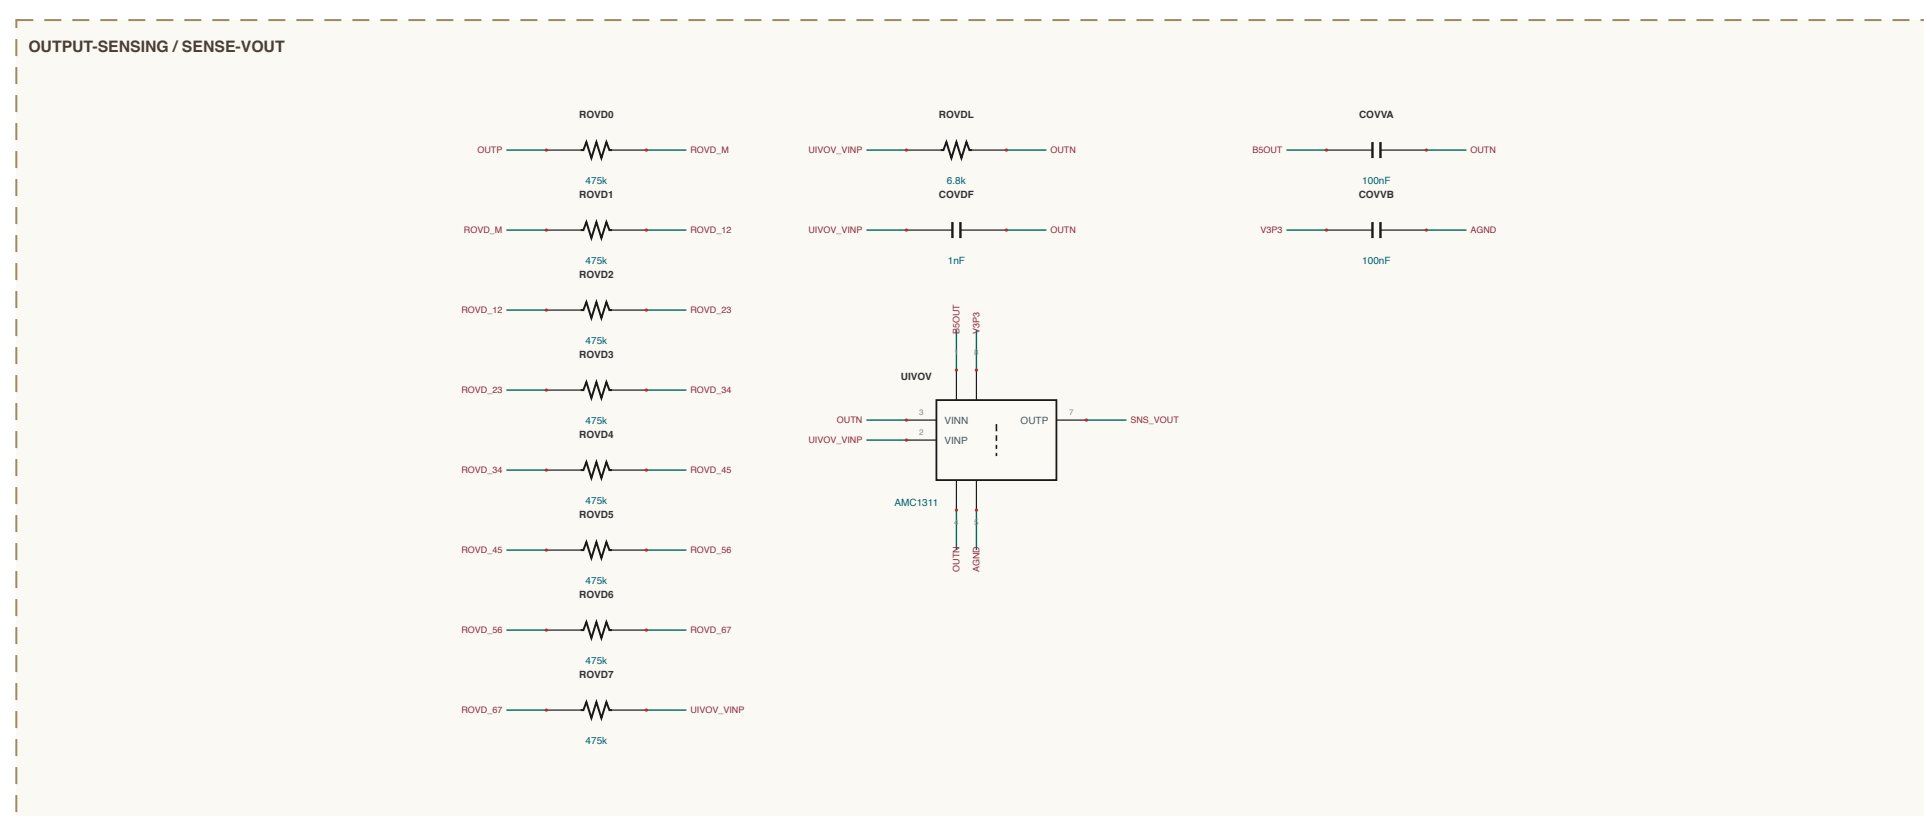
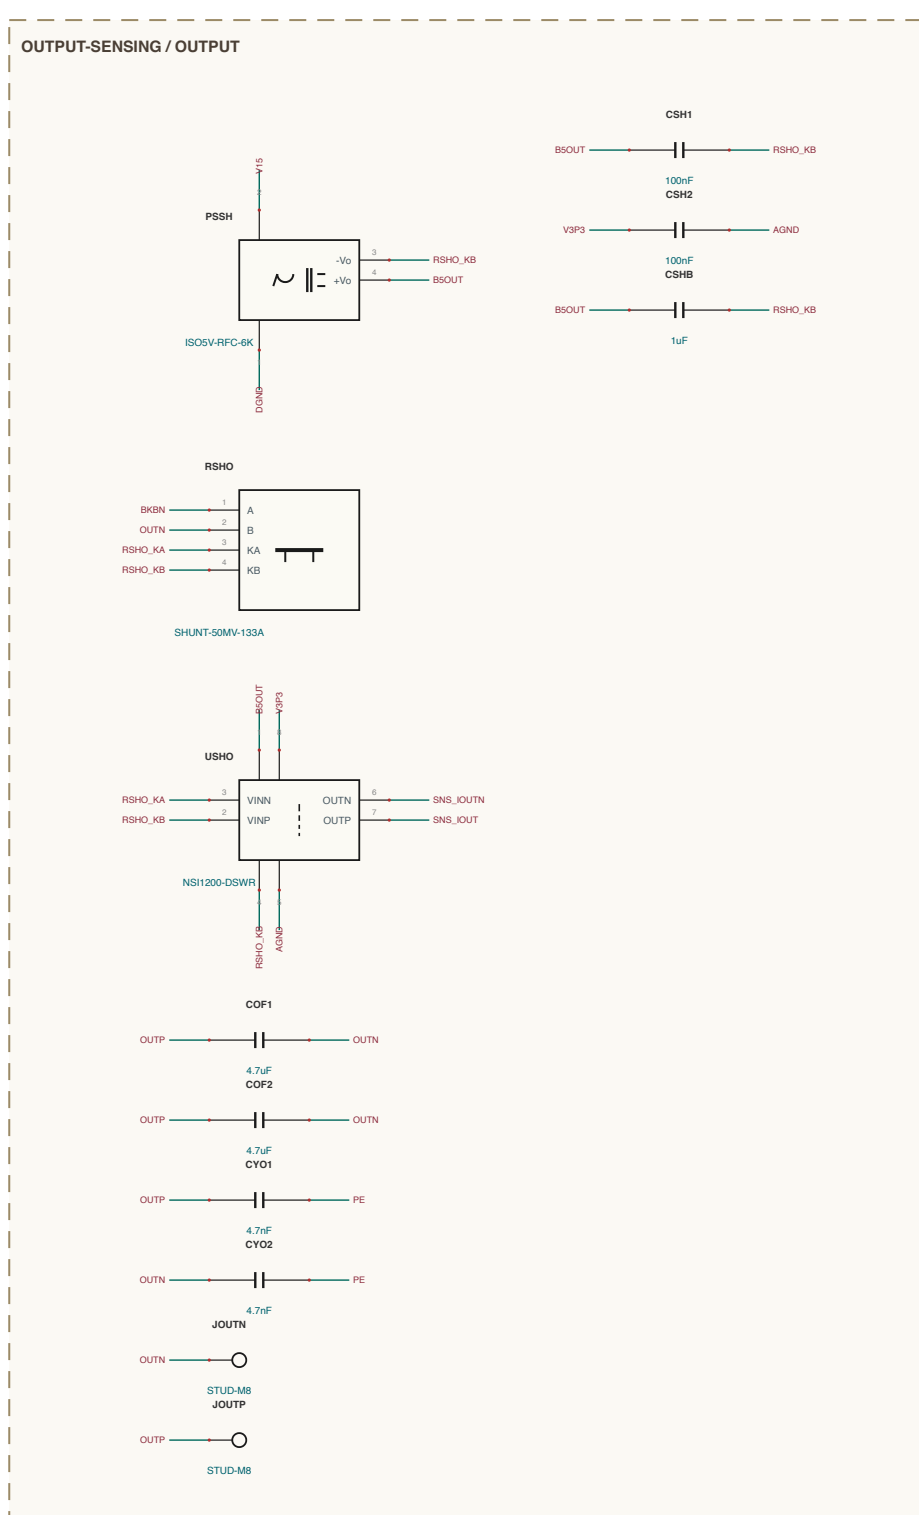
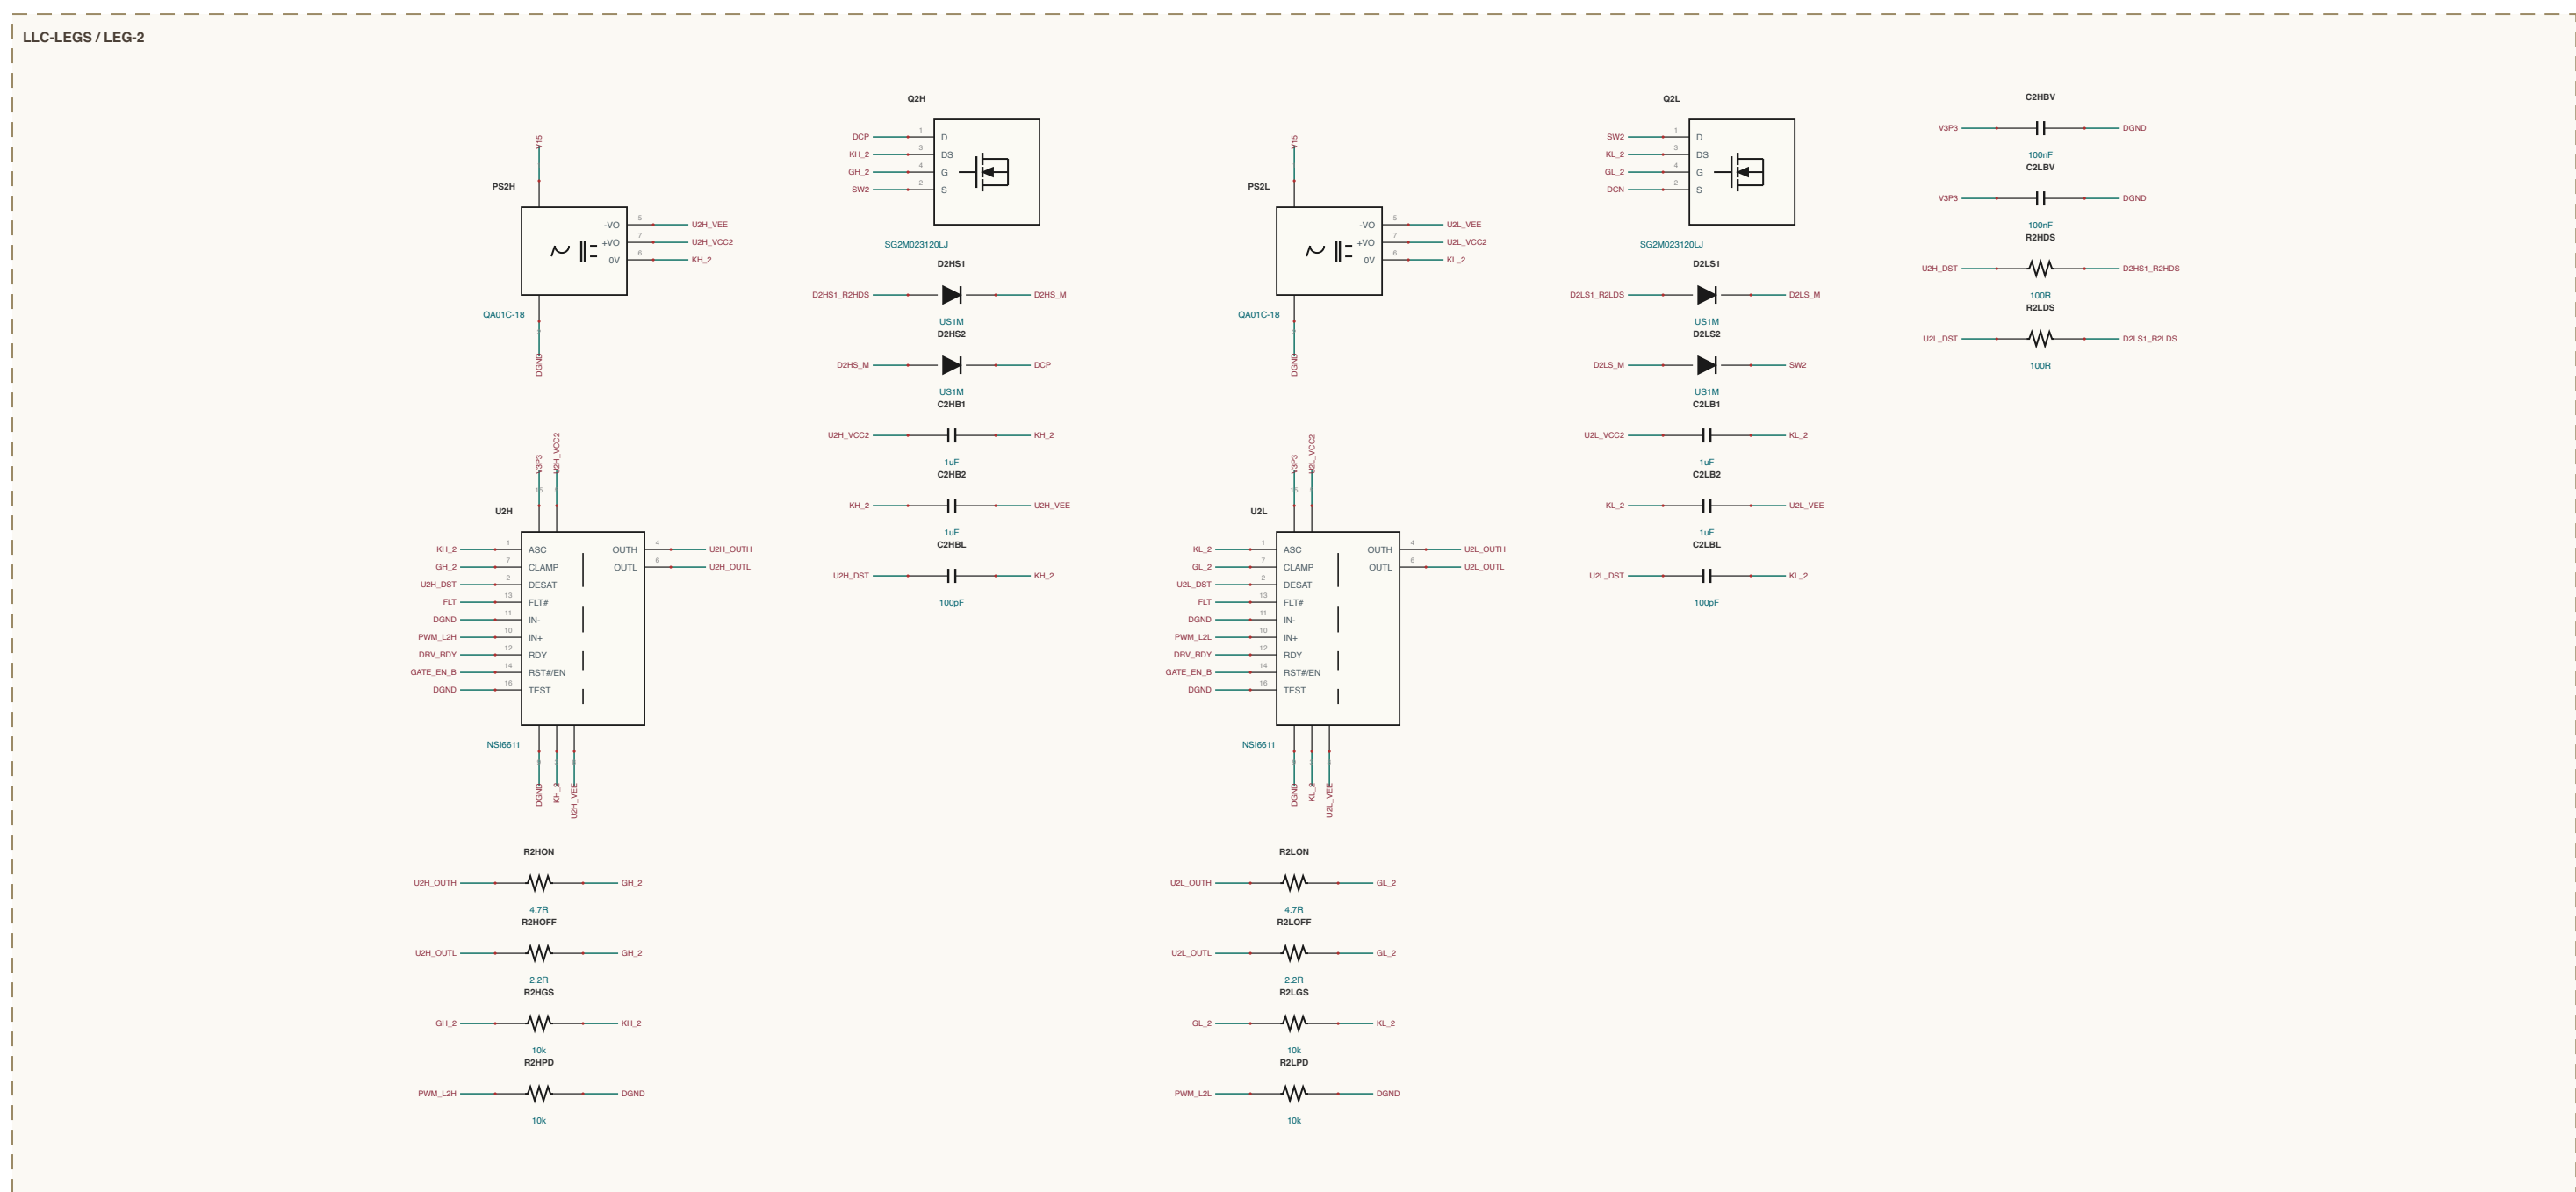
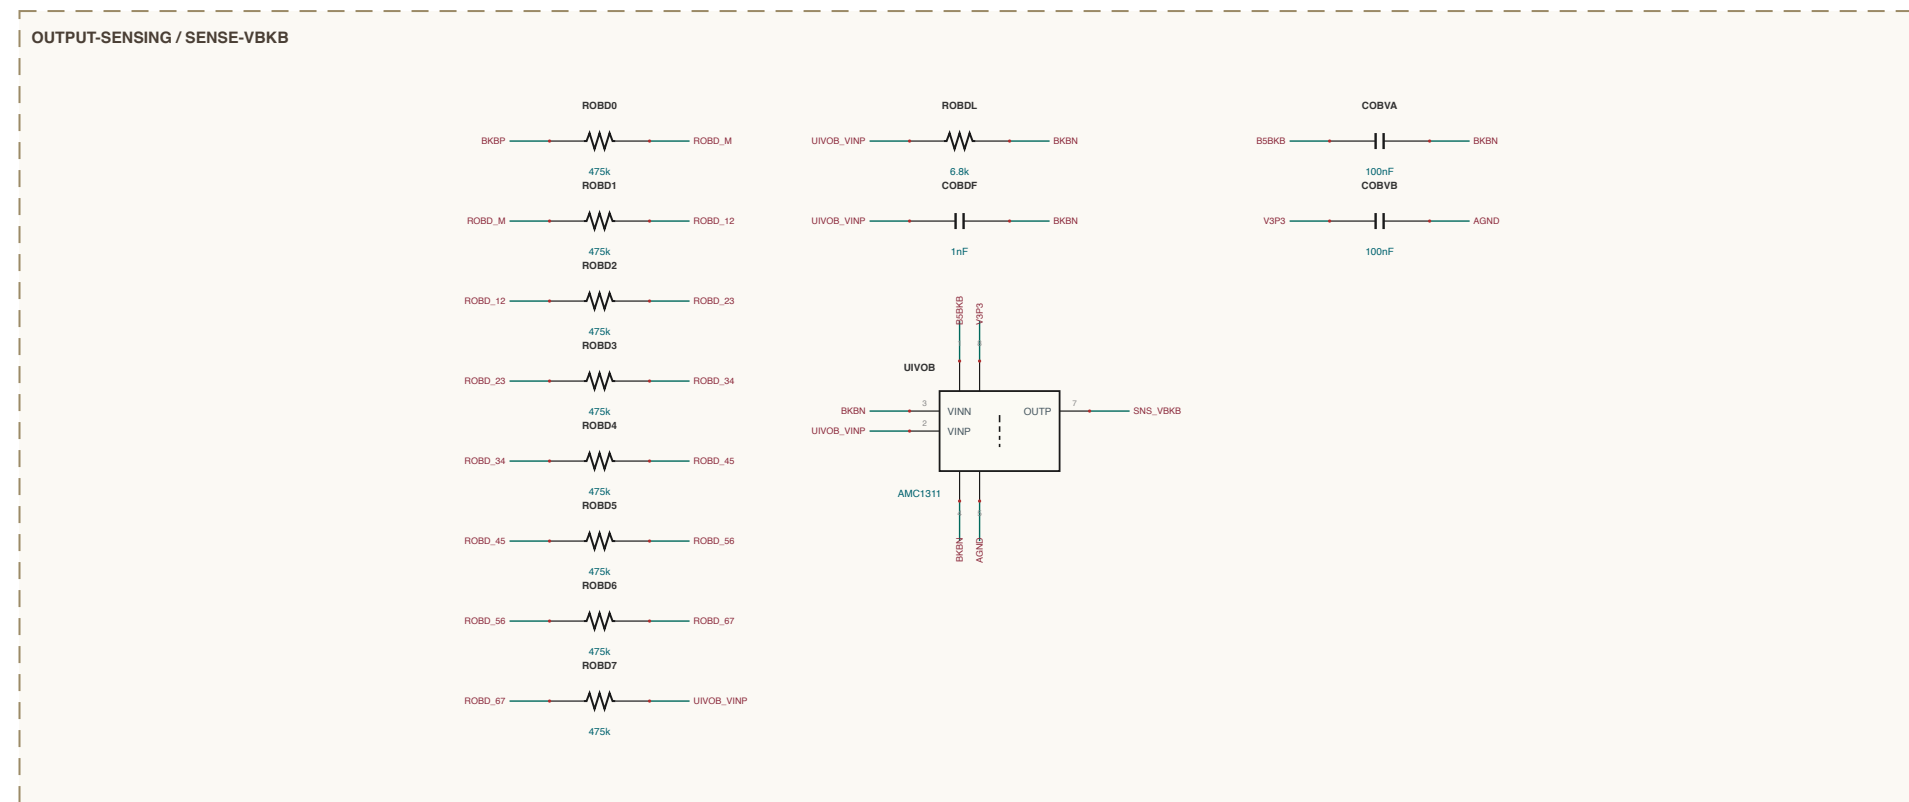
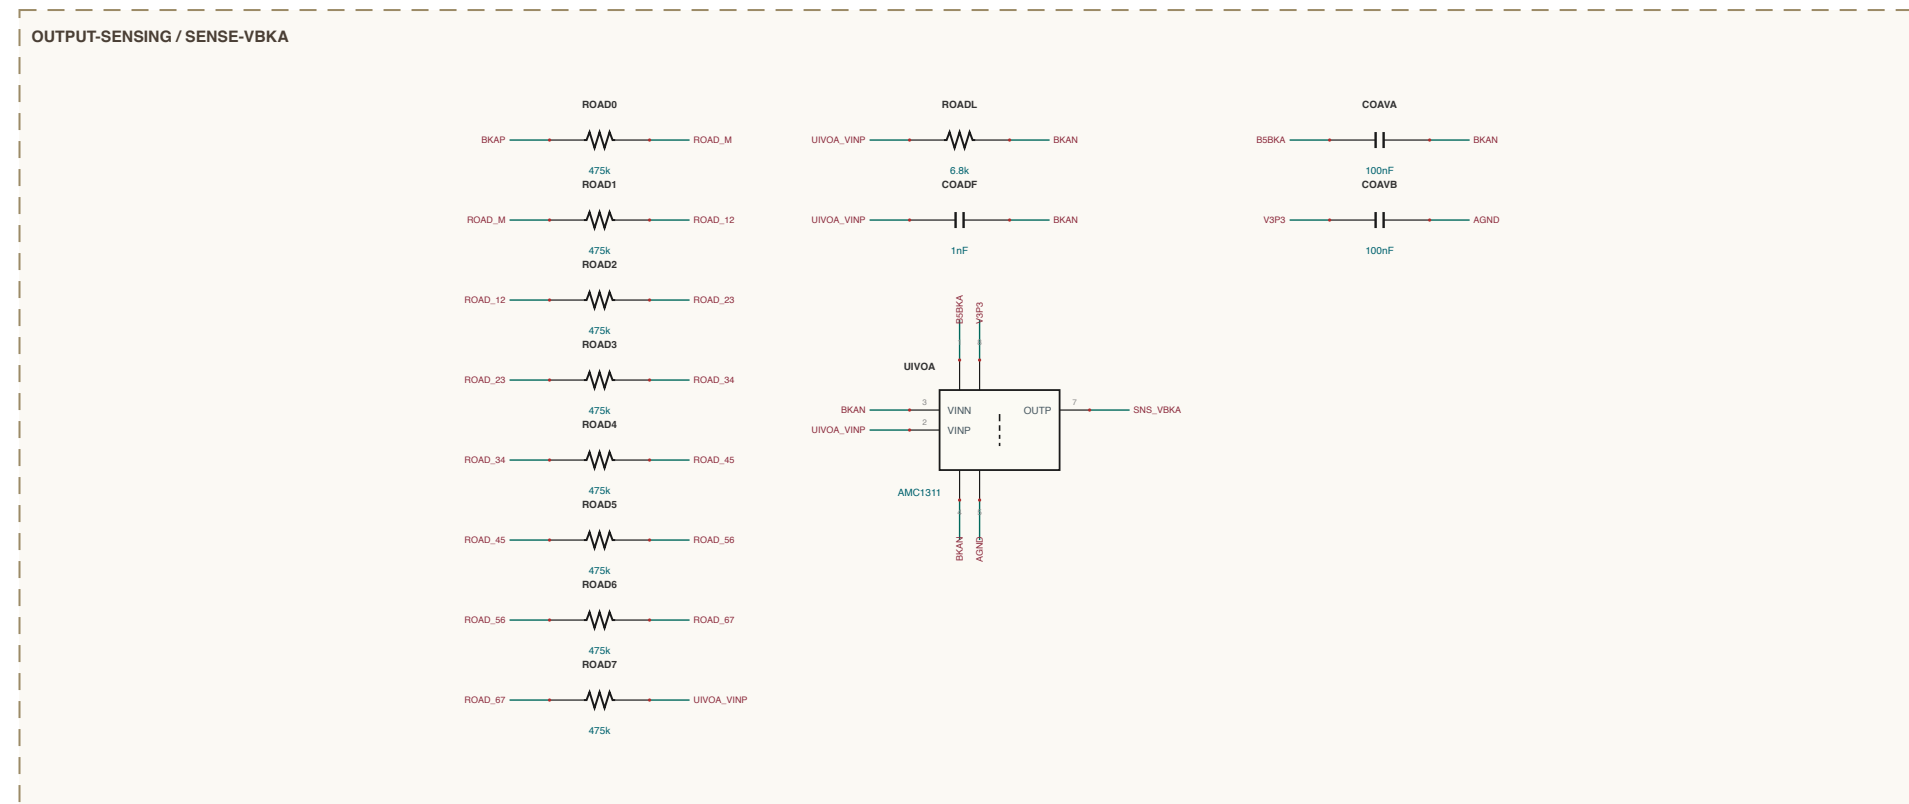
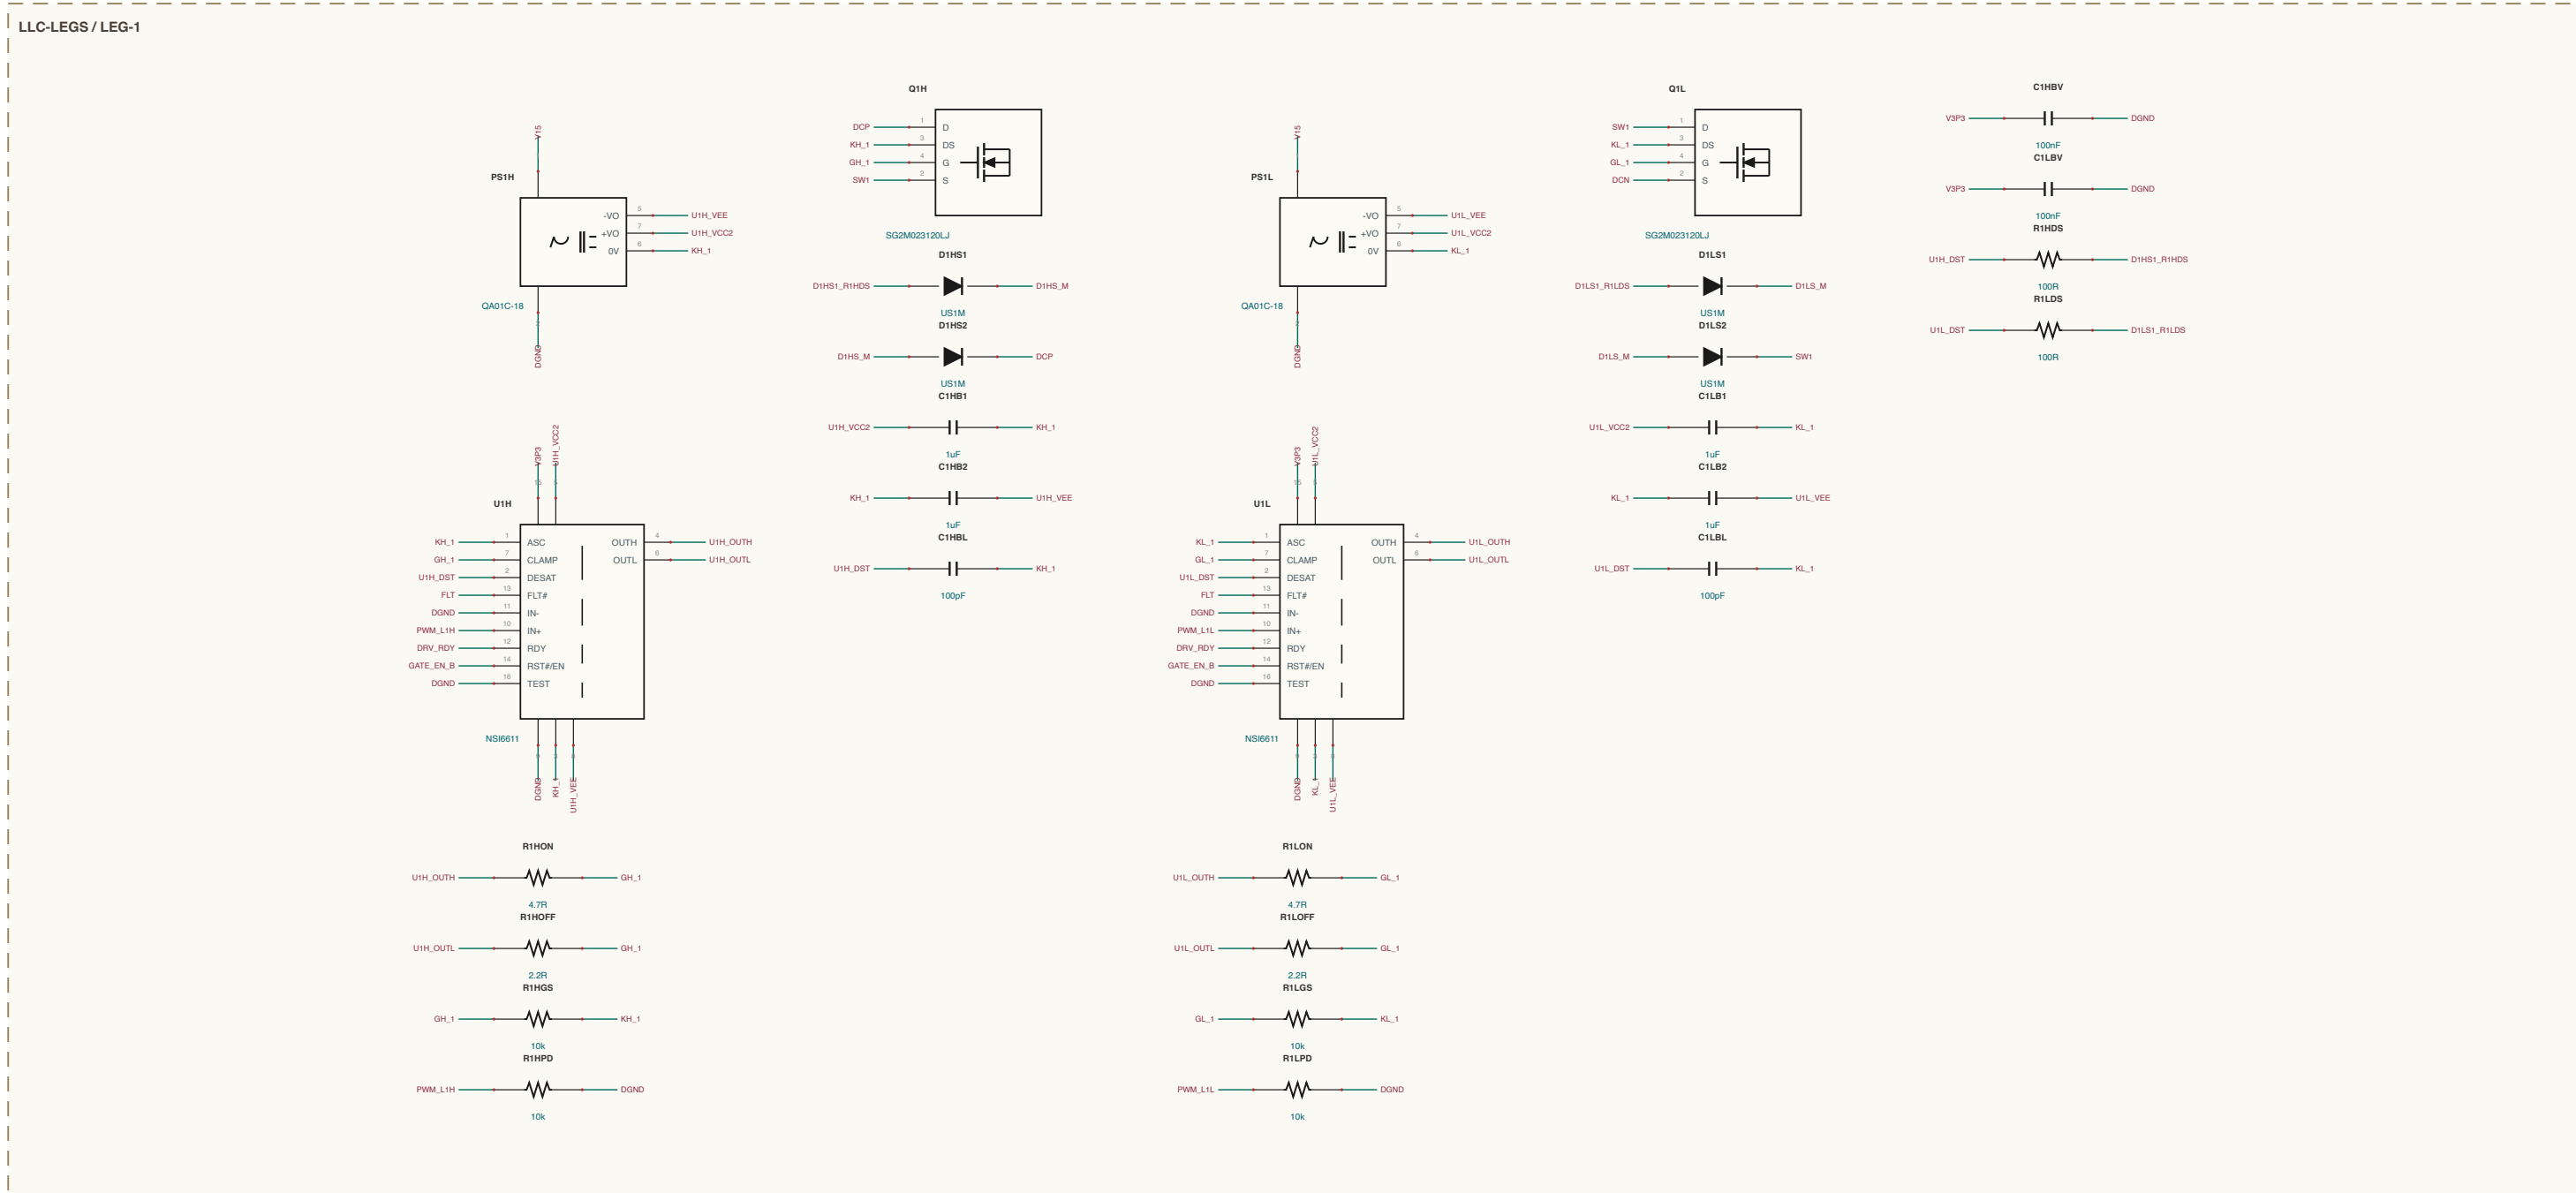
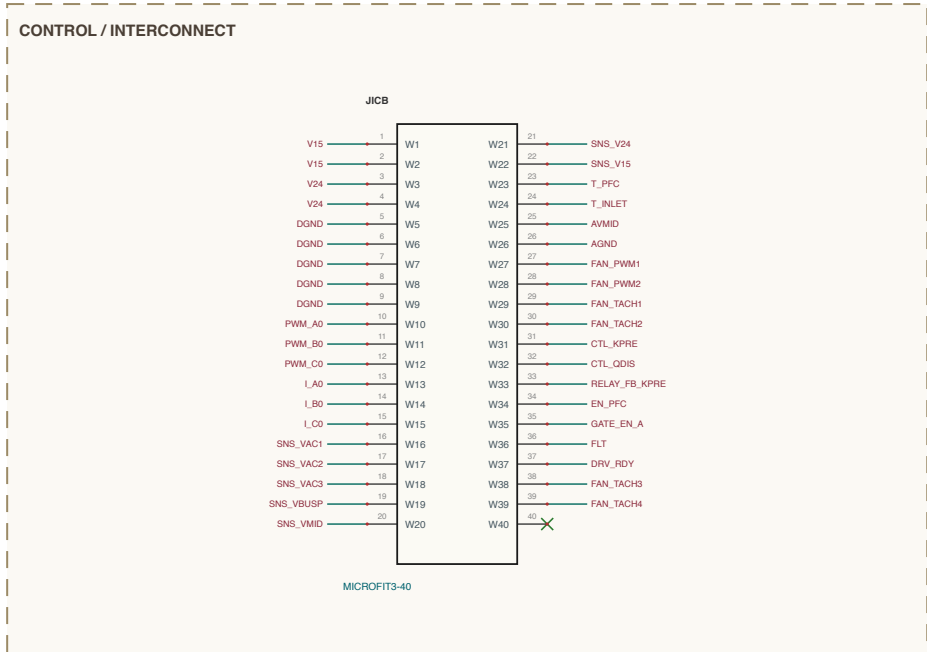
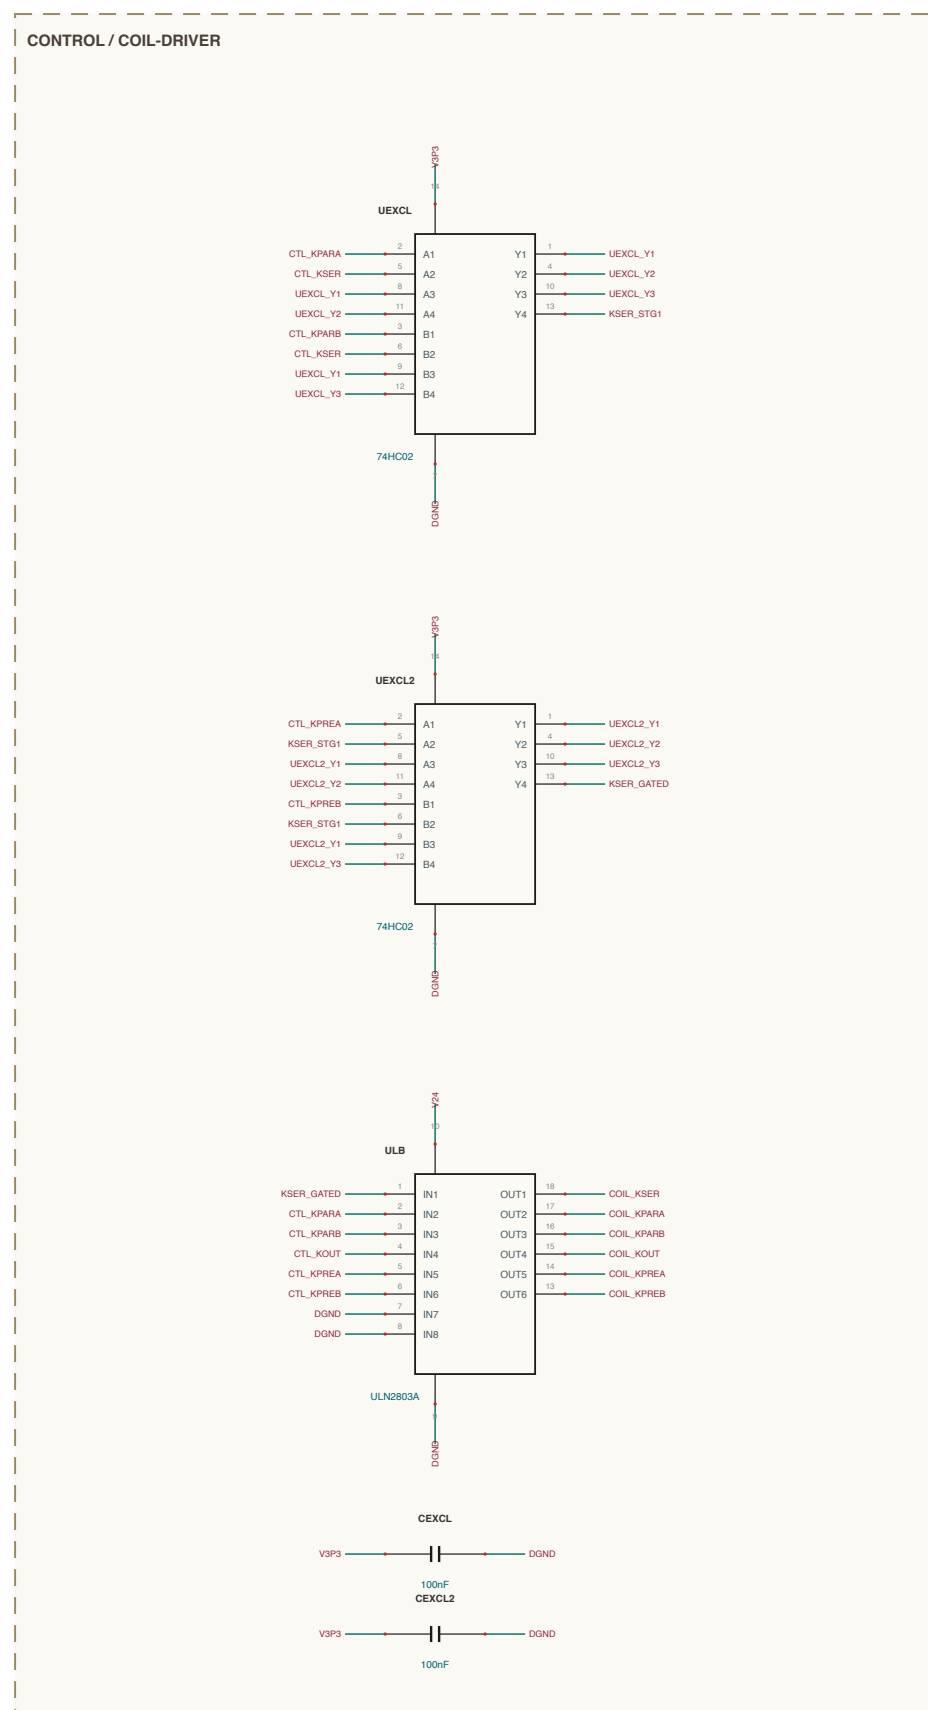
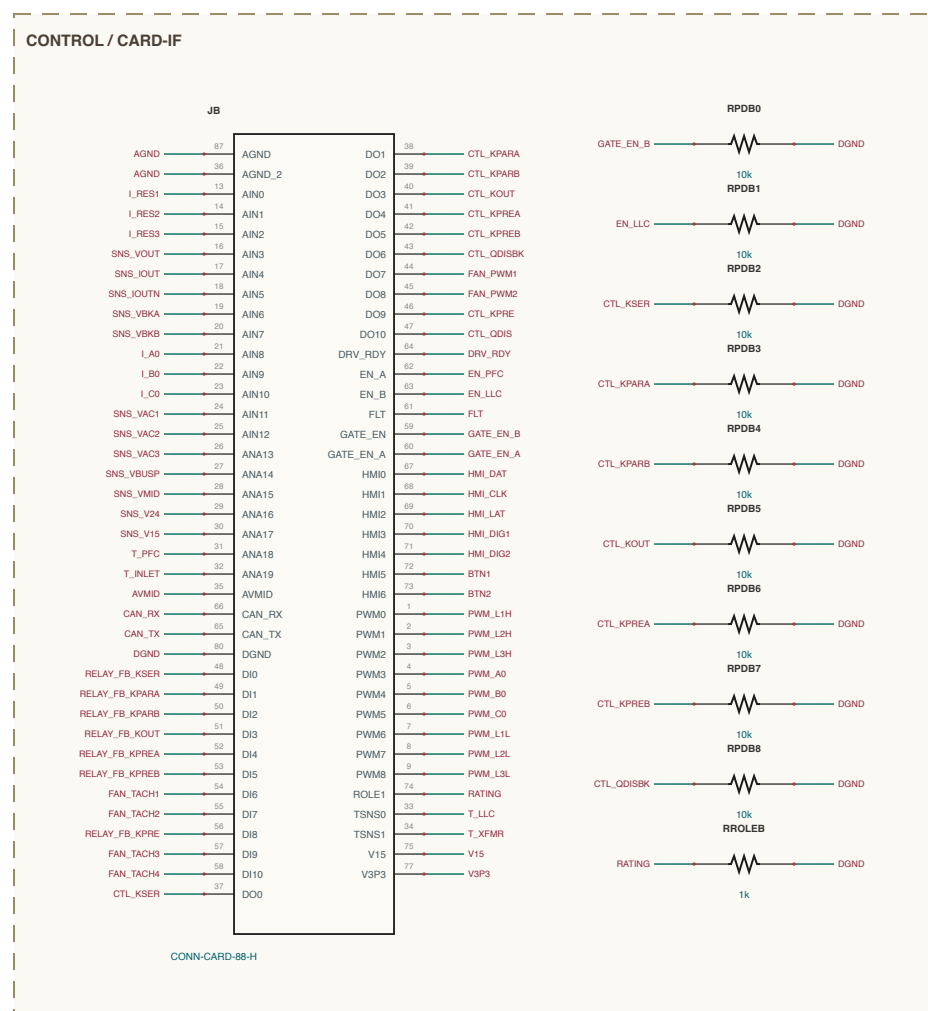
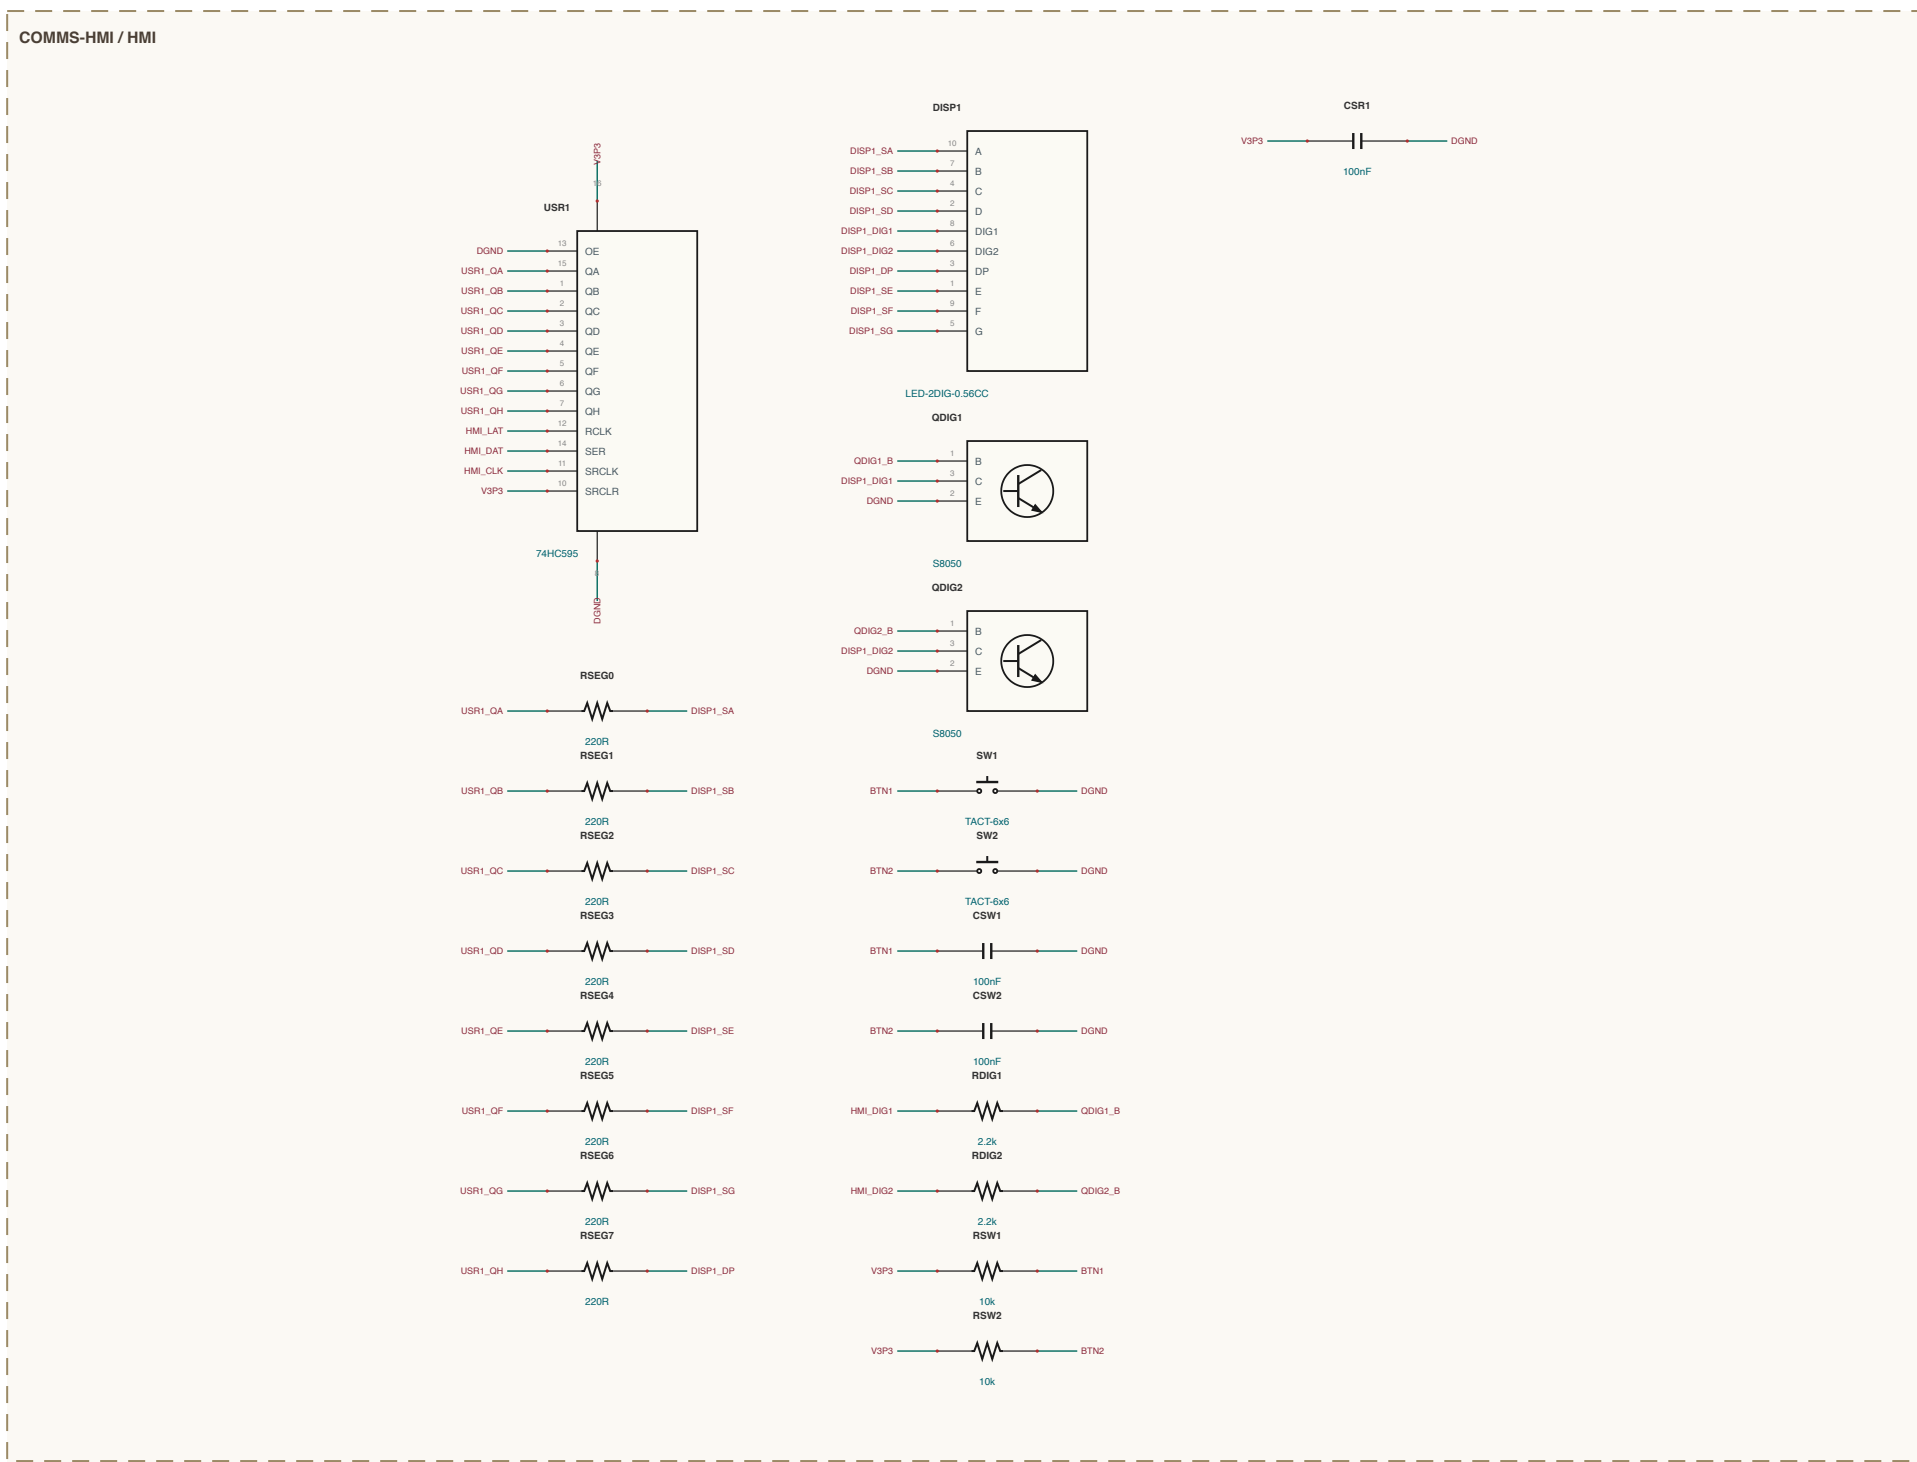
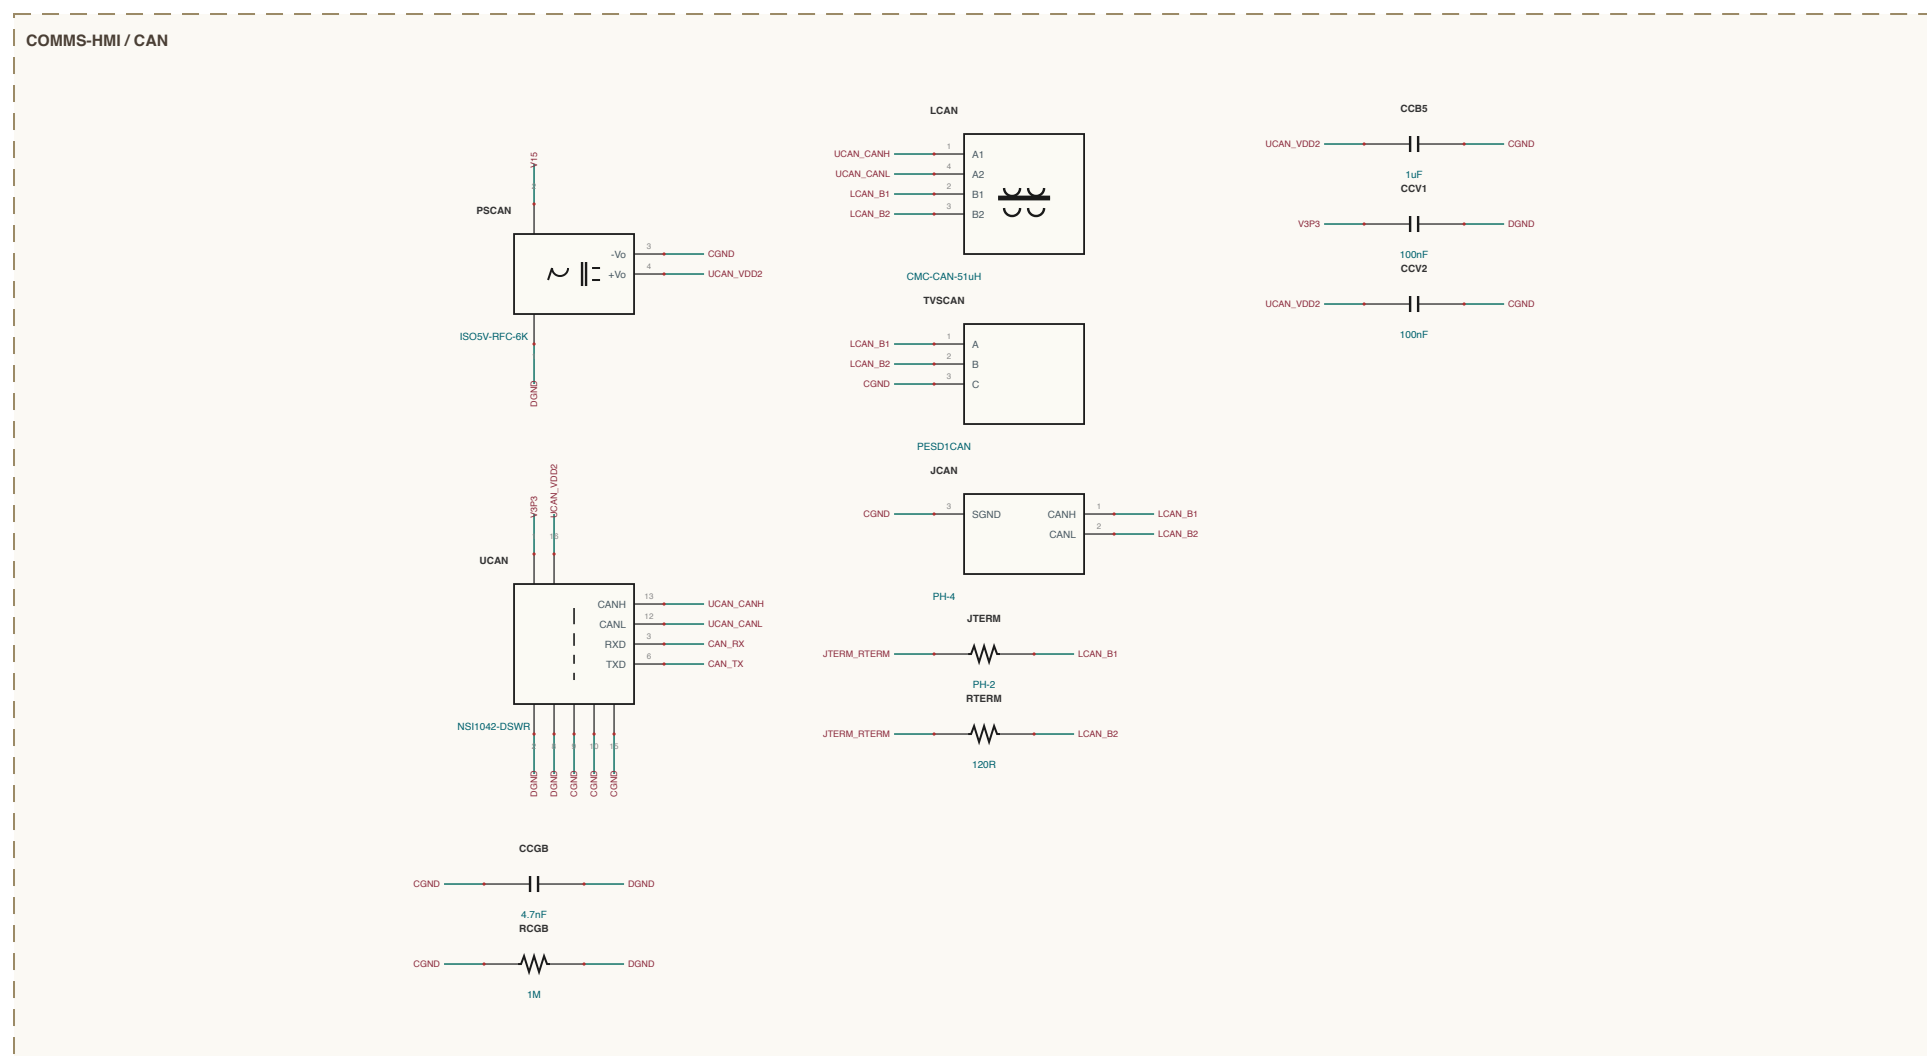
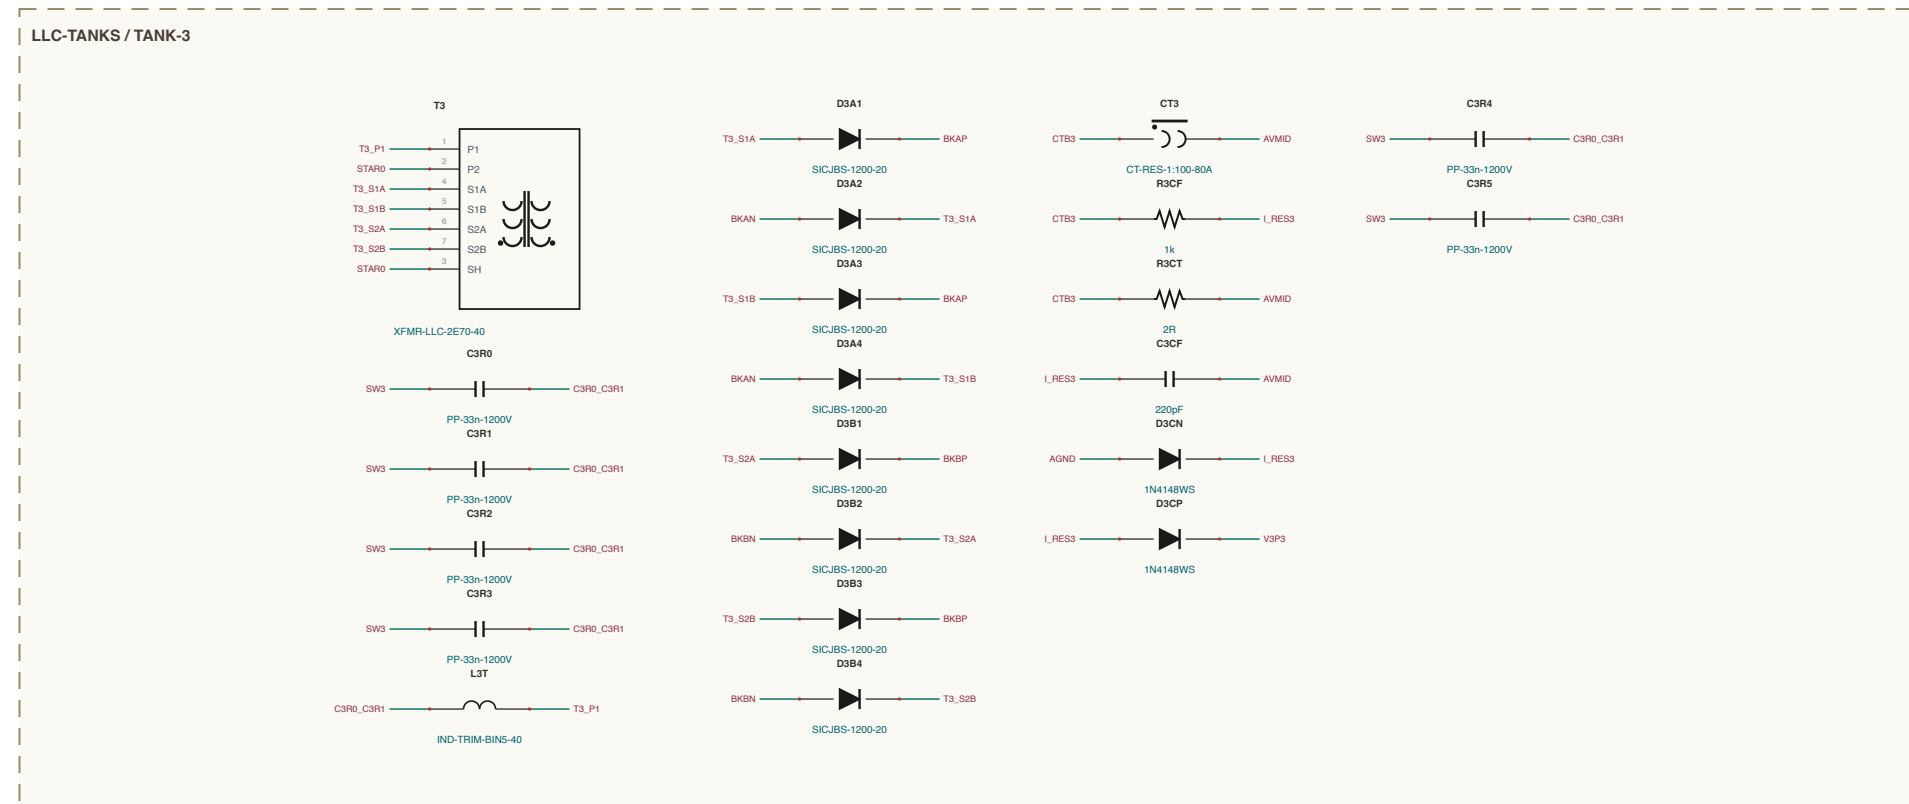
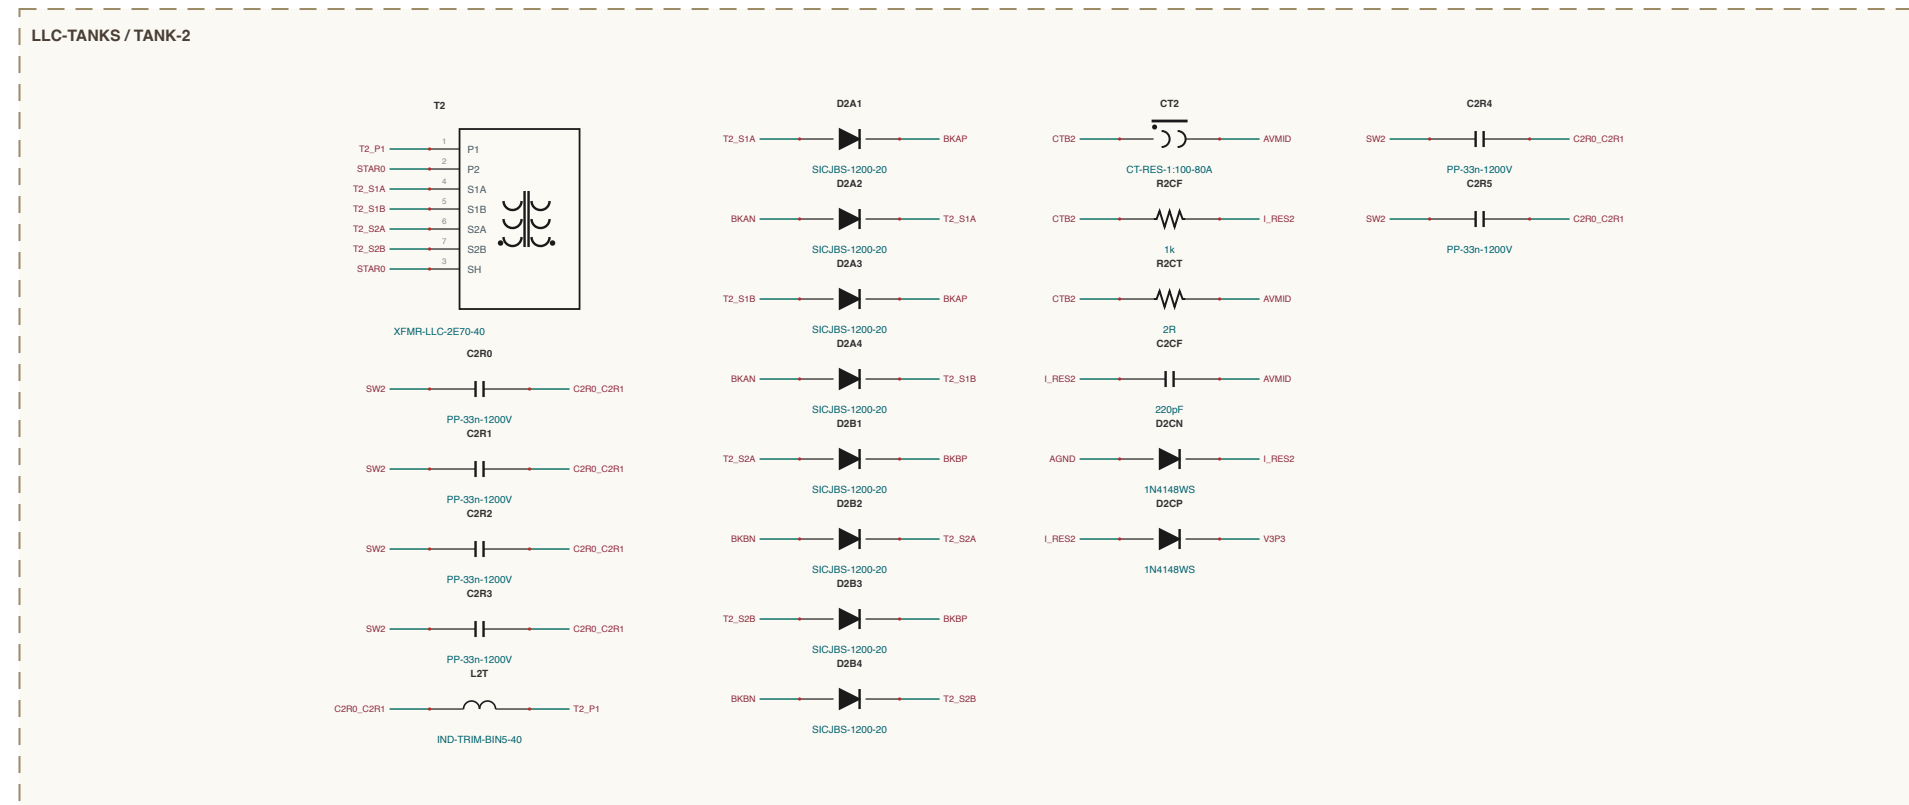
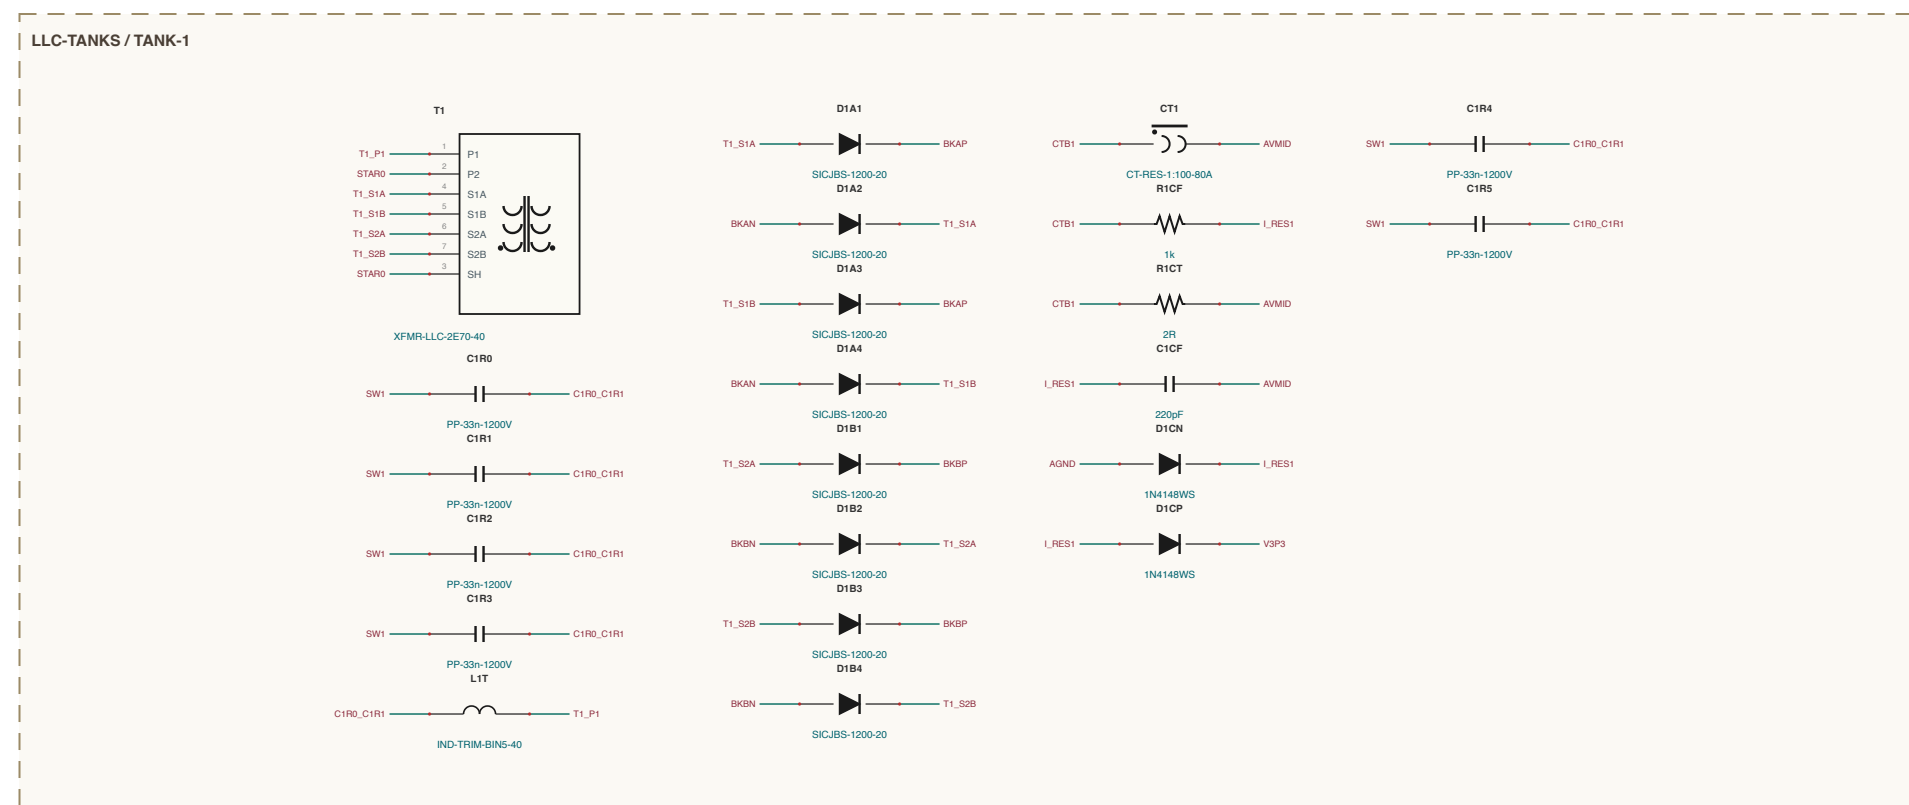
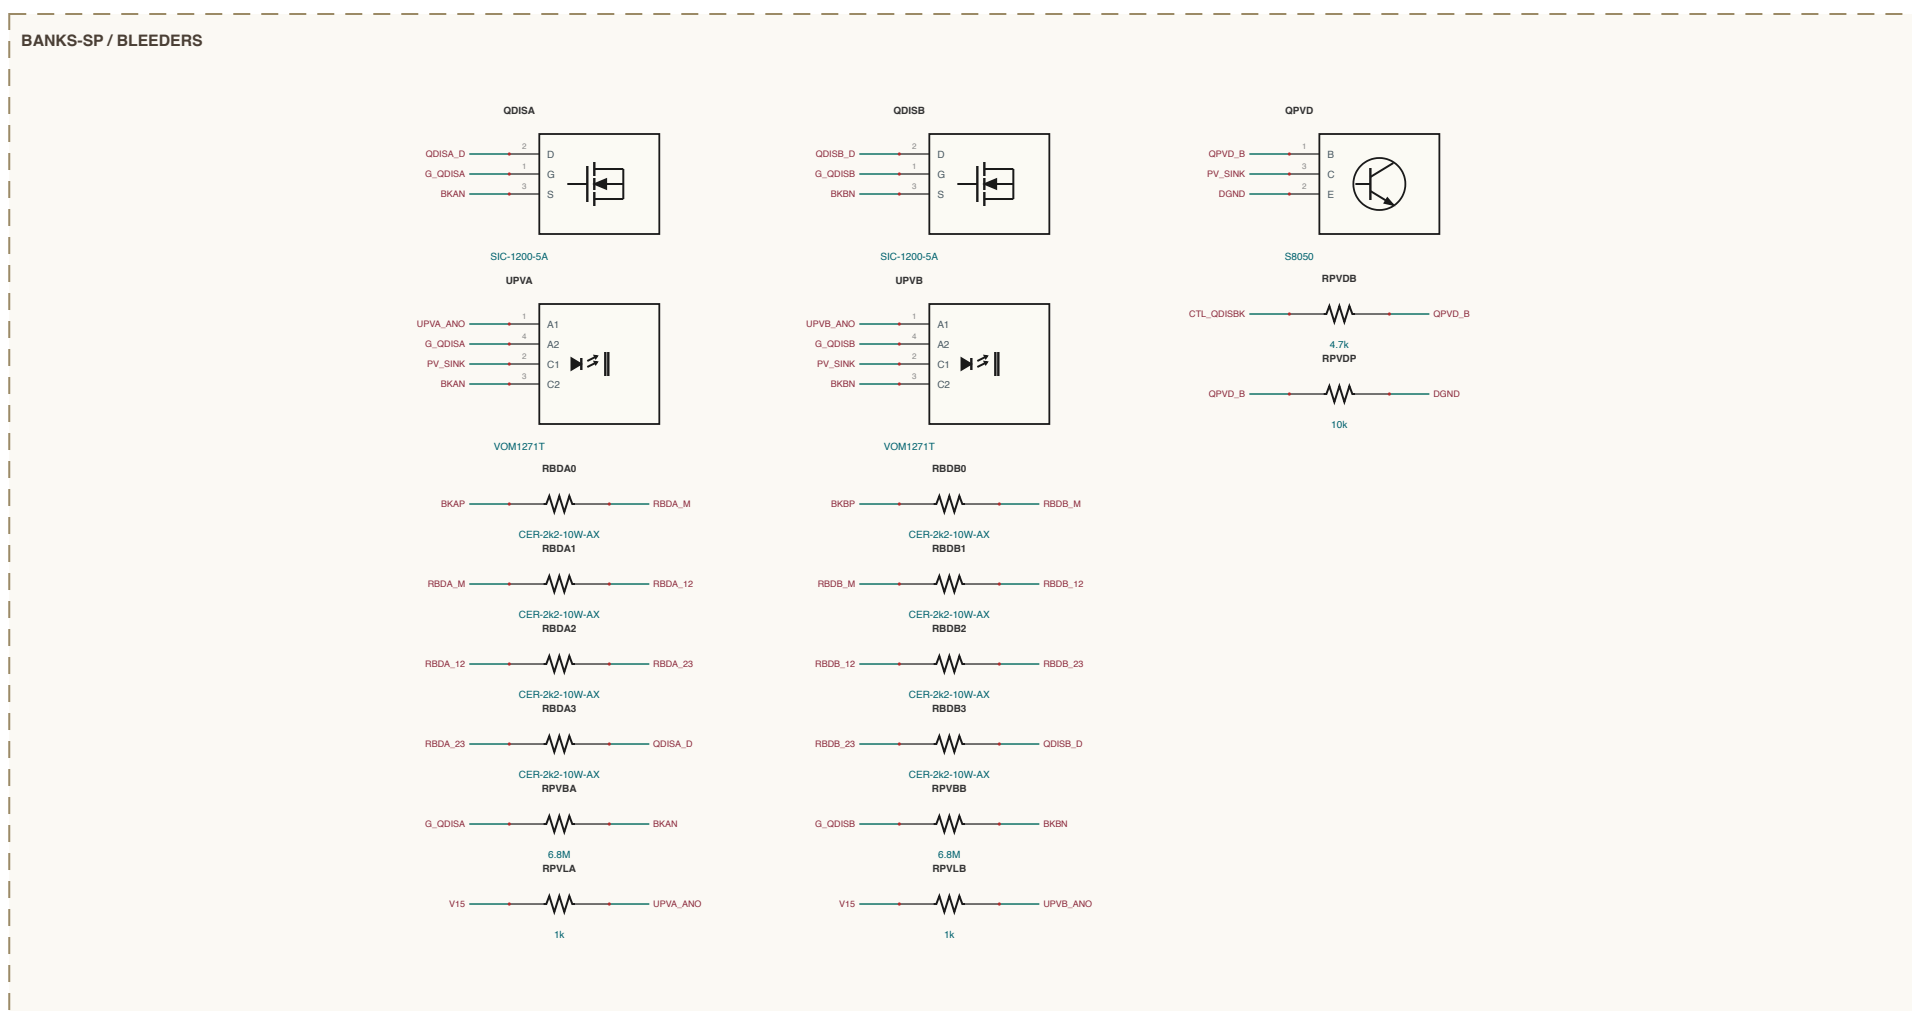
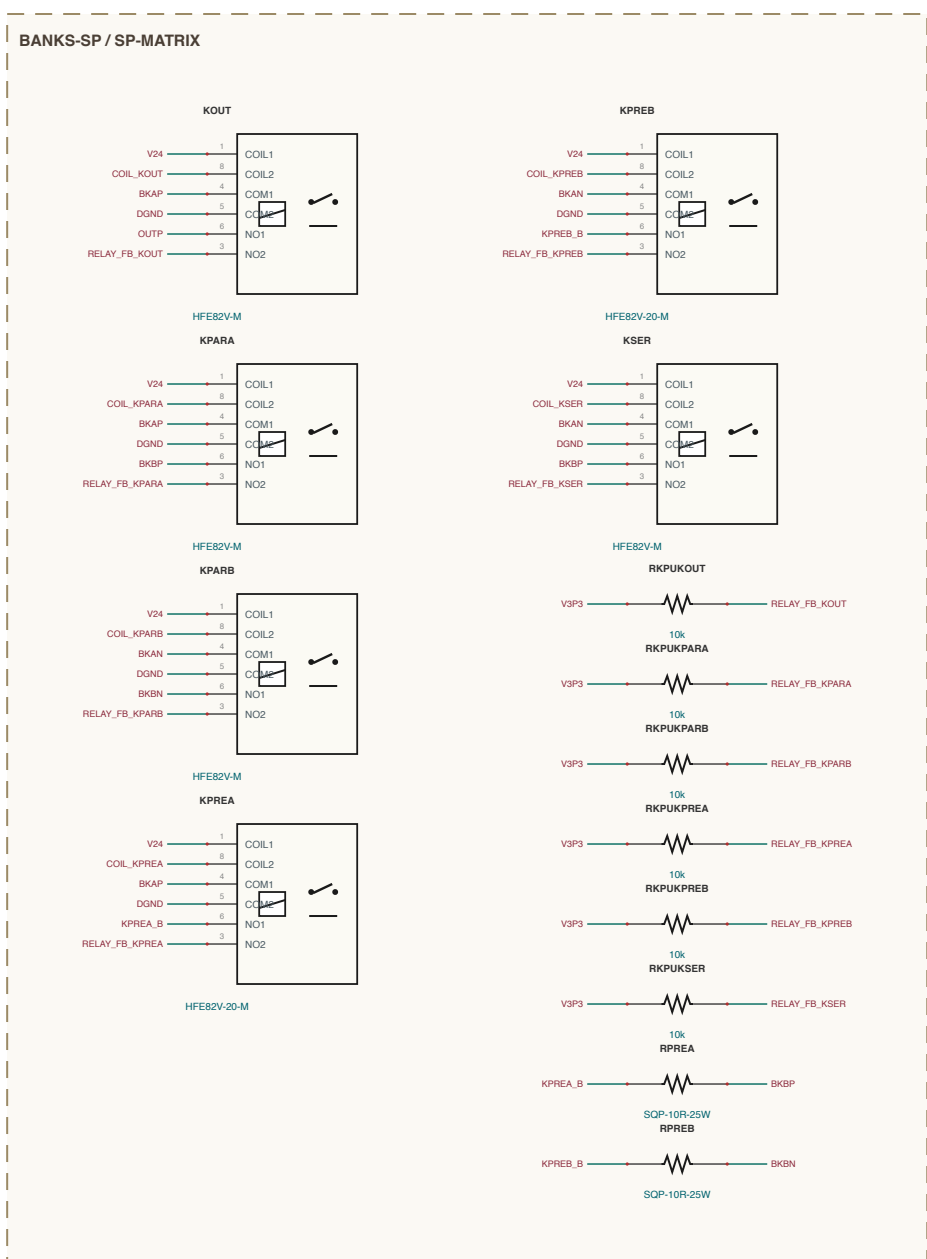
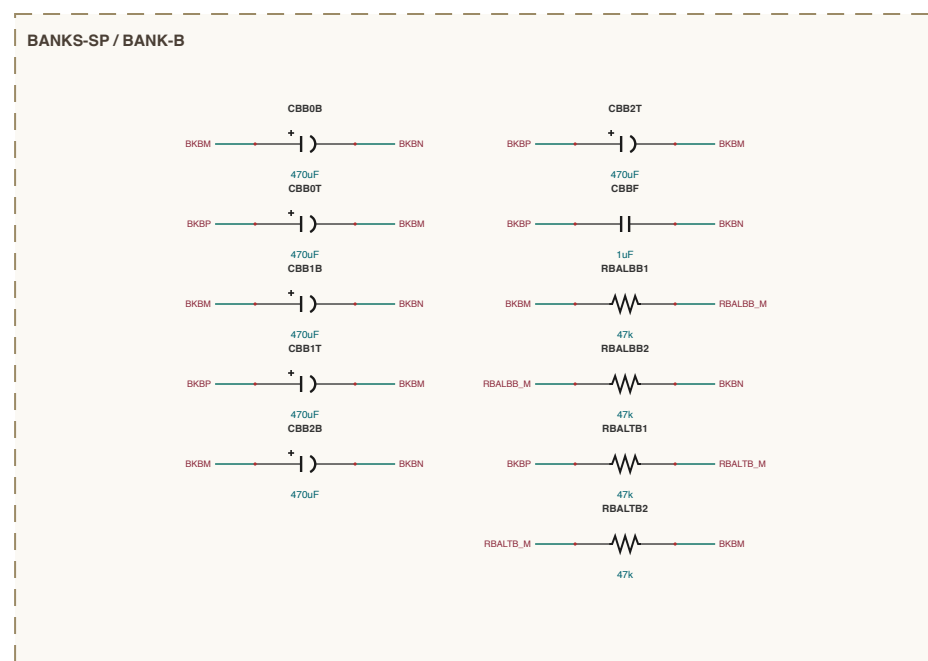
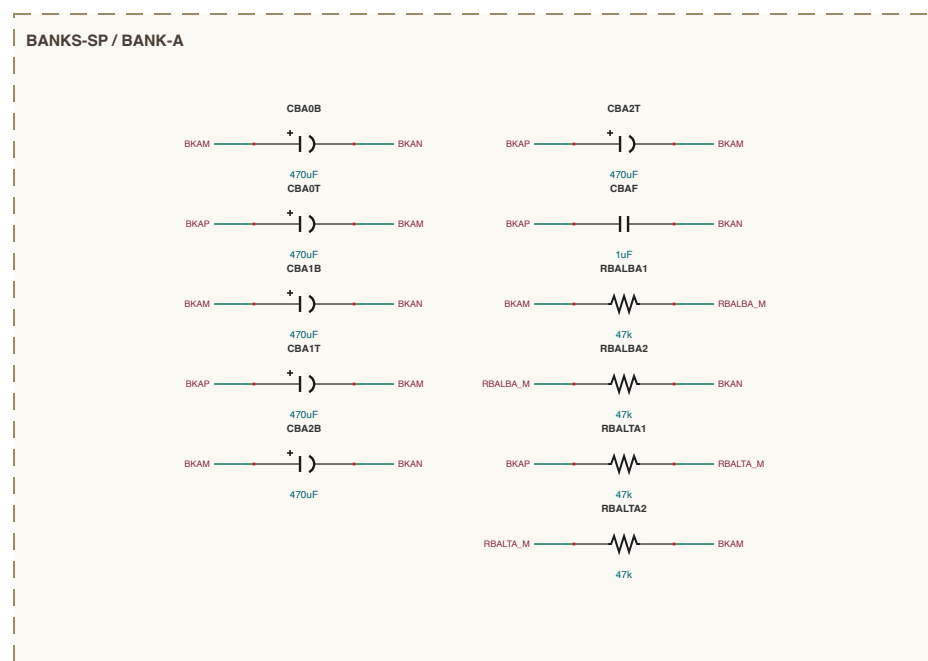


[illegible]

NET NAMING

Internal positions are named for what they join

Locals: *off* to the nodes at that C₂ join e.g. *LOCAL_VMP*

Peers: *3d* midpoint of a source pipe e.g. *REAL7C_M*

Neighbors: *cross* to the nearest footcandle e.g. *INDV-01*

All others are explicit design notes

MAGNETICS CONSTRUCTION

Identify per discharge/particle net (burns, gap, etc), acceptance (less than three)

D6 71-73 In E705D50 (2005T8000 forward), 6.6, B&K Model J51 - 9-9.9 was articulated at 2.4 window; compacted (lit + hot) and, Lm E347 at 1.0

D6 L71, L72, Red, less 120 D3-Bull, lit 30000L / (1.0 Term)

Total Lit = 9 m - measured after leakage (B&K COMPENSATE leakage spread); Or at TANK sections