

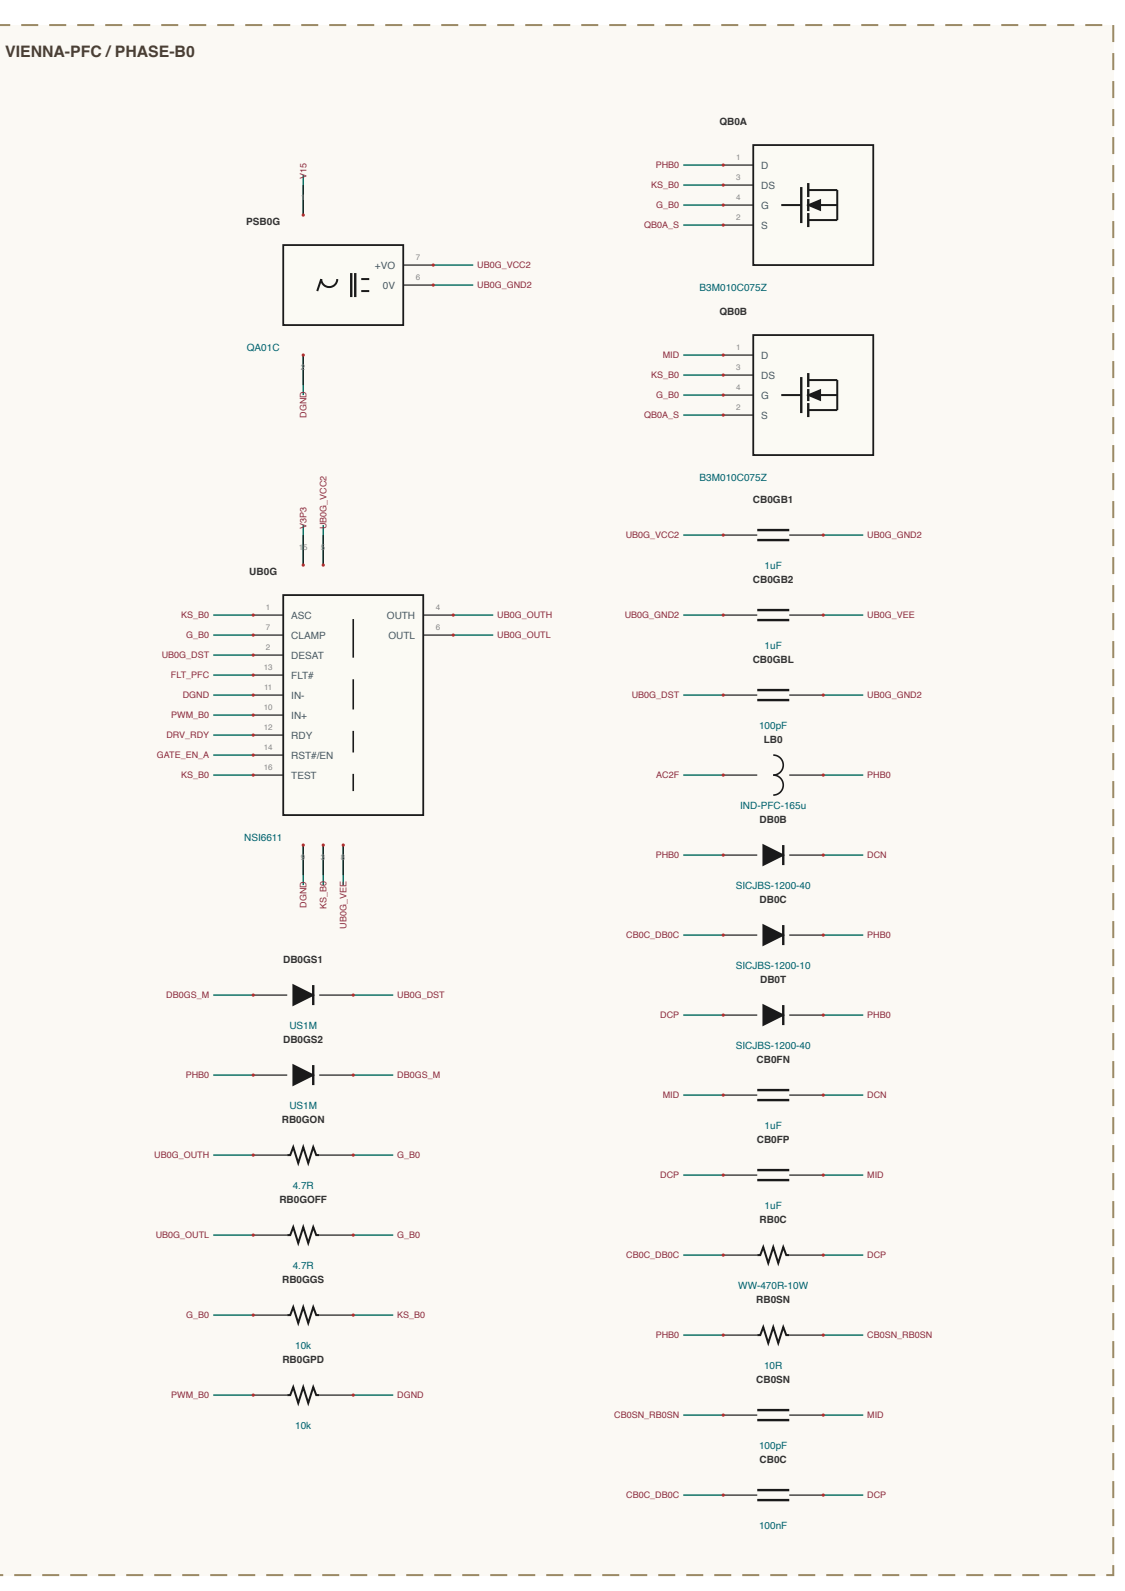
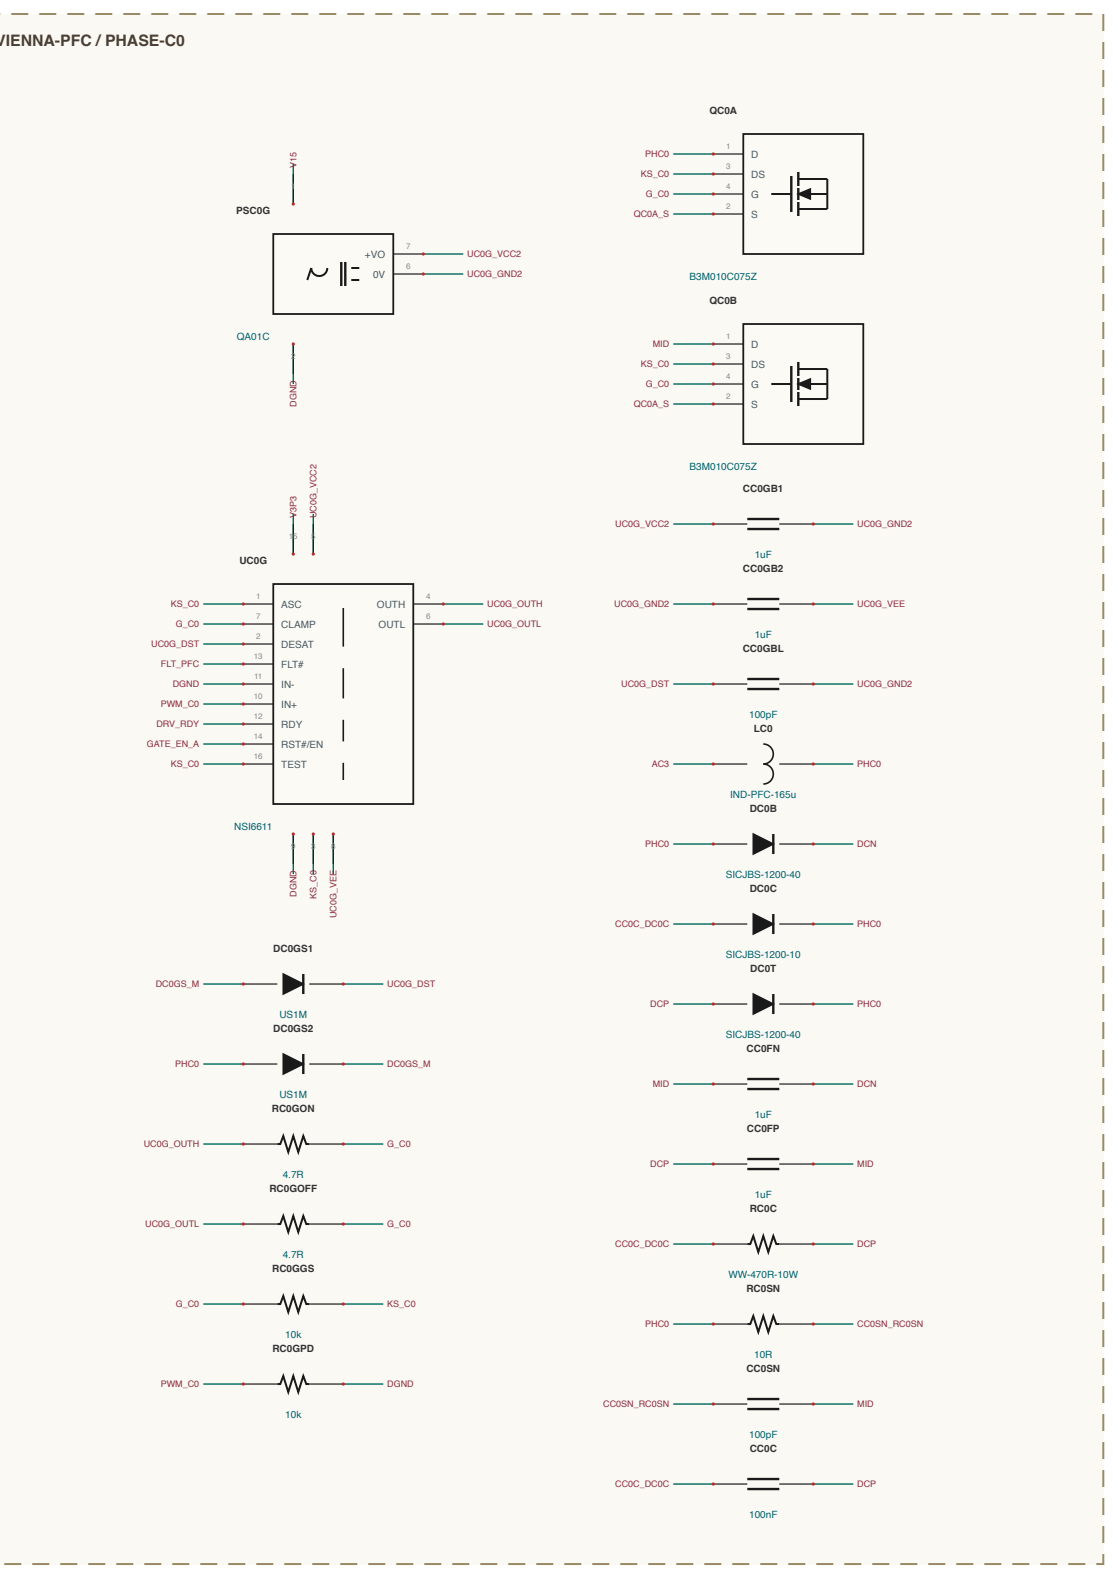
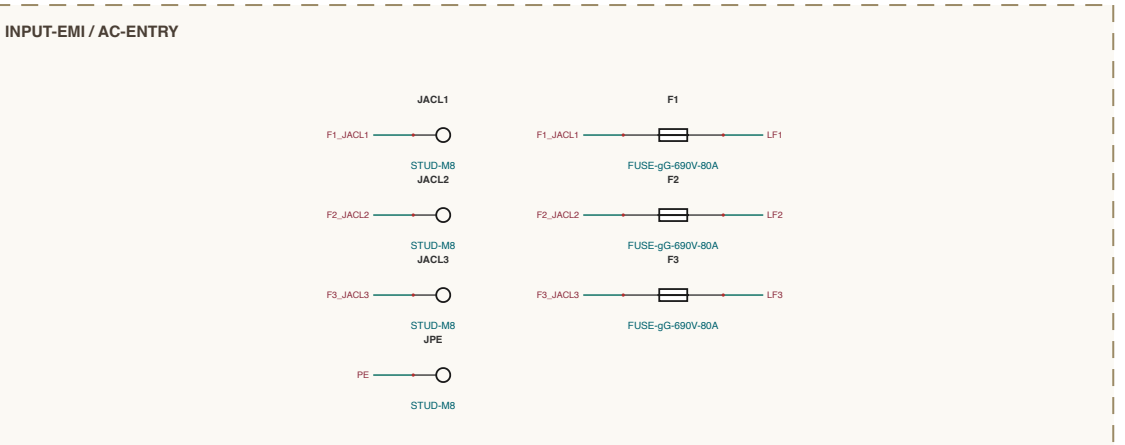
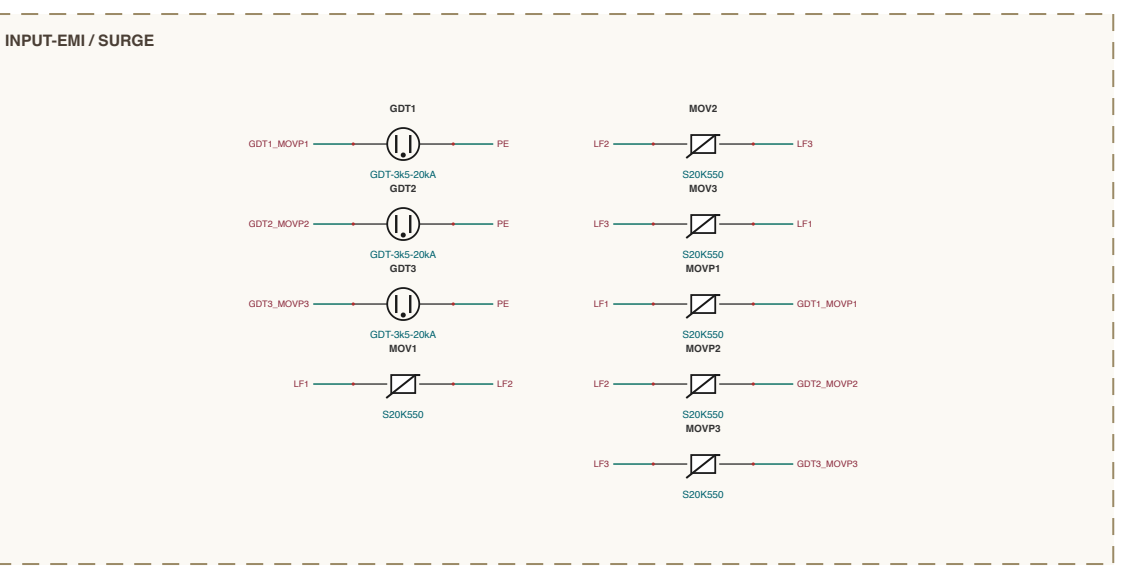
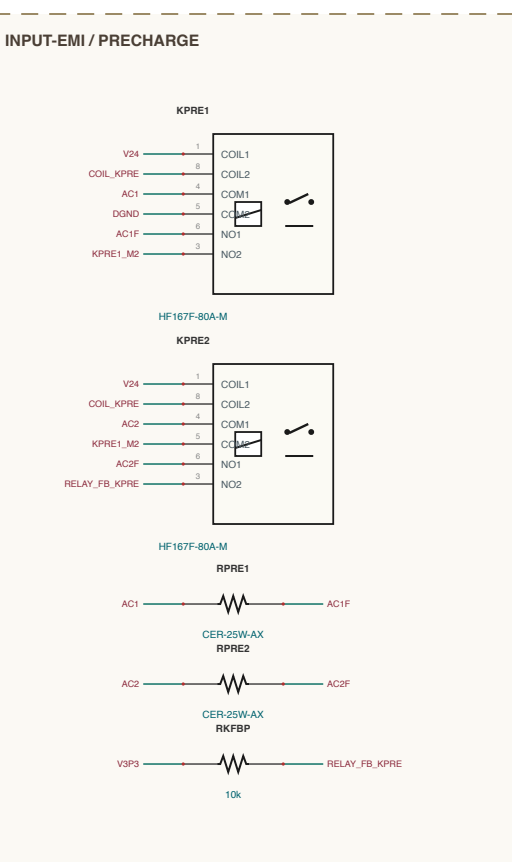
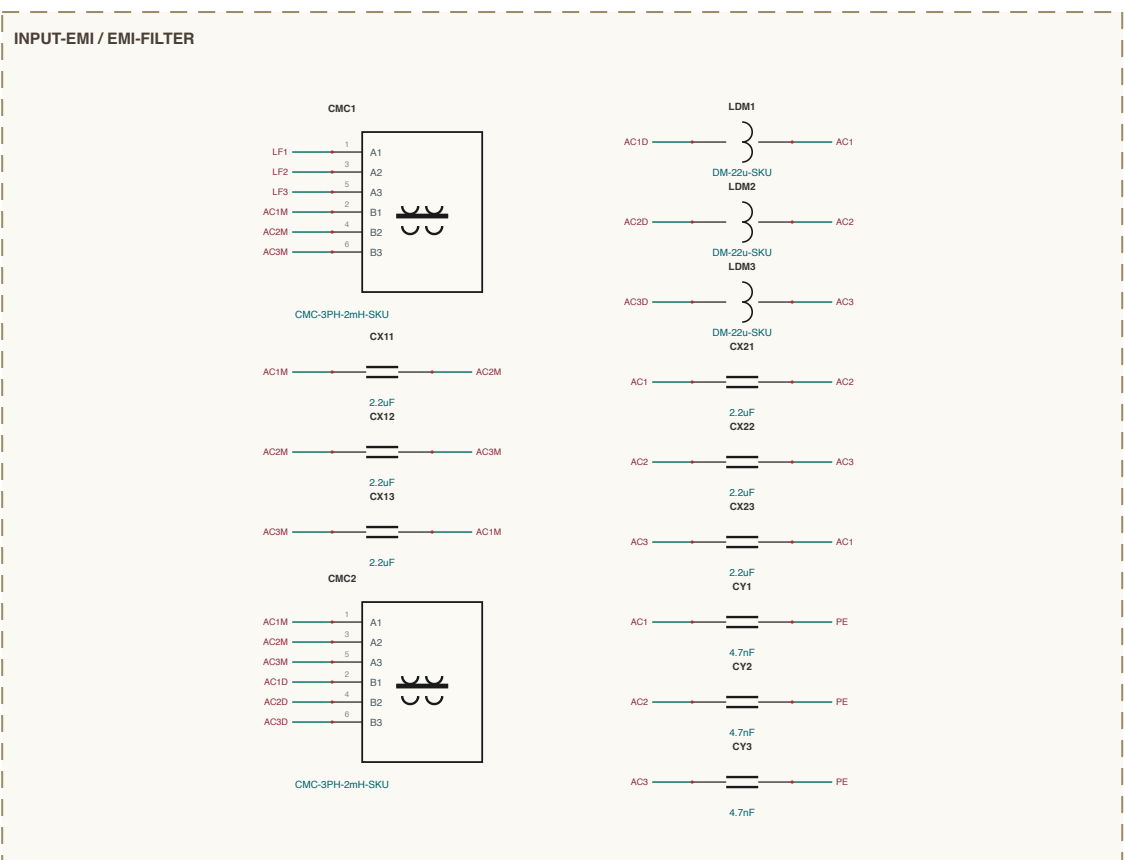
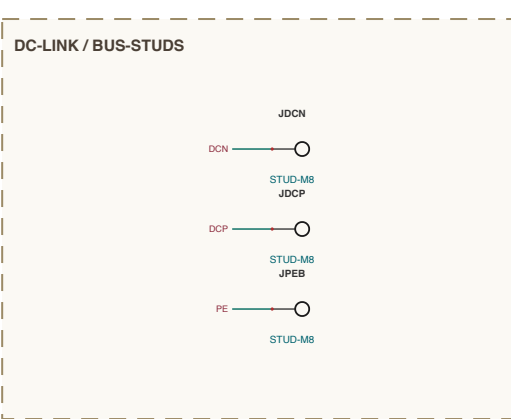
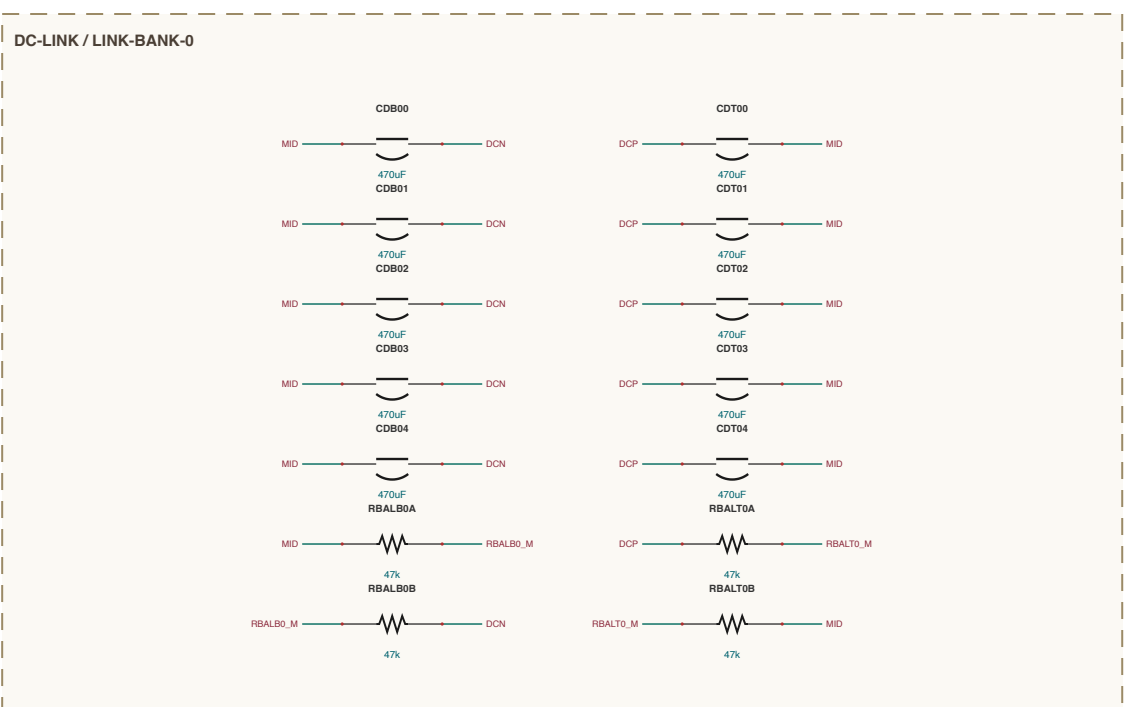
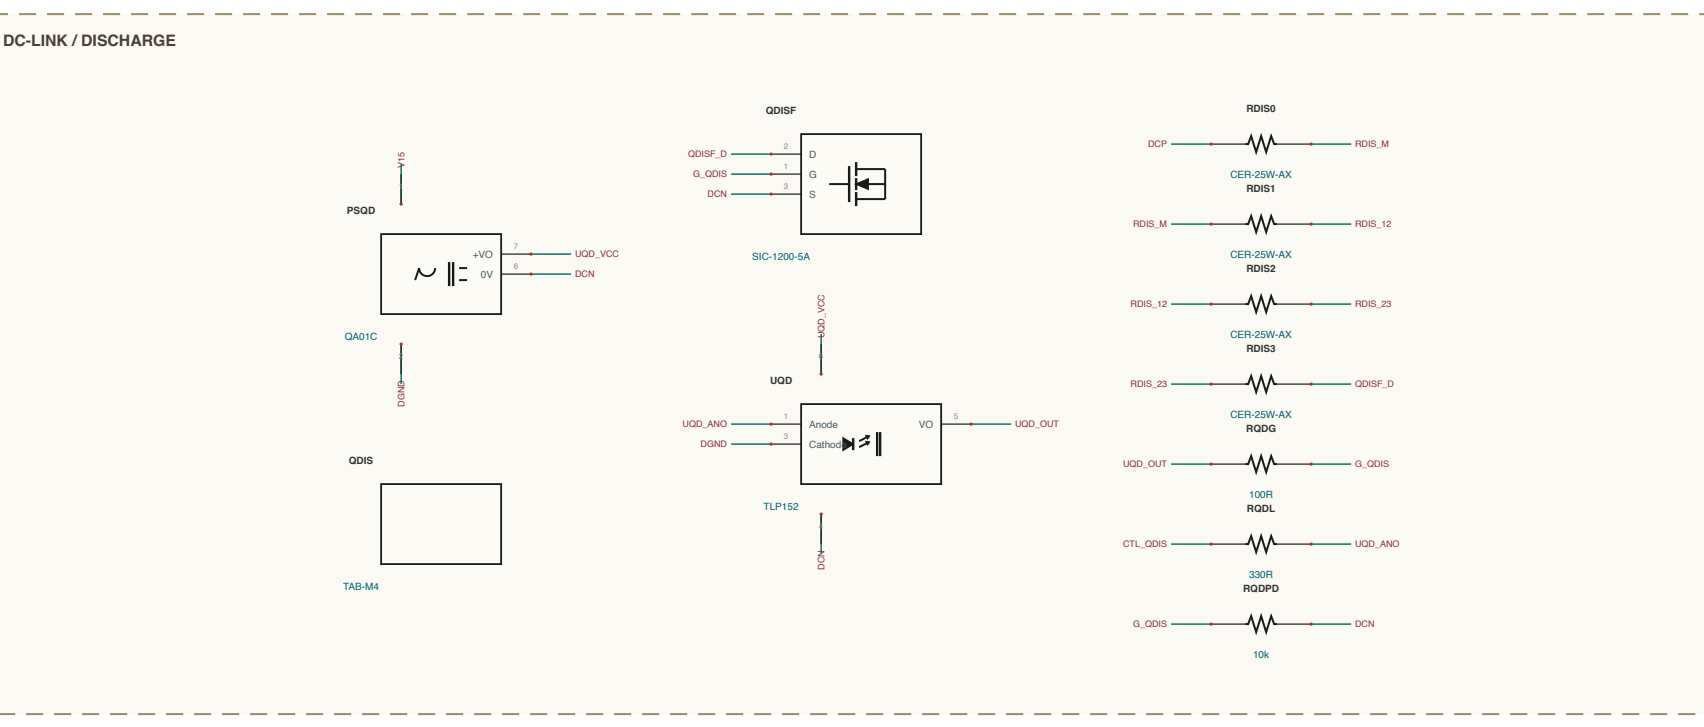
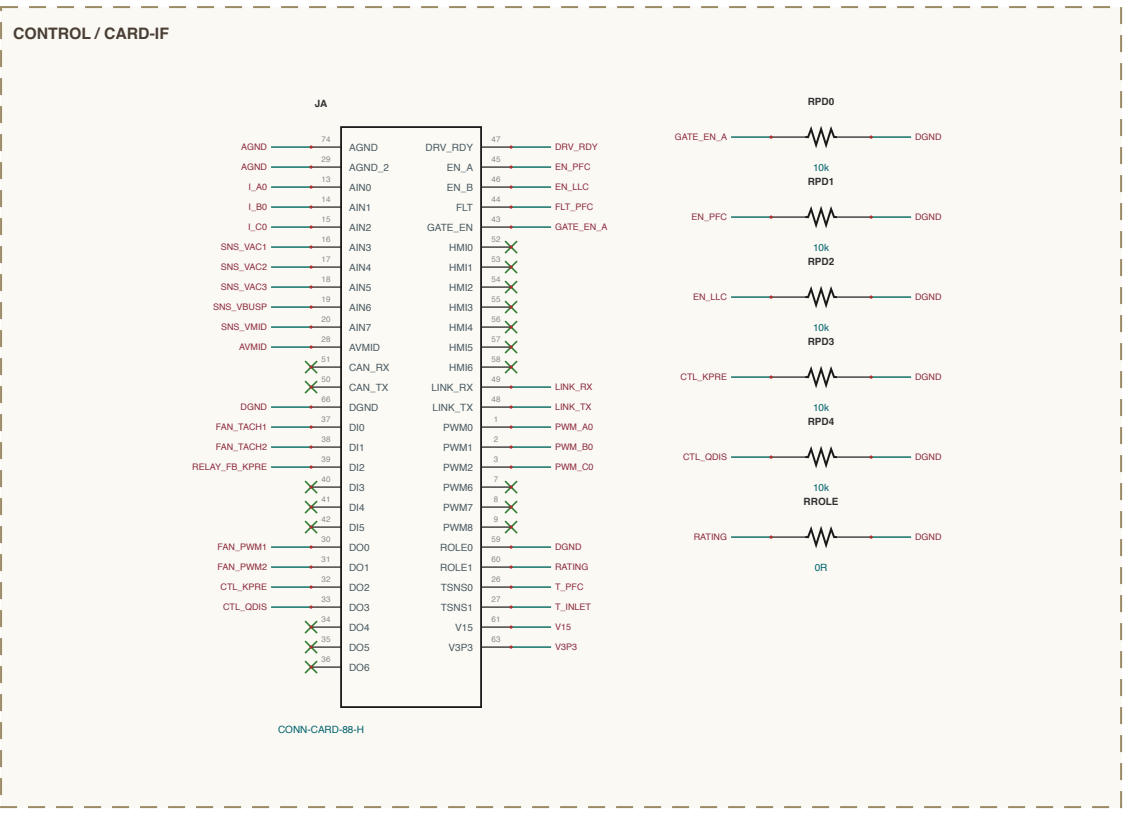
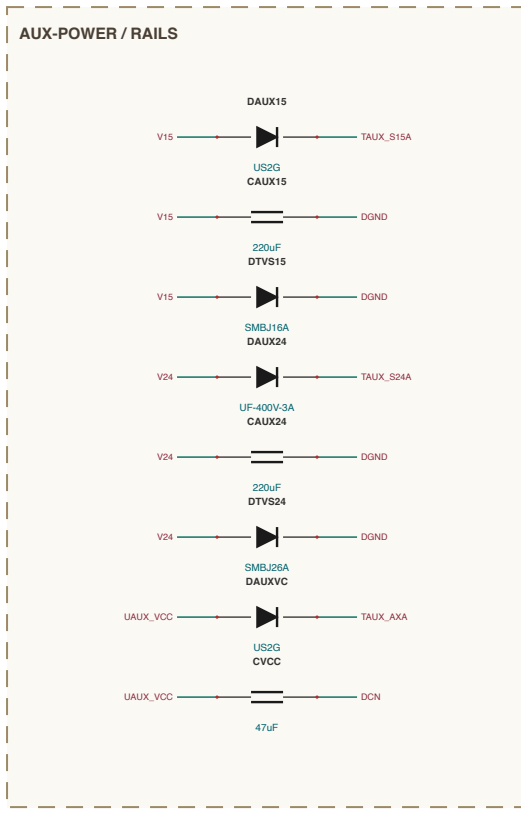
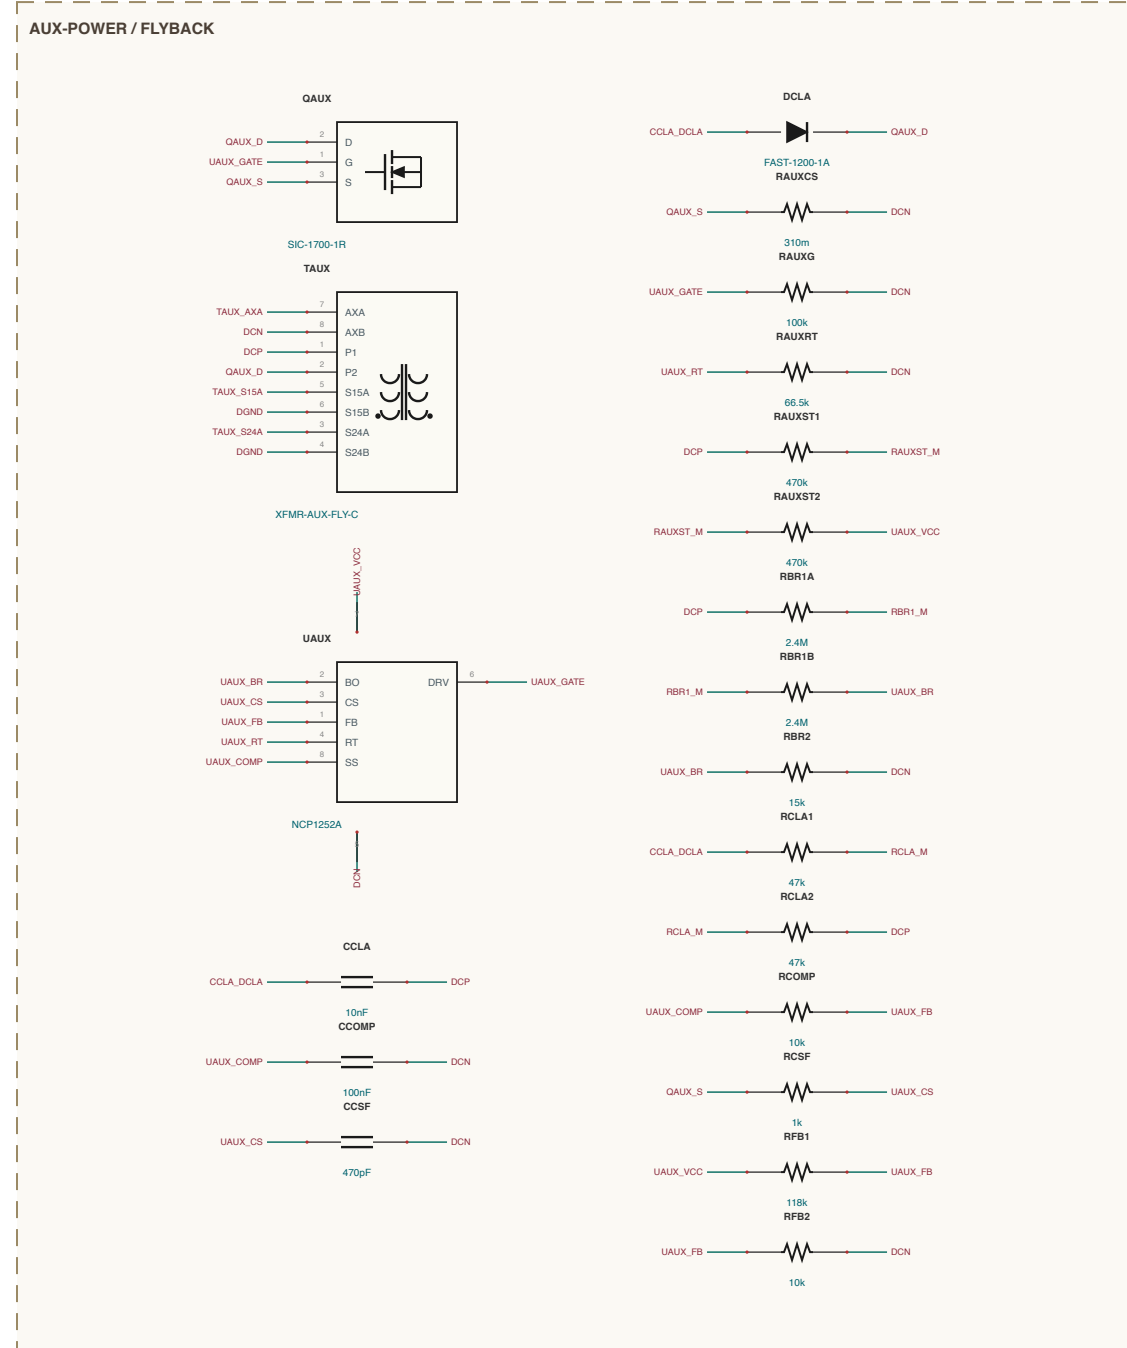
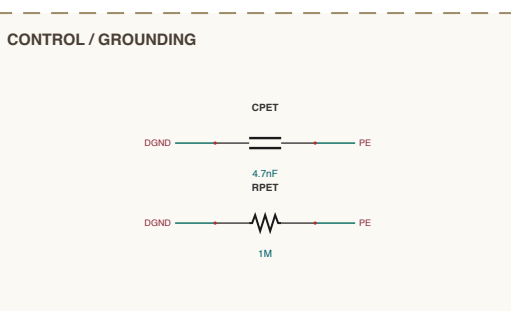
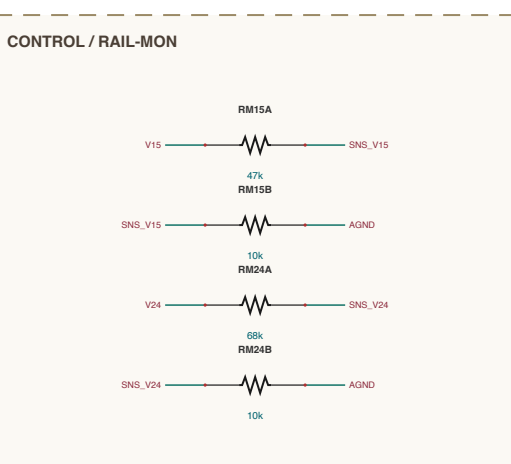
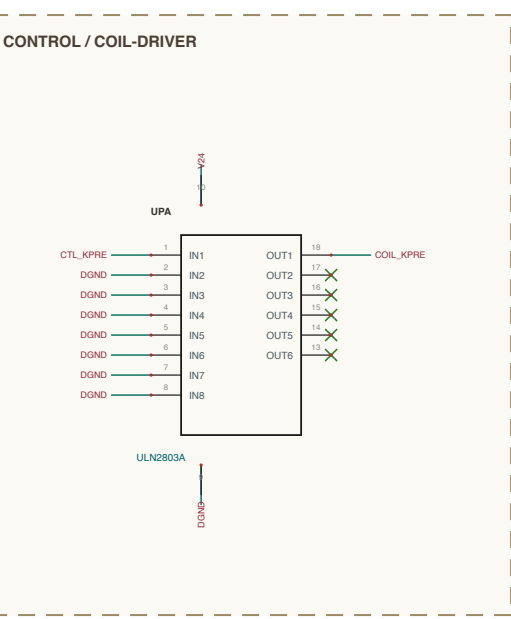
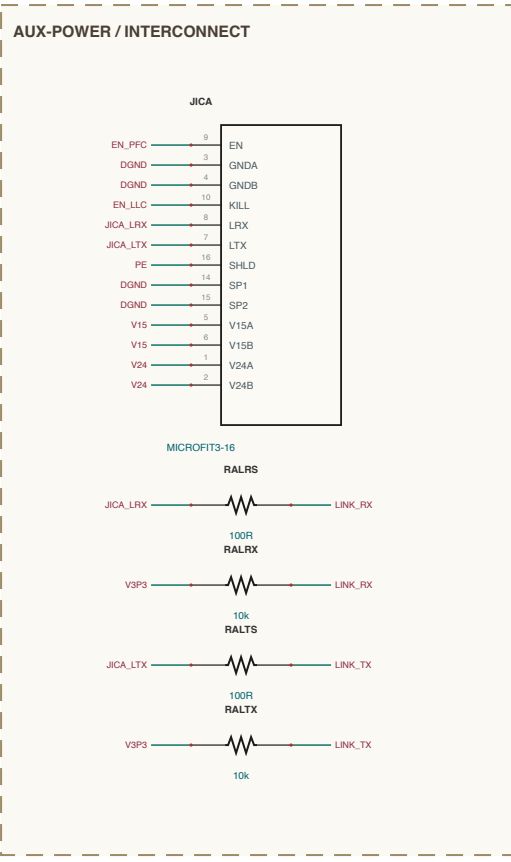
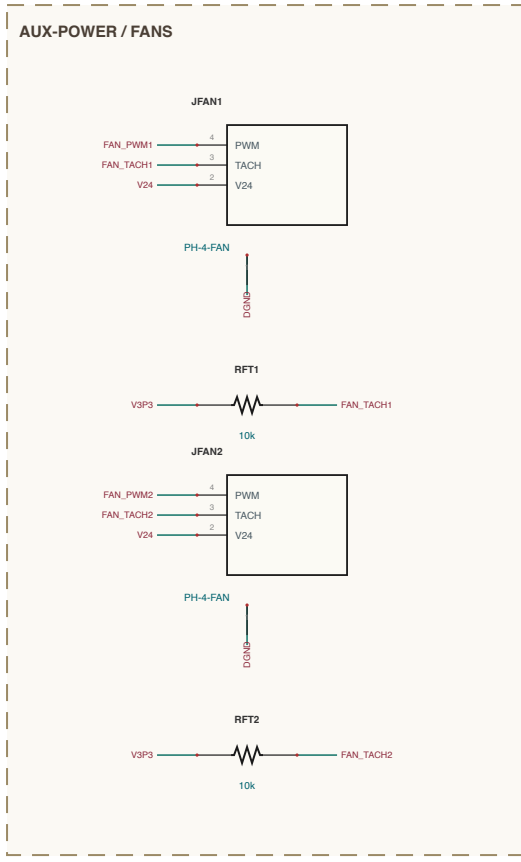
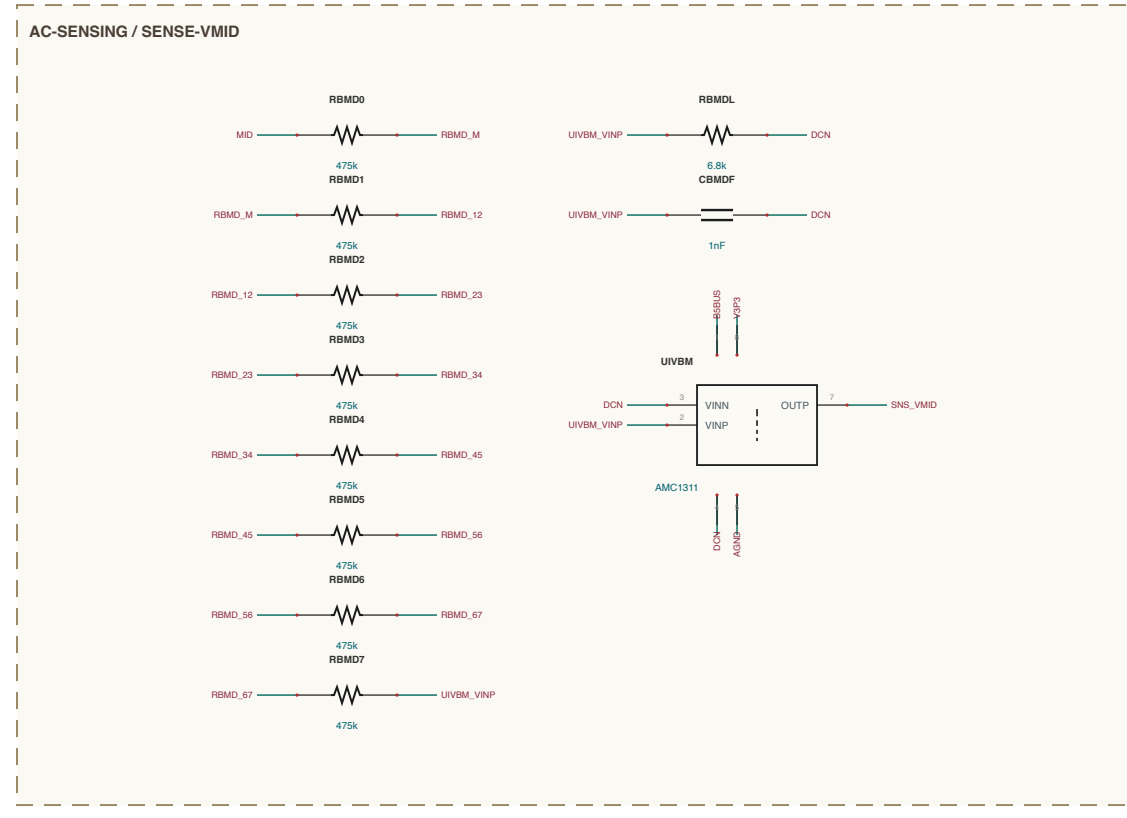
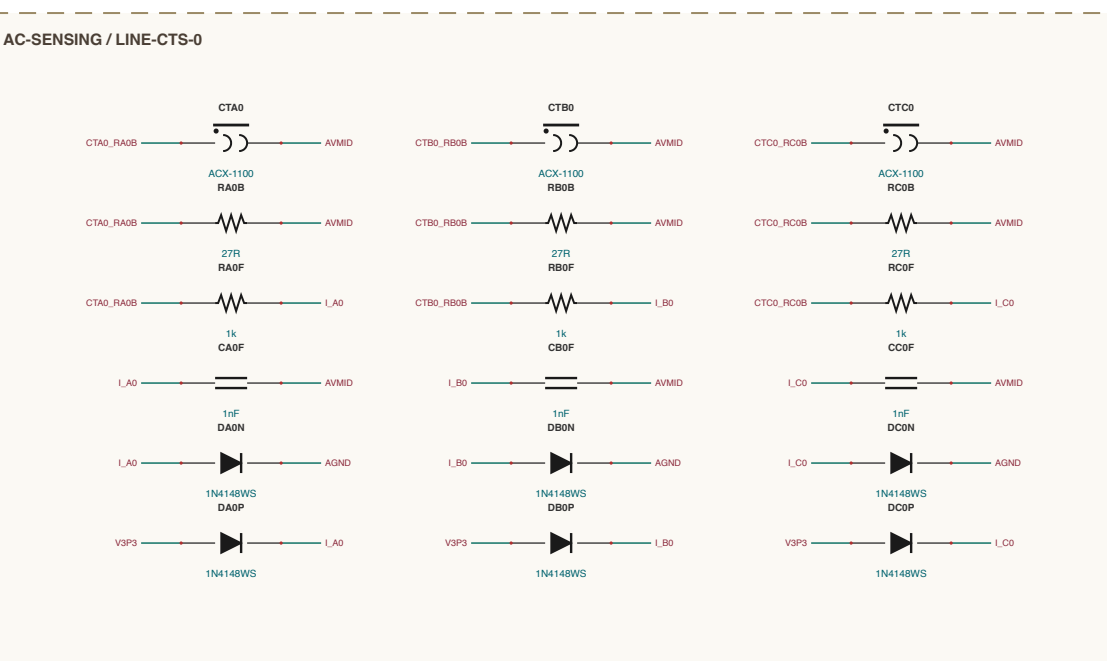
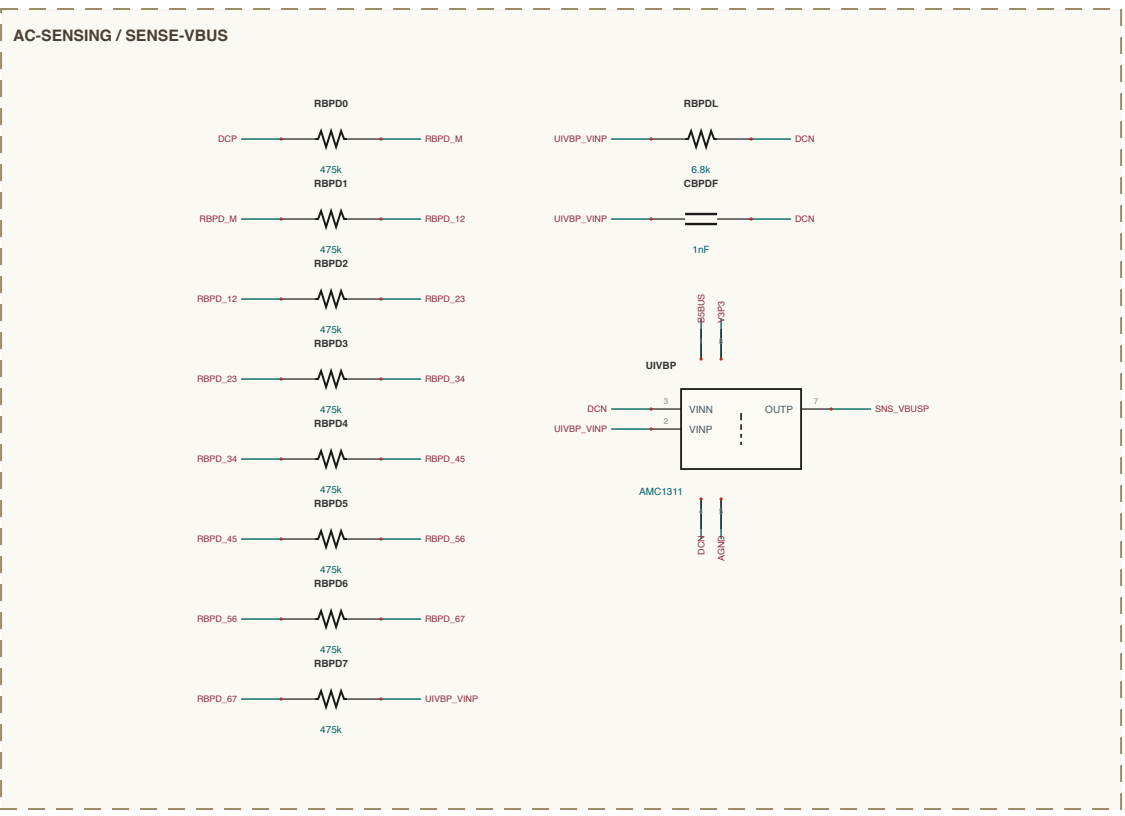
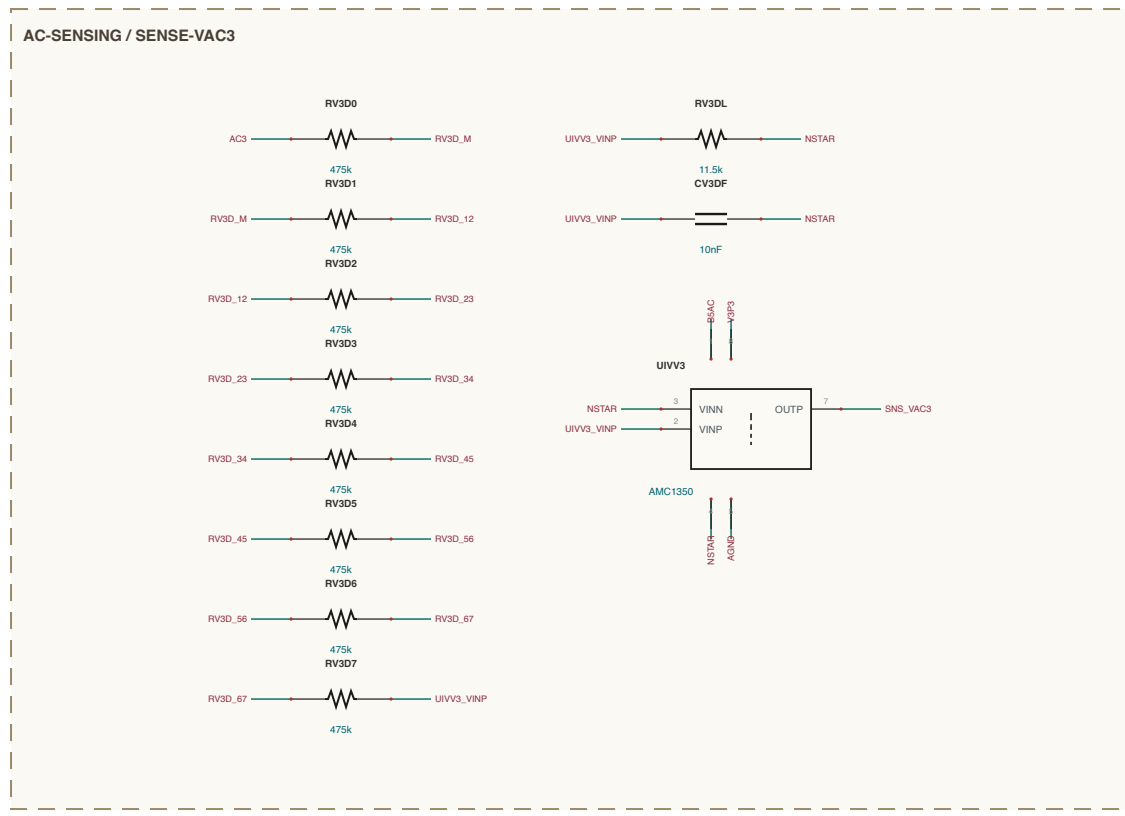
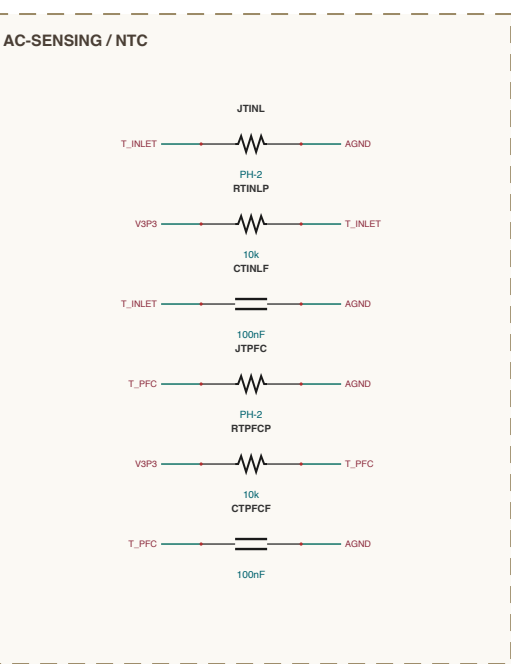
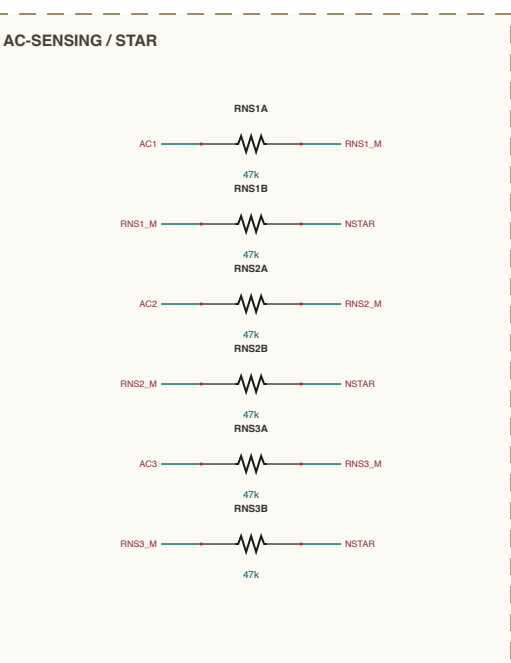
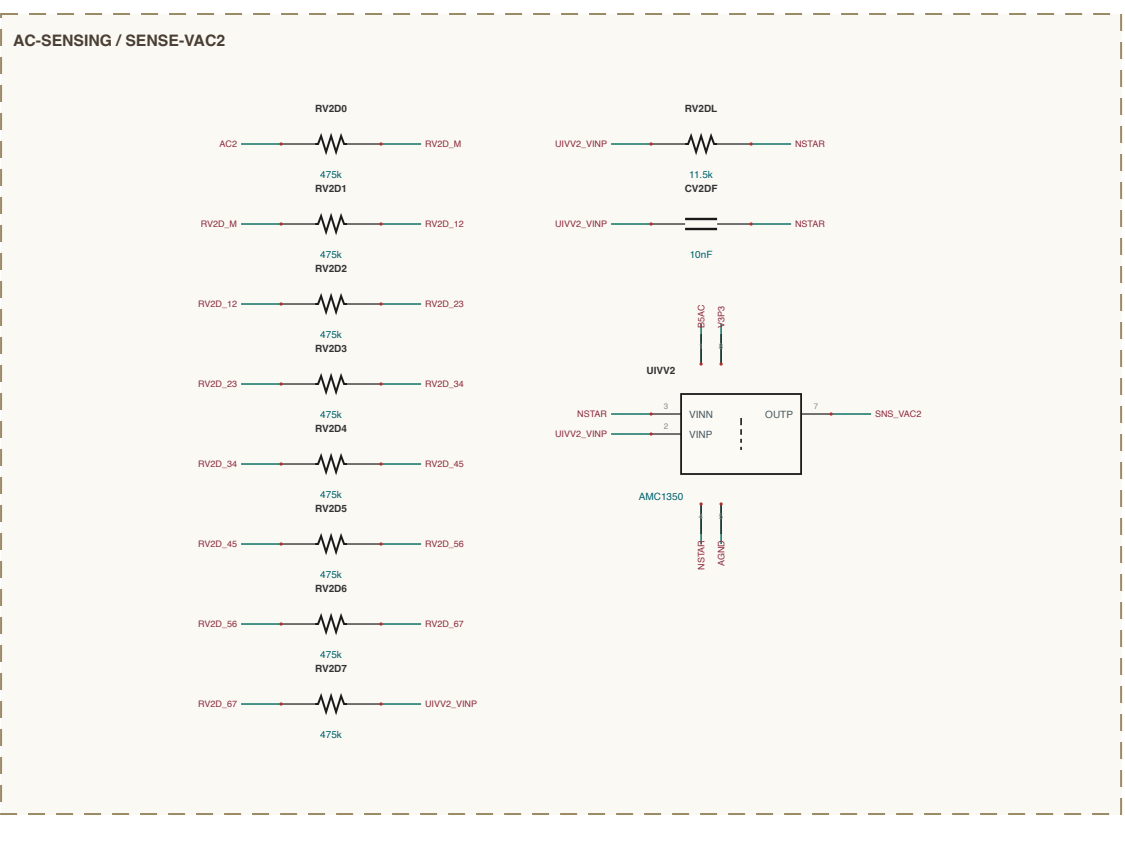
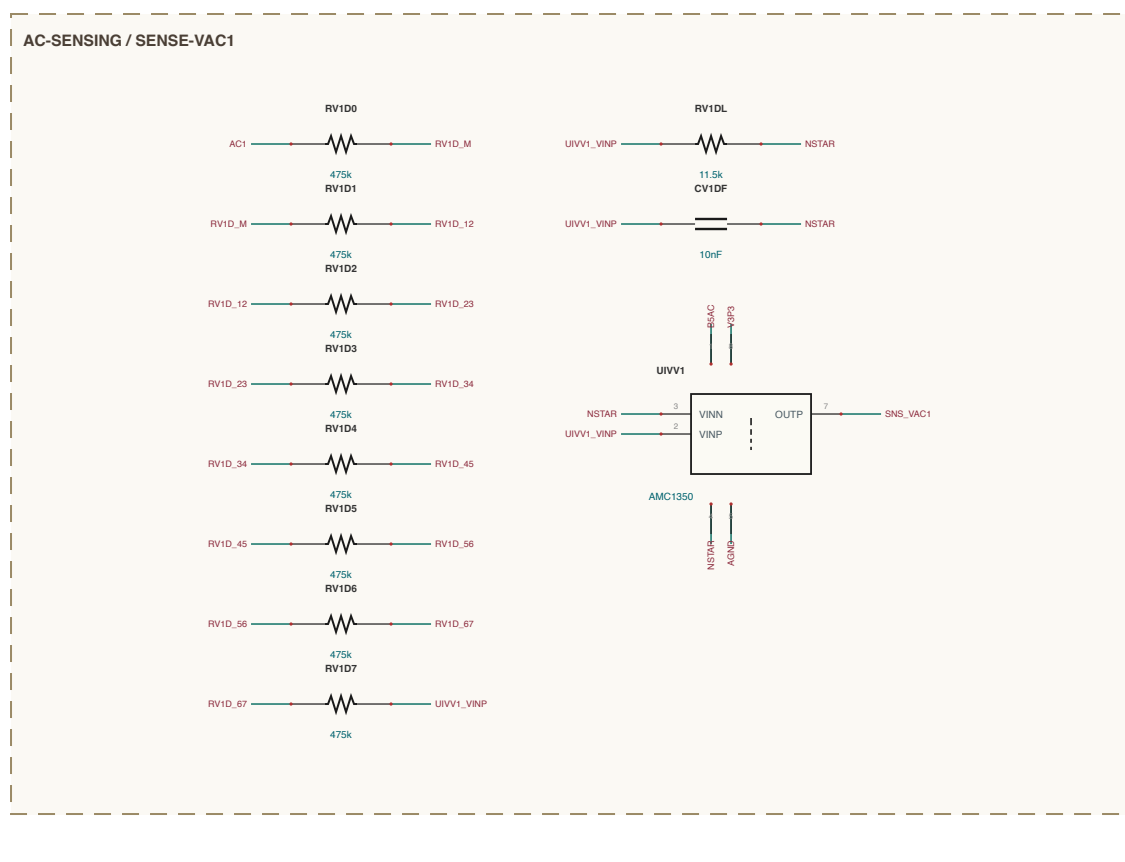
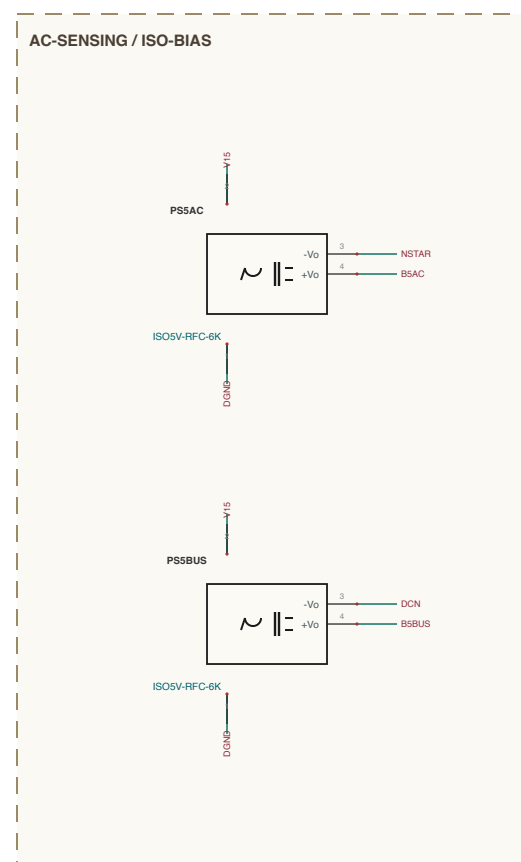
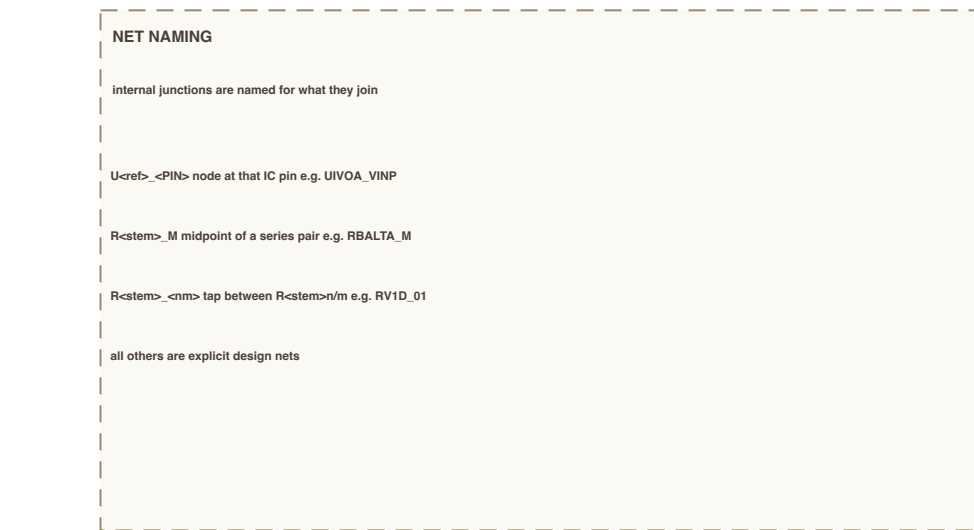
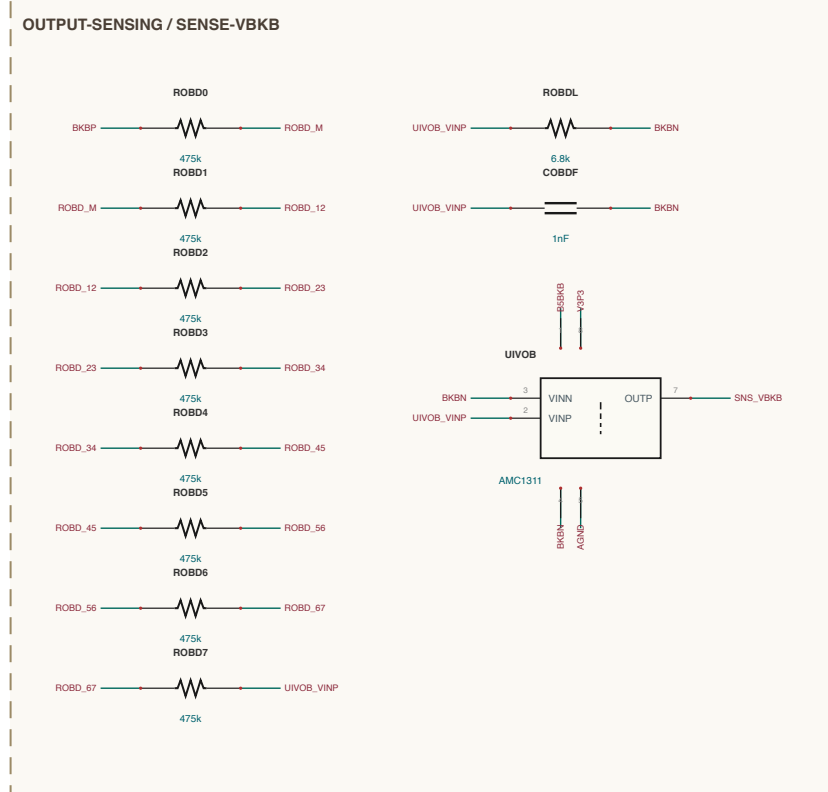


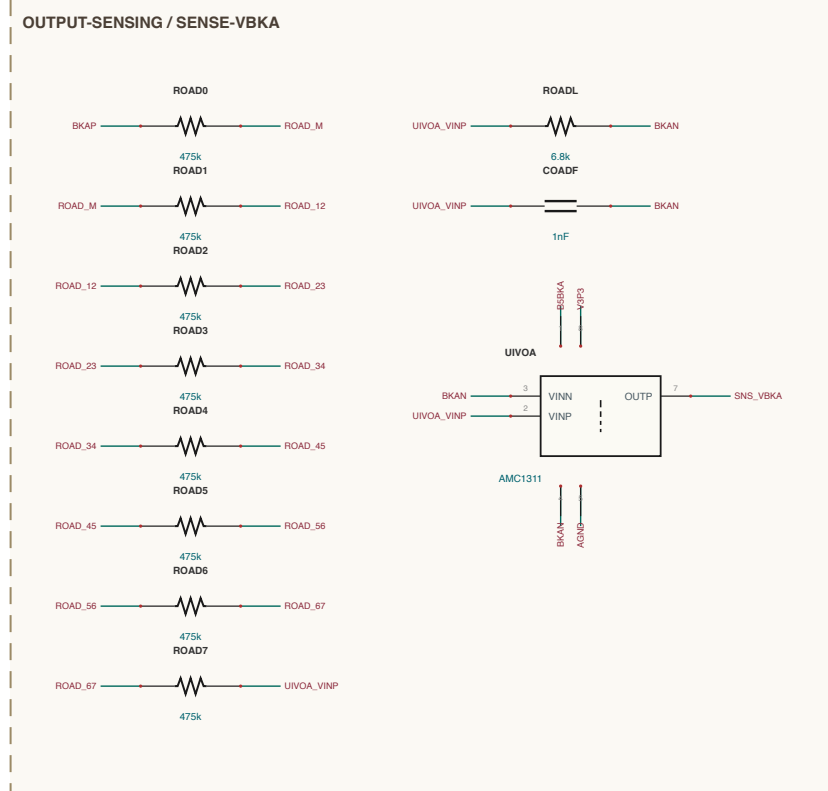

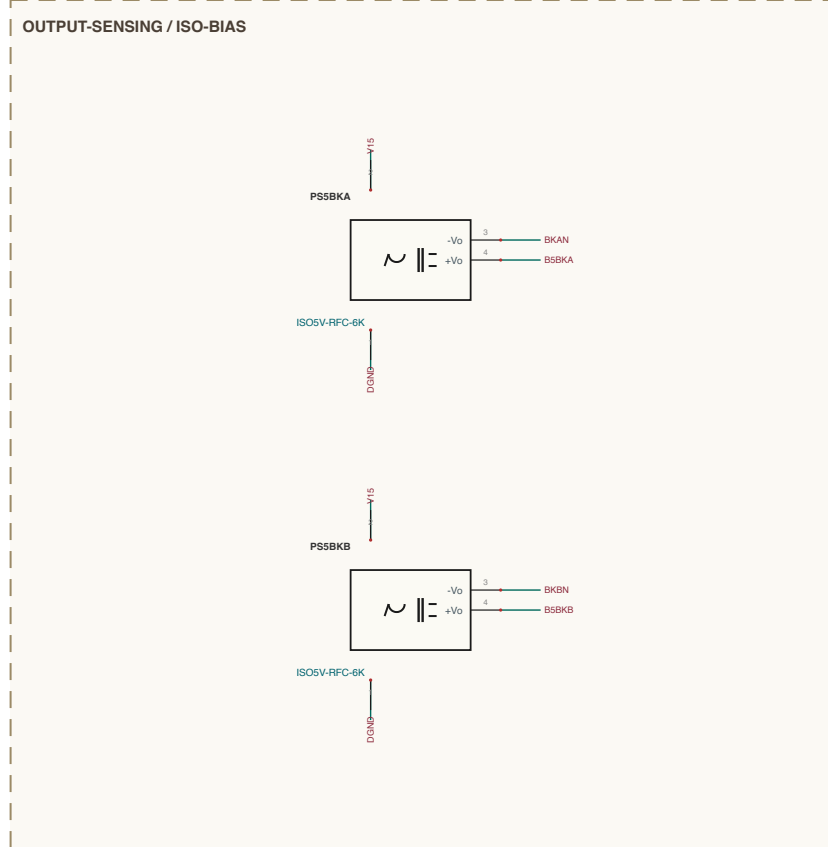

SHEET INDEX

36100 DC DC (upper) : 1 of 3

OUTPUT-SENDER - 6 sections

BANKS-SP - 4 sections

LLC-LEDS - 4 sections



CONTROL - 3 sections

LLC-TANKS - 3 sections

COMMON - 2 sections

in D.3 - 12 sections - 382 components



UCAR2					
V3P3	6	pin6	pin55	59	AIN7
WDI	11	pin11	pin56	58	AIN6
NRST_CARD	14	pin14	pin59	59	DO0
AIN9	15	pin15	pin60	60	DO1
AIN10	16	pin16	pin62	62	DO5
AIN8	17	pin17	pin63	63	DGND
AVMID	18	pin18	pin64	64	V3P3
AIN0	20	pin20	pin65	65	PWM5
AIN1	21	pin21	pin66	66	PWM11
AIN2	22	pin22	pin67	67	PWM4
DGND	23	pin23	pin68	68	PWM10
V3P3	24	pin24	pin69	69	PWM0
AIN11	25	pin25	pin70	70	PWM6
AIN12	26	pin26	pin71	71	PWM1
AIN3	27	pin27	pin72	72	PWM7
EN_B	28	pin28	pin73	73	D4
AIN4	29	pin29	pin74	74	DGND
AIN5	30	pin30	pin75	75	V3P3
TSNS0	32	pin32	pin76	76	SWDIO_CARD
TSNS1	33	pin33	pin77	77	SWCLK_CARD
DO6	34	pin34	pin78	78	D15
AGND	35	pin35	pin81	81	DRV_RDY
VDDA_CARD	36	pin36	pin82	82	EN_A
VDDA_CARD	37	pin37	pin84	84	HM15
ROLE1	38	pin38	pin85	85	D10
HM10	40	pin40	pin86	86	D11
HM11	41	pin41	pin87	87	LINK_TX
HM12	42	pin42	pin88	88	LINK_RX
D12	43	pin43	pin89	89	DO2
D13	44	pin44	pin90	90	ROLE0
HM13	45	pin45	pin91	91	HM16
FLT	47	pin47	pin92	92	CAN_RX
DGND	48	pin48	pin93	93	CAN_TX
V3P3	49	pin49	pin94	94	DO3
HM14	50	pin50	pin95	95	BOOT0_CARD
PWM2	51	pin51	pin96	96	DO4
PWM8	52	pin52	pin99	99	DGND
PWM3	53	pin53	pin100	100	V3P3
PWM9	54	pin54			

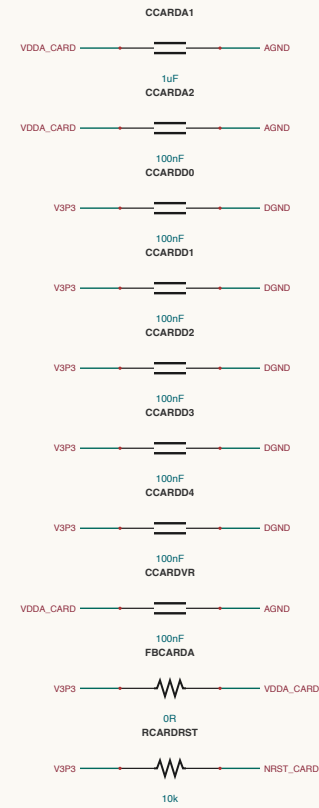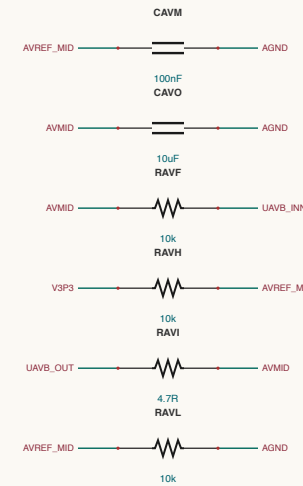[illegible]

Pin configuration diagram for the UANDCARD module. The module is shown as a black rectangle with pins on the left and top. The pins are labeled as follows:

- Pin 1: EN_A
- Pin 2: EN_B
- Pin 3: DGND
- Pin 4: EN_B
- Pin 5: DGND
- Pin 6: DGND
- Pin 7: WDO_CARD
- Pin 8: DGND
- Pin 9: DGND
- Pin 10: C1
- Pin 11: C2
- Pin 12: C3
- Pin 13: GATE_EN

A small inset shows the module's footprint on a PCB with pins 1 through 13 labeled.

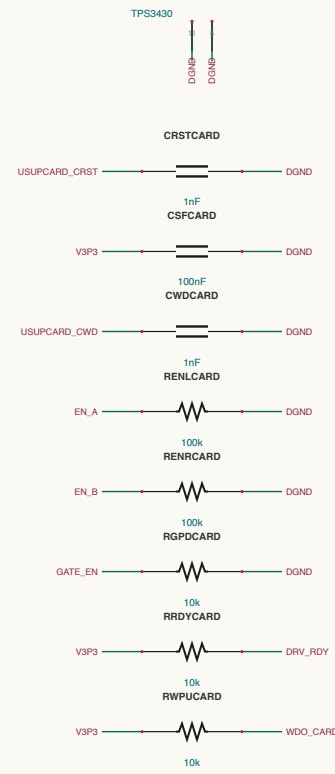


The diagram shows the J50WDCARD connector with the following connections:

- SWCLK_CARD** (green line) connected to pin **3** (CLK).
- SWDIO_CARD** (green line) connected to pin **2** (DIO).
- NRST_CARD** (green line) connected to pin **4** (RST).
- VDD3** (red line) connected to the top of the connector.
- DDR1x5-2.54** (blue line) connected to the bottom of the connector.
- DON#** (red line) connected to the bottom of the connector.

Below the connector, the following components are shown:

- CCARDRST** label above a capacitor.
- Capacitor value: **100nF**.
- Label: **RCARDBOOT**.
- Resistor connected between **NRST_CARD** and **BOOT0_CARD**.
- Resistor value: **10k**.

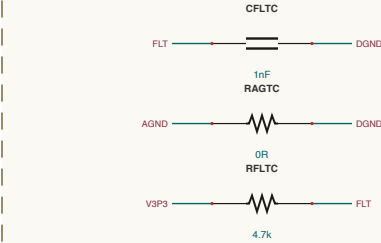

ROULED

V3P3 ————+————— ————+————— ROULE

10k

RROULE1

V3P3 ————+————— ————+————— ROULE

10k

[illegible]