
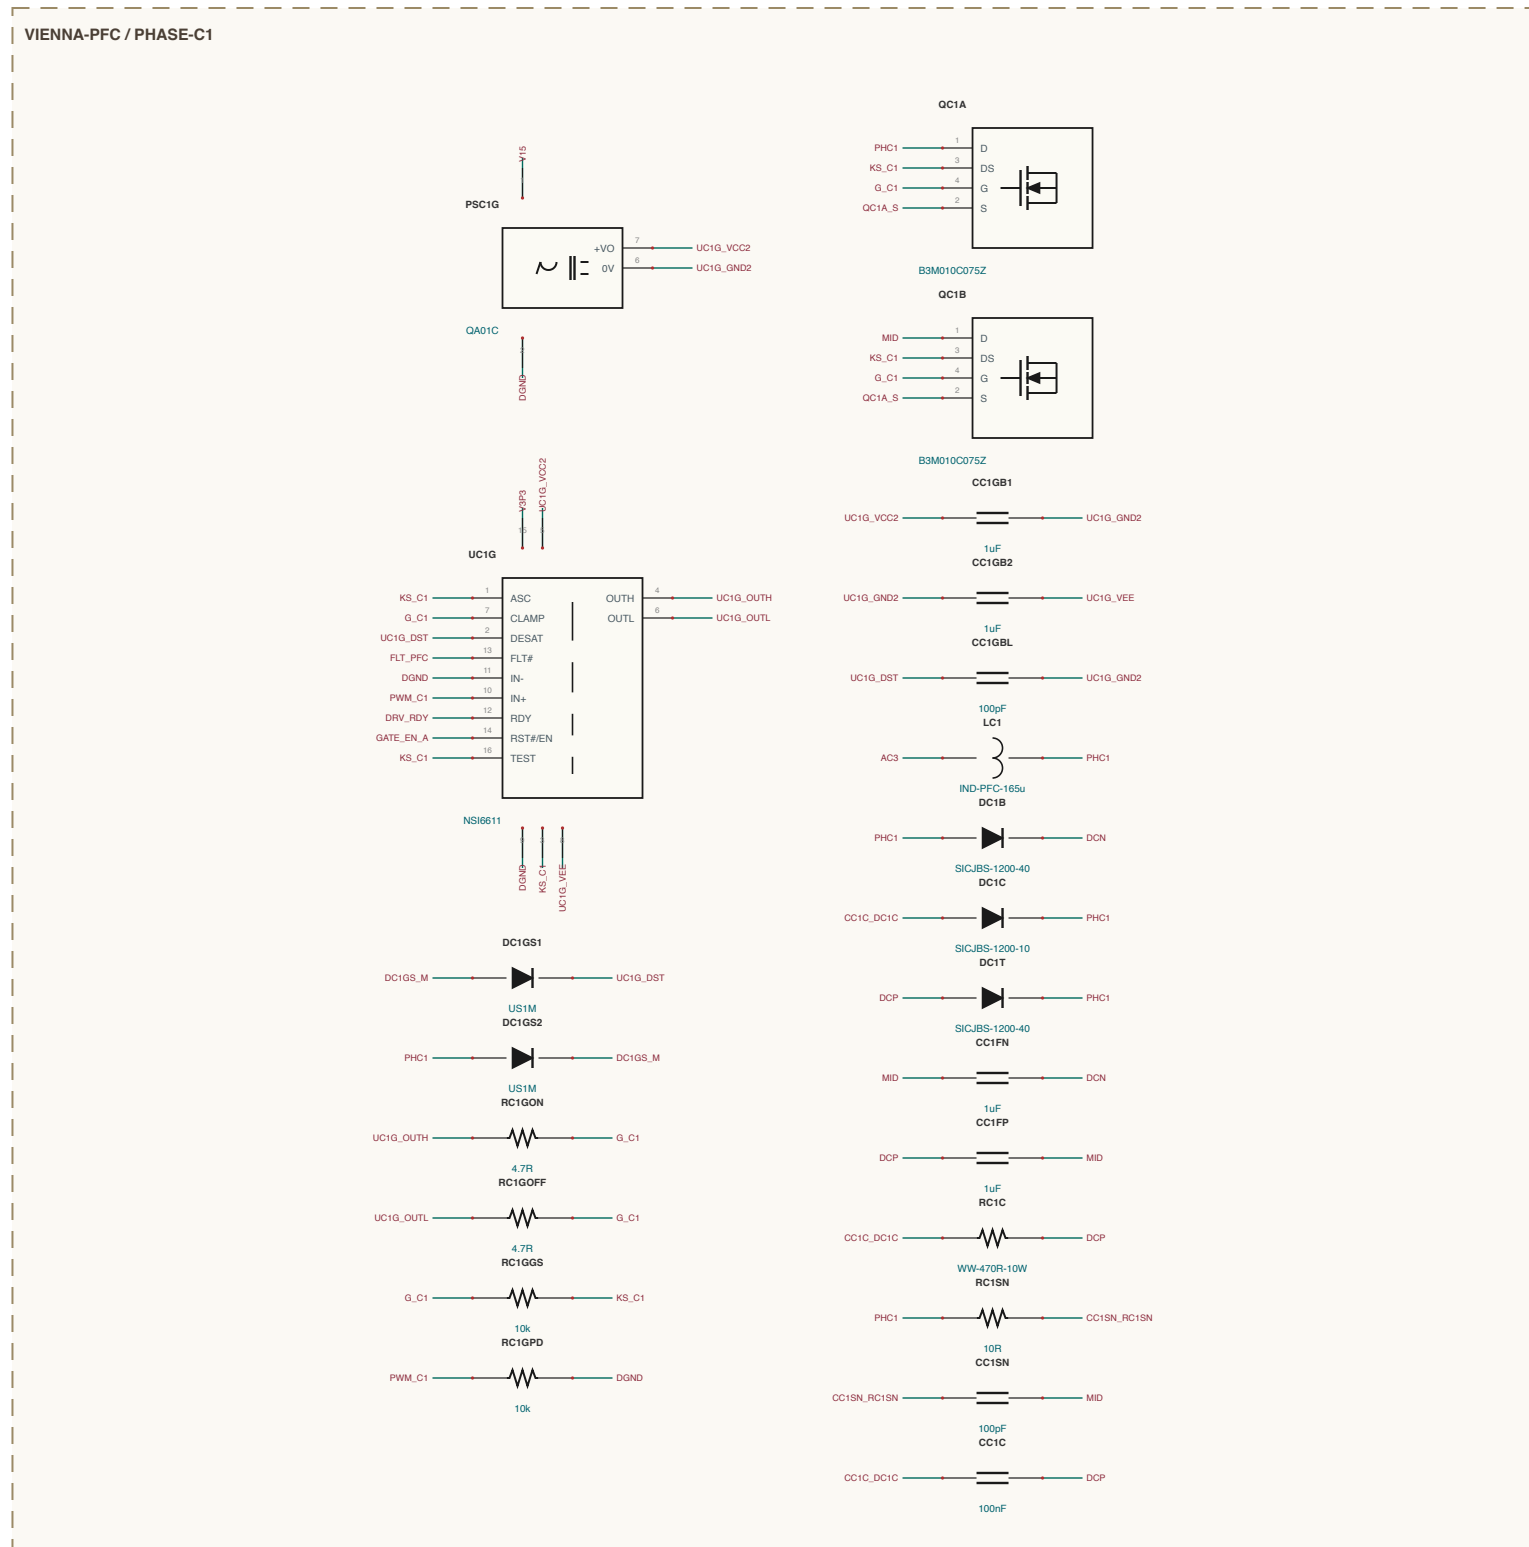
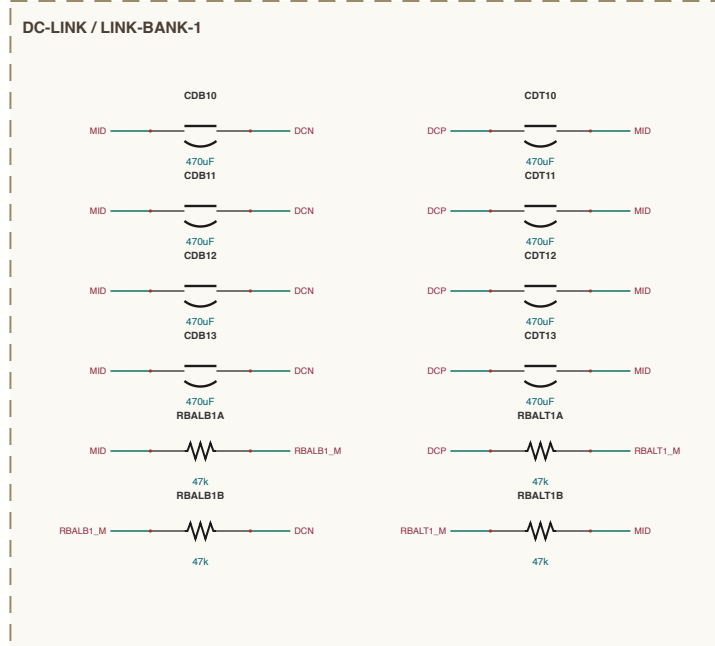
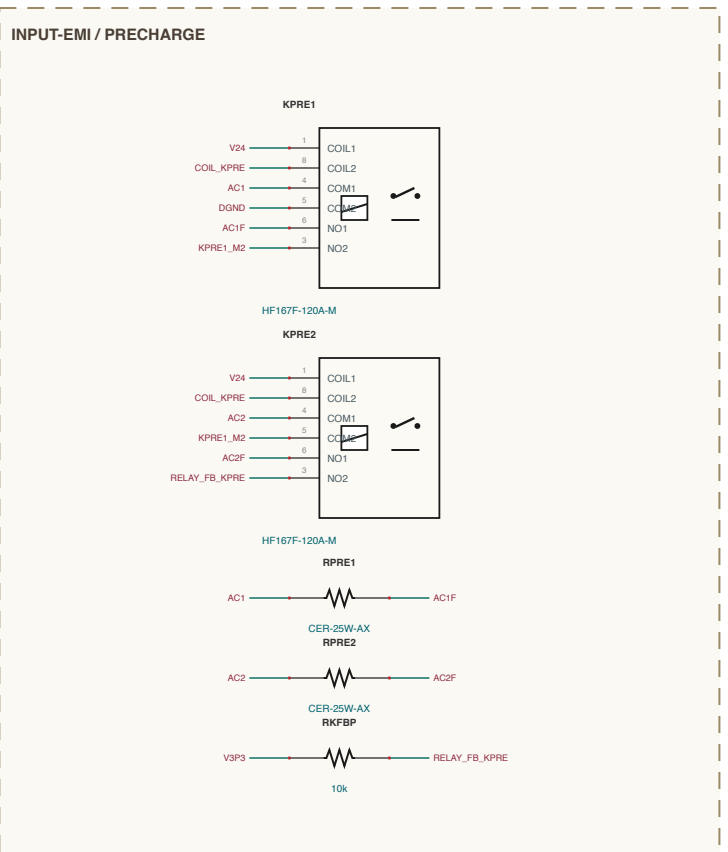
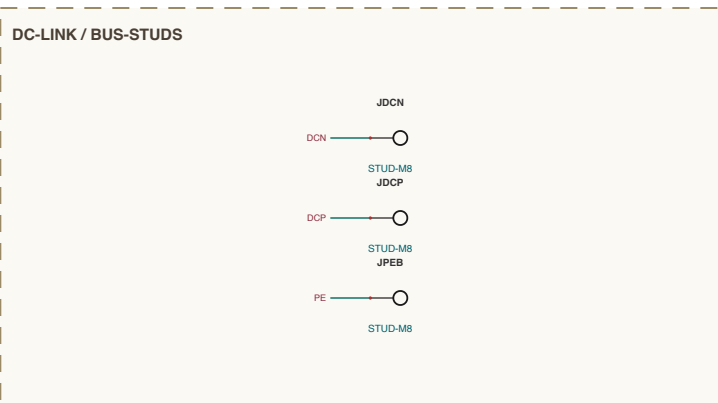
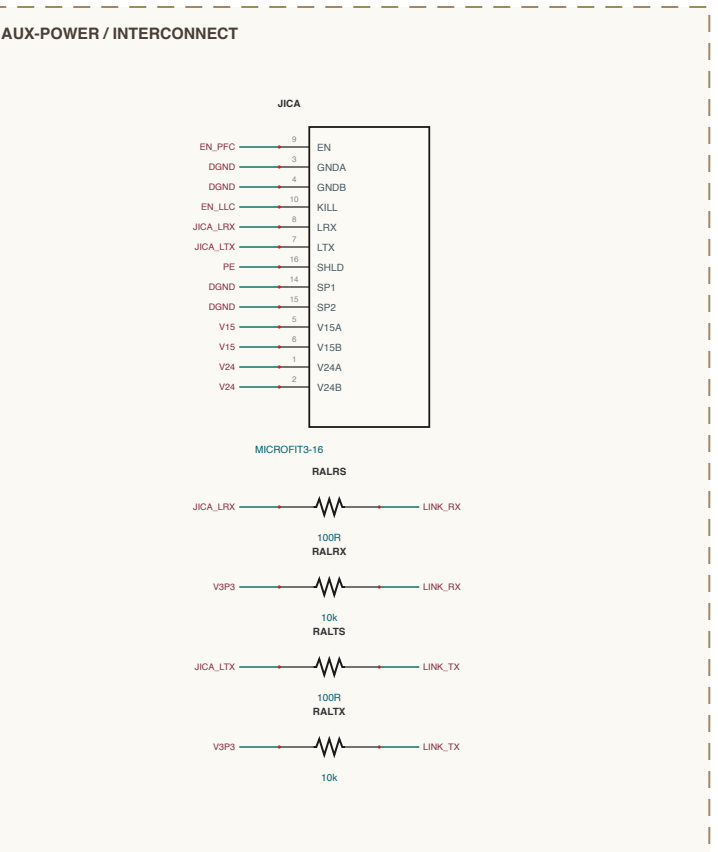
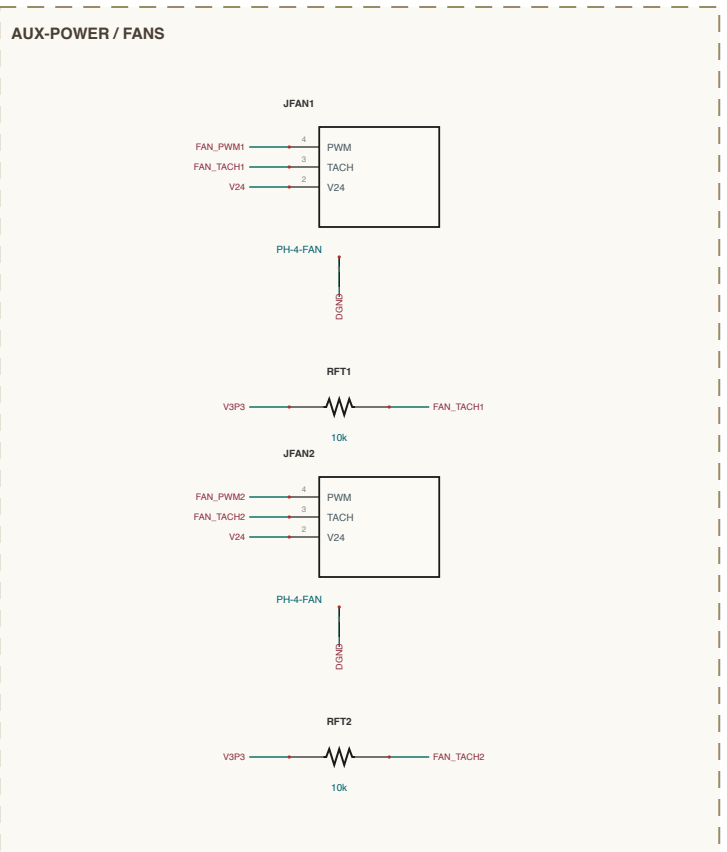
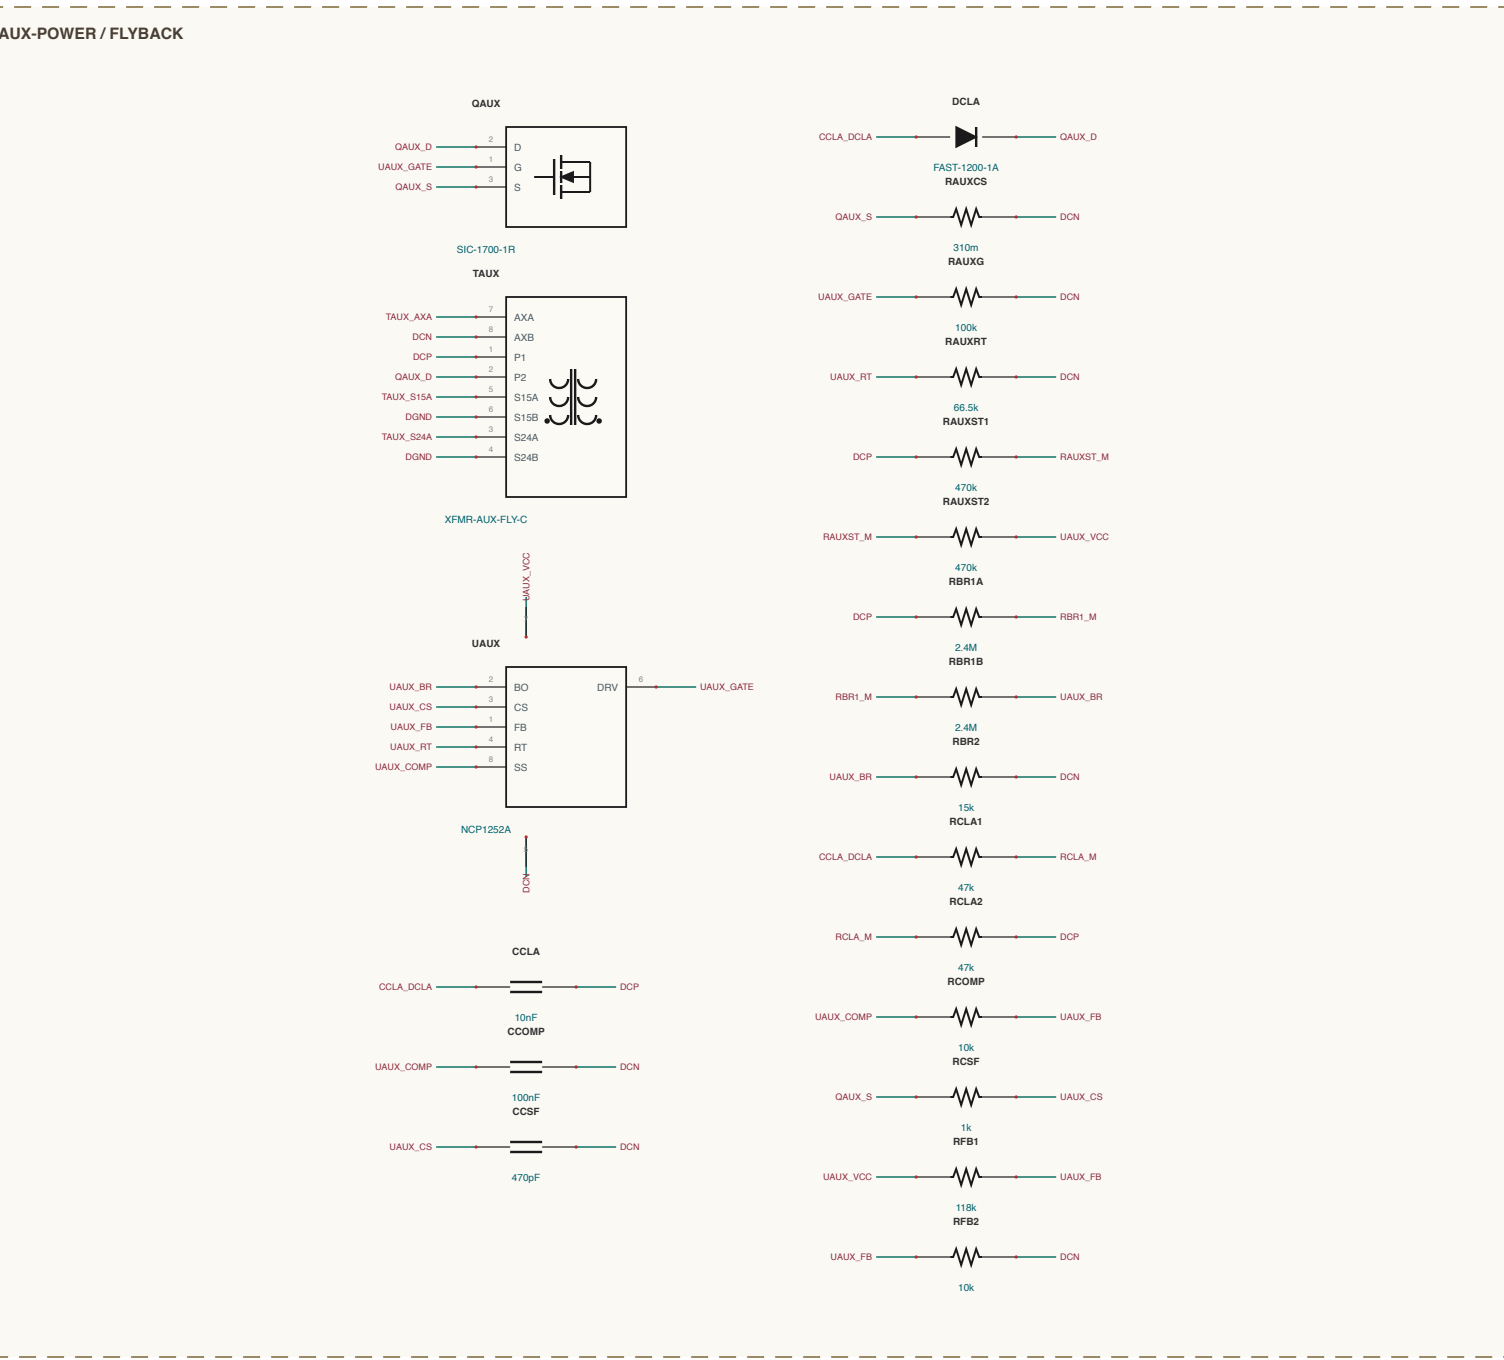
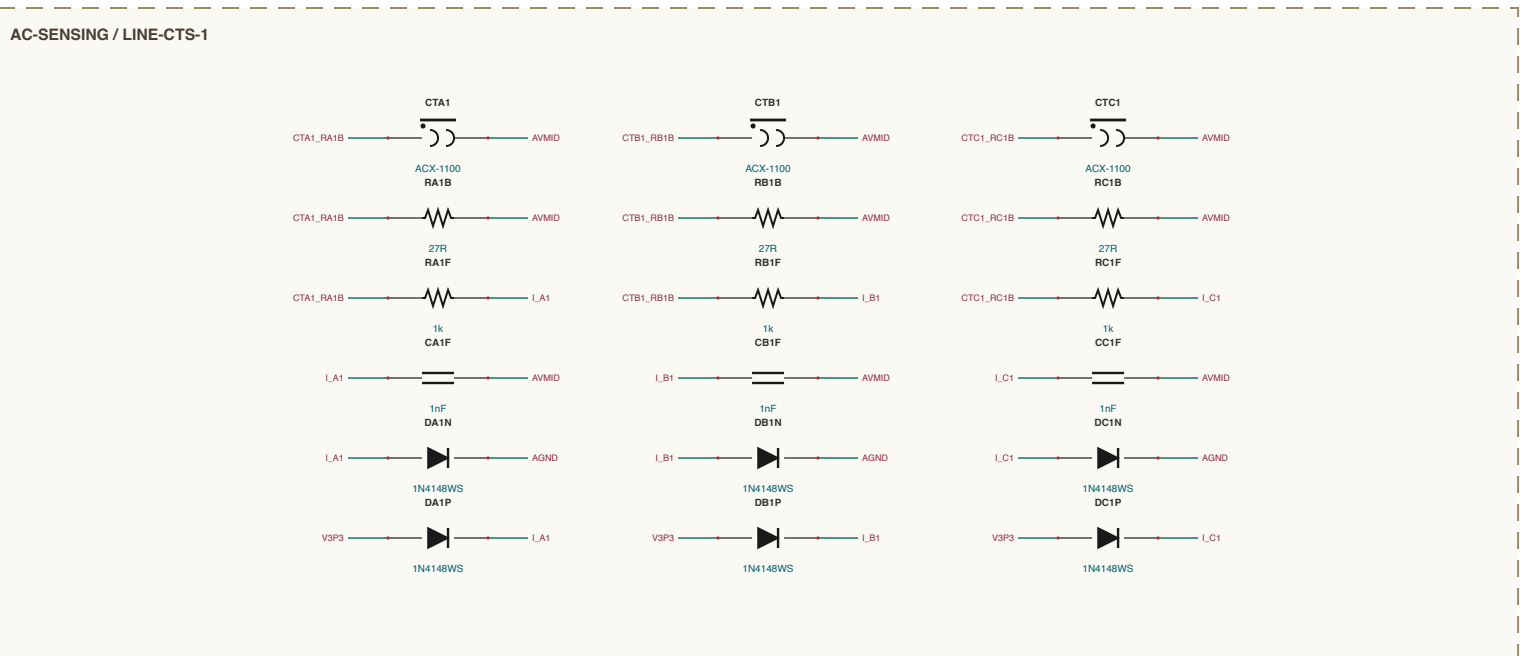
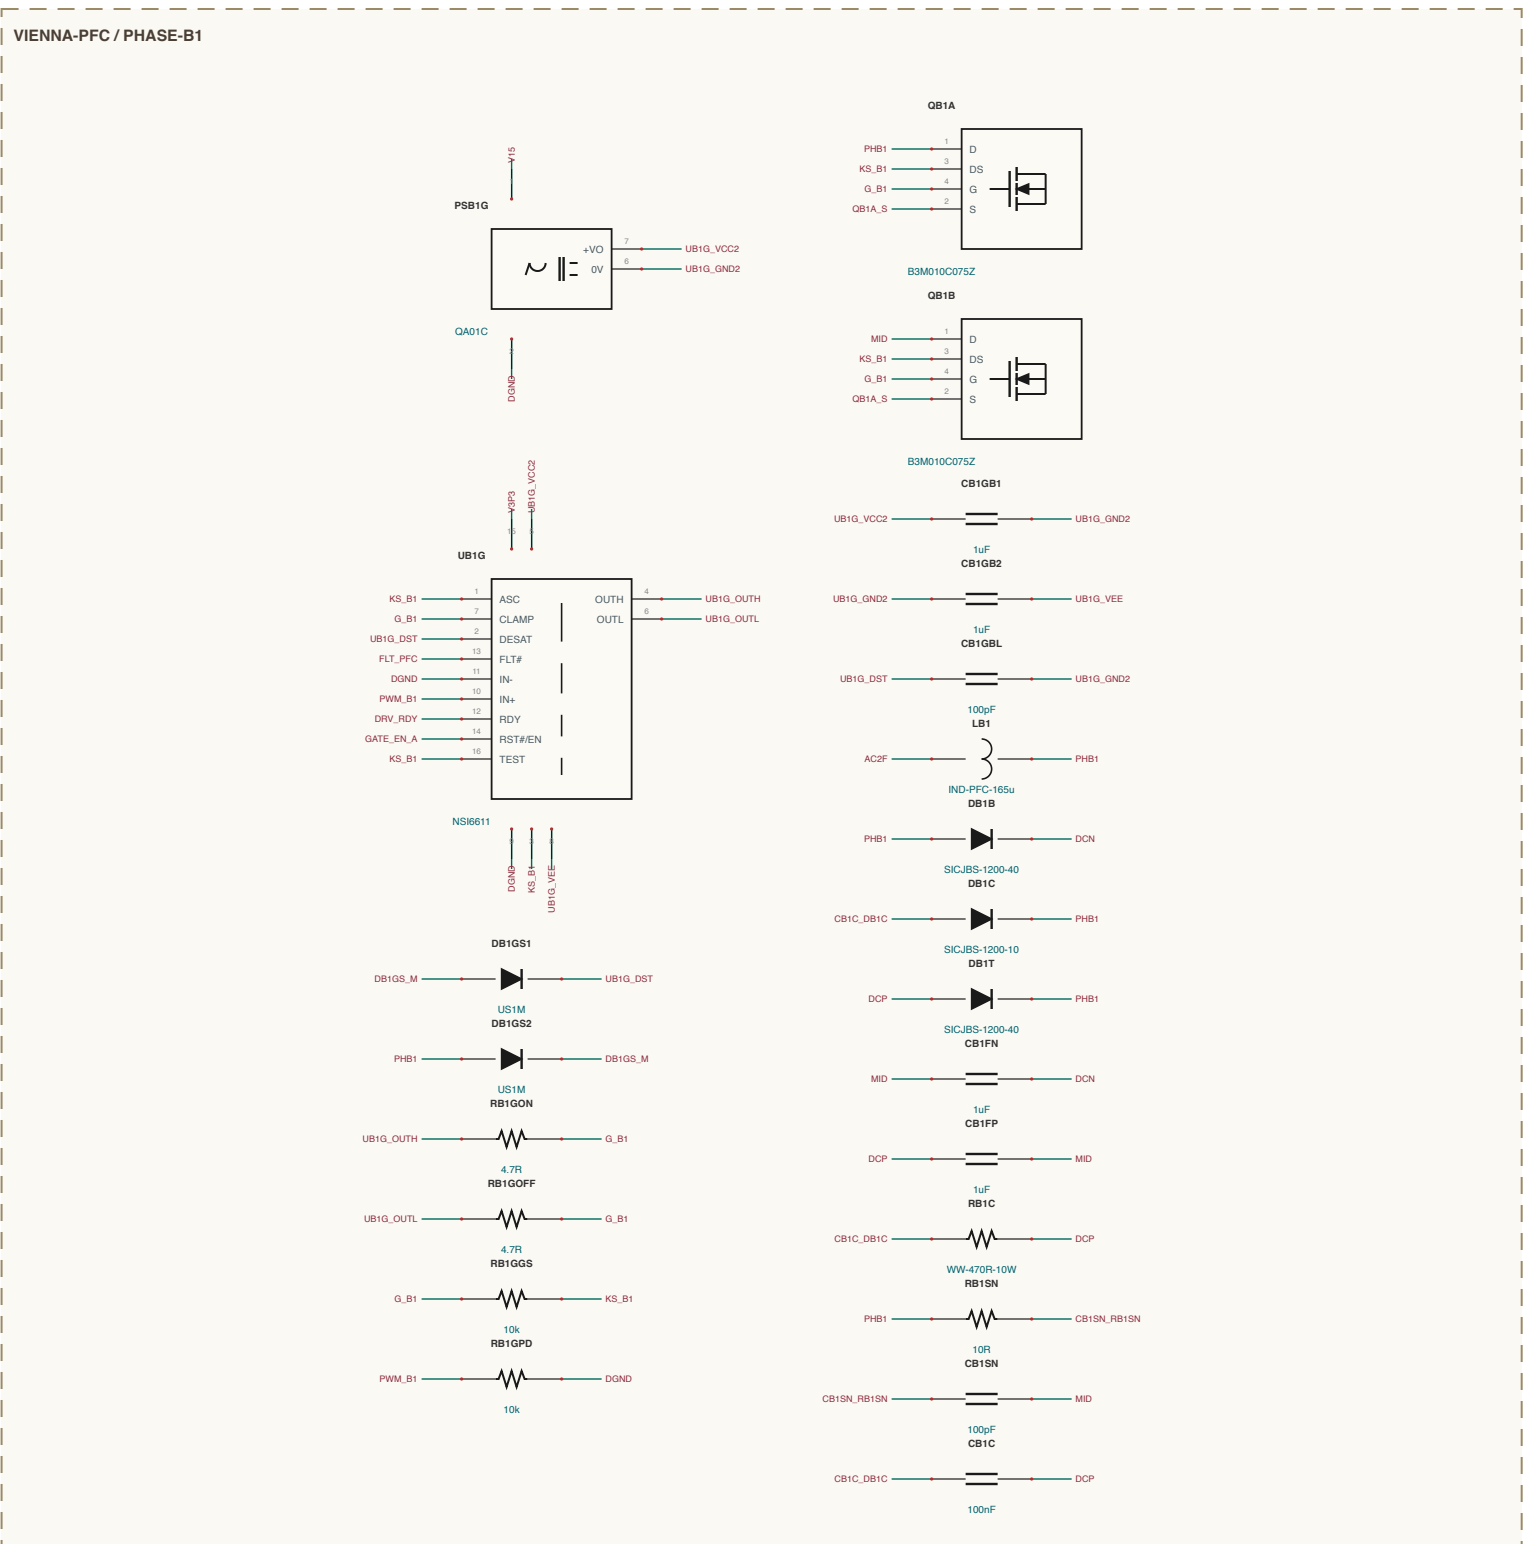
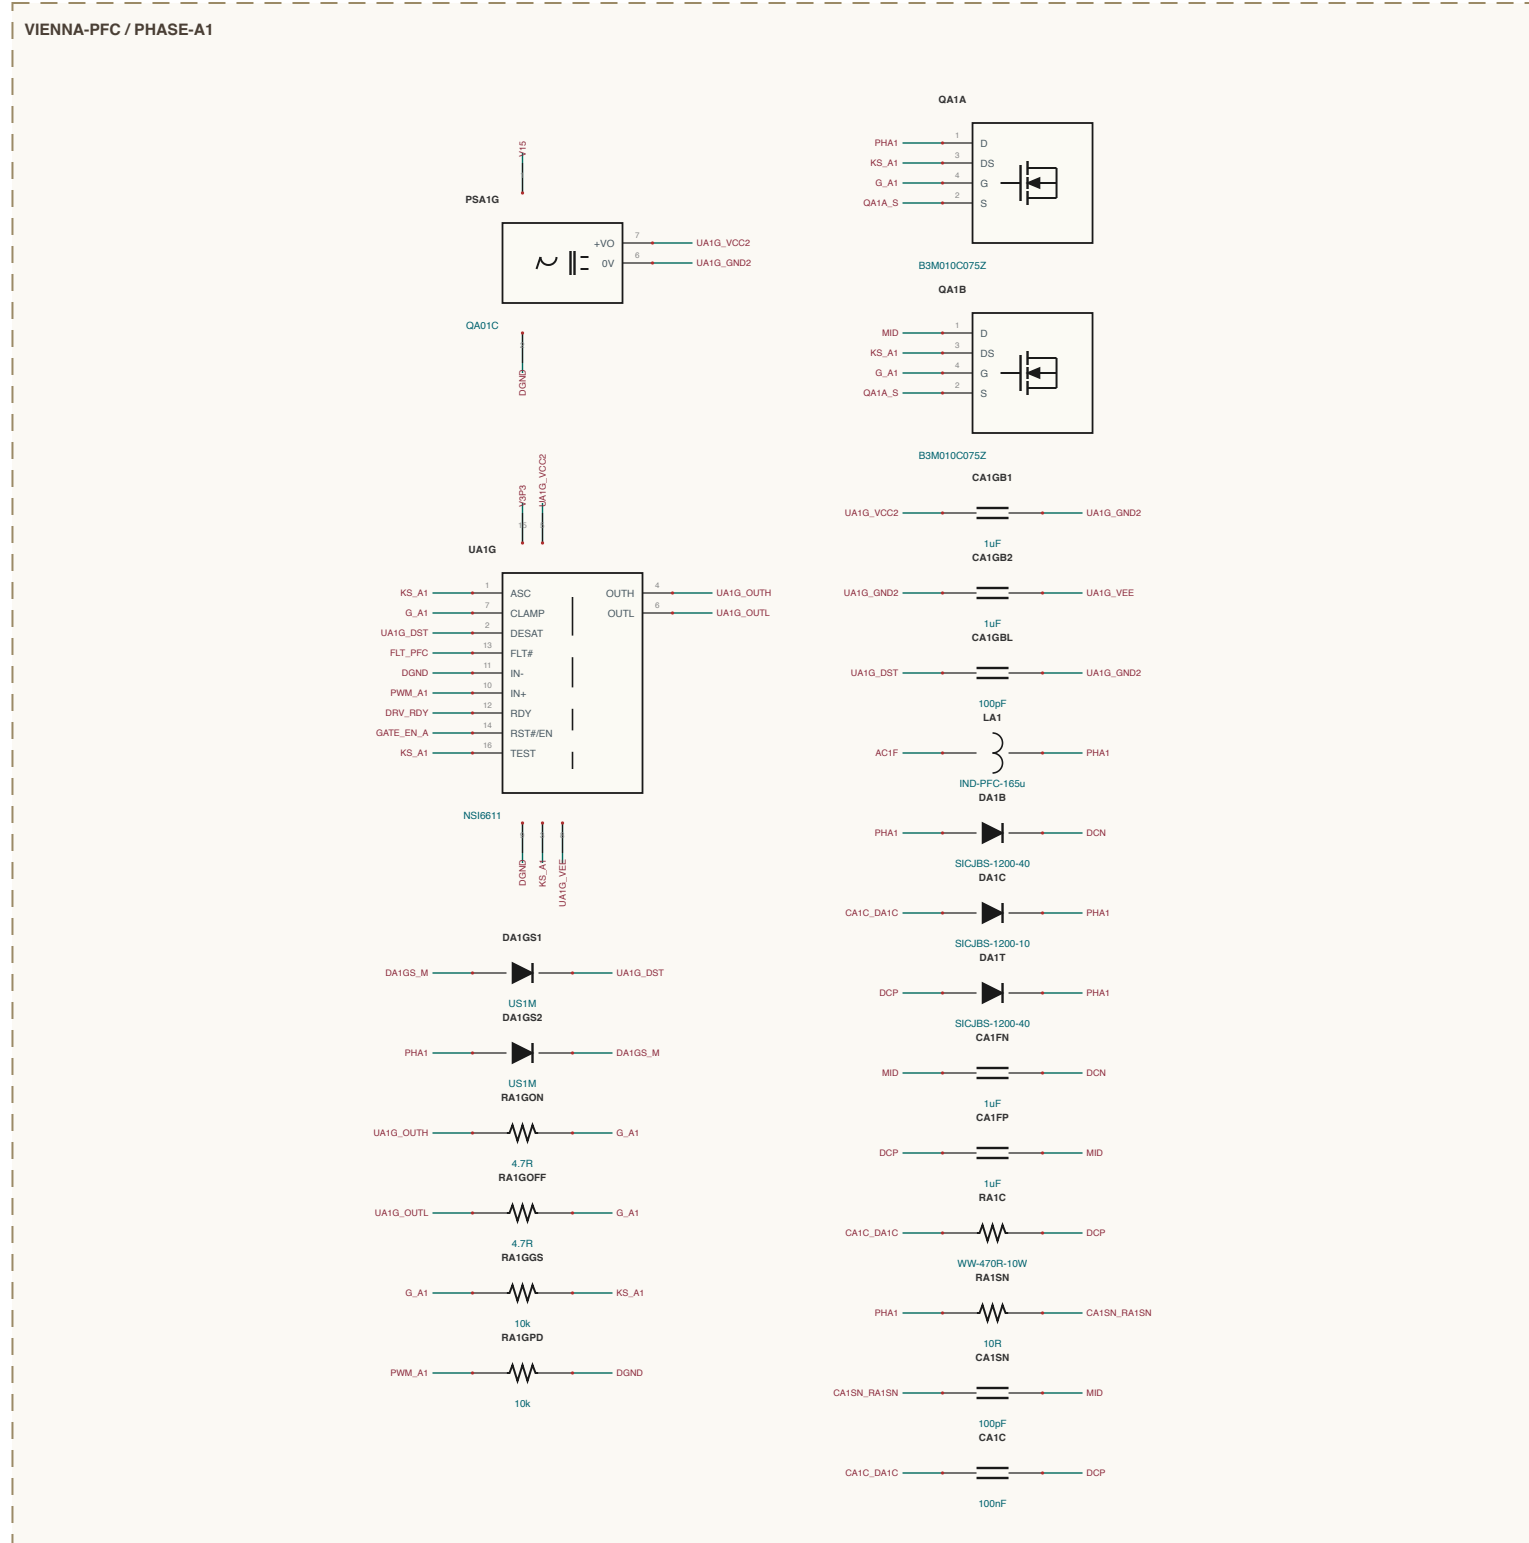
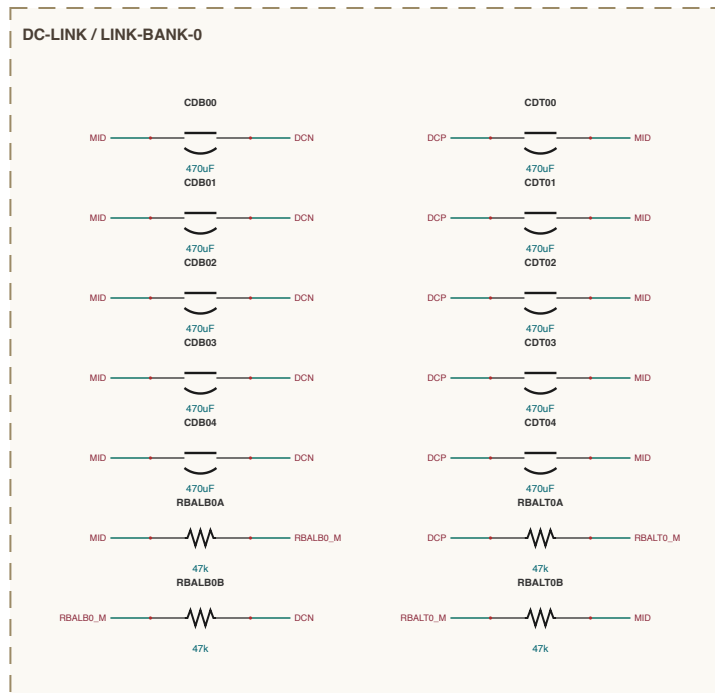
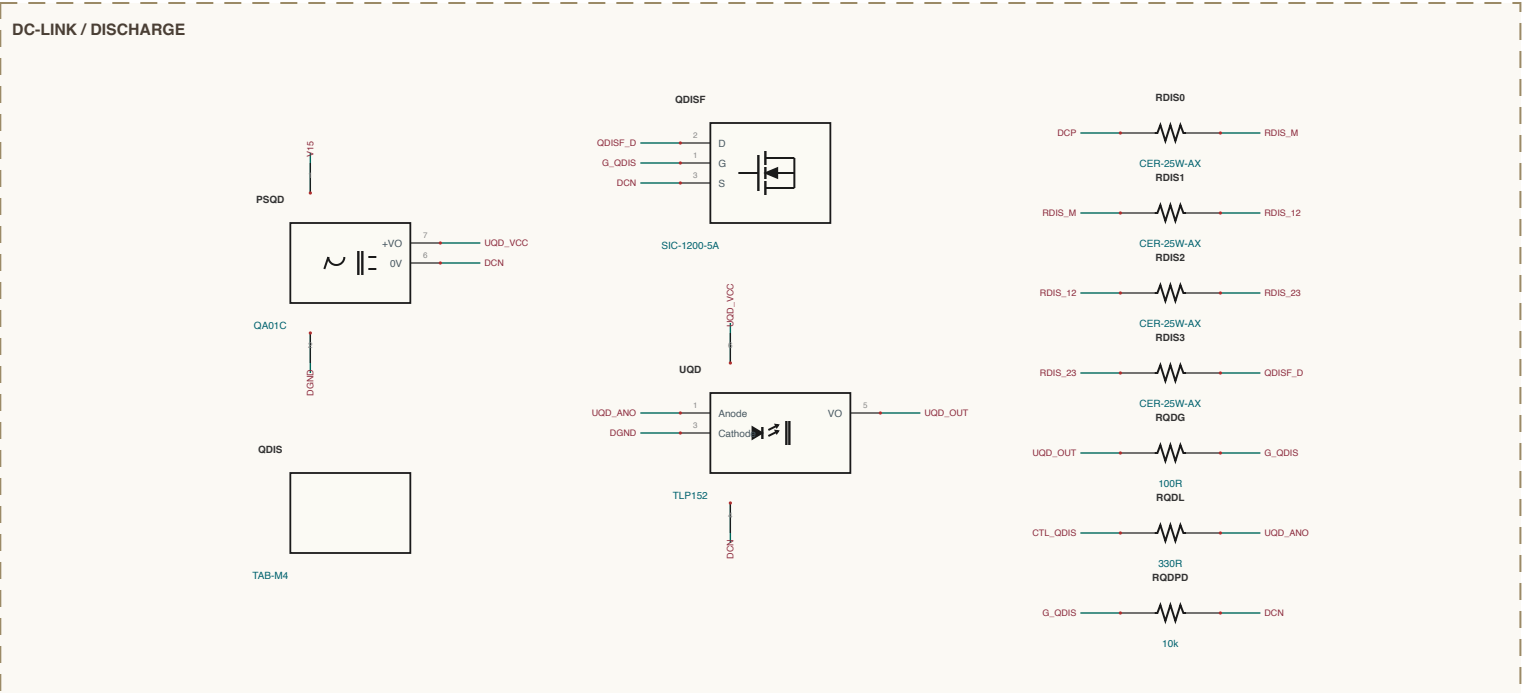
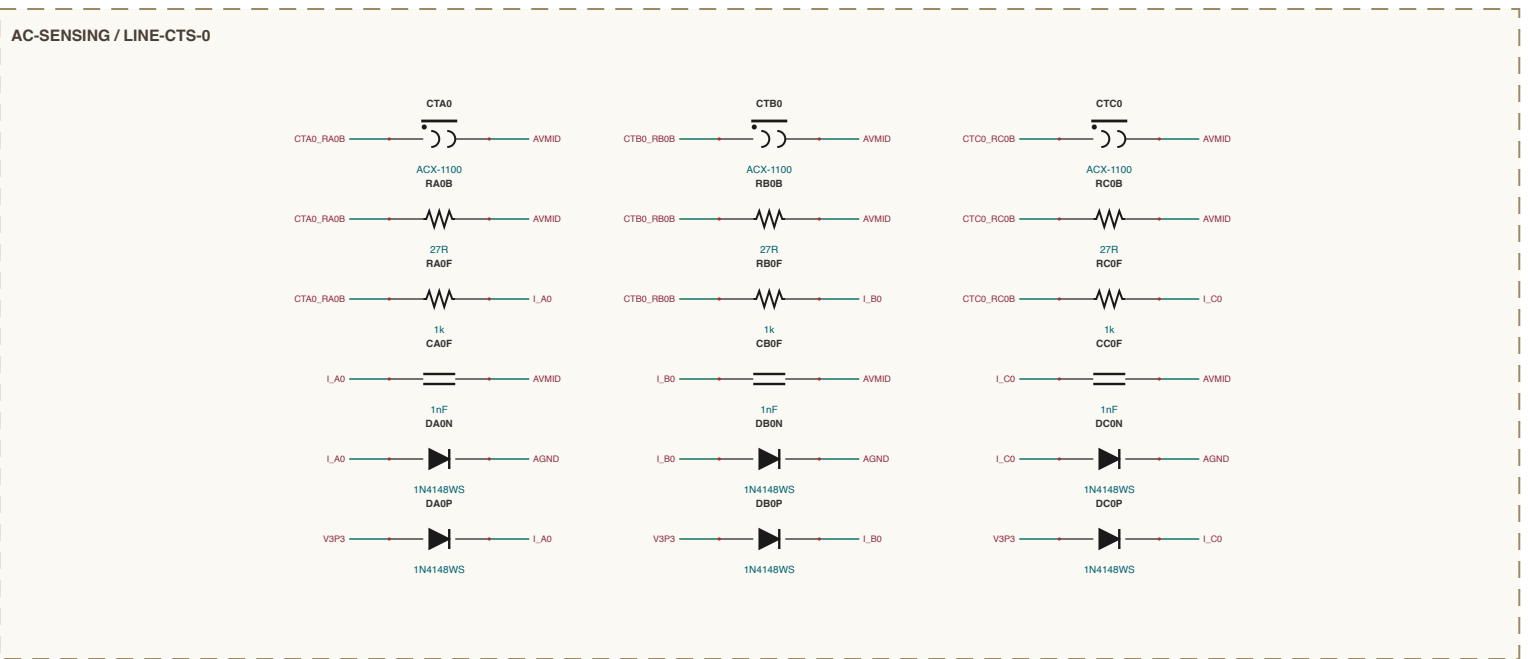
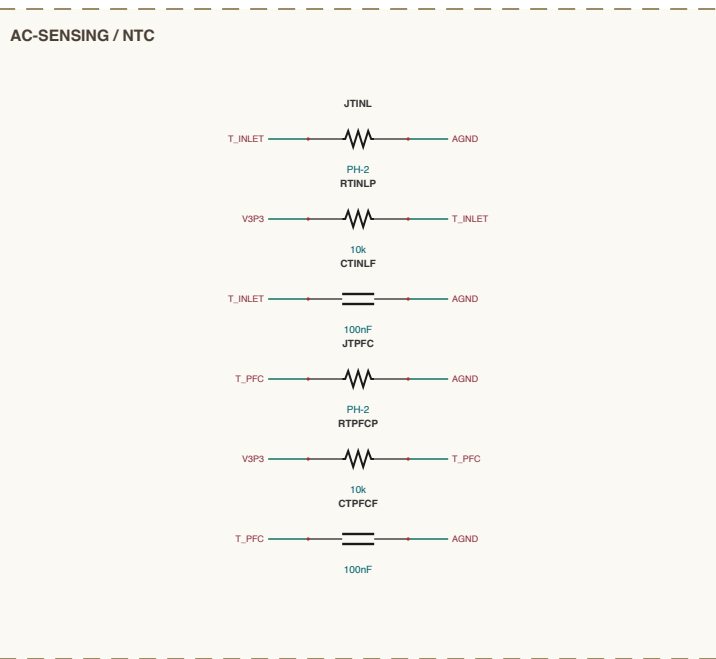
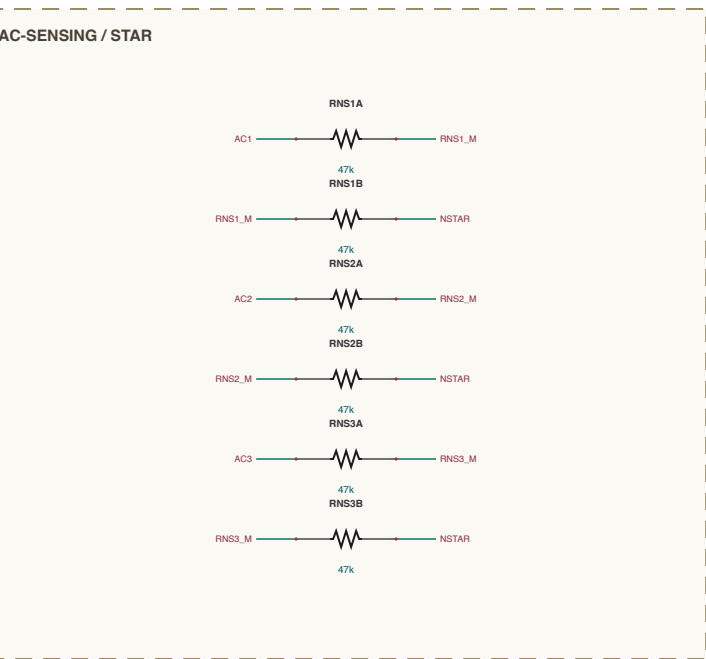
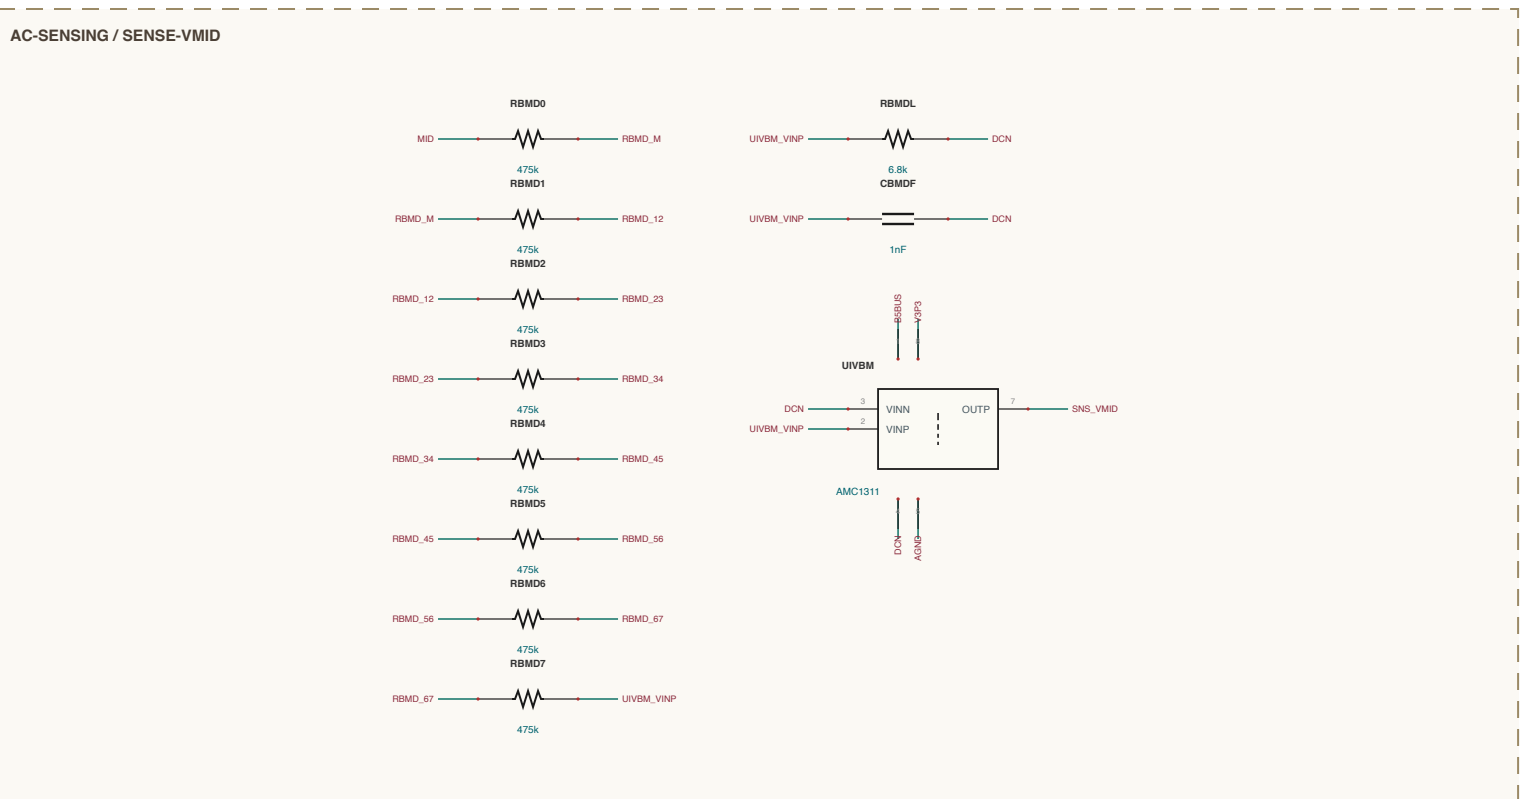
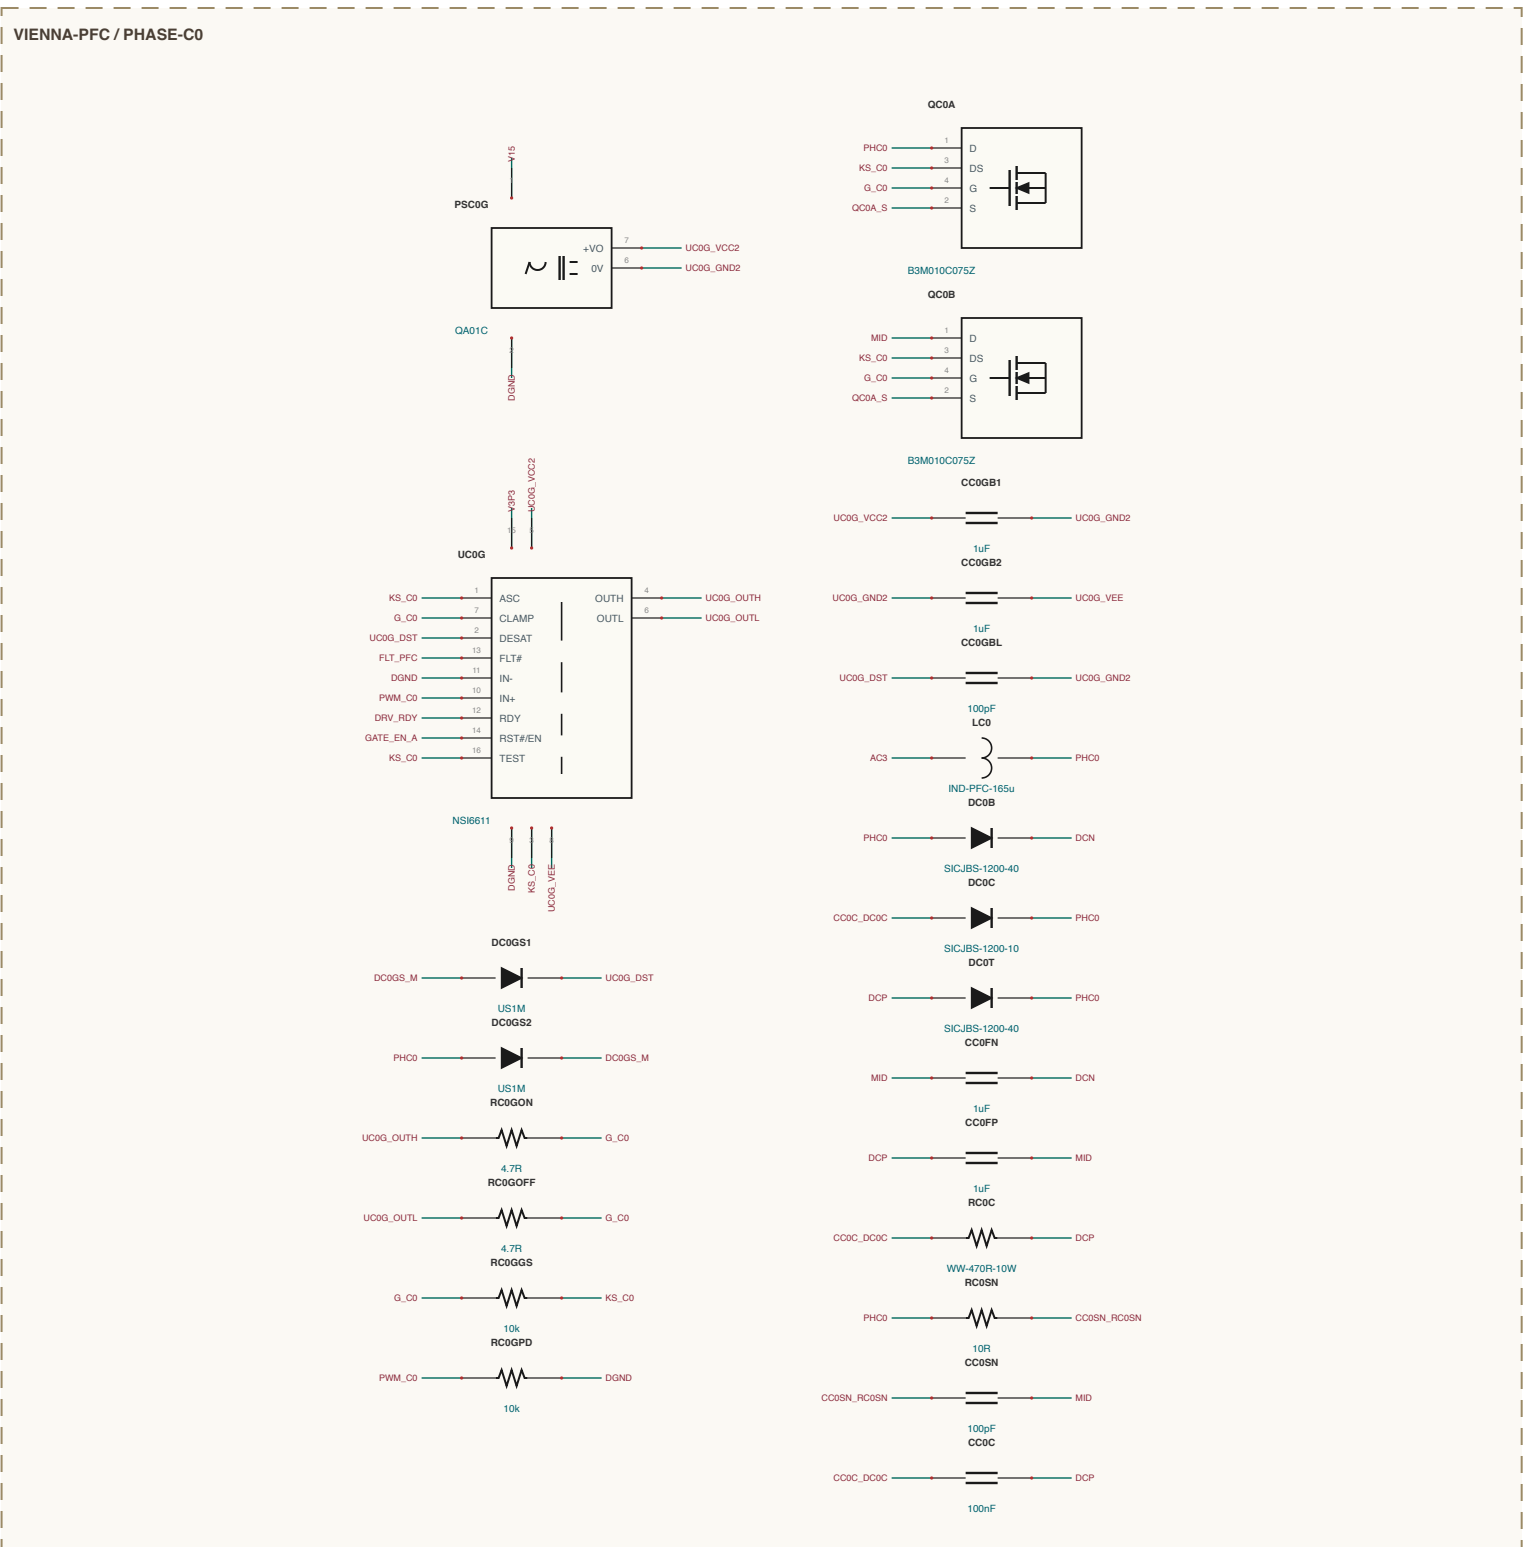
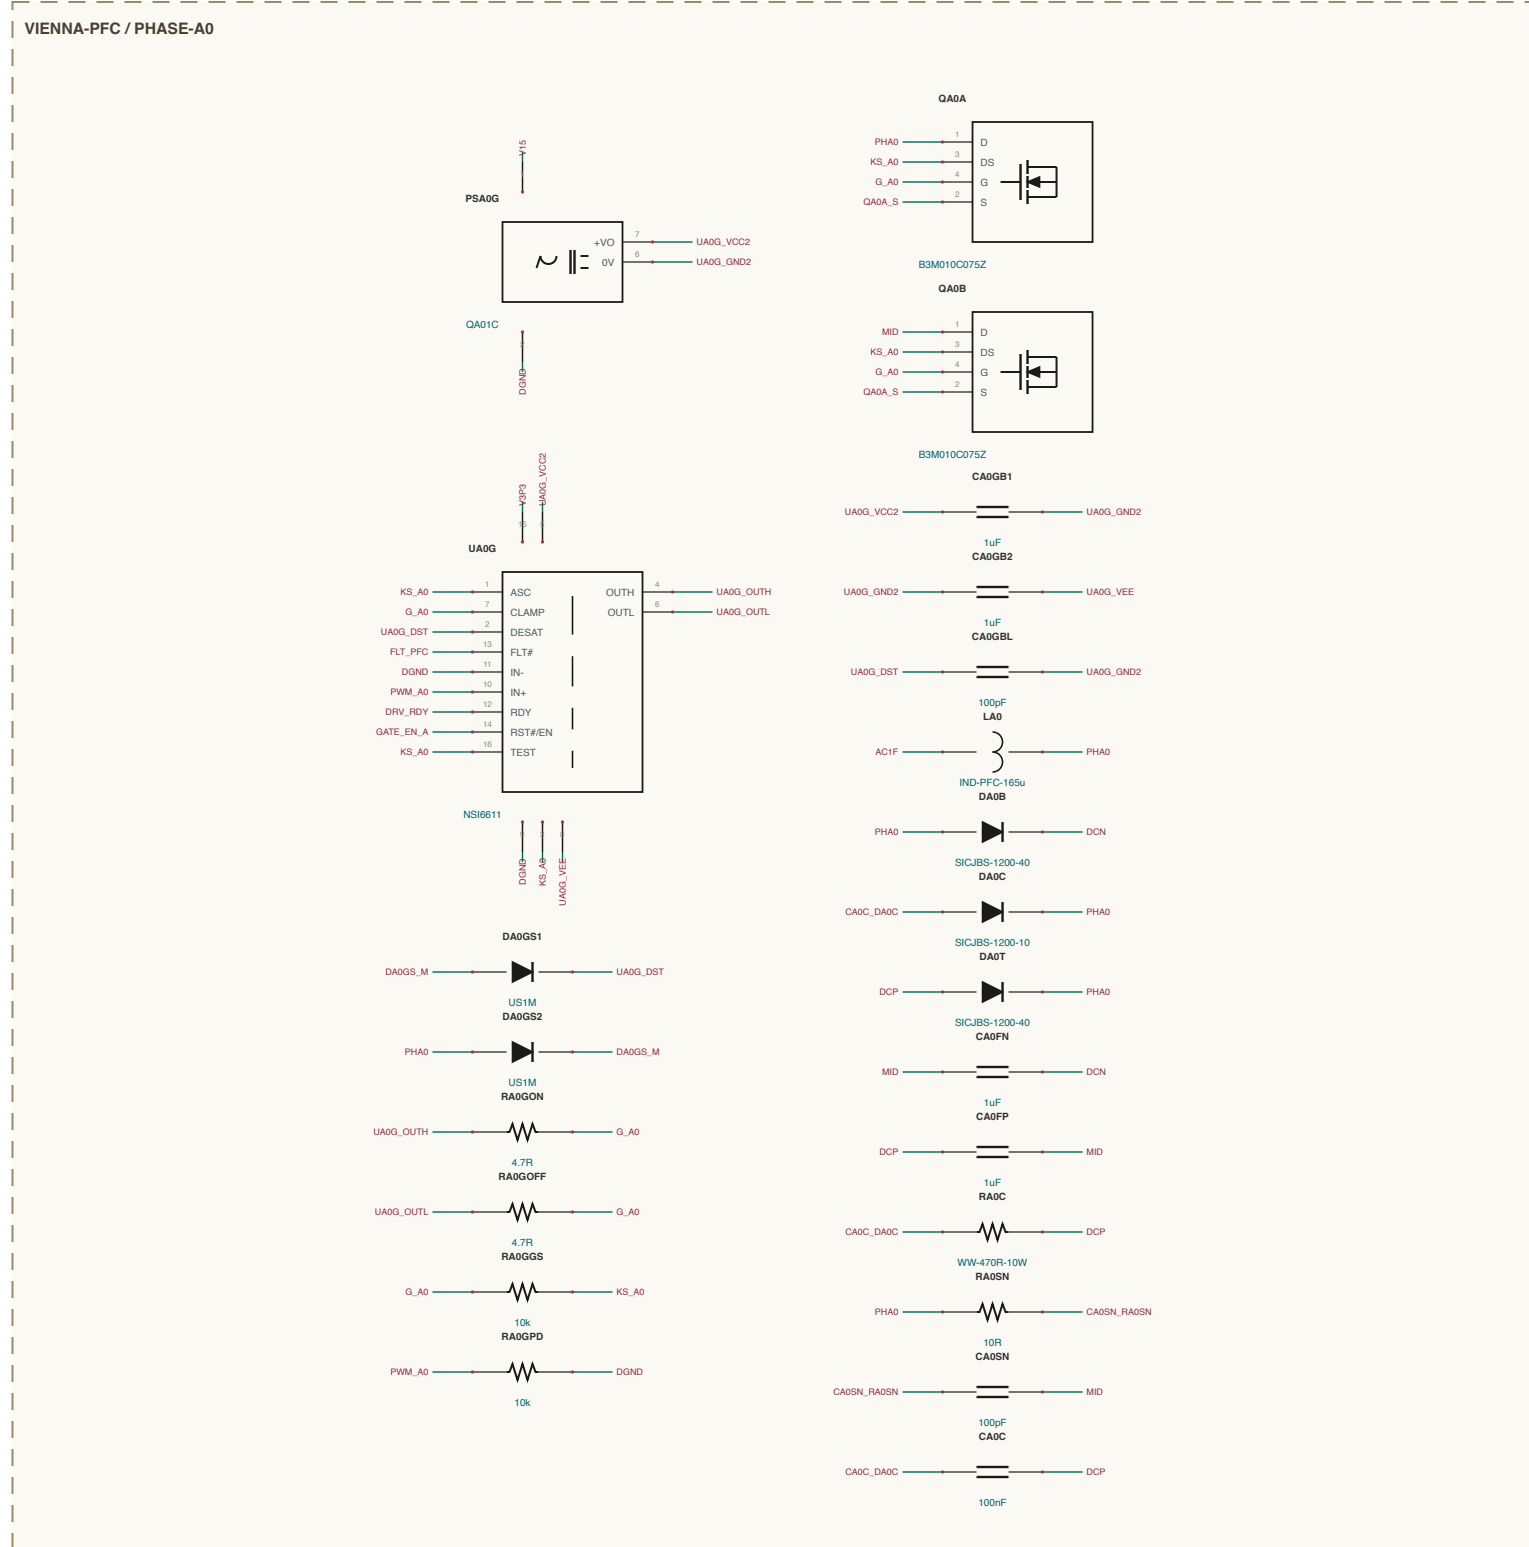
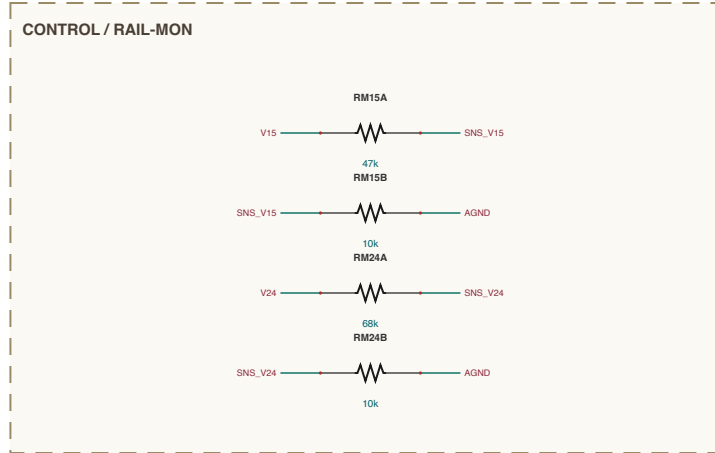
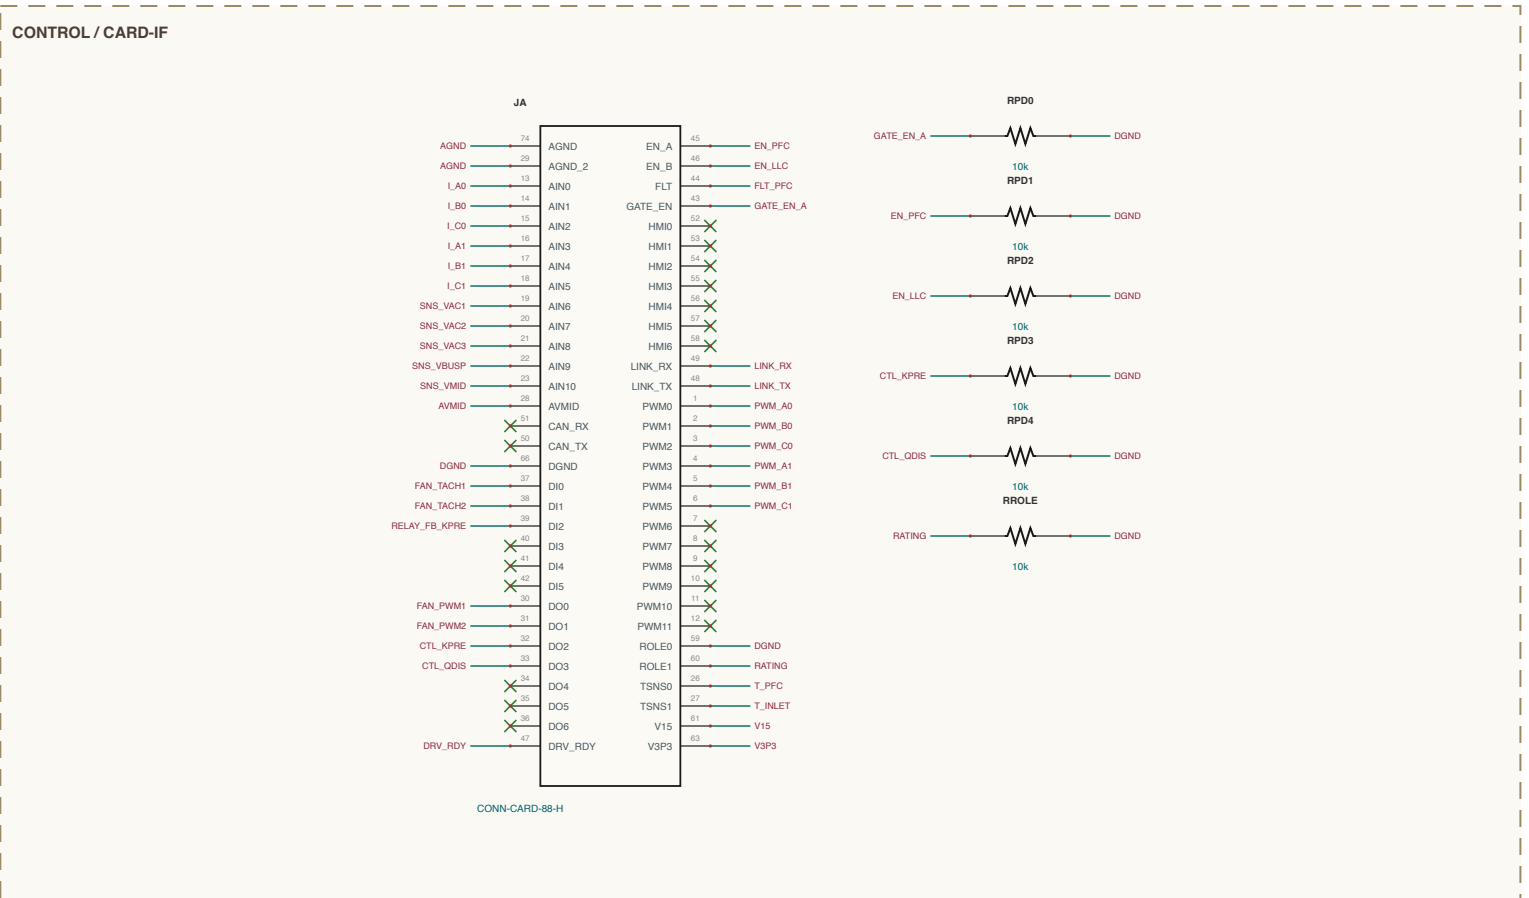
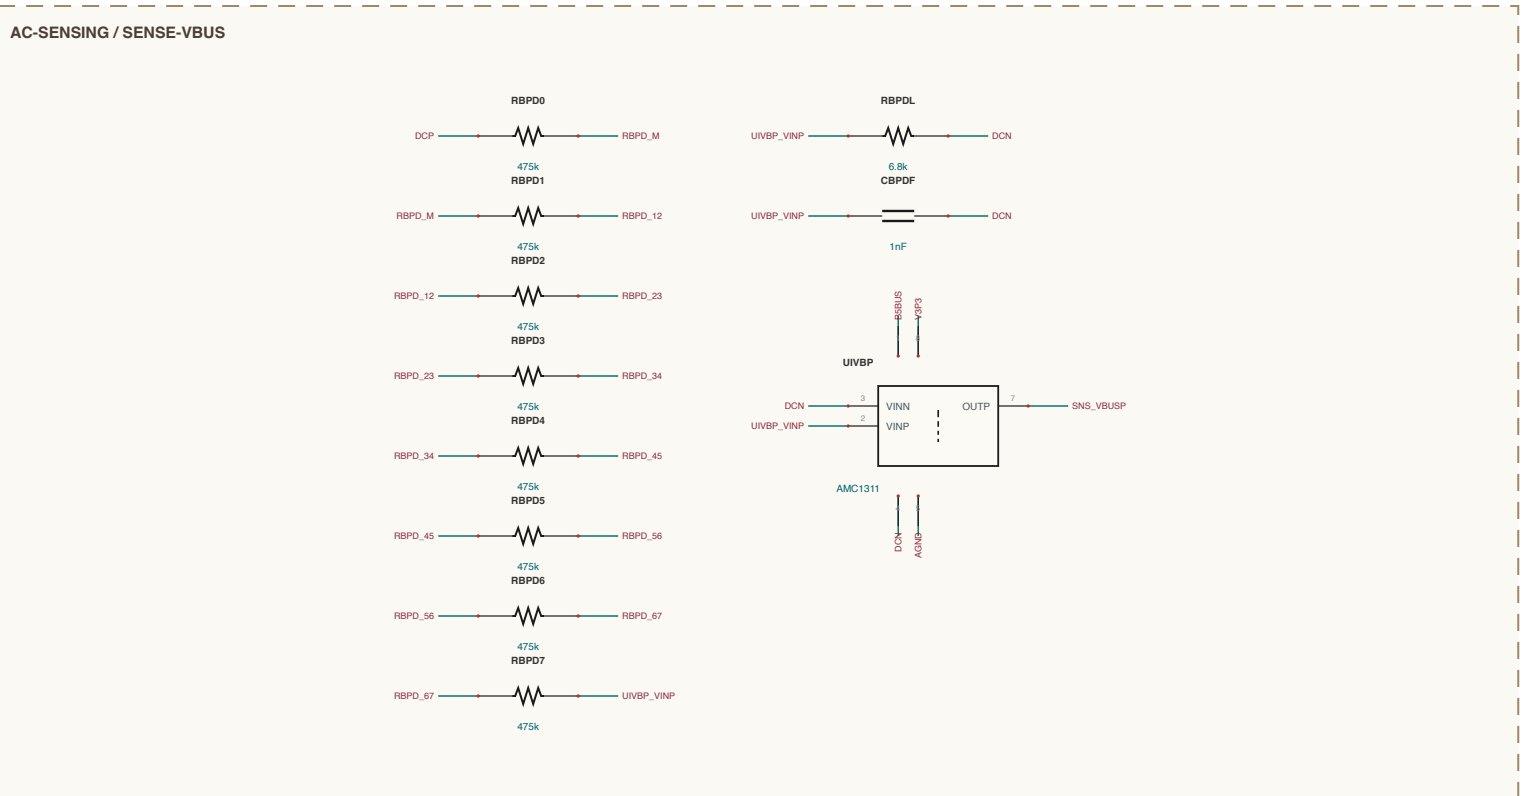
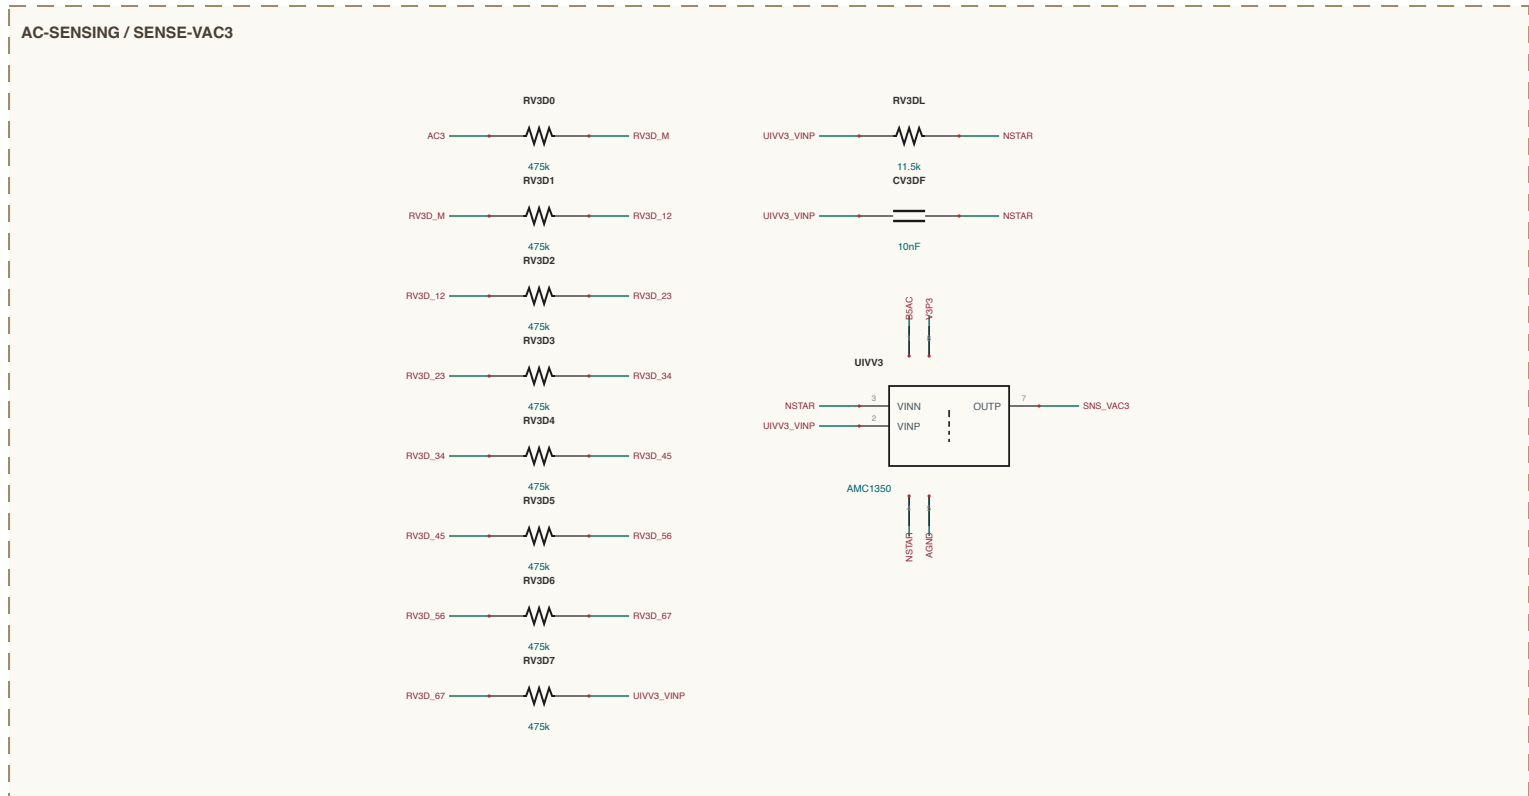
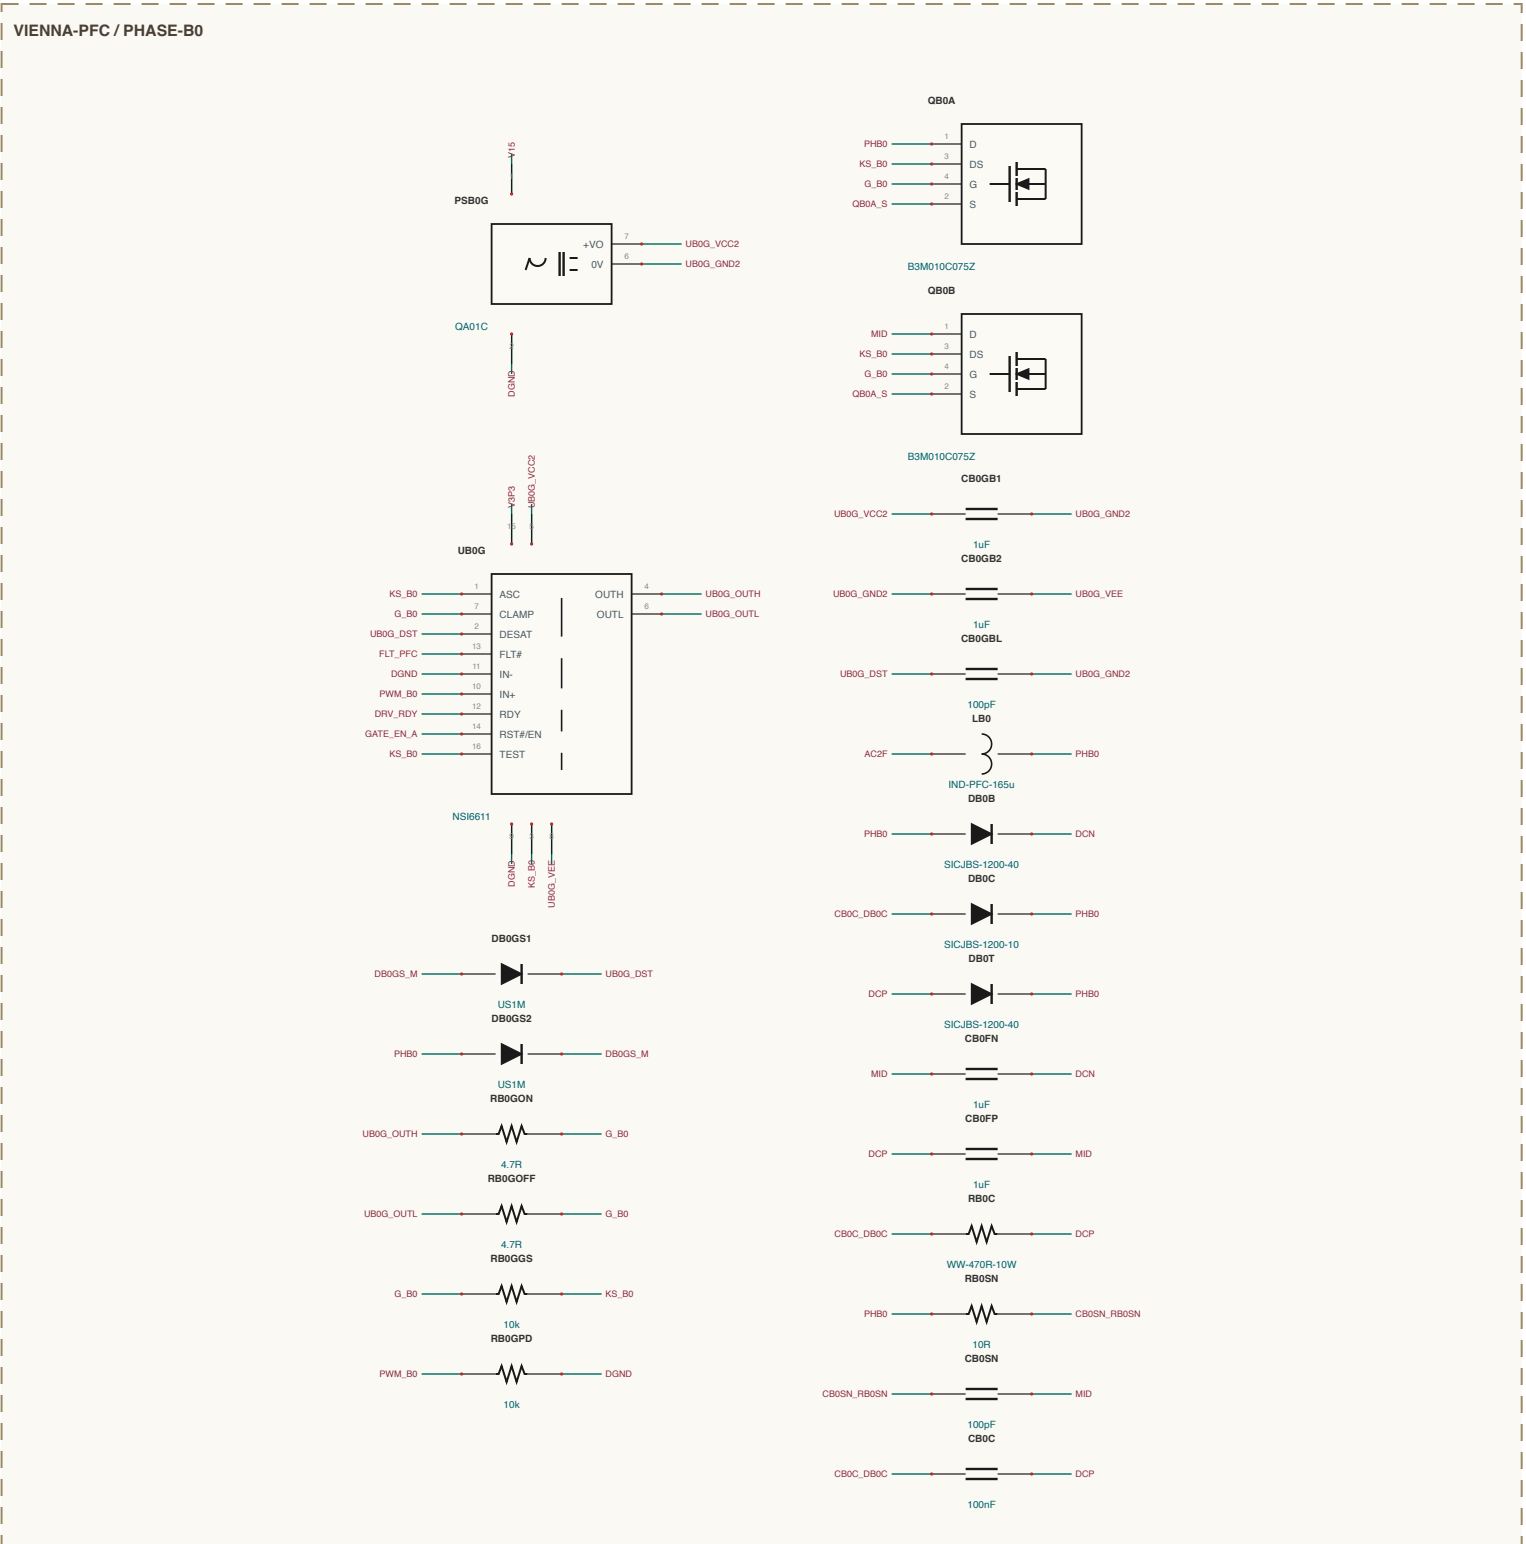
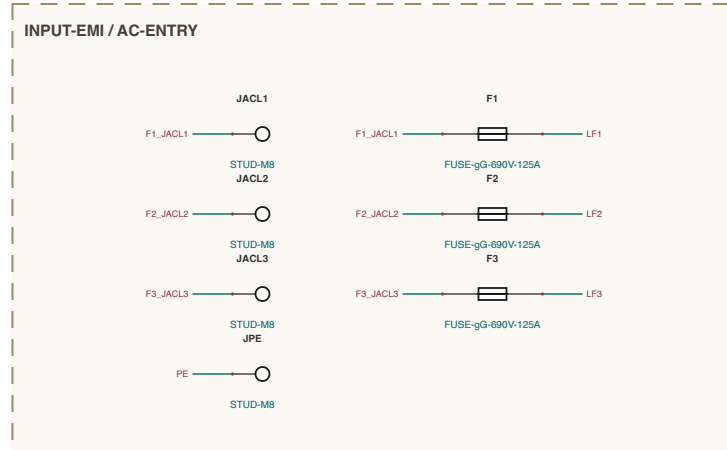
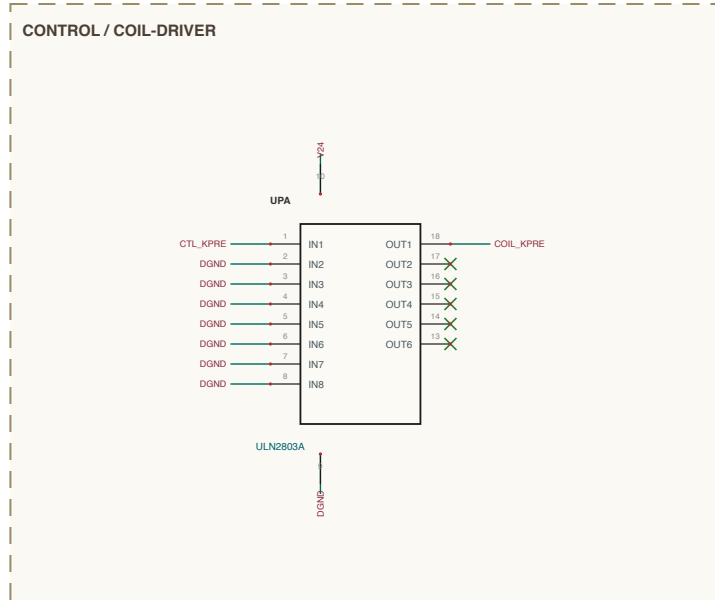
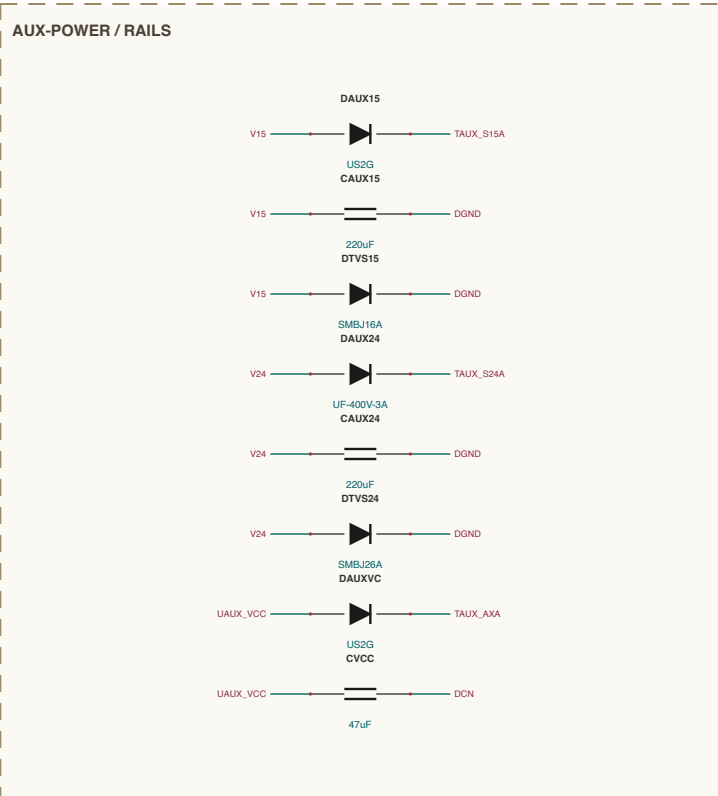
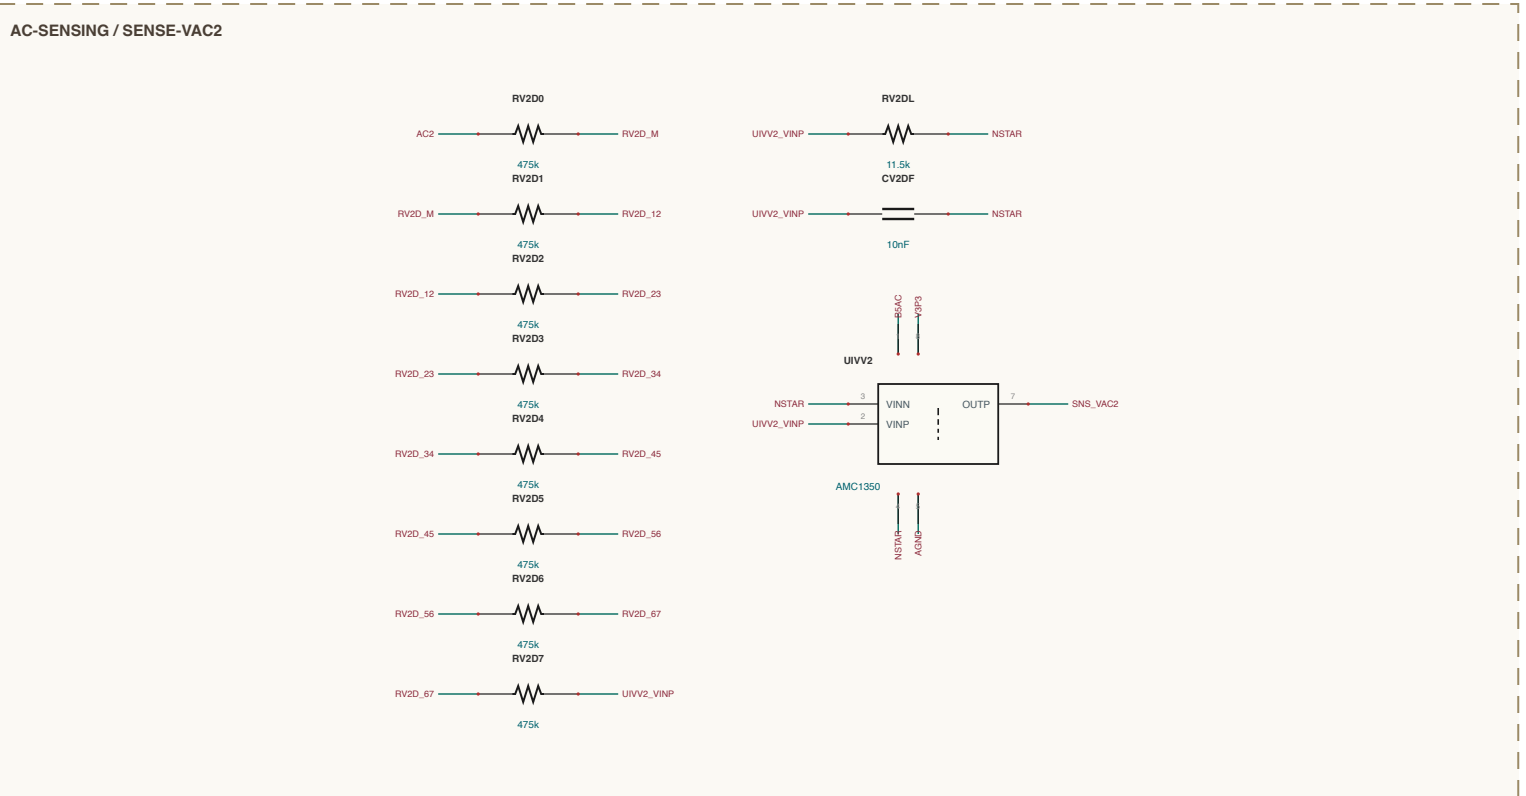
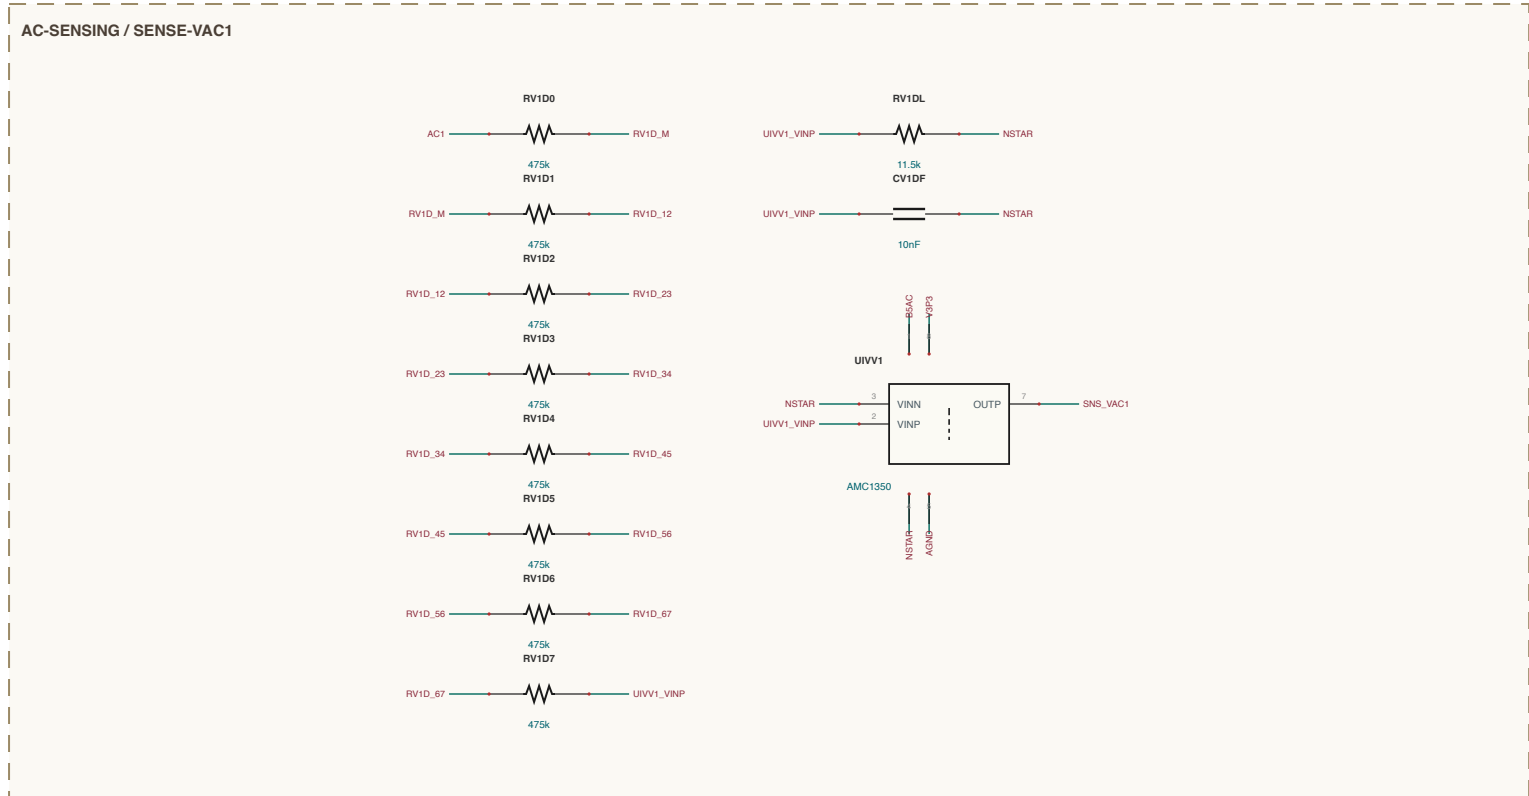


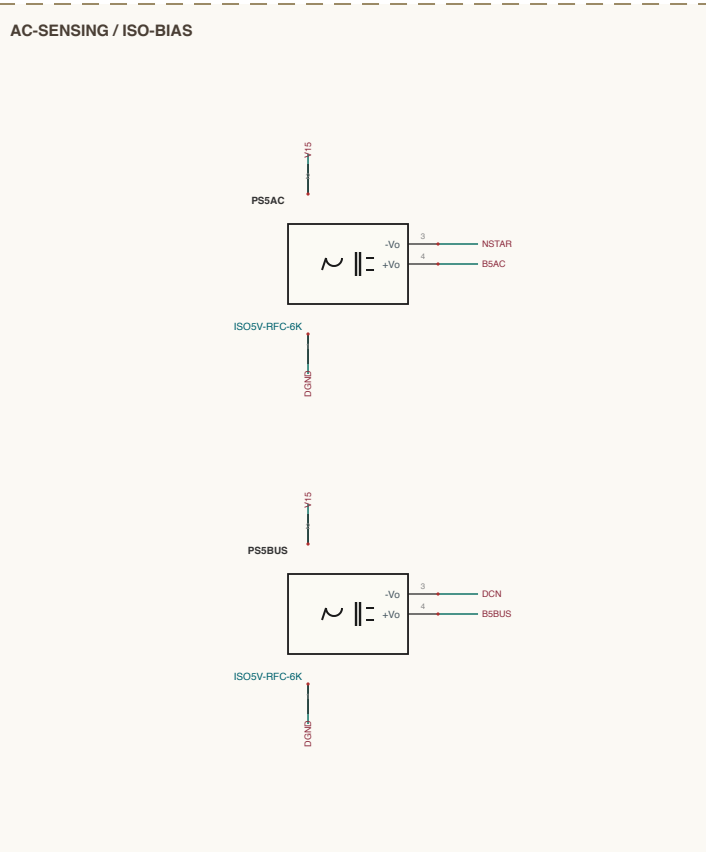

SHEET INDEX

VENNA-AC-DC board - 1 of 3
AC-SENSING - 10 sections
VENNA-PFC - 6 sections
AUX-POWER - 4 sections
CONTROL - 4 sections
DC-LINK - 4 sections
INPUT-EM - 4 sections
VENNA-PFC - 12 sections - 120 components

KEY NAMING

General provisions are covered for entire key name
Location - office name of sheet (e.g. VENNA-AC-DC)
Function - M (multiplication of a section) e.g. VENNA-AC-DC M
Location - section key between two sheets e.g. VENNA-AC-DC M
all others are simplified design rules