




AC-SENSING / ISO-BIAS

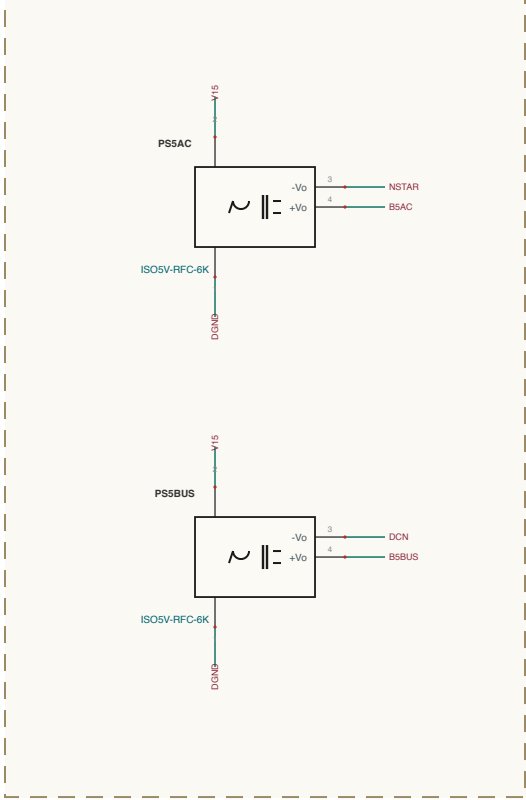


AC-SENSING / SENSE-VAC1

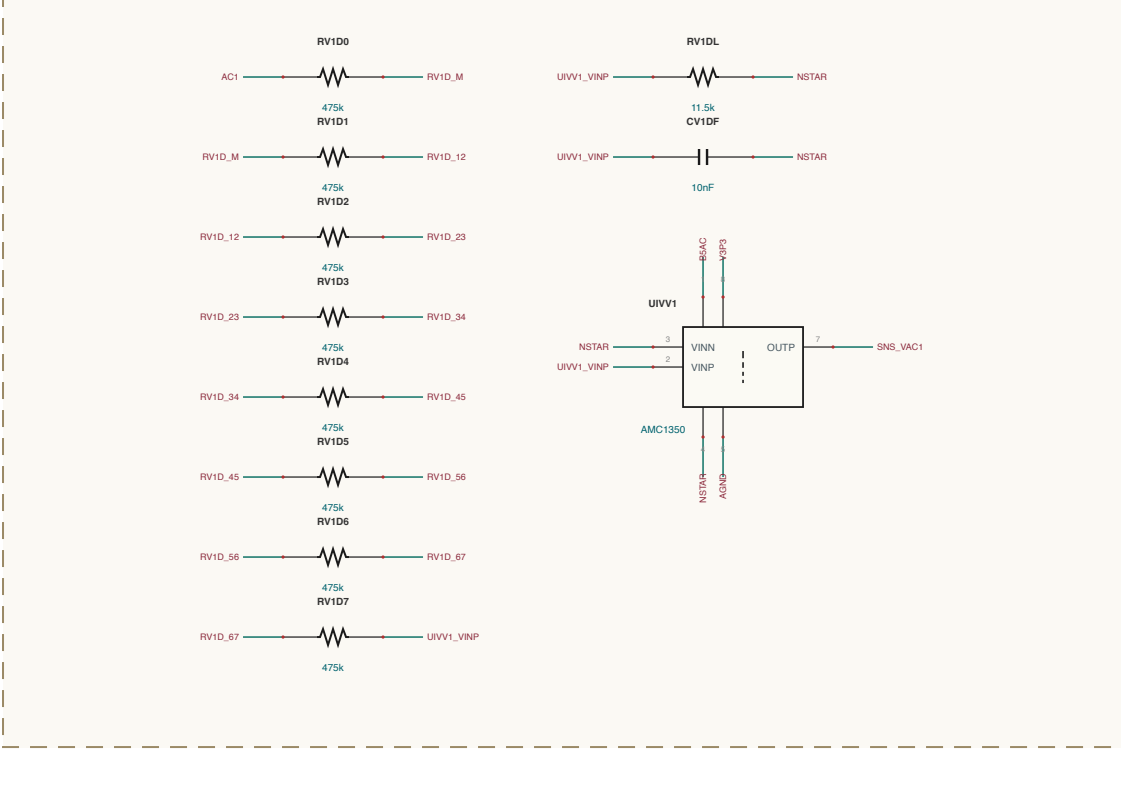


AC-SENSING / SENSE-VAC2

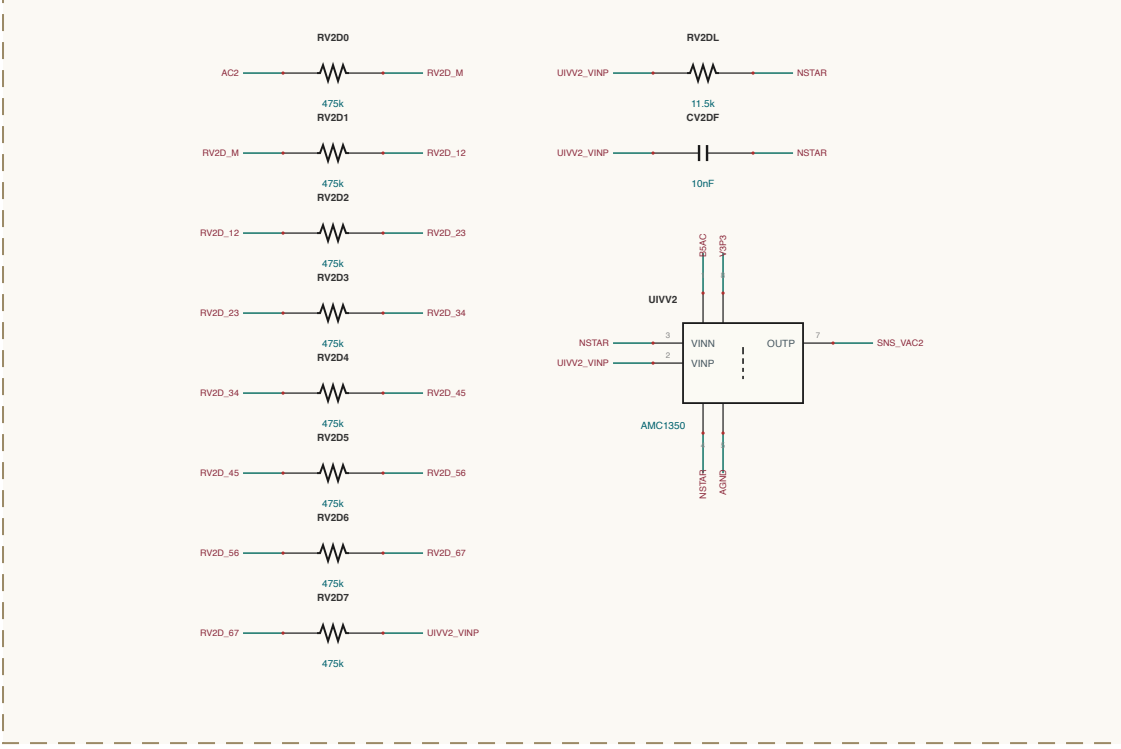


AC-SENSING / SENSE-VAC3

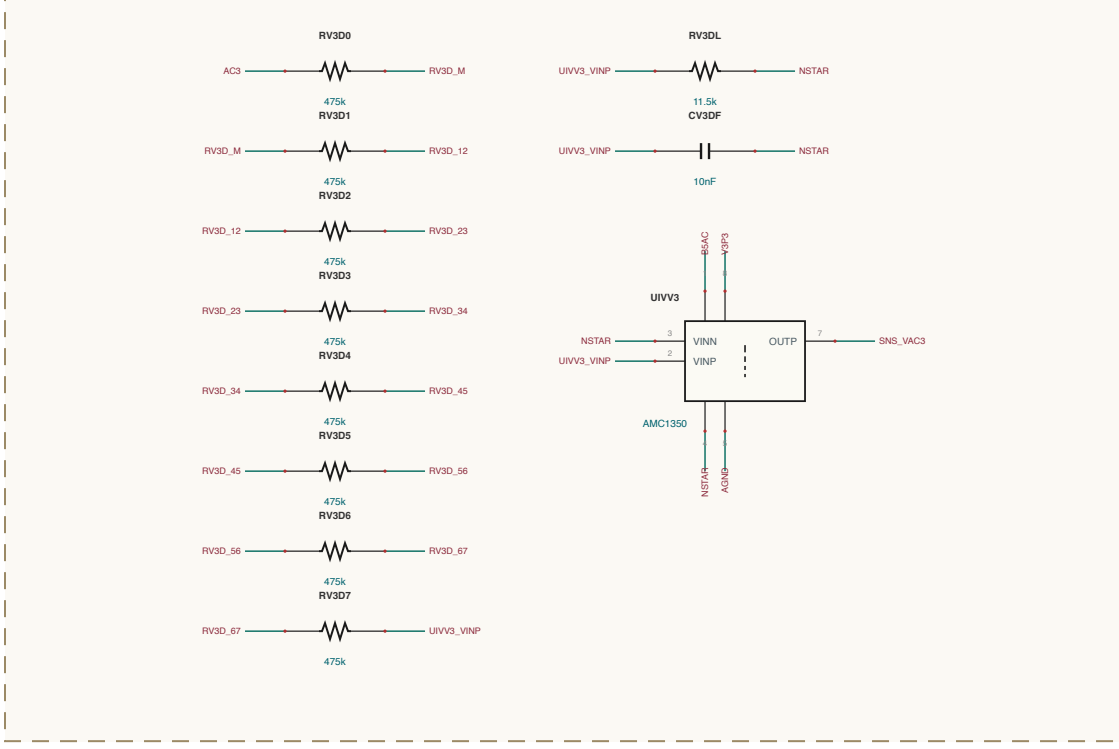


AC-SENSING / SENSE-VBUS

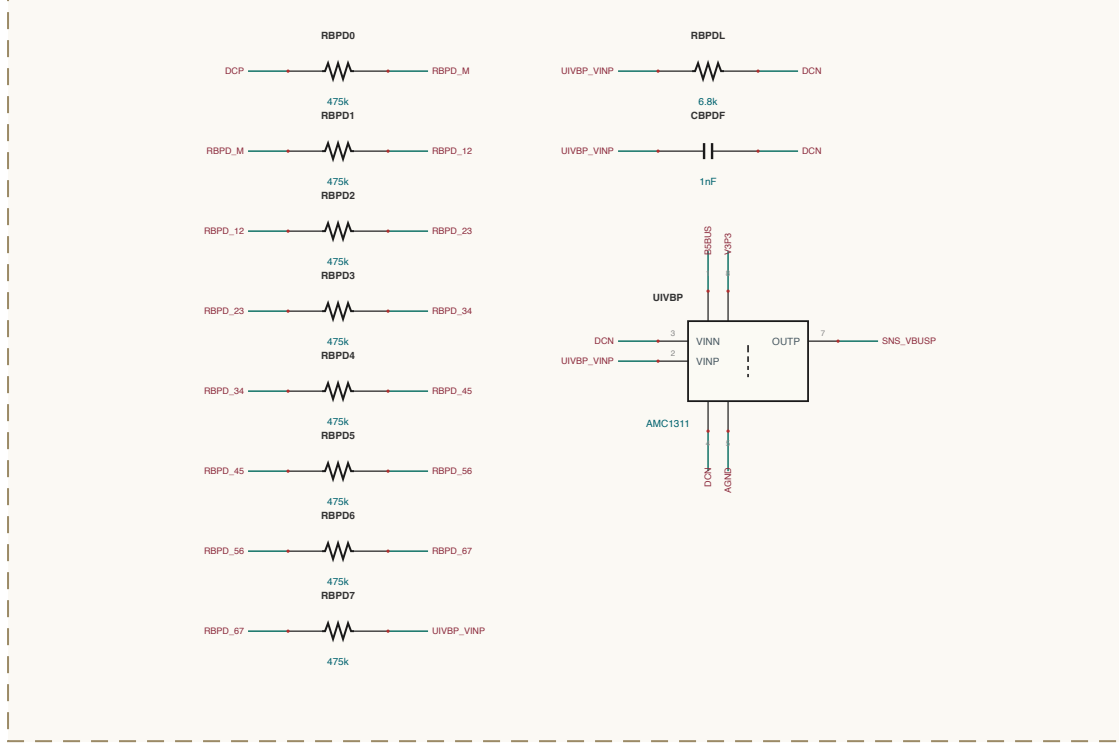


AC-SENSING / SENSE-VMD

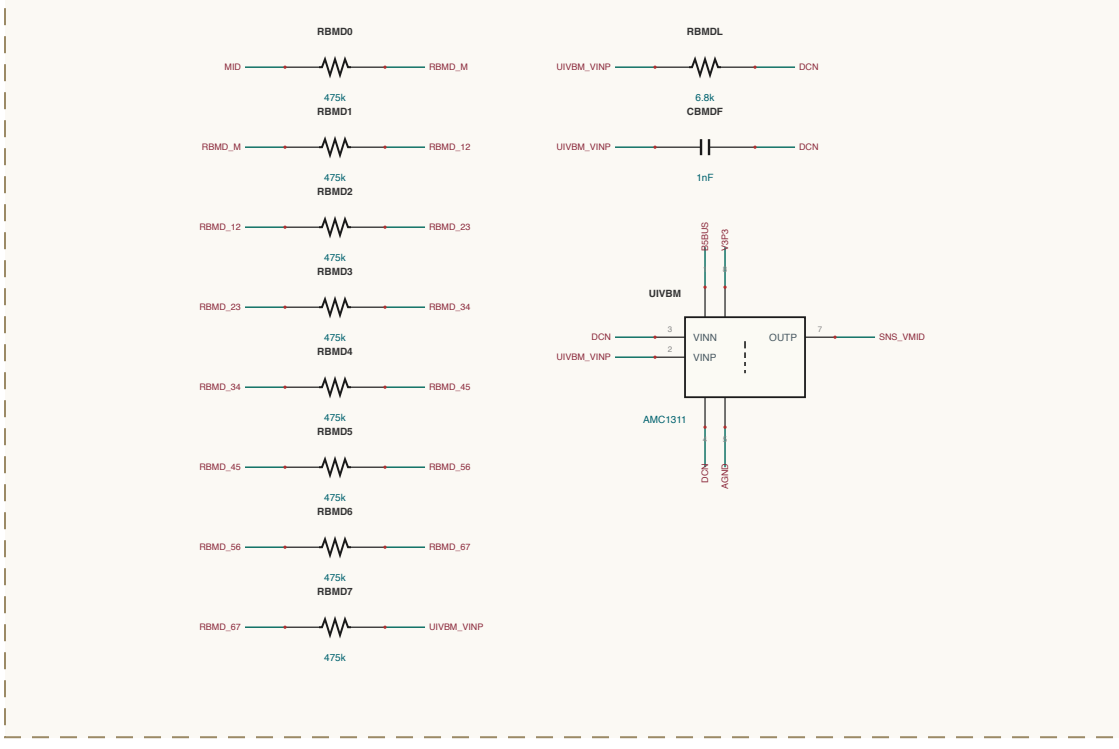


AC-SENSING / STAR

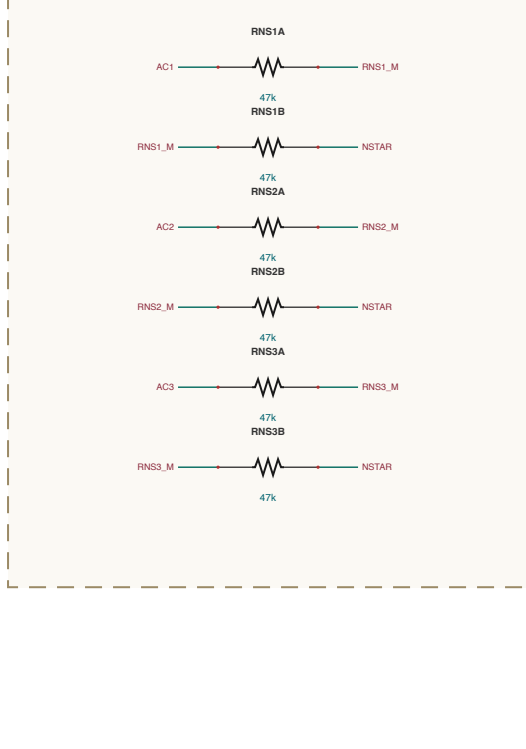


AC-SENSING / NTC

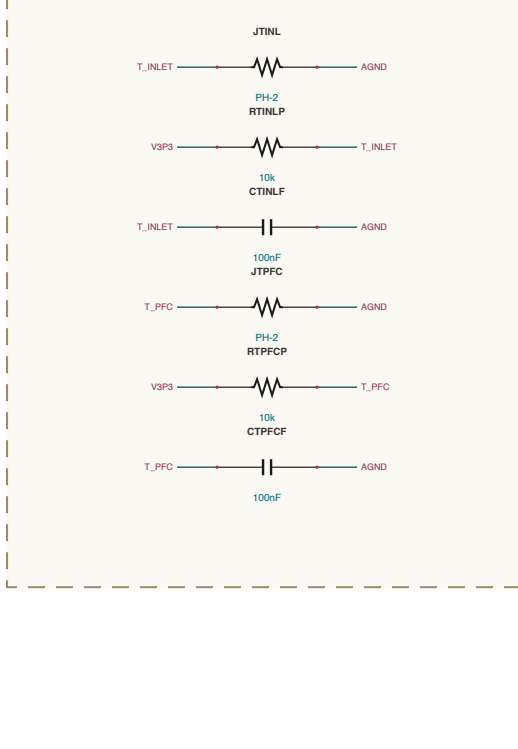


AC-SENSING / LINE-CTS-0

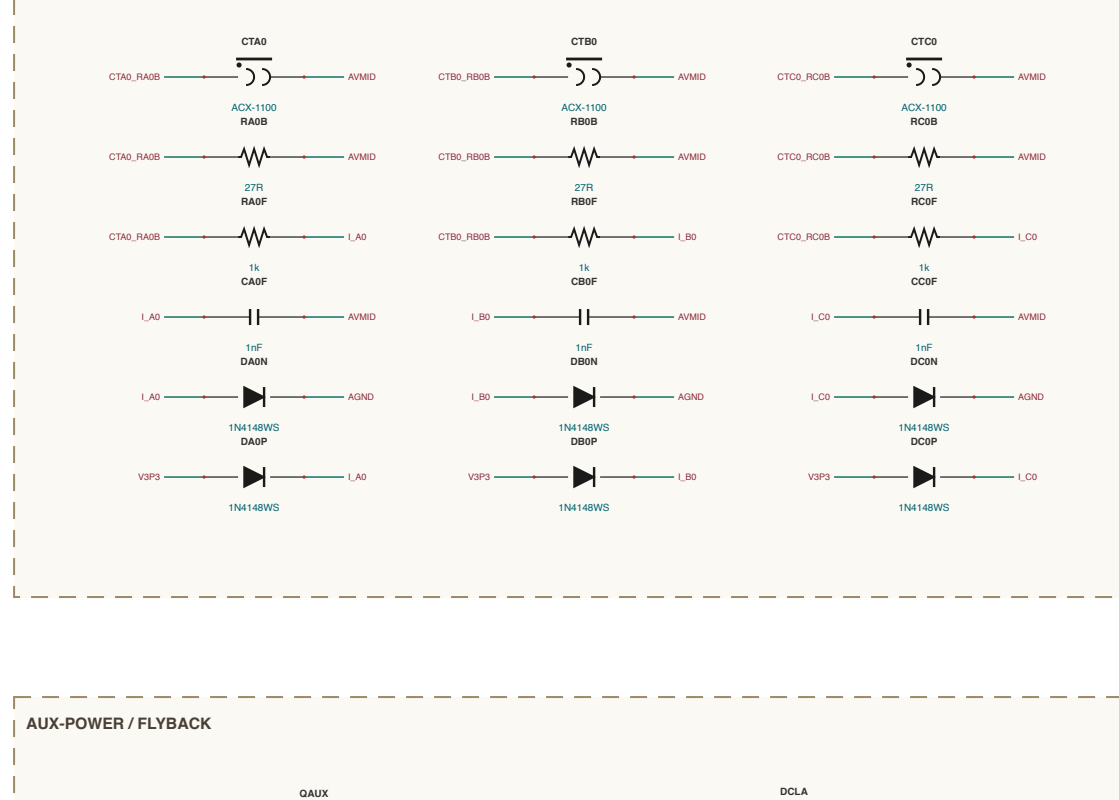


AUX-POWER / FLYBACK

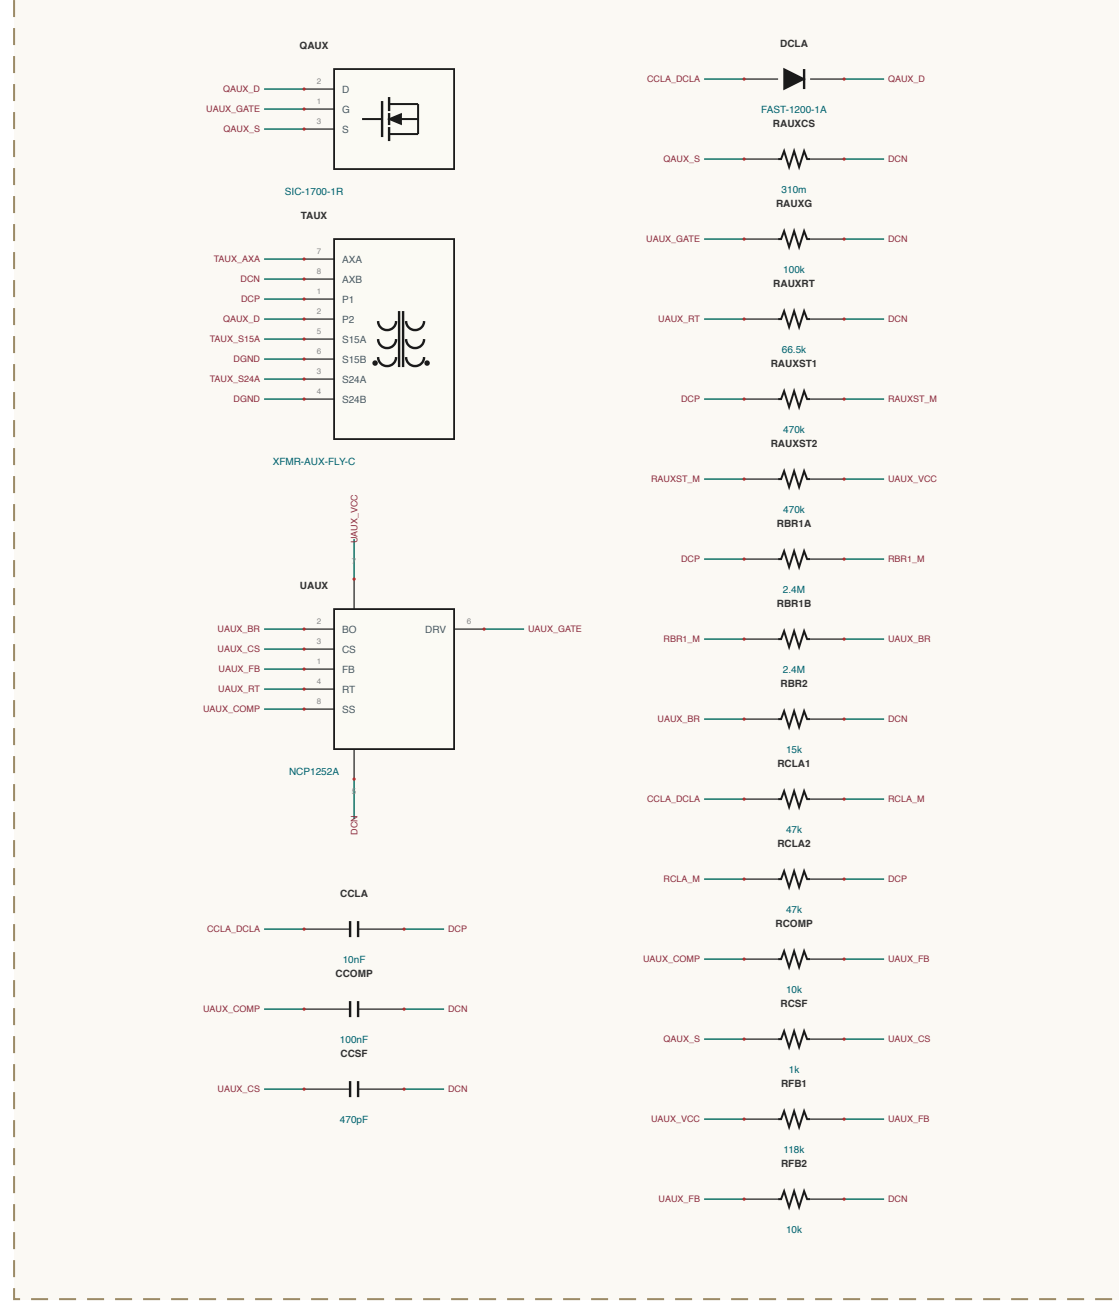


AUX-POWER / INTERCONNECT

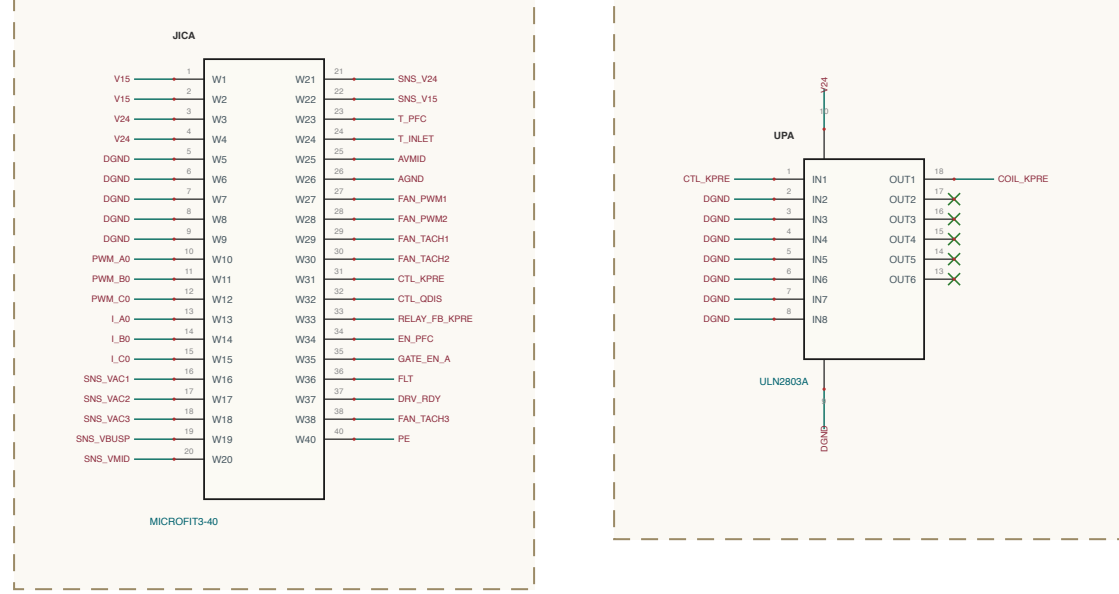


CONTROL / CARD-UP

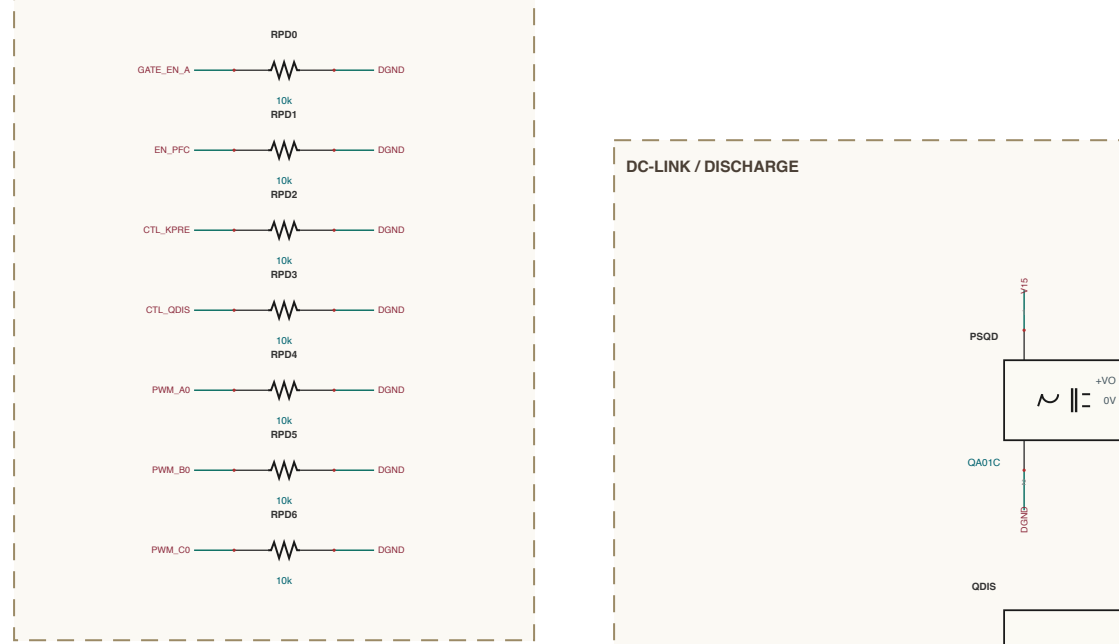


AUX-POWER / FANS

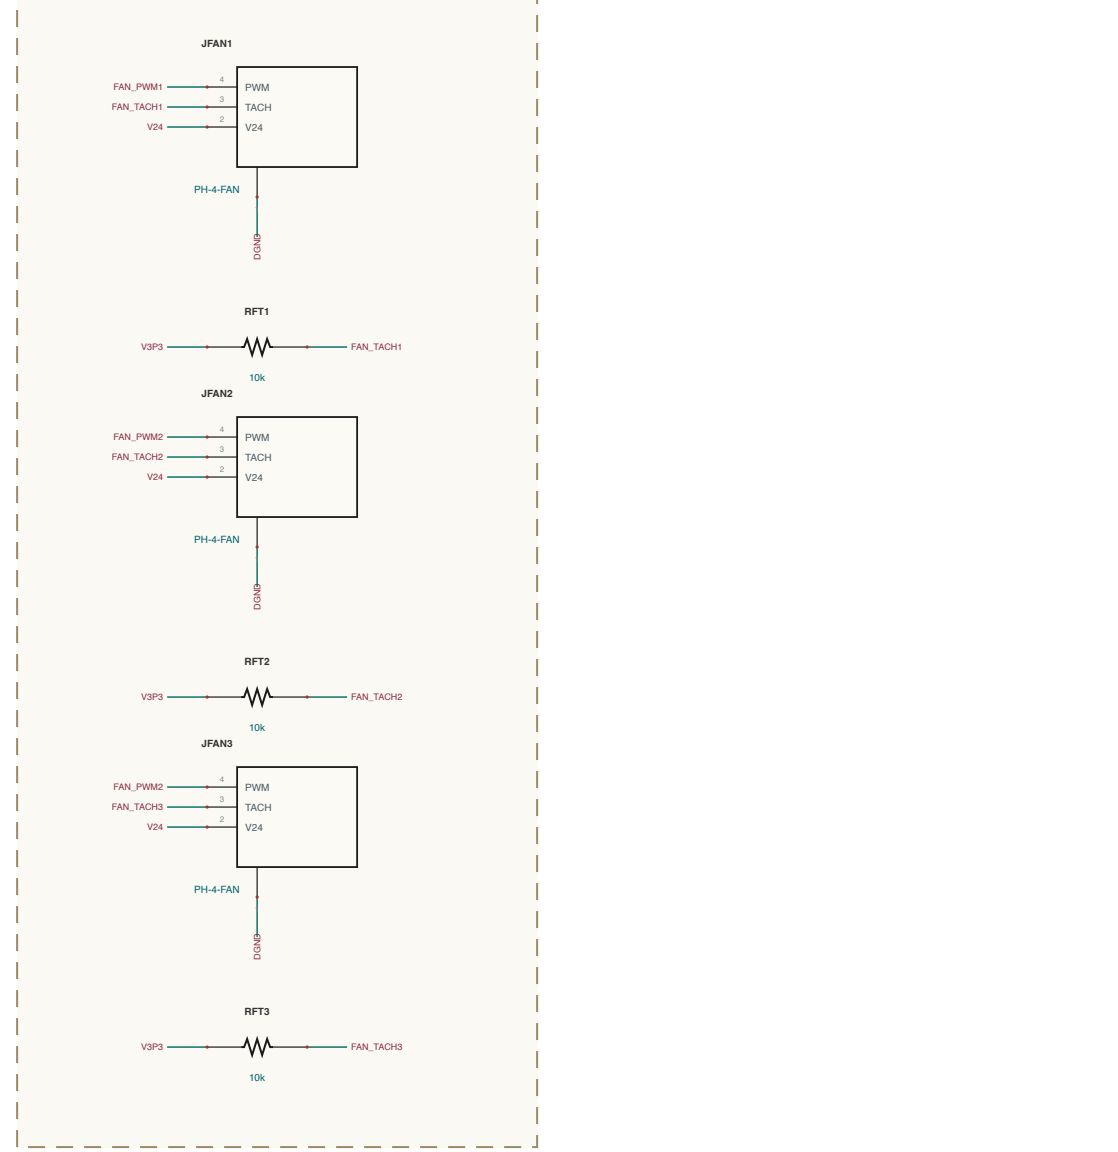

AUX-POWER / RAILS

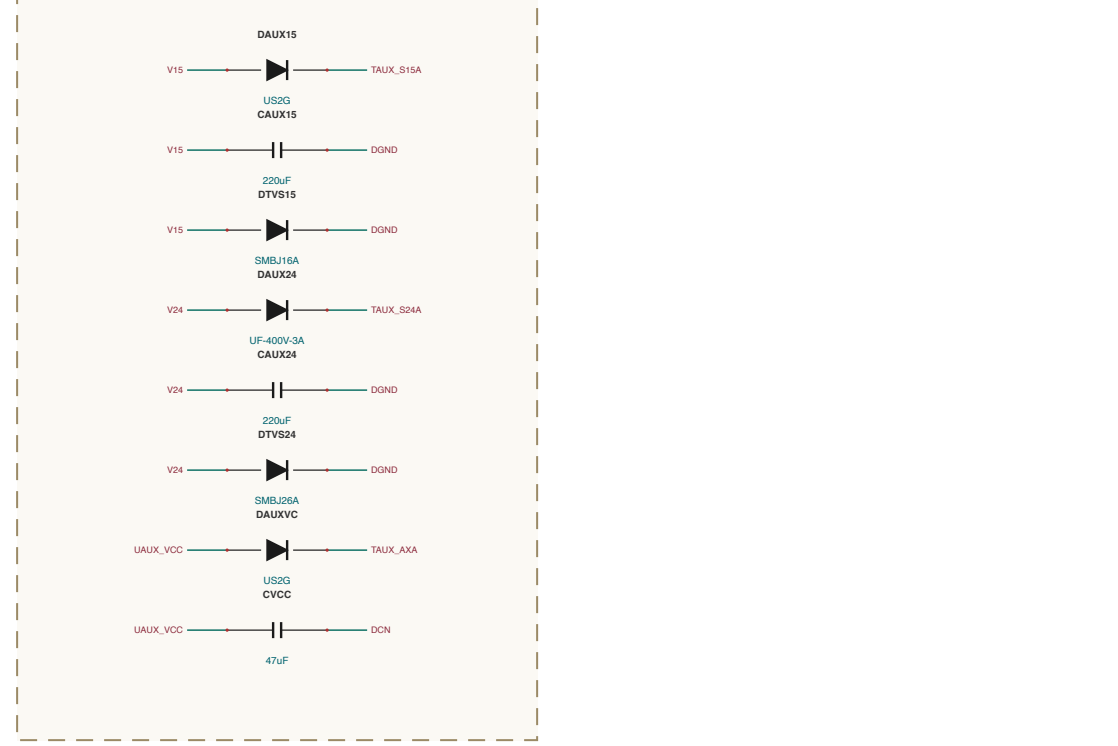


CONTROL / COL-DRIVER

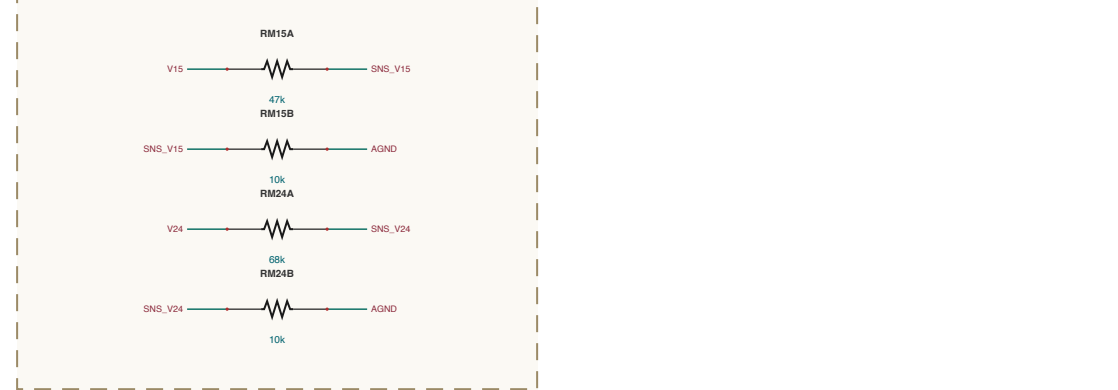


CONTROL / RAIL-MON




CONTROL / GROUNDING

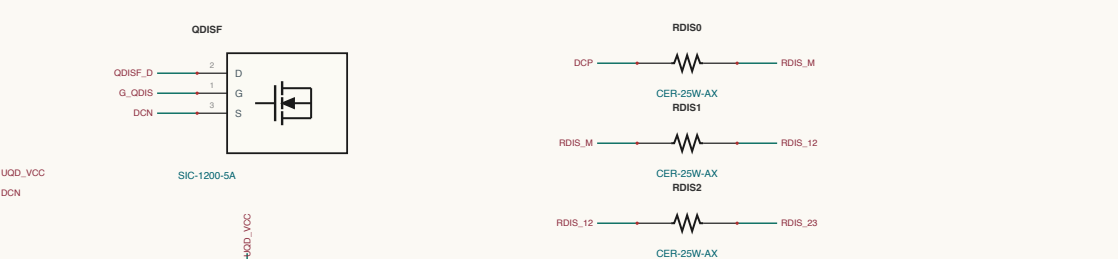


DC-LINK / DISCHARGE

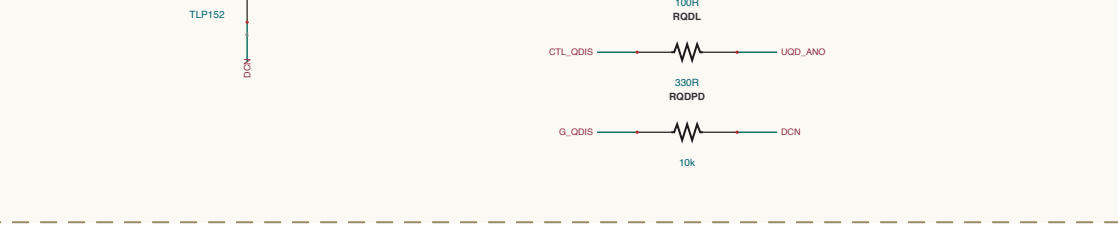


DC-LINK / LINK-BANK-0

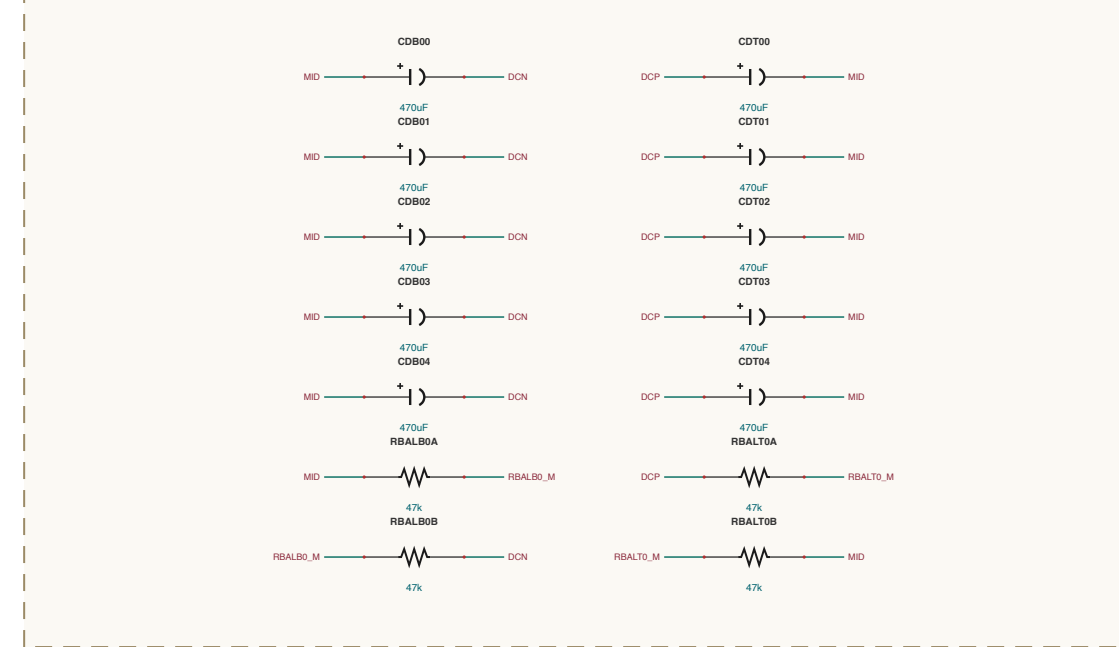


DC-LINK / BUS-STOP

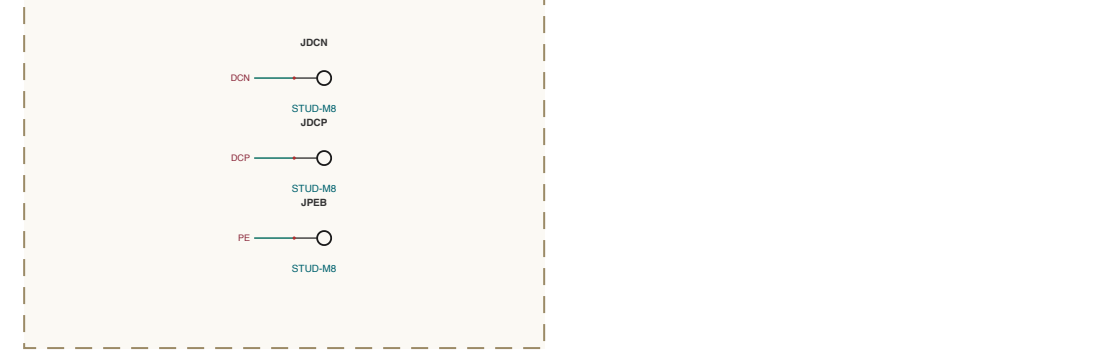


DC-LINK / LINK-BANK-1

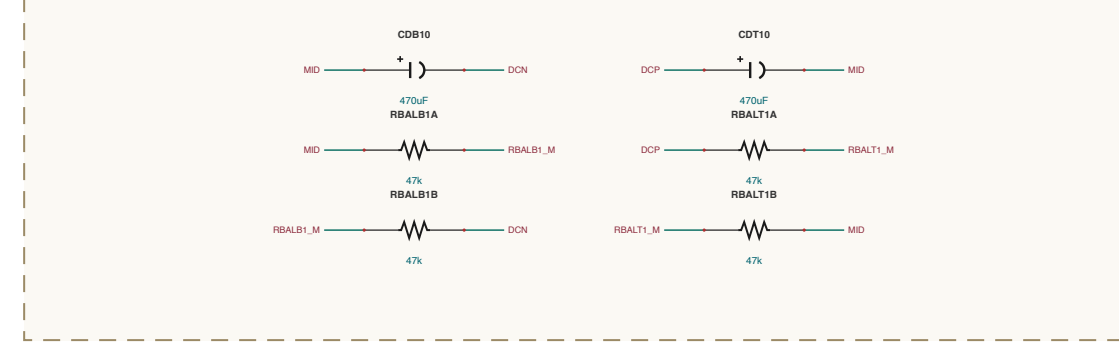


INPUT-EM / EMI-FILTER

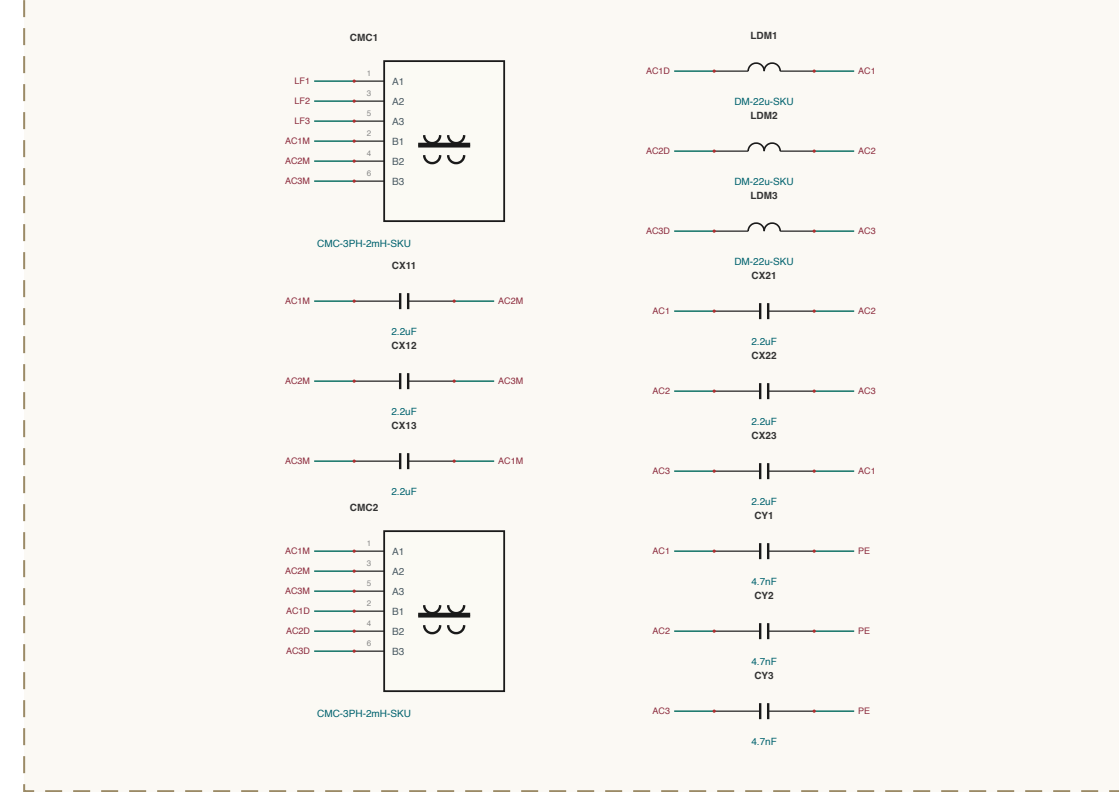


INPUT-EM / AC-ENTRY

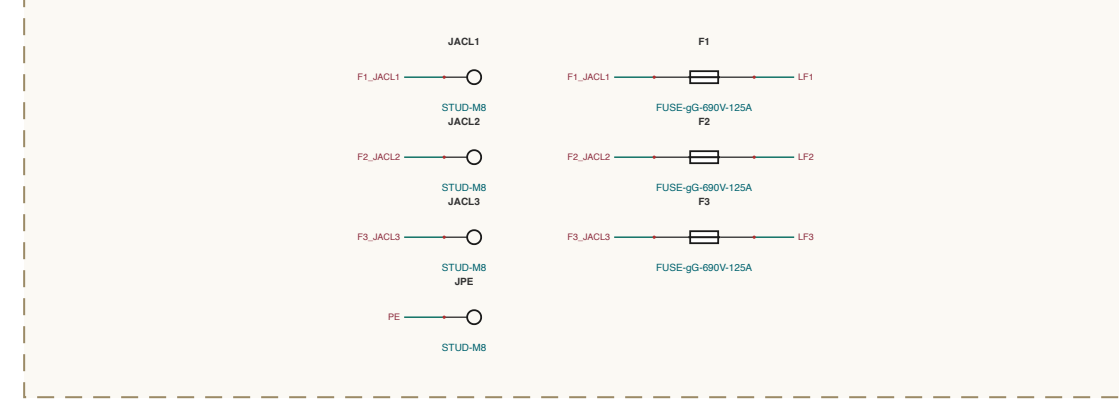


INPUT-EM / PRECHARGE

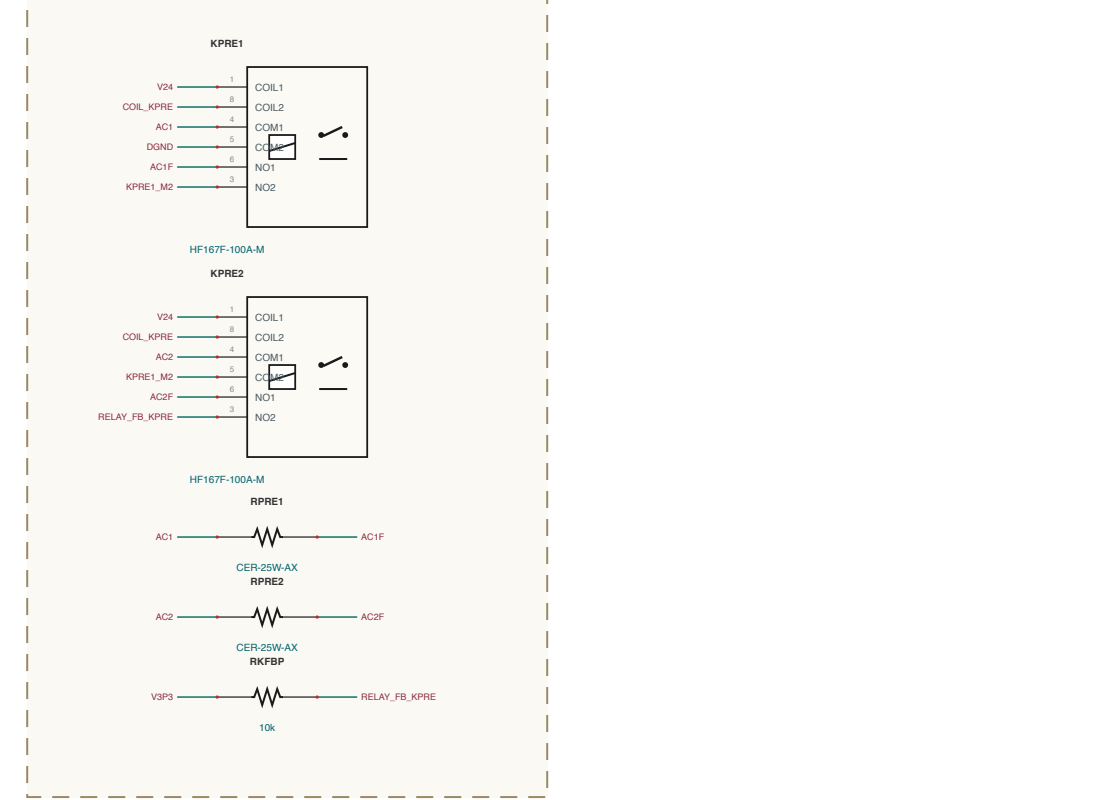


INPUT-EM / SURGE

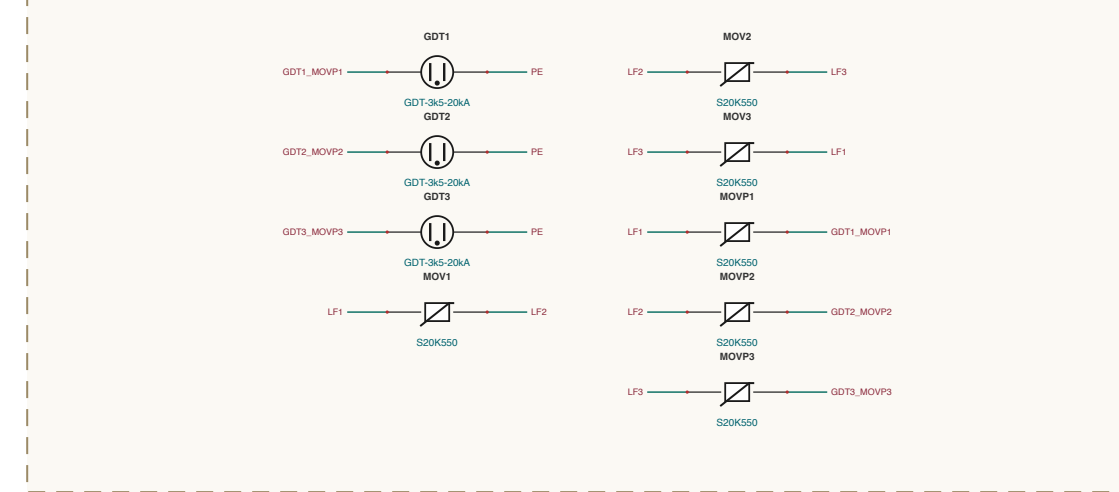


VIENNA-PFC / PHASE-A0

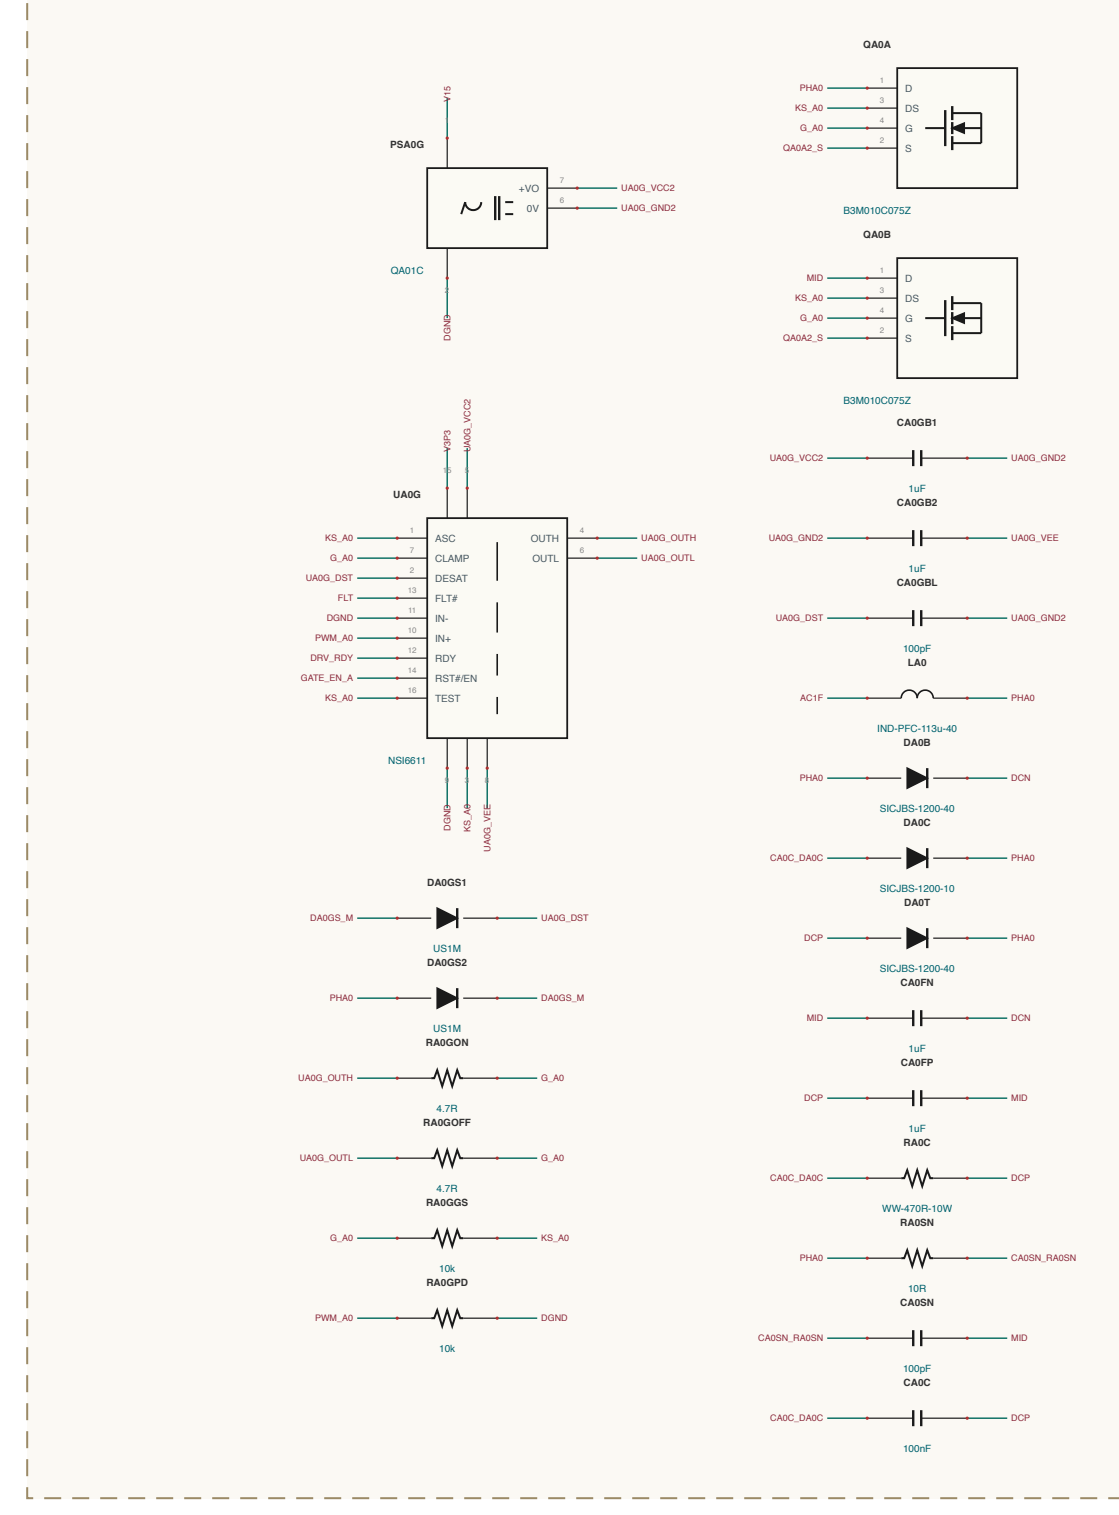

VIENNA-PFC / PHASE-C0

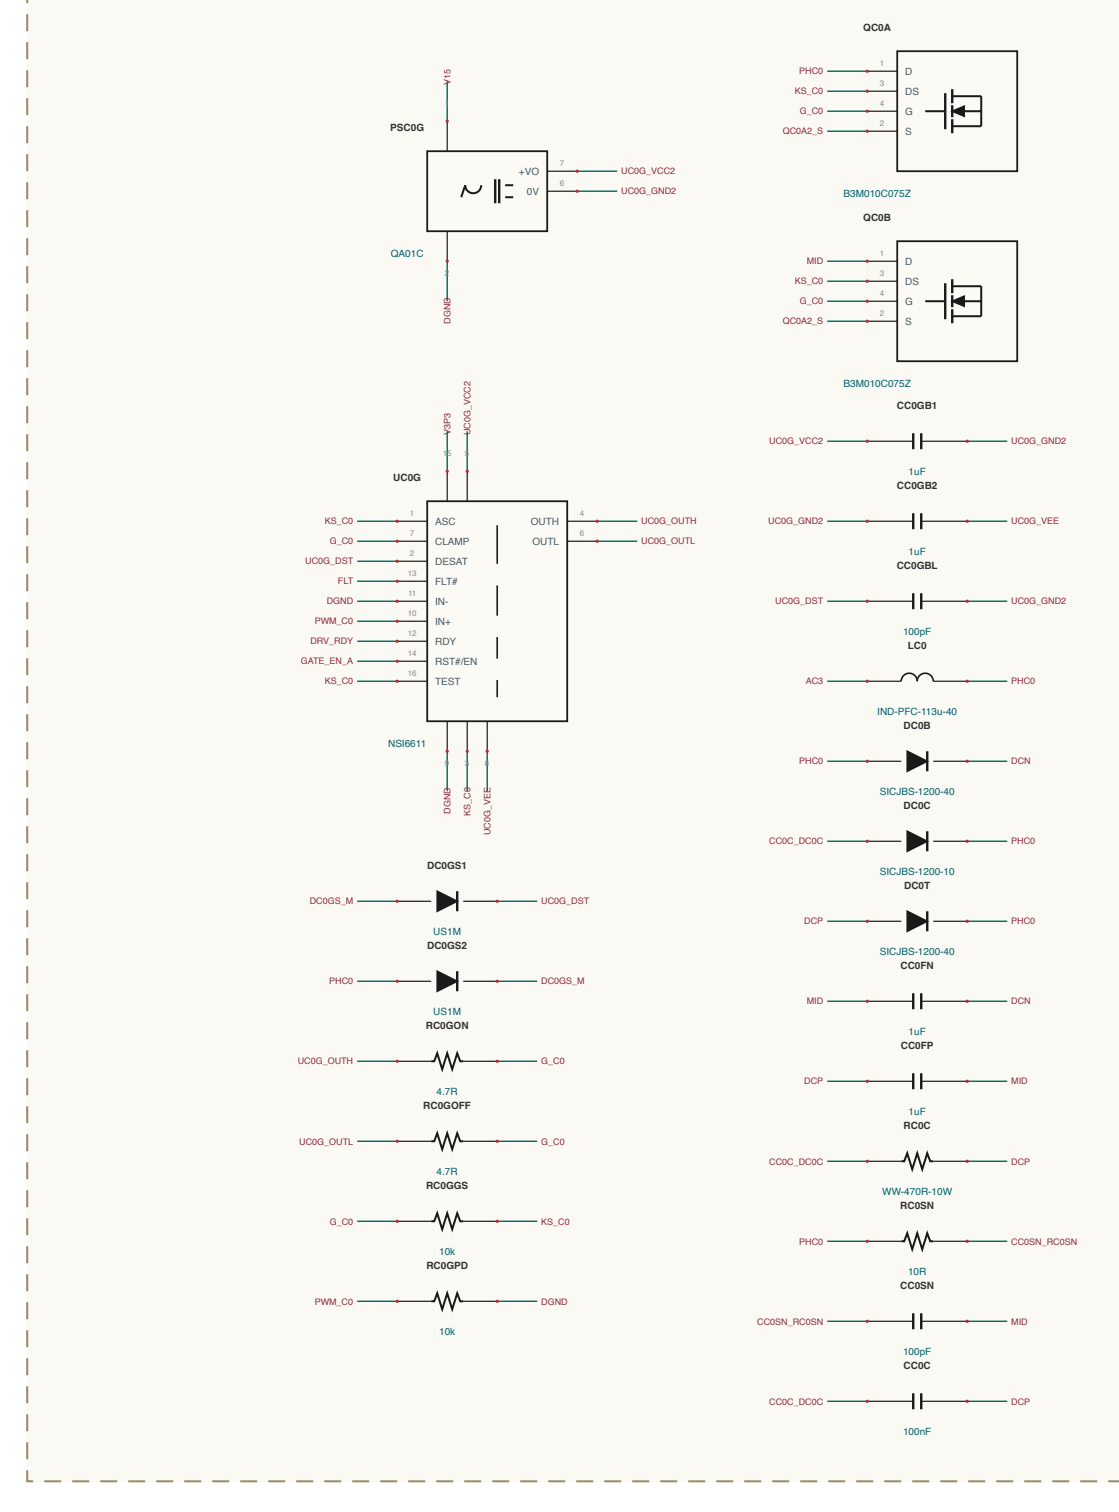

VIENNA-PFC / PHASE-B0

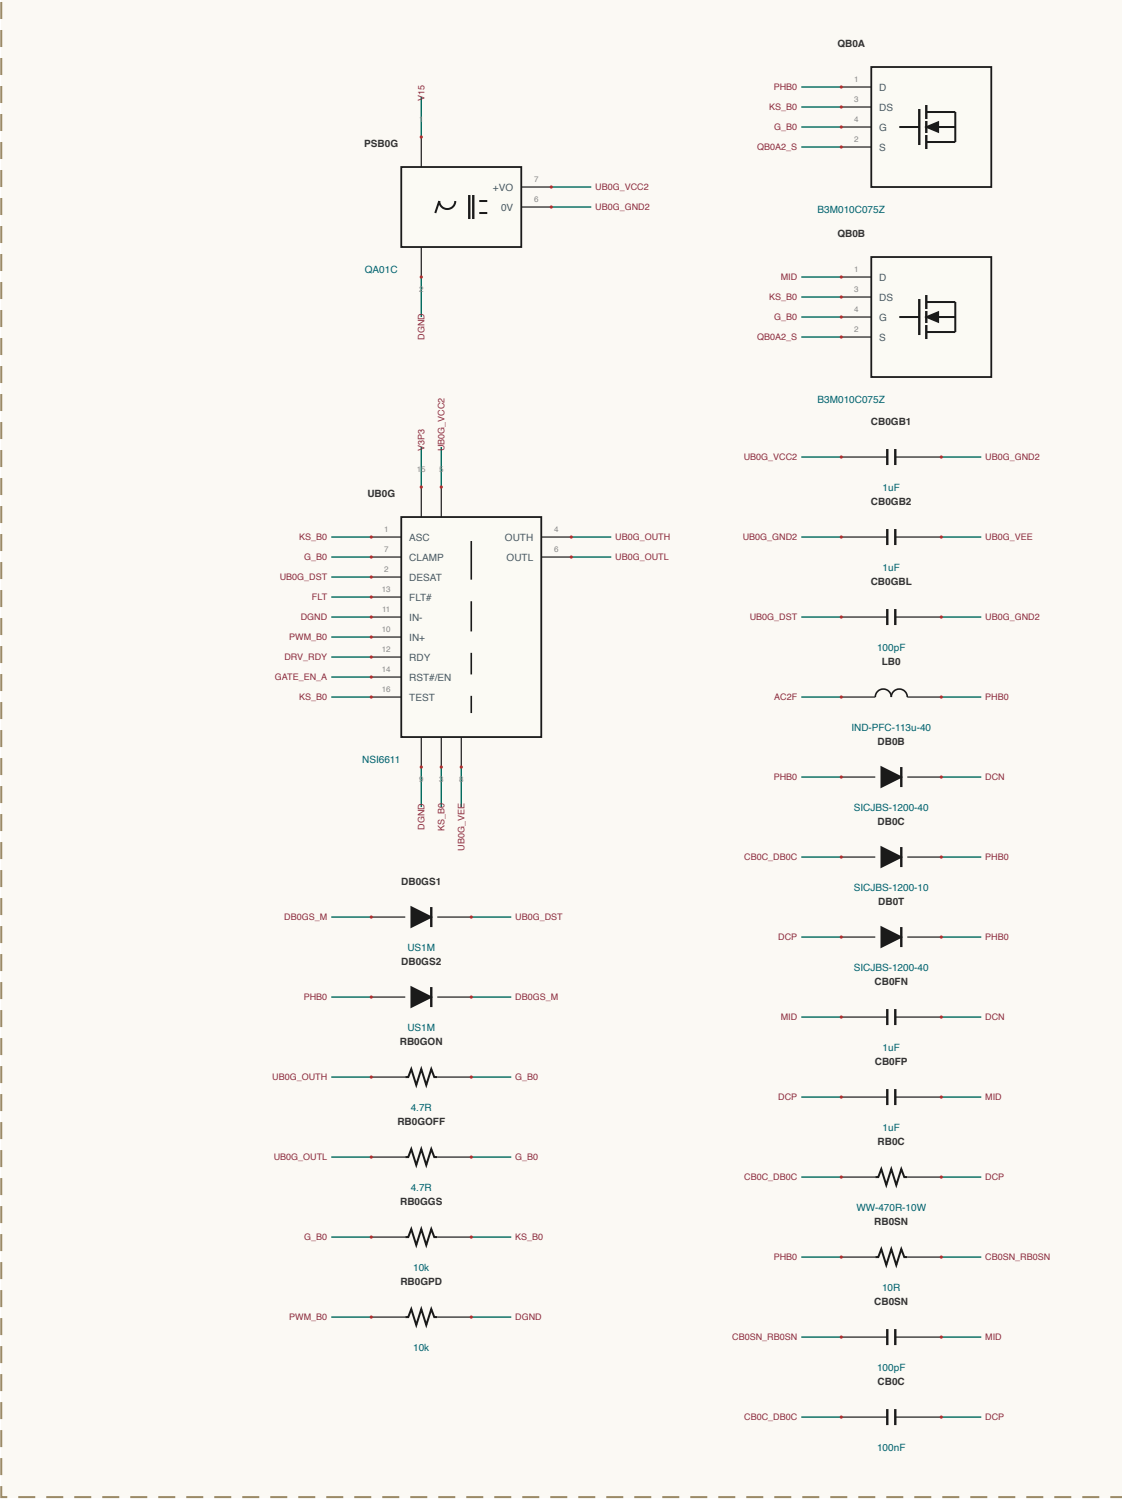

SHEET INDEX

40 kW AC-DC (lower) - 1 of 3

AC-SENSING - 6 sections

AUX-POWER - 3 sections

CONTROL - 4 sections

DC-LINK - 4 sections

INPUT-EM - 4 sections

VIENNA-PFC - 3 sections

See D.3 - 3B sections - 287 components

NET NAMING

Internal potentials are named for other they pin

Units: - offset mode at that IC pin e.g. U_{IN}, V_{IN}

Resistor: - independent of a series pin e.g. R_{IN}, R_{IN}

Inductor: - offset mode at a series pin e.g. L_{IN}, L_{IN}

Capacitor: - offset mode at a series pin e.g. C_{IN}, C_{IN}

Diode: - offset mode at a series pin e.g. D_{IN}, D_{IN}

Transistor: - offset mode at a series pin e.g. T_{IN}, T_{IN}

Relay: - offset mode at a series pin e.g. R_{IN}, R_{IN}

Optocoupler: - offset mode at a series pin e.g. O_{IN}, O_{IN}

Thermistor: - offset mode at a series pin e.g. T_{IN}, T_{IN}

Resistor: - offset mode at a series pin e.g. R_{IN}, R_{IN}

Inductor: - offset mode at a series pin e.g. L_{IN}, L_{IN}

Capacitor: - offset mode at a series pin e.g. C_{IN}, C_{IN}

Diode: - offset mode at a series pin e.g. D_{IN}, D_{IN}

Transistor: - offset mode at a series pin e.g. T_{IN}, T_{IN}

Relay: - offset mode at a series pin e.g. R_{IN}, R_{IN}

Optocoupler: - offset mode at a series pin e.g. O_{IN}, O_{IN}

Thermistor: - offset mode at a series pin e.g. T_{IN}, T_{IN}

Resistor: - offset mode at a series pin e.g. R_{IN}, R_{IN}

Inductor: - offset mode at a series pin e.g. L_{IN}, L_{IN}

Capacitor: - offset mode at a series pin e.g. C_{IN}, C_{IN}

Diode: - offset mode at a series pin e.g. D_{IN}, D_{IN}

Transistor: - offset mode at a series pin e.g. T_{IN}, T_{IN}

Relay: - offset mode at a series pin e.g. R_{IN}, R_{IN}

Optocoupler: - offset mode at a series pin e.g. O_{IN}, O_{IN}

Thermistor: - offset mode at a series pin e.g. T_{IN}, T_{IN}