
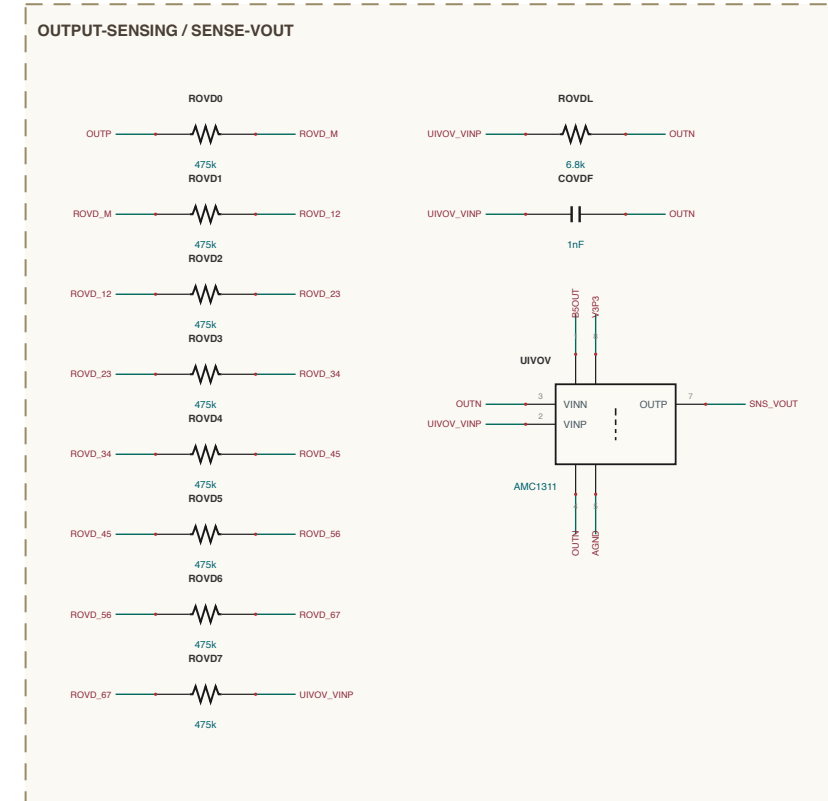
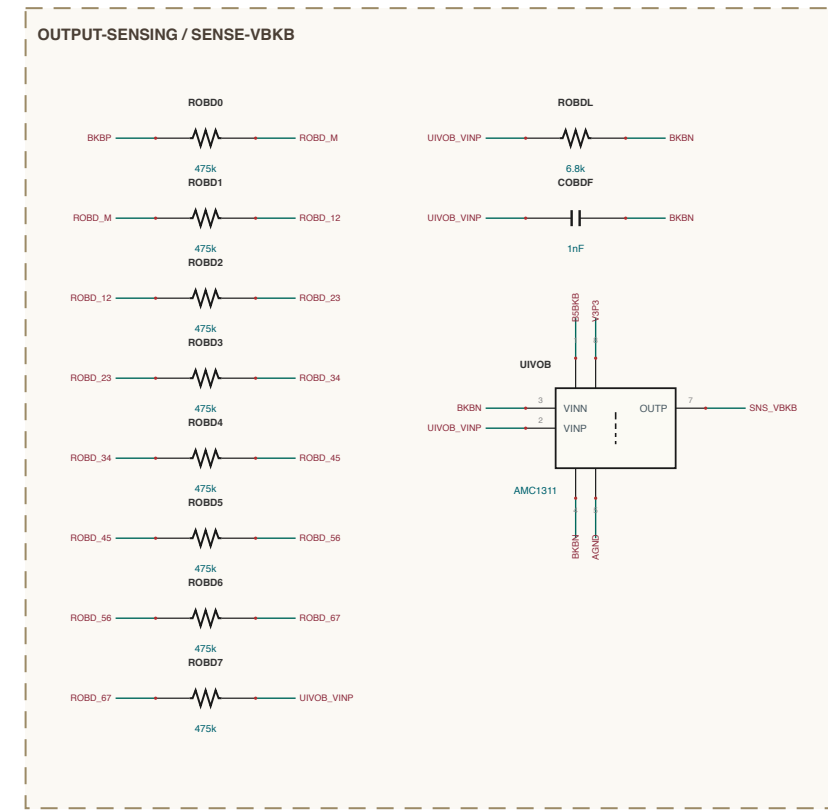
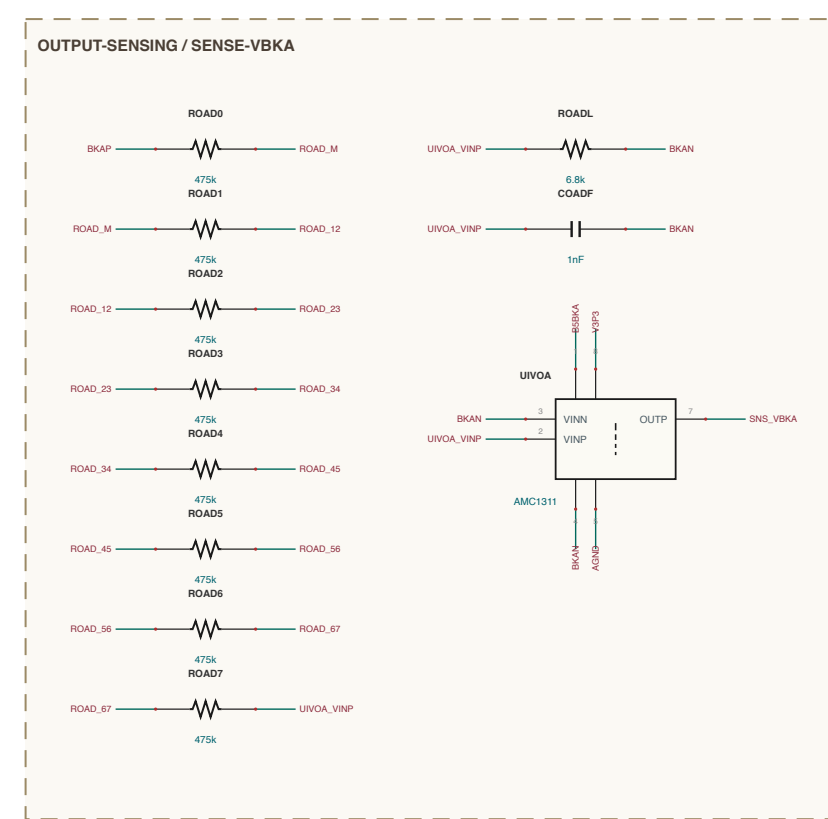
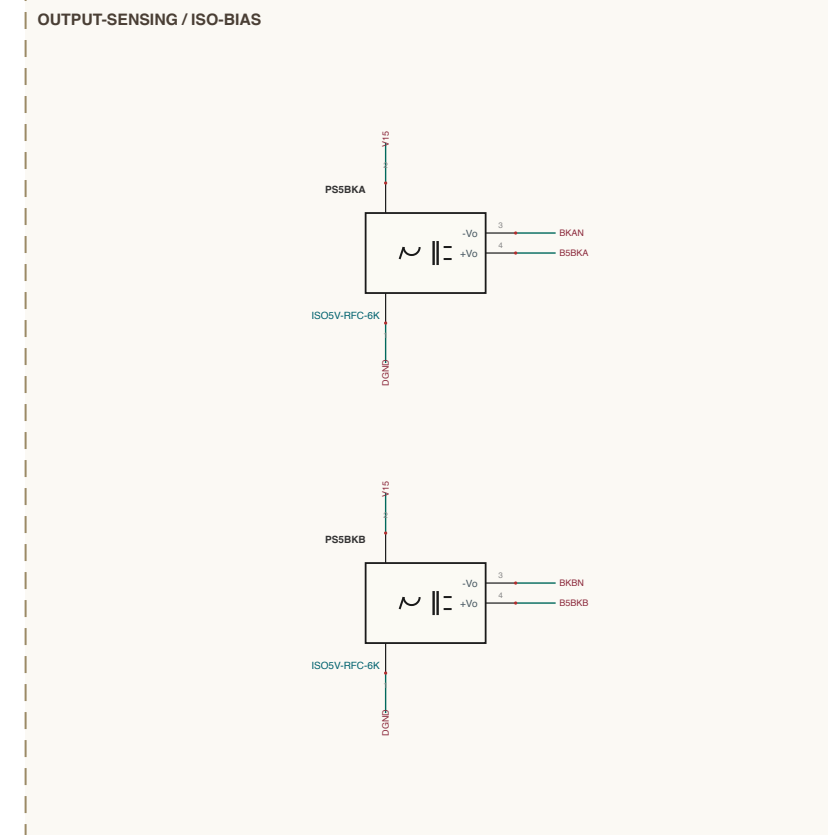
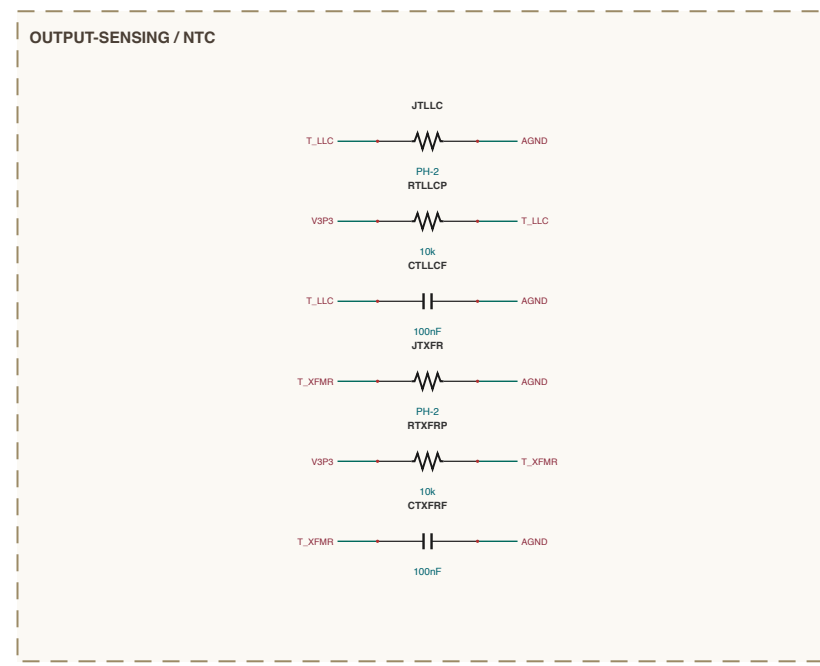
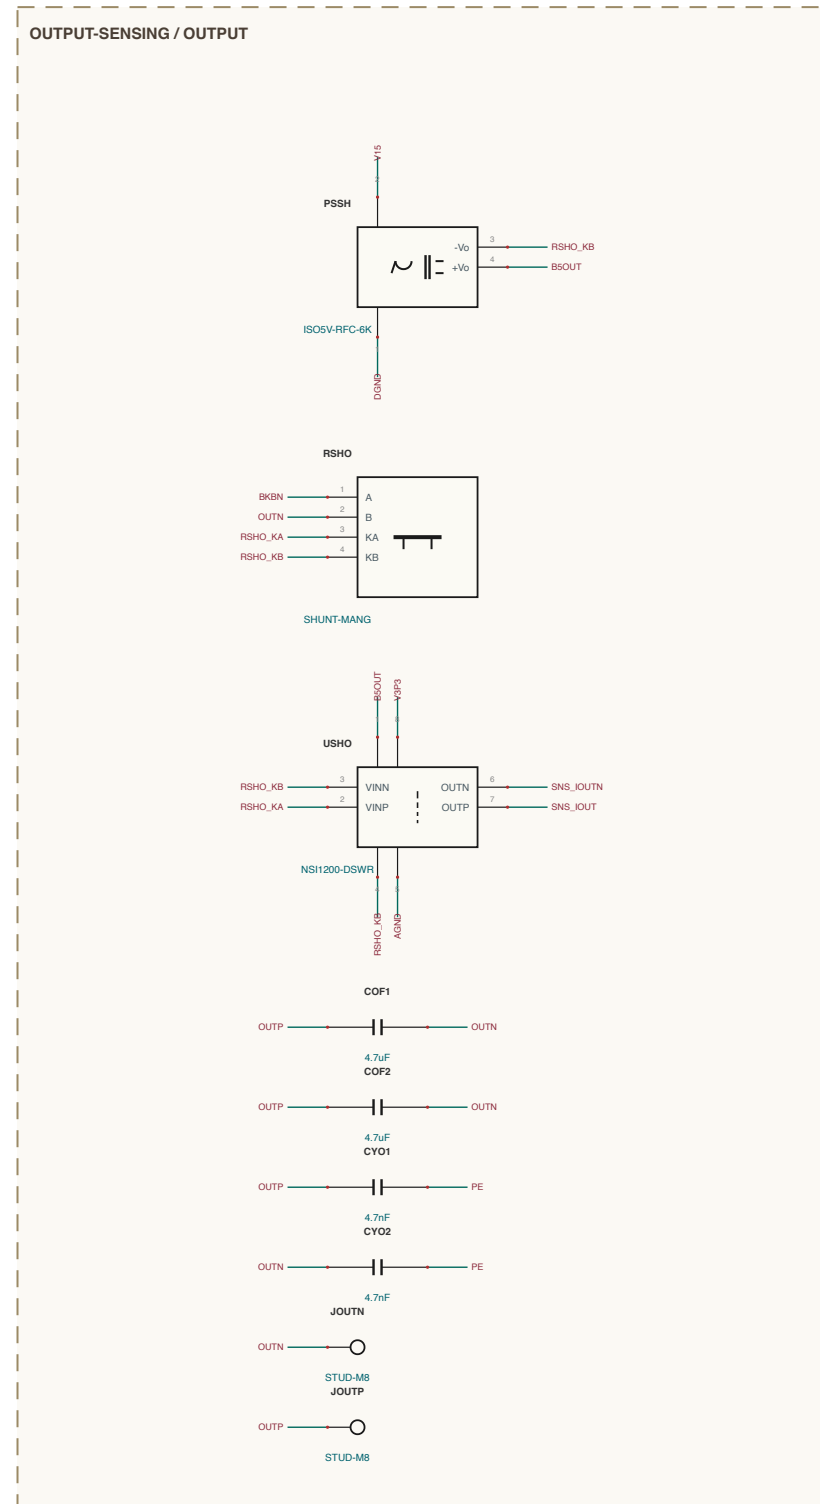
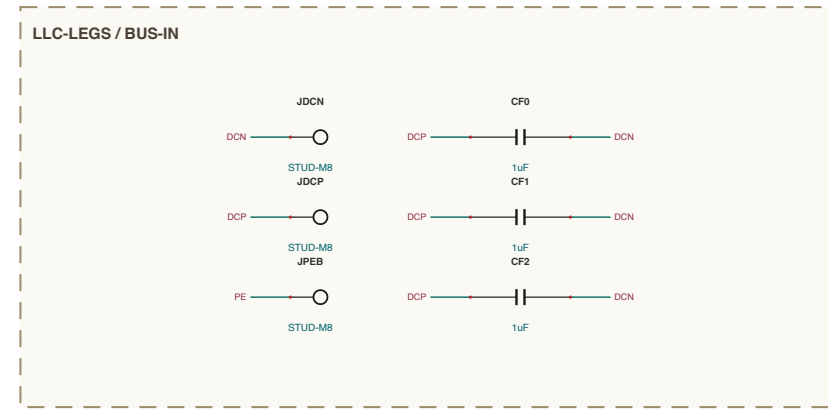
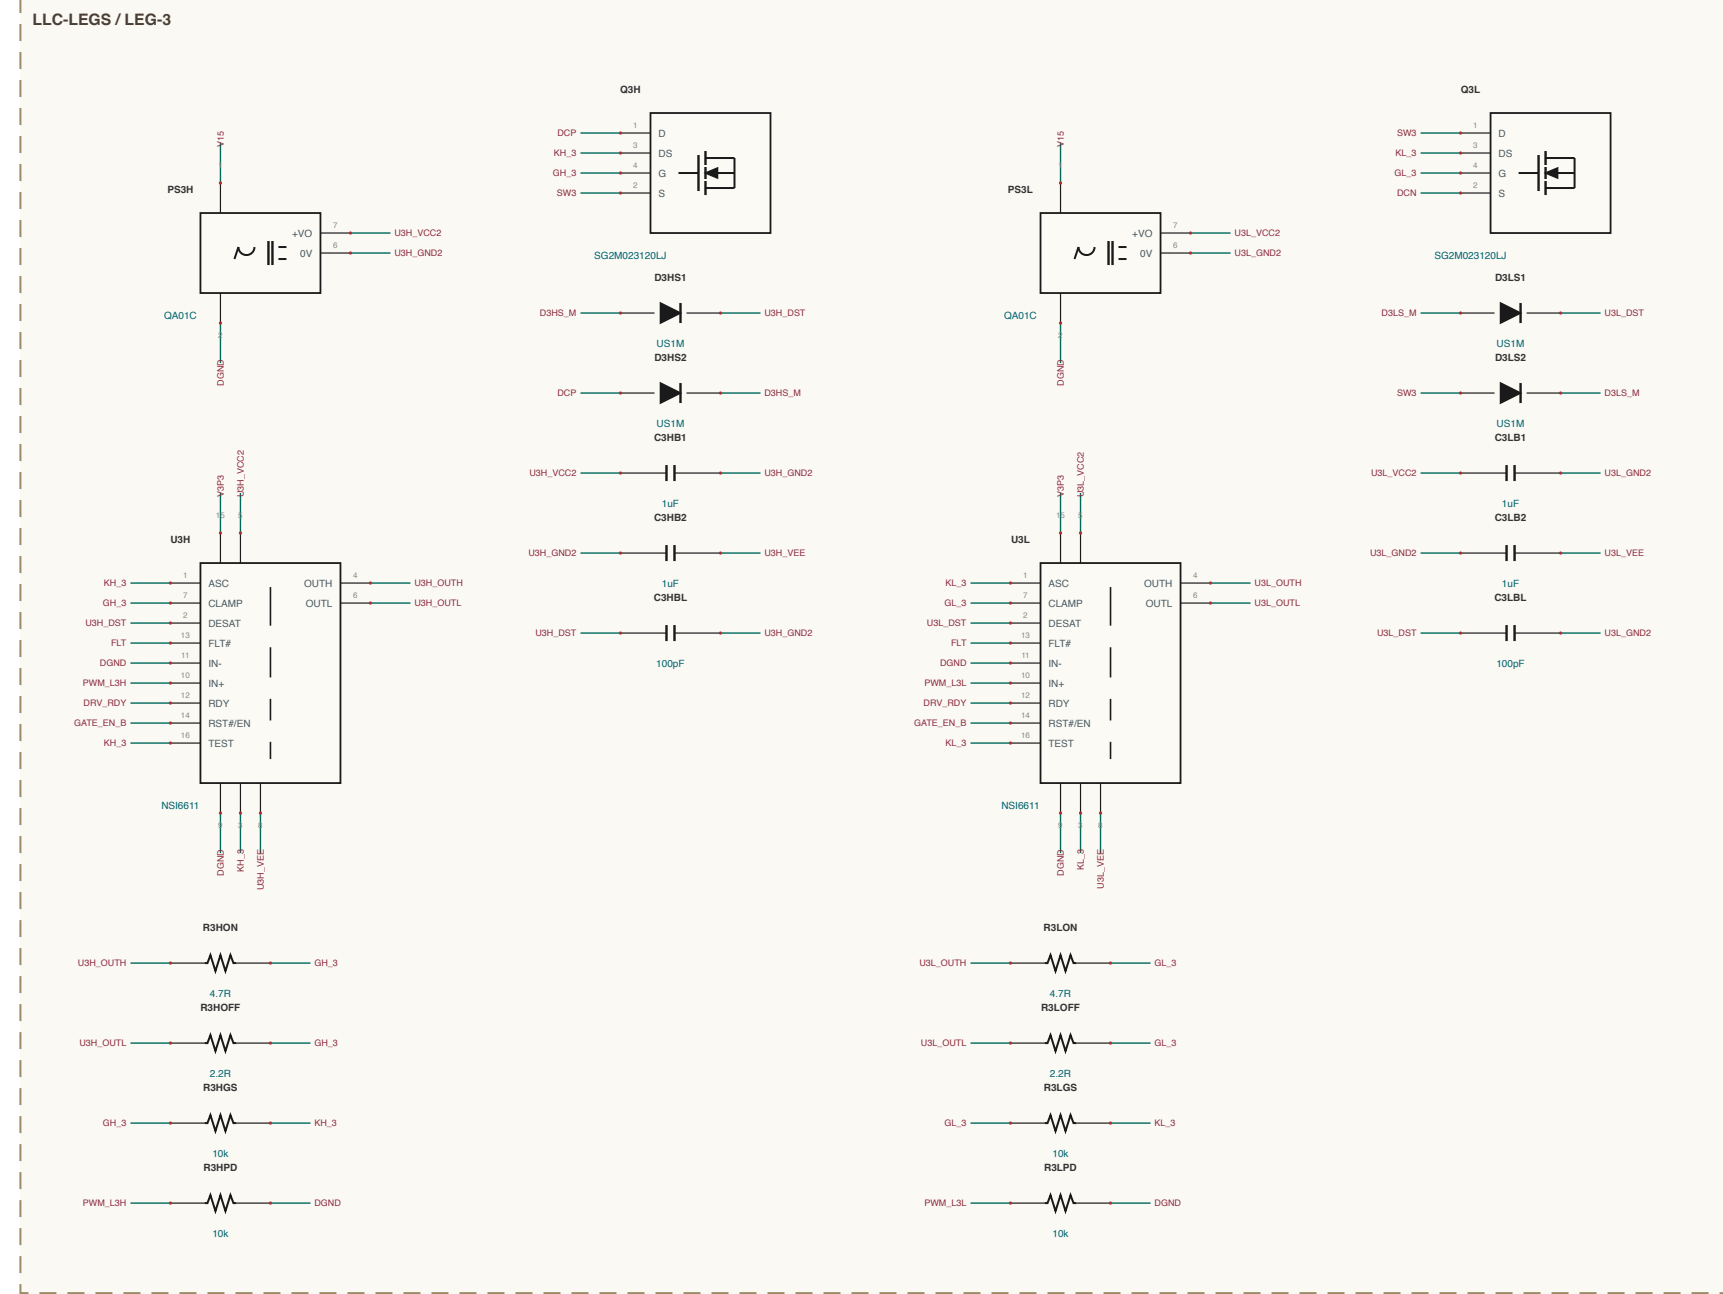
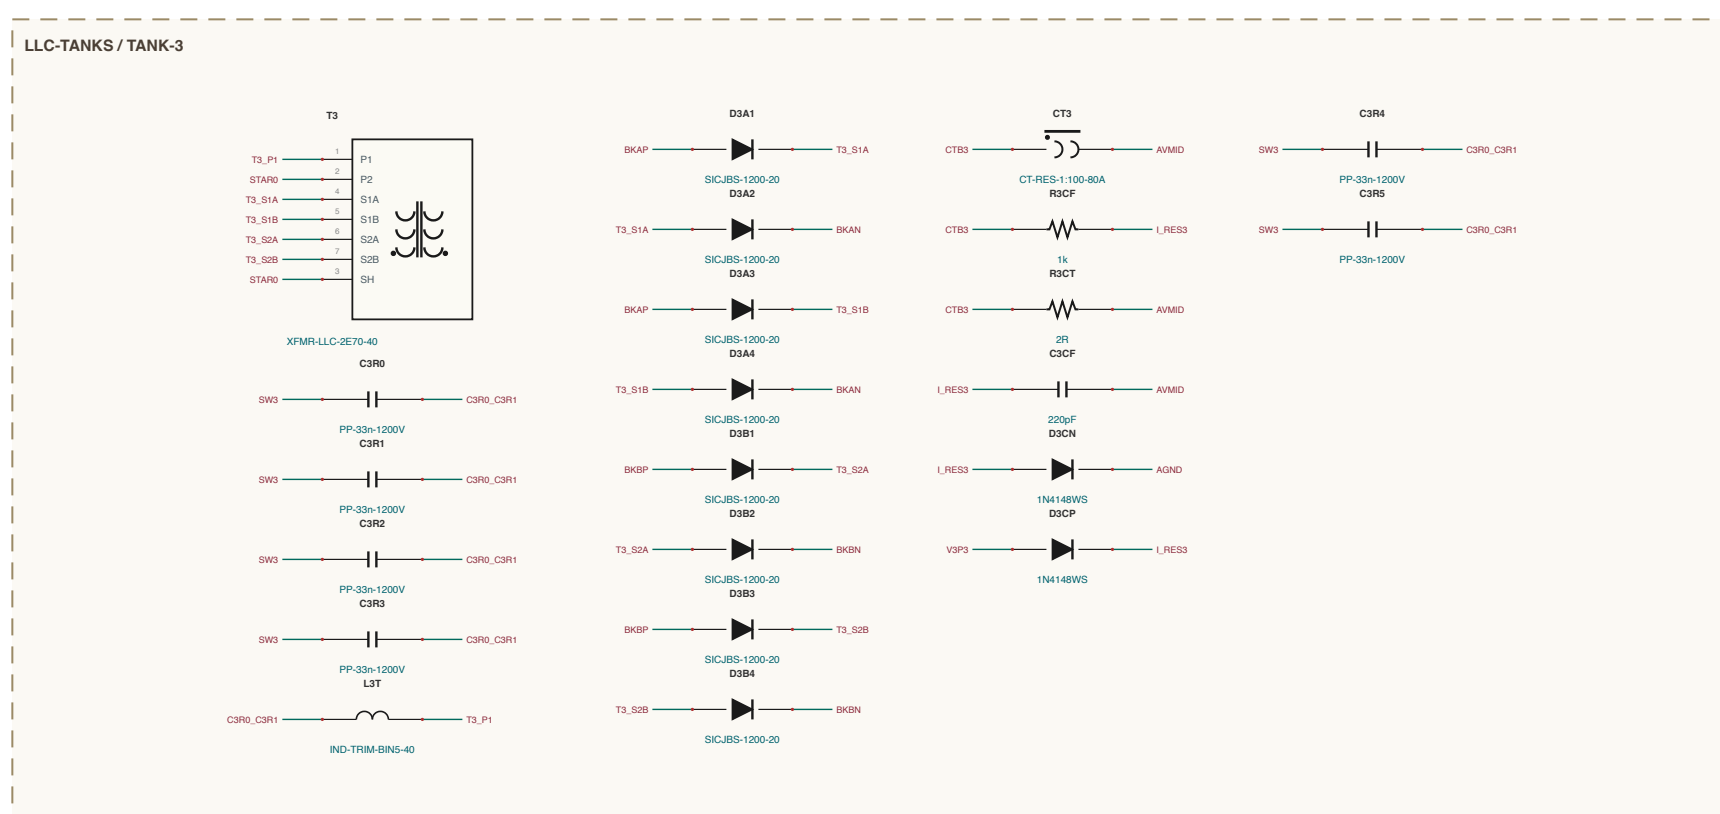
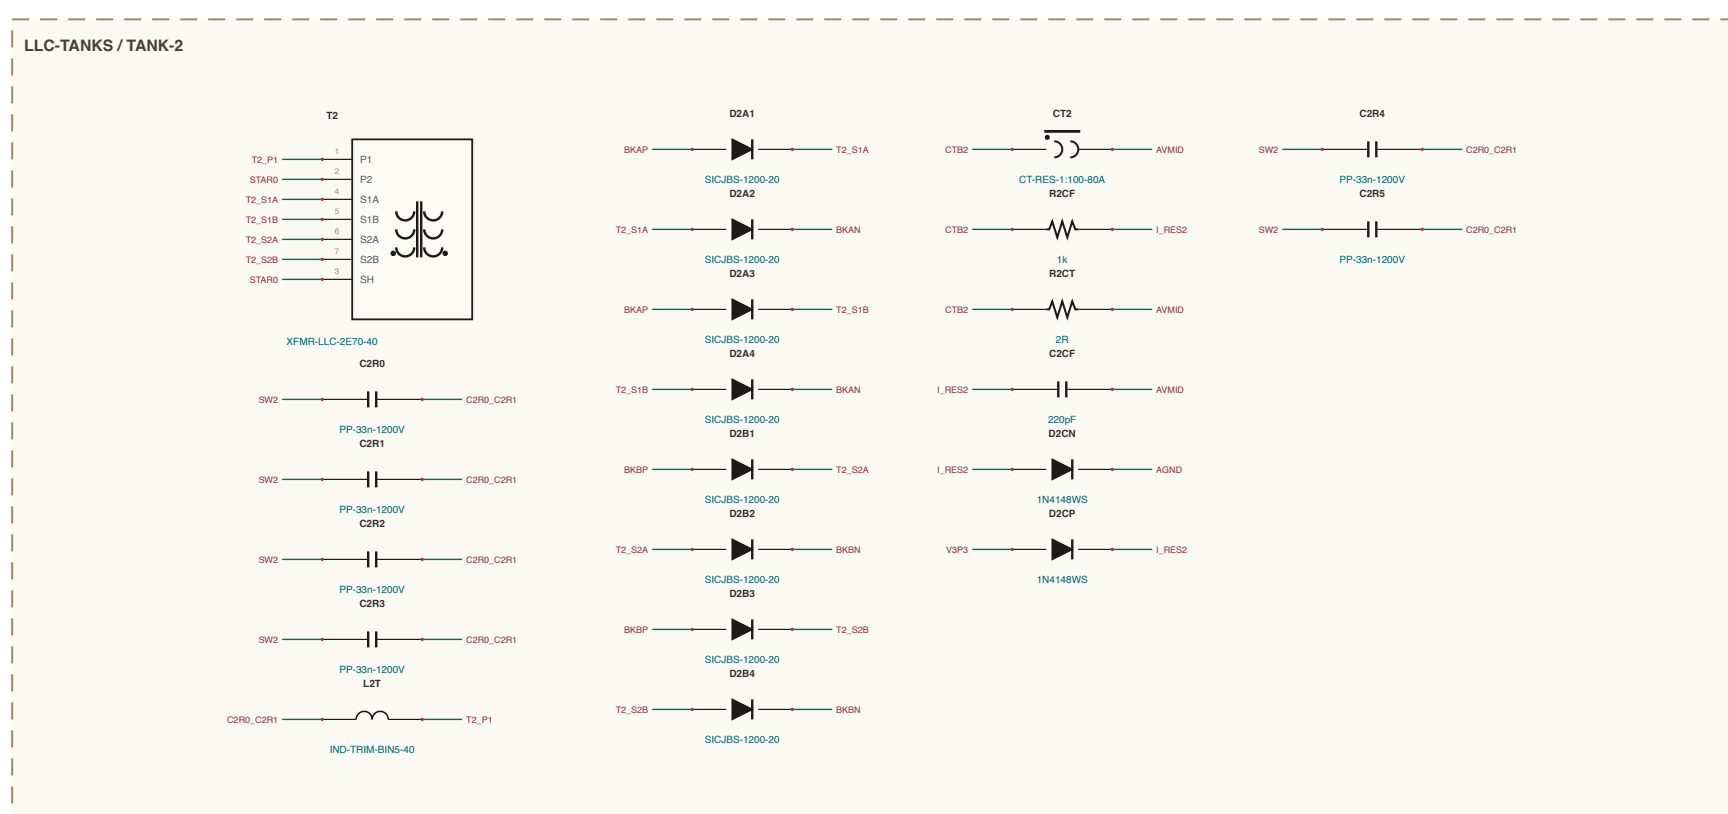
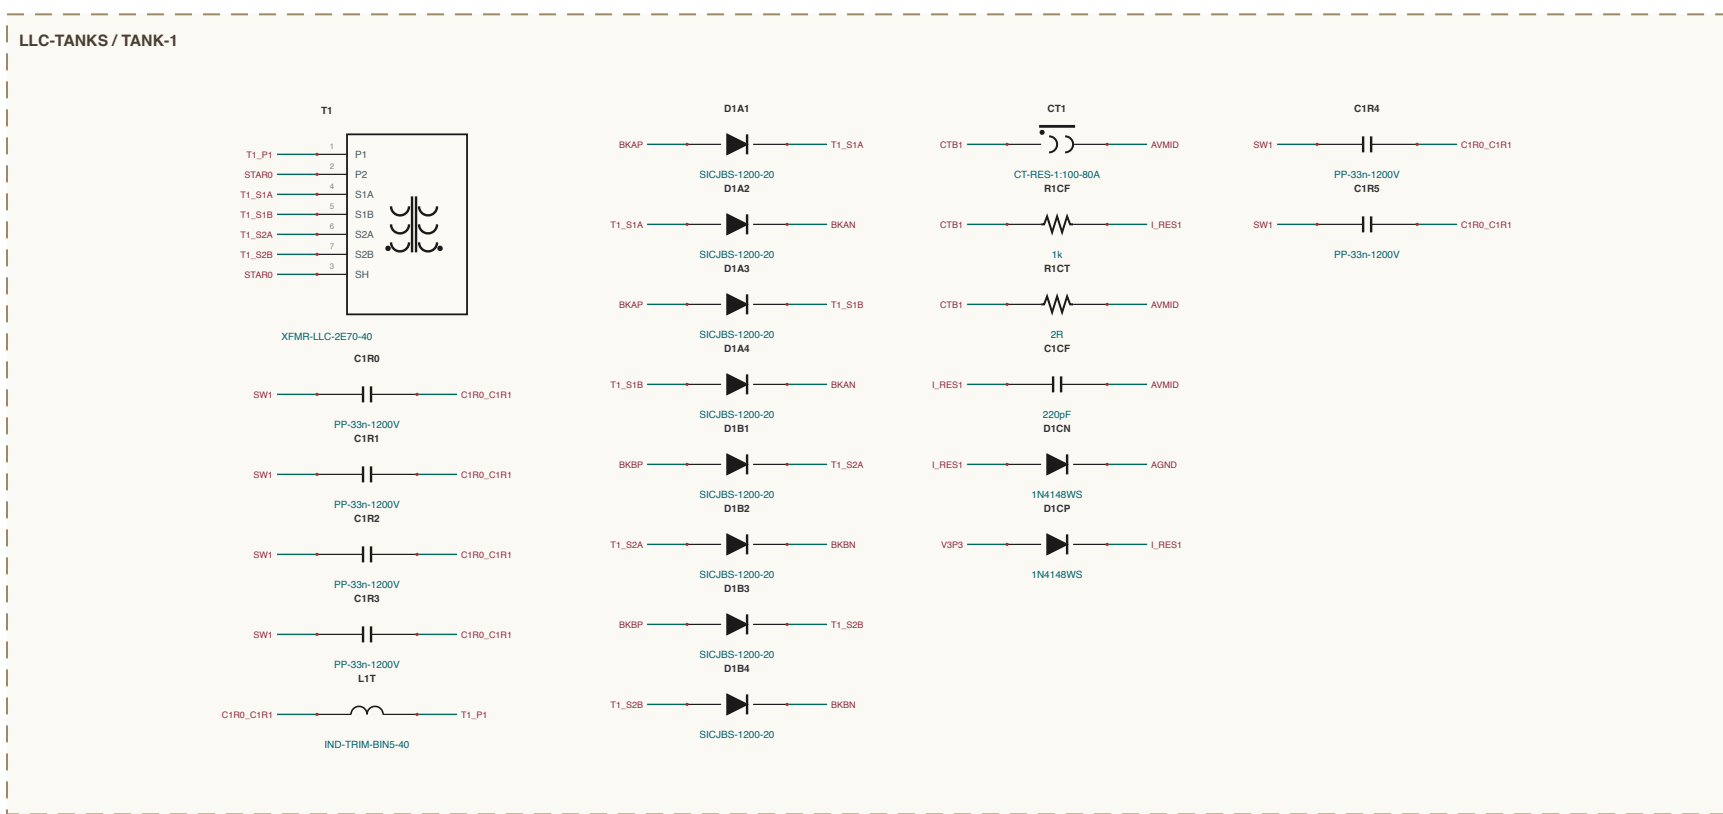
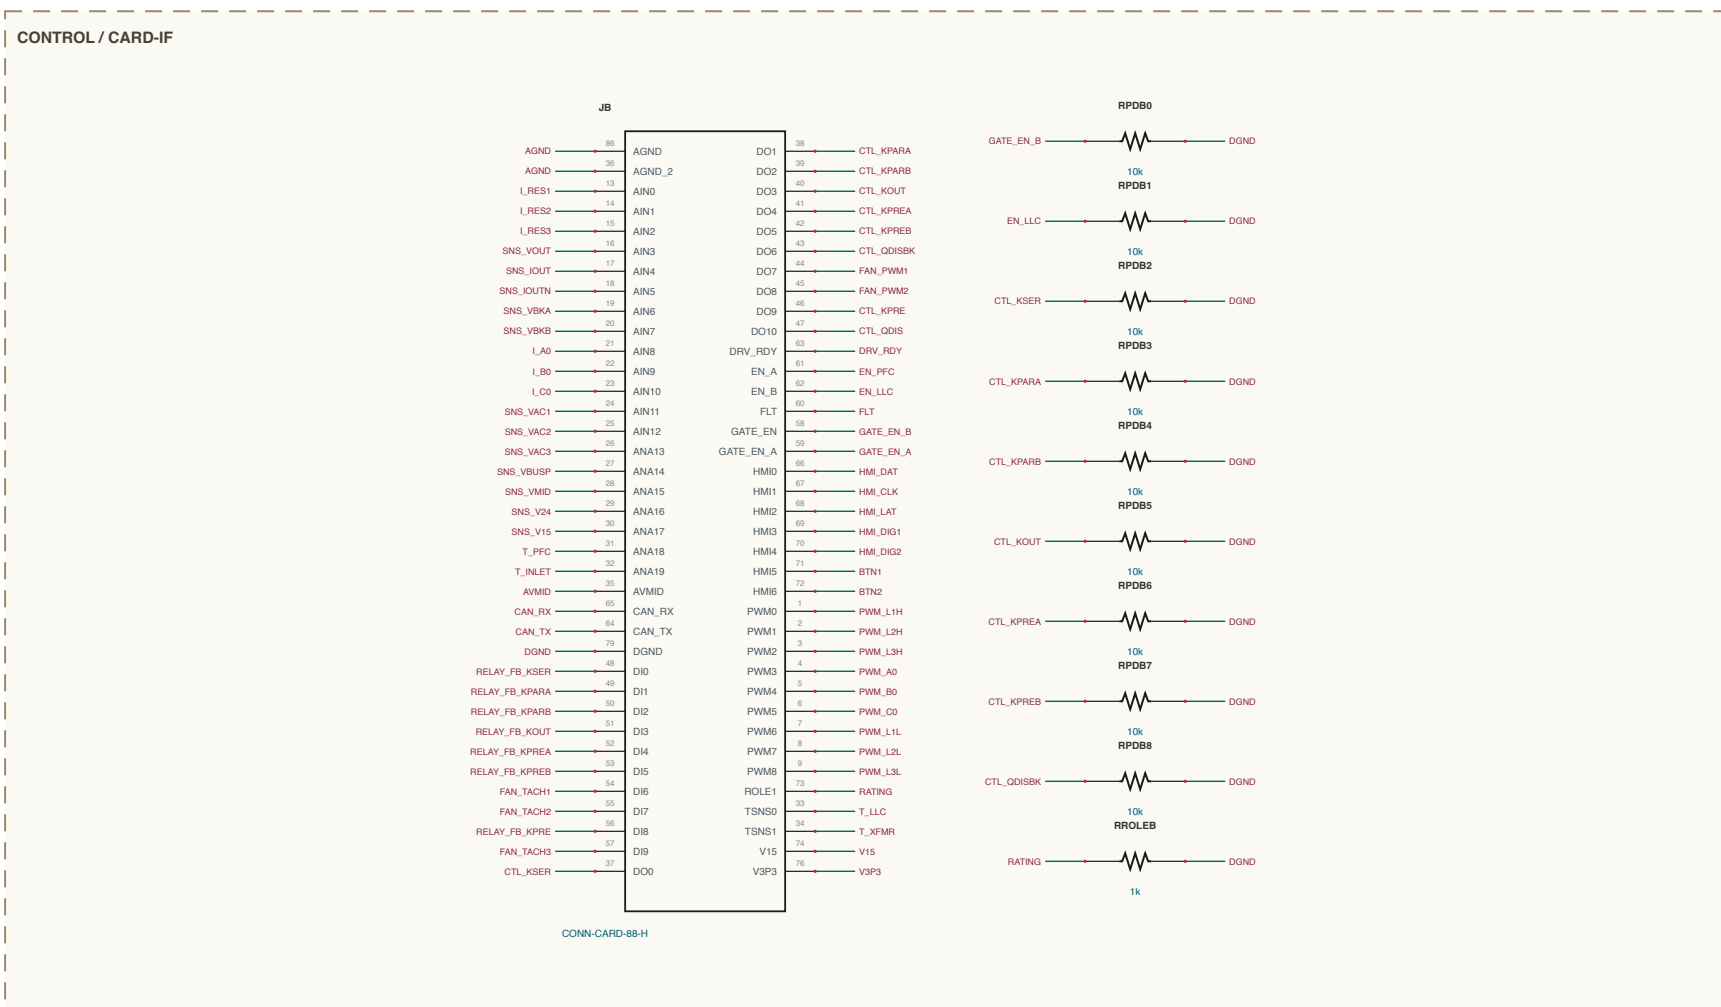
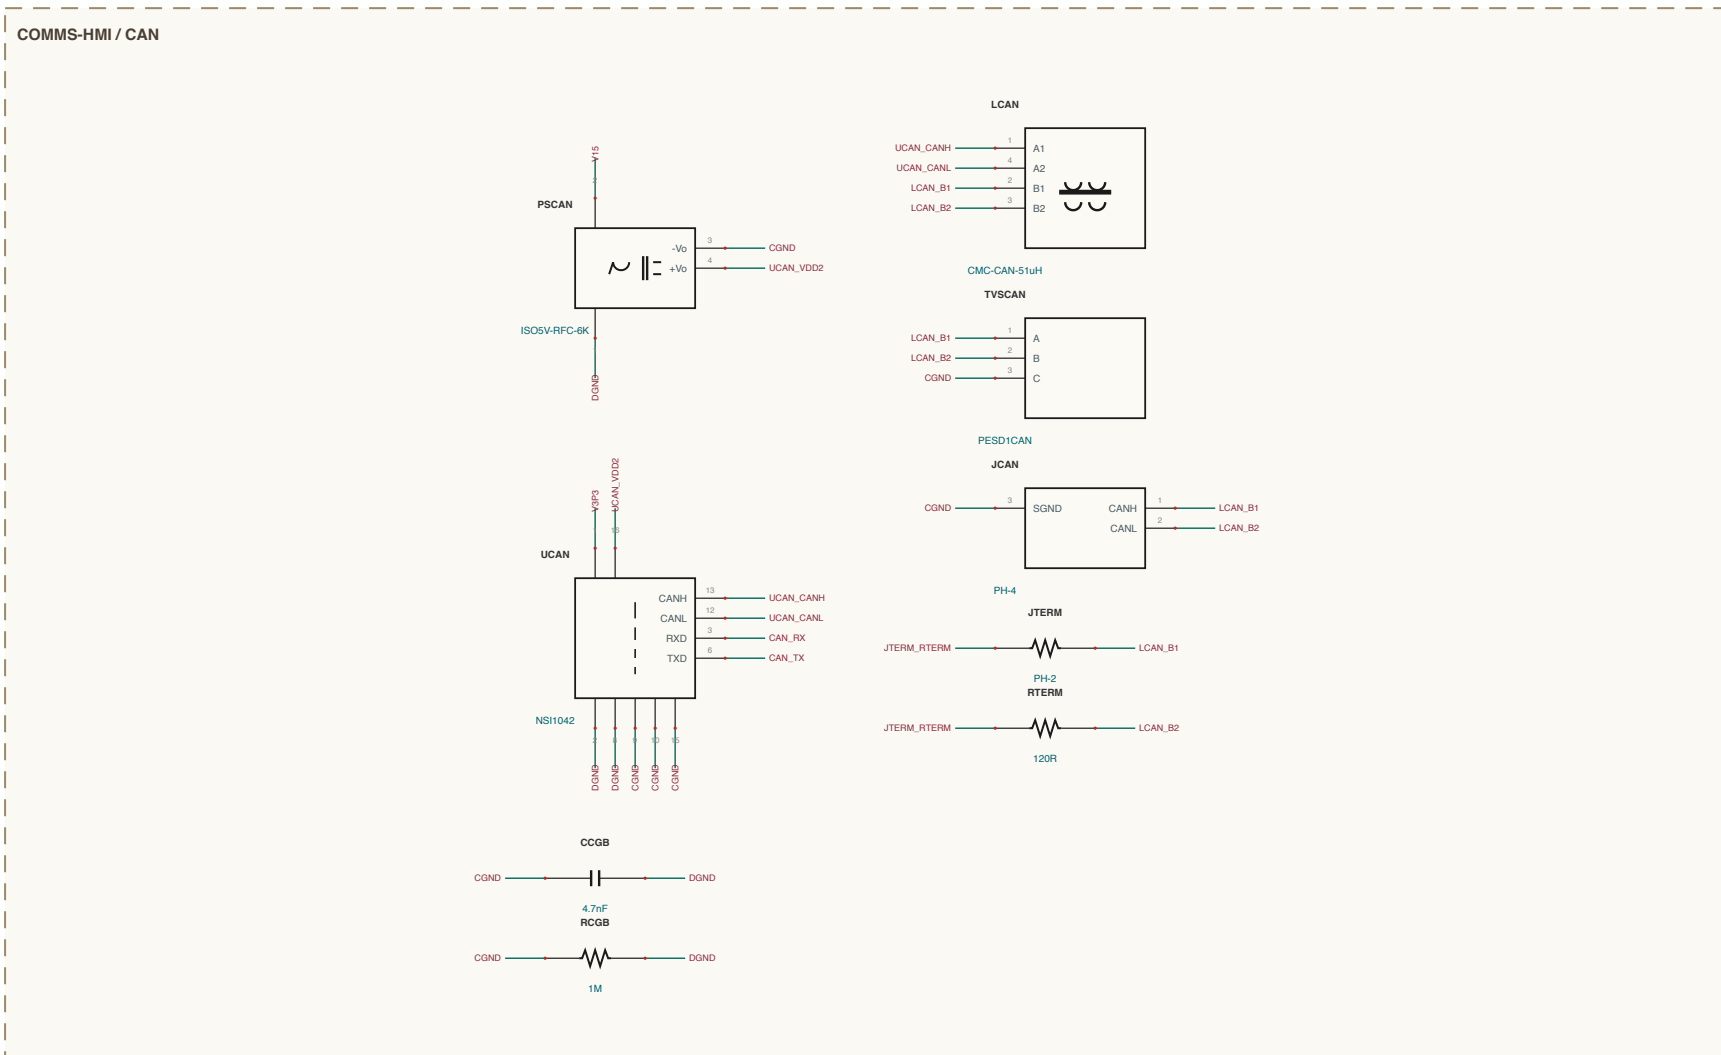
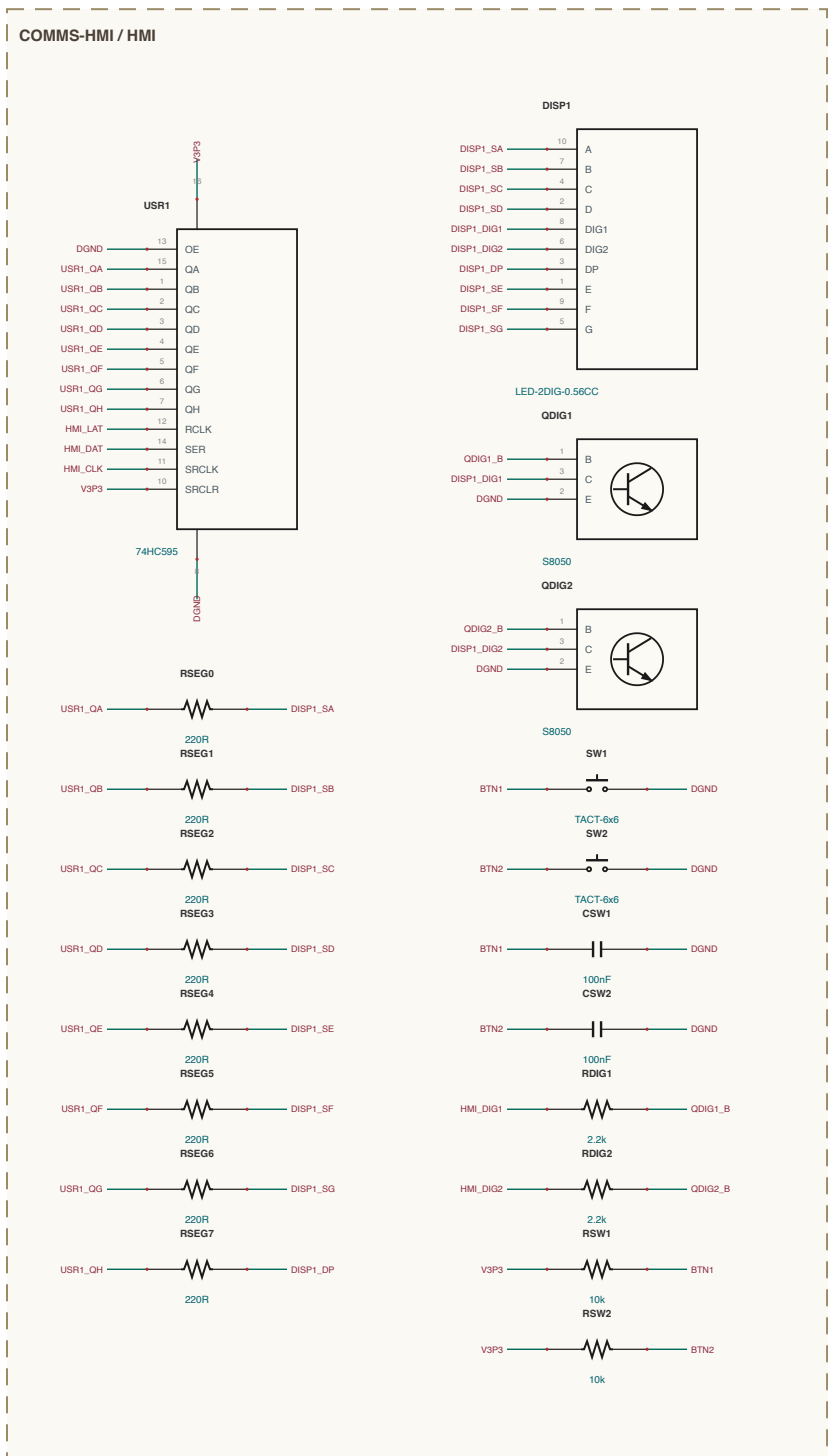
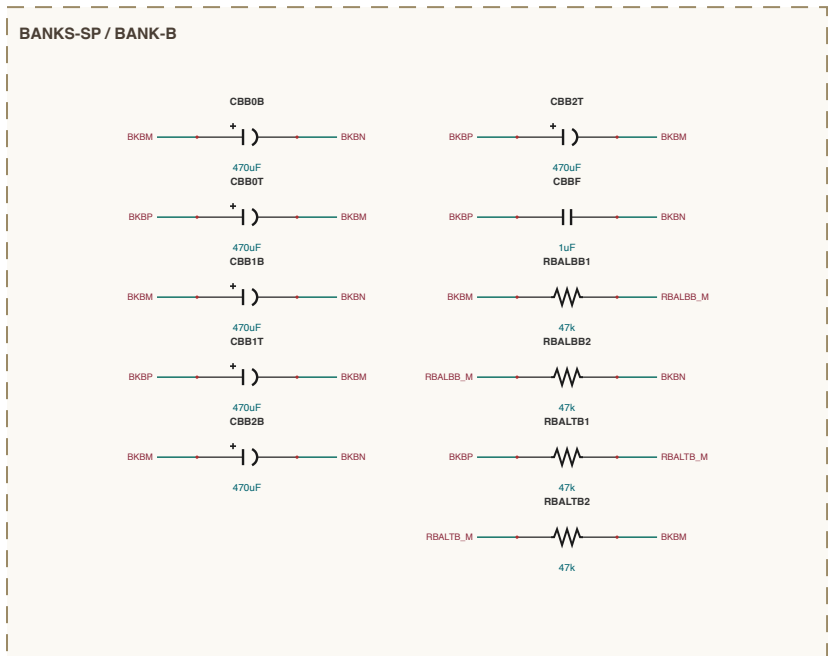
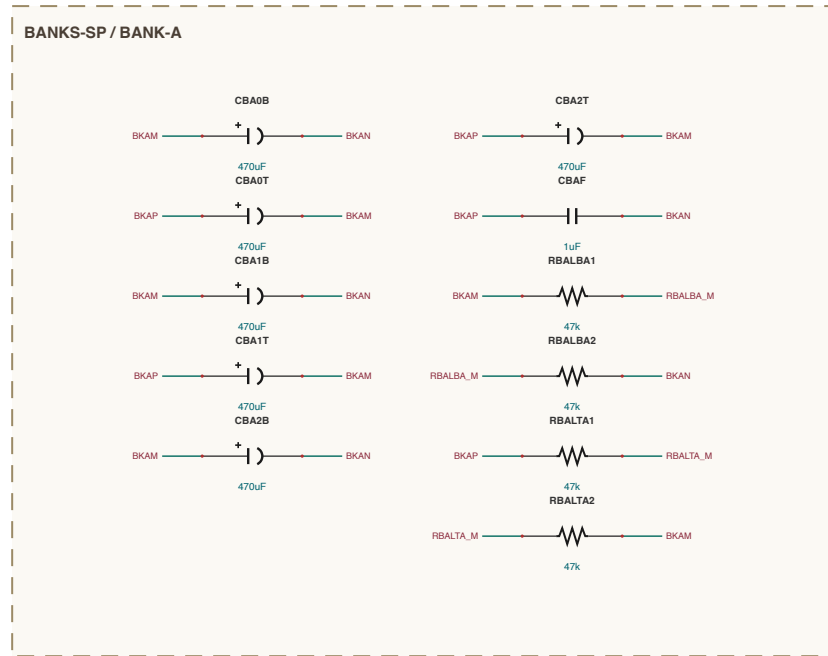
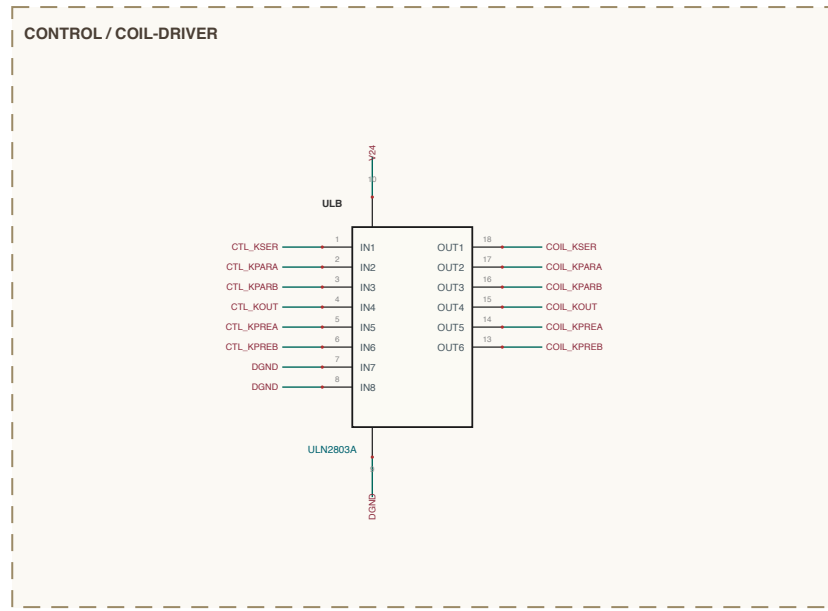
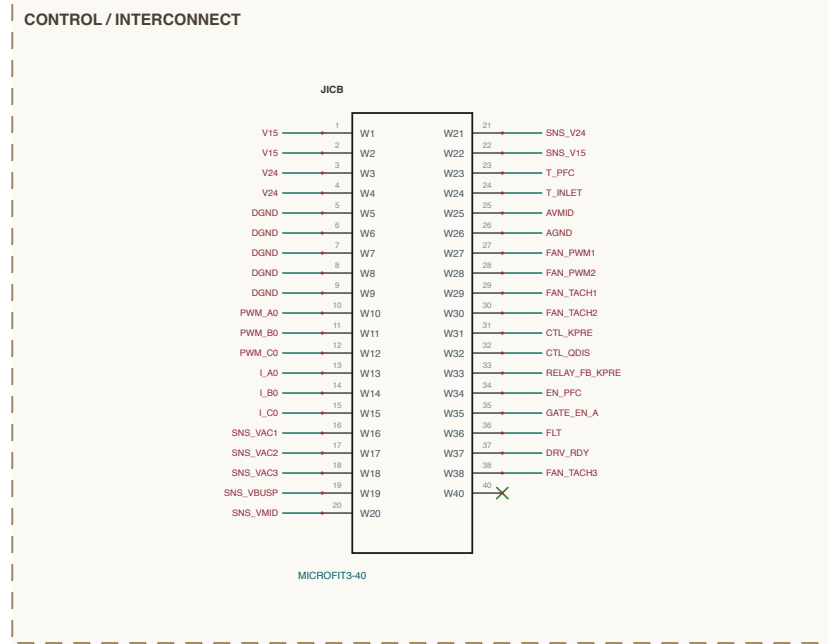
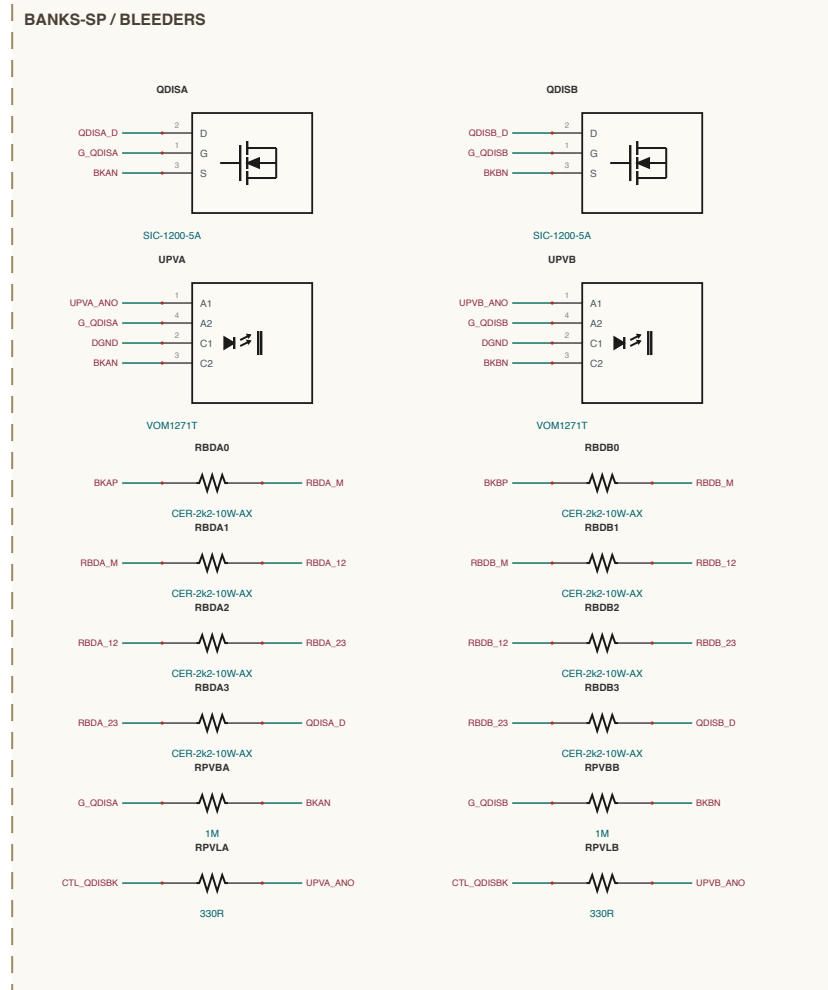


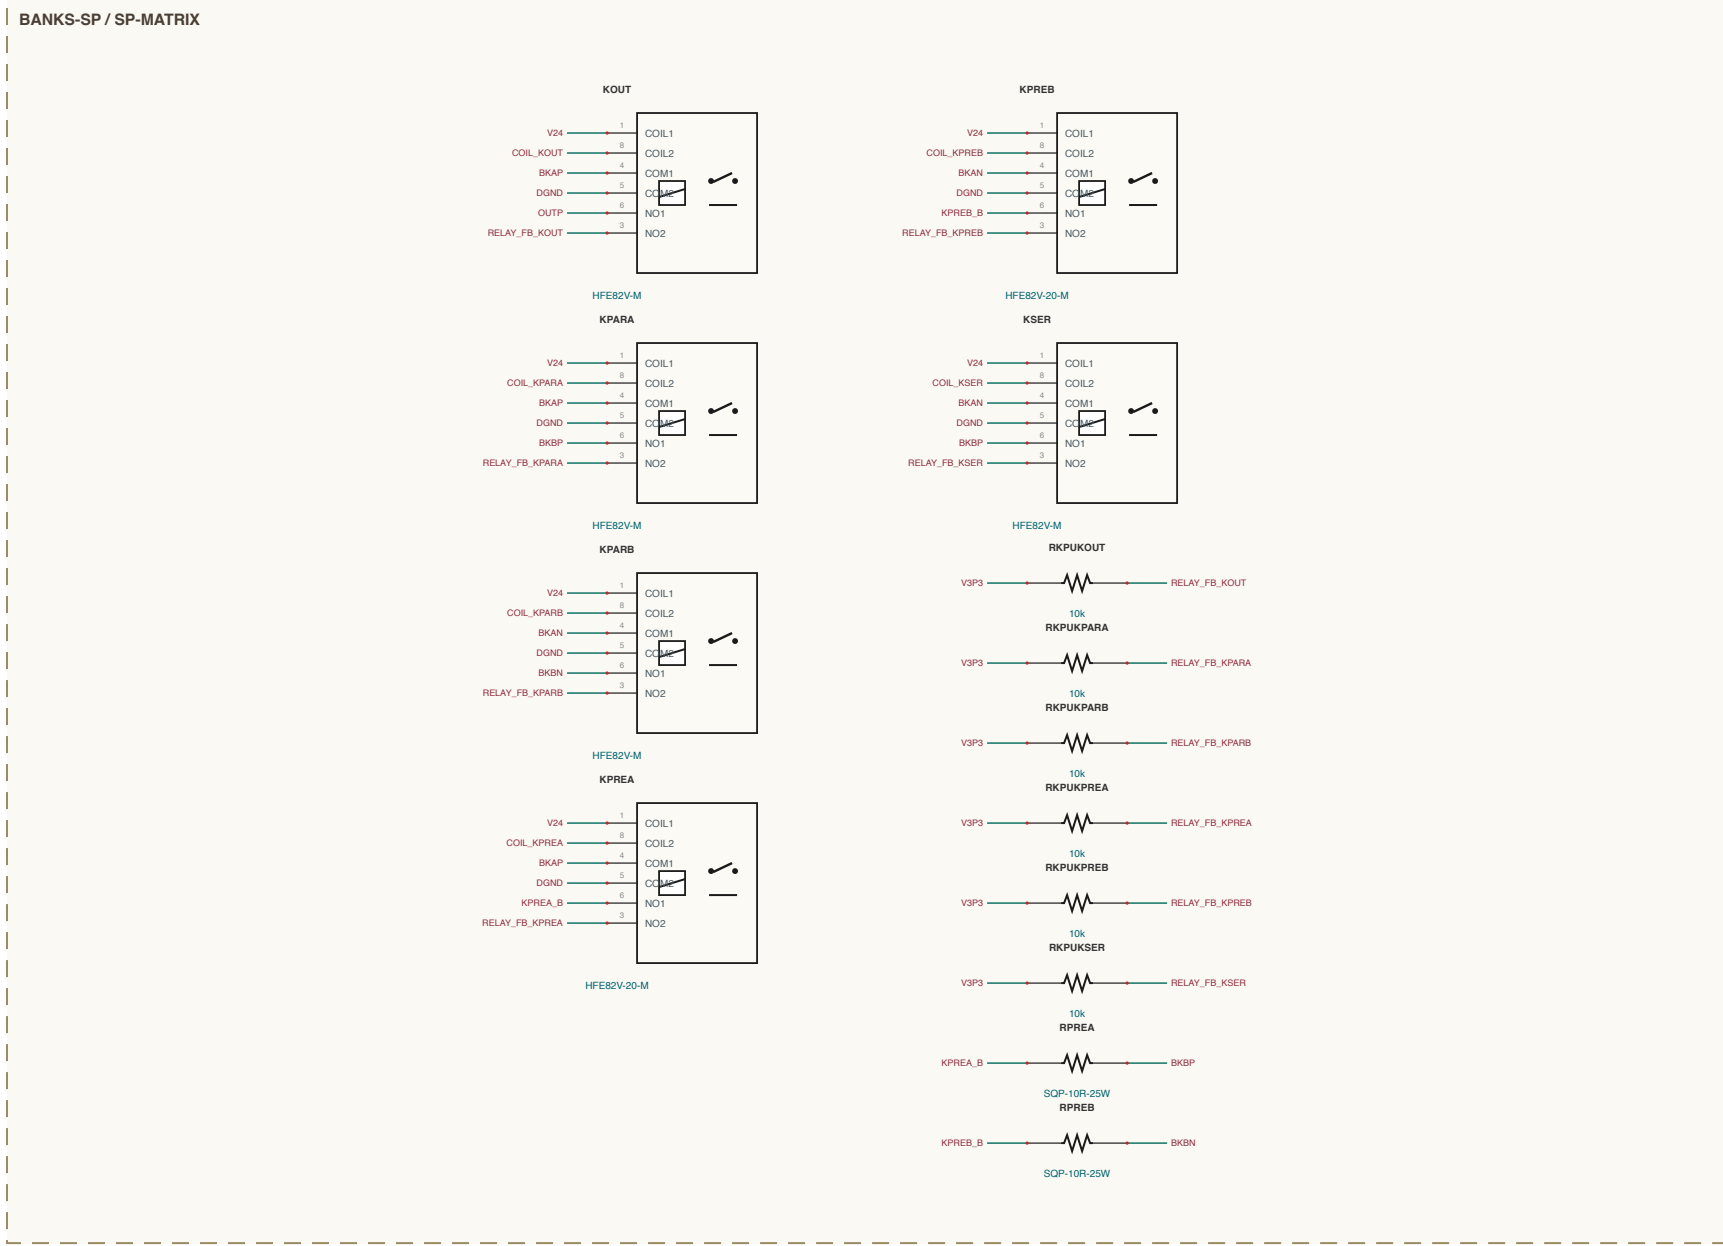

SHEET INDEX	
40 kW DC-DC (upper)	2 of 3
OUTPUT-SENSING - 6 sections	
BANKS-SP - 4 sections	
LLC-LEGS - 4 sections	
CONTROL - 3 sections	
LLC-TANKS - 3 sections	
COMMS-HMI - 2 sections	
rev 0.3 - 22 sections - 388 components	
NET NAMING	
Internal junctions are named for what they join	
Useful - JPNs node at that IC pin e.g. UPV0A_VBSP	
Resistor - M midpoint of a series pair e.g. RBKLA_M	
Resistor - vvvv-xxx-xxx between Resistor e.g. RPT02_01	
All others are explicit design nets	