




AC-SENSING / ISO-BIAS

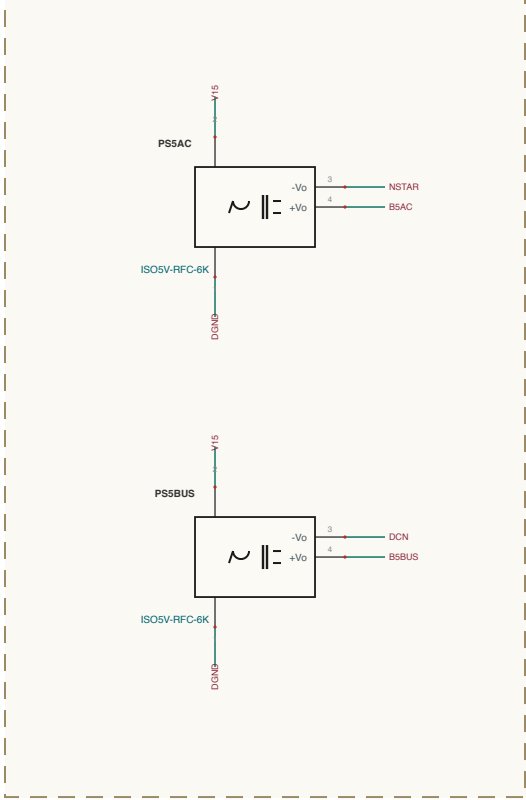


AC-SENSING / SENSE-VAC1

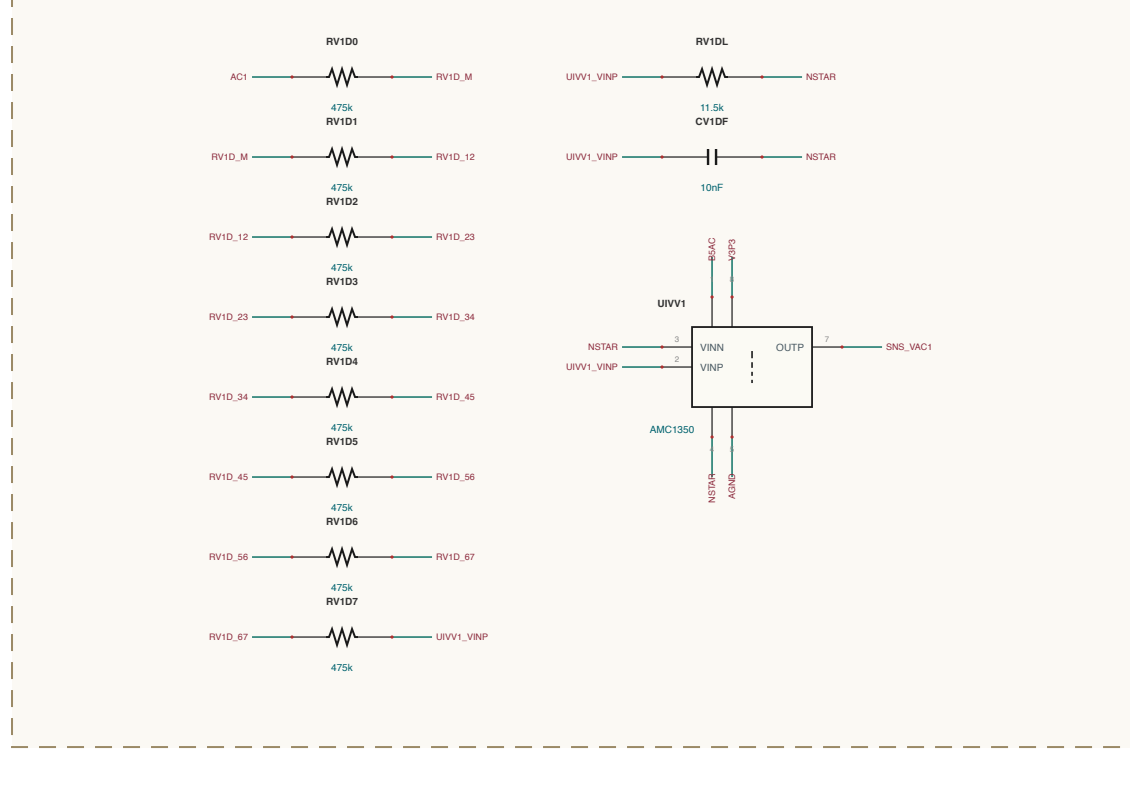


AC-SENSING / SENSE-VAC2

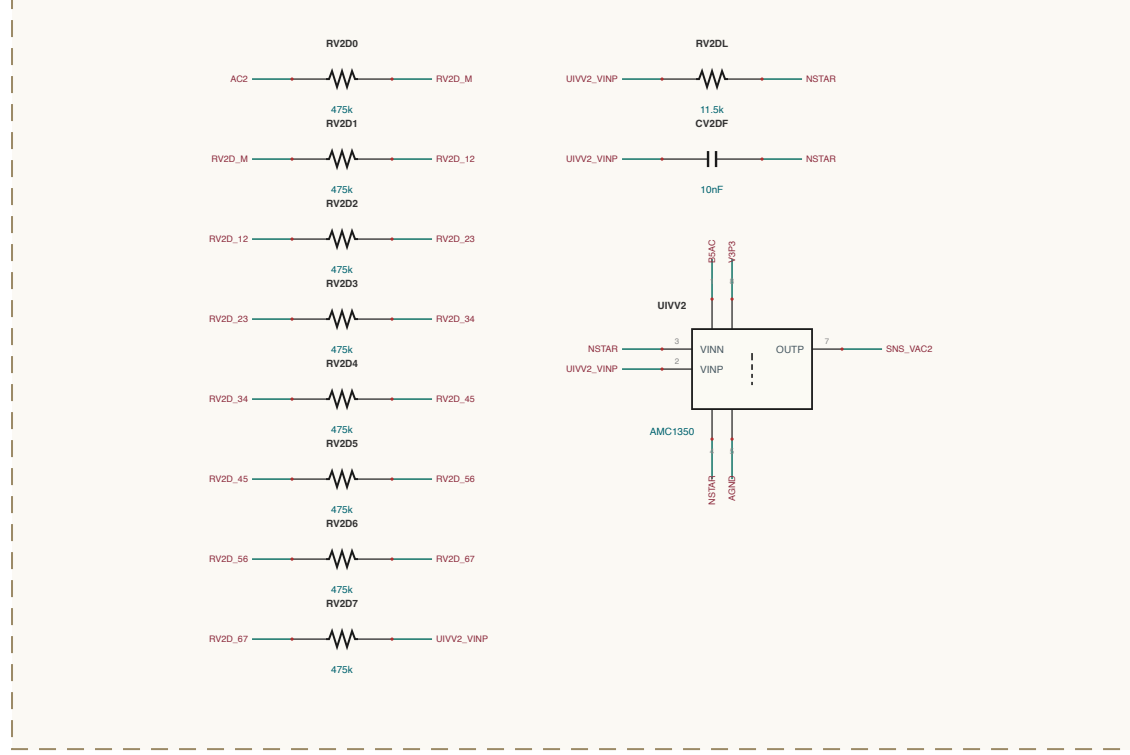


AC-SENSING / SENSE-VAC3

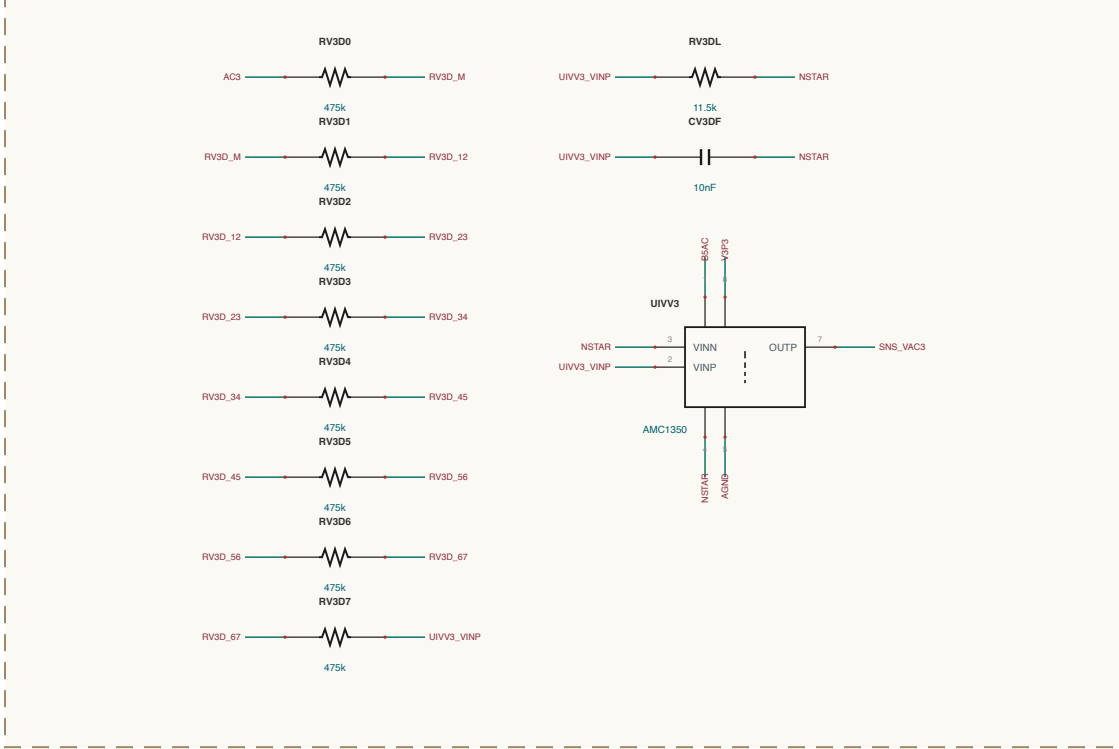


AC-SENSING / SENSE-VBUS

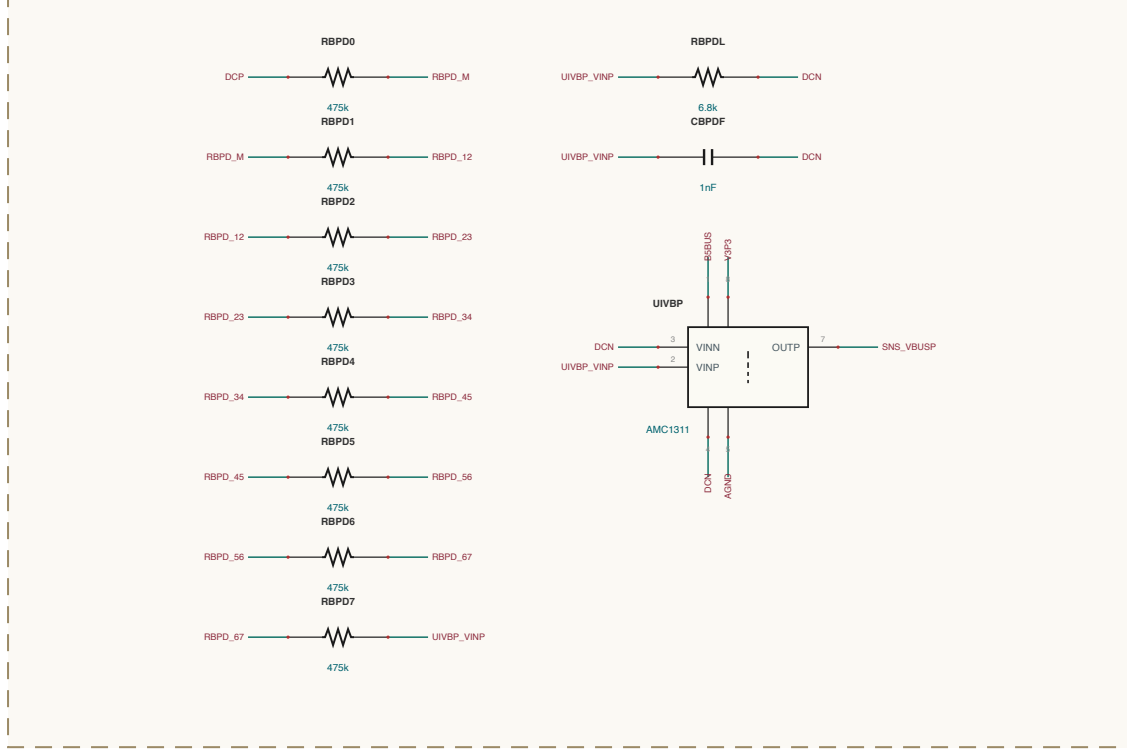


AC-SENSING / SENSE-VIND

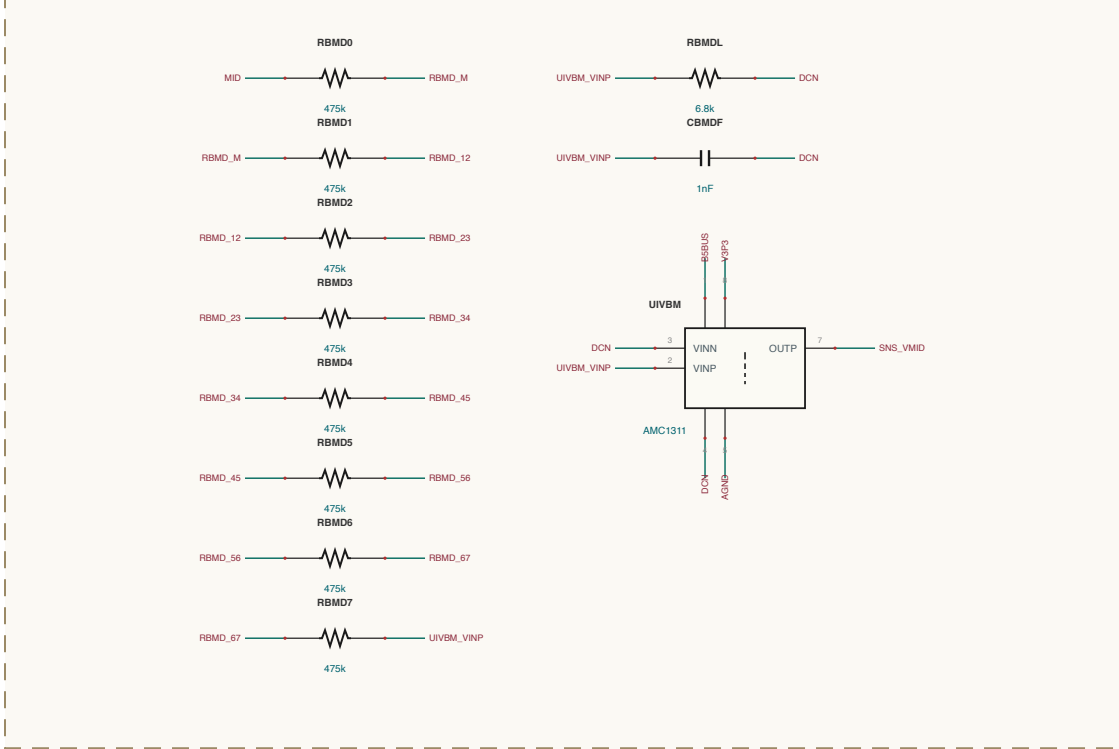


AC-SENSING / STAR

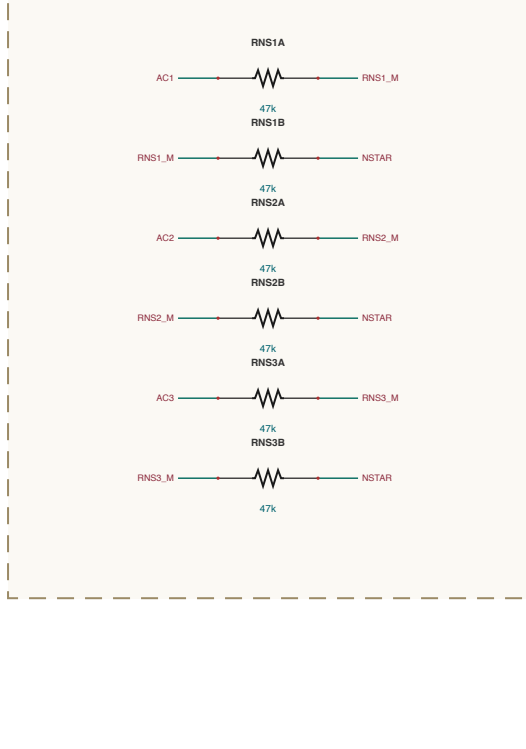


AC-SENSING / NTC

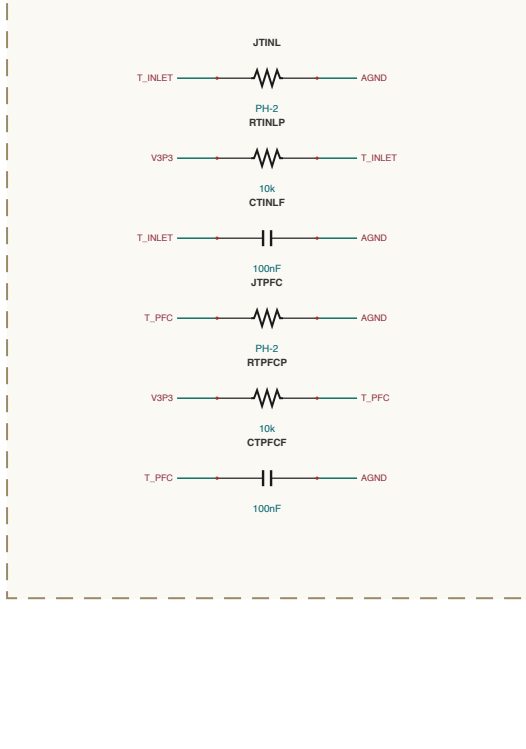


AC-SENSING / LINE-CTS-0

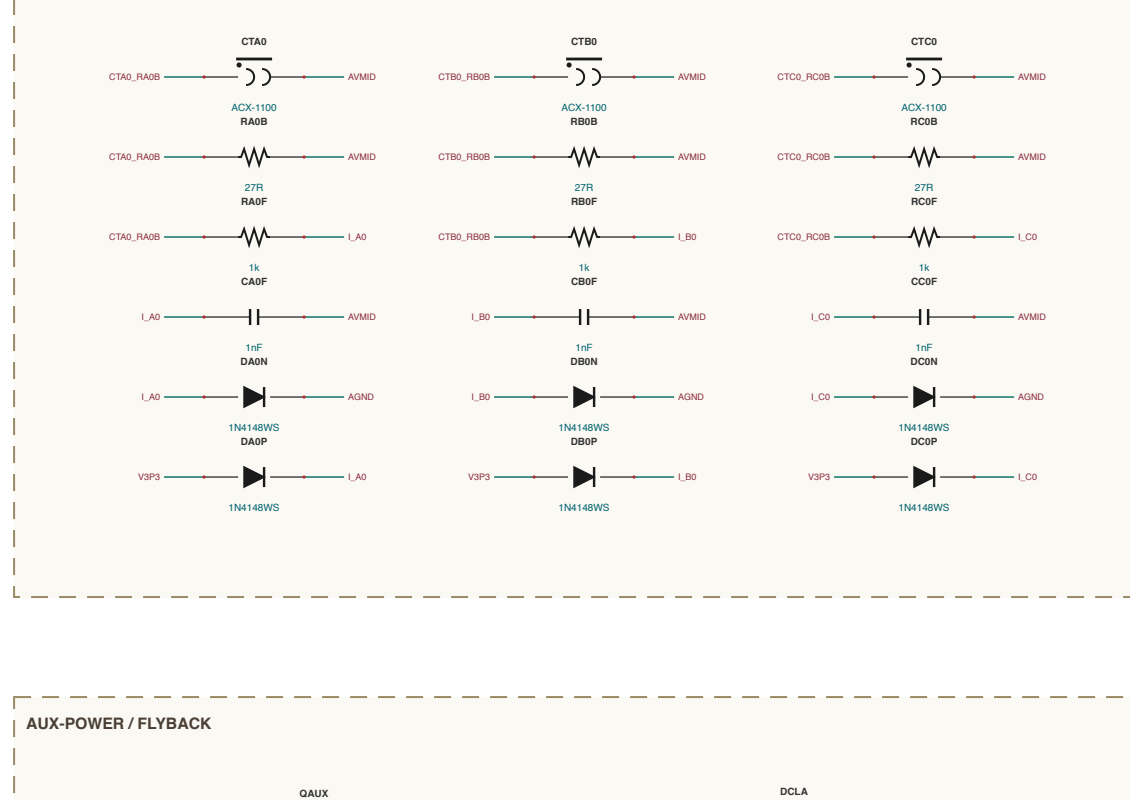


AUX-POWER / FLYBACK

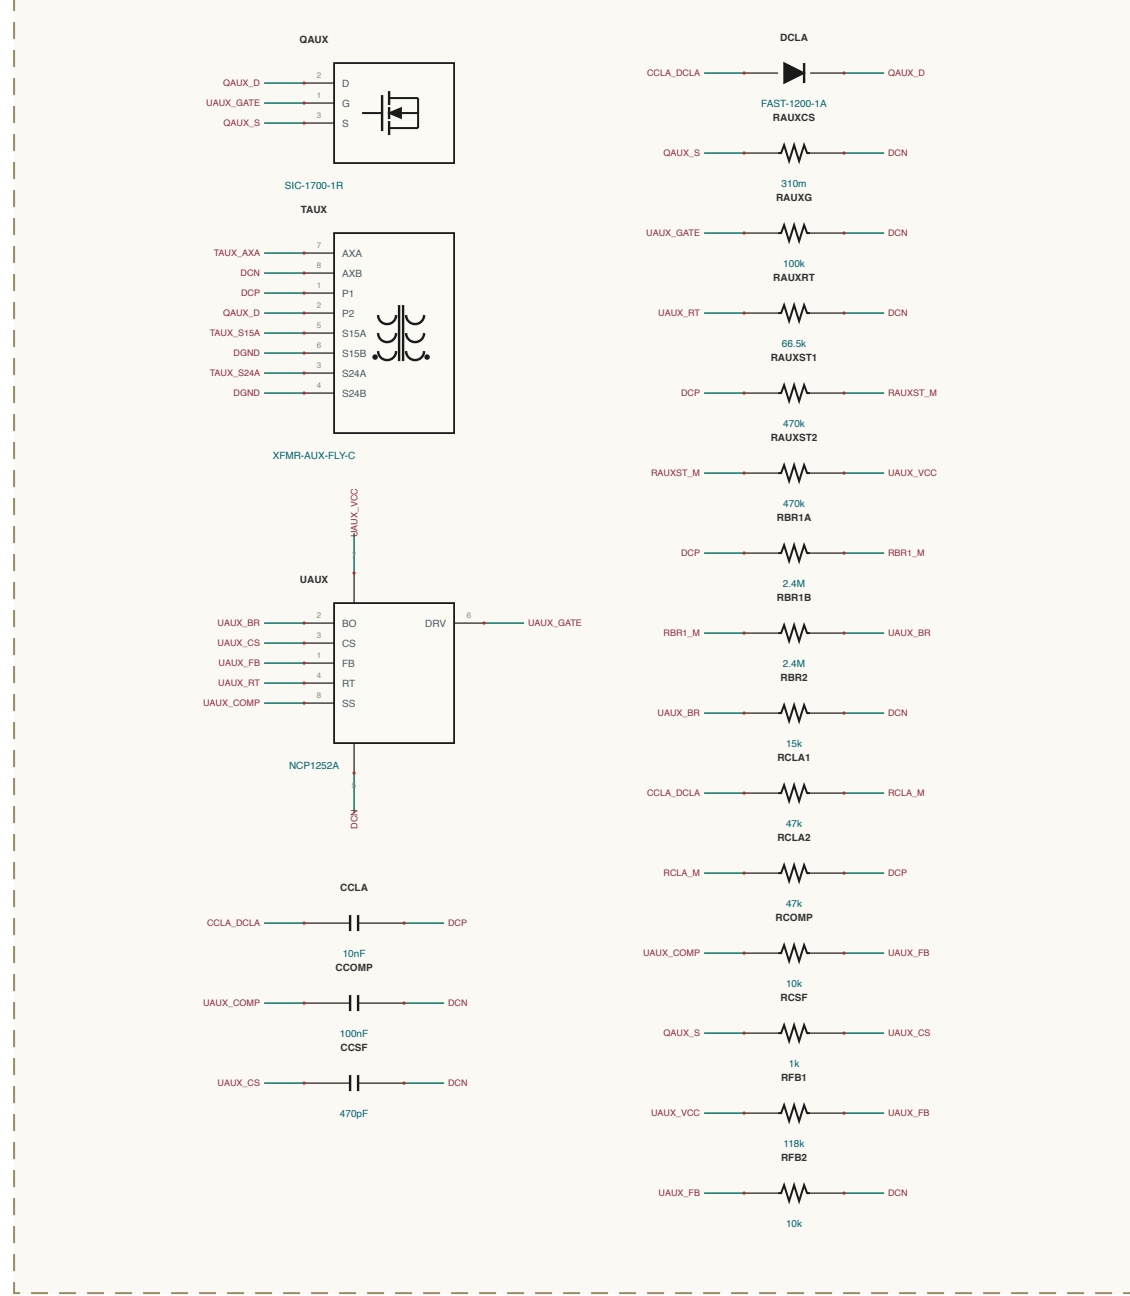


AUX-POWER / INTERCONNECT

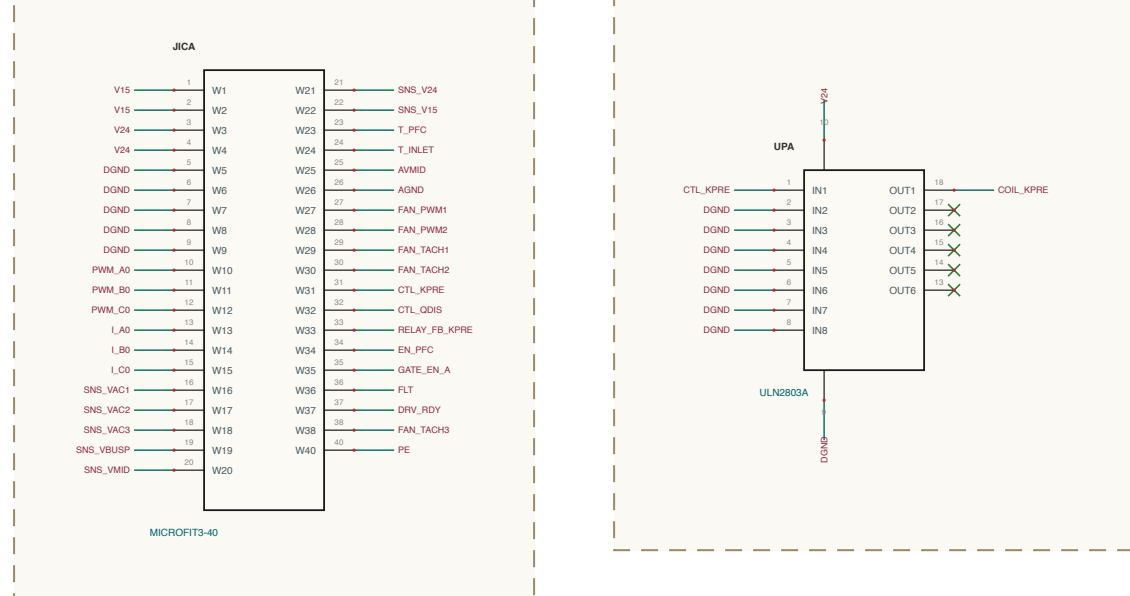


CONTROL / CARD-UP

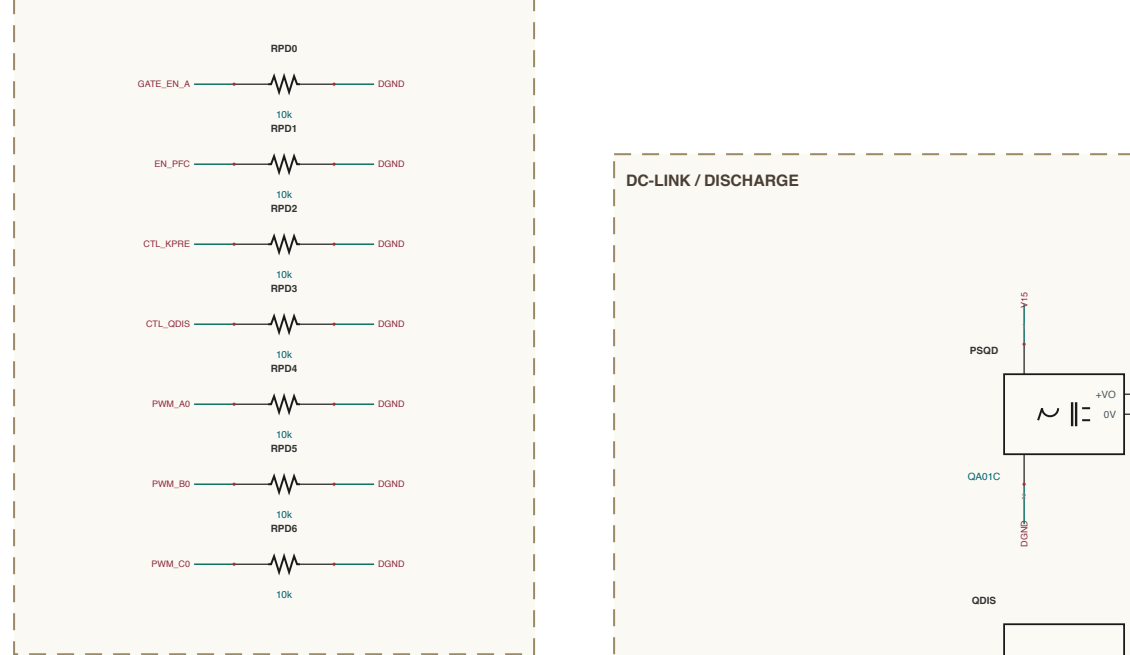


AUX-POWER / FANS

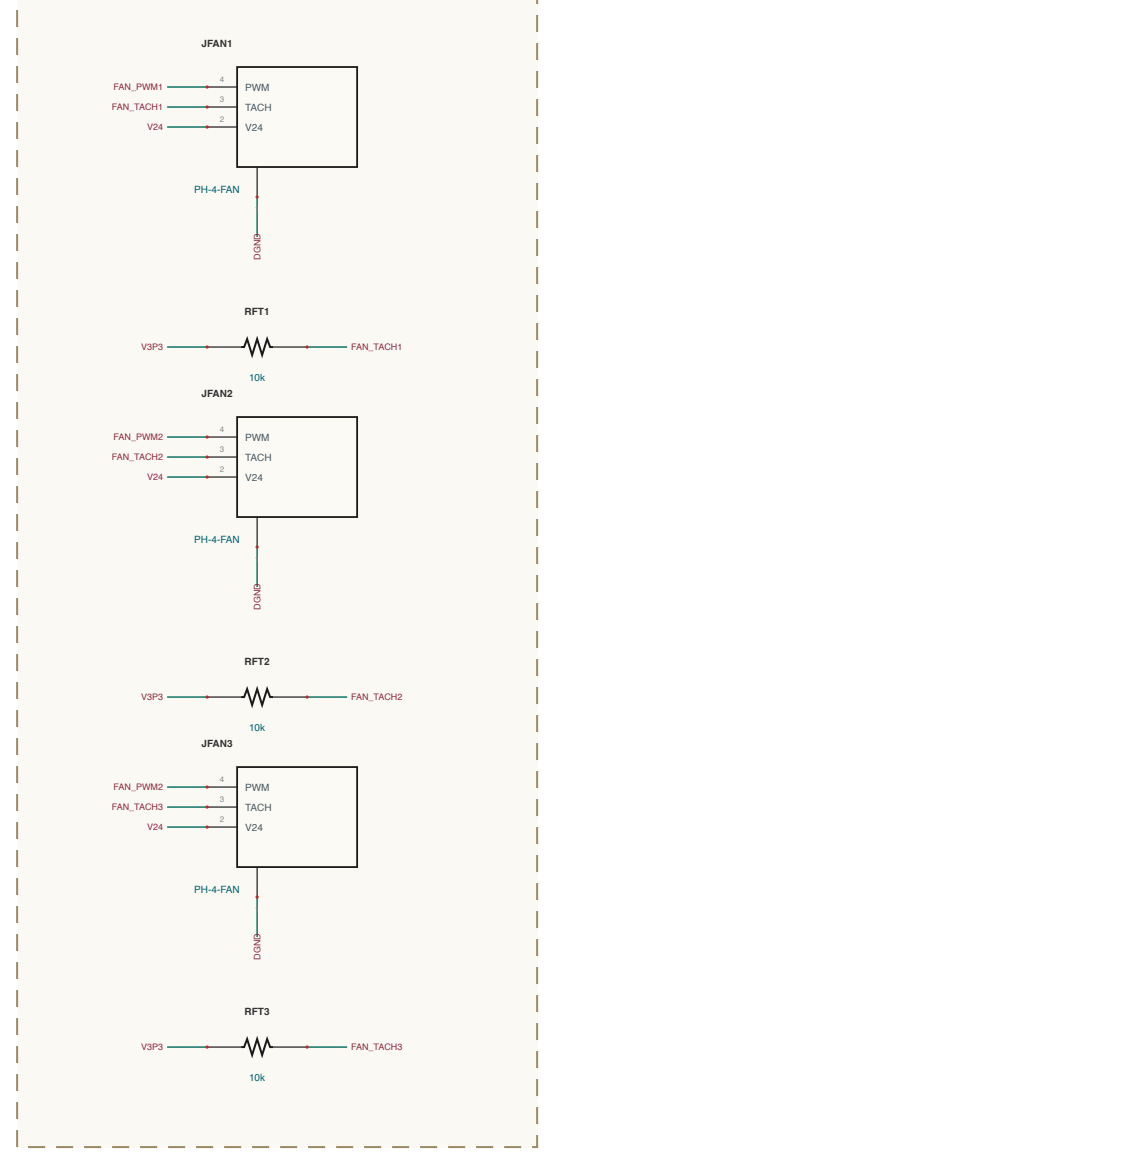


AUX-POWER / RAILS

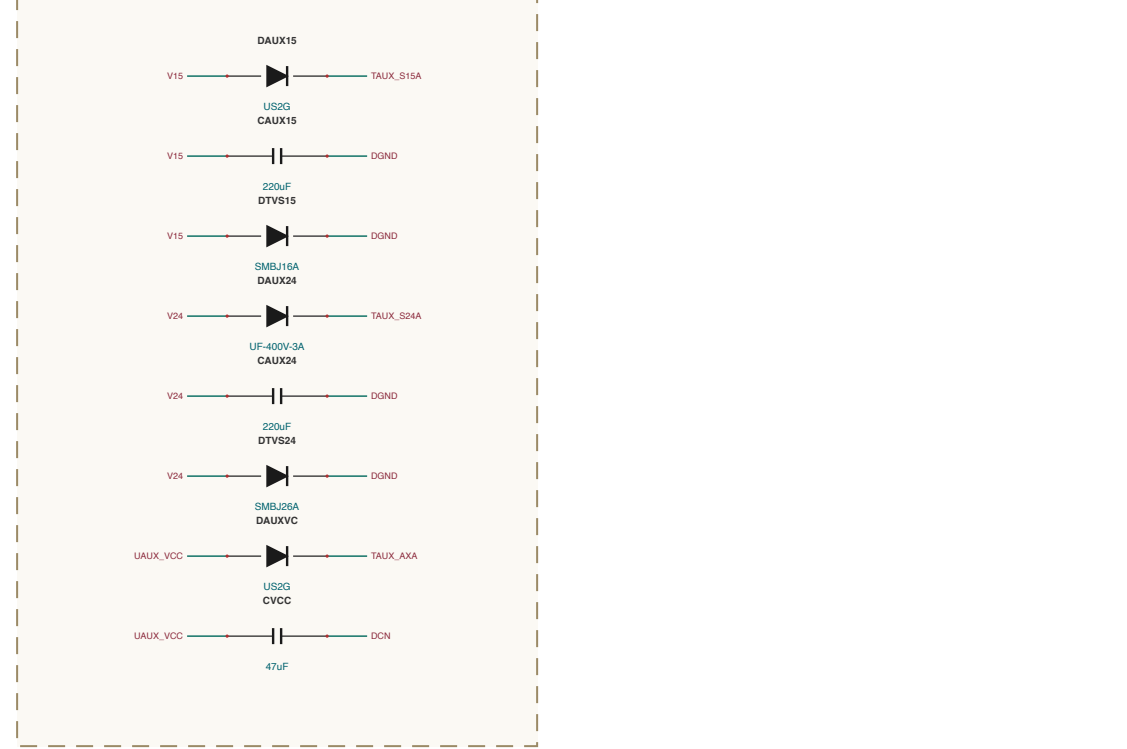


CONTROL / COL-DRIVER

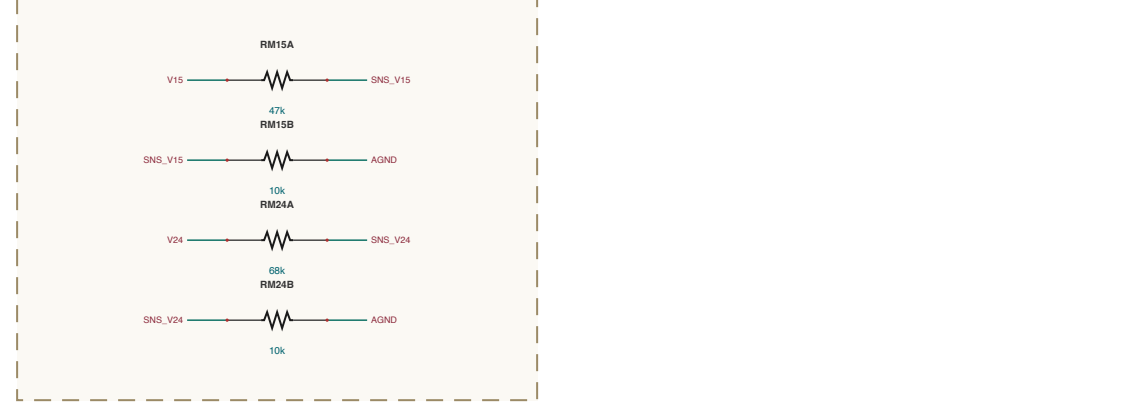


CONTROL / RAIL-MON

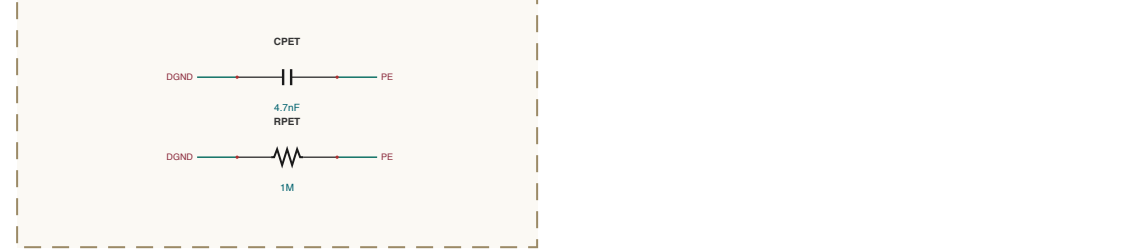


CONTROL / GROUNDING

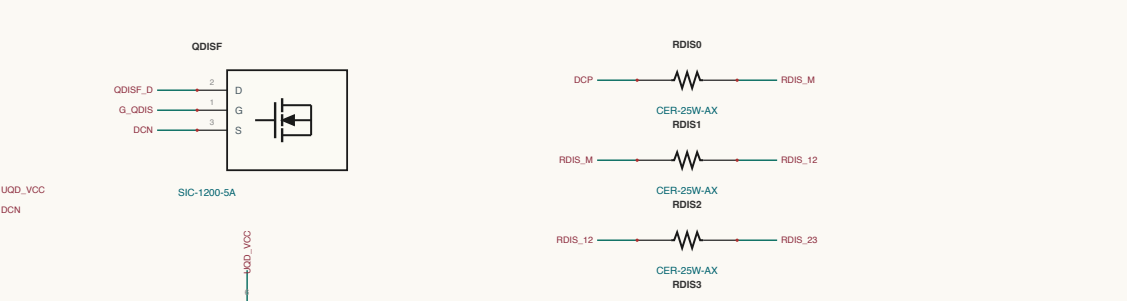


DC-LINK / DISCHARGE

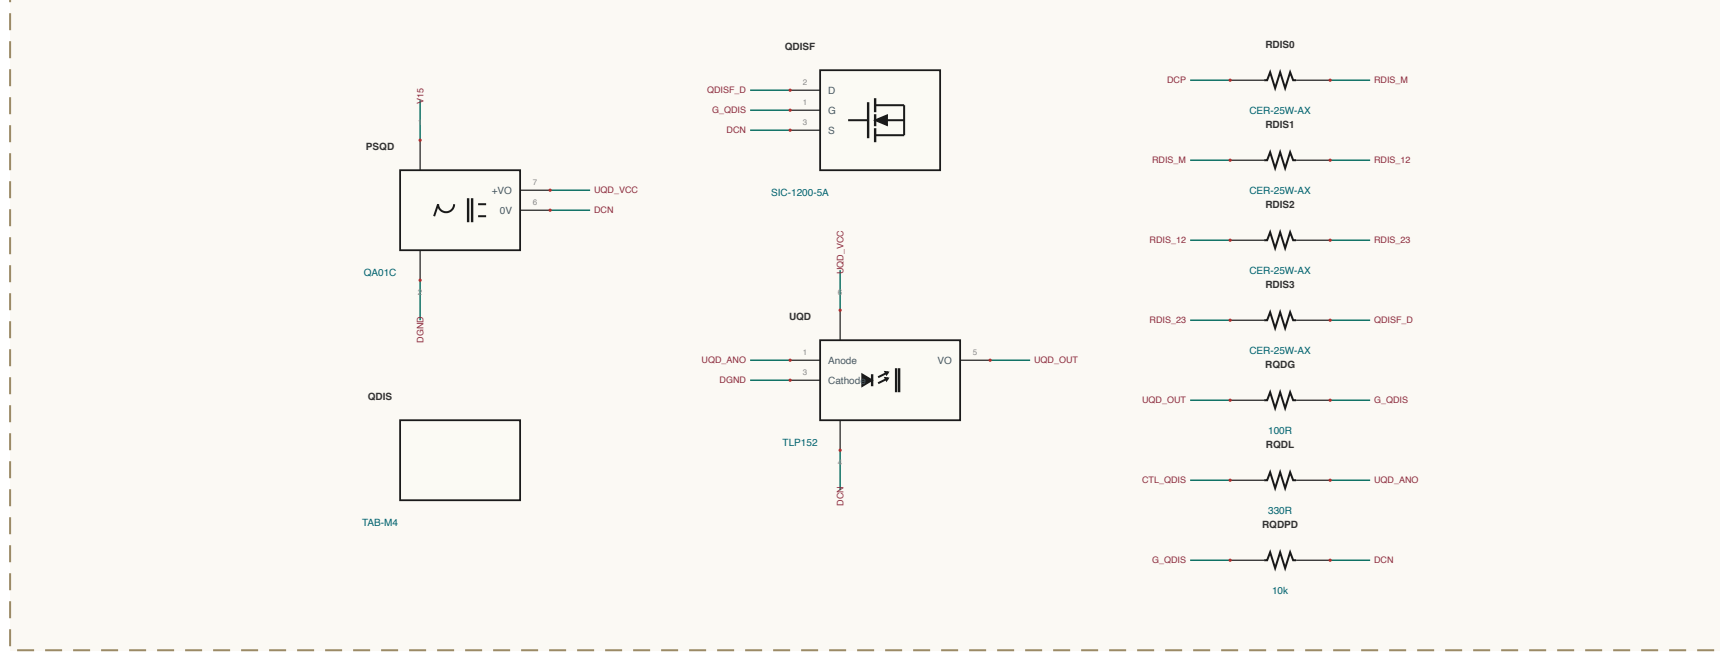


DC-LINK / LINK-BANK-0

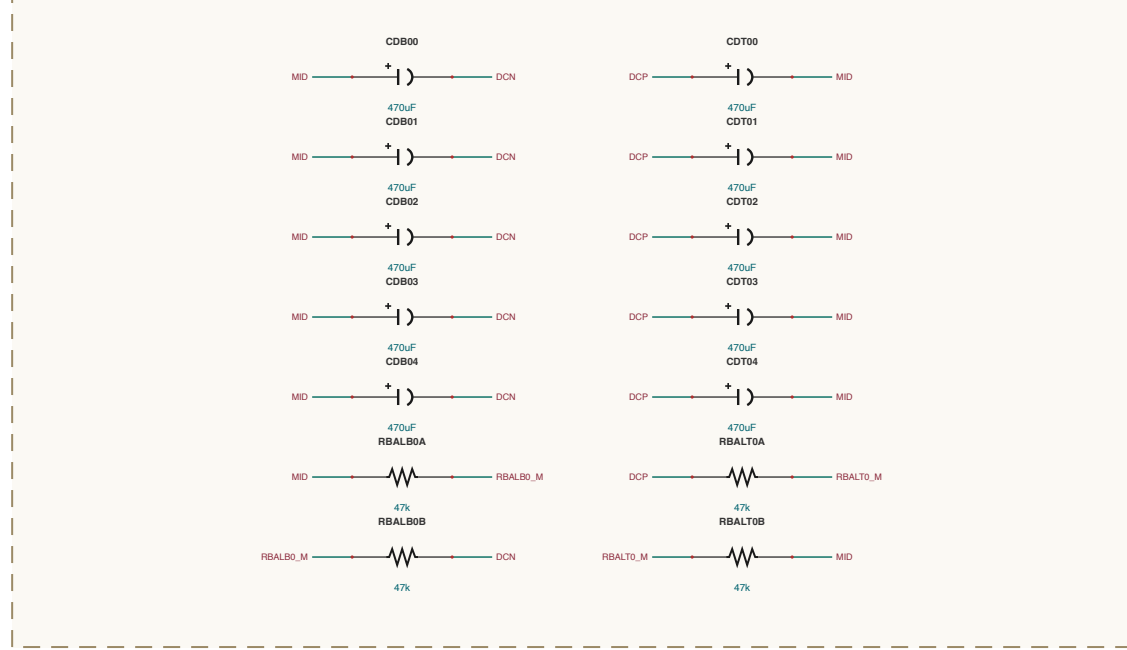


DC-LINK / BUS-STOP

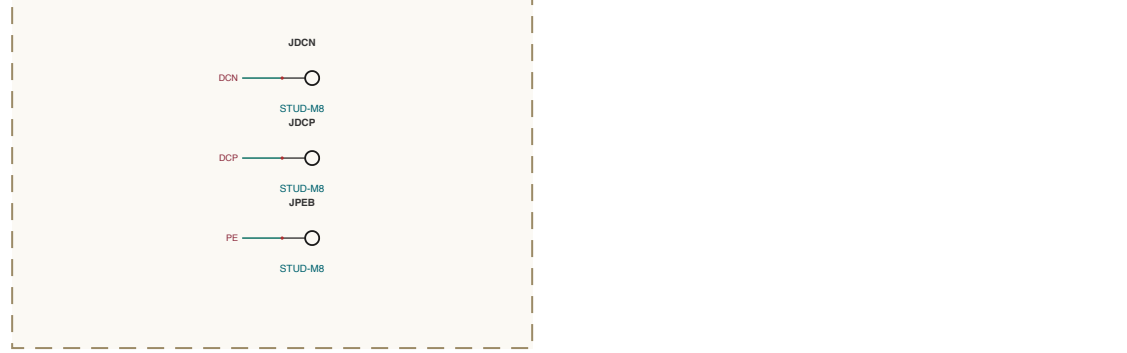


DC-LINK / LINK-BANK-1

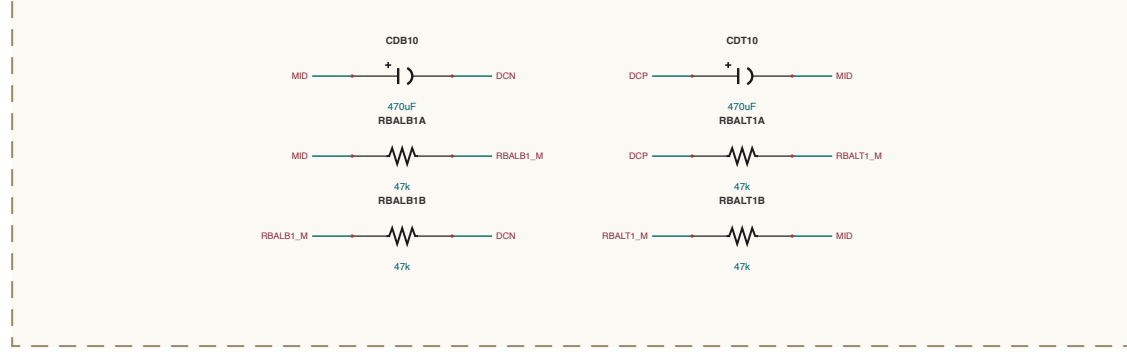


INPUT-EM / EMI-FILTER

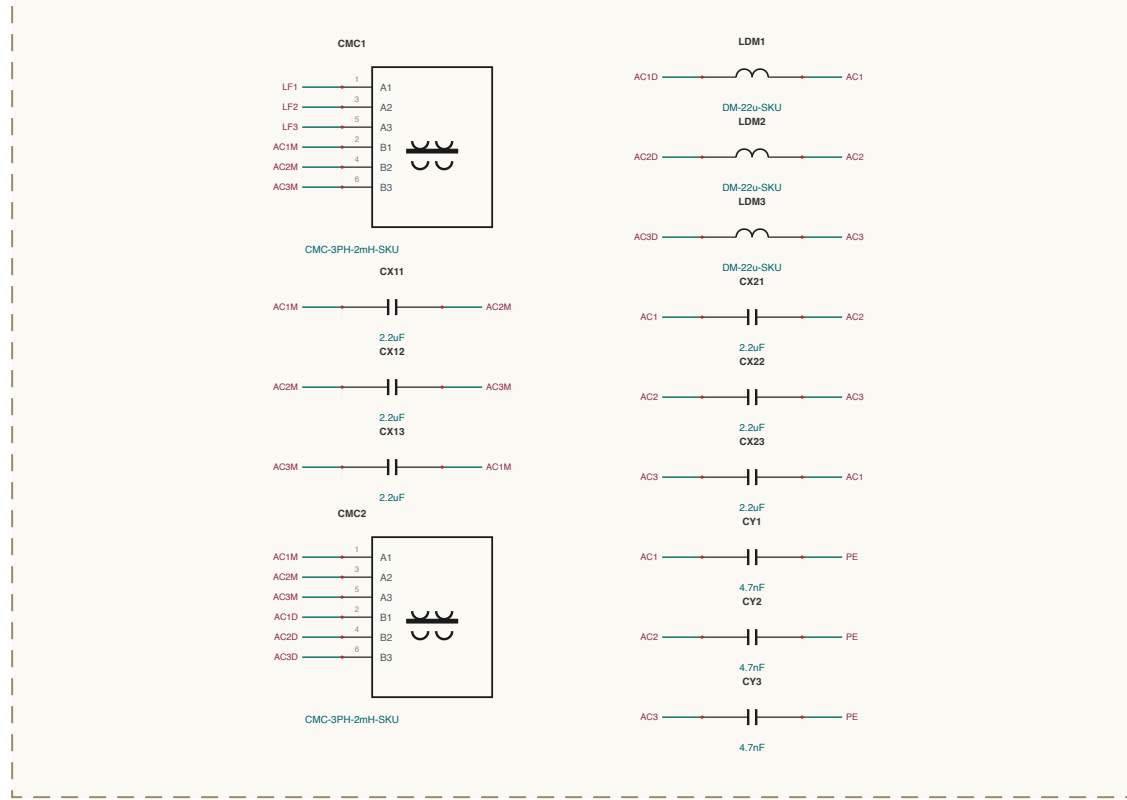


INPUT-EM / AC-ENTRY

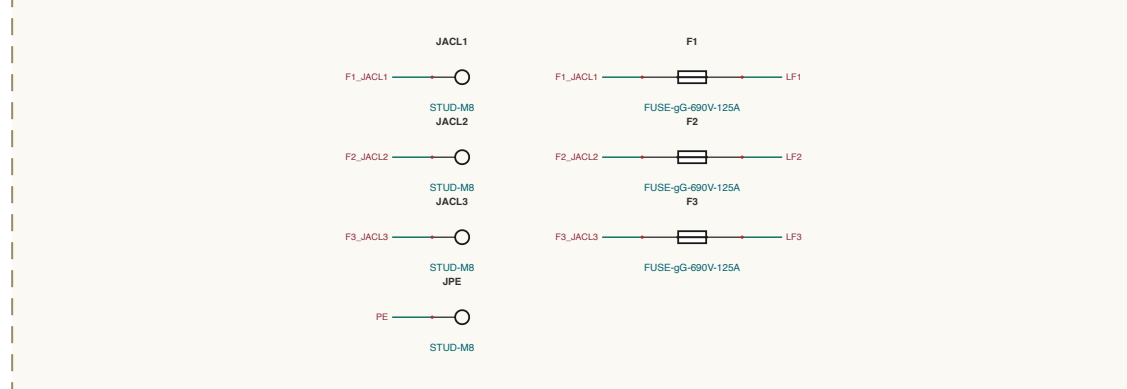


INPUT-EM / PRECHARGE

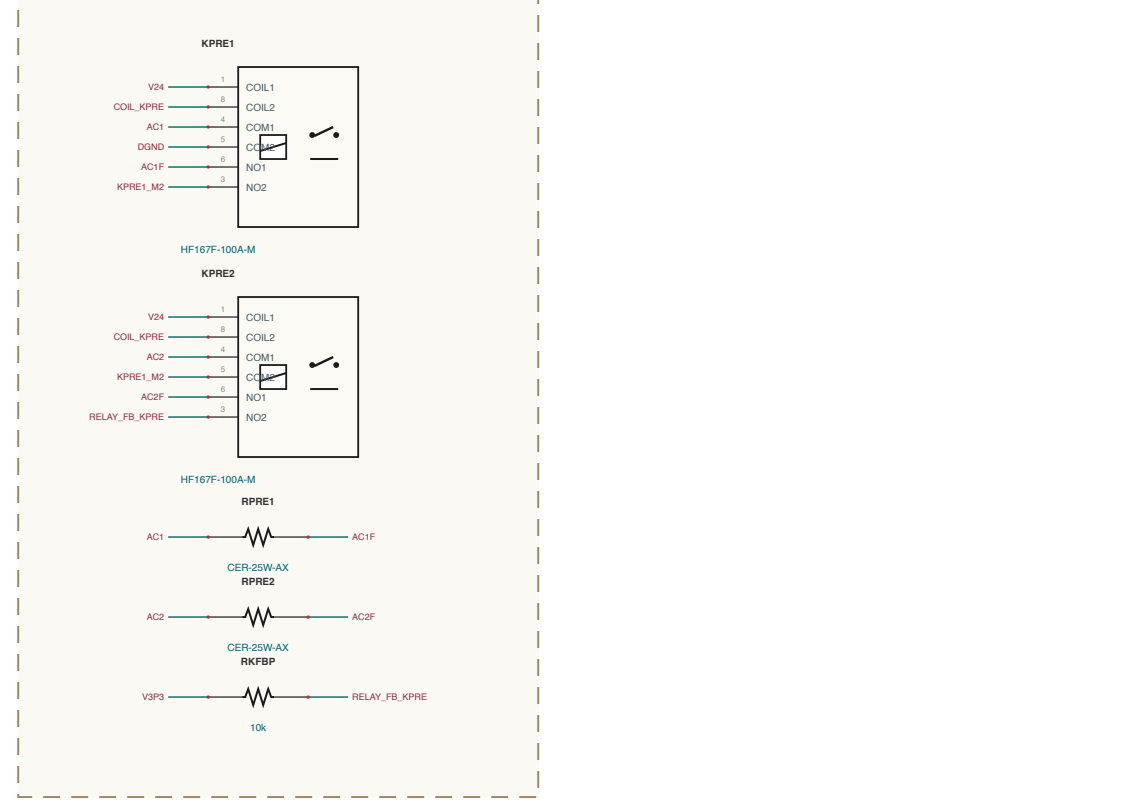


INPUT-EM / SURGE

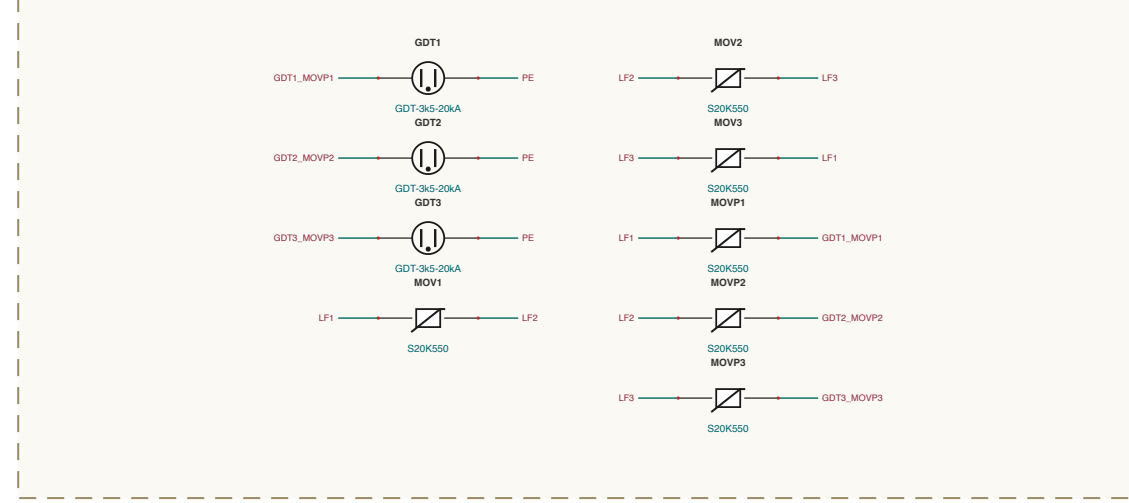


VIENNA-PFC / PHASE-A0

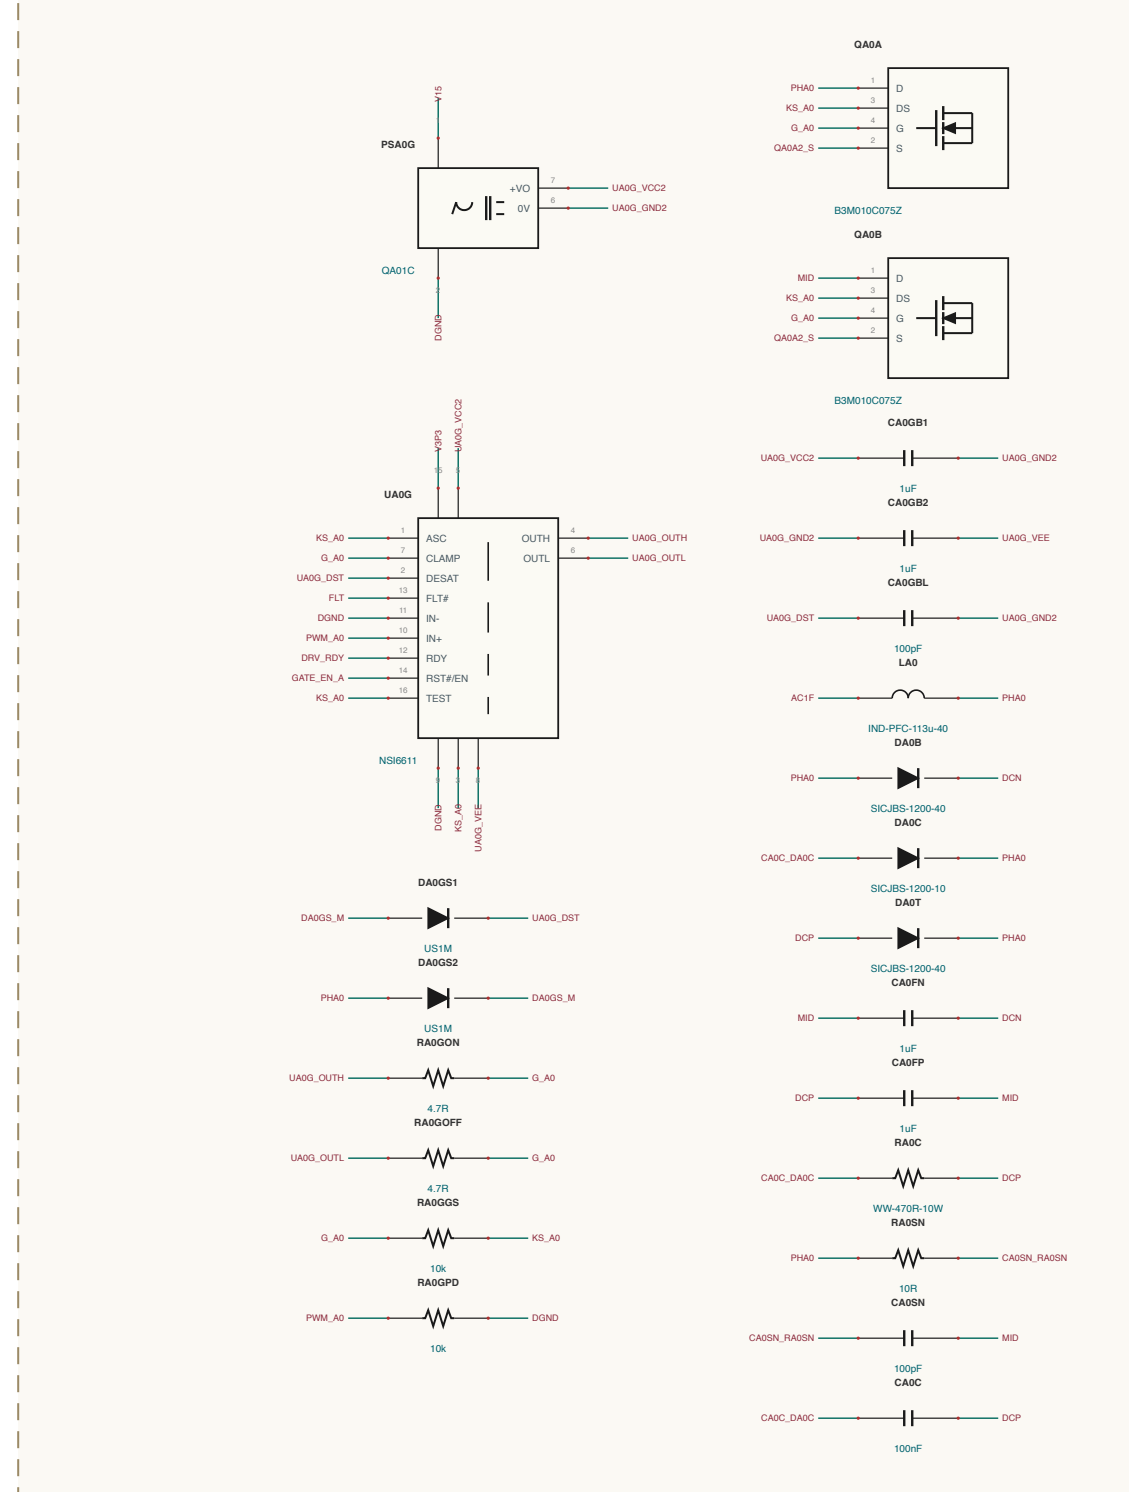

VIENNA-PFC / PHASE-C0

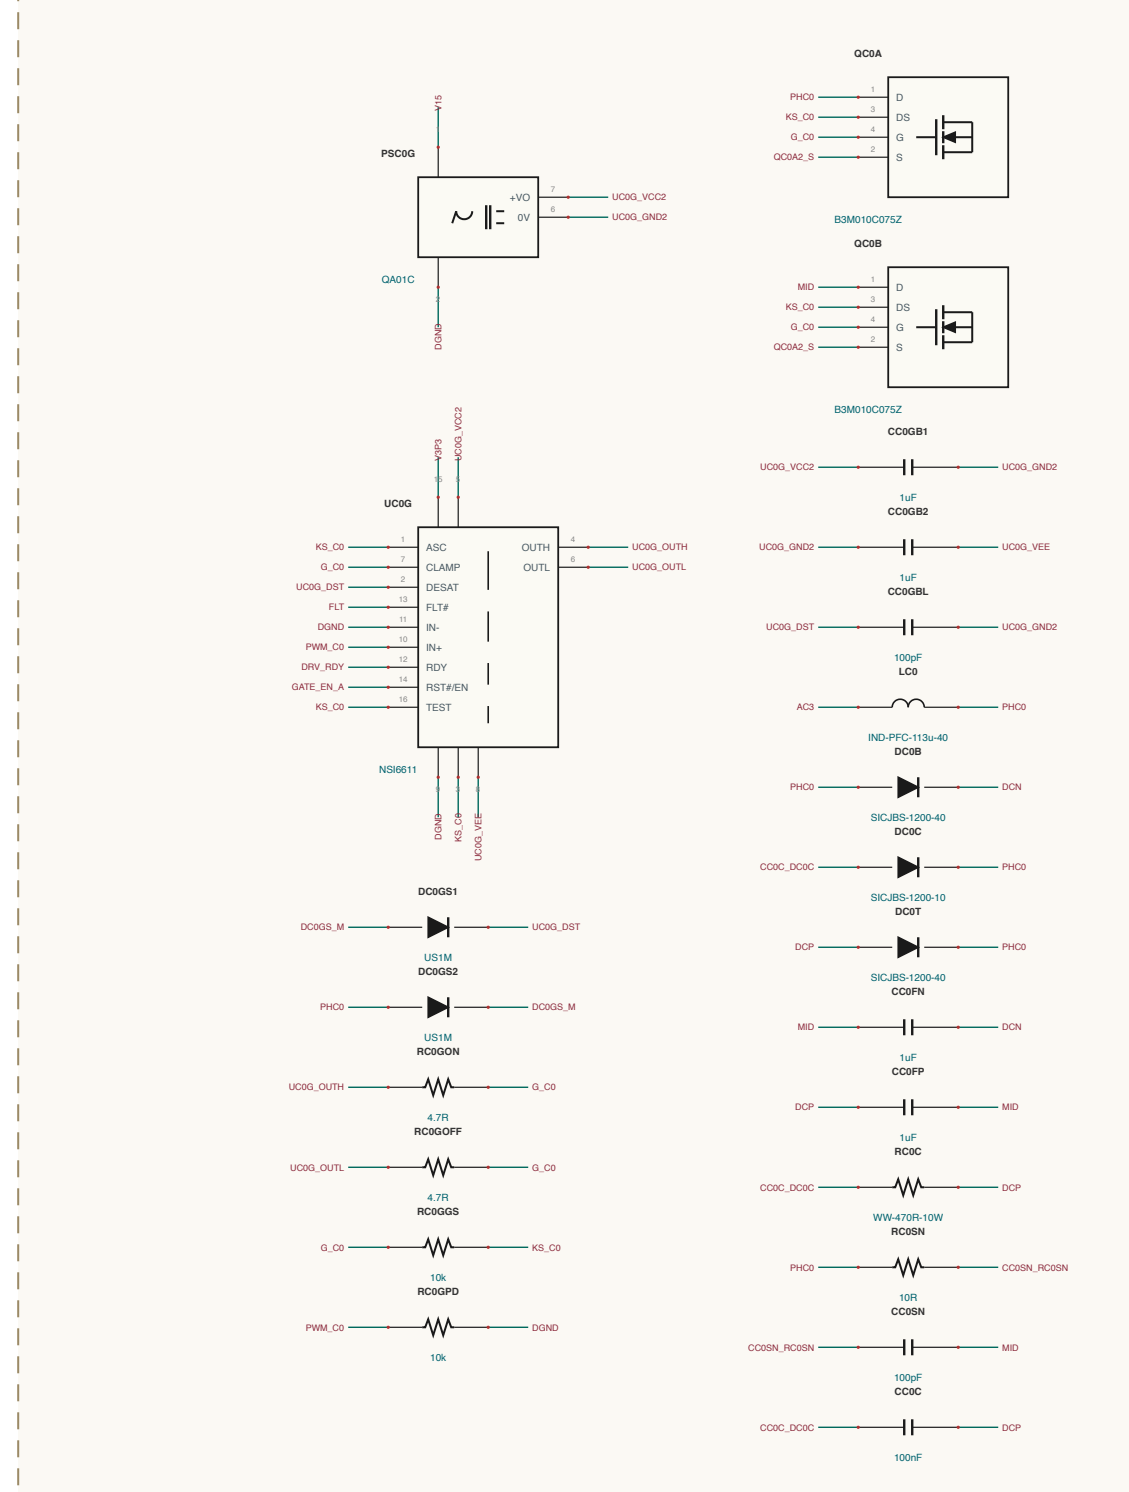

VIENNA-PFC / PHASE-B0

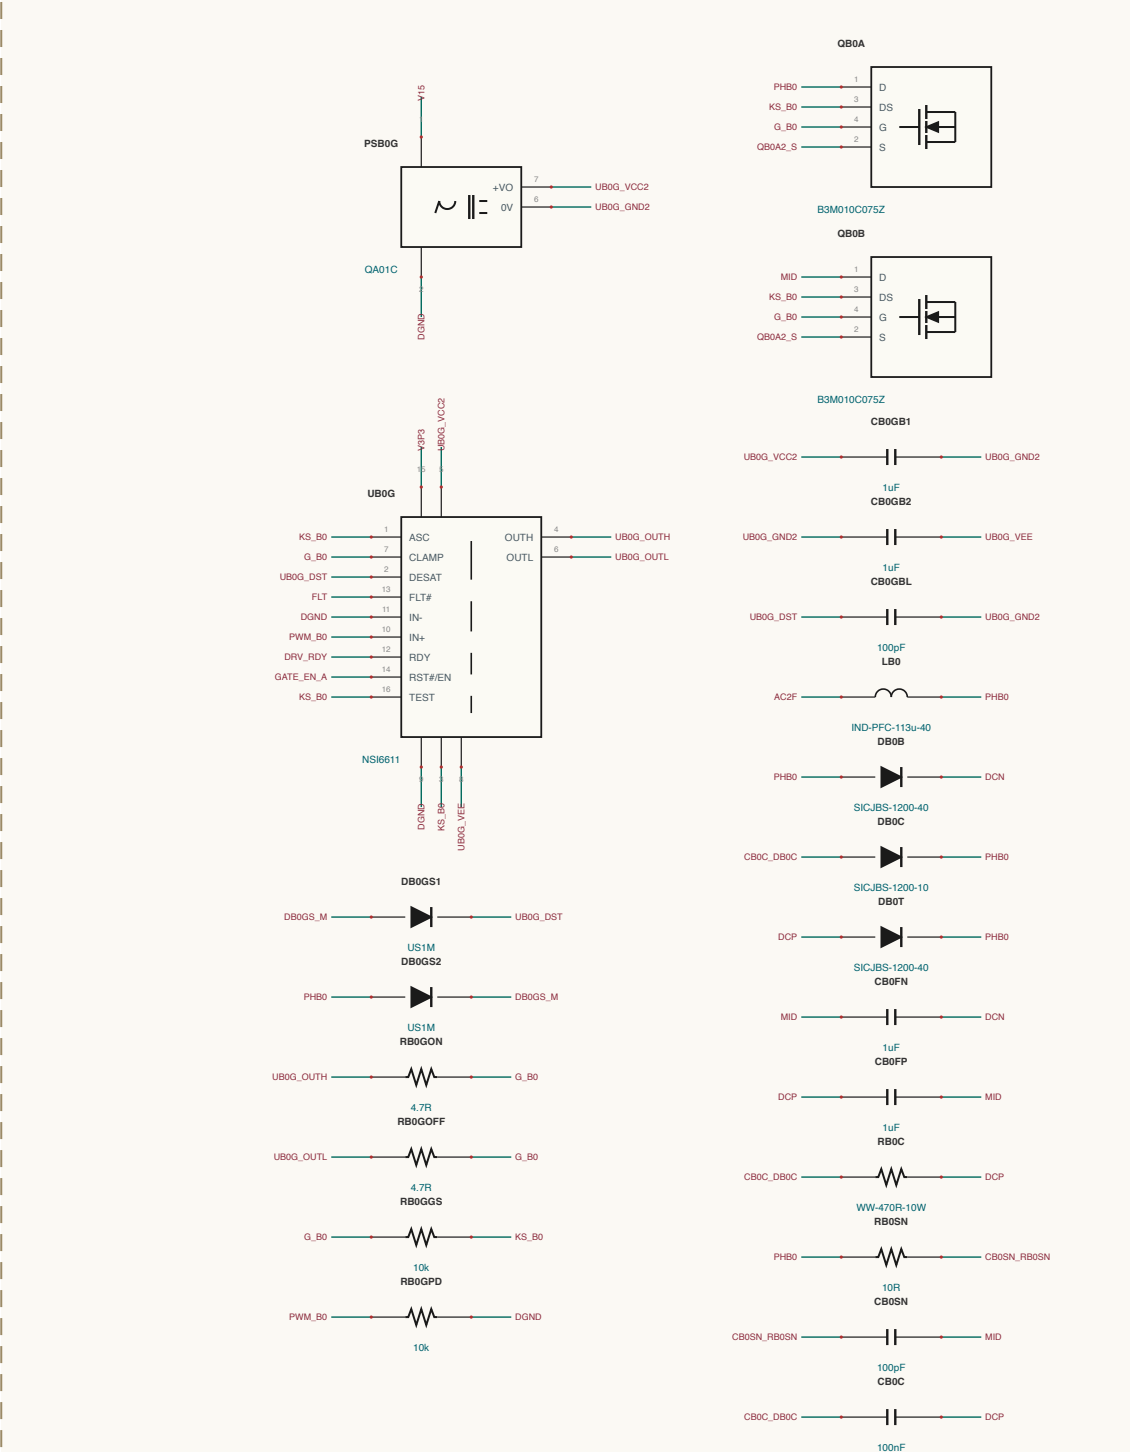

SHEET INDEX

40 kW AC-DC (lower) 1 of 3

AC-SENSING 6 sections

AUX-POWER 3 sections

CONTROL 4 sections

DC-LINK 4 sections

INPUT-EM 4 sections

VIENNA-PFC 3 sections

see D.3 - 3B sections - 287 components

NET NAMING

Internal potentials are named for sheet 3B-01

Units: - offset mode at that IC pin e.g. V_{IN}, V_{IN}

Resistor: - independent of a series pin e.g. R_{IN}, R_{IN}

Inductor: - value in μ H between parentheses e.g. L_{IN}, L_{IN}

Capacitor: - value in μ F between parentheses e.g. C_{IN}, C_{IN}

all others are explicit design rules

