
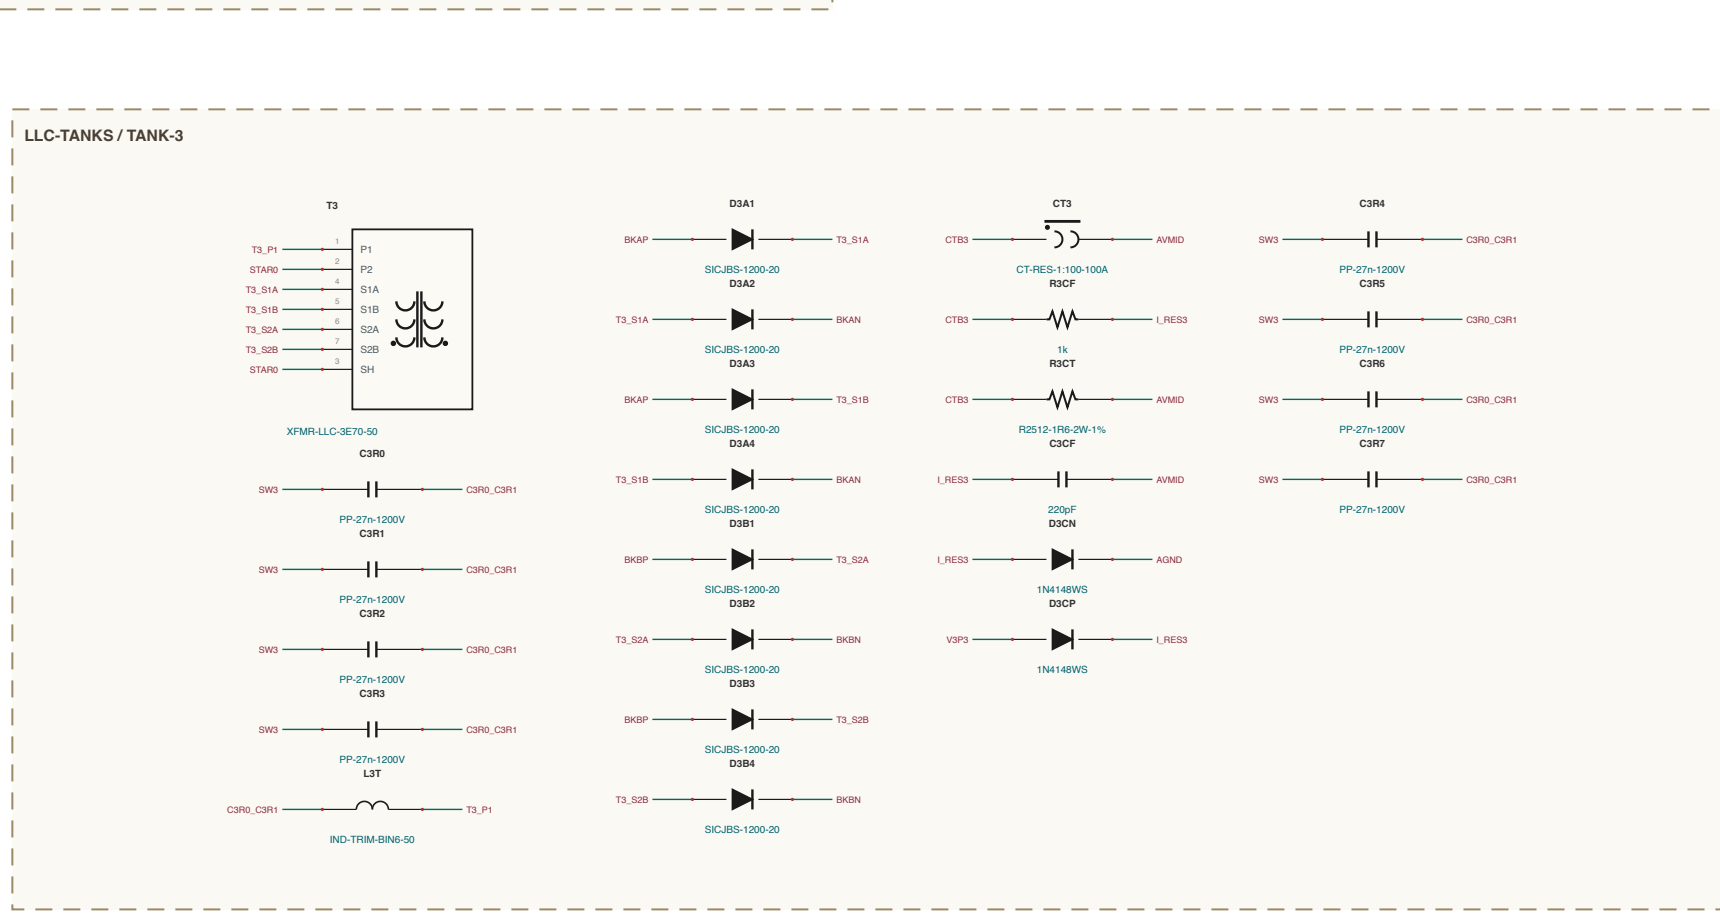
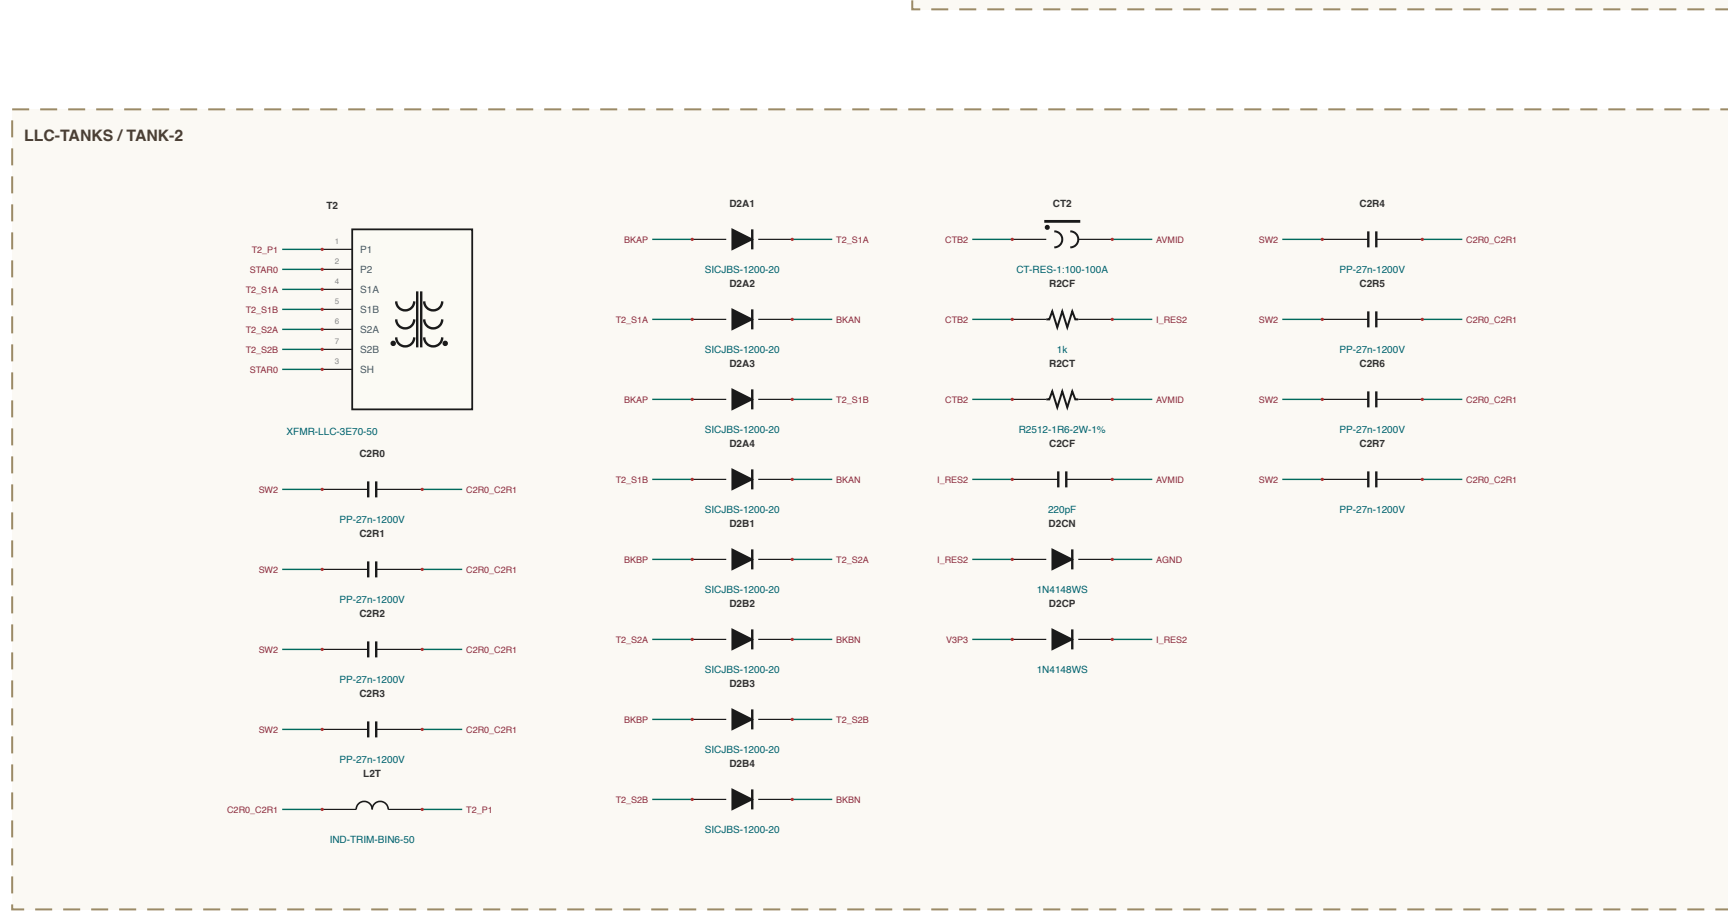
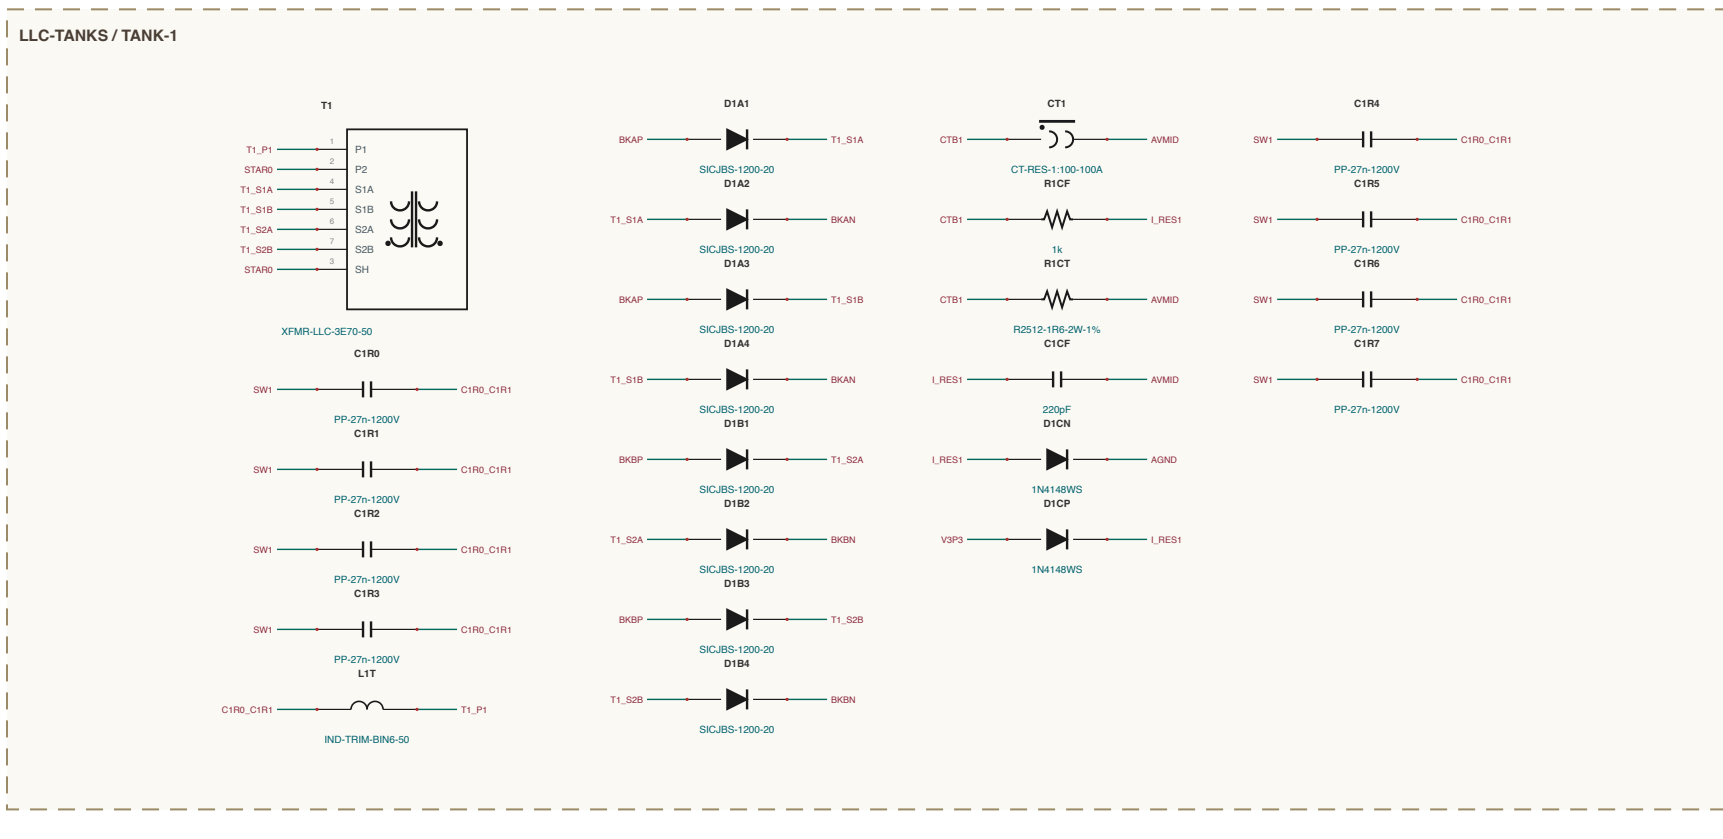
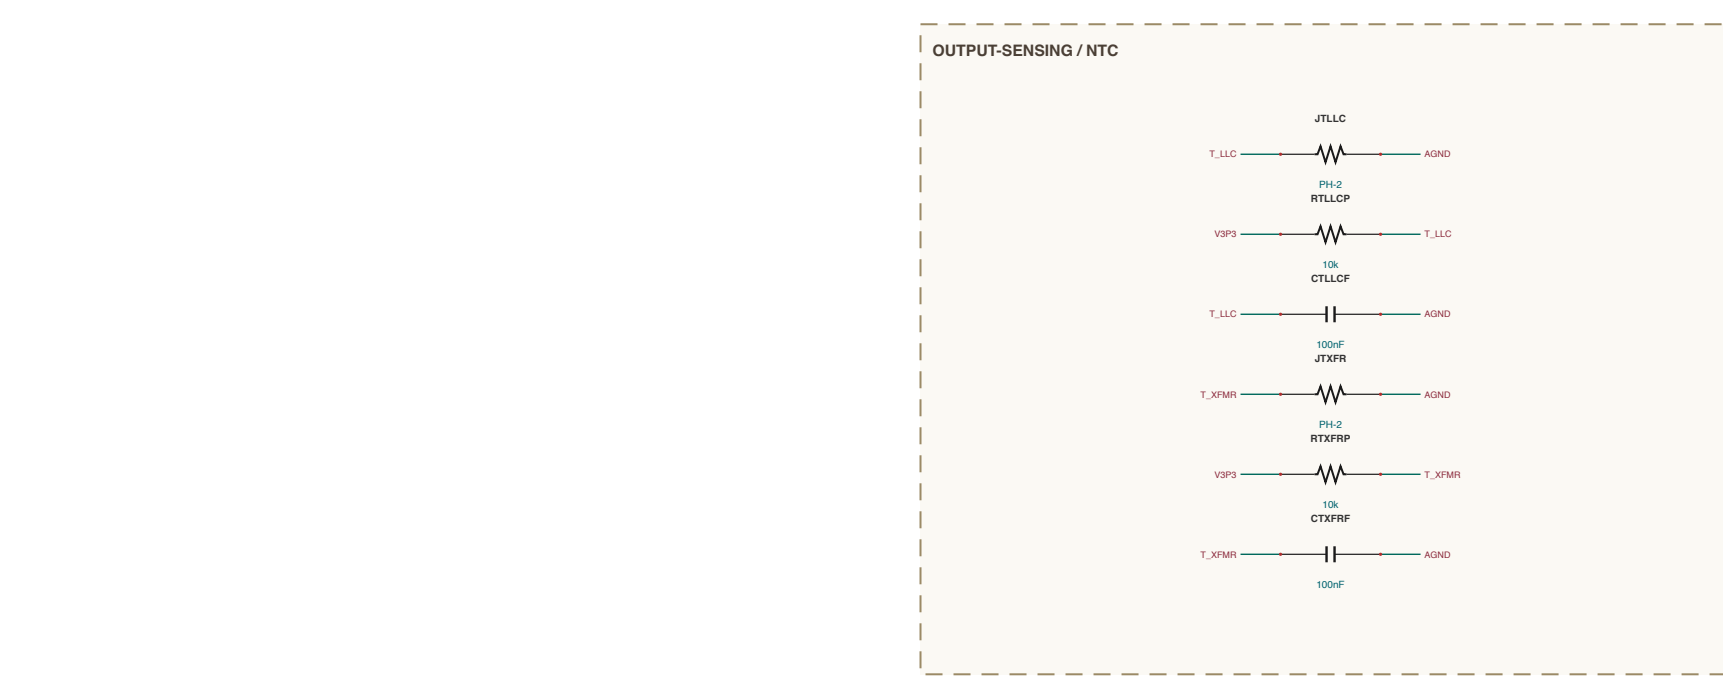
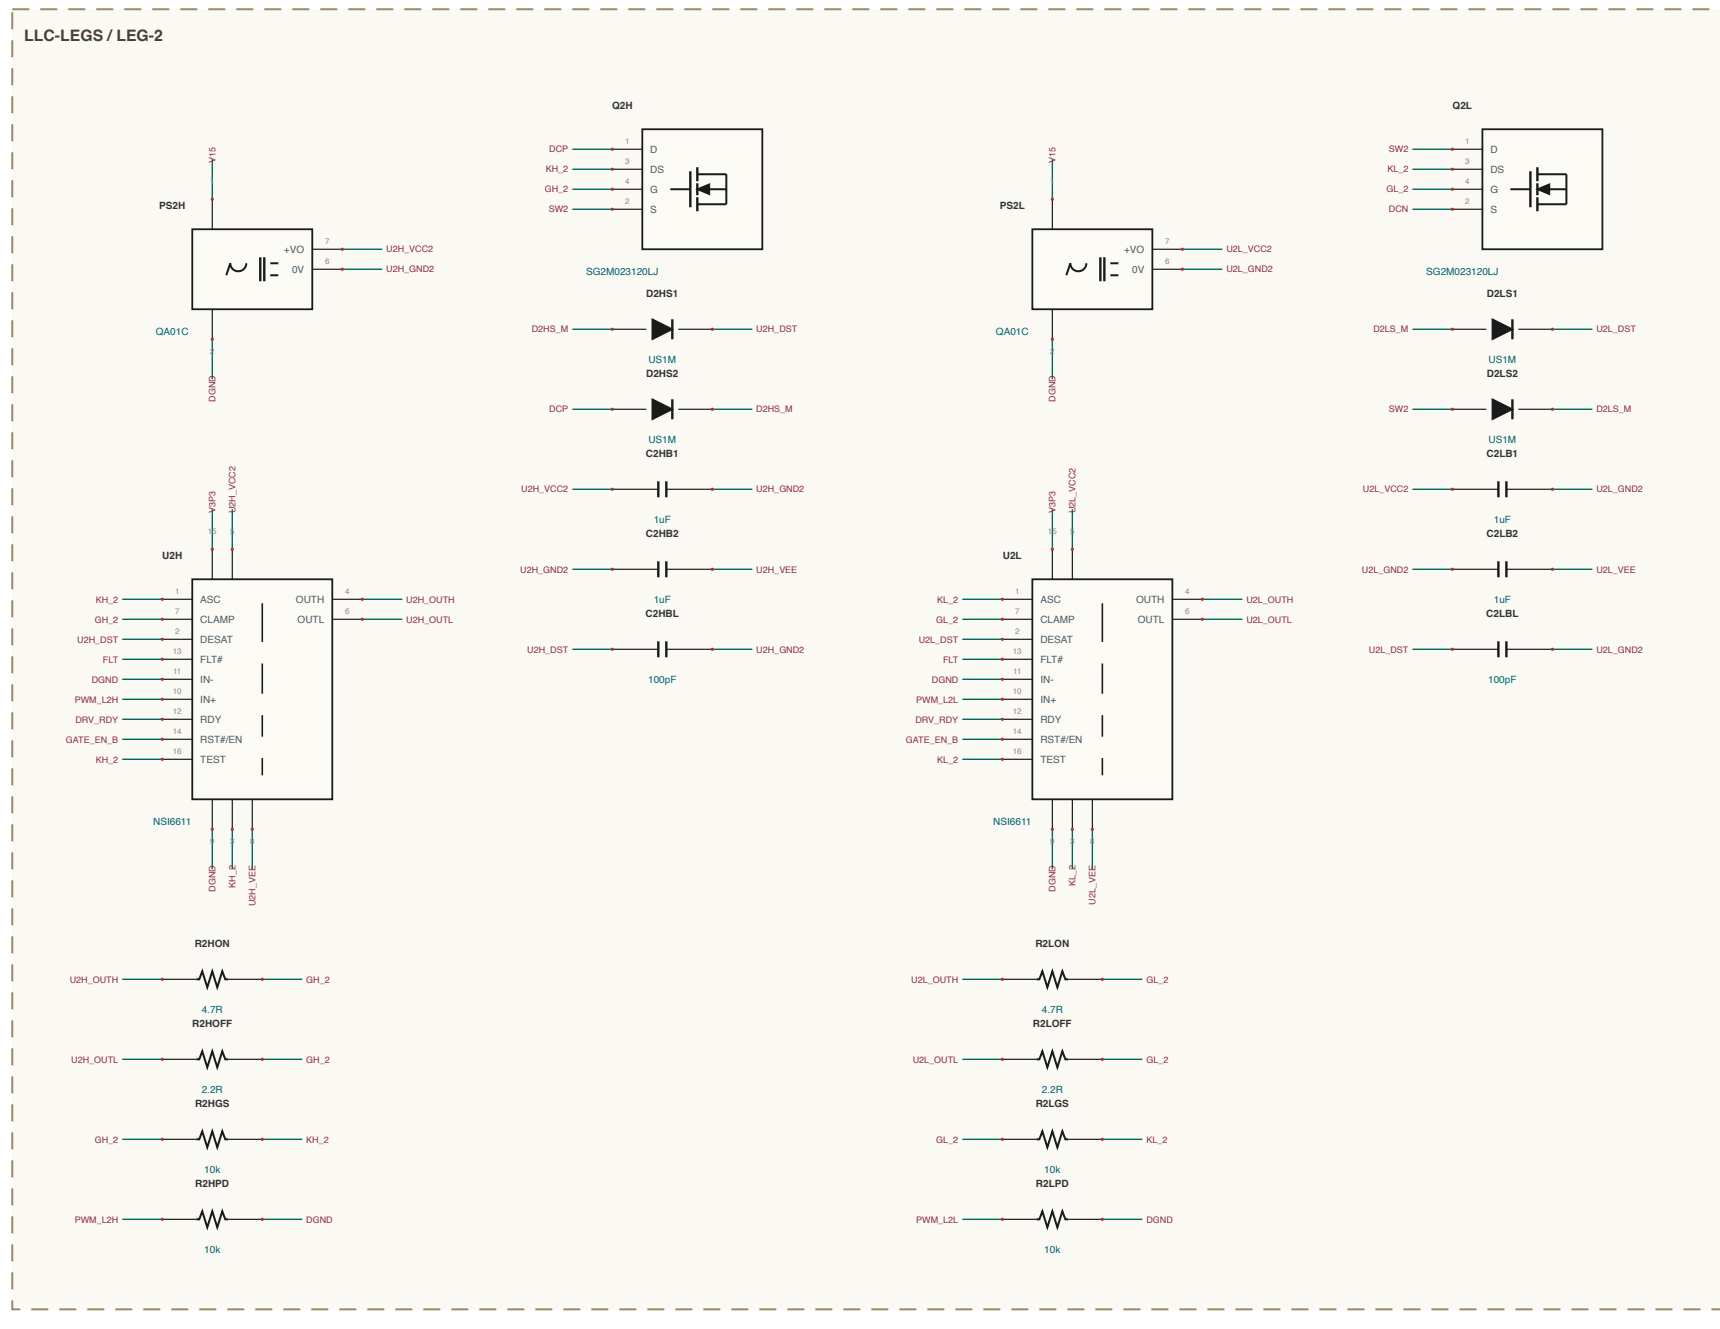
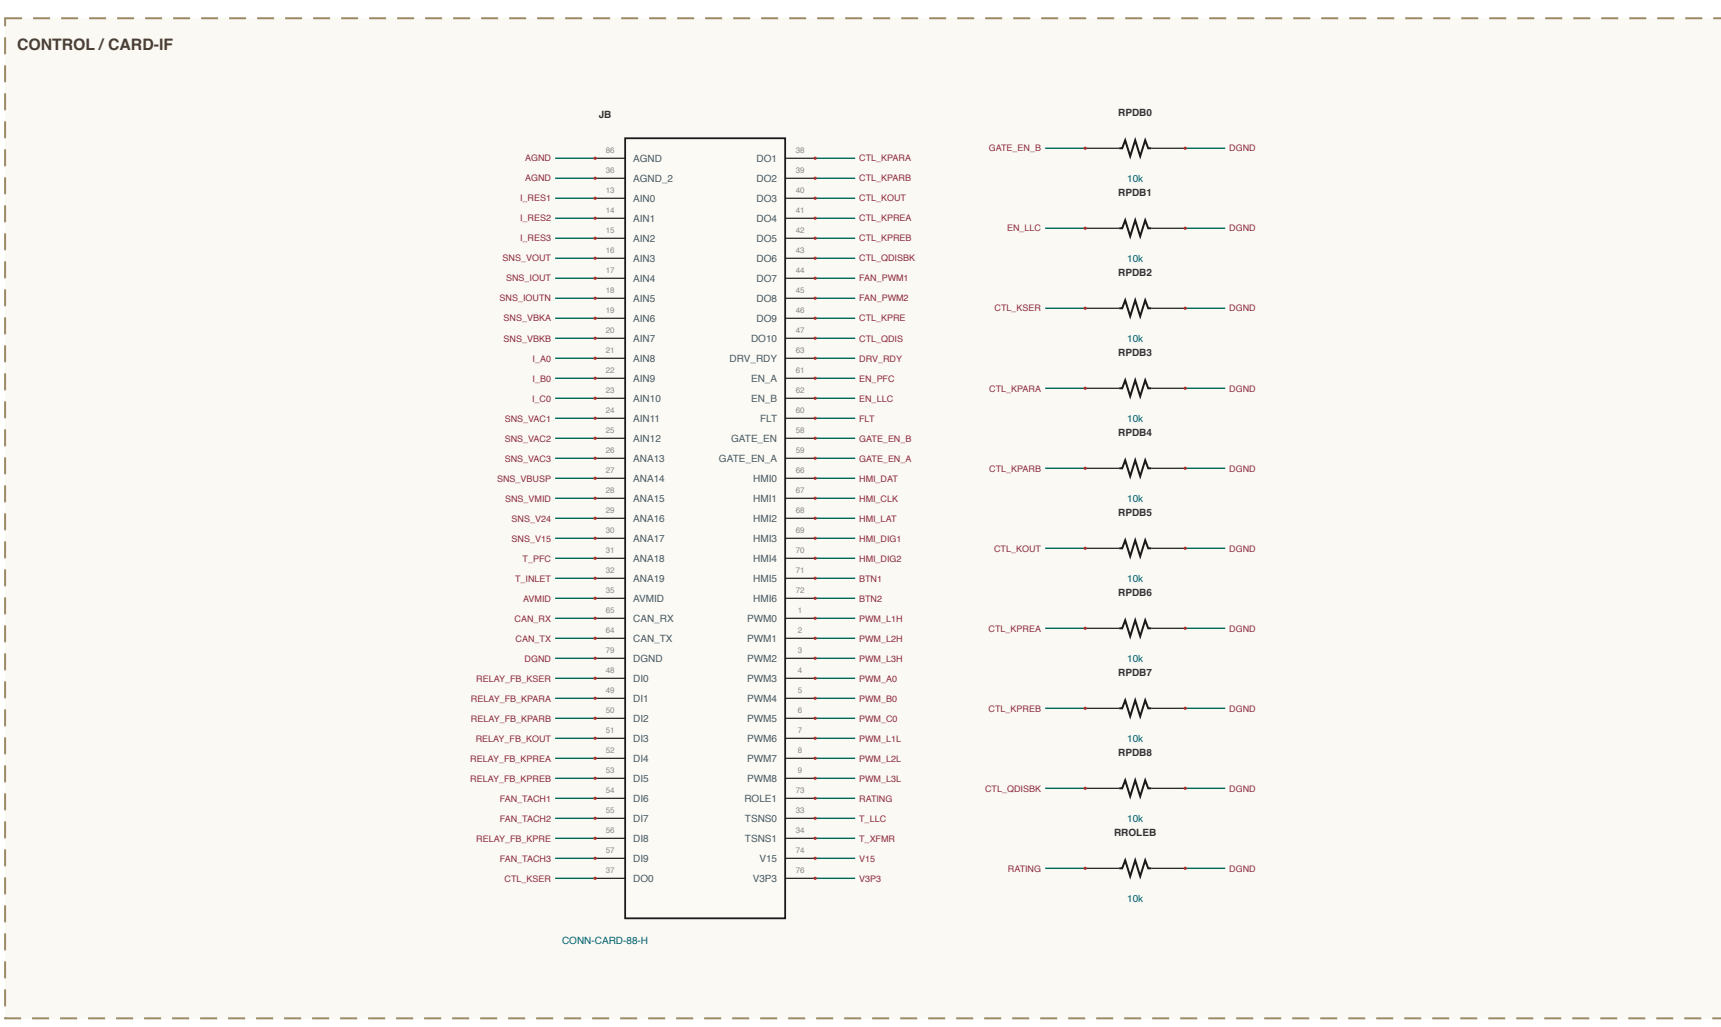
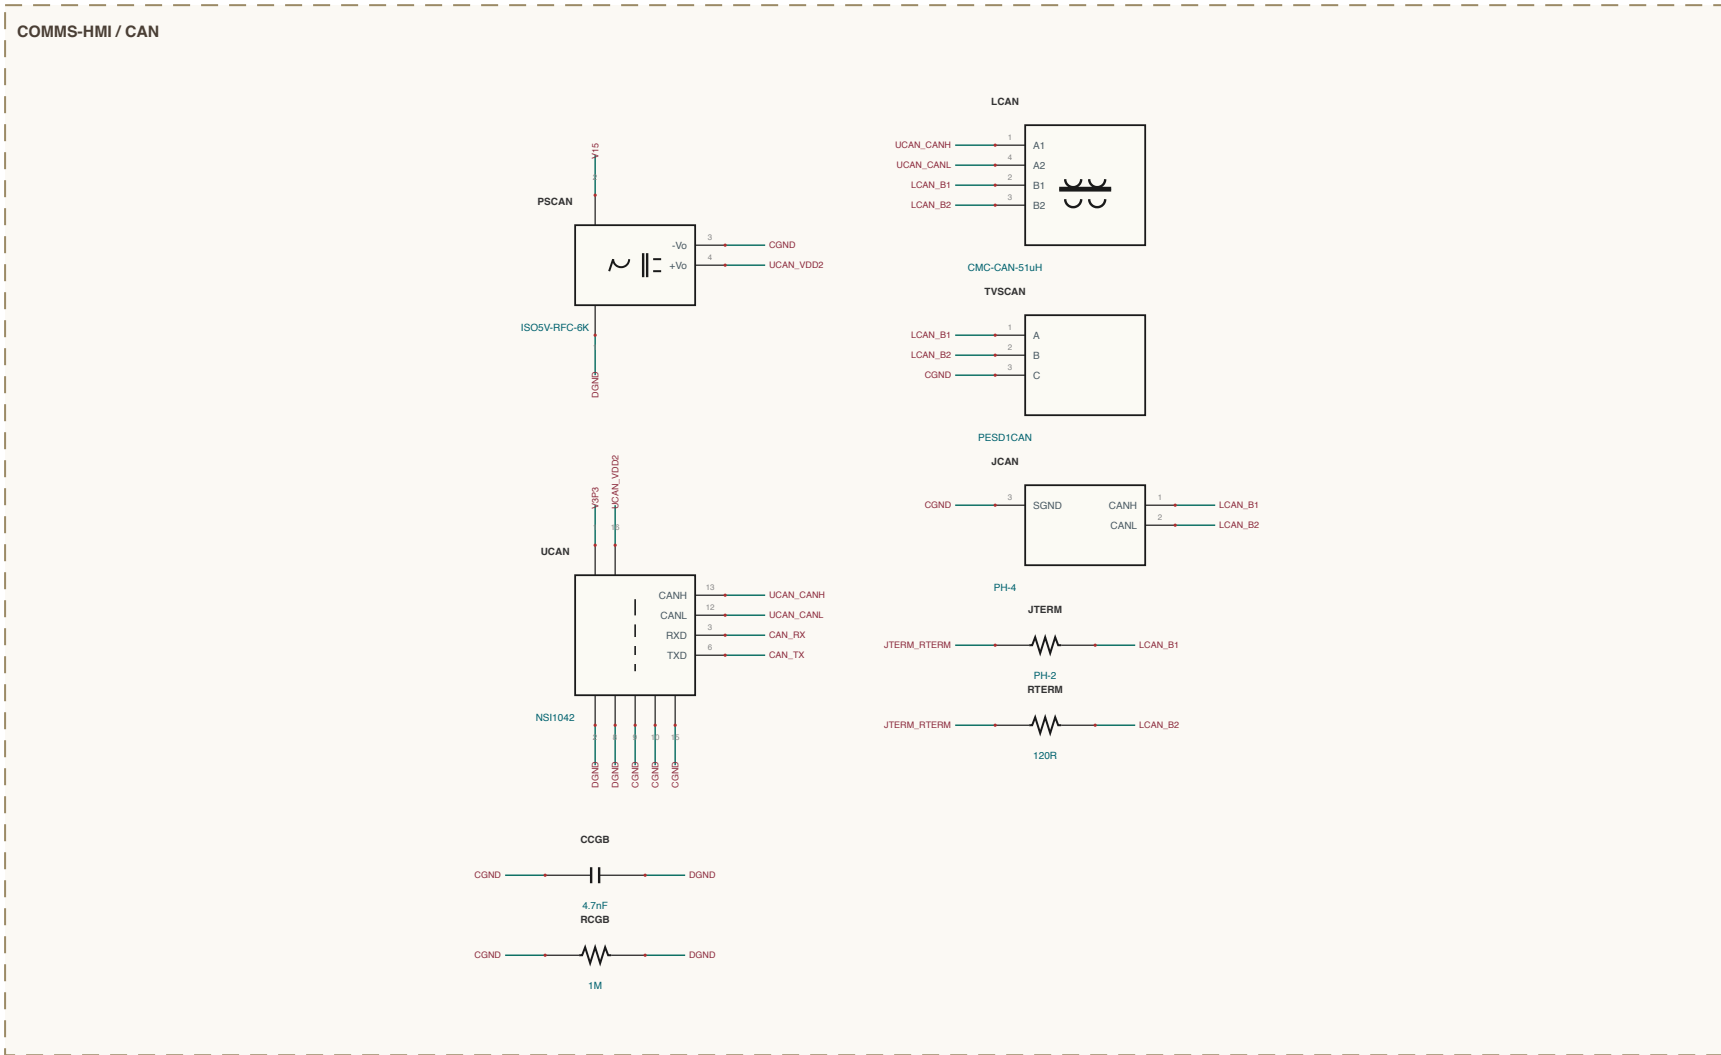
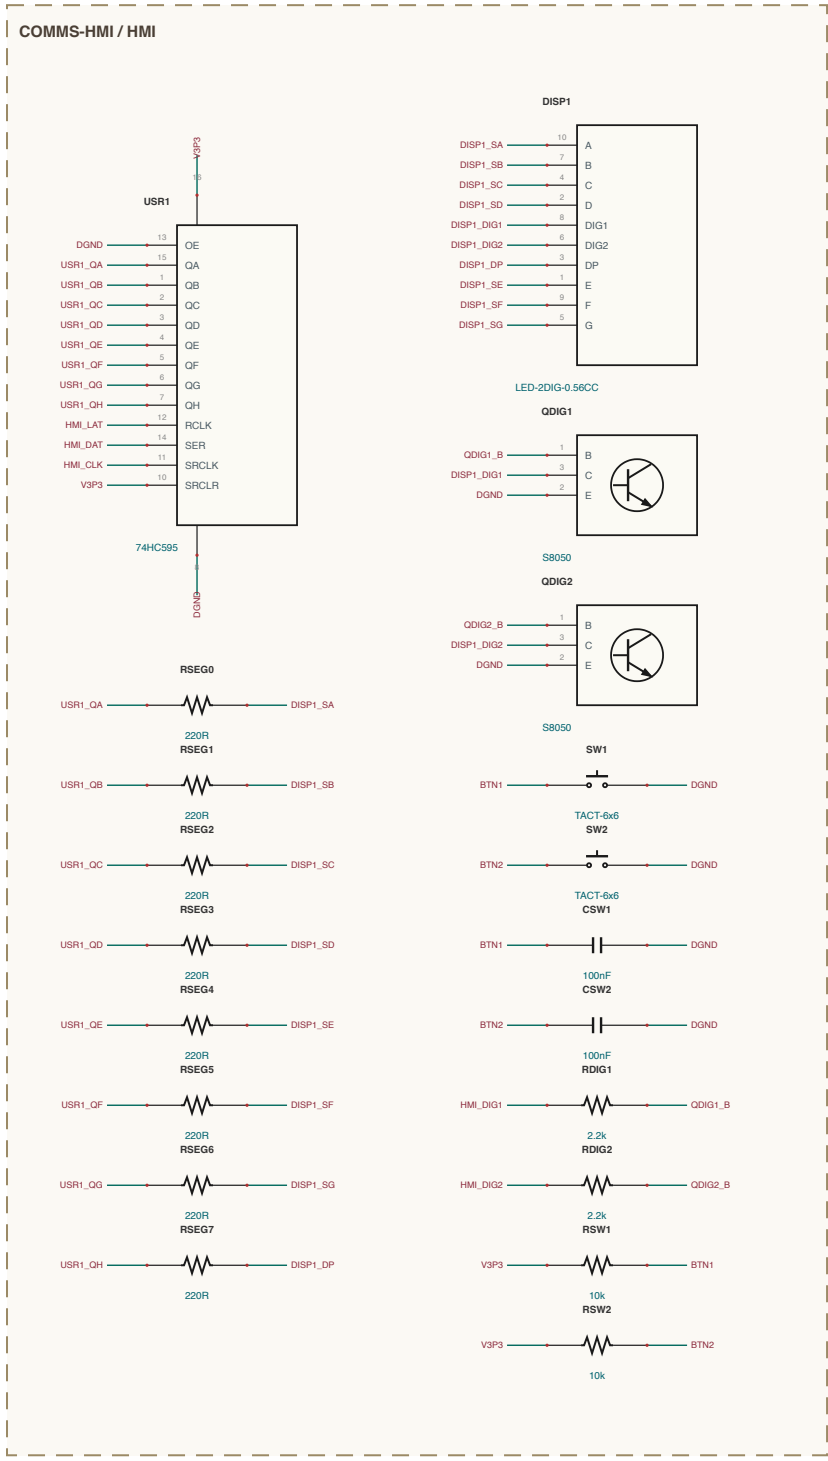
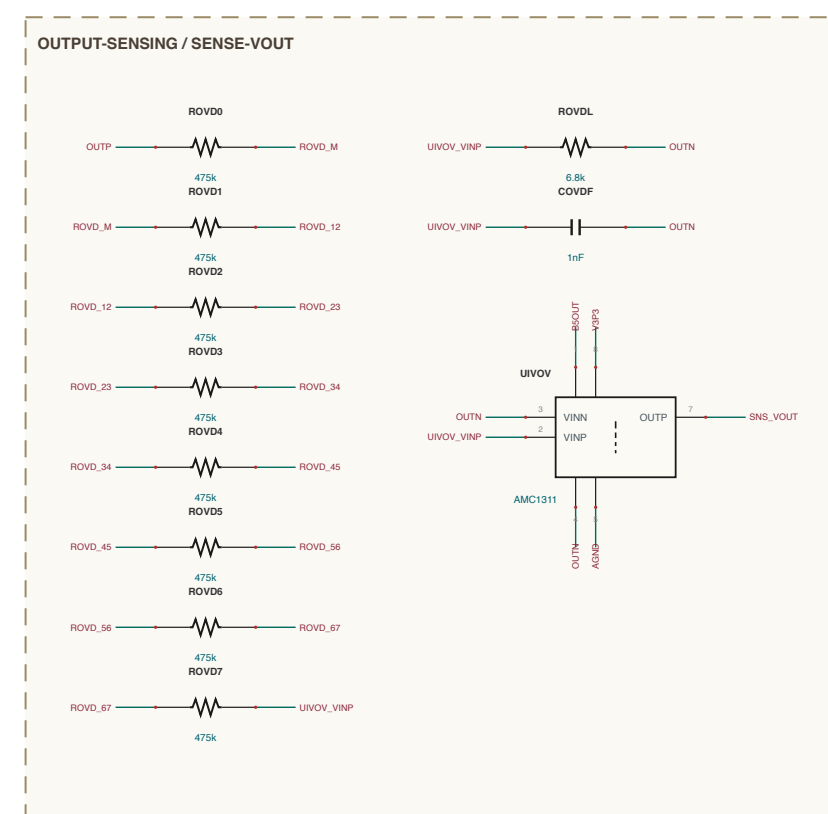
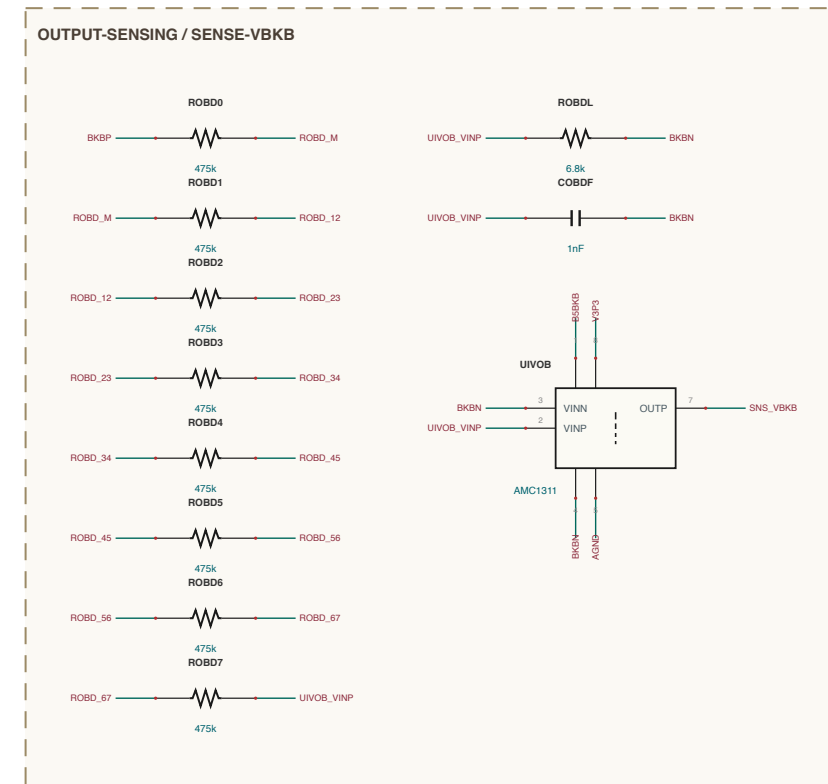
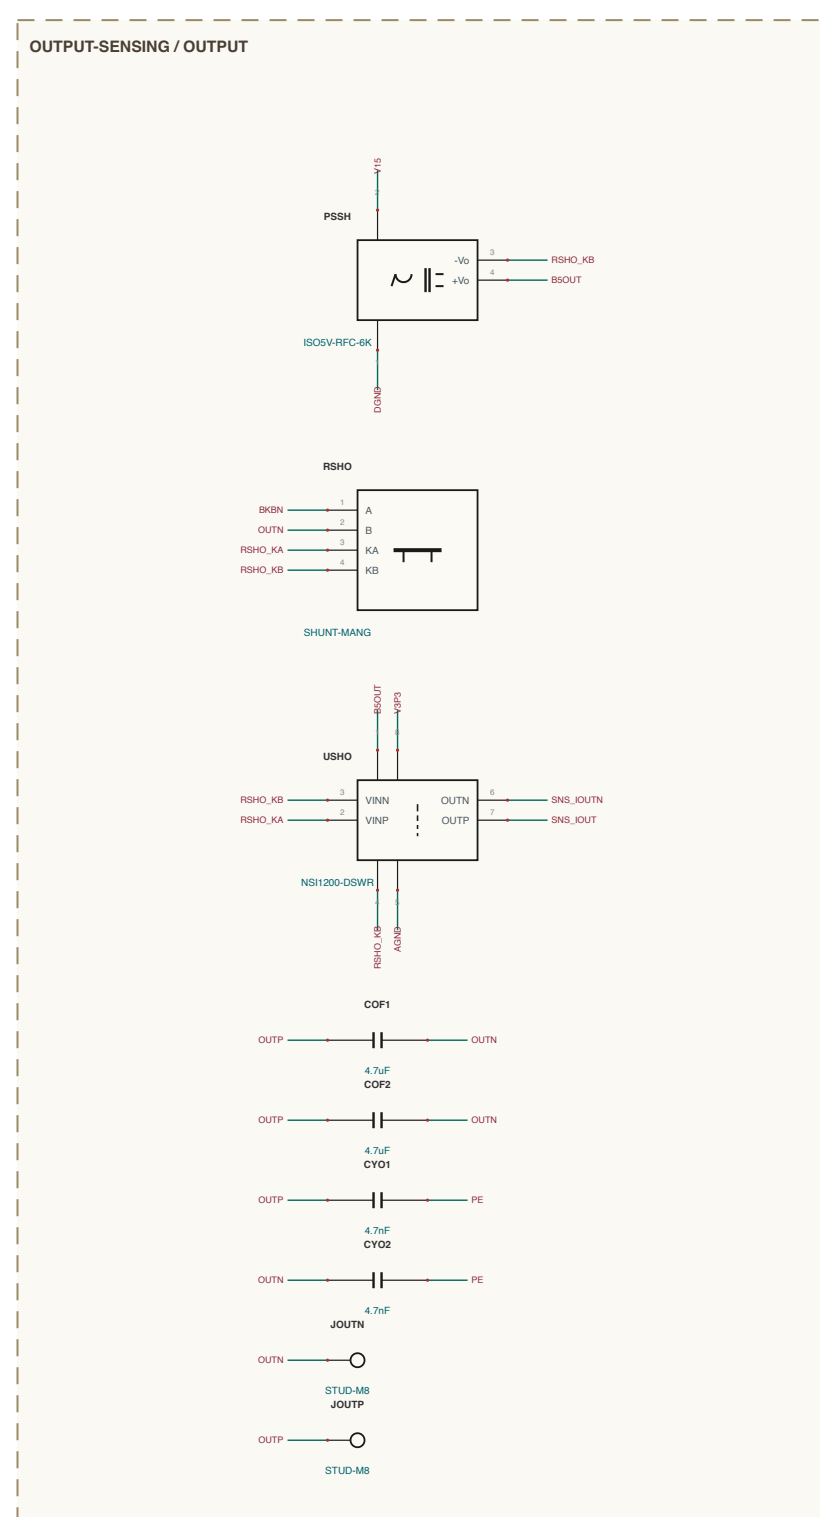
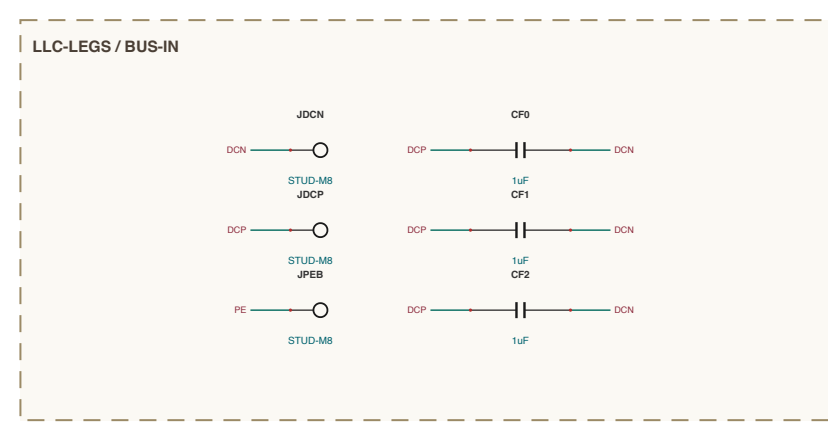
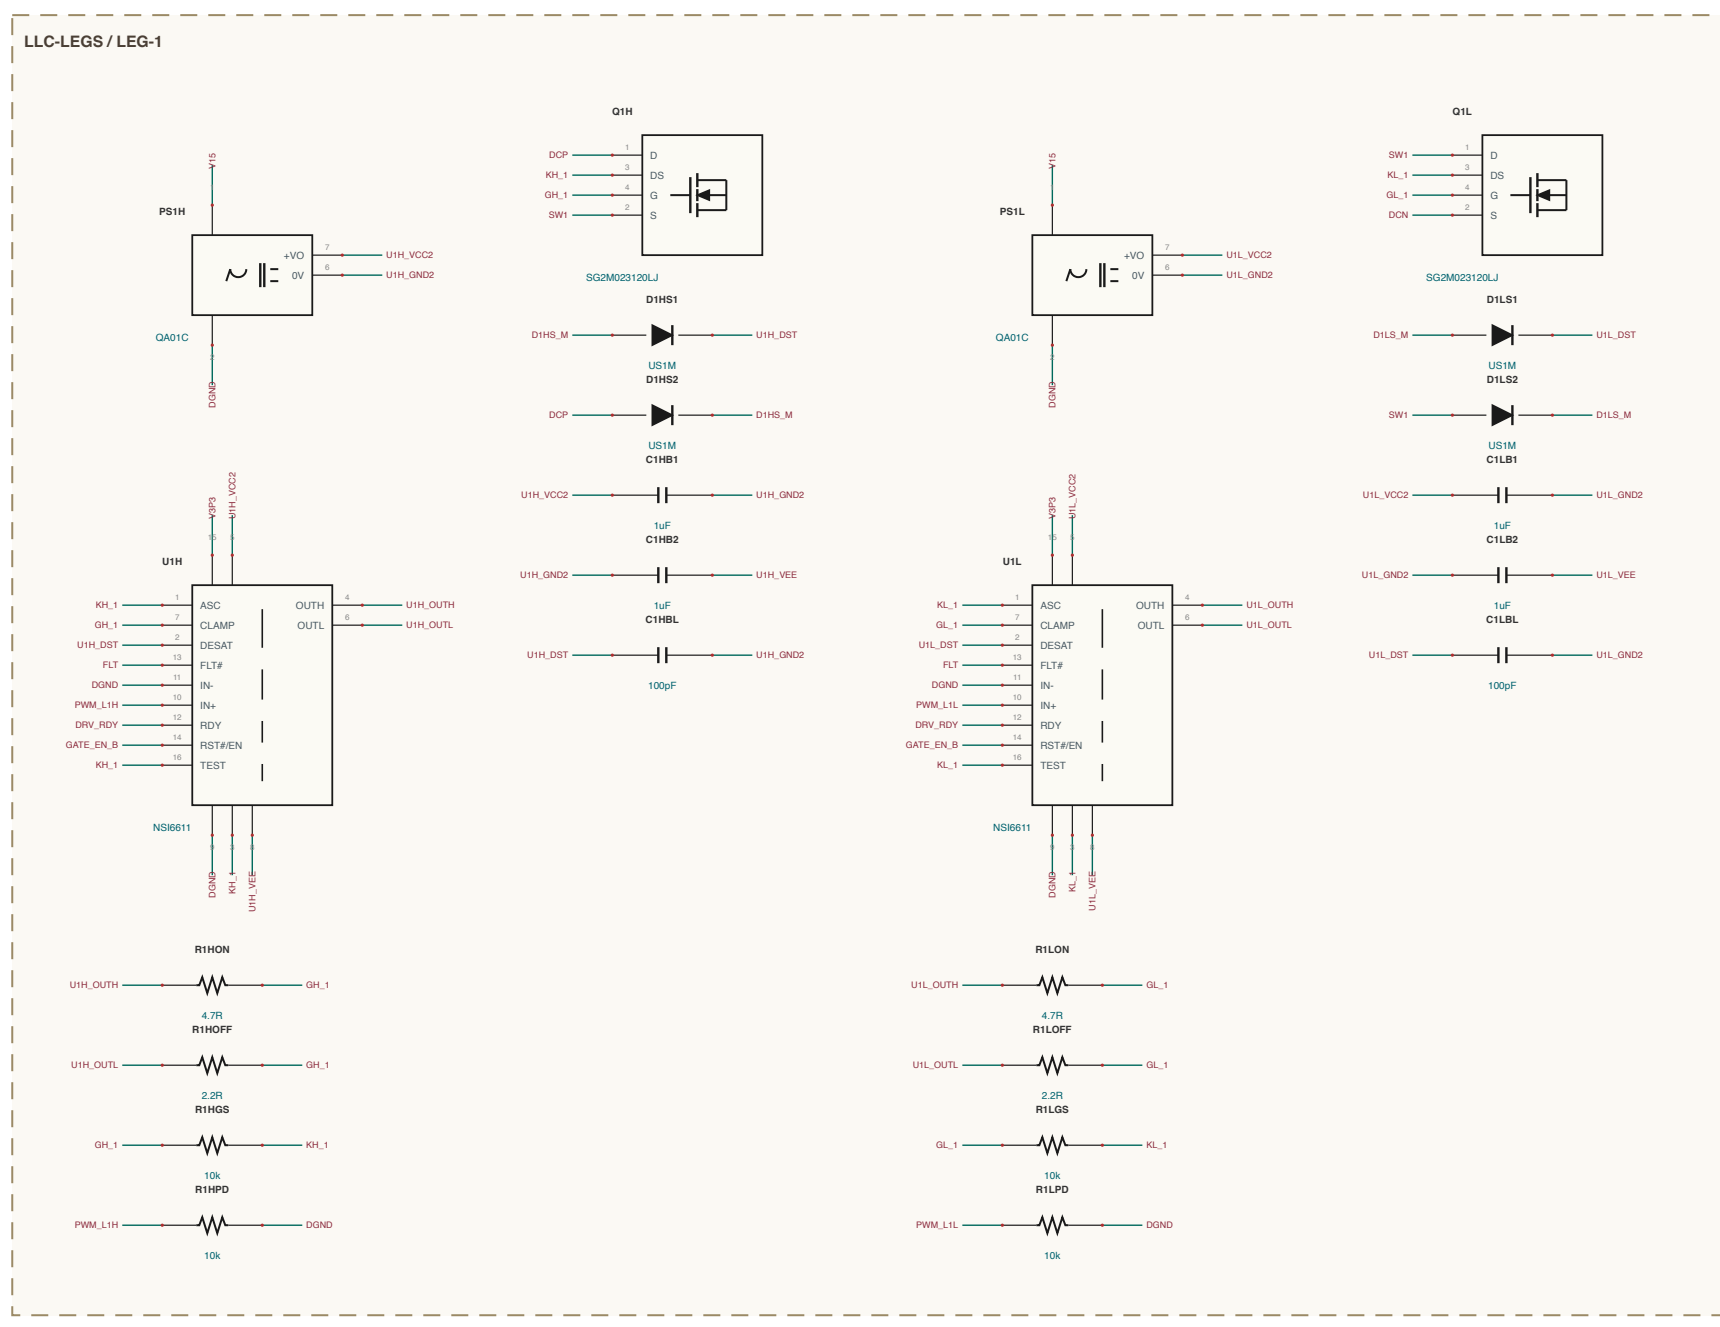
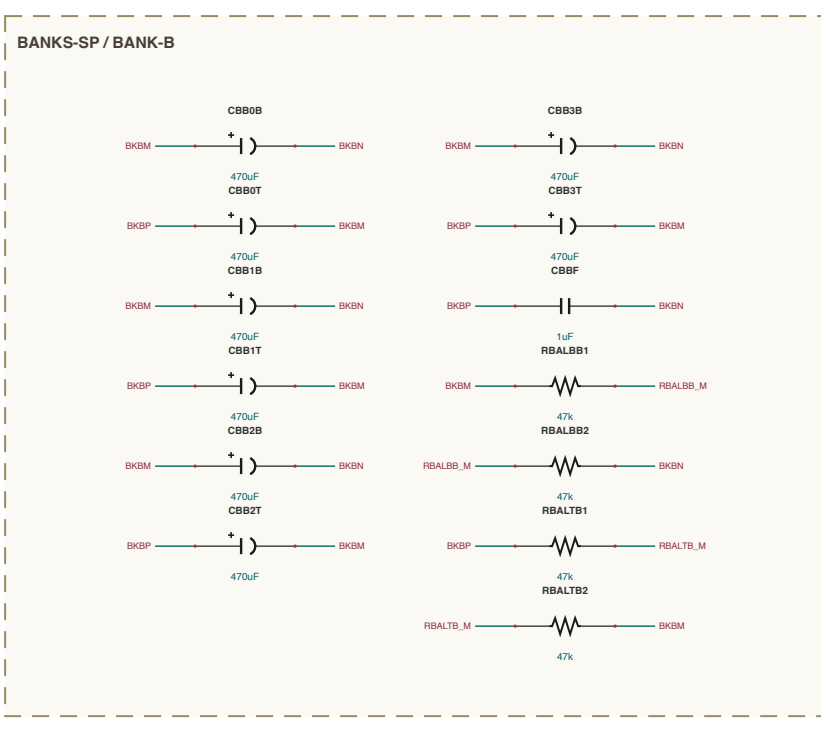
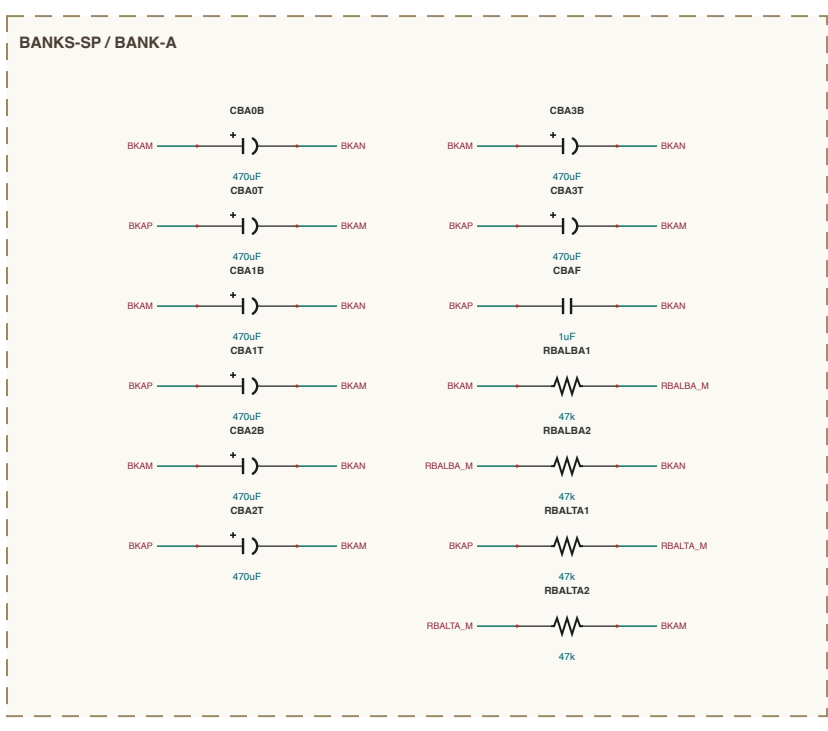
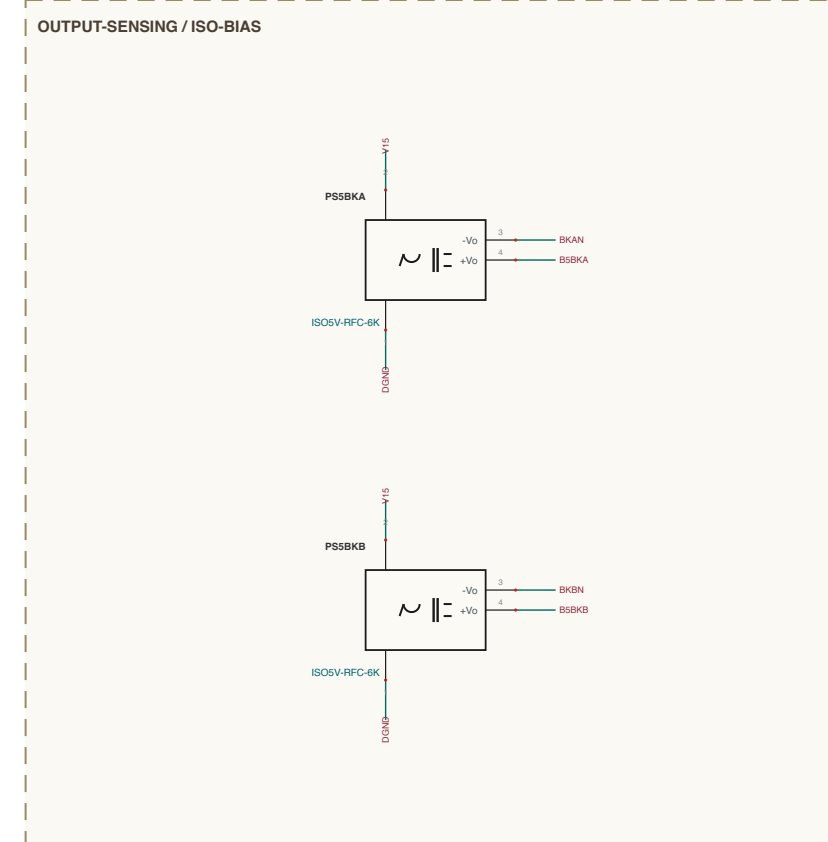
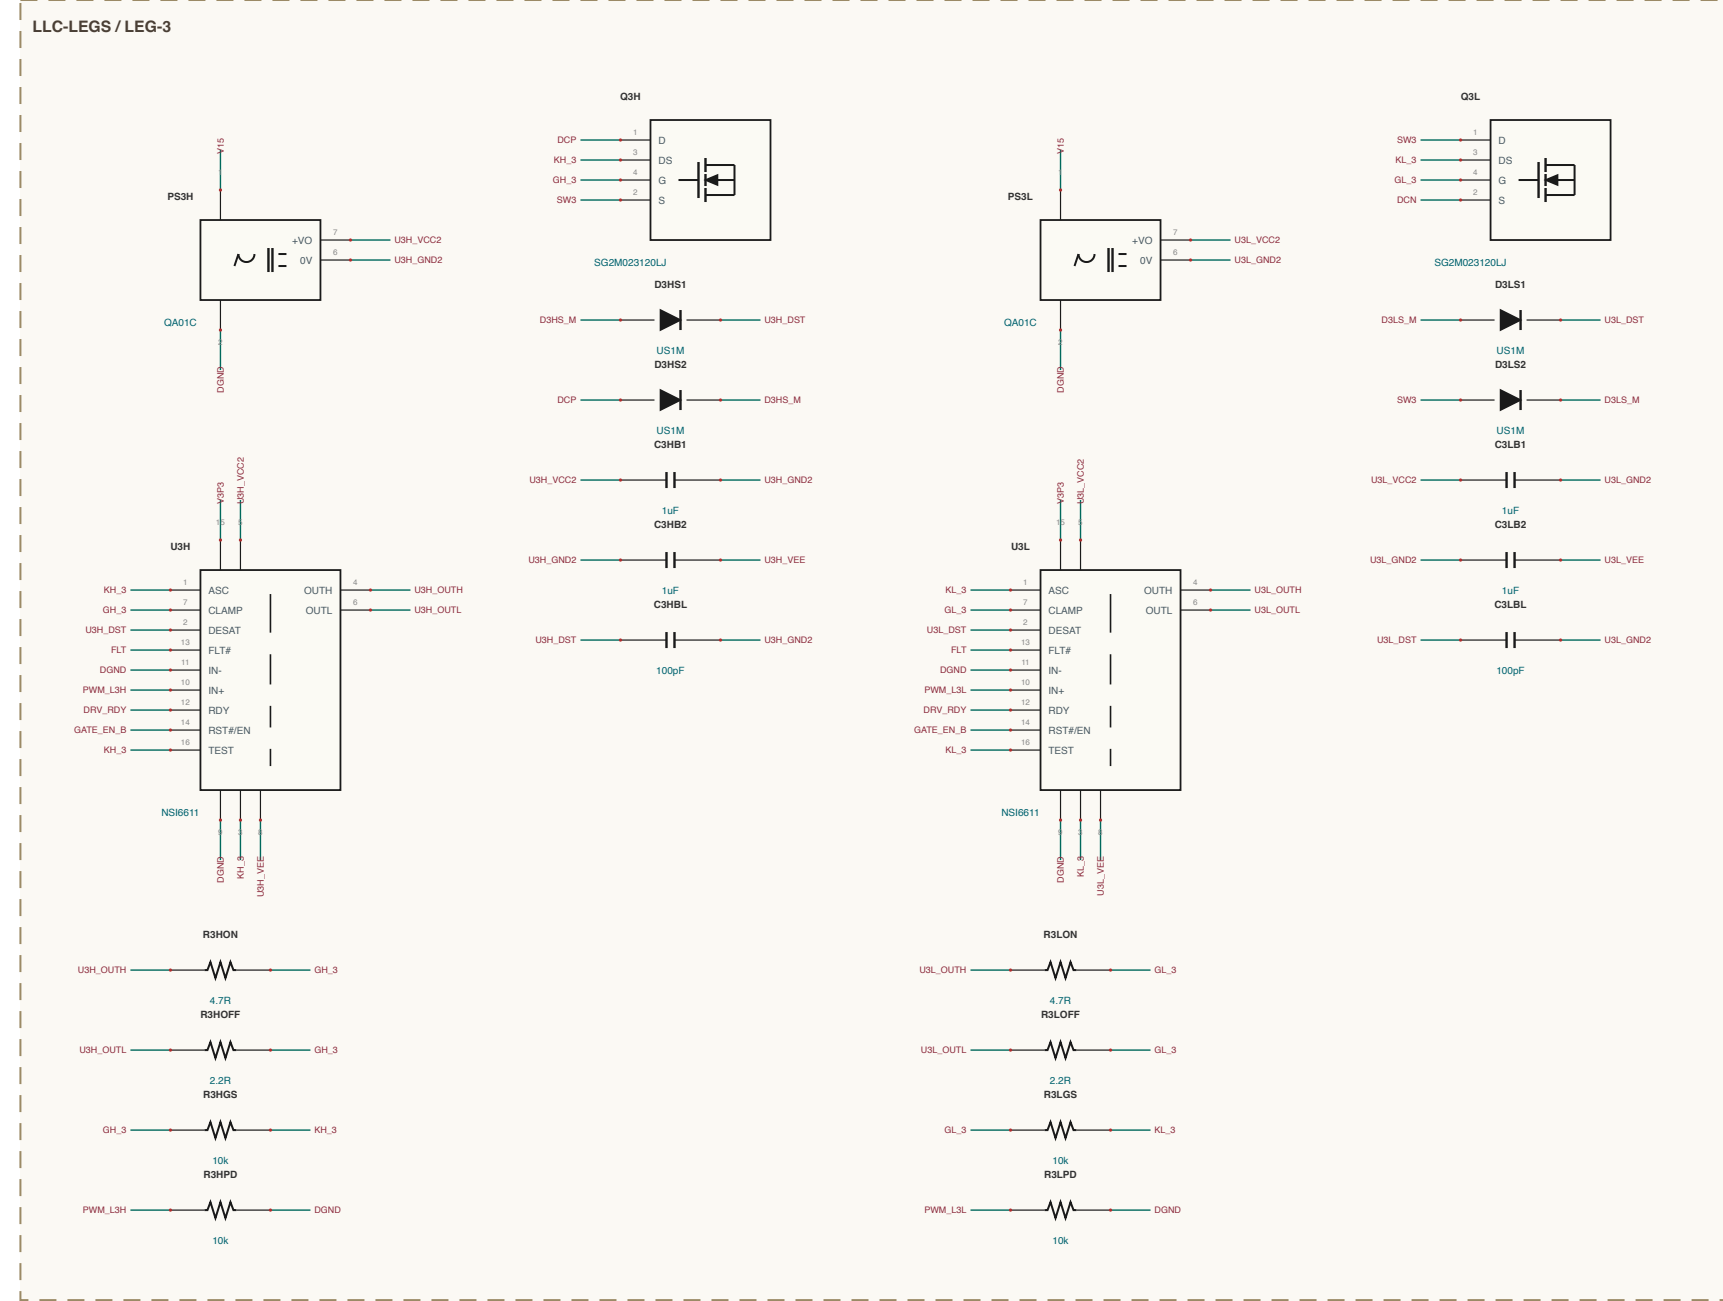
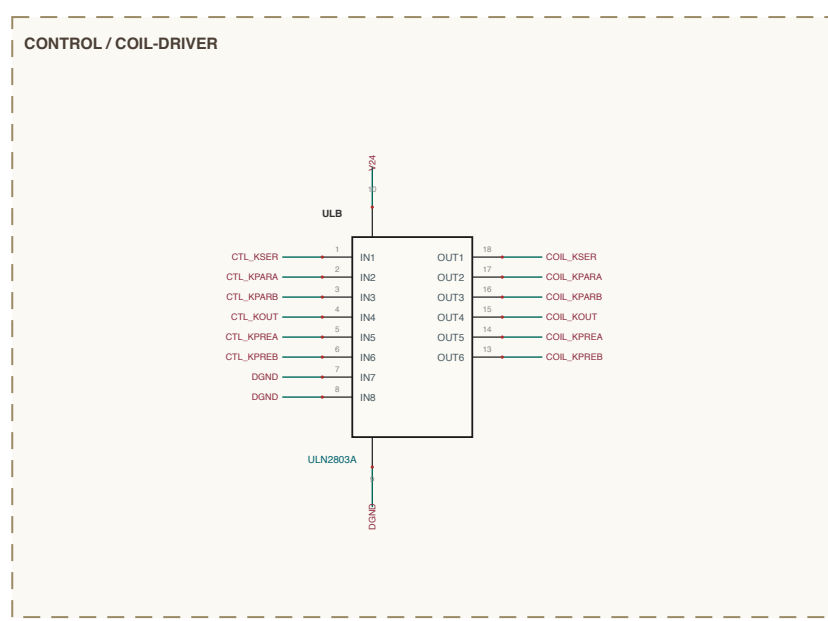
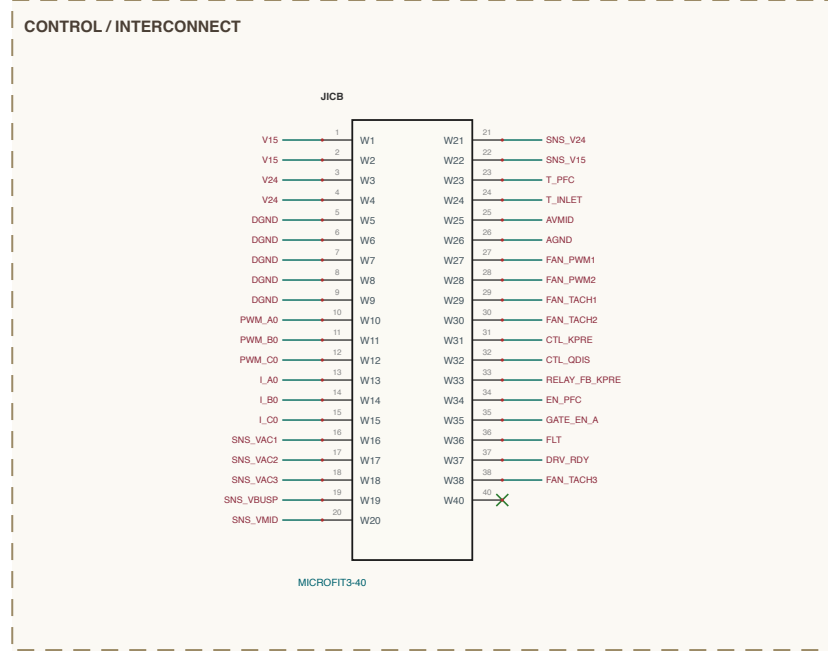
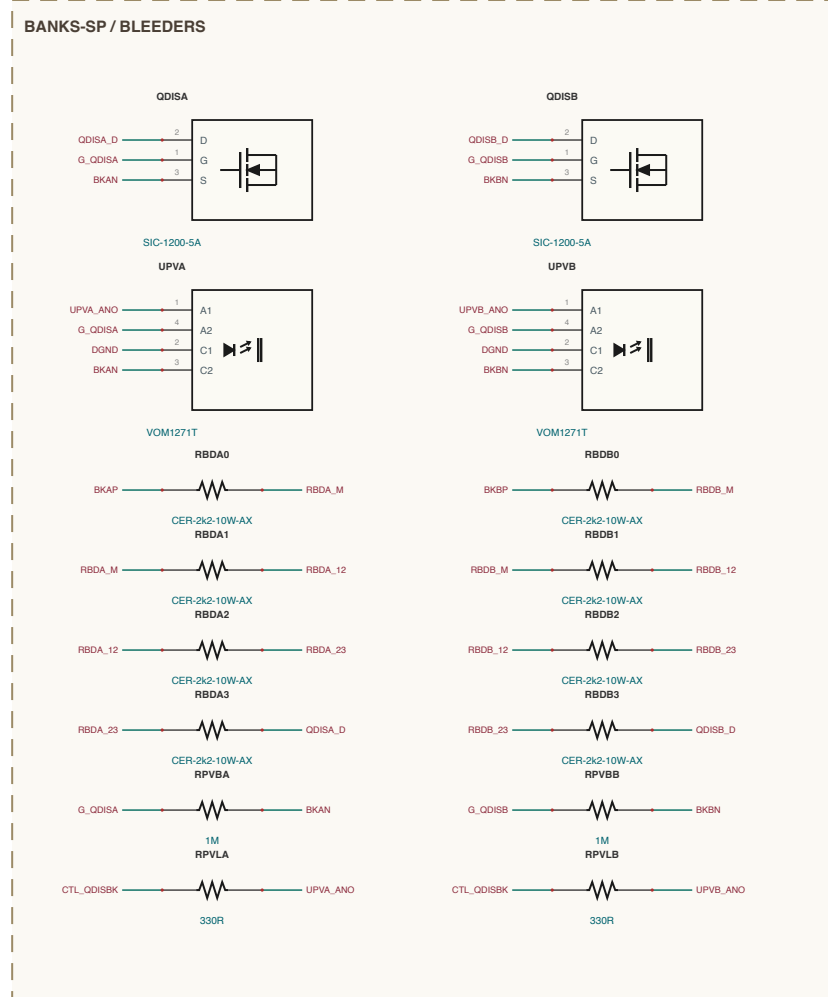


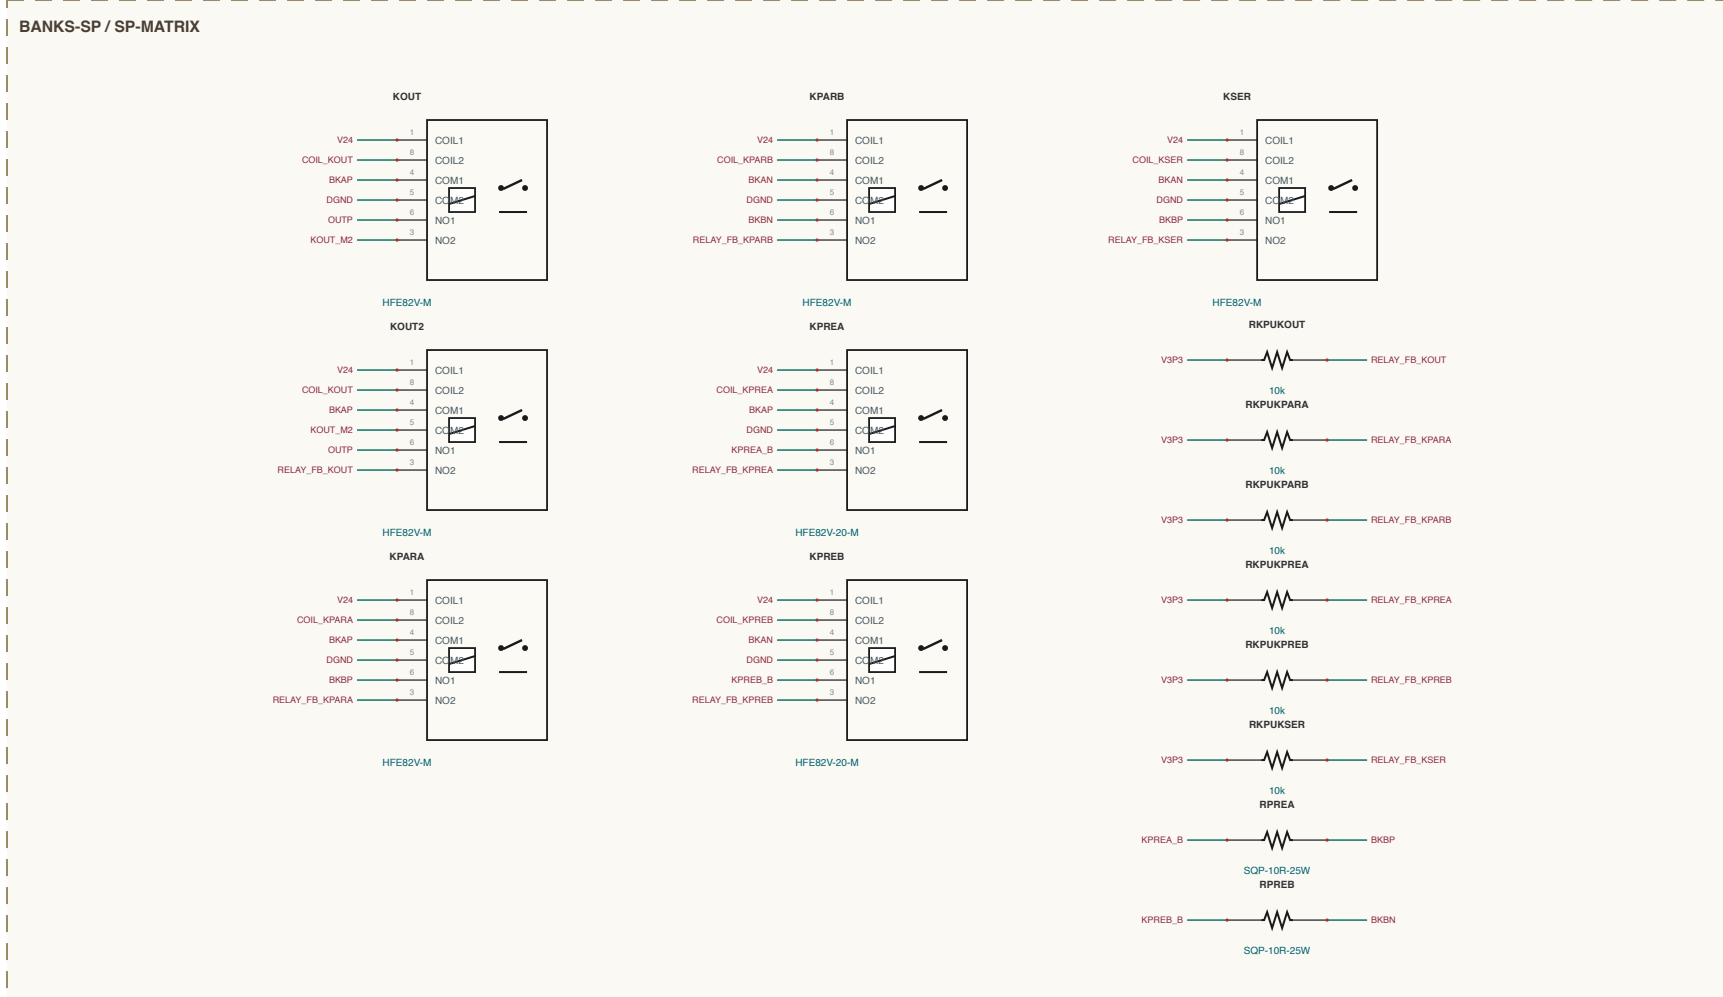

SHEET INDEX
SW 7.1-7.2
OUTPUT-SENSING - 6 sections
BANKS-SP - 4 sections
LLC-LEG8 - 4 sections
CONTROL - 3 sections
LLC-TANKS - 3 sections
COMMS-HMI - 2 sections
av 0.1 - 22 sections - 399 components
NET NAMING
Internal junctions are named for what they join
Useful: -HMI node at that IC pin e.g. HMI1A, HMI1B
Resistor: -M midpoint of a series pair e.g. R1A1A, M
Resistor: -vout tip between Resistor and e.g. R1A1A, M
all others are explicit design nets