

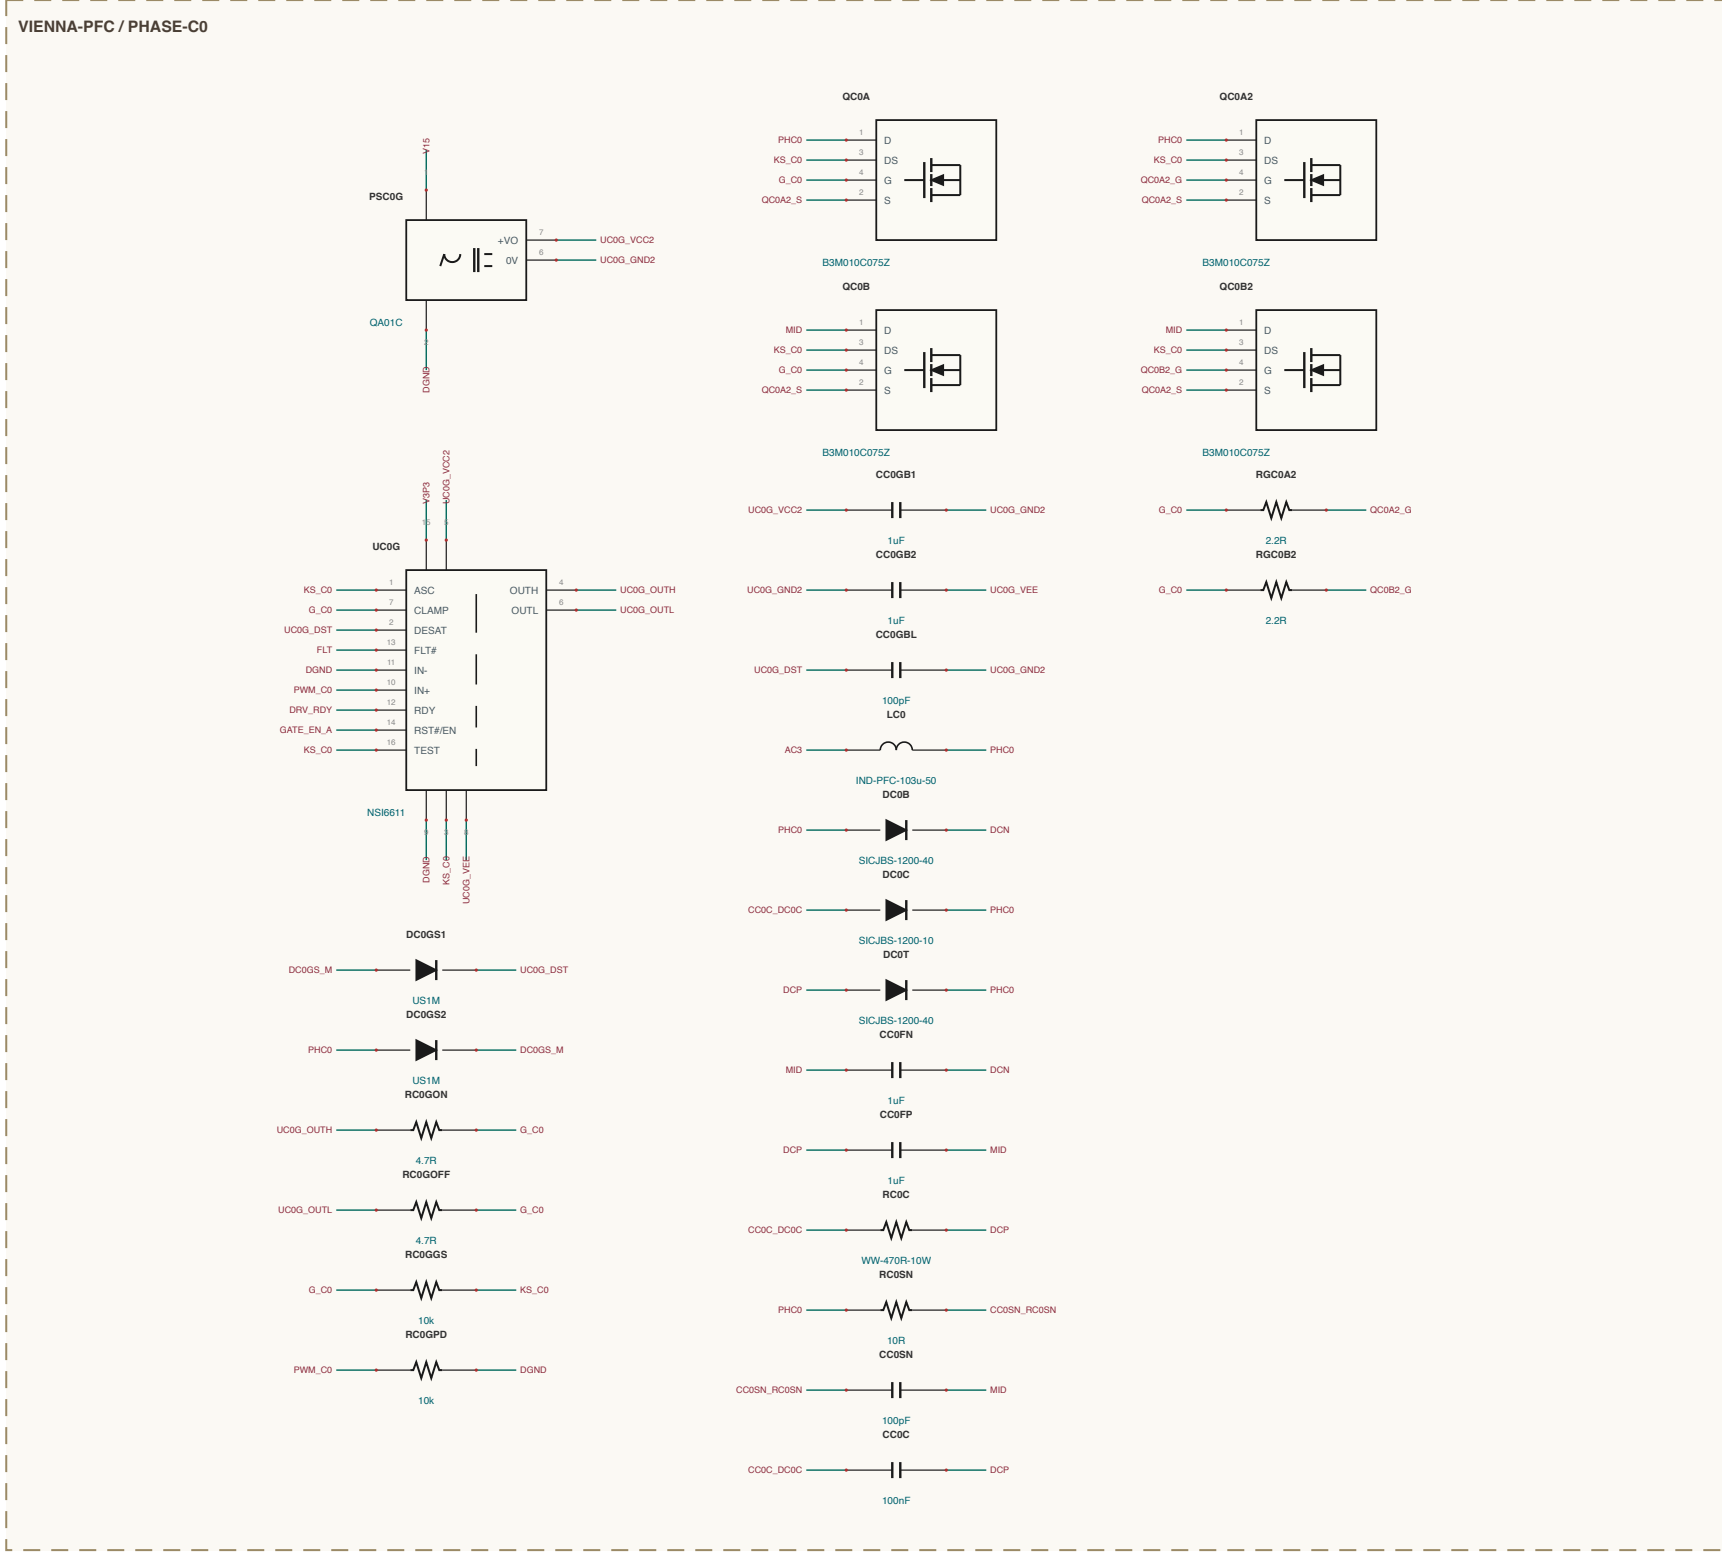
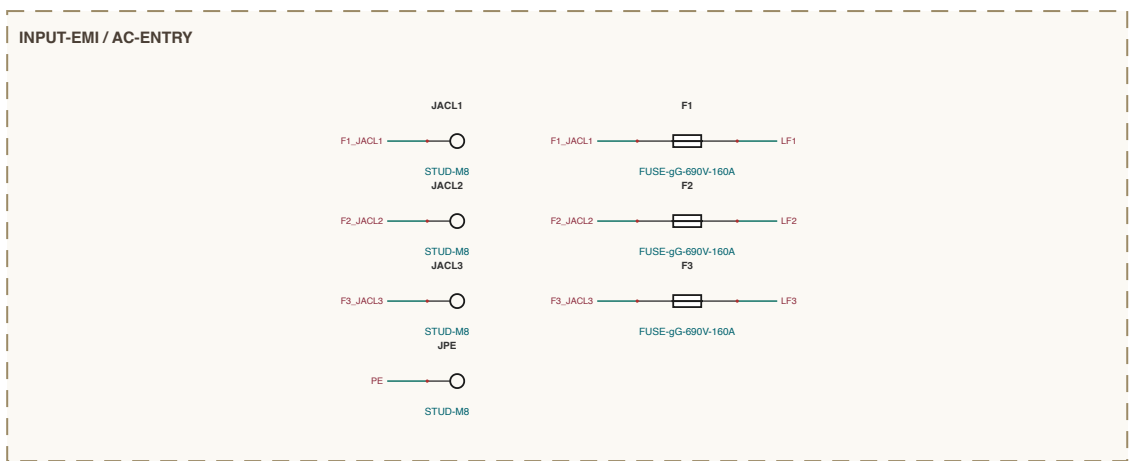
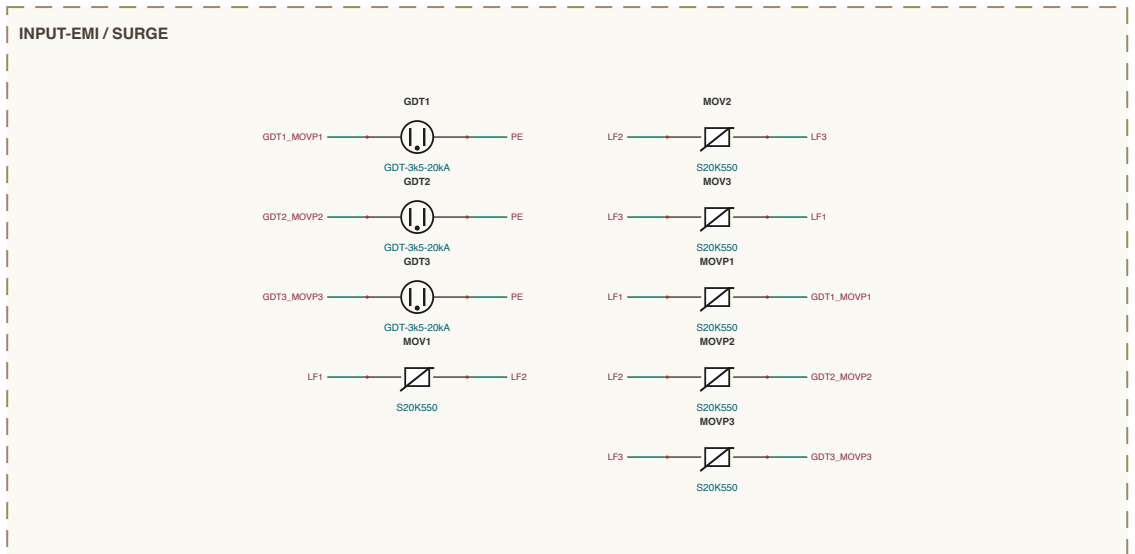
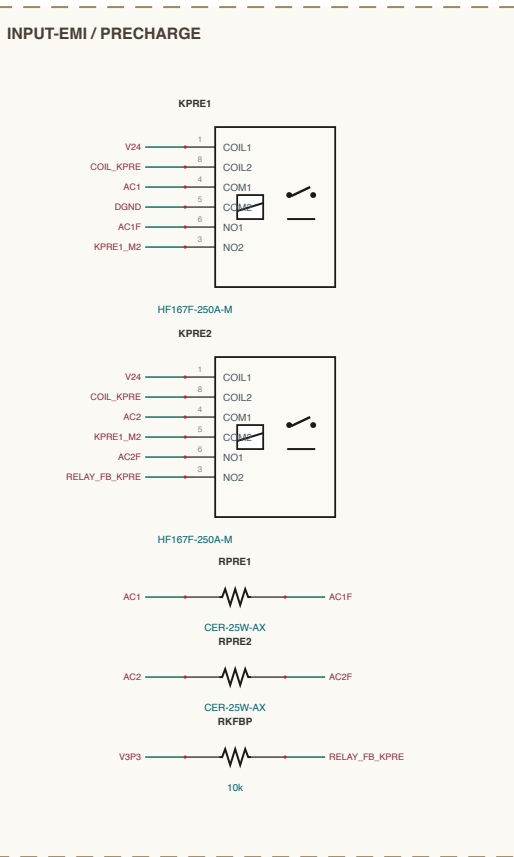
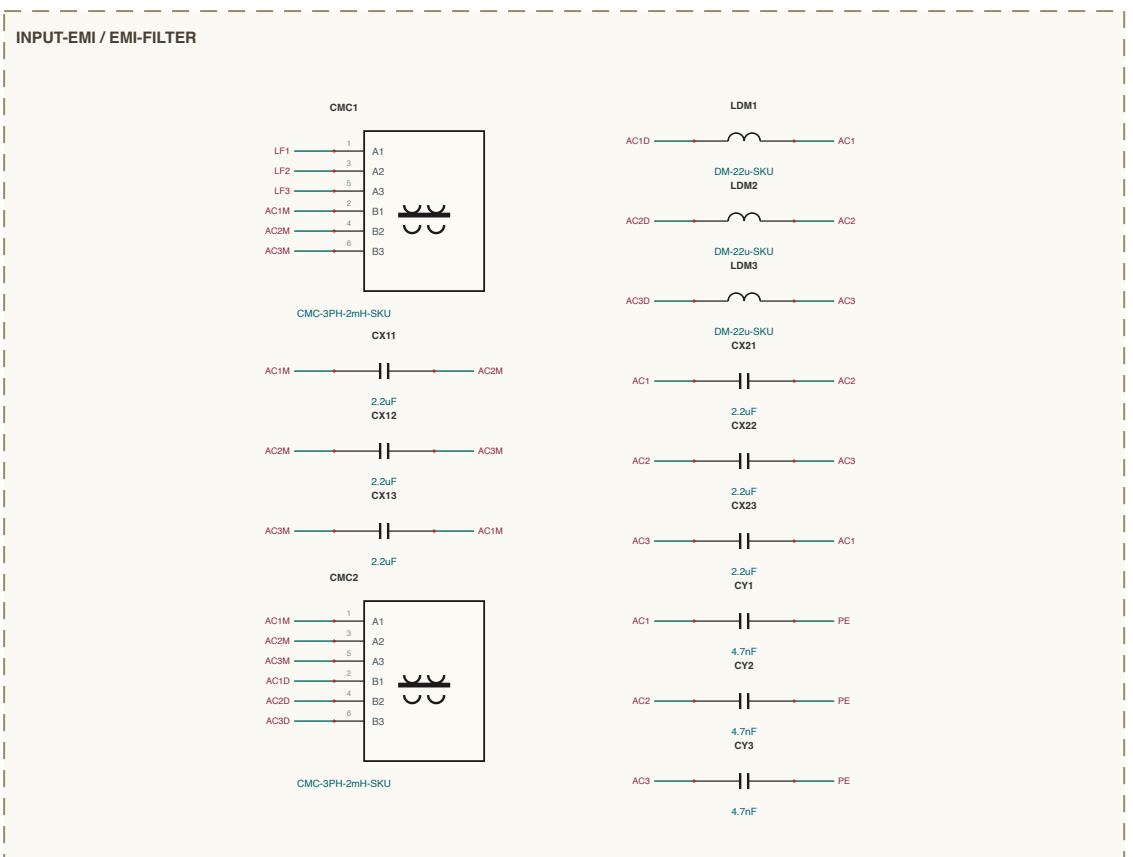
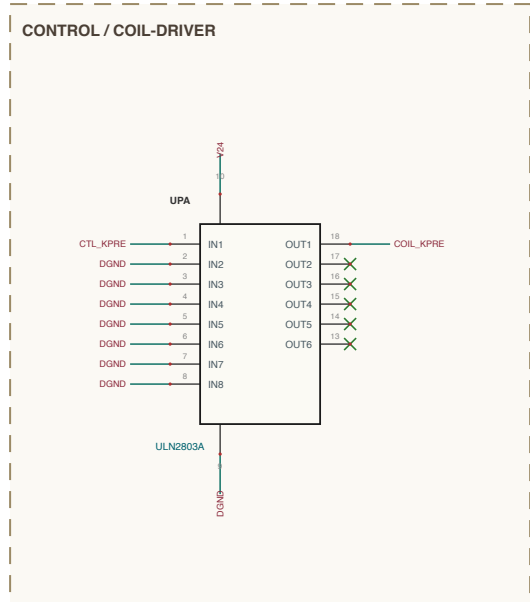
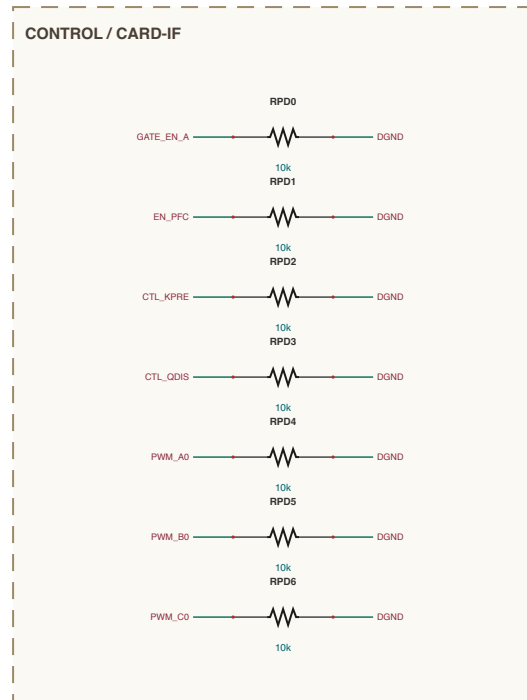
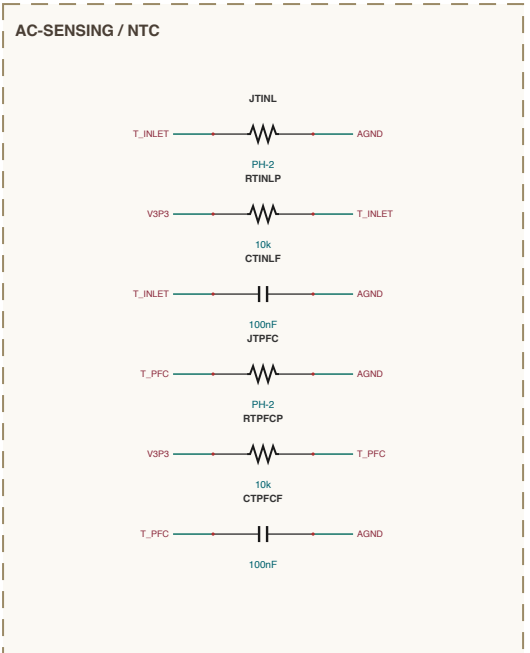
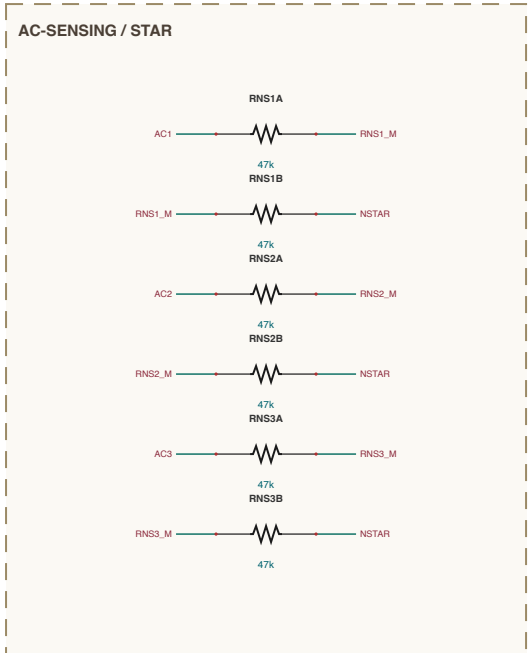
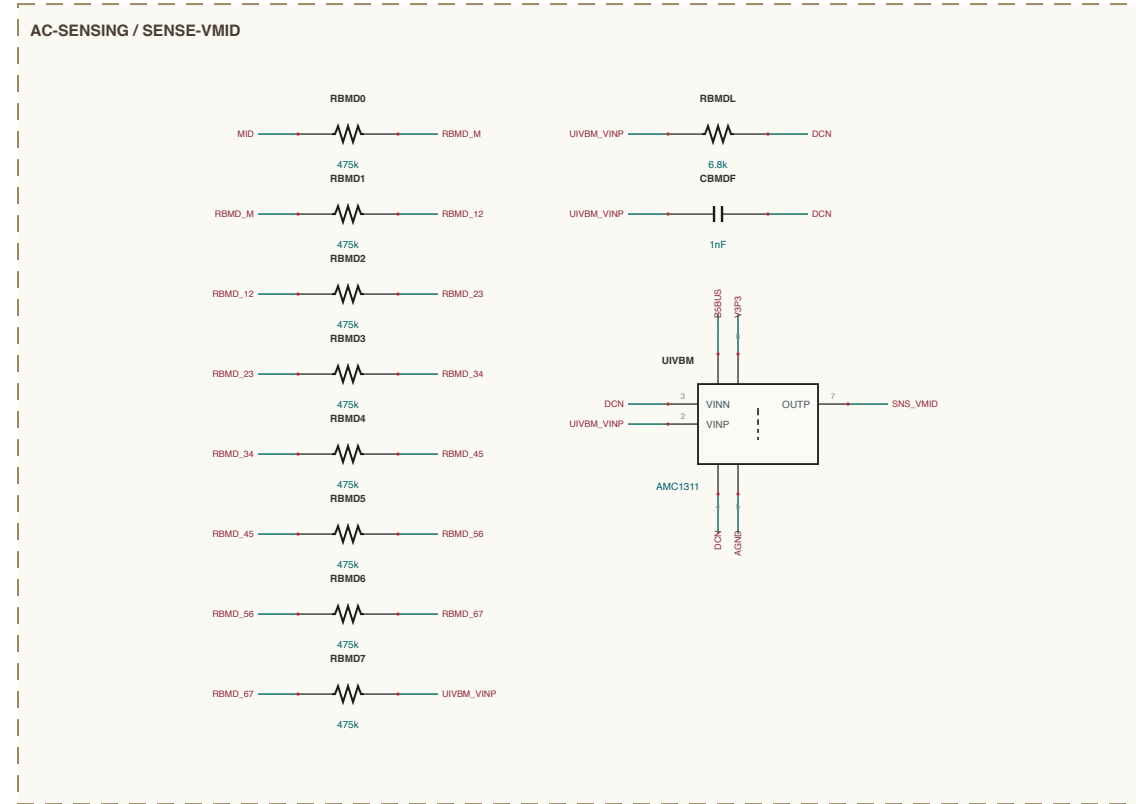
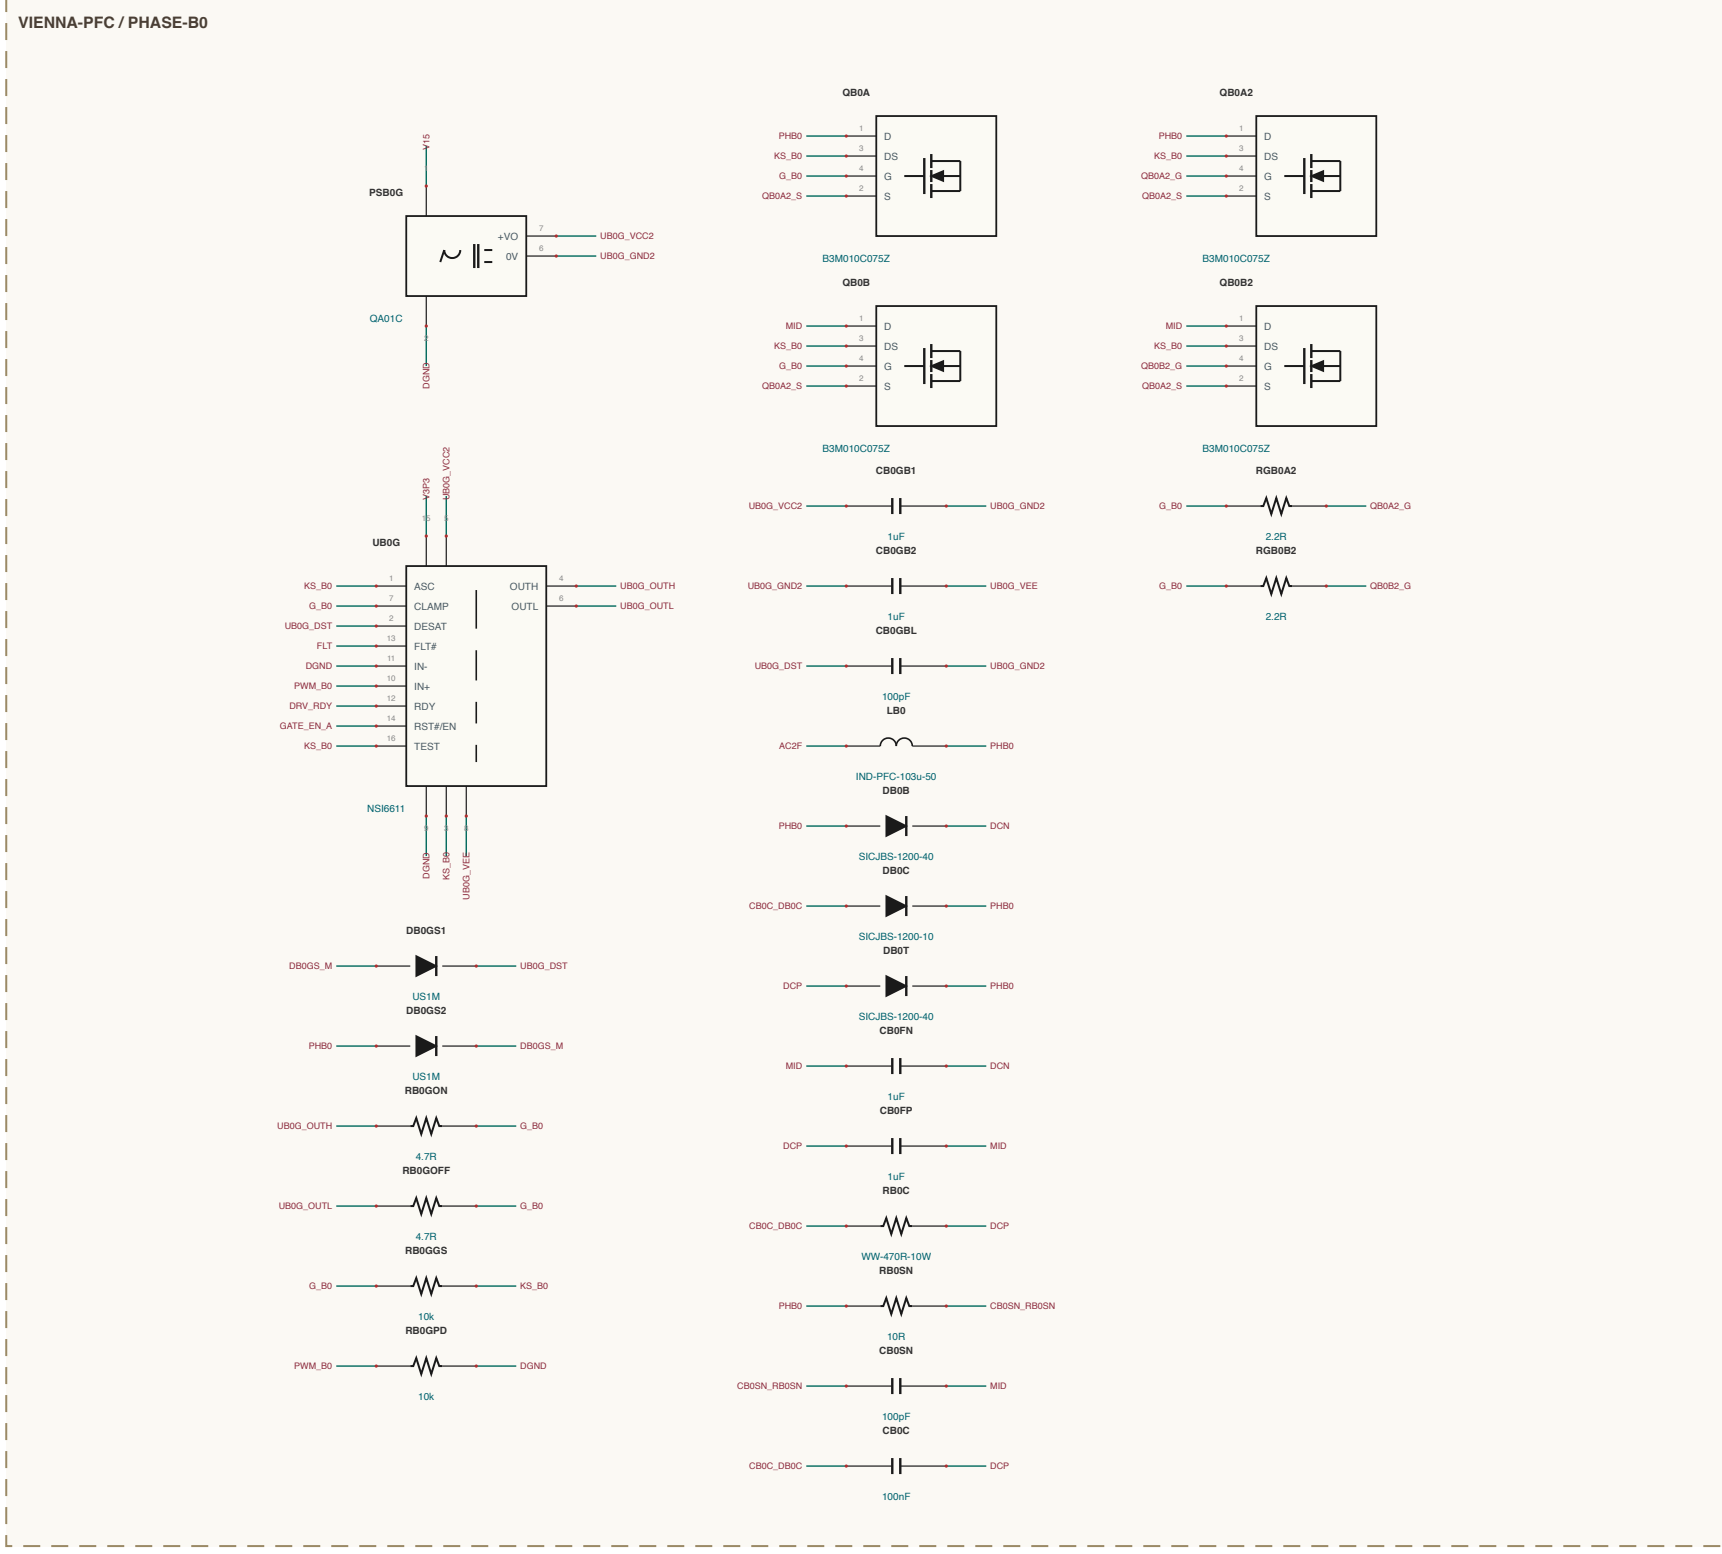
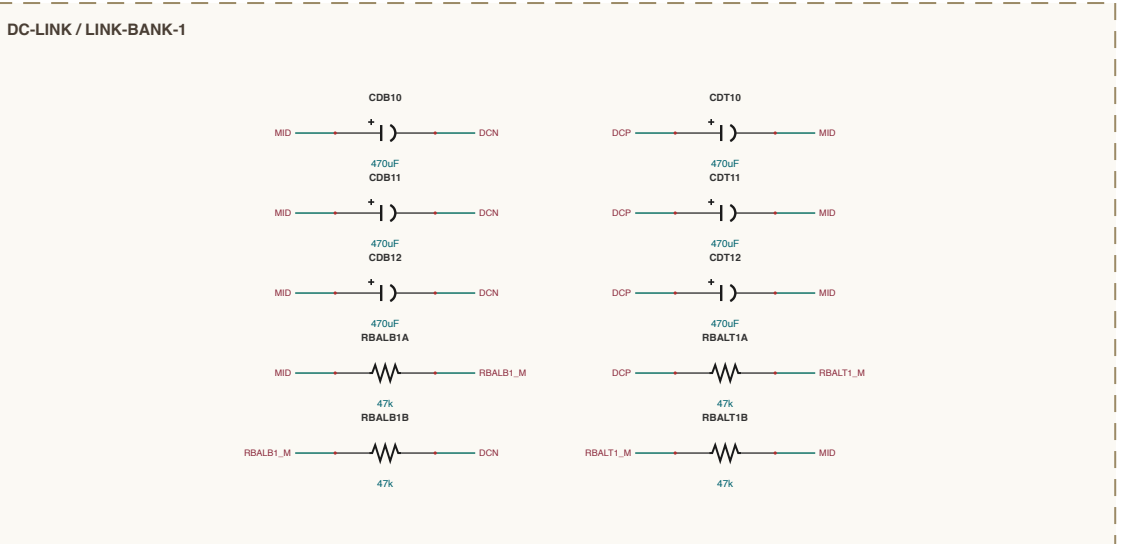
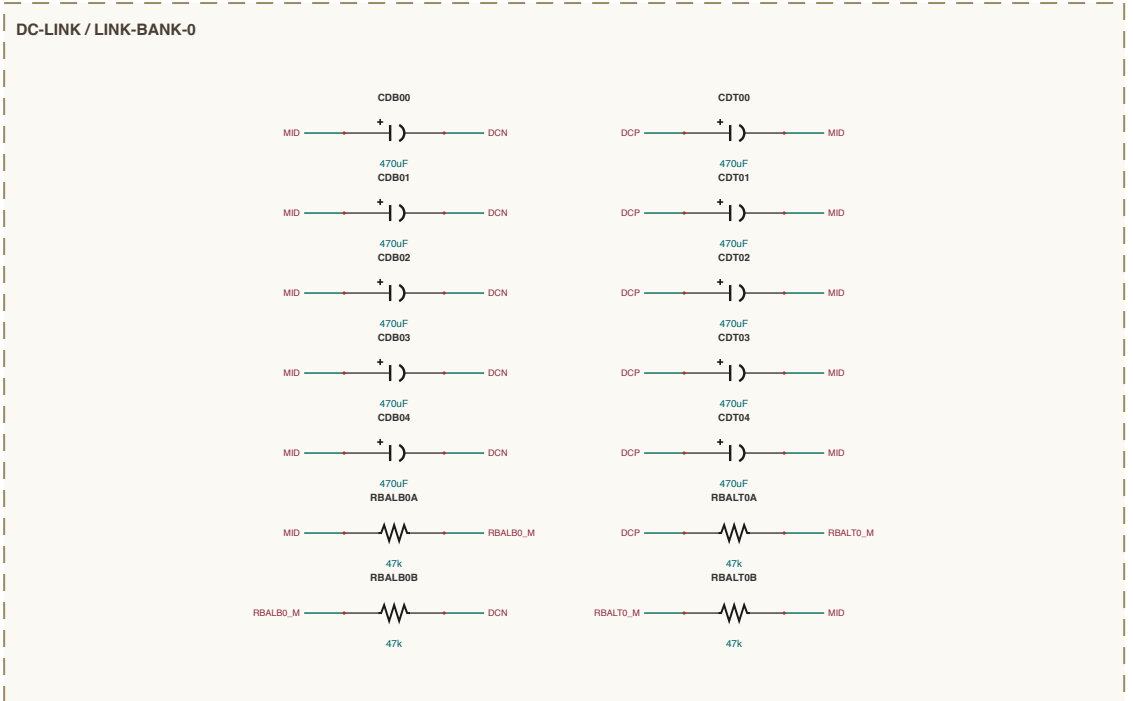
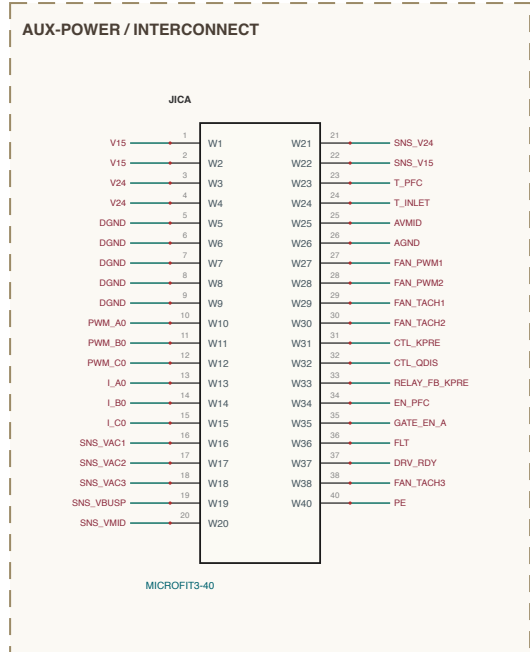
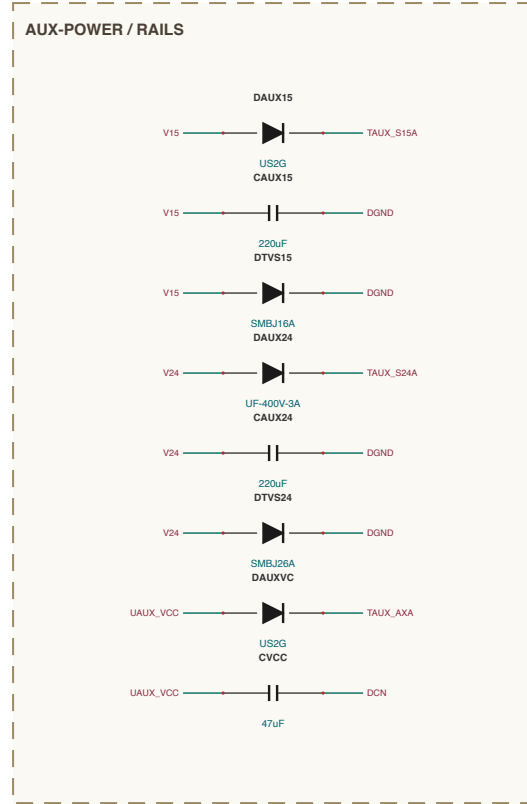
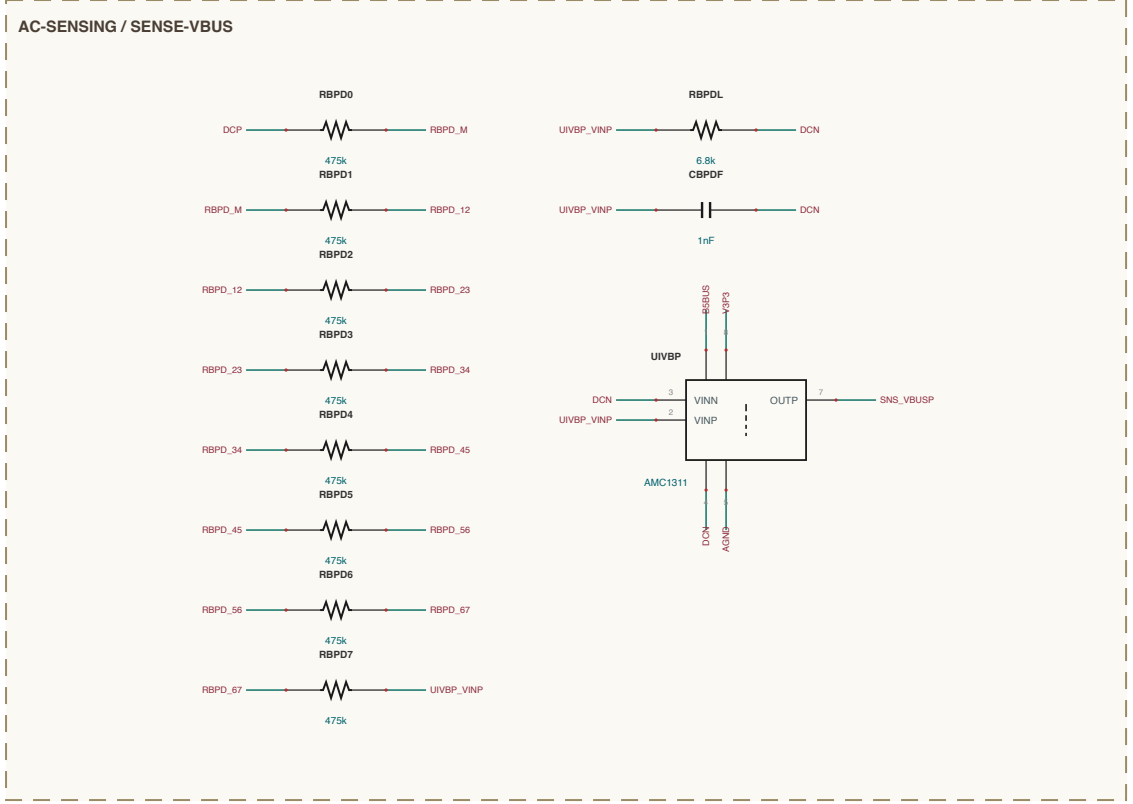
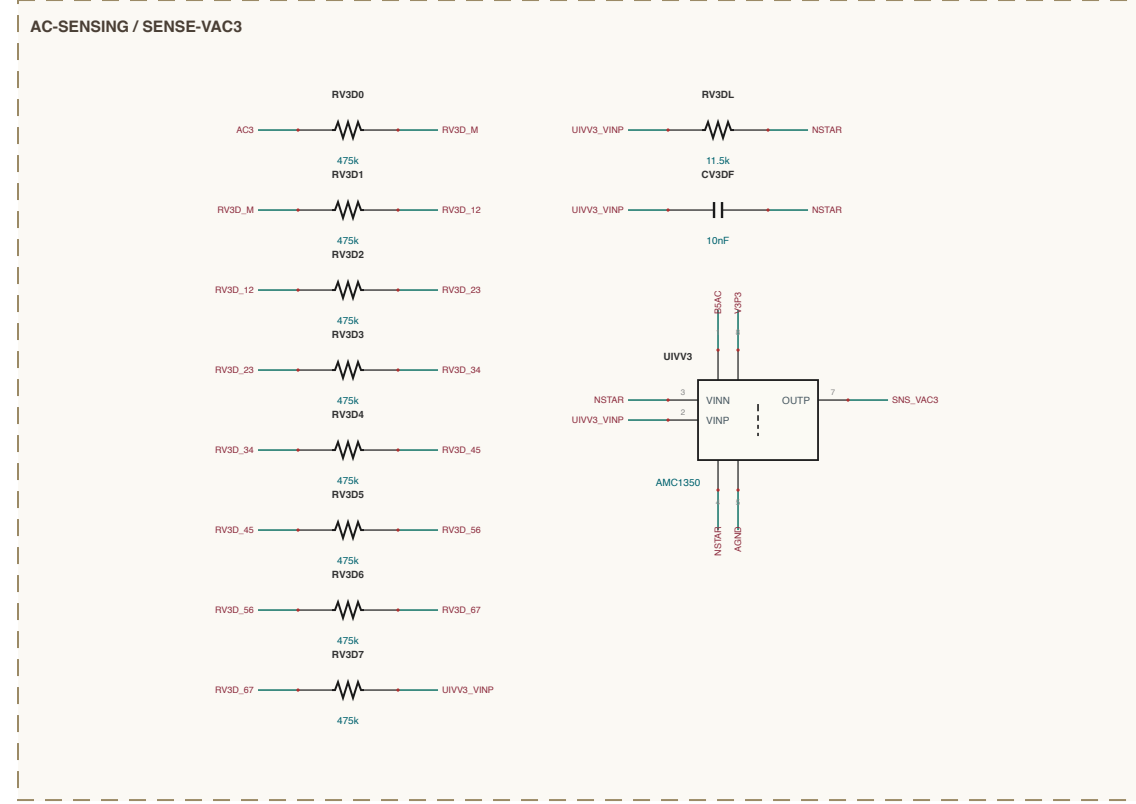
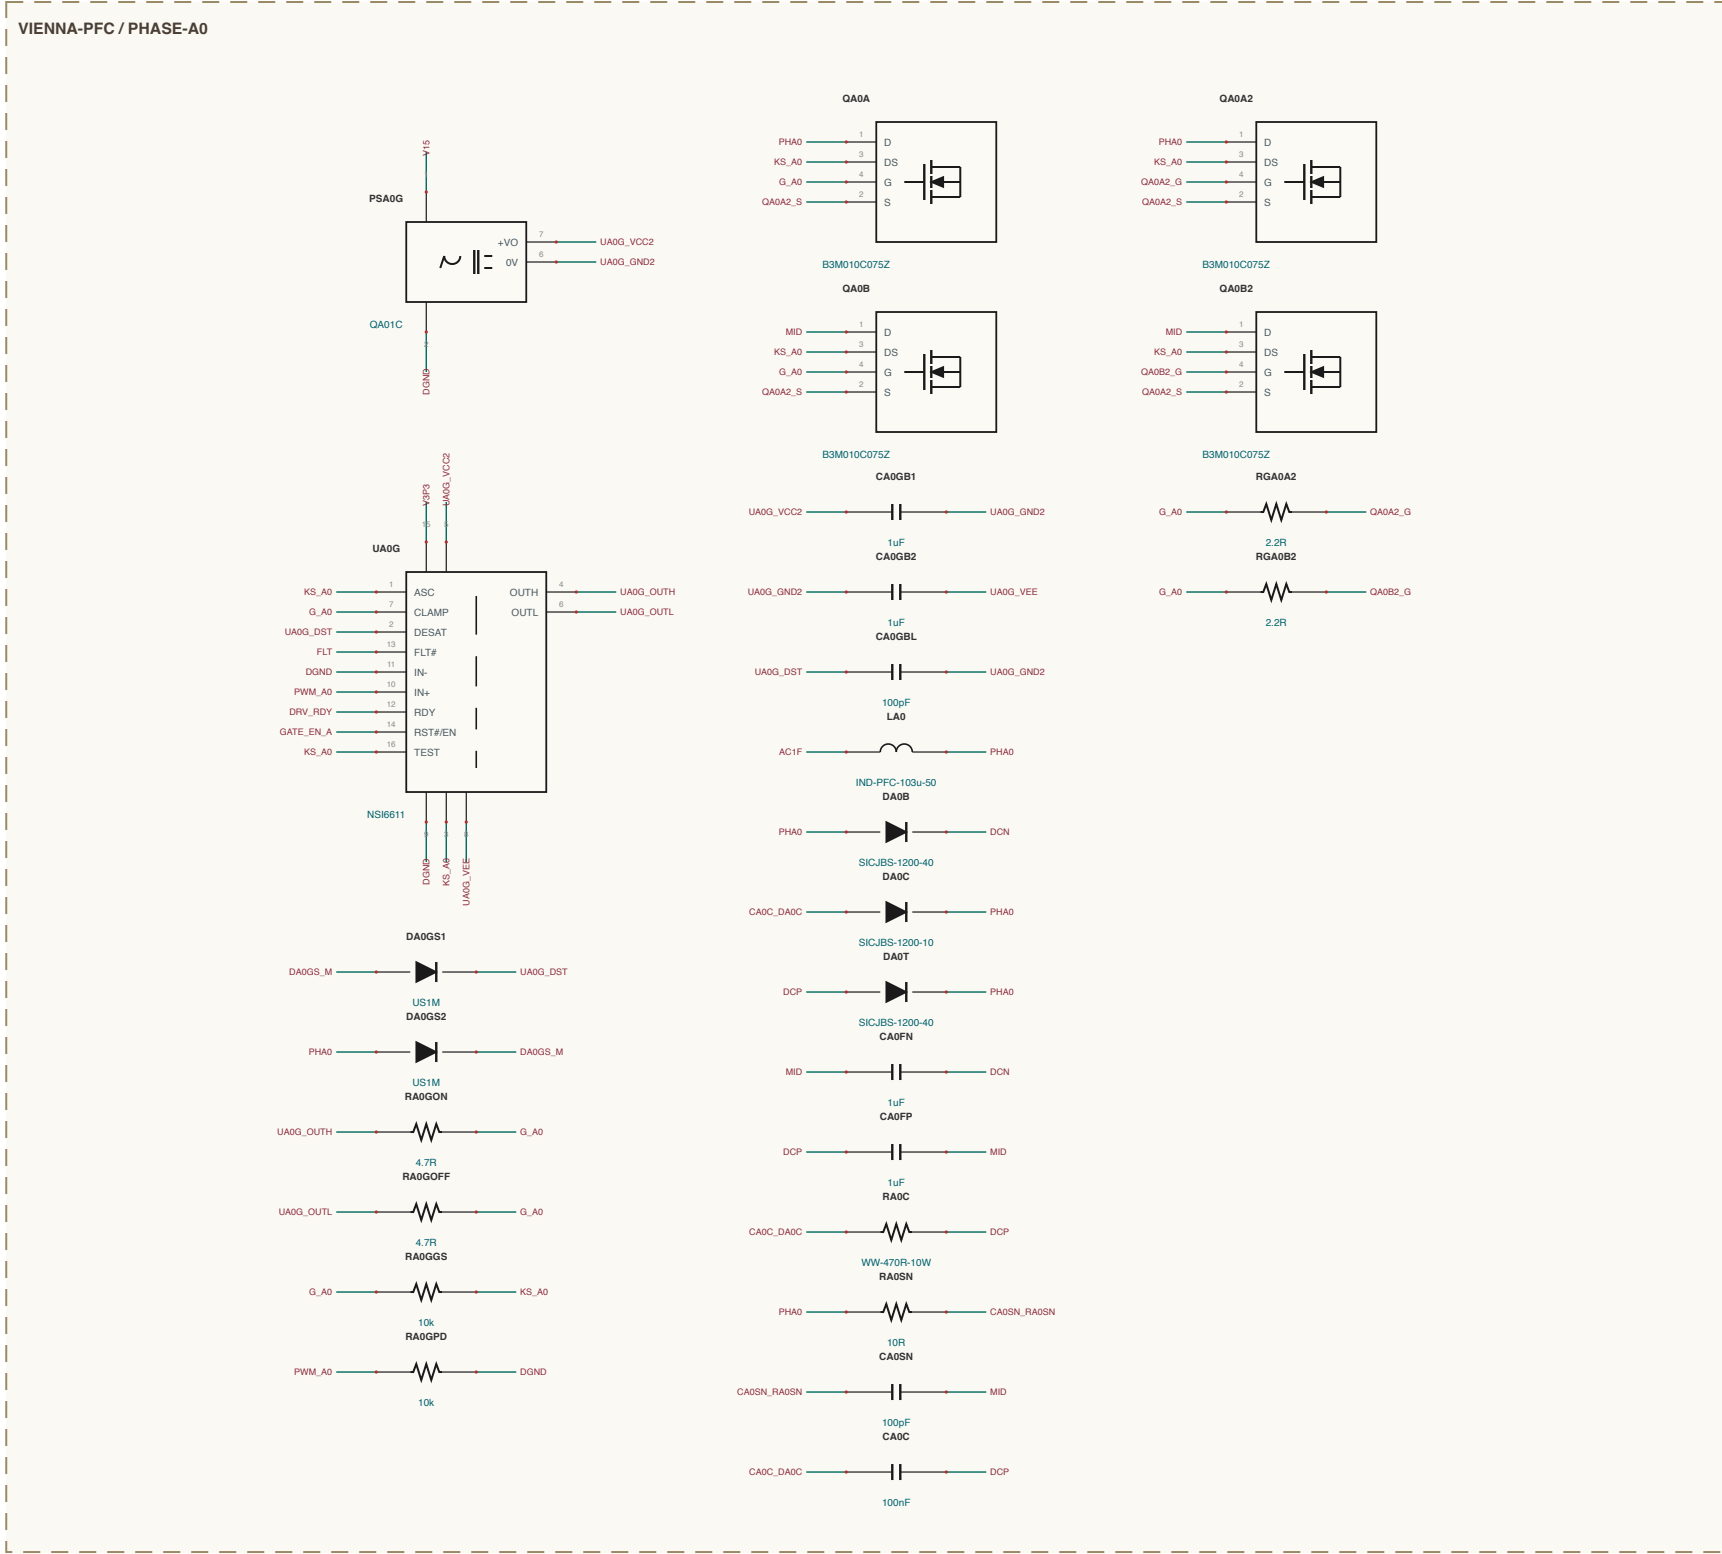
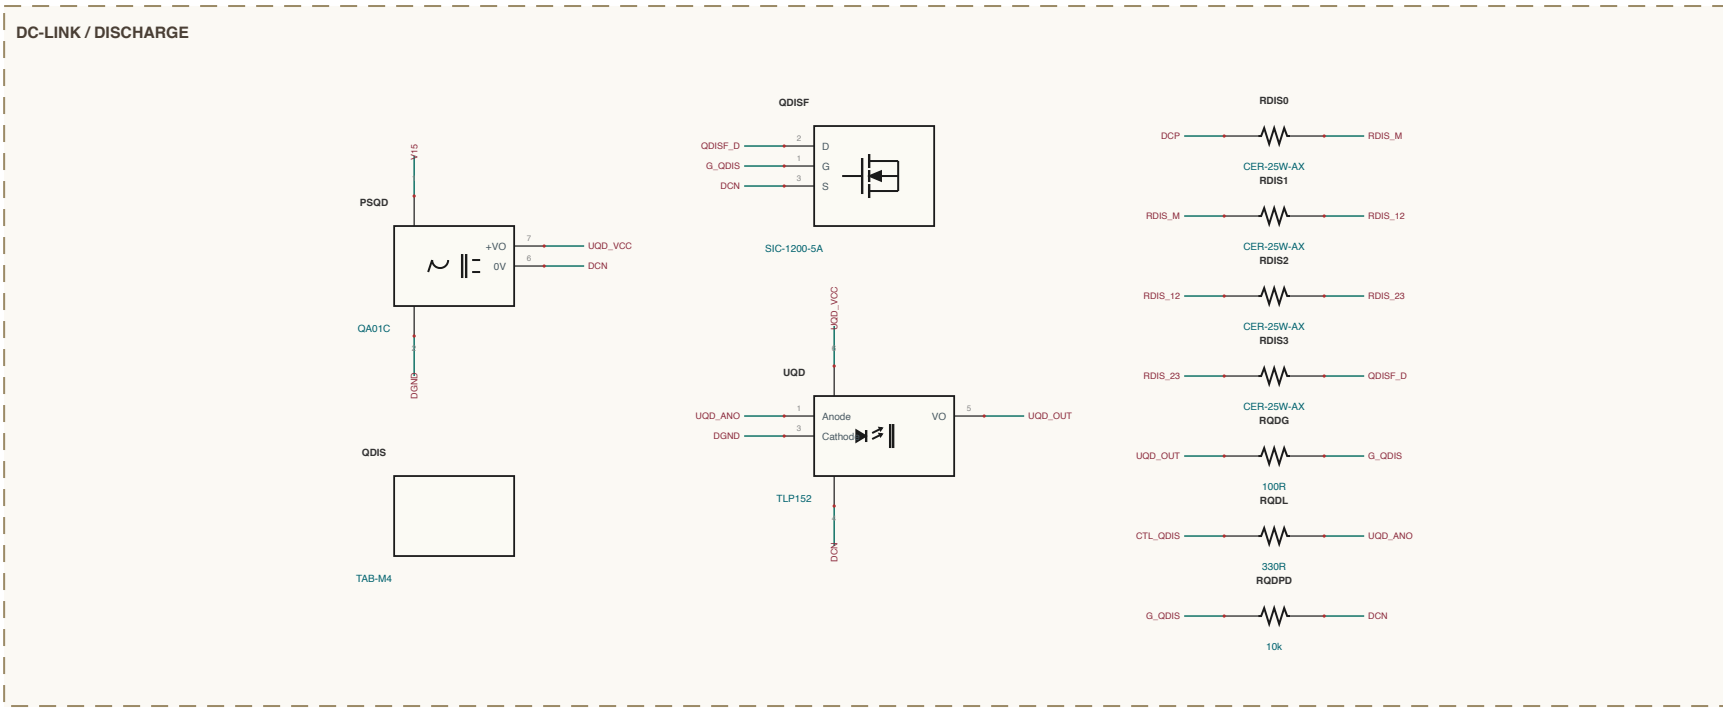
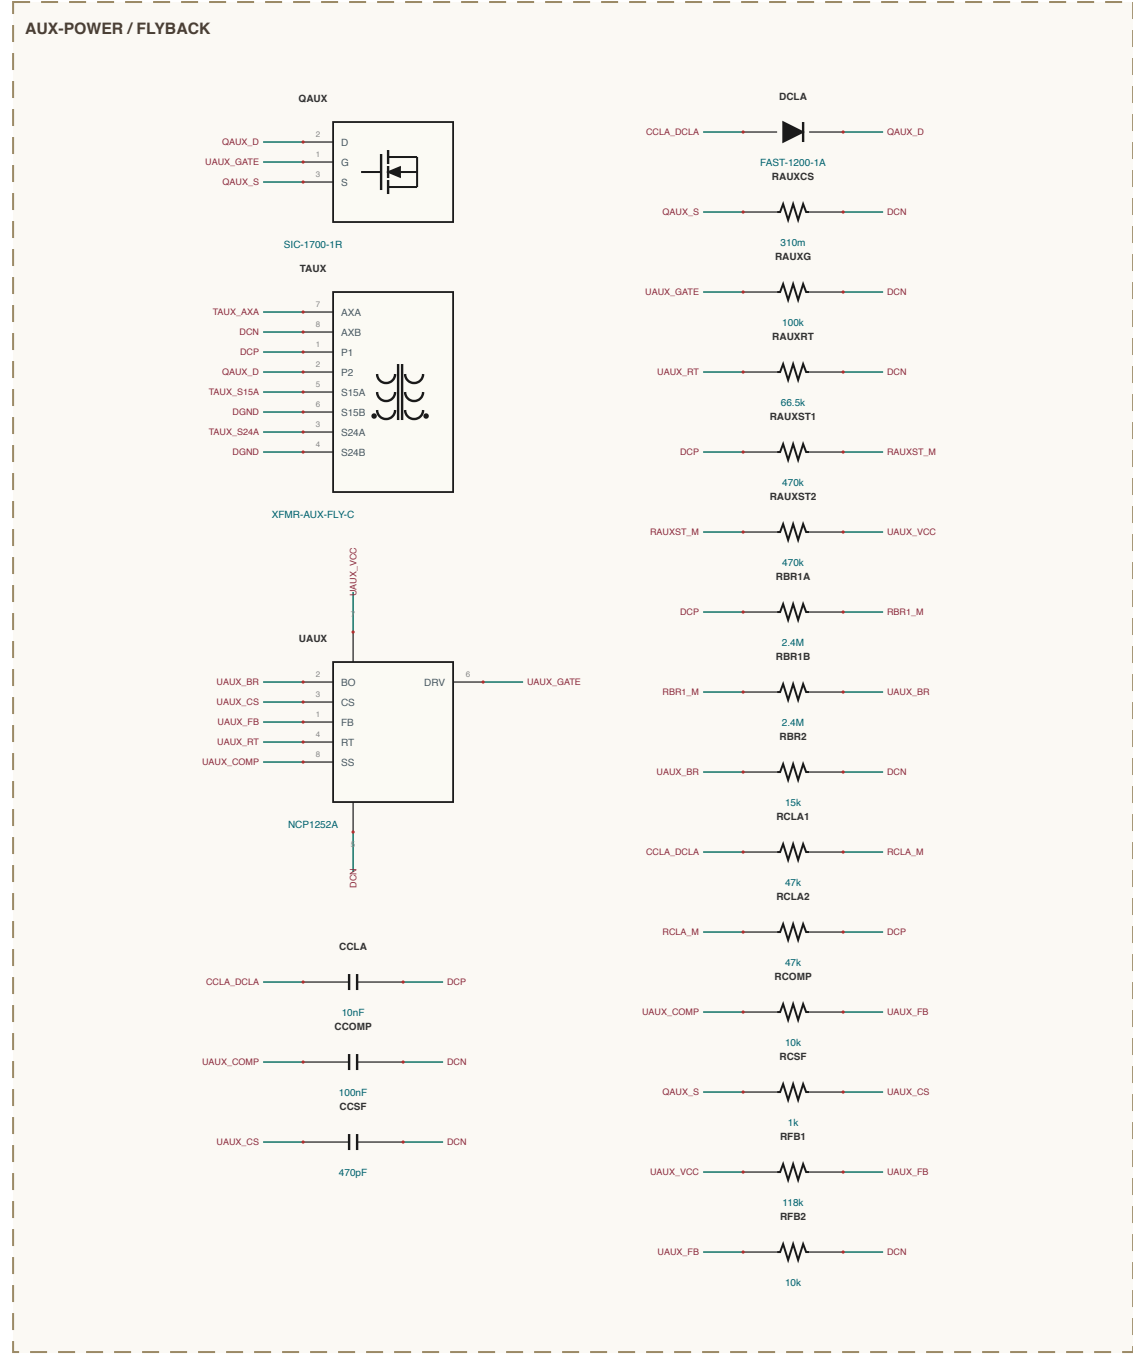
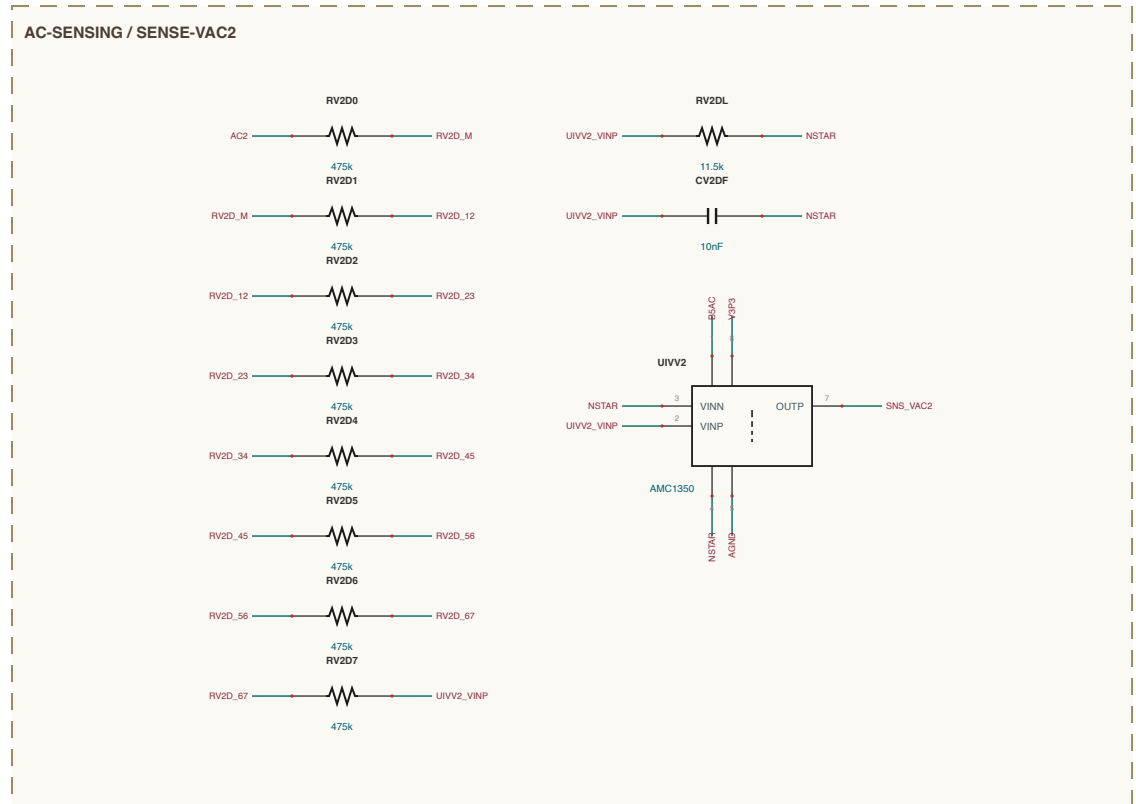
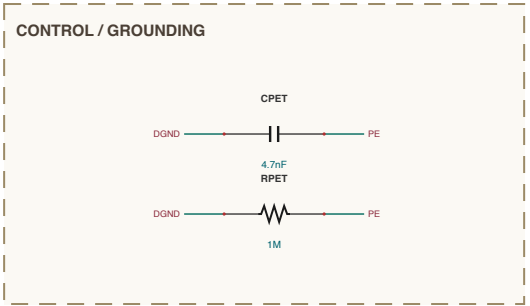
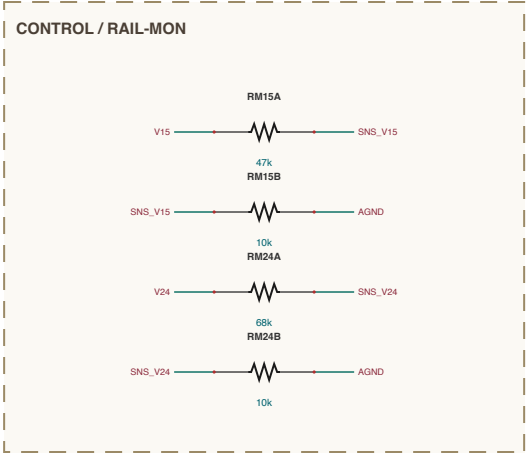
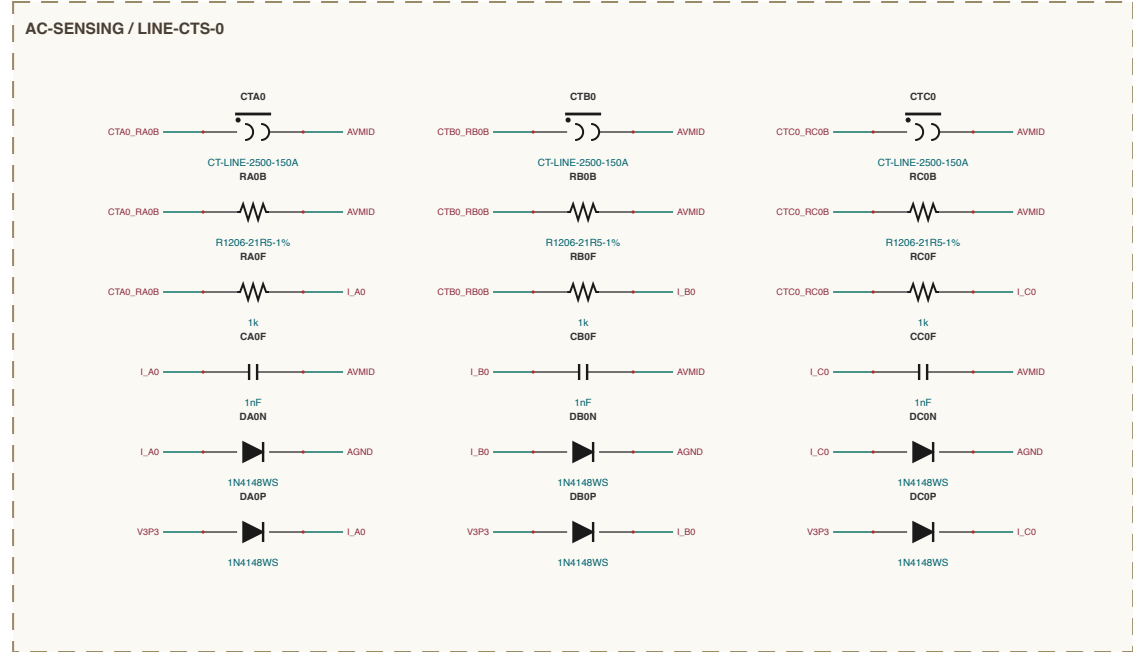
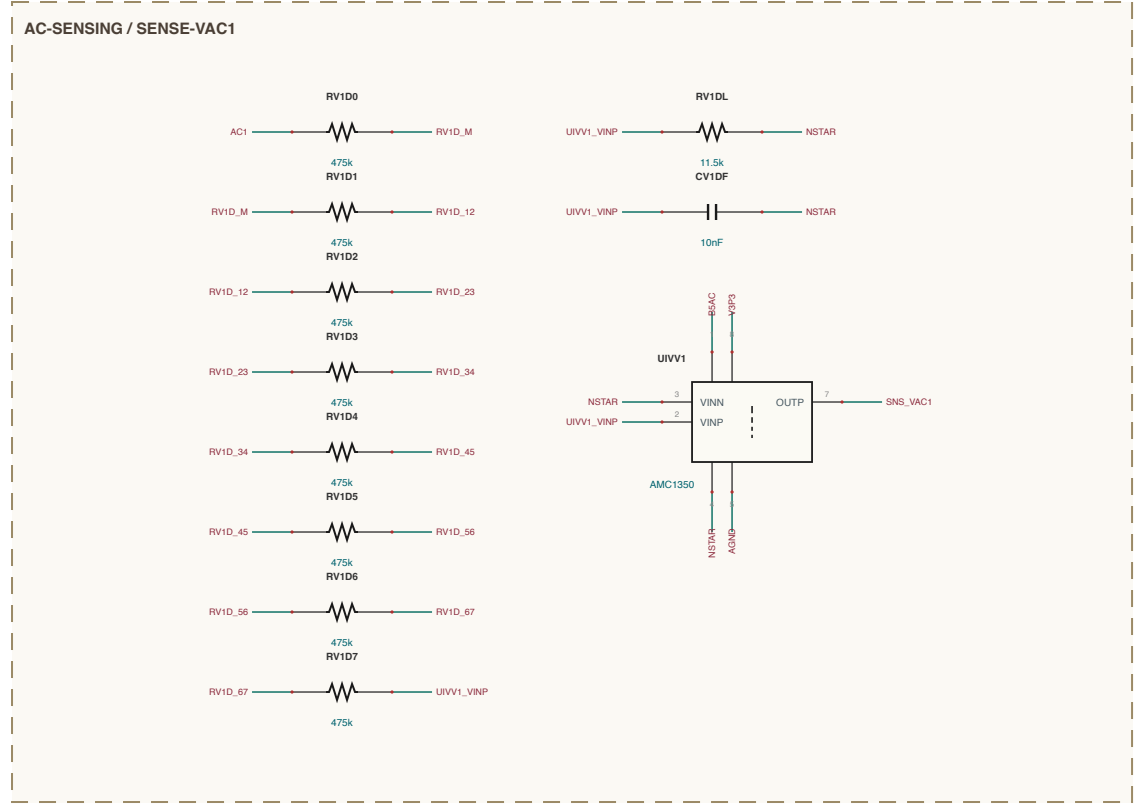
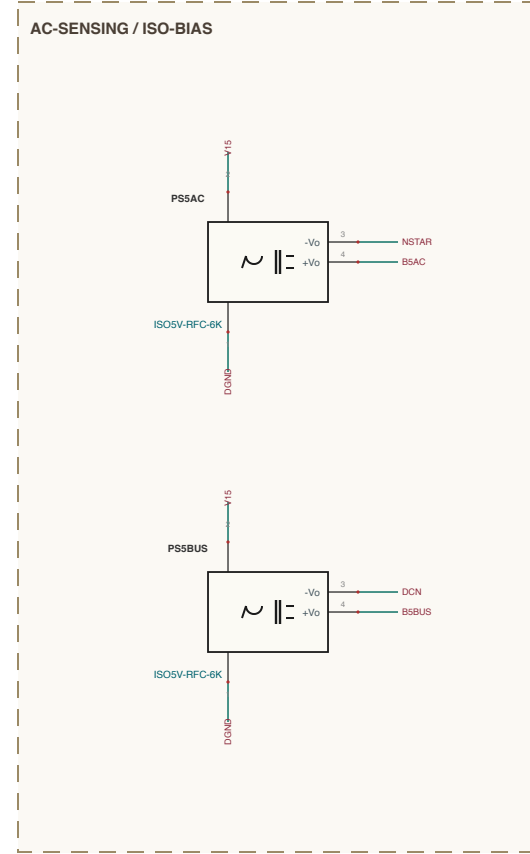
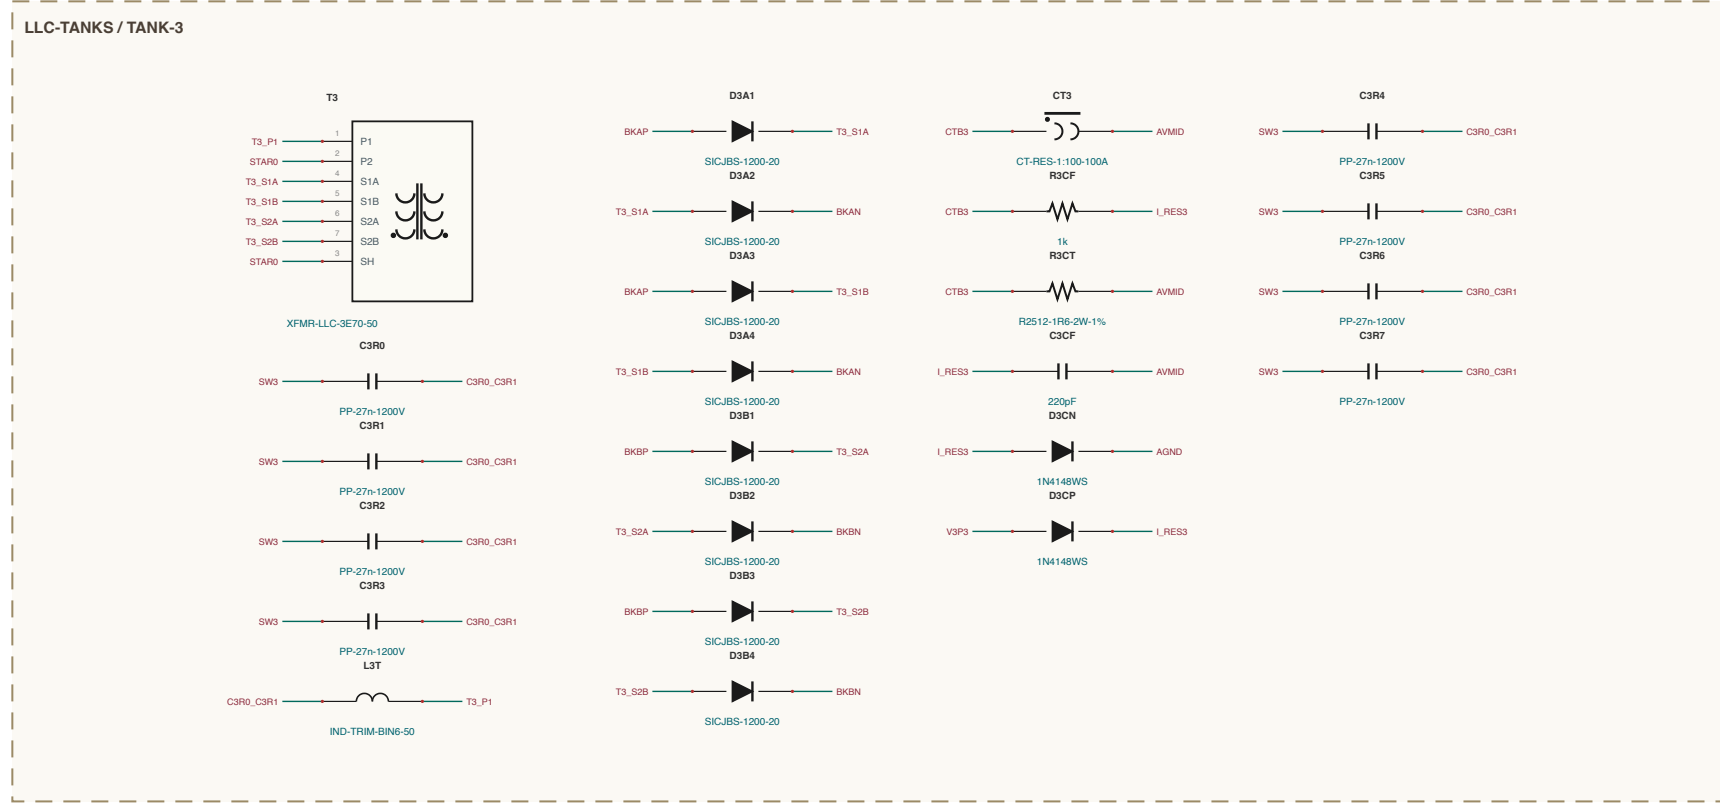
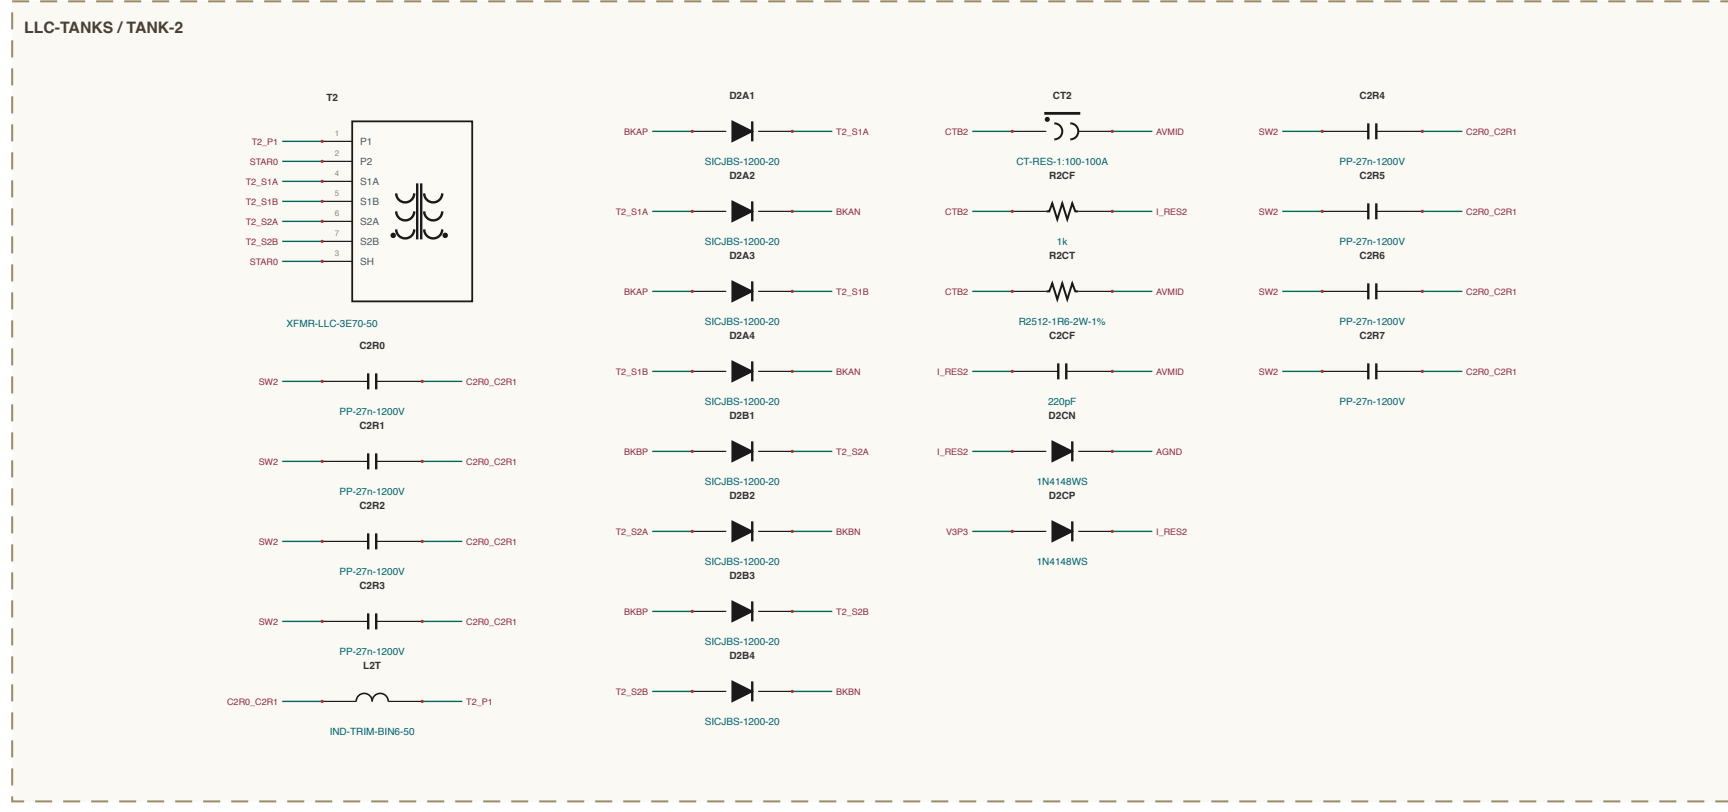
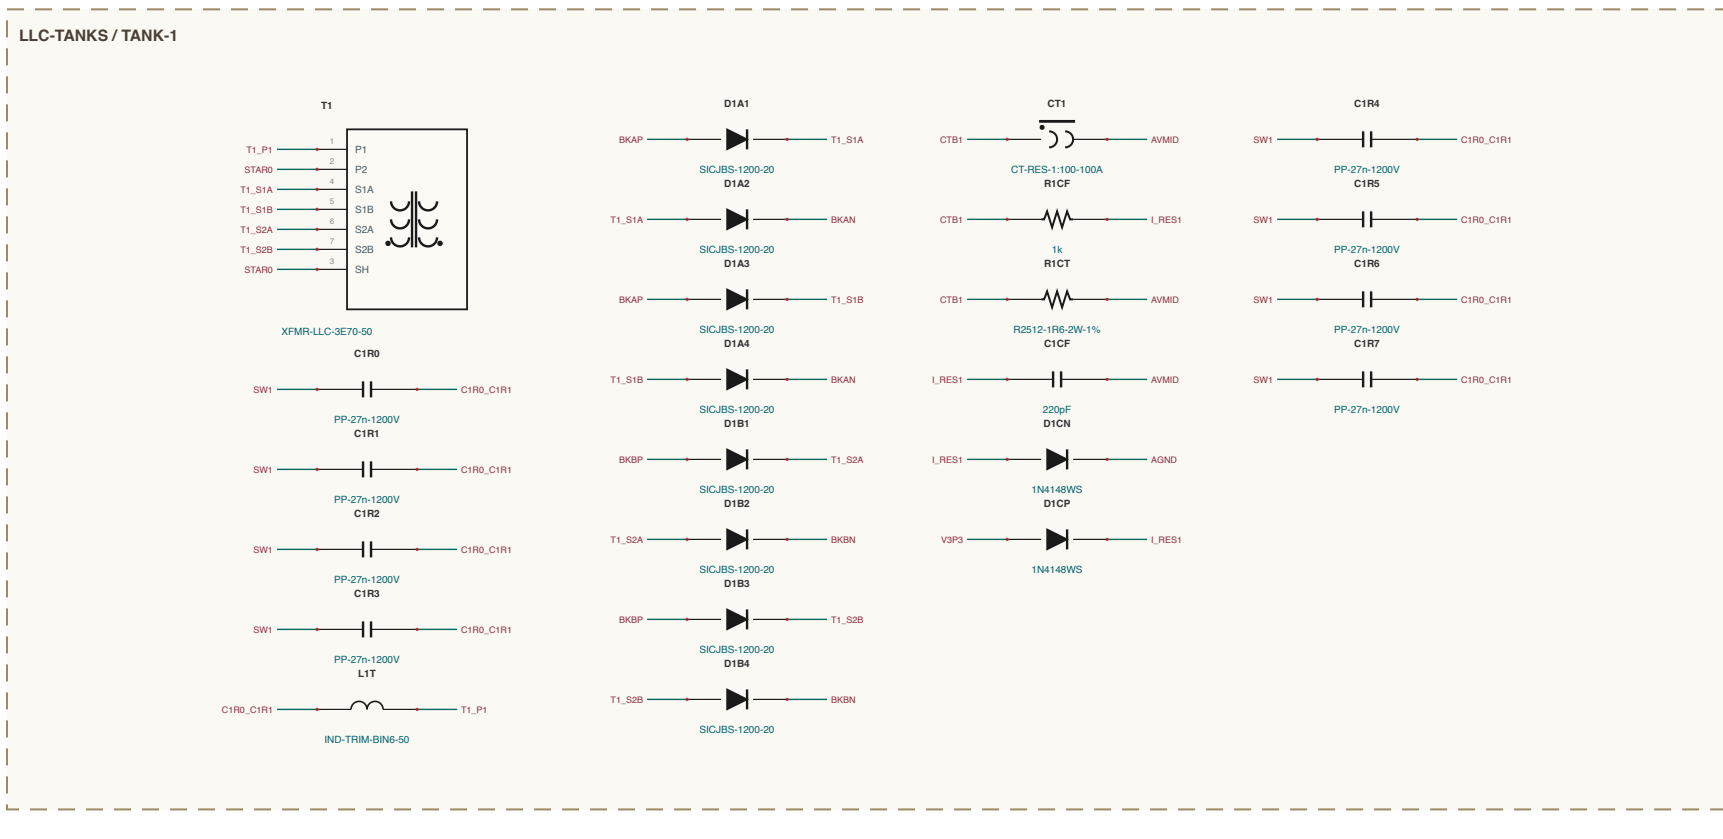
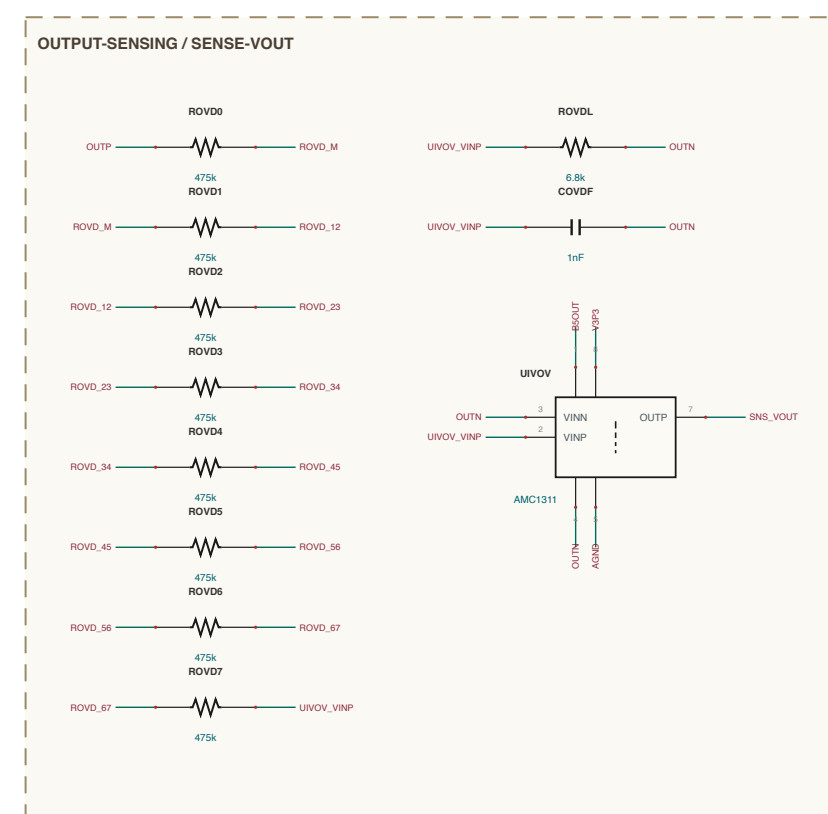
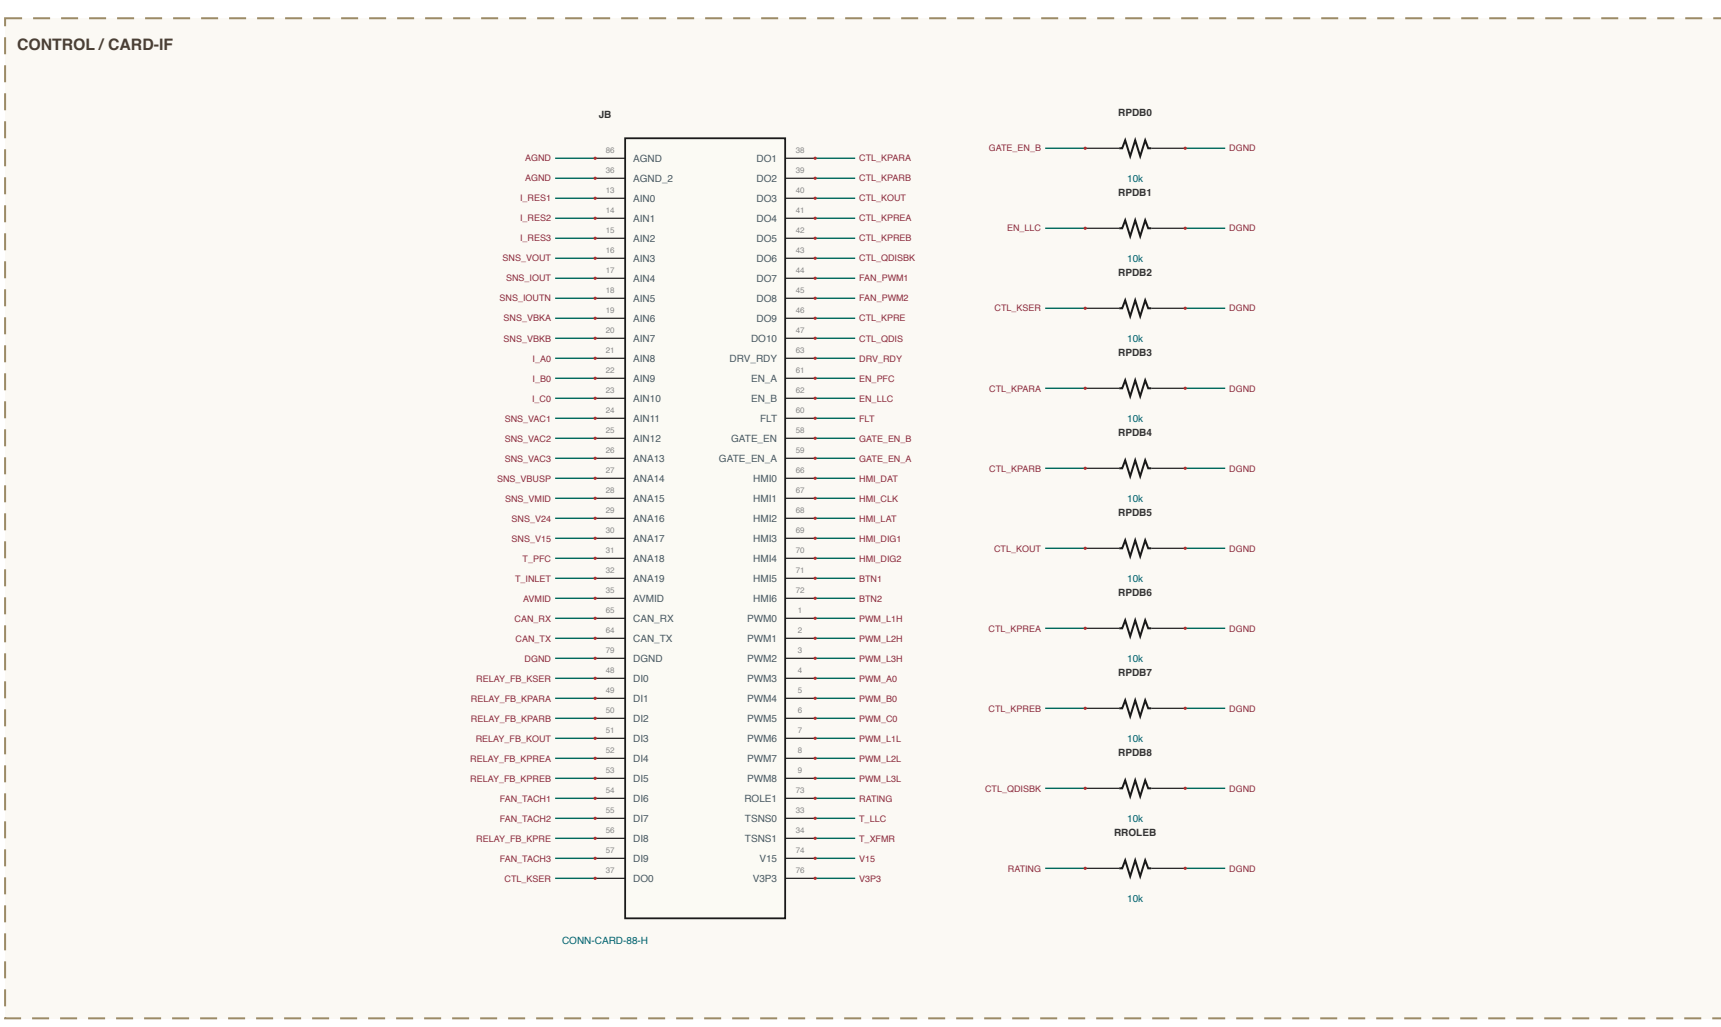
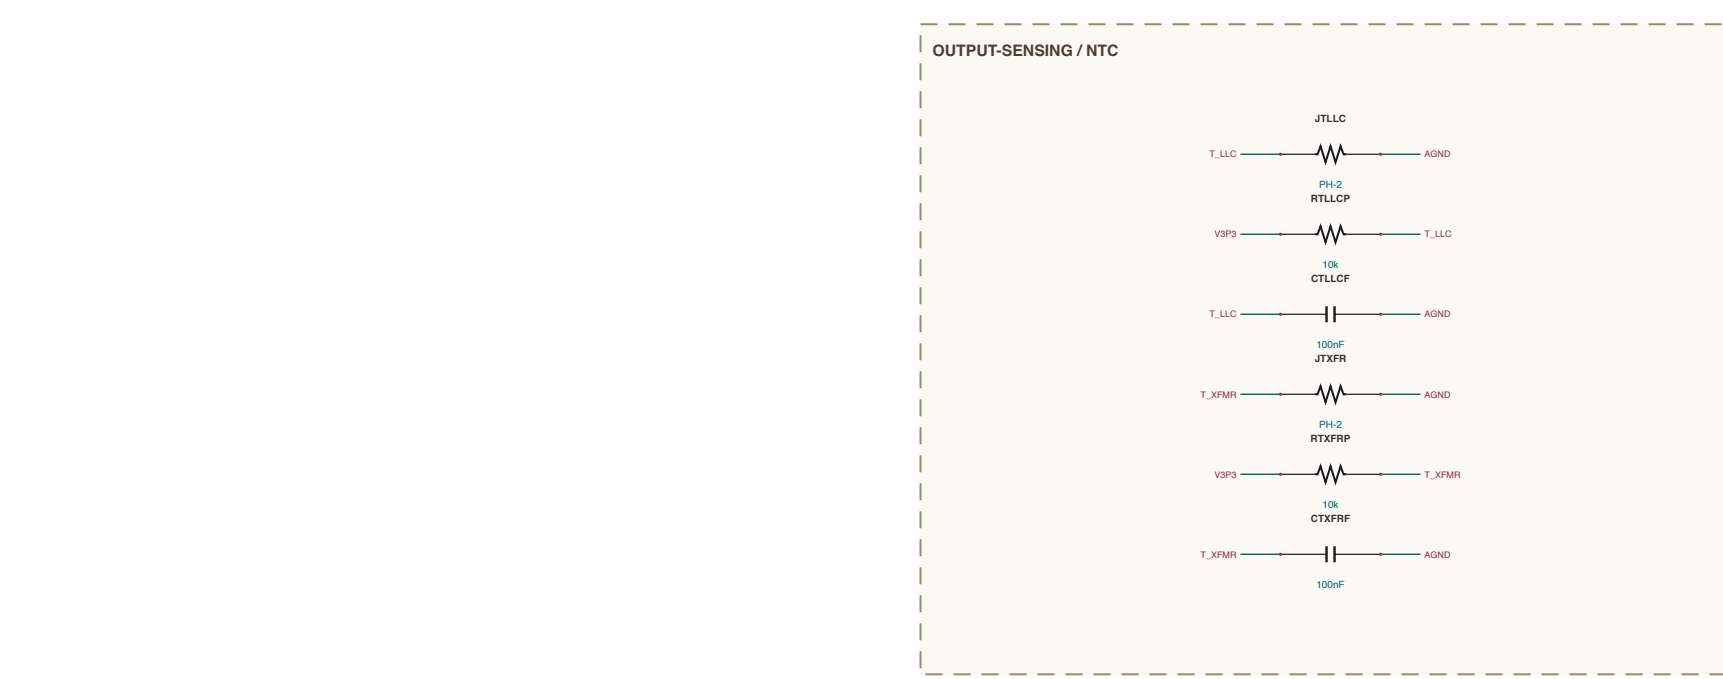
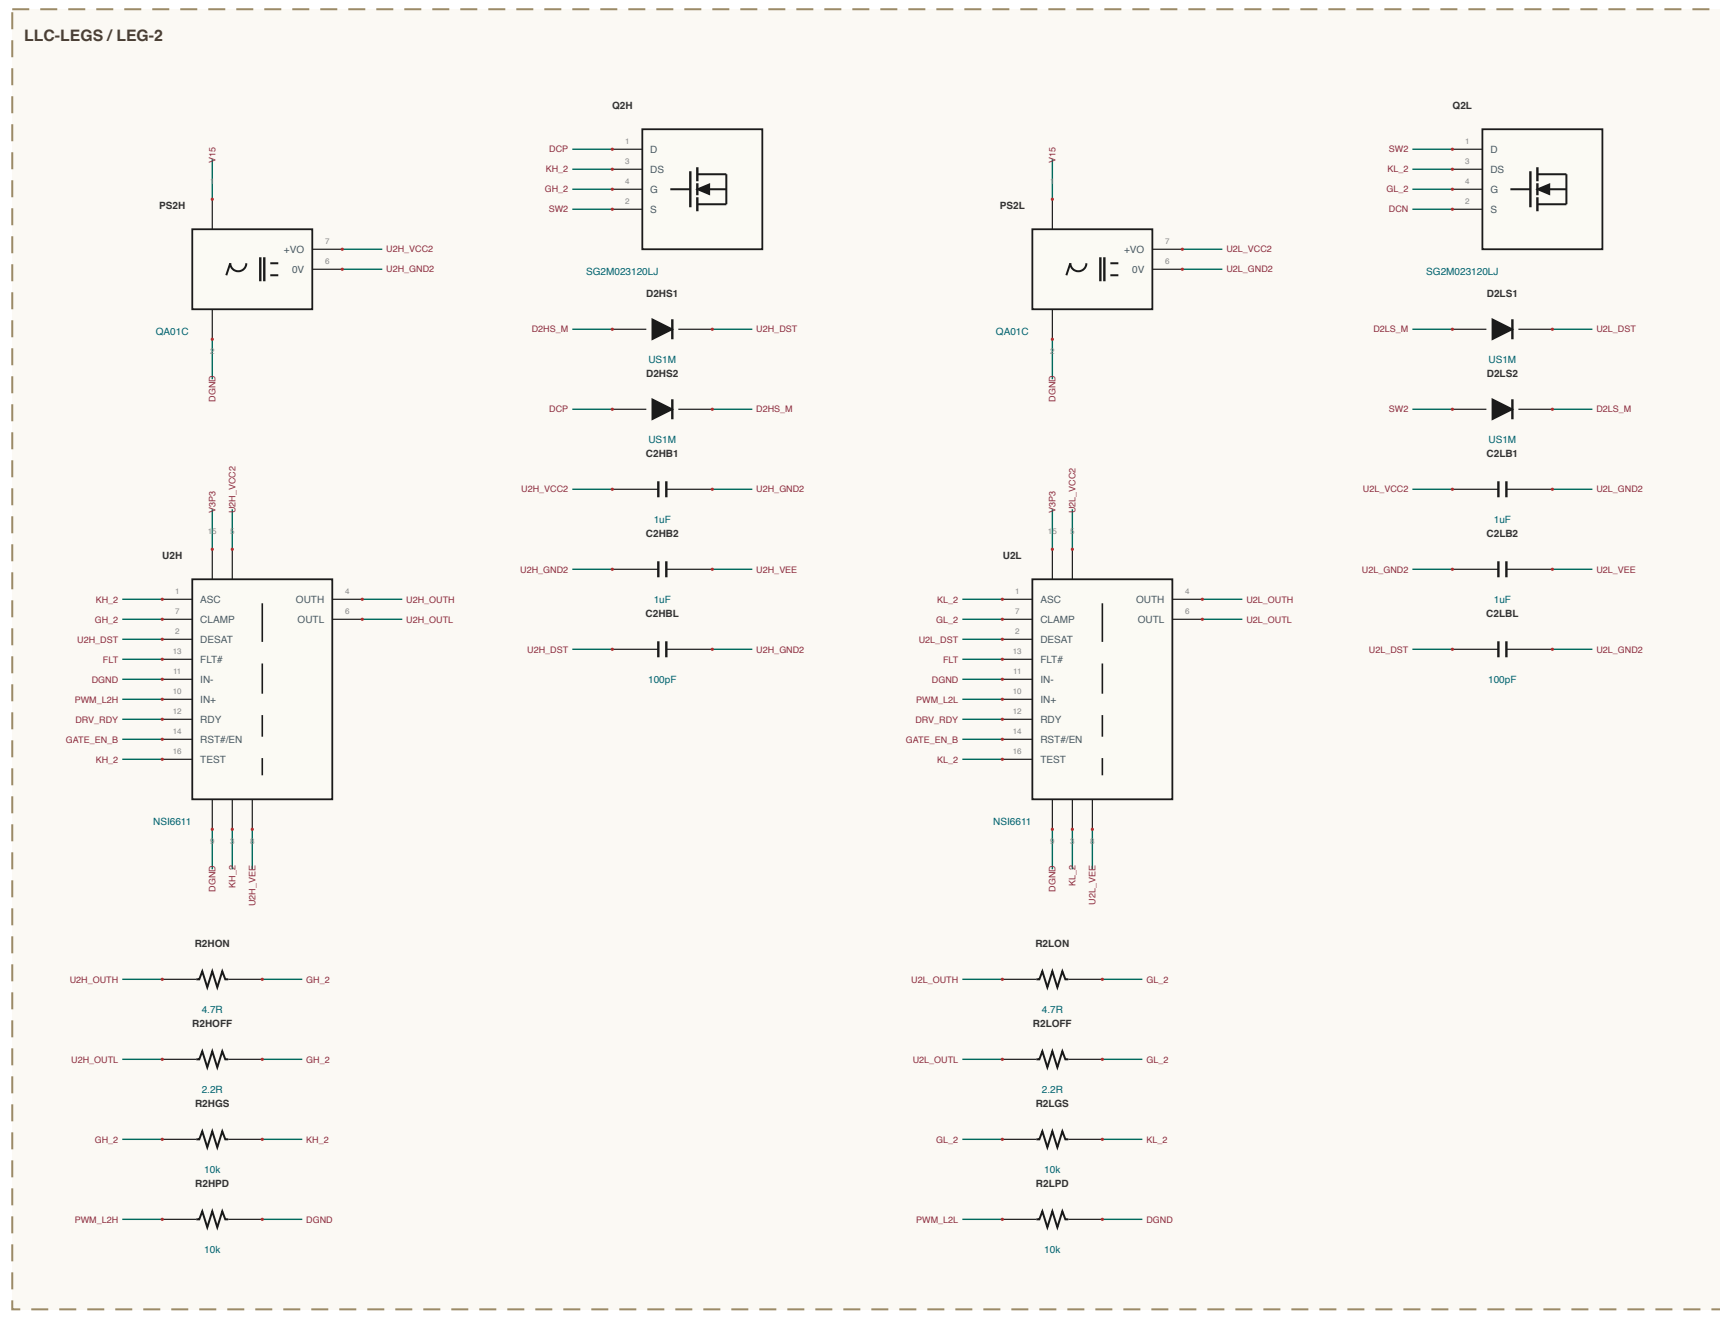
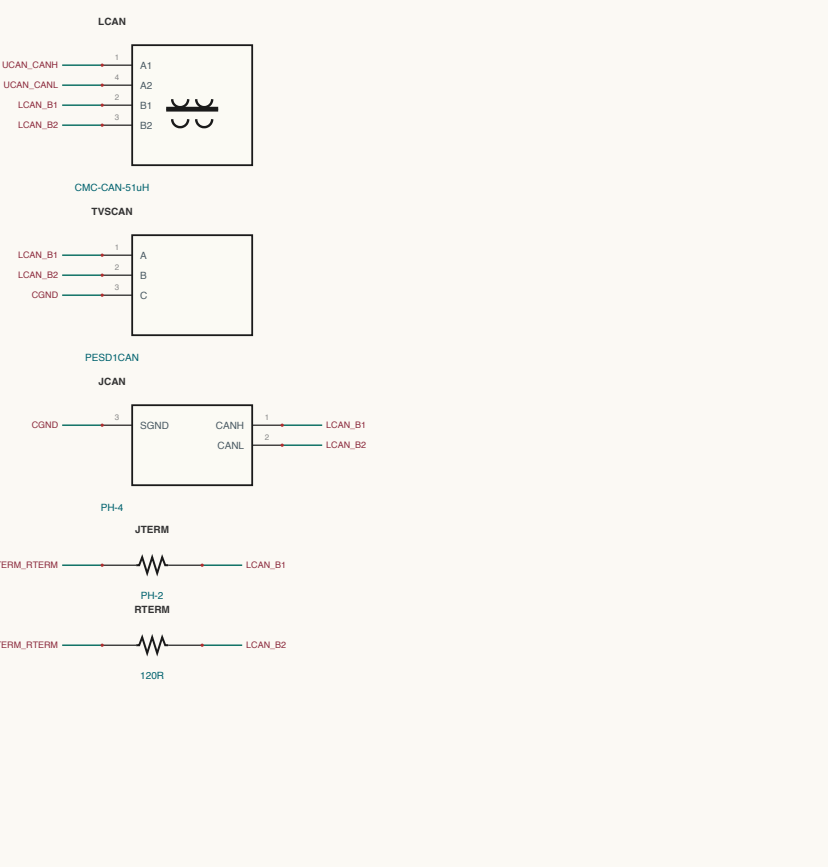
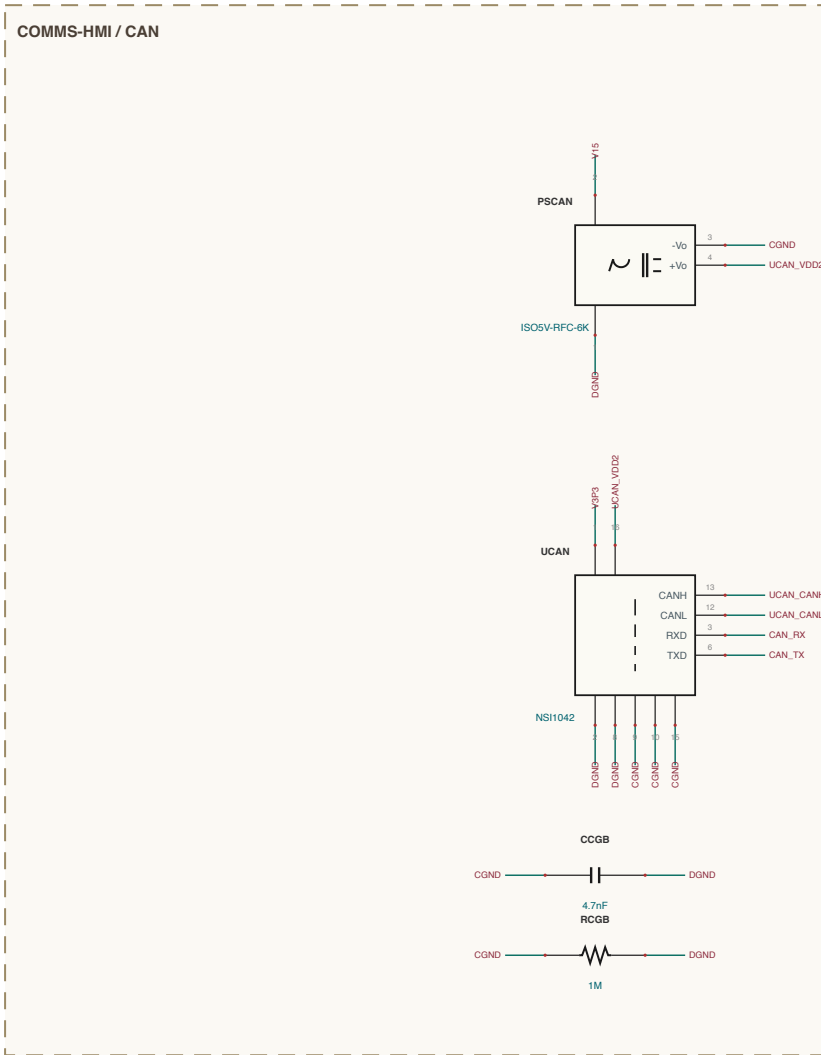
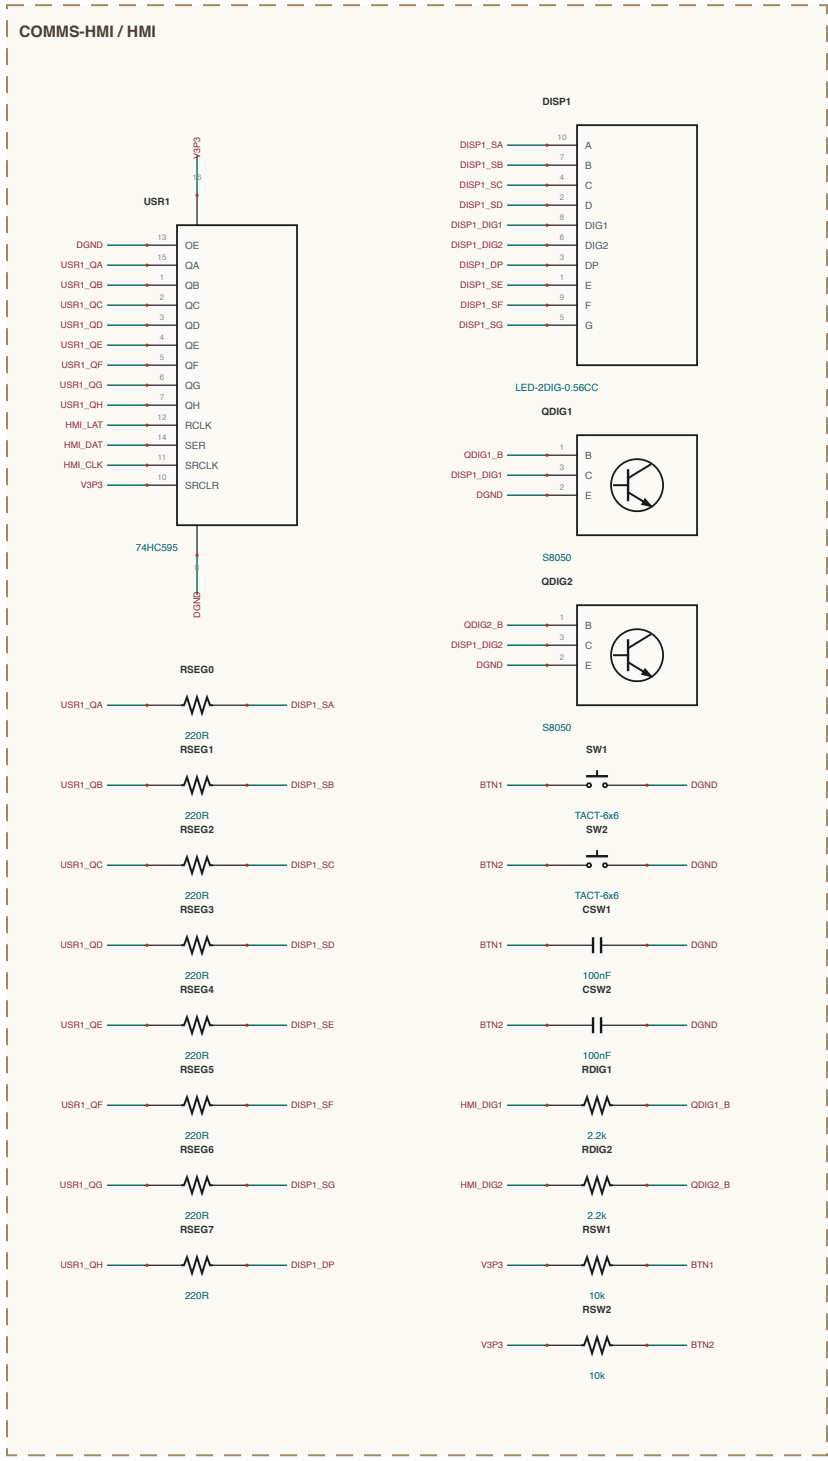
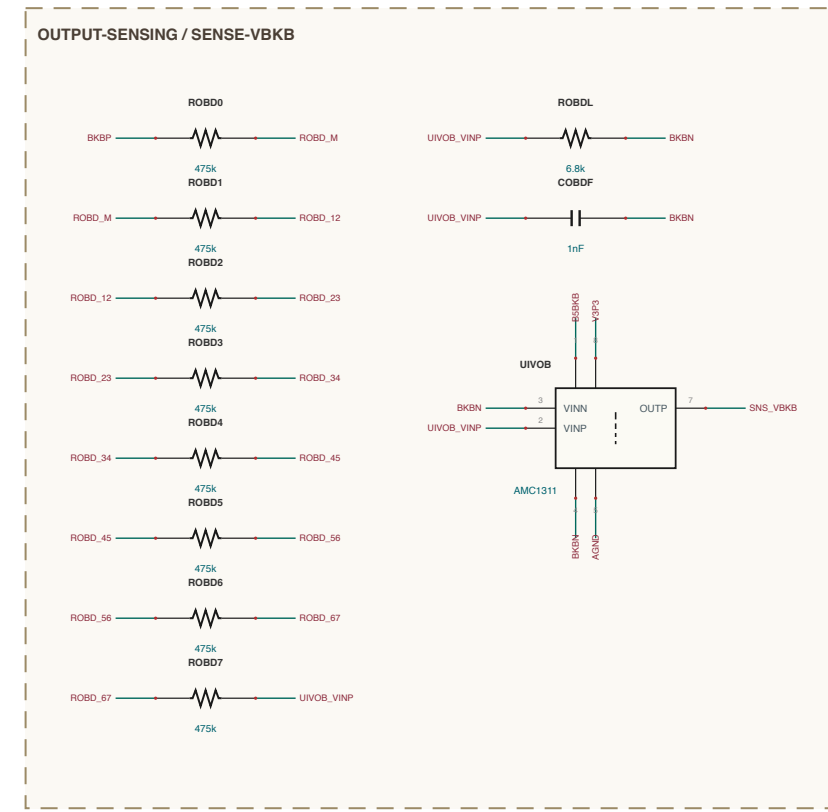
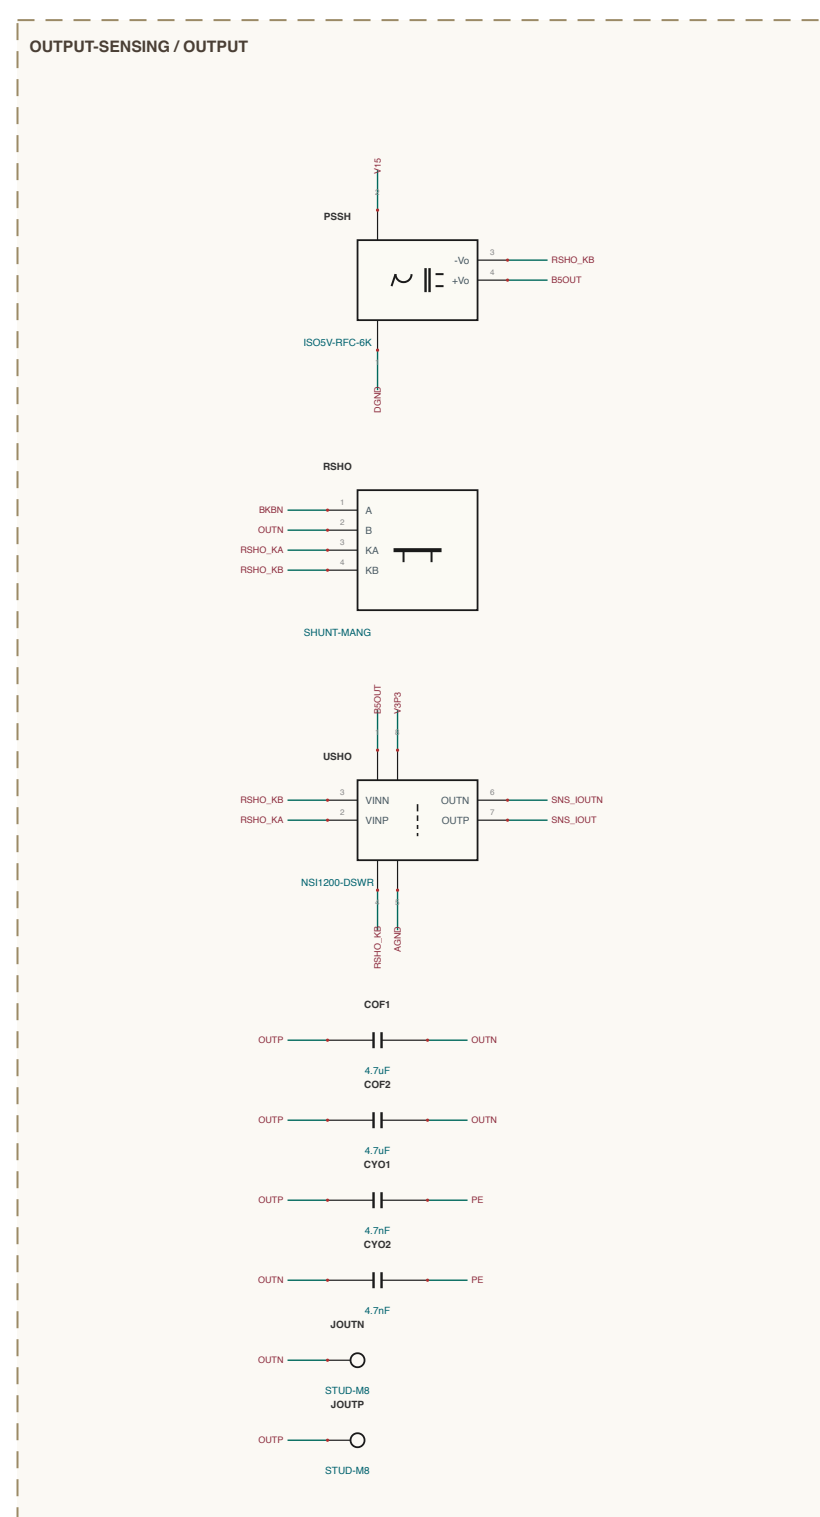
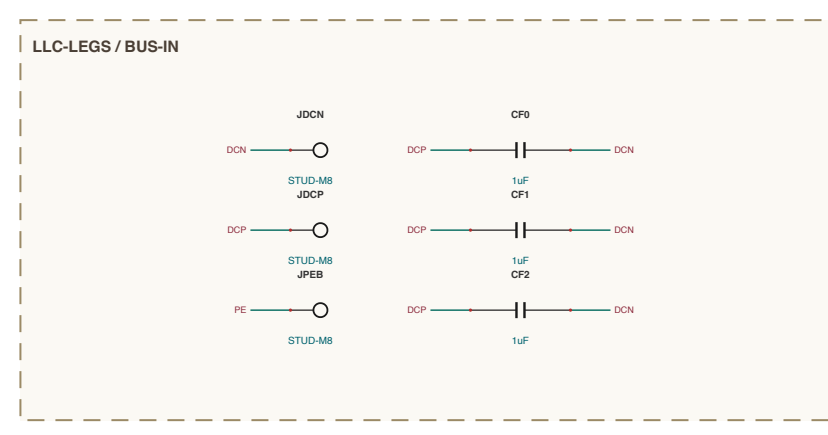
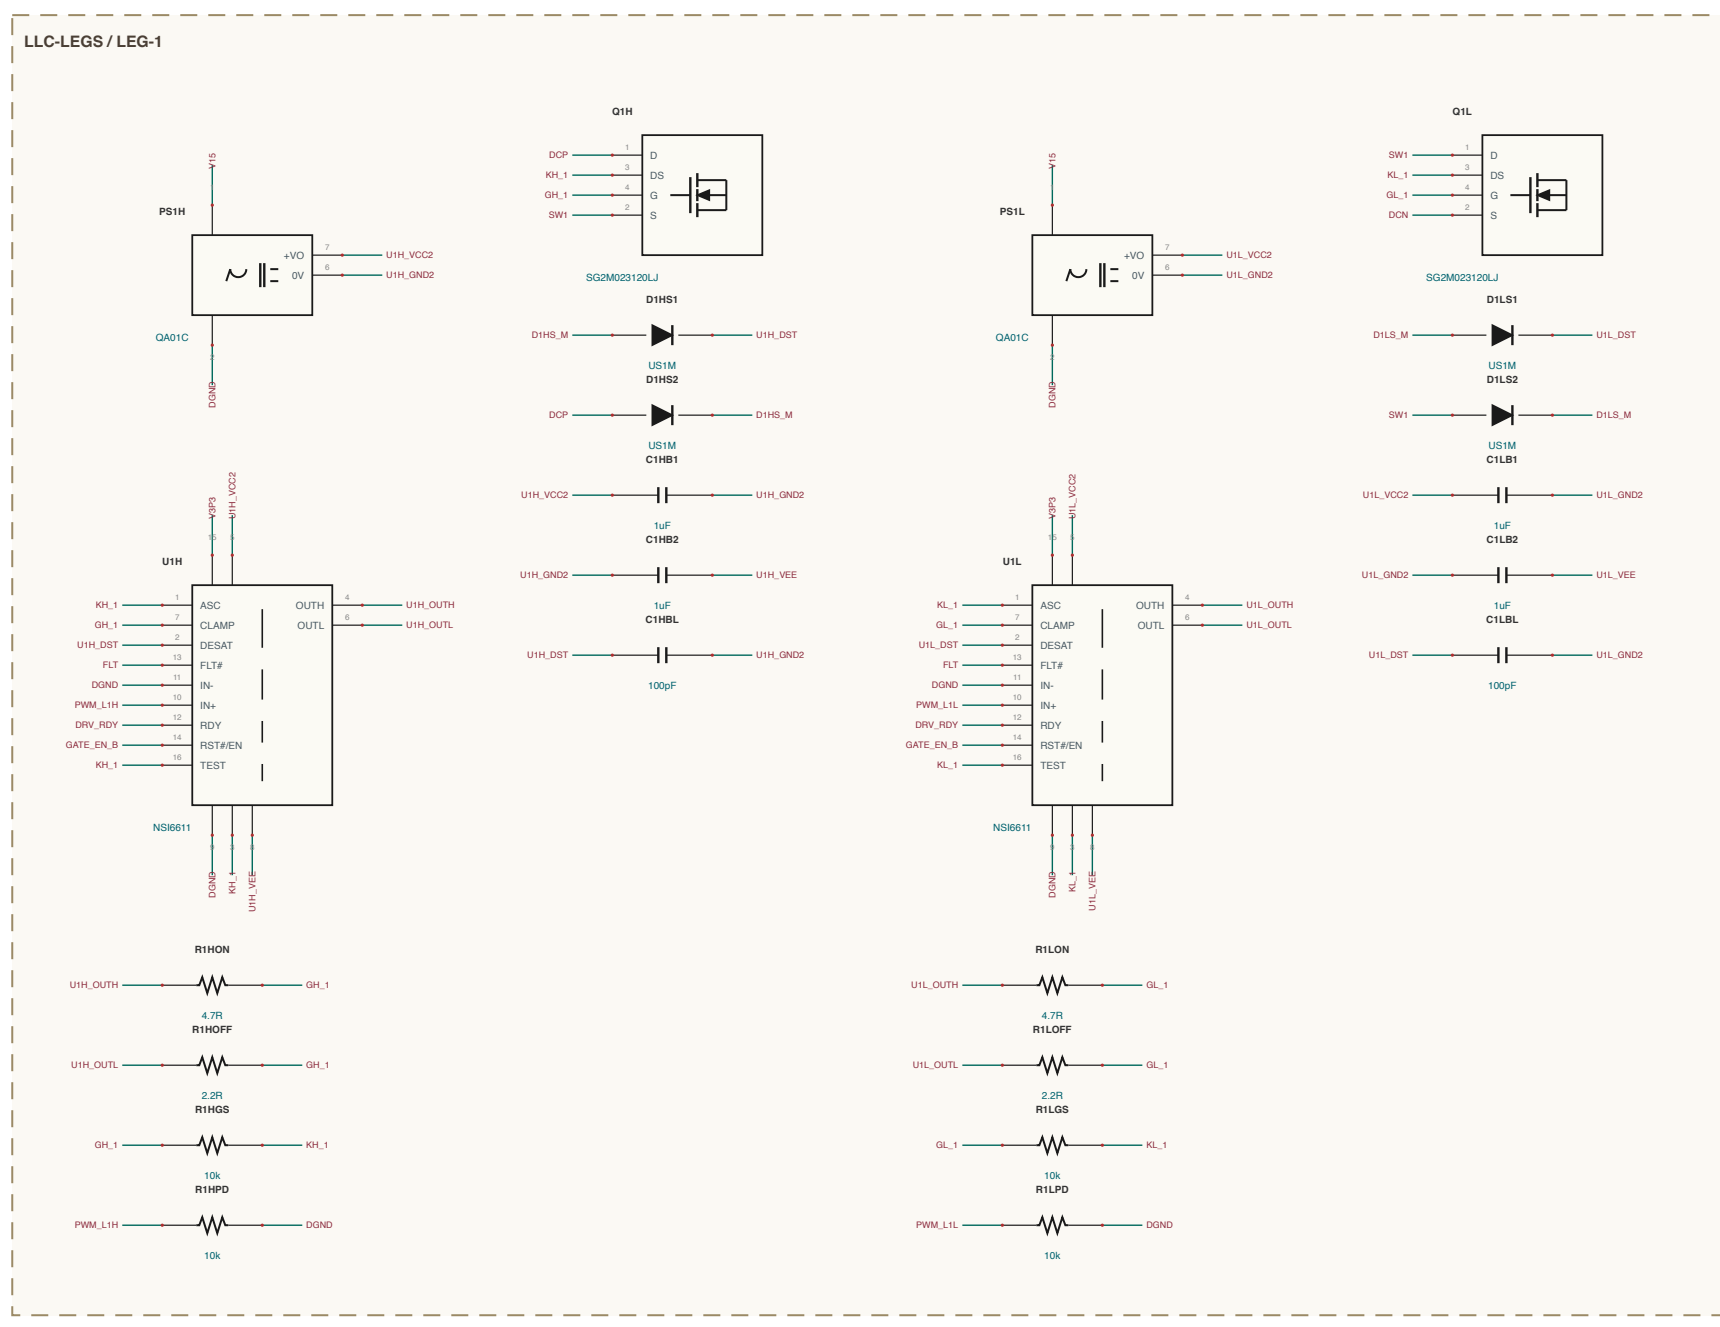
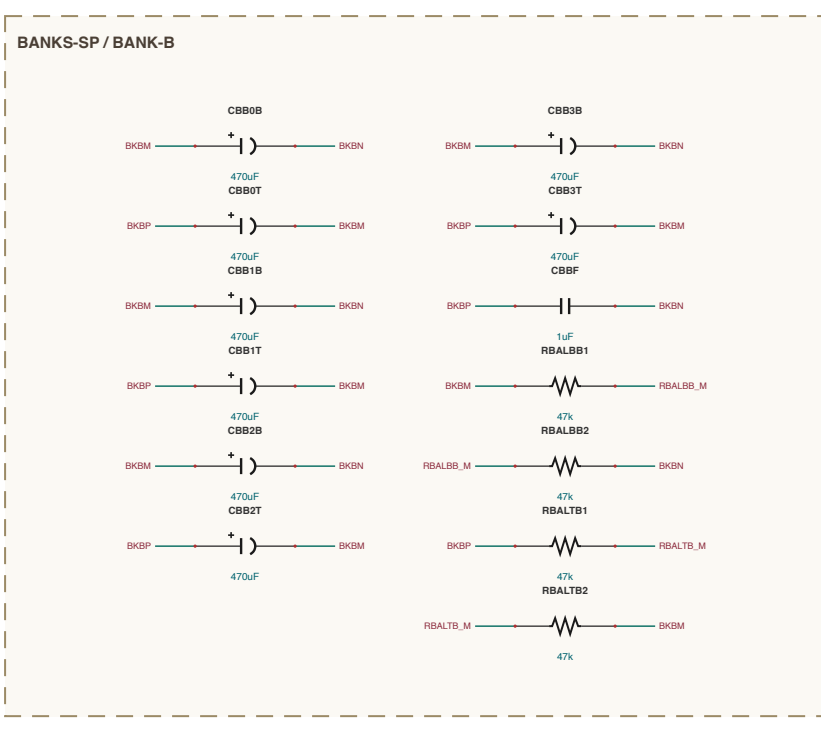
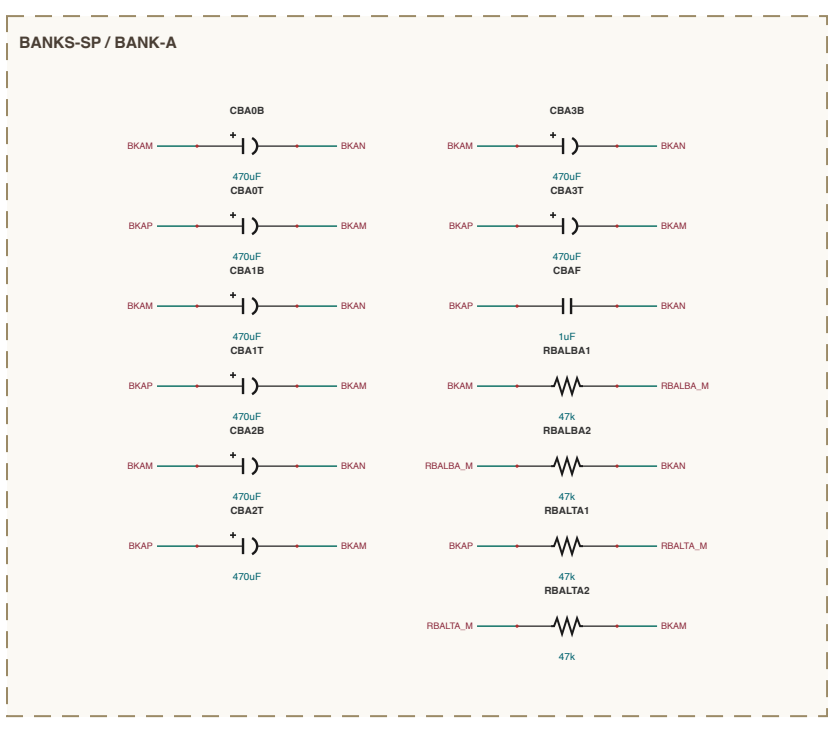
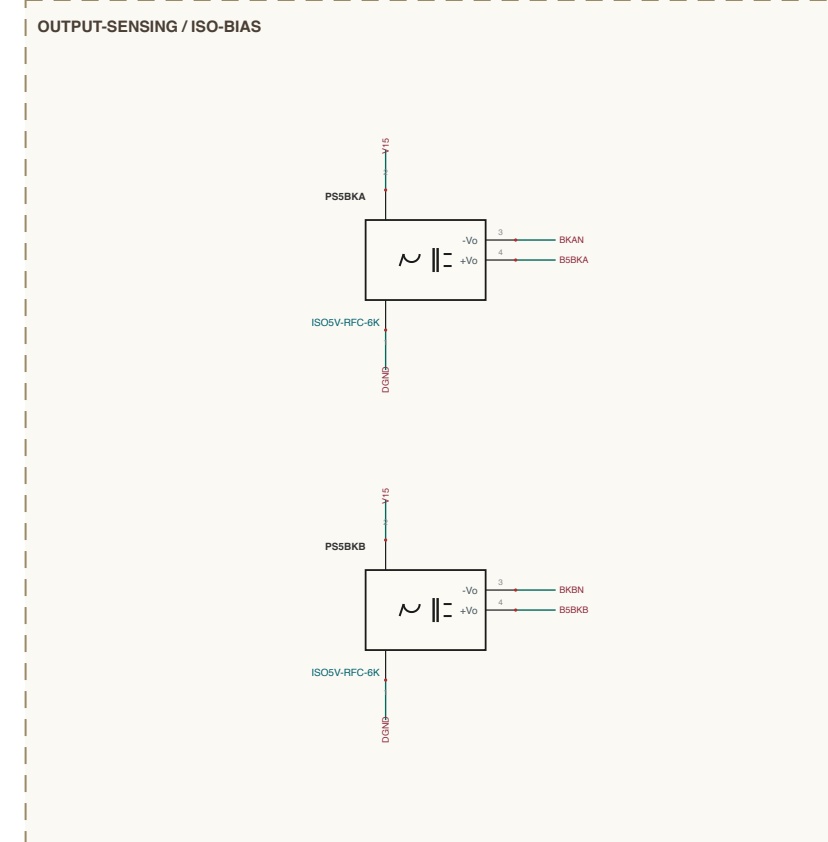
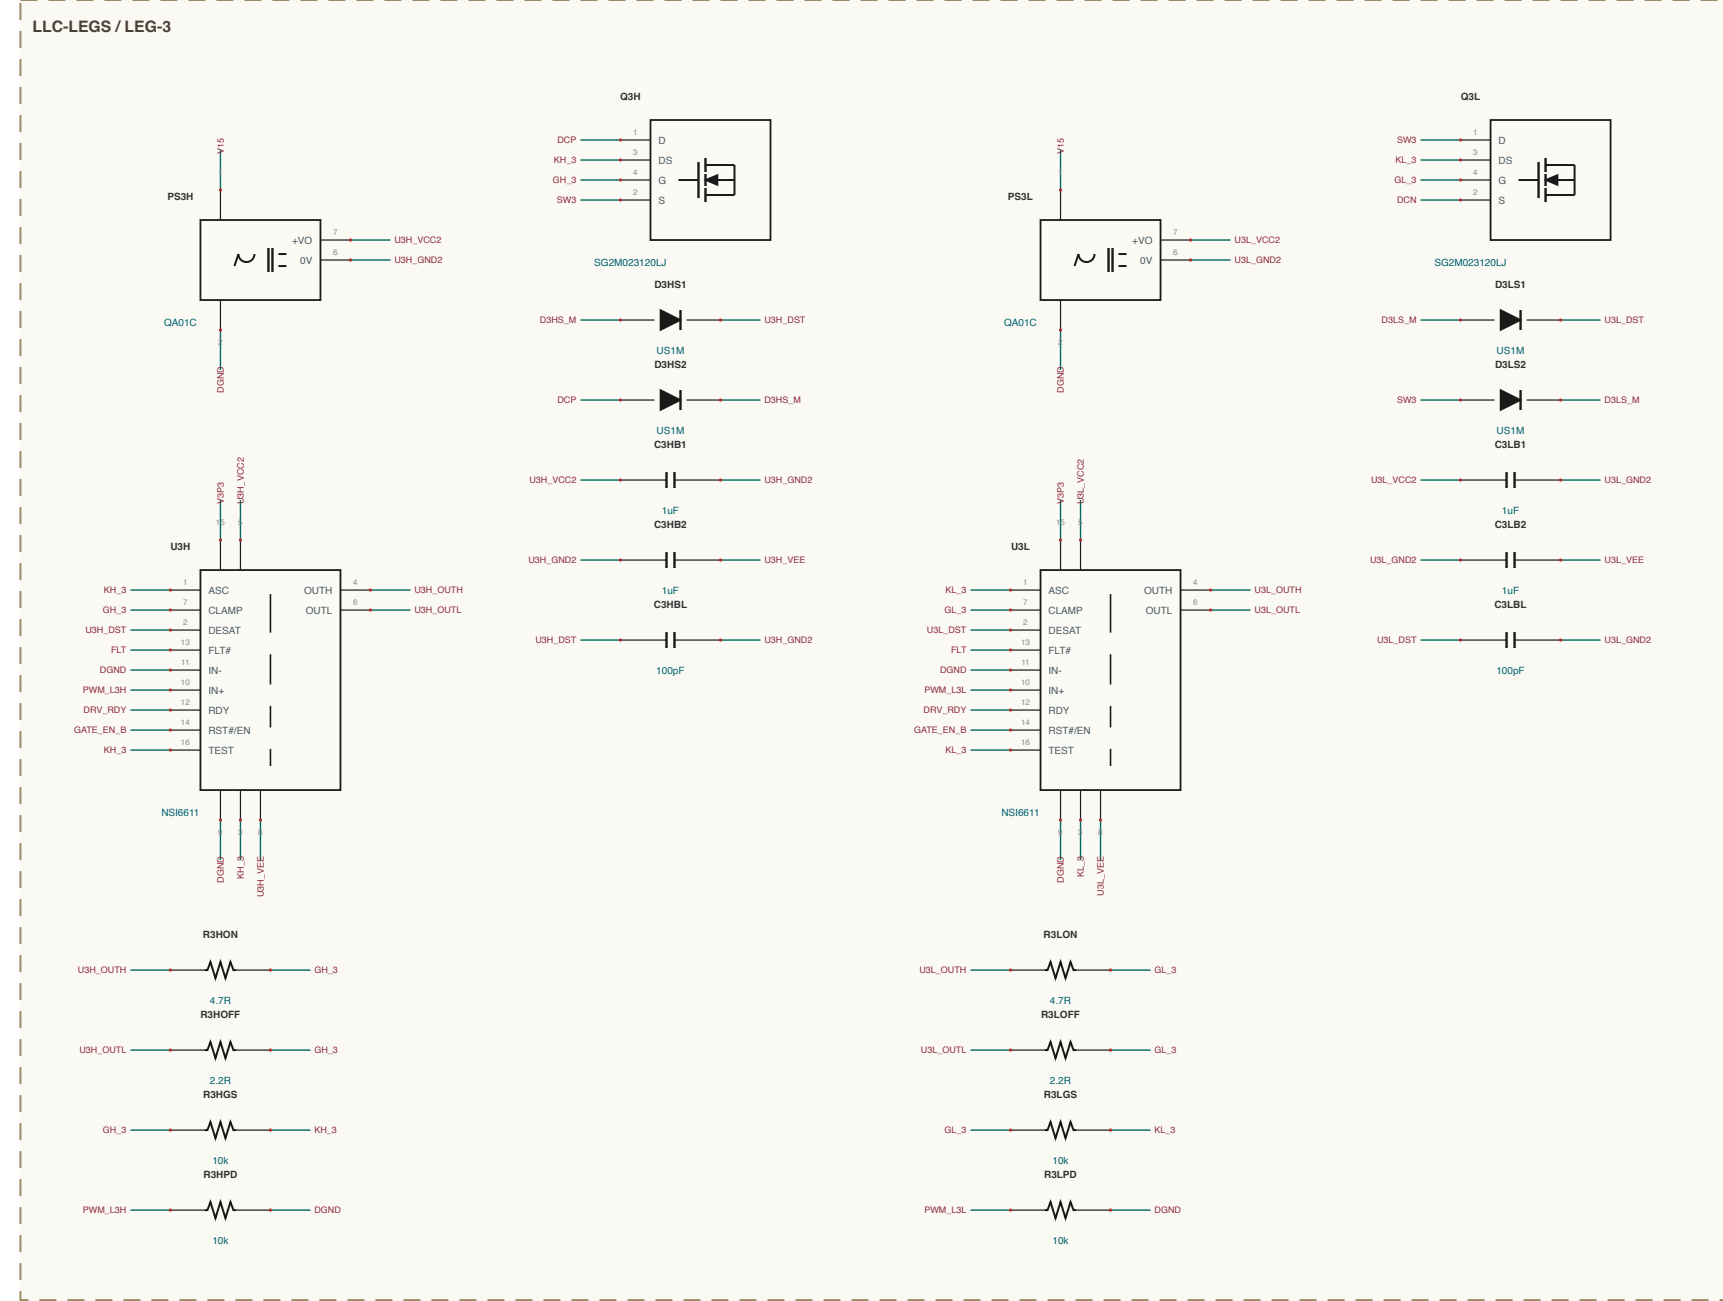
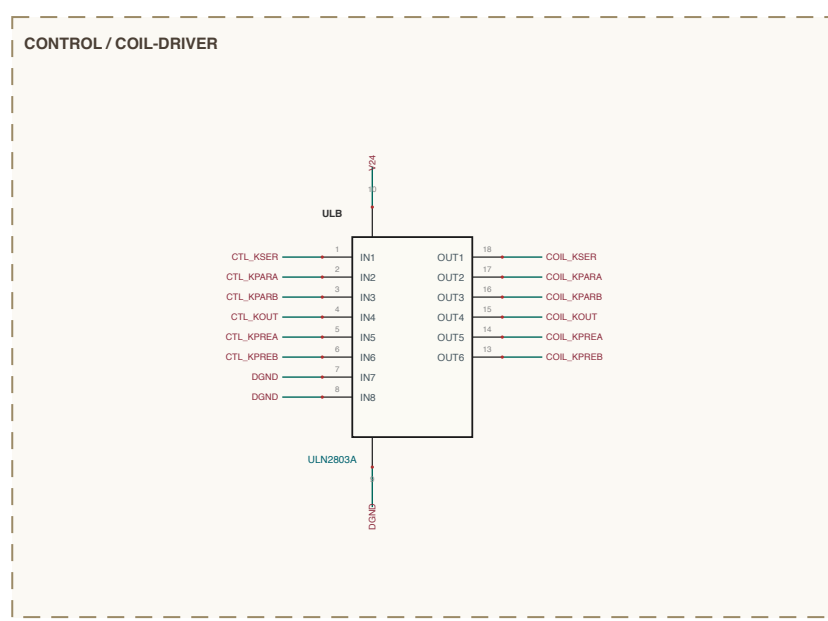
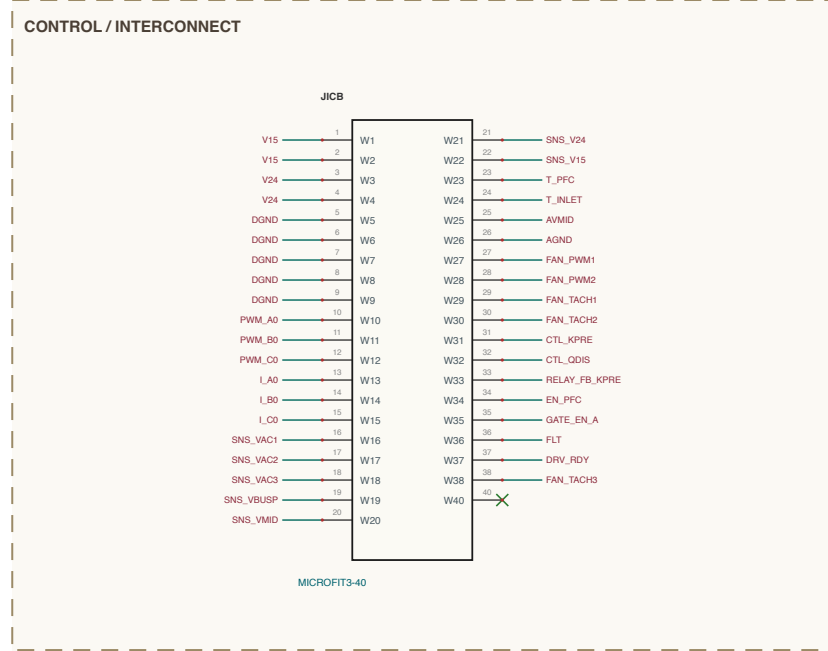


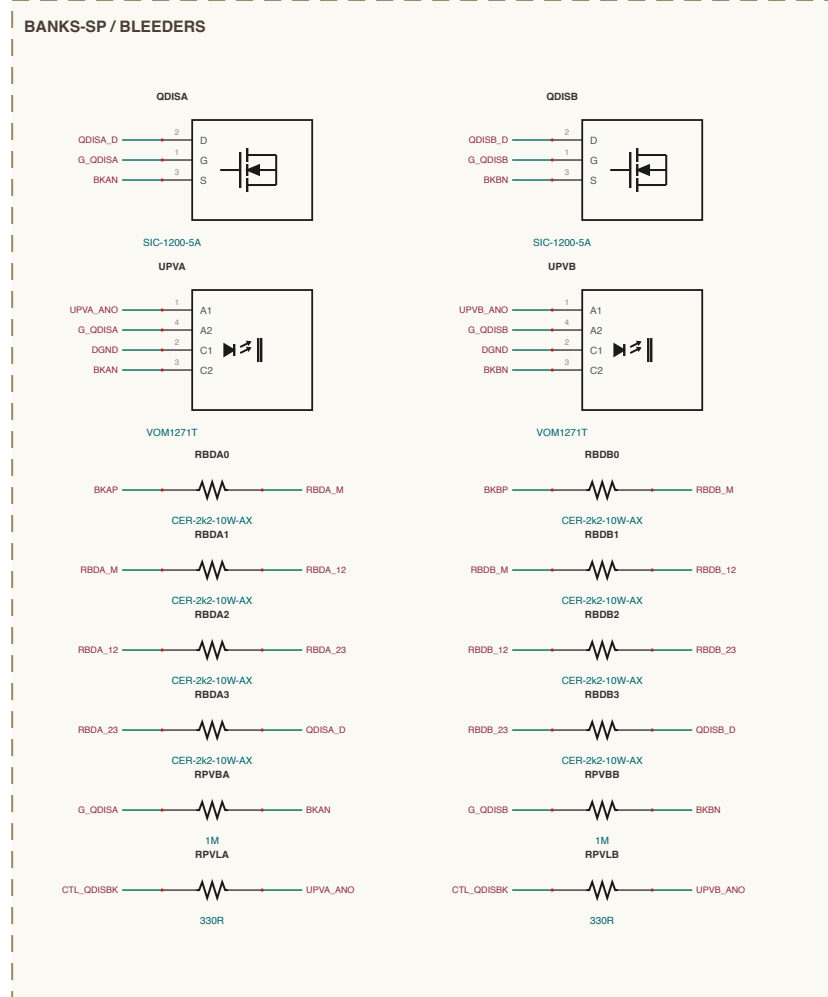

SHEET INDEX
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100

NET NAMING
Internal junctions are named for what they join
Uniquely, while made at that I join e.g. GND0A, VDDP
Externally, M is used at a series join e.g. RAIL0A, M
Resistors, when top between ResistorName e.g. R010, R1
all others are explicit design rules

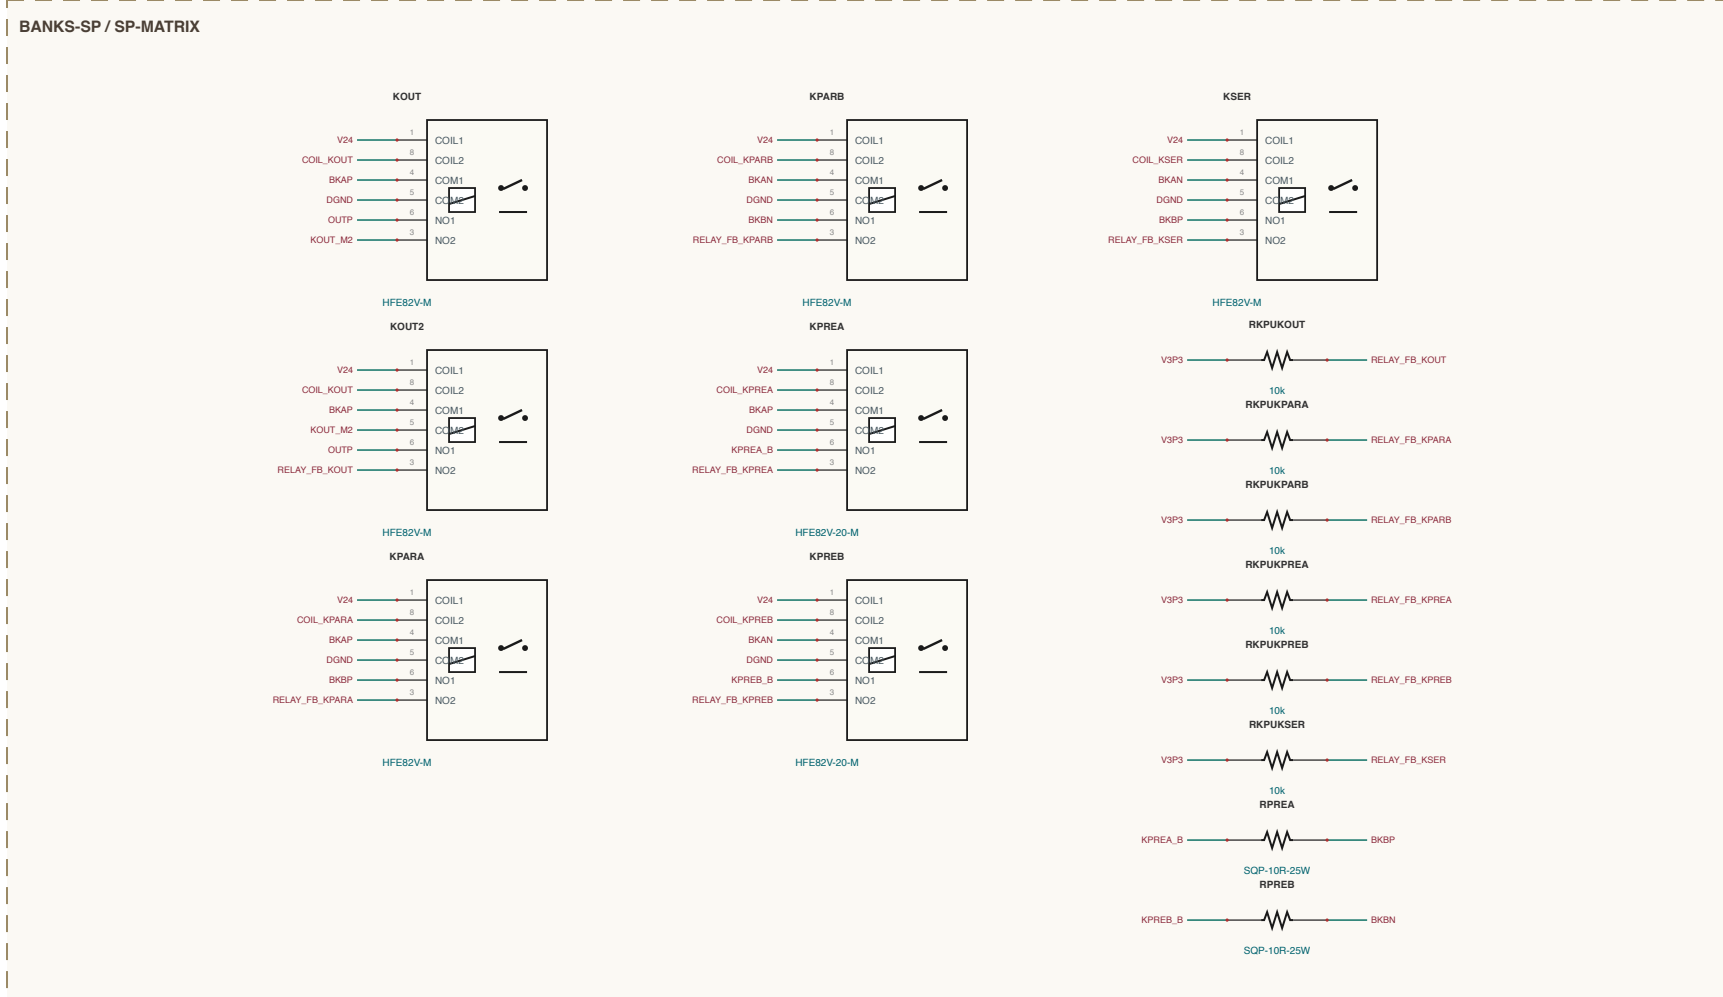

SHEET INDEX
SW 7.1-7.2
OUTPUT-SENSING - 6 sections
BANKS-SP - 4 sections
LLC-LEG8 - 4 sections
CONTROL - 3 sections
LLC-TANKS - 3 sections
COMMS-HMI - 2 sections
net G3 - 22 sections - 399 components
NET NAMING
Internal junctions are named for what they join
Usesh_0pin node at that IC pin e.g. UPIN0A_0pin
Resistor_M midpoint of a series pair e.g. R0A01A_M
Resistor_wwwn tip between Resistorwww e.g. R0101_01
All others are explicit design nets

