
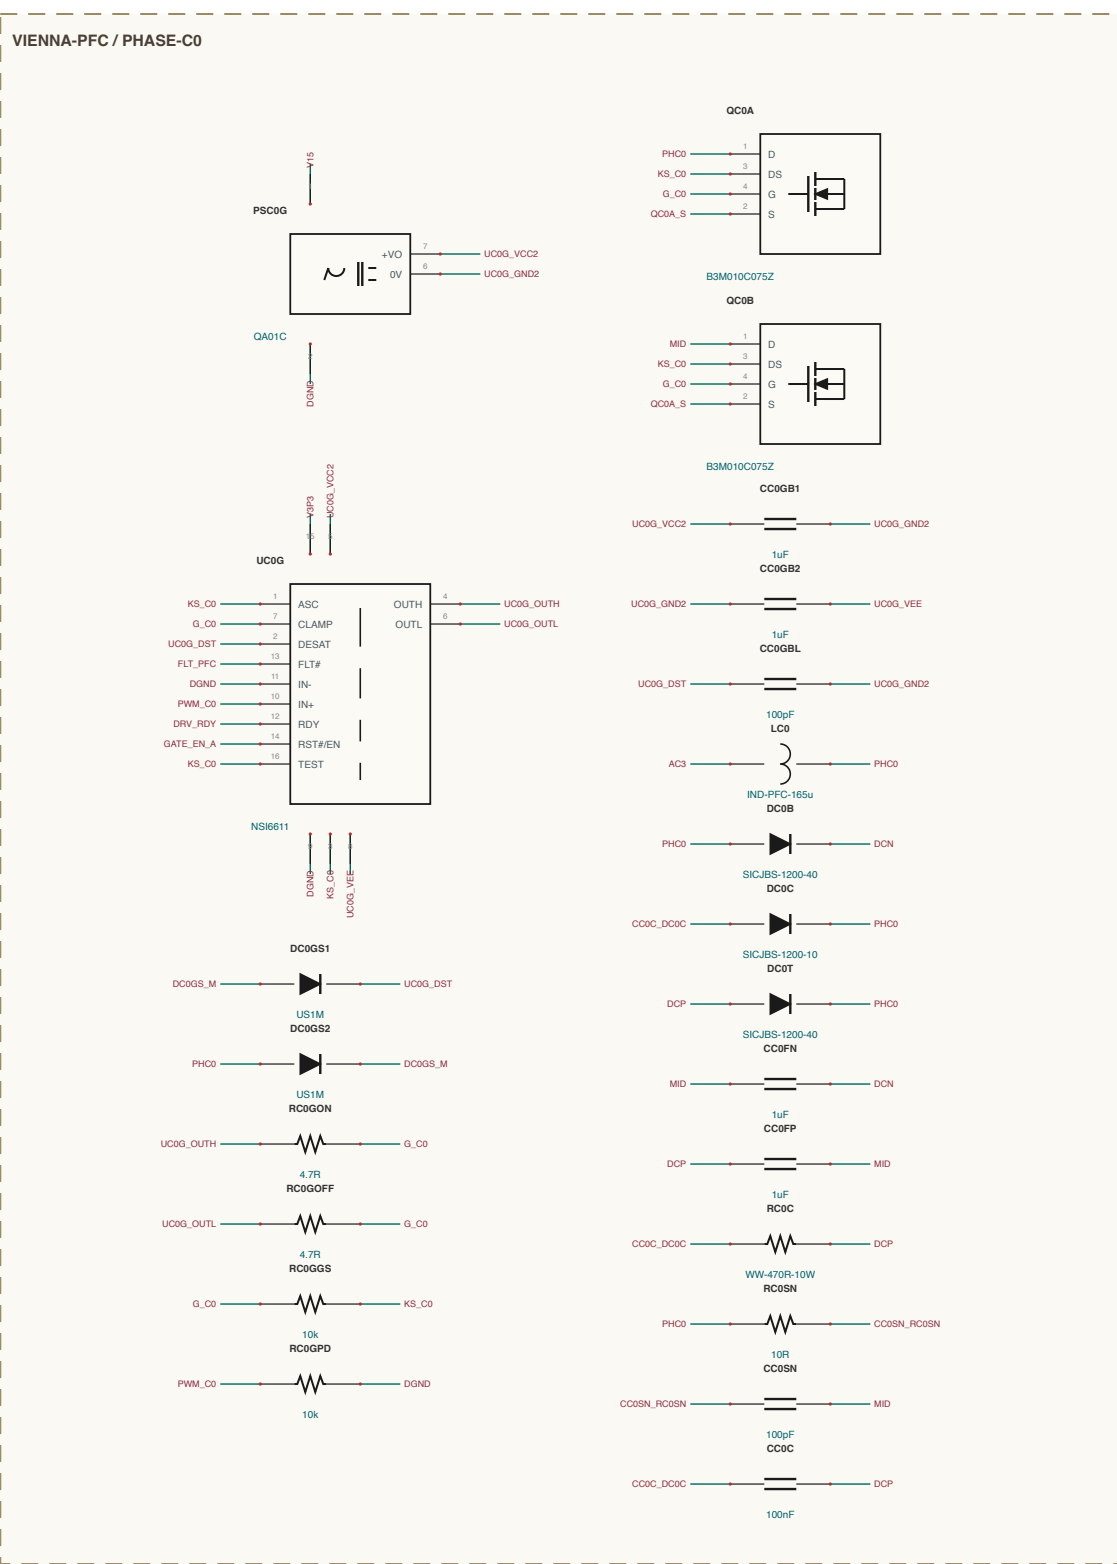
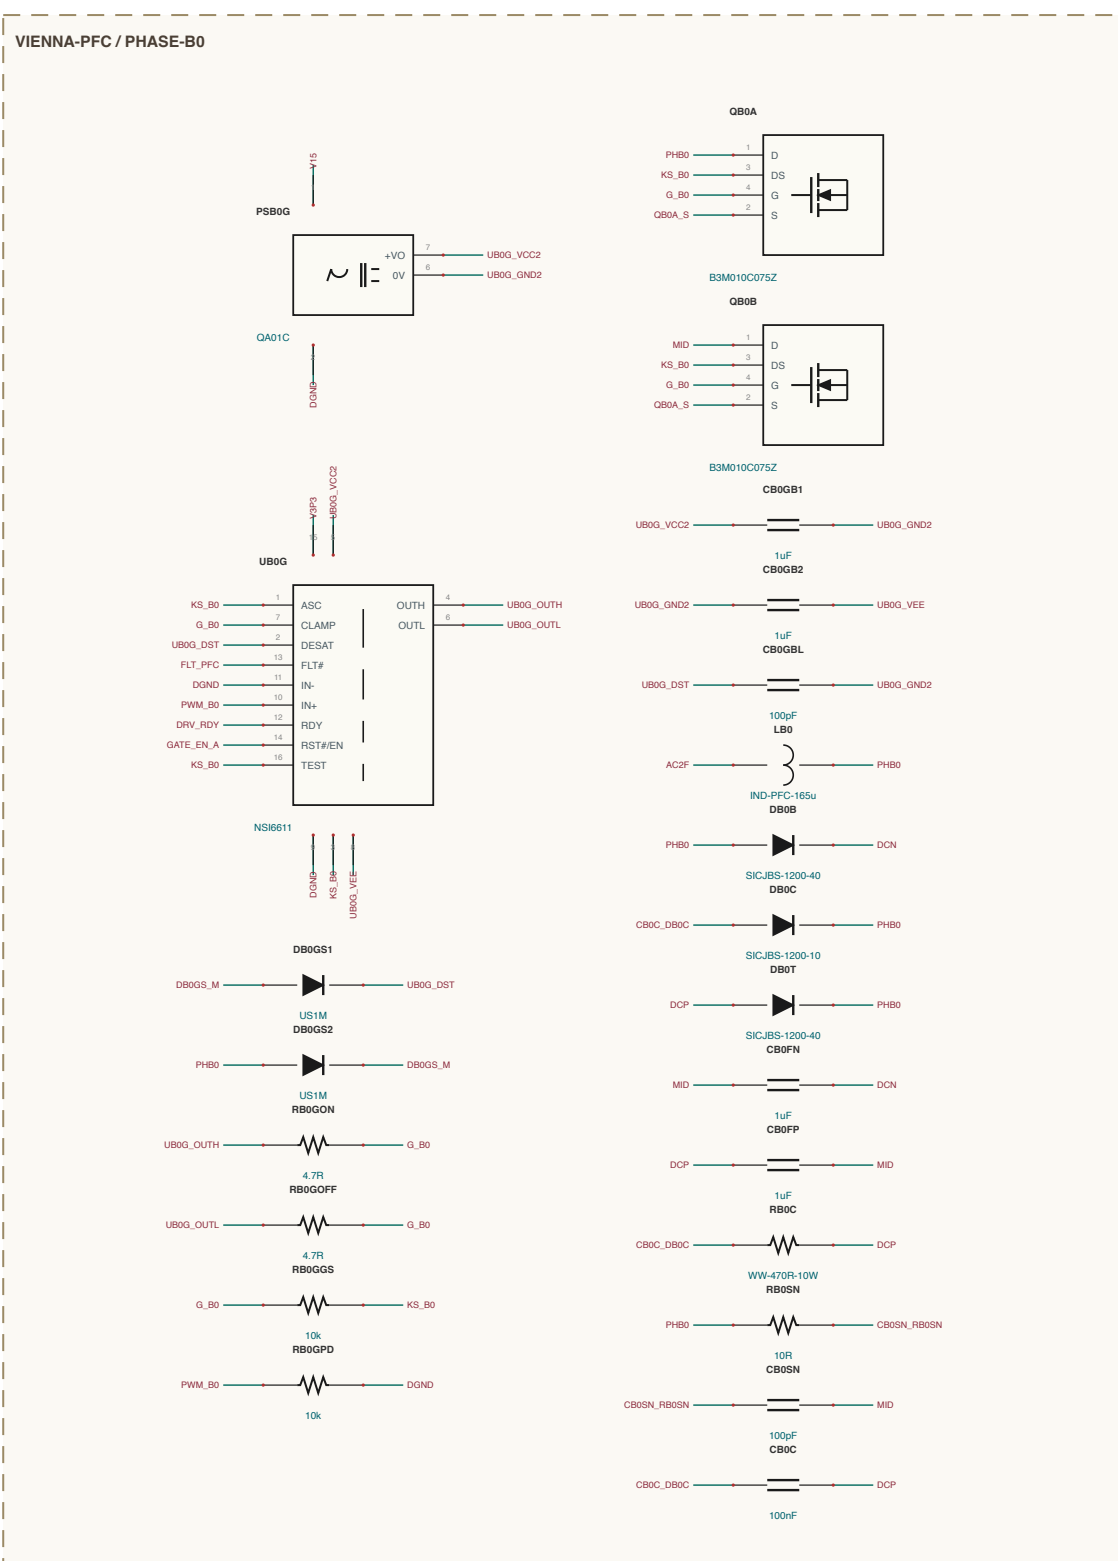
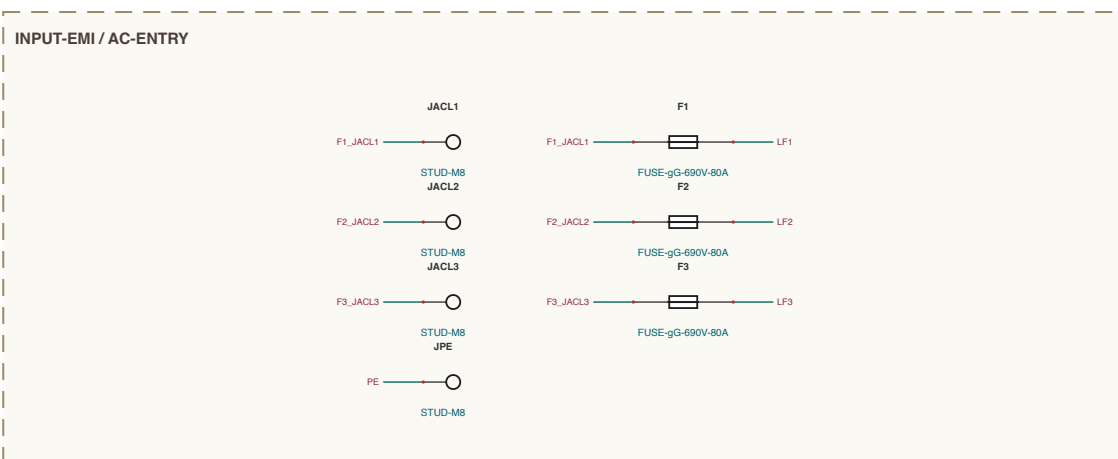
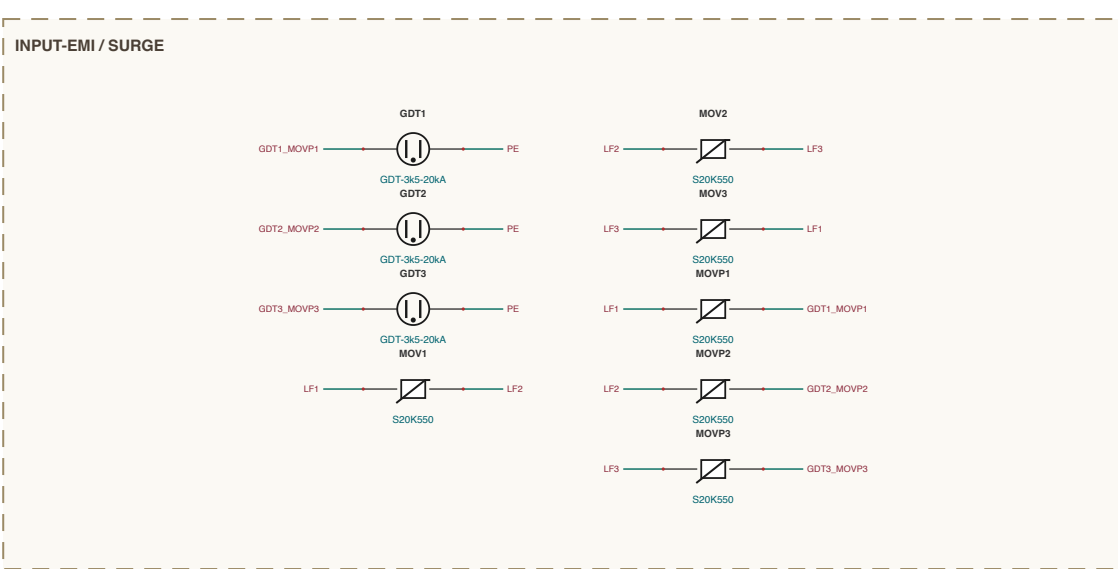
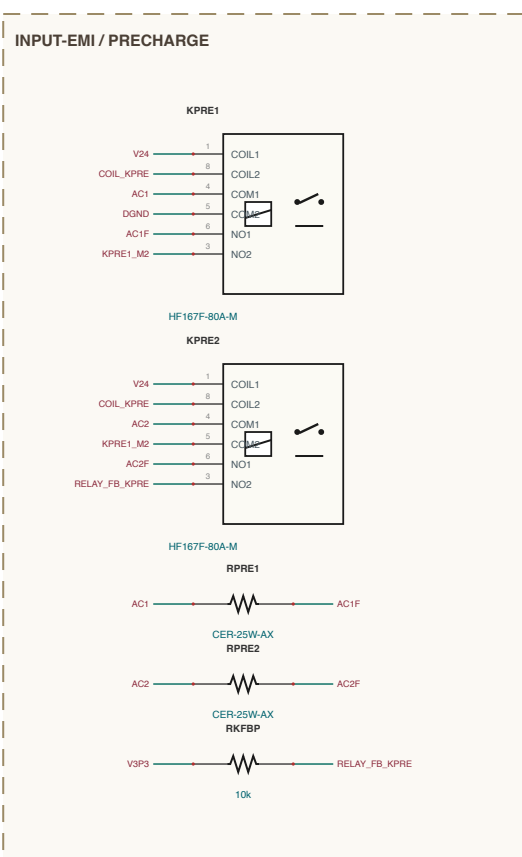
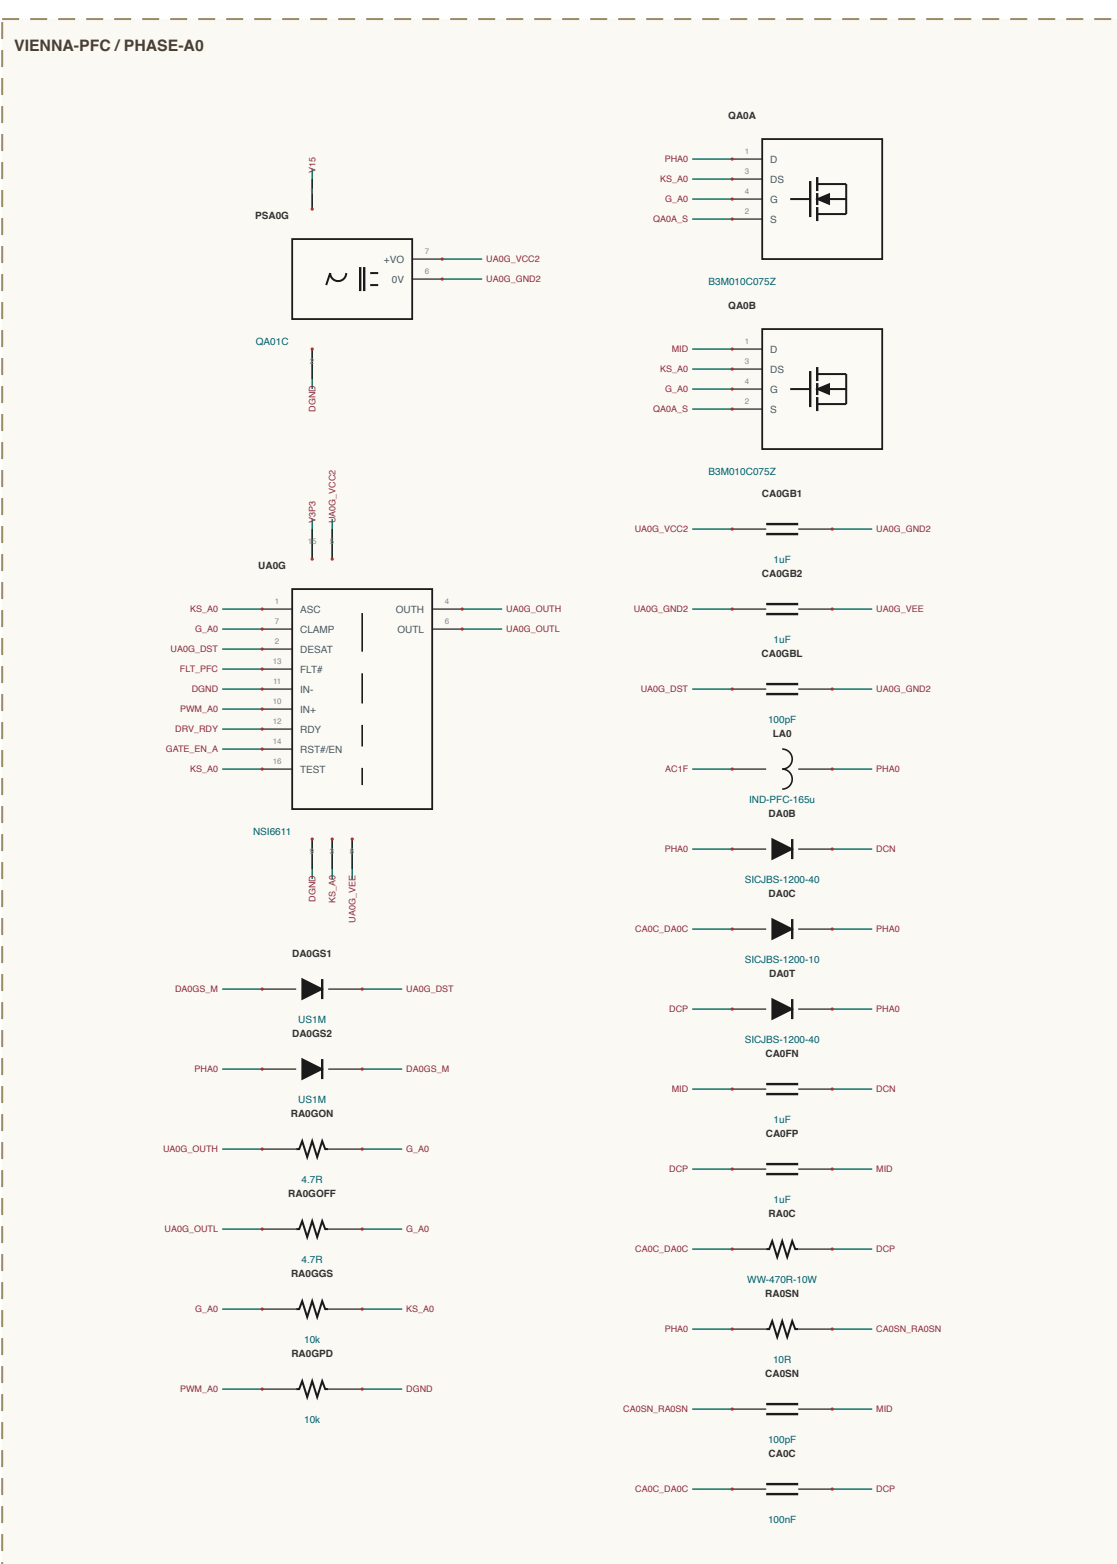
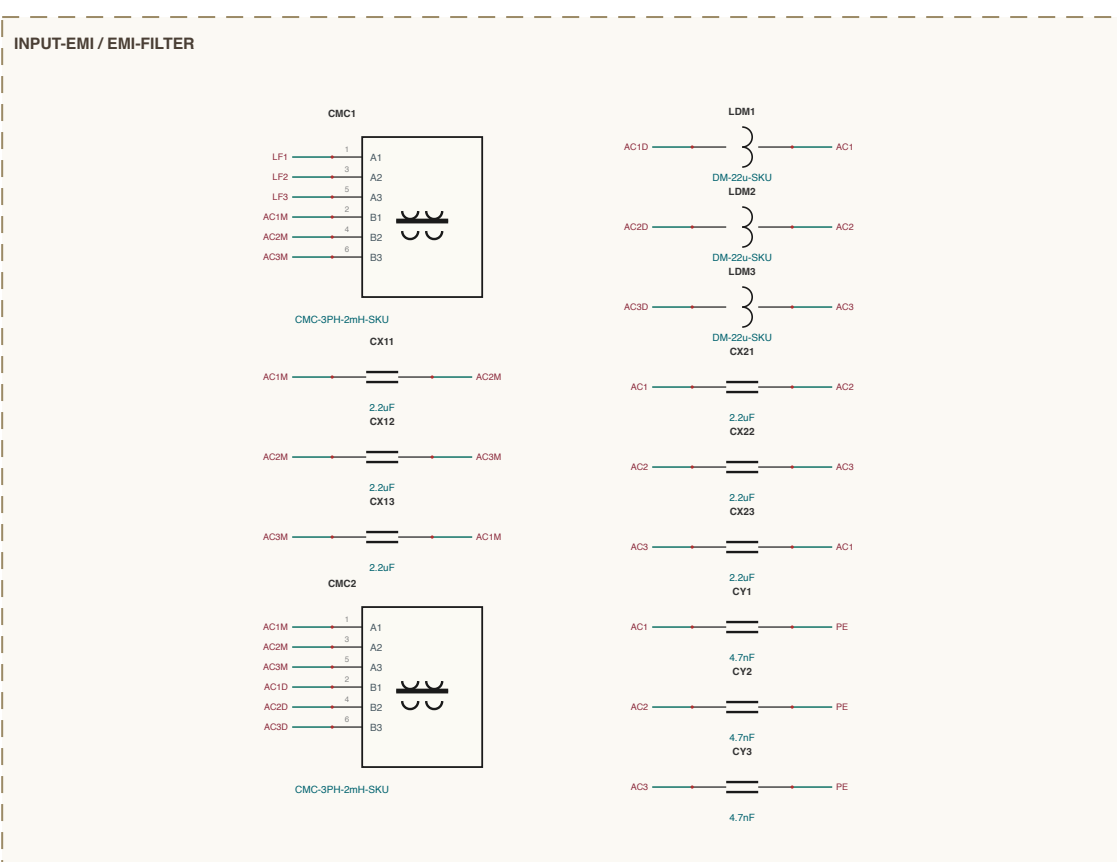
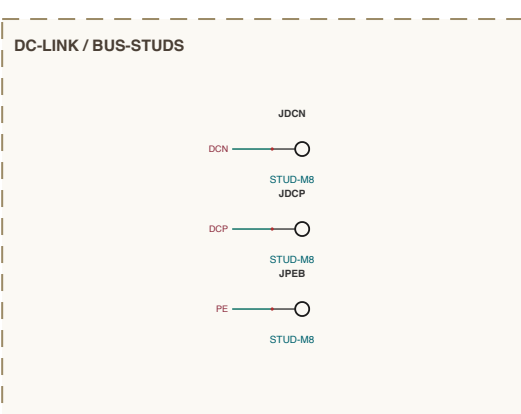
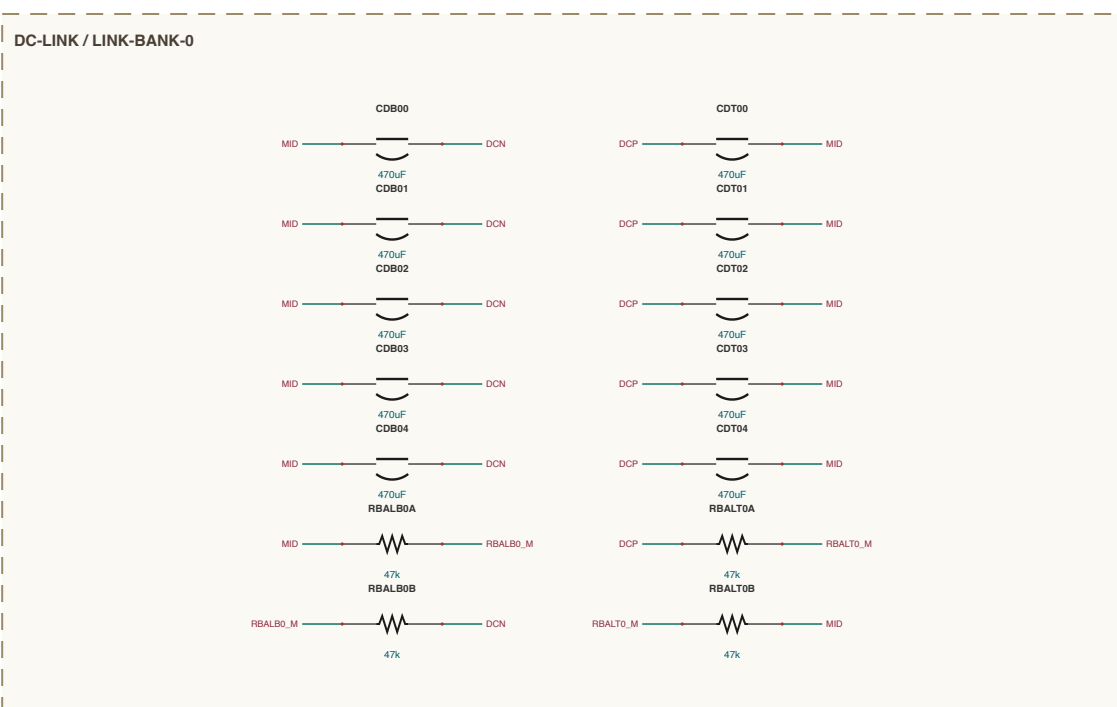
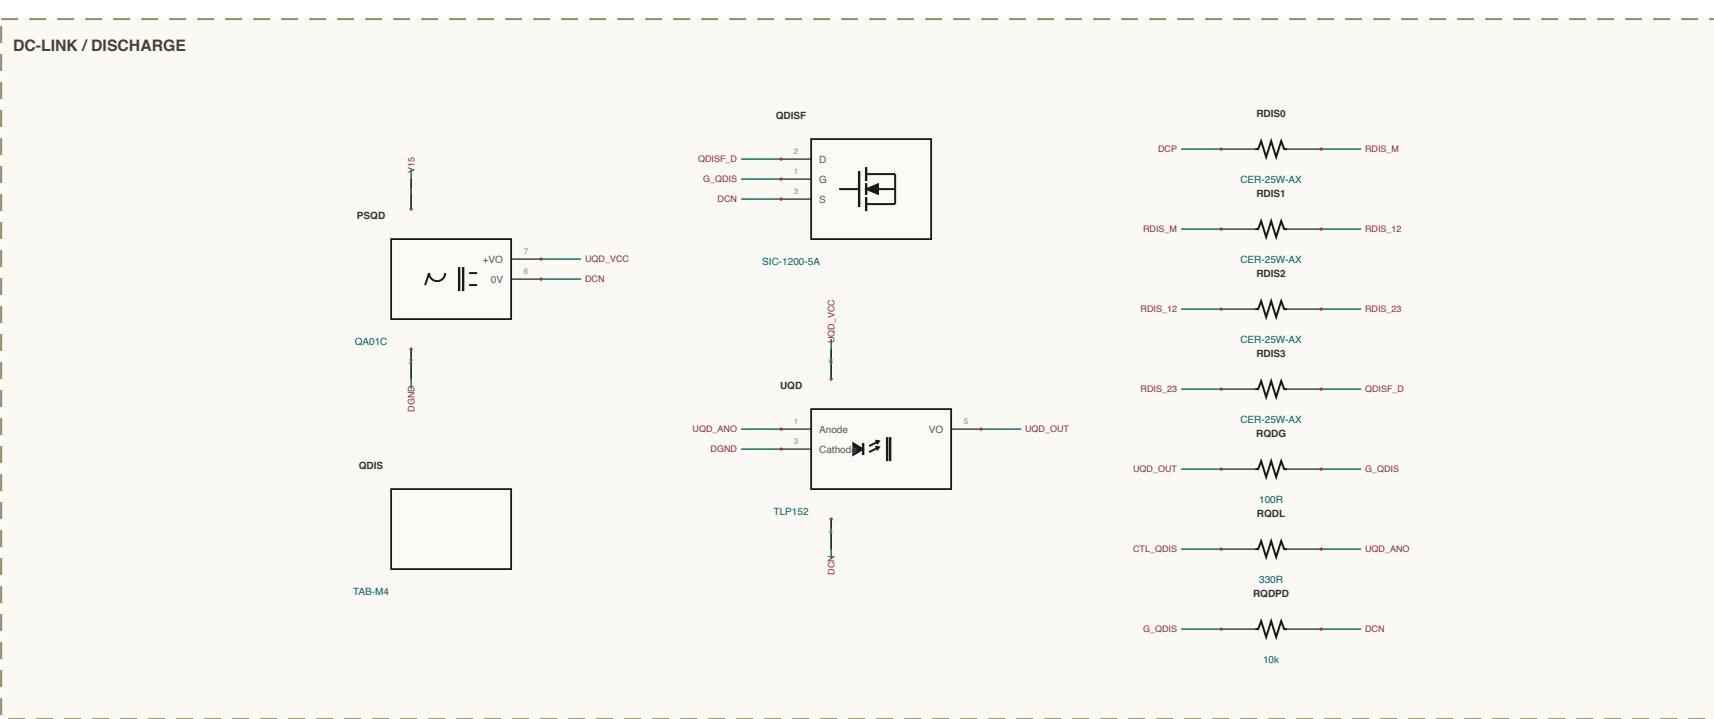
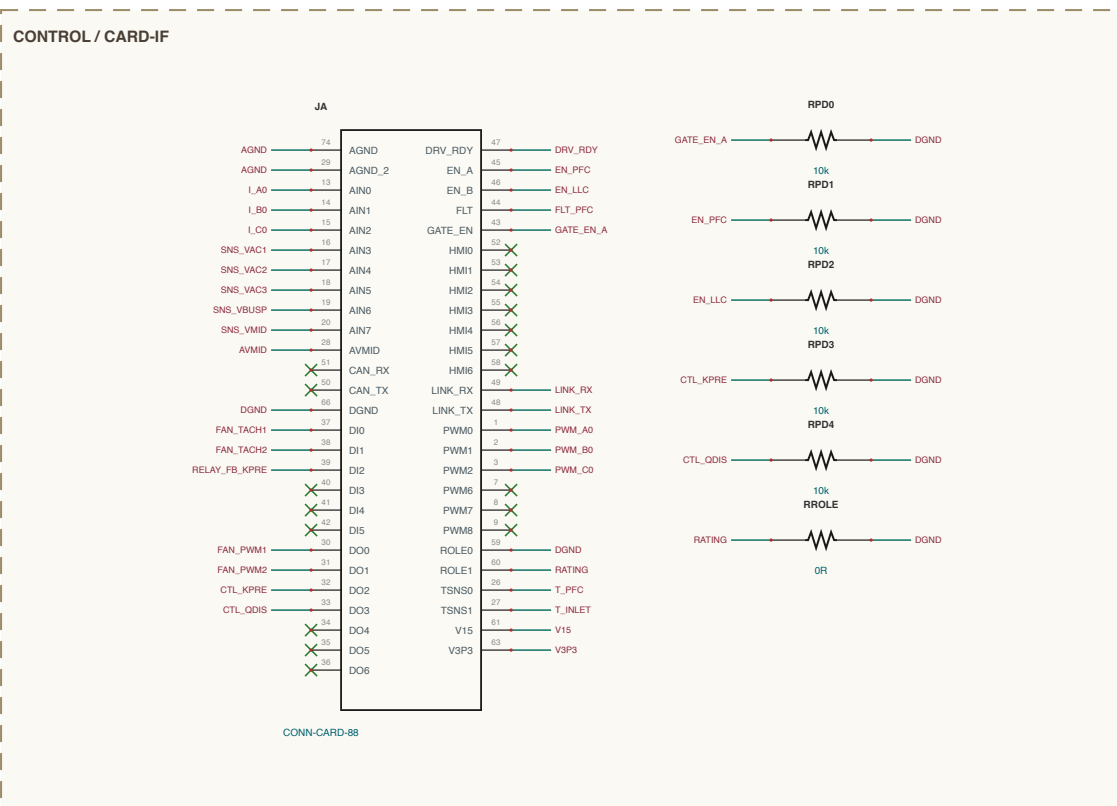
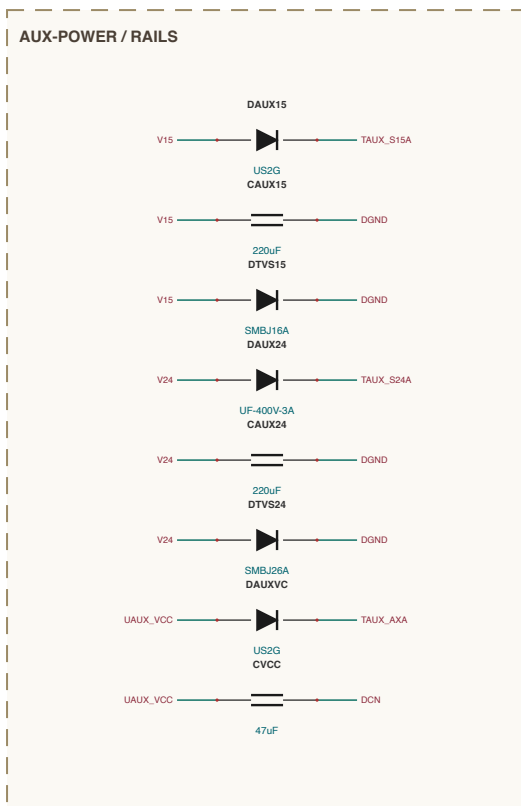
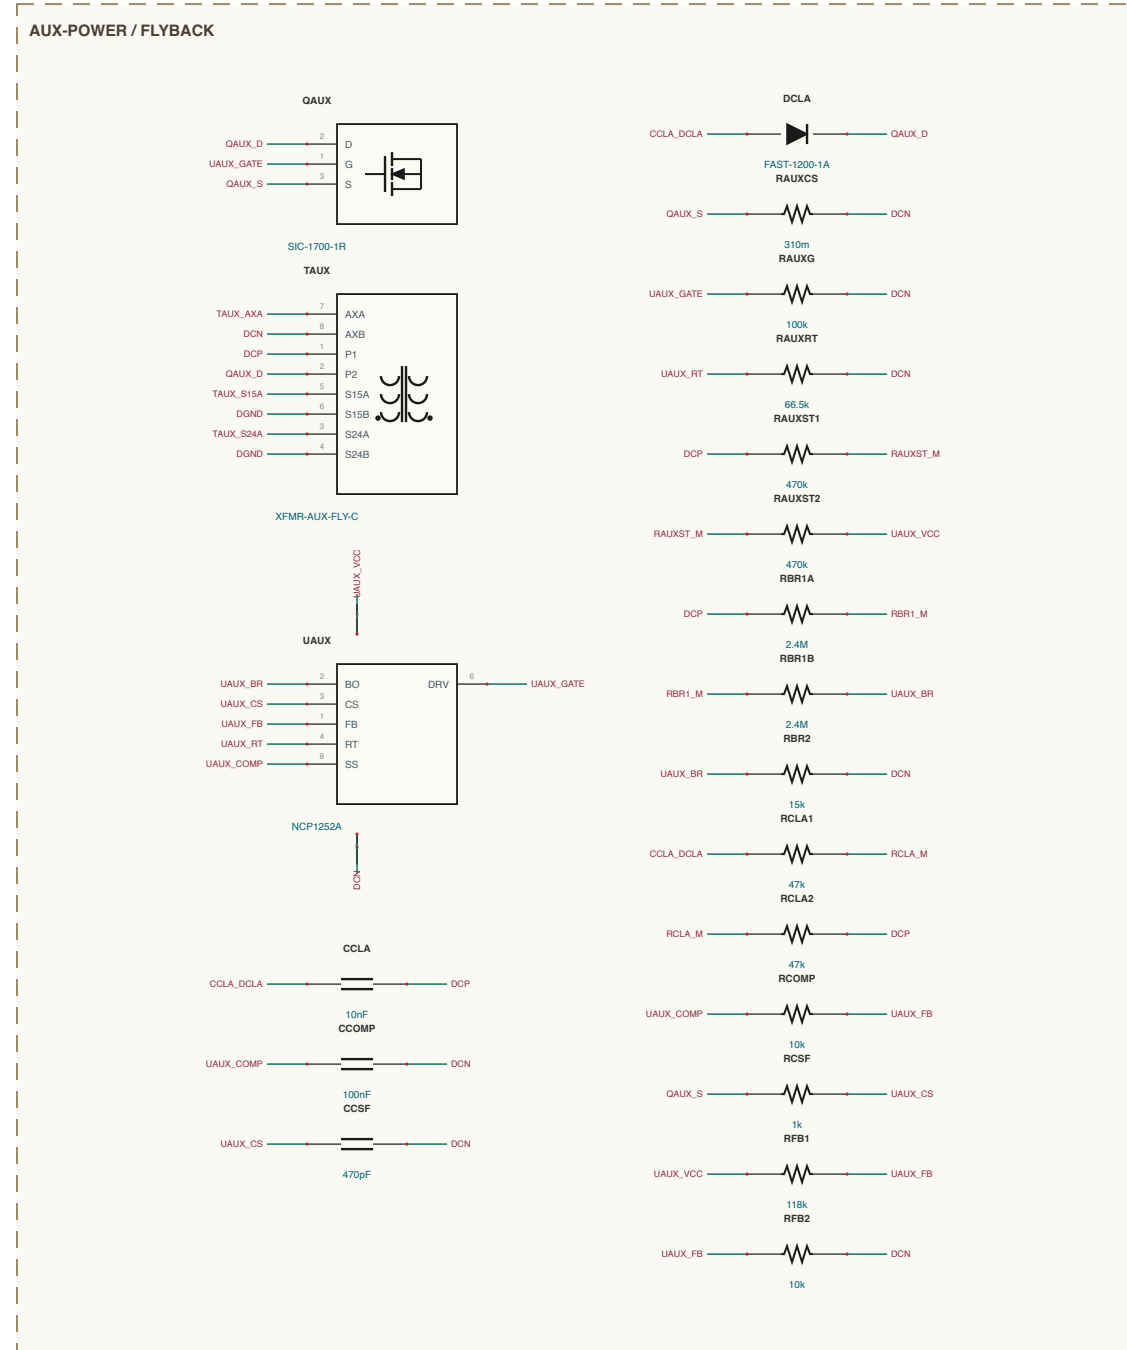
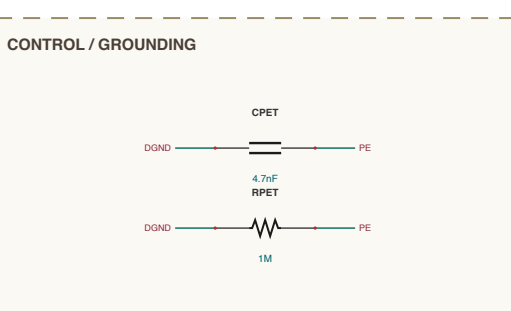
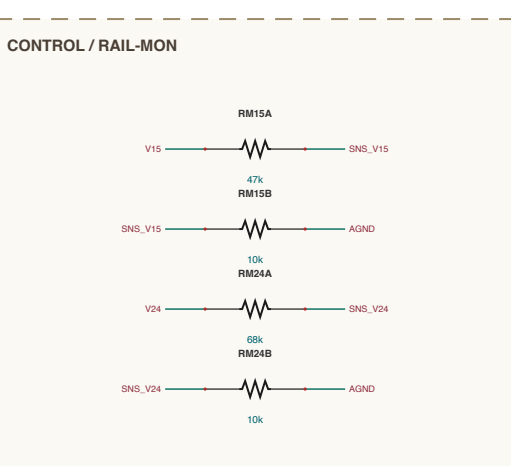
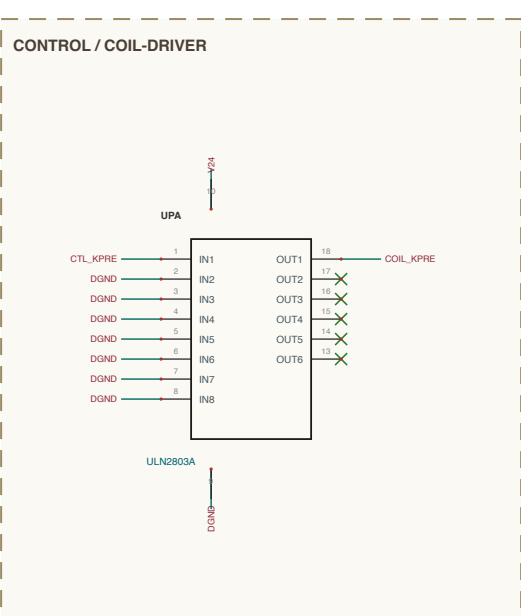
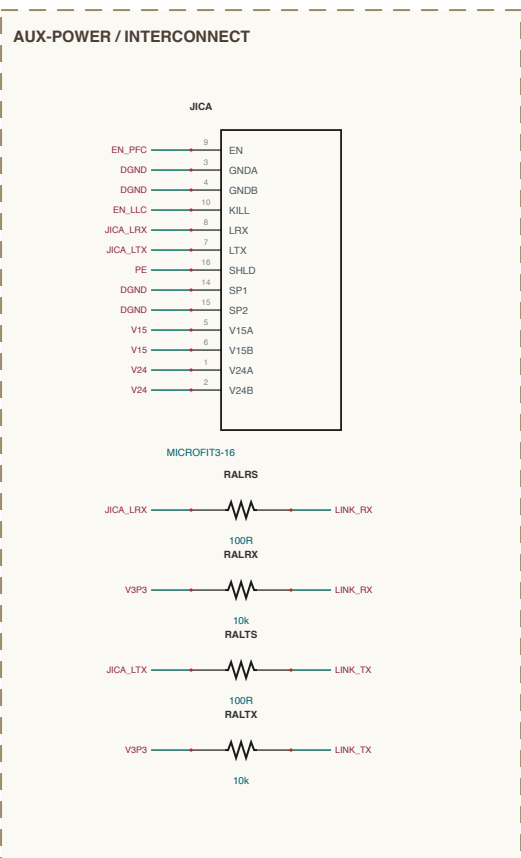
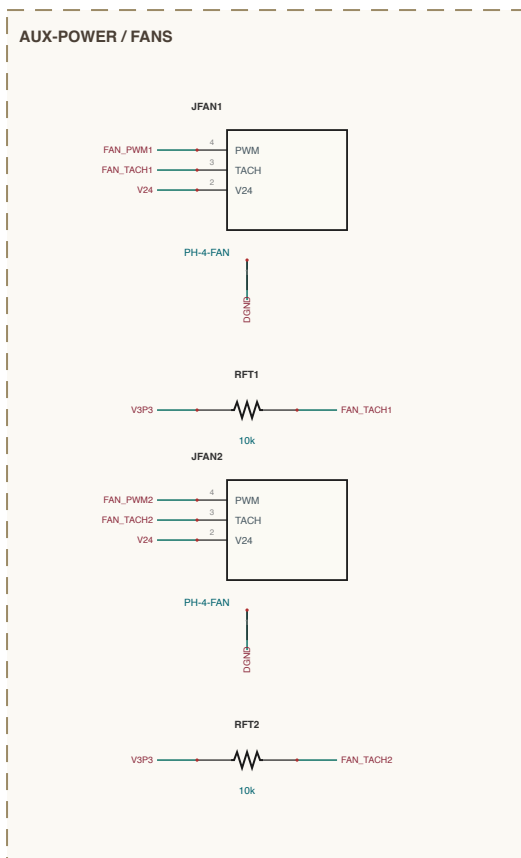
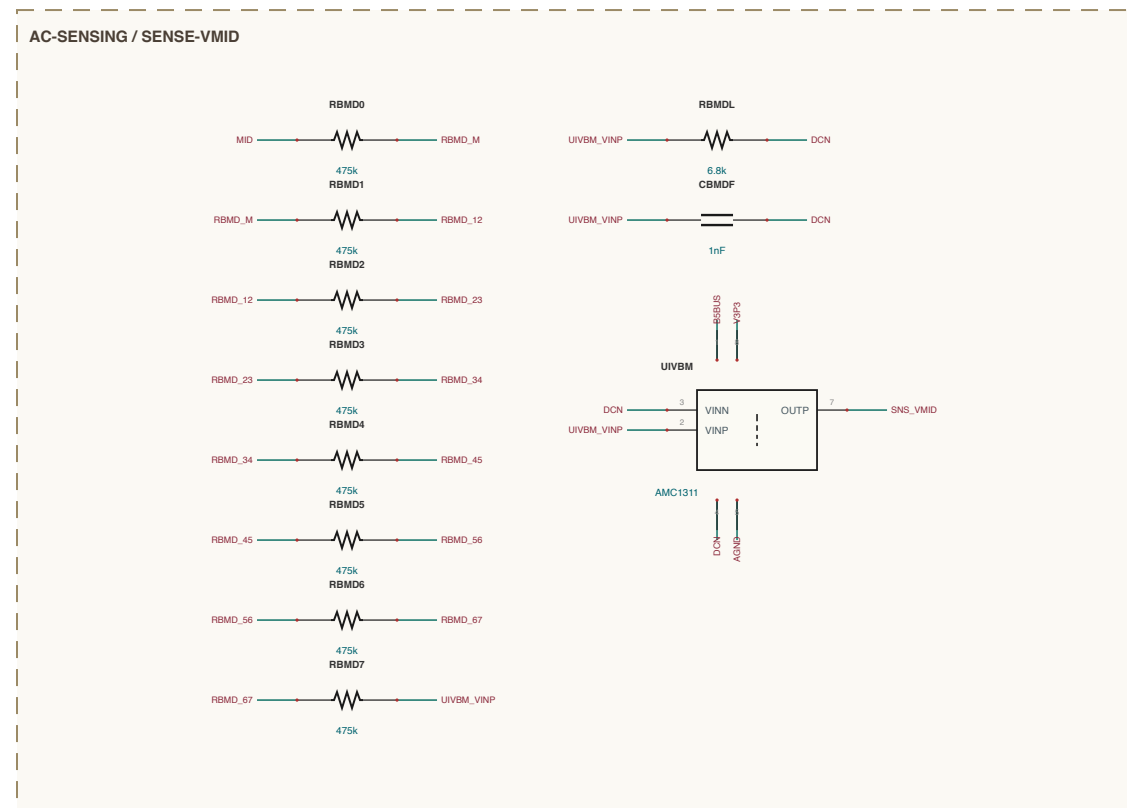
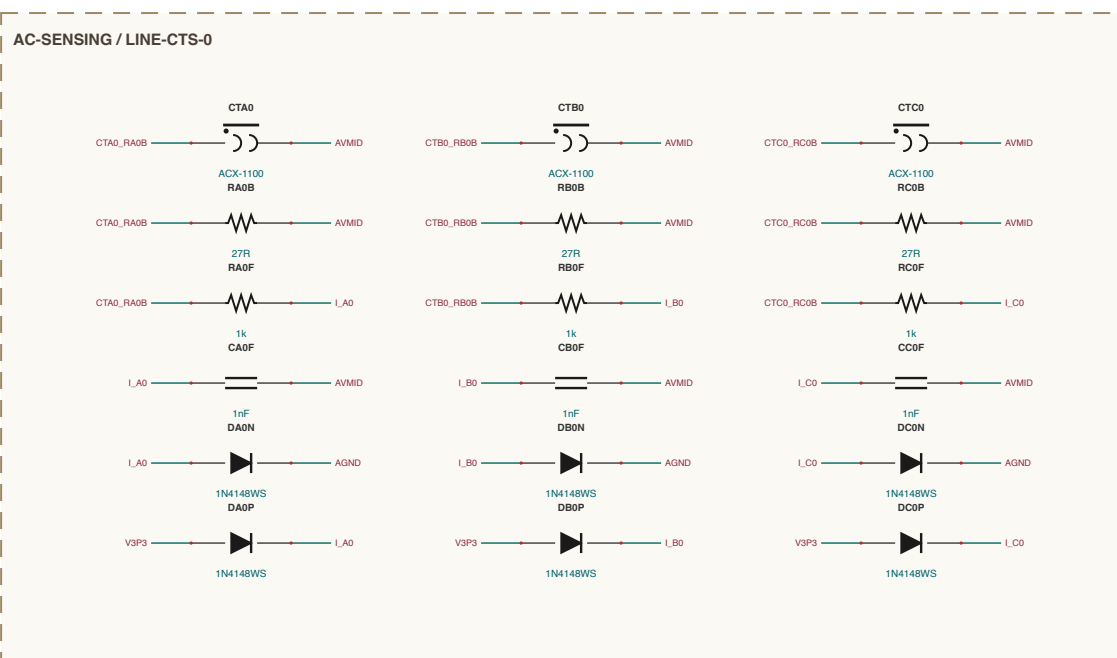
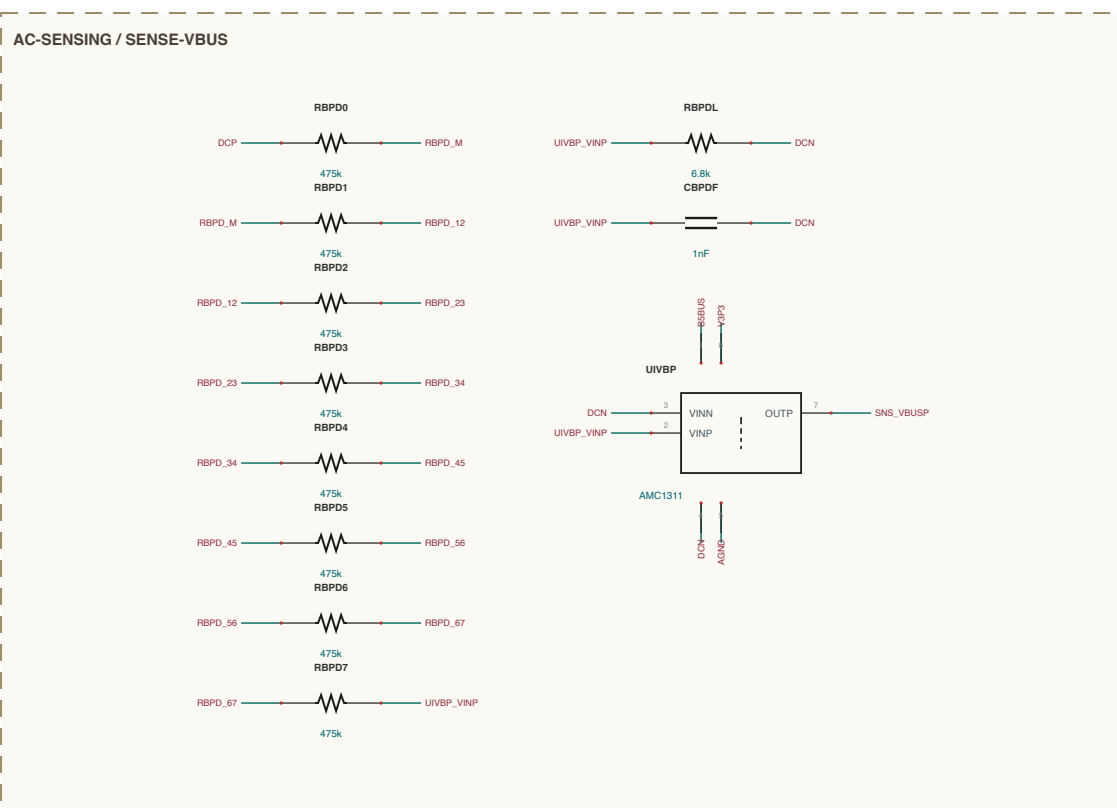
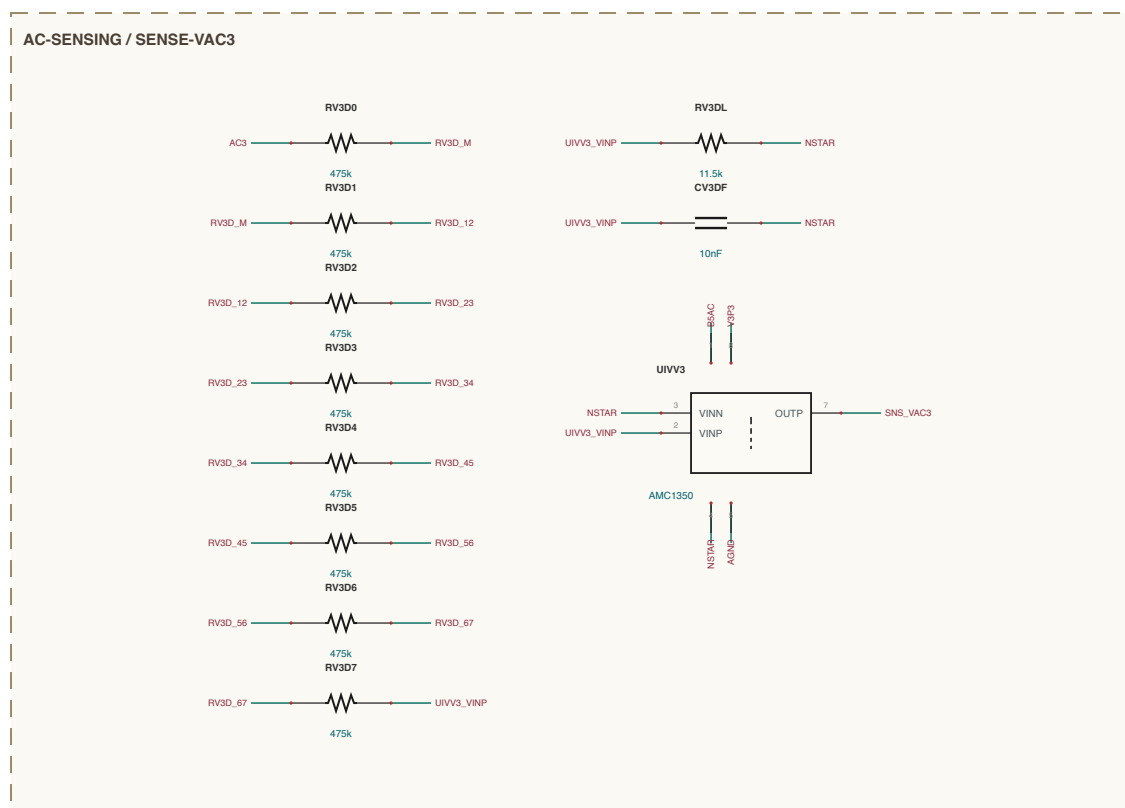
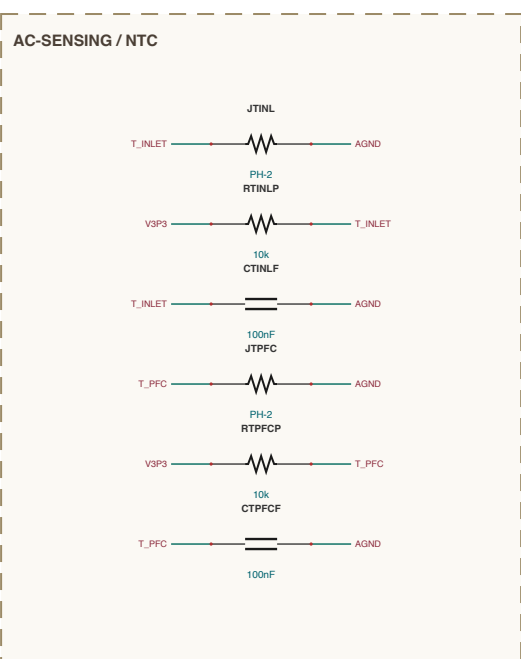
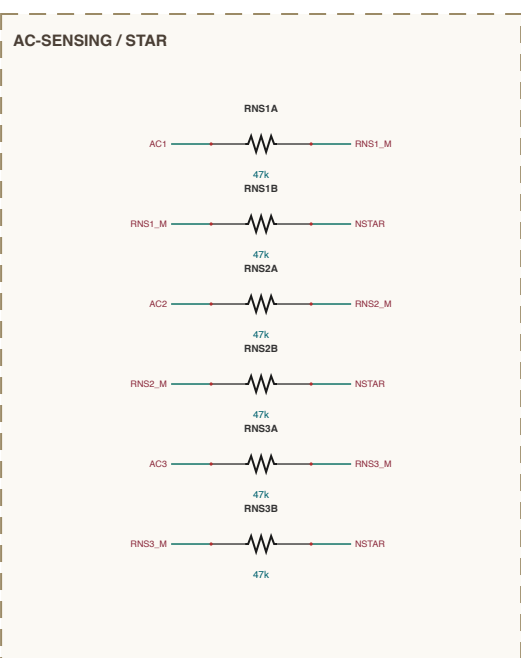
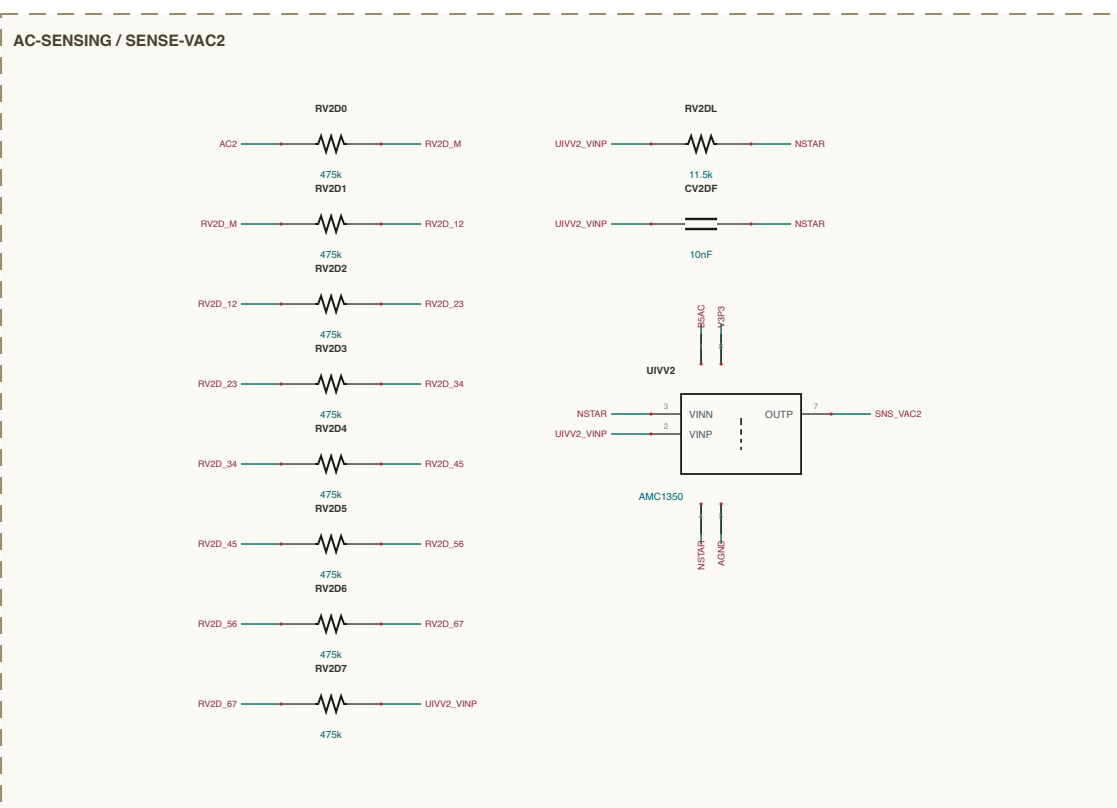
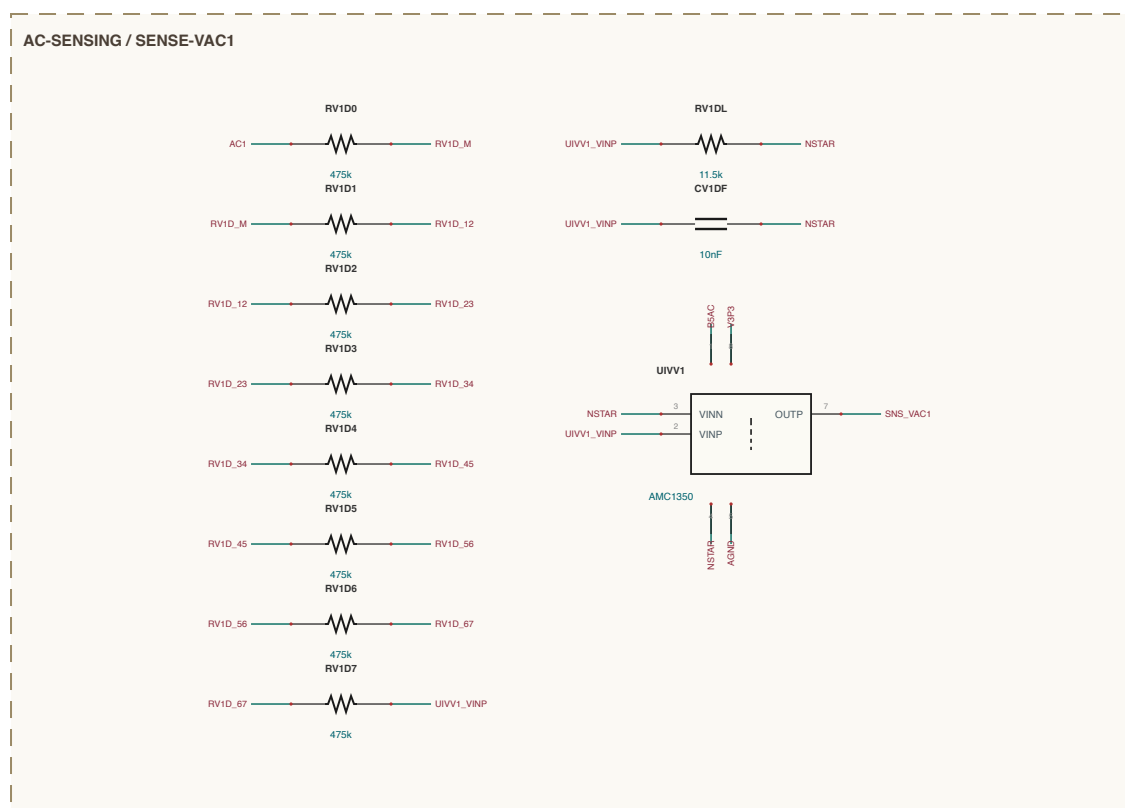


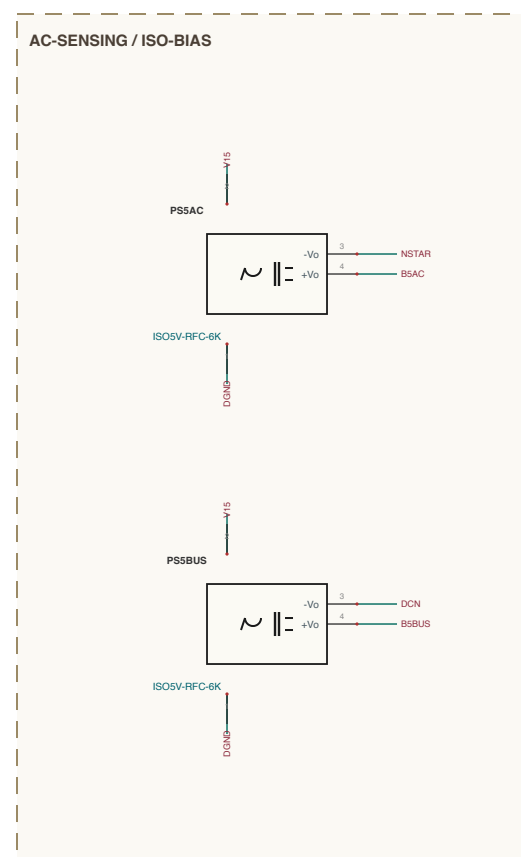

SHEET INDEX

30 HV AC-DC (line)	1 of 3
AC-BENING	8 sections
AIR POWER	4 sections
CONTROL	4 sections
INPUT EM	4 sections
DC-LINK	3 sections
VISUAL PVC	3 sections
rev D-3: 27 sections - 271 components	

NET NAMING

internal junctions are named for what they join

Unetw_*Mbs made at that GC join e.g. UNPQA_URP

Restnet_* M midpoint of a waxes pair e.g. R8AL7A_M

Restnet_*crrc top between Restnetwax e.g. R8YD_81

all others are explicit design notes