
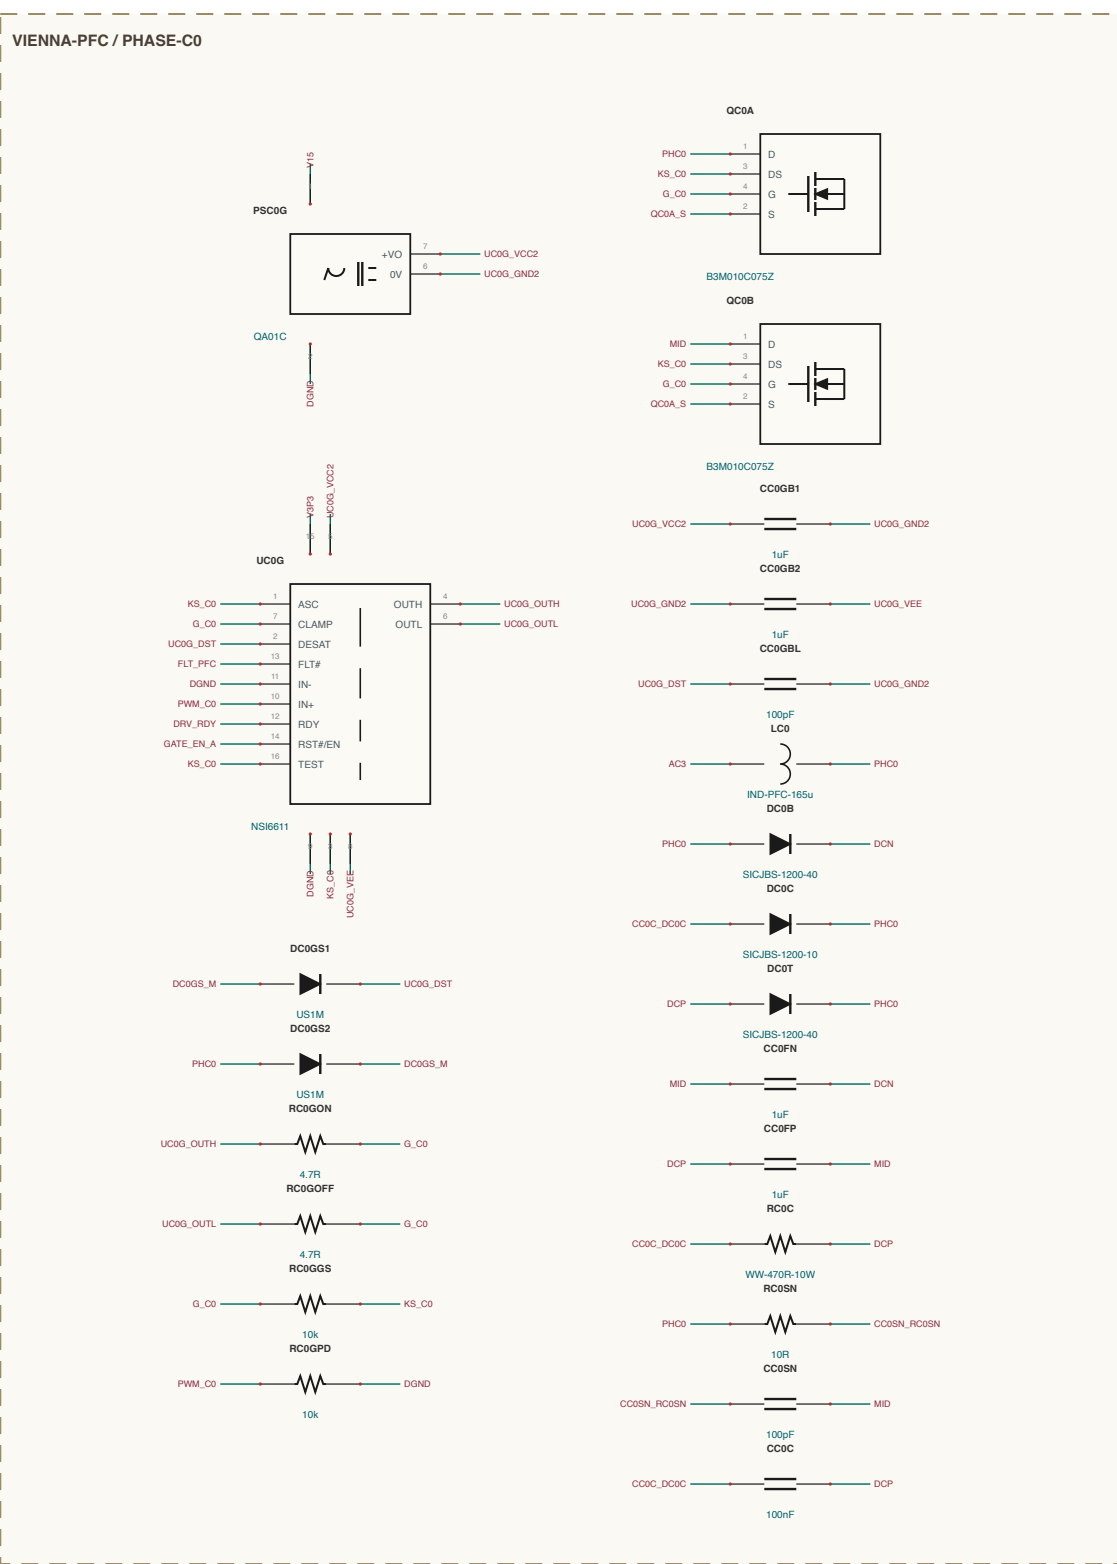
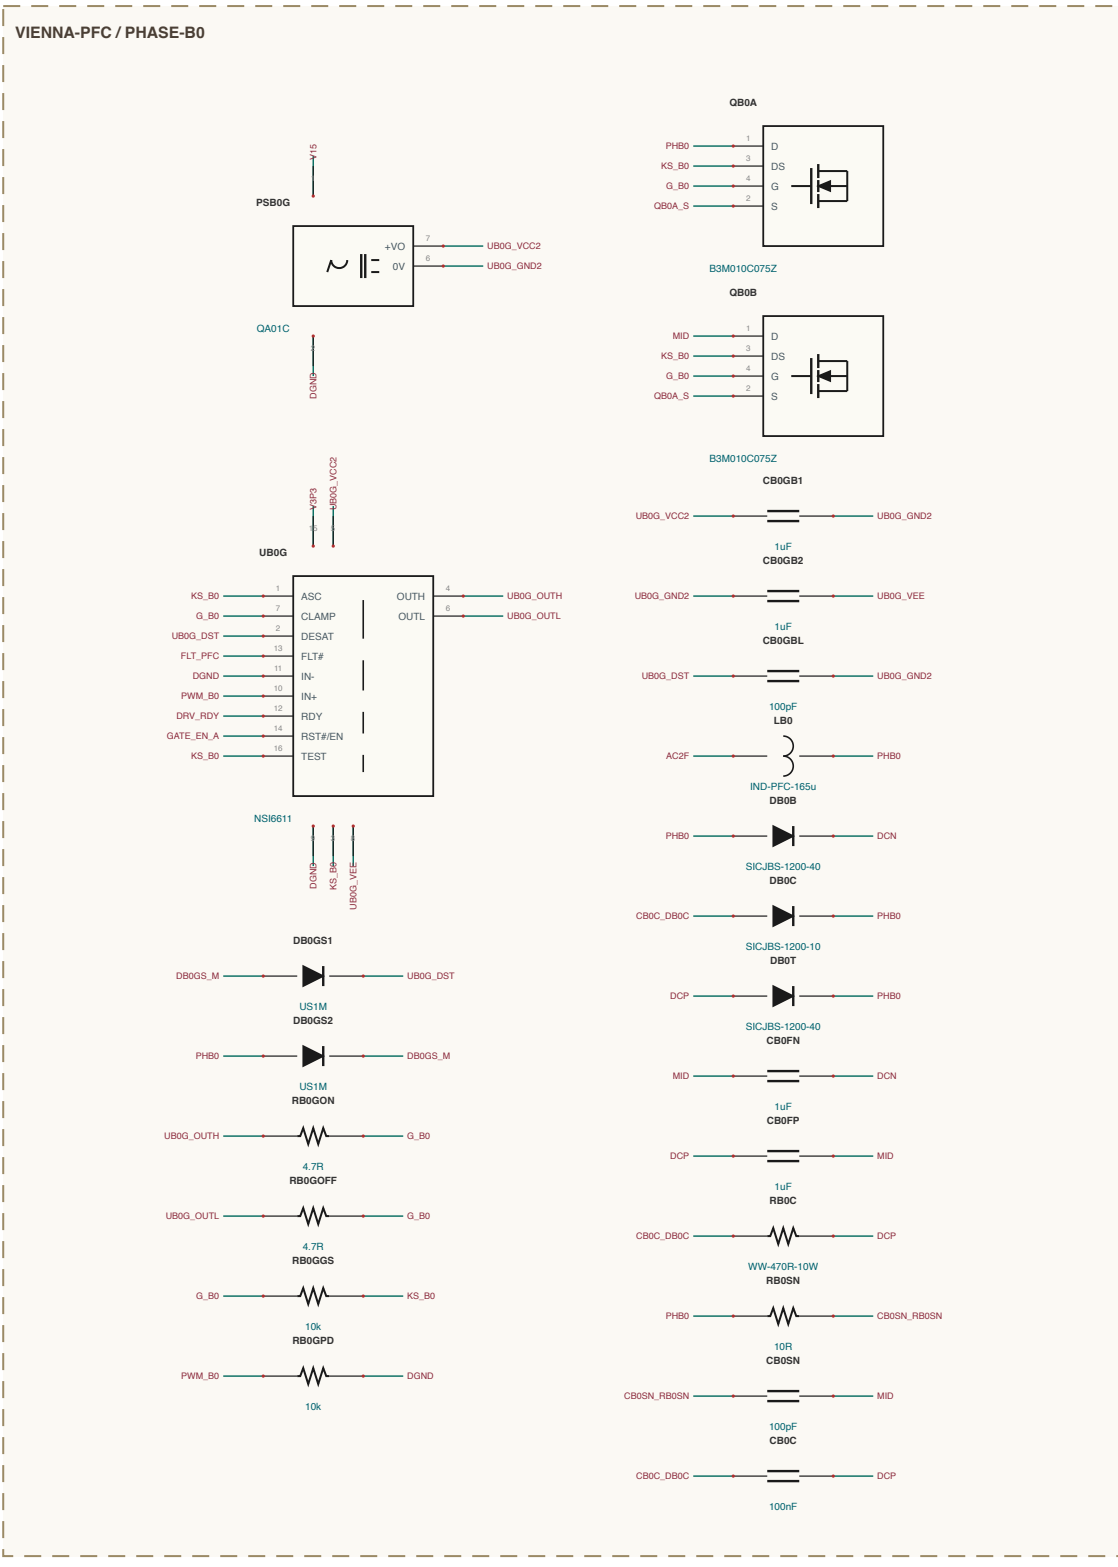
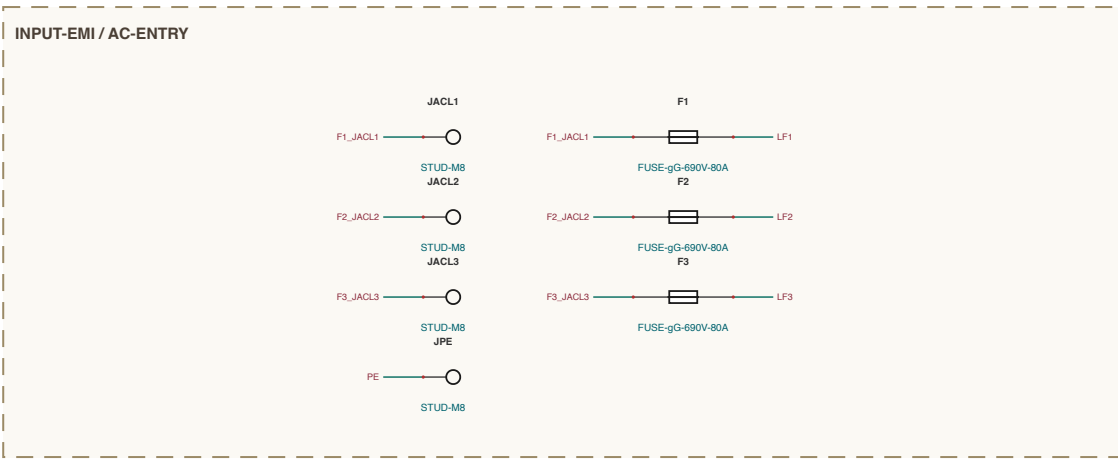
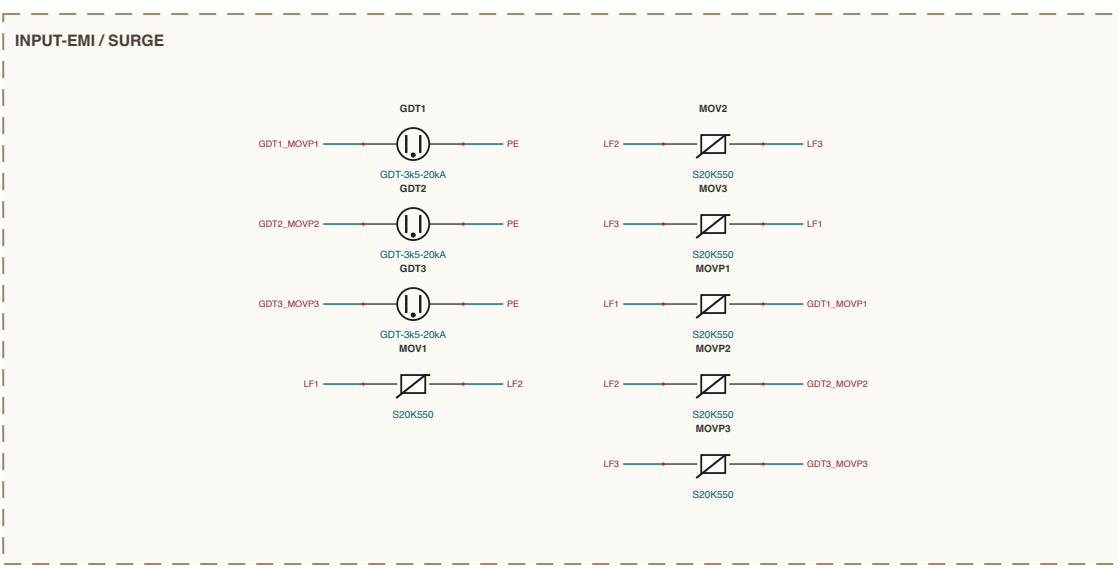
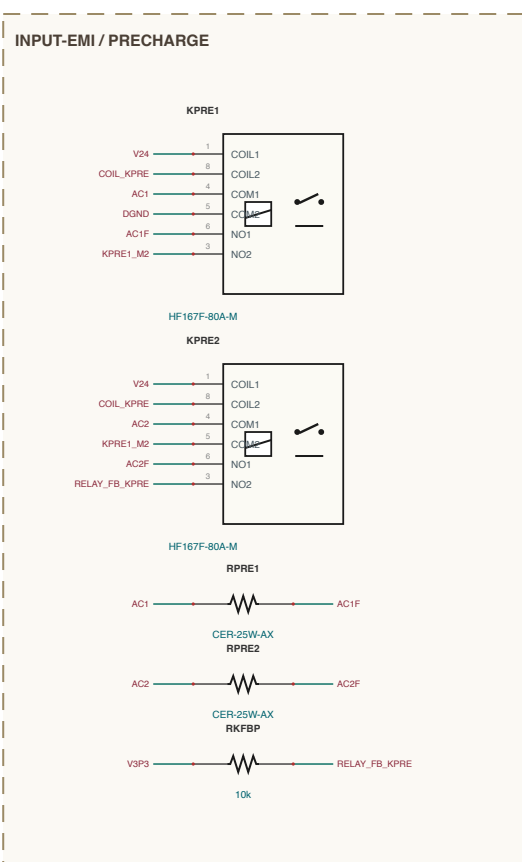
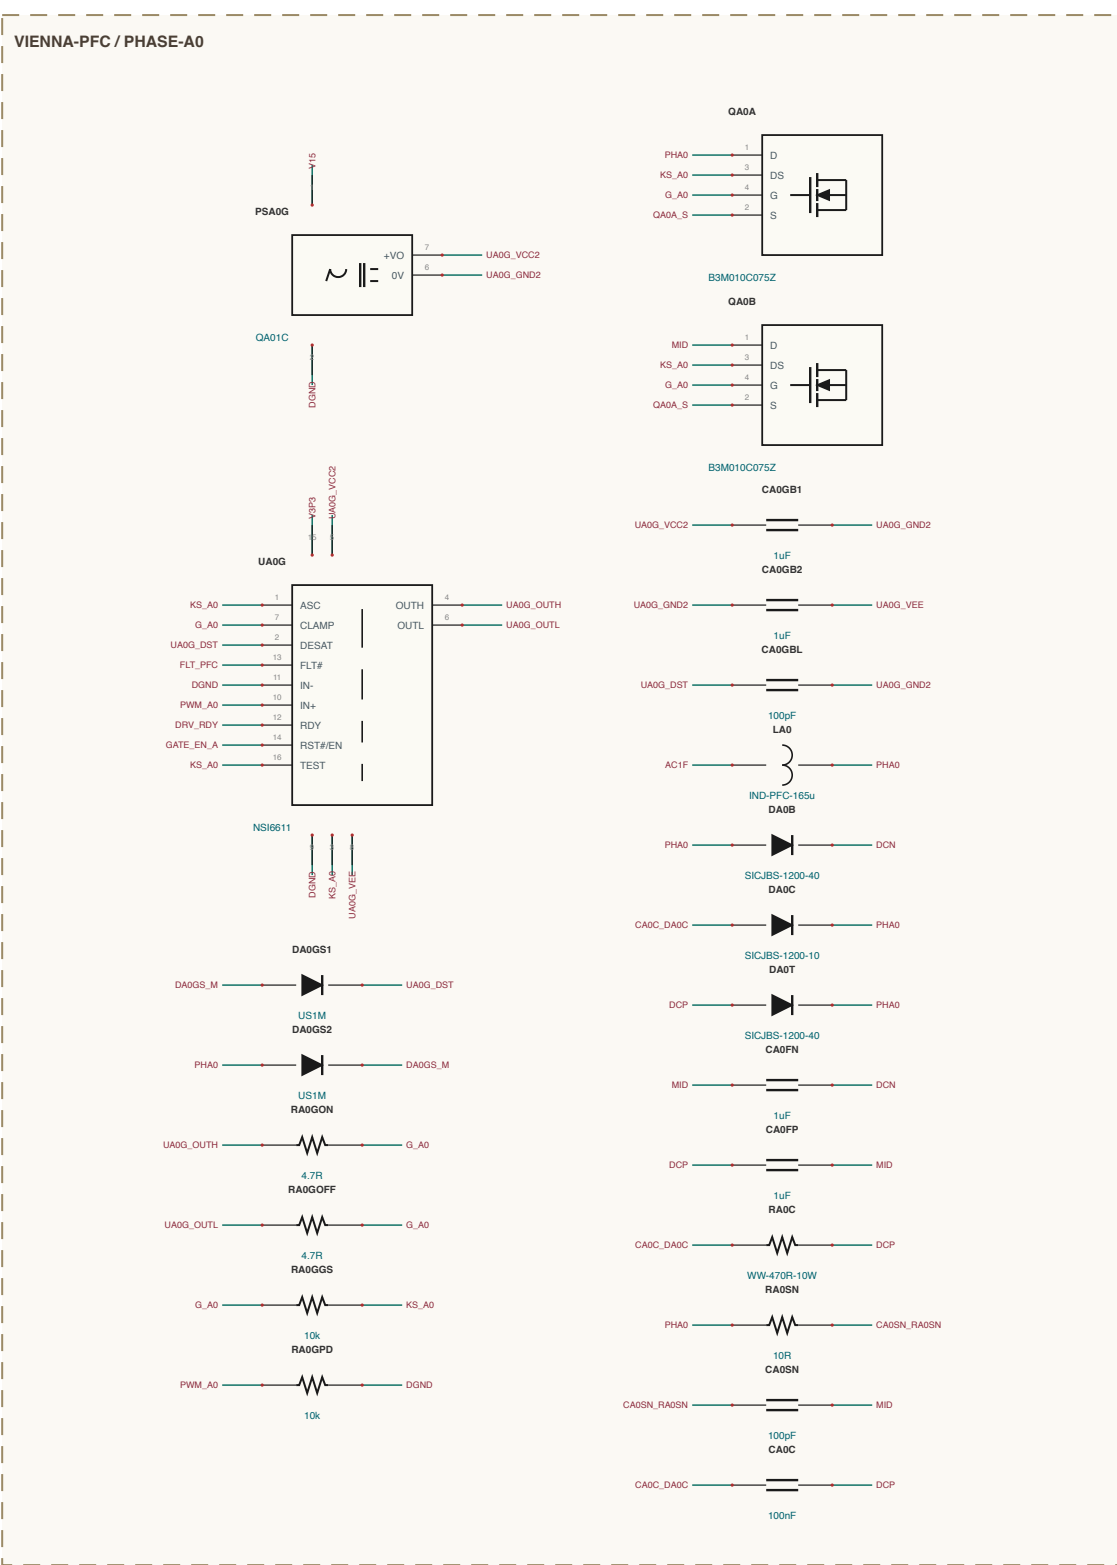
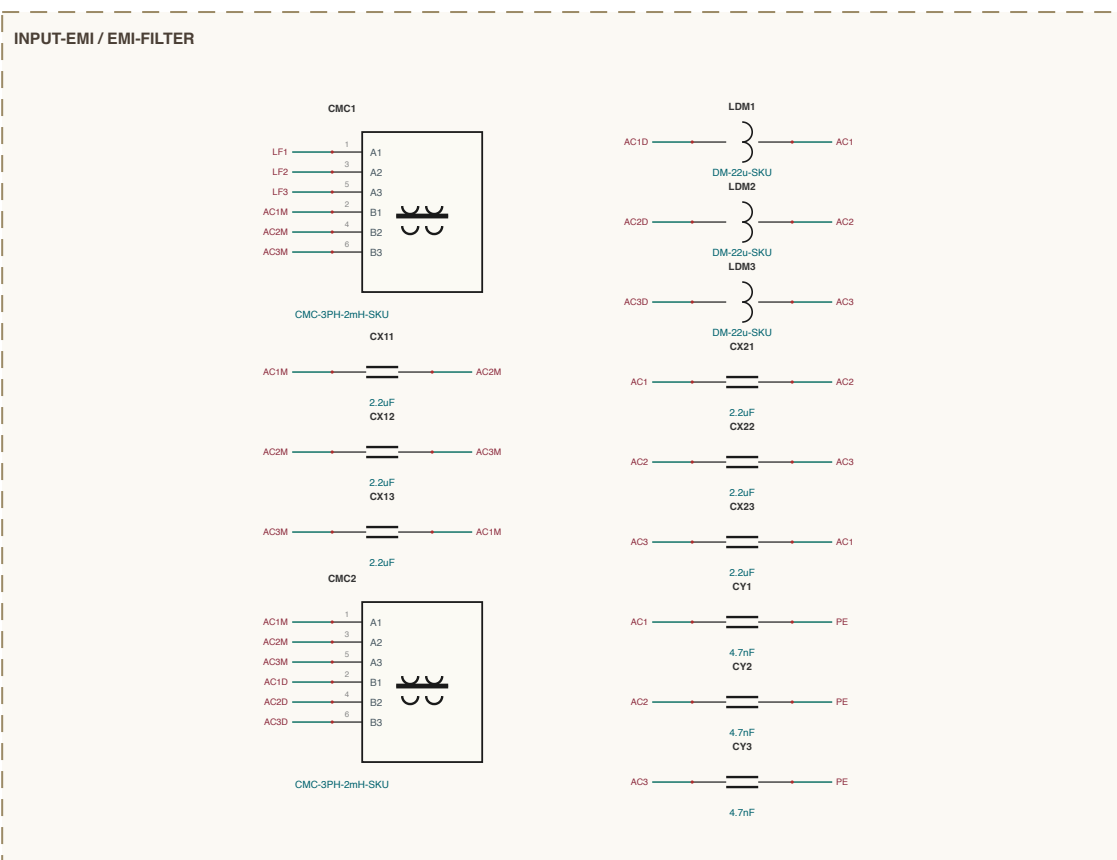
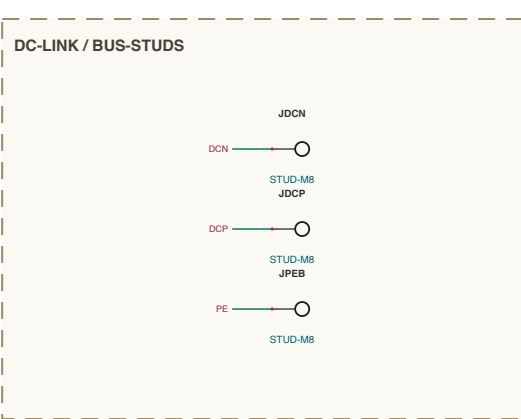
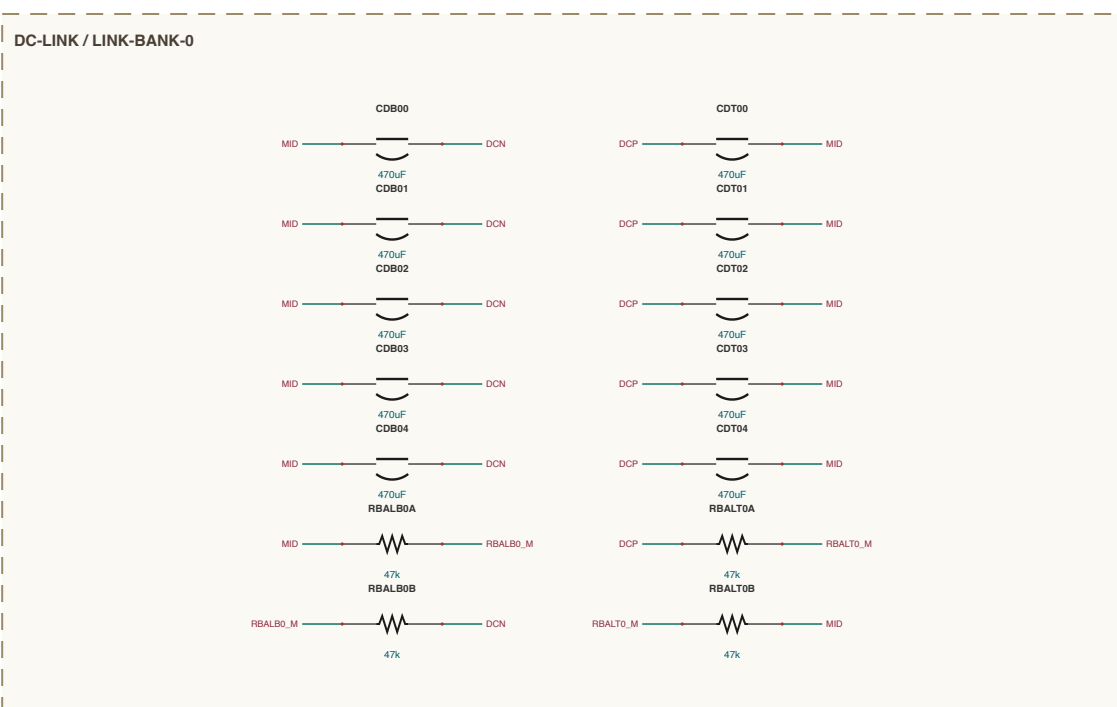
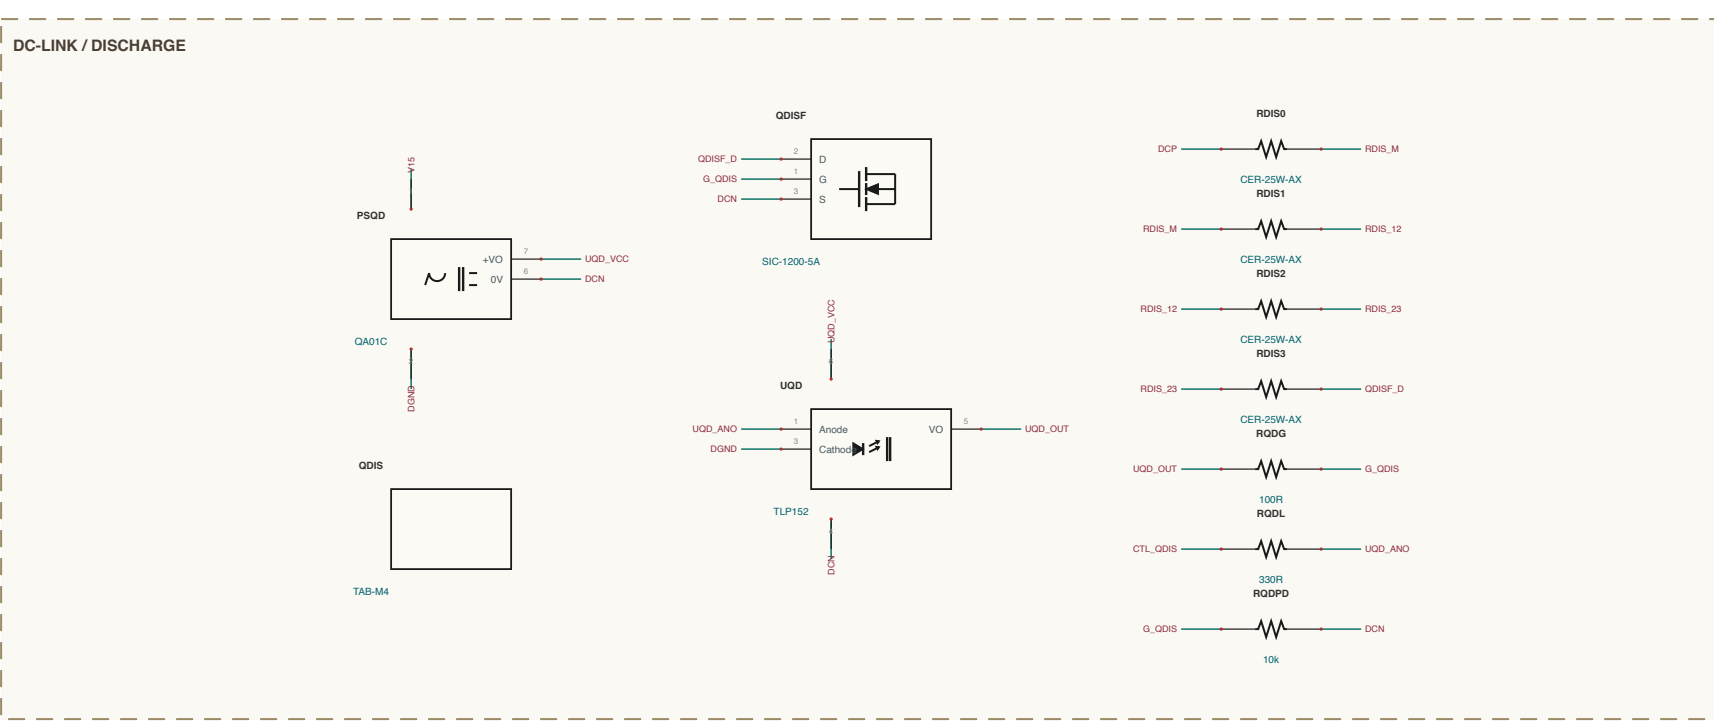
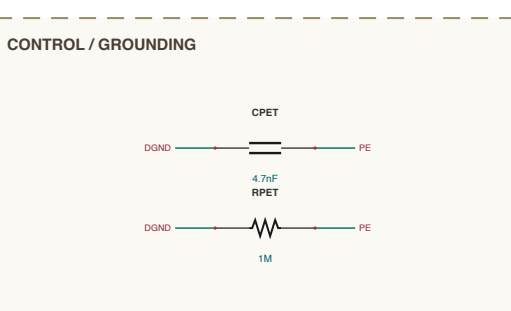
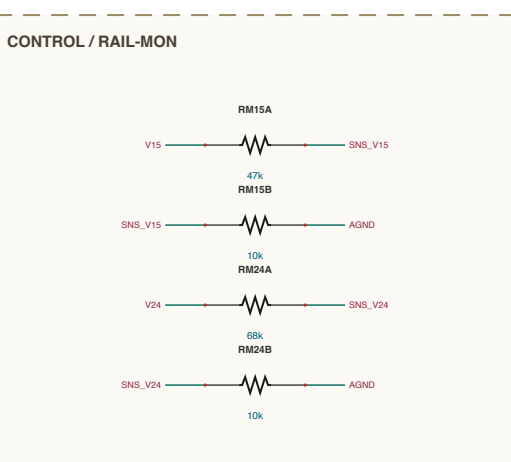
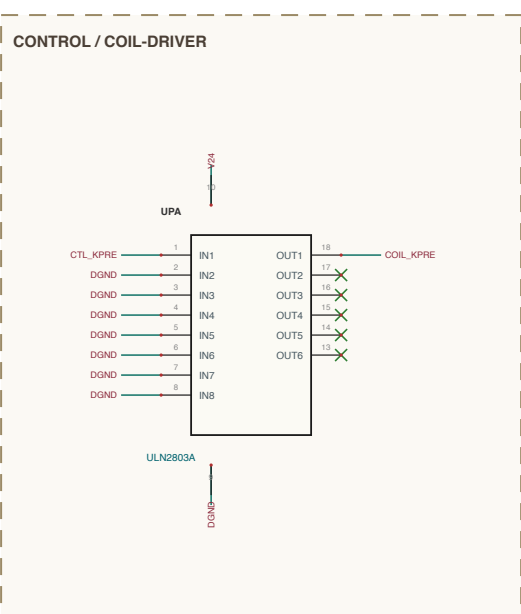
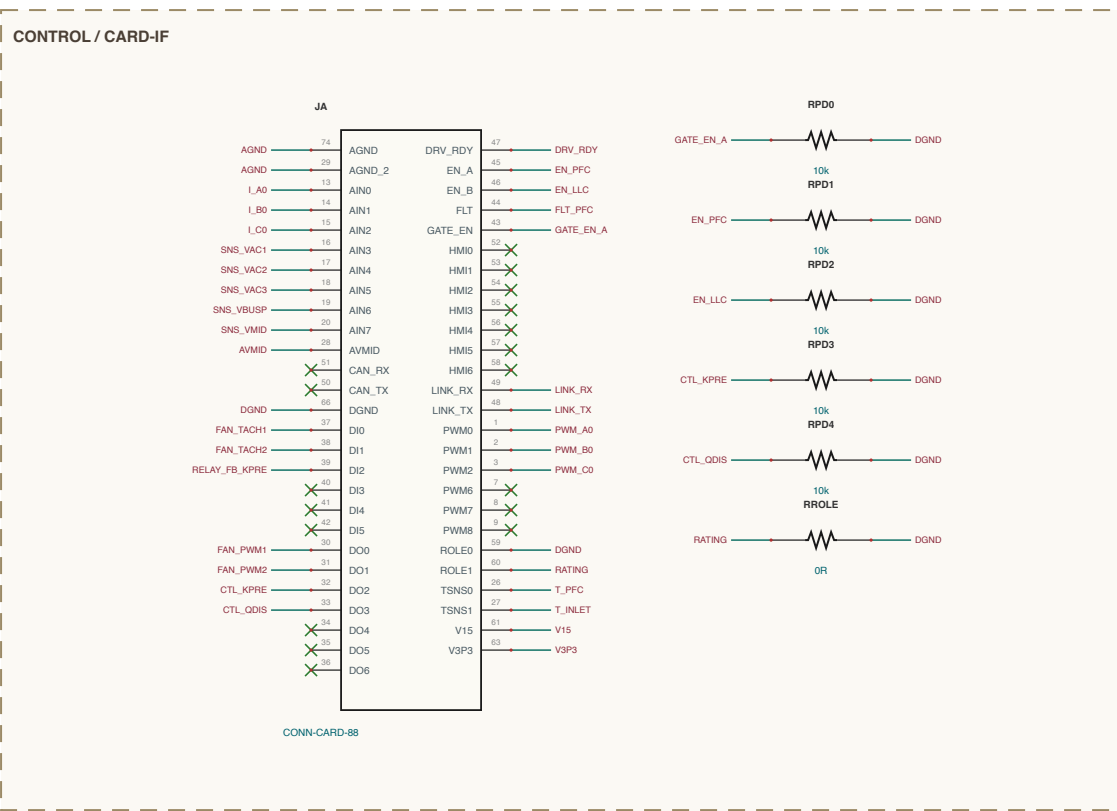
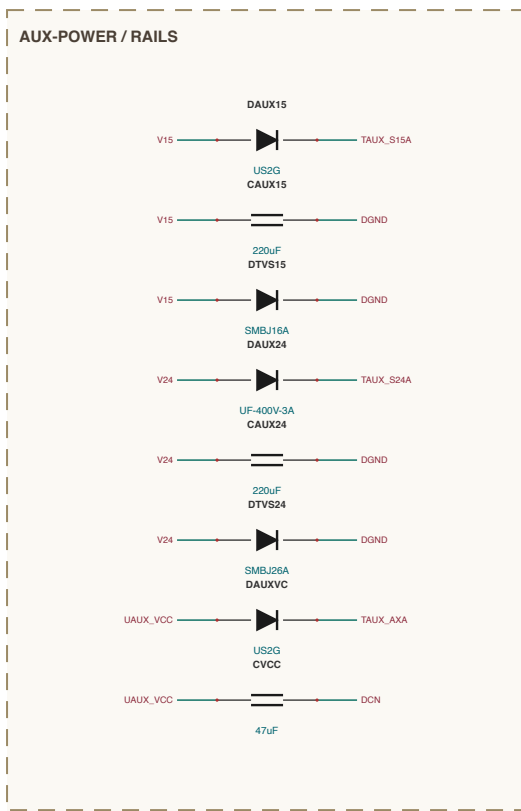
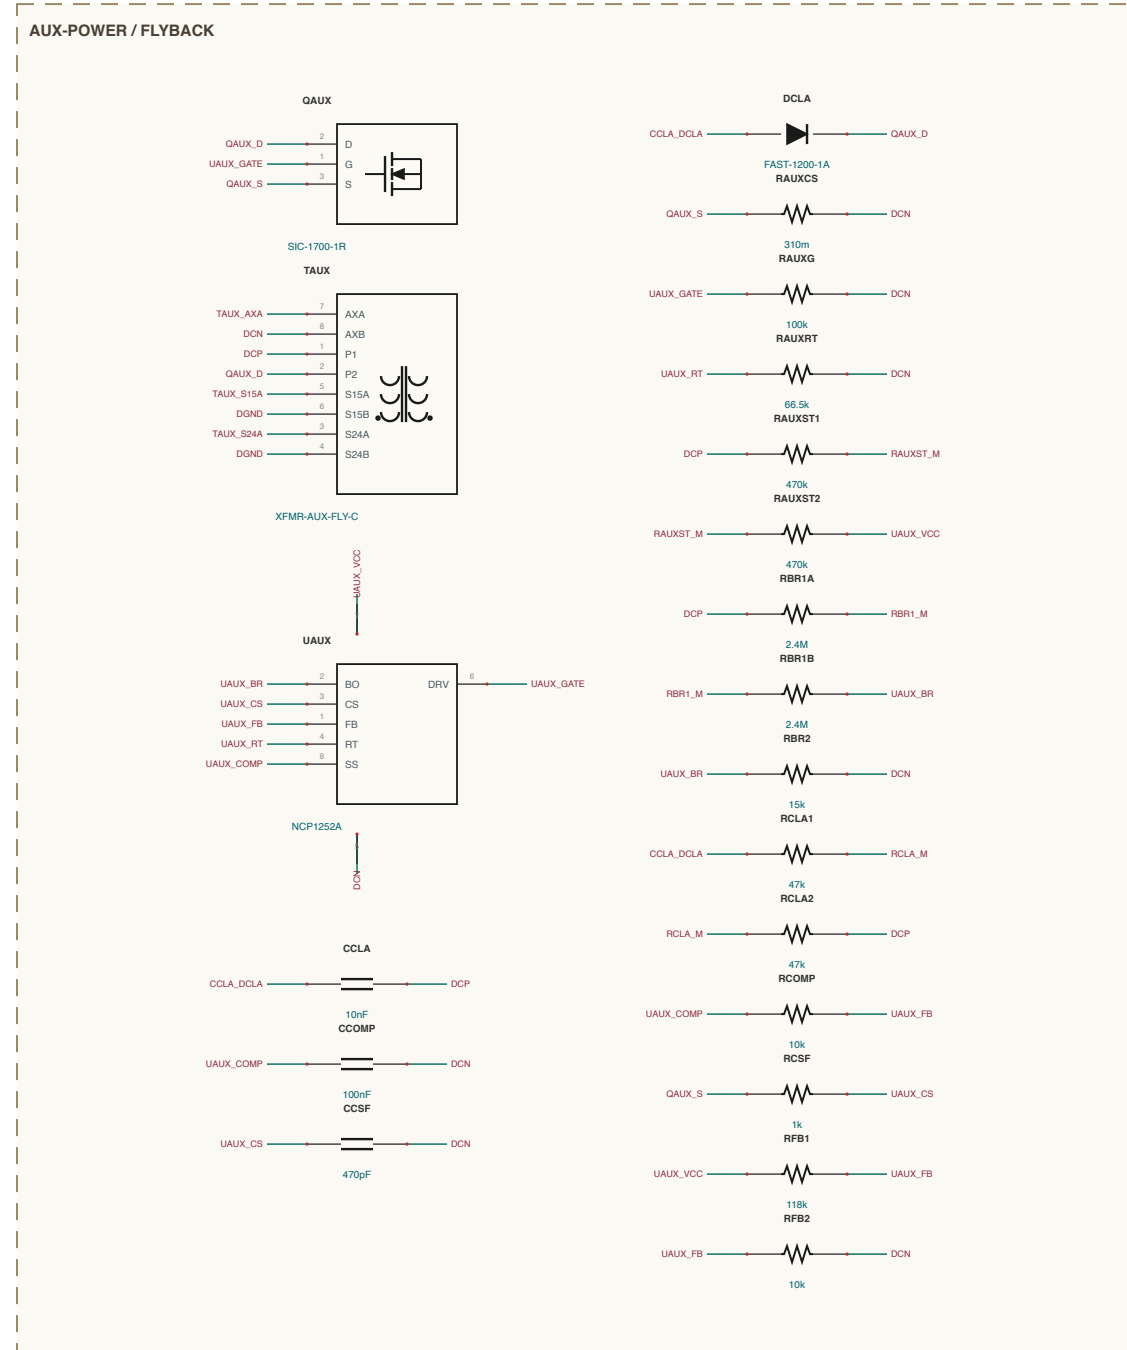
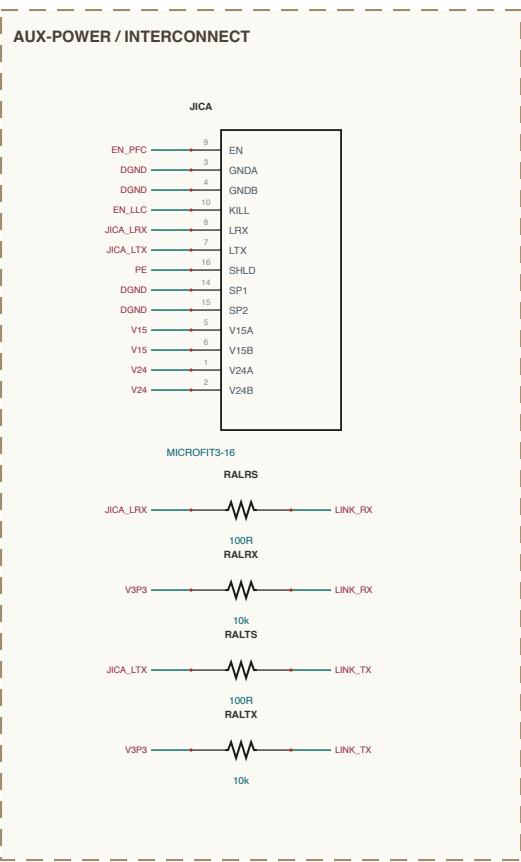
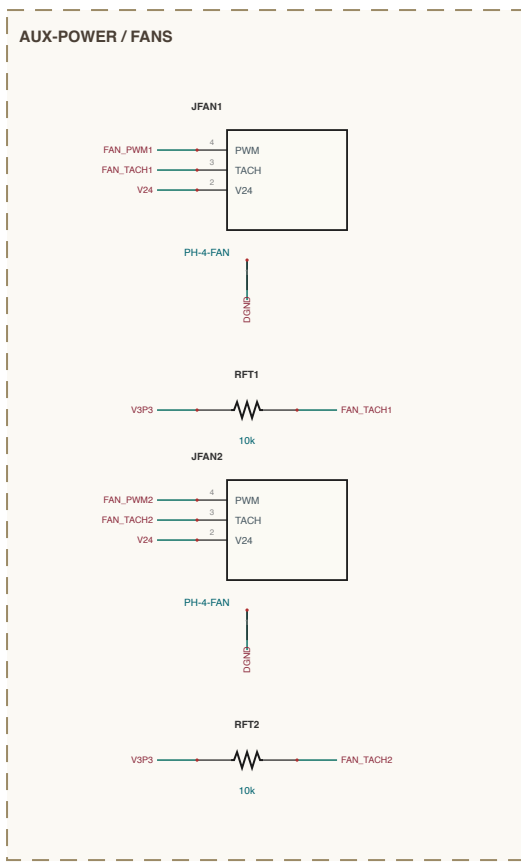
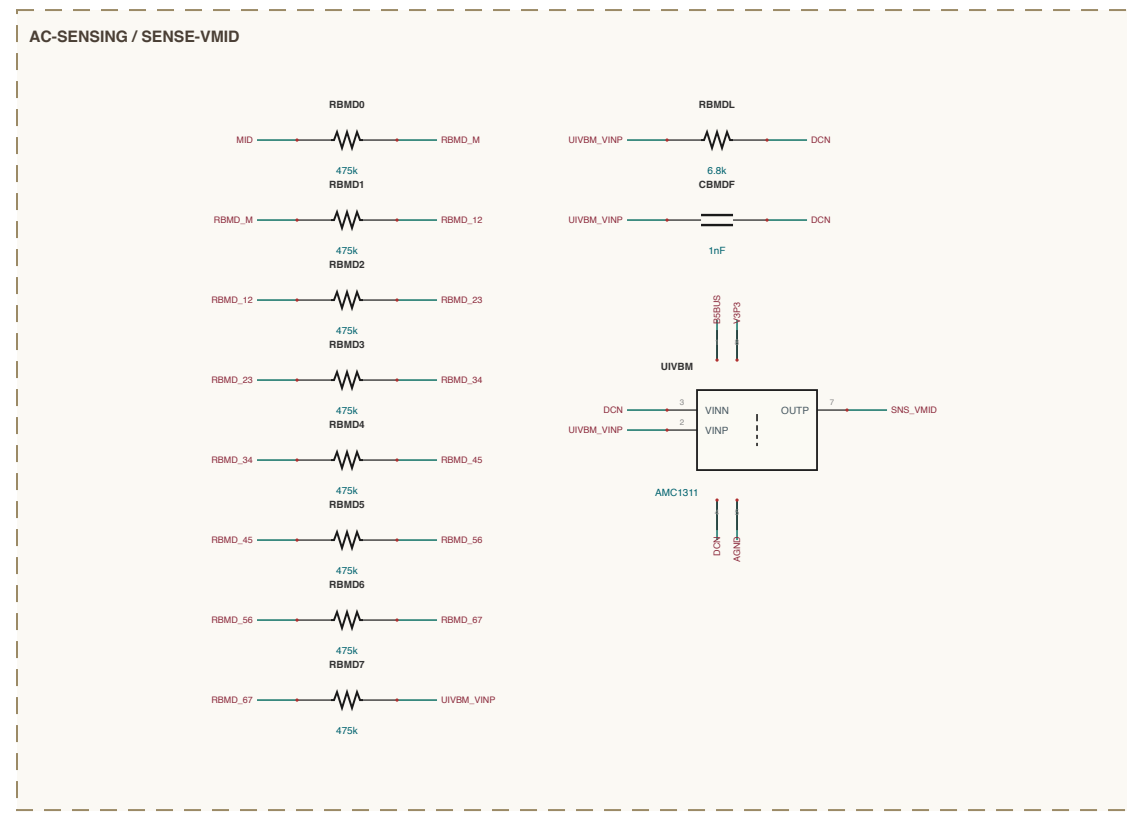
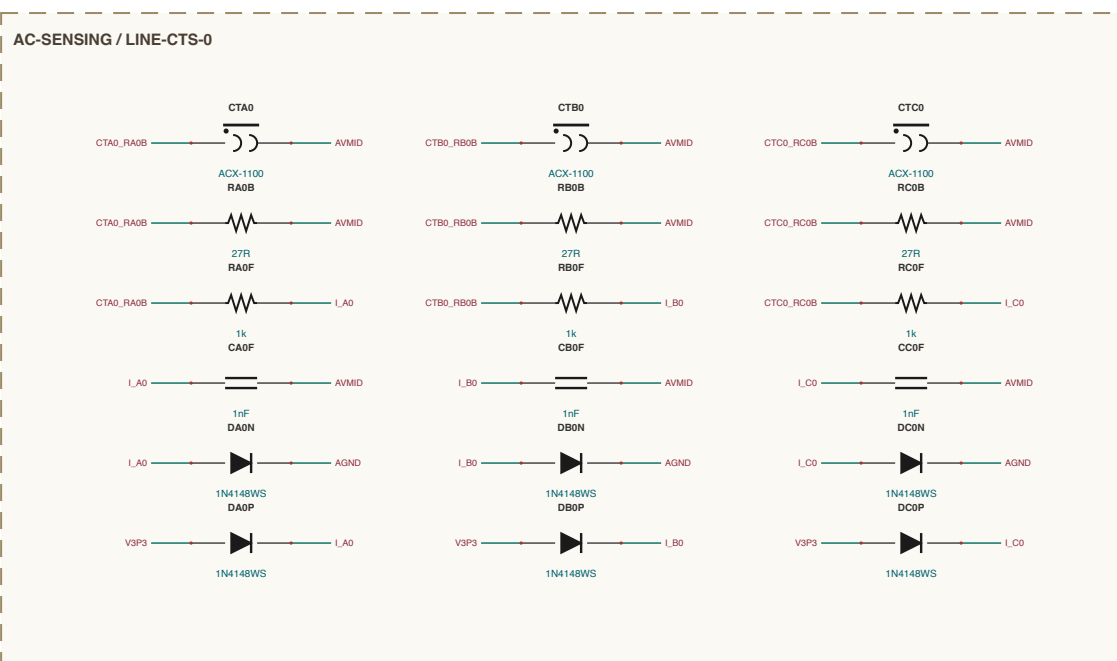
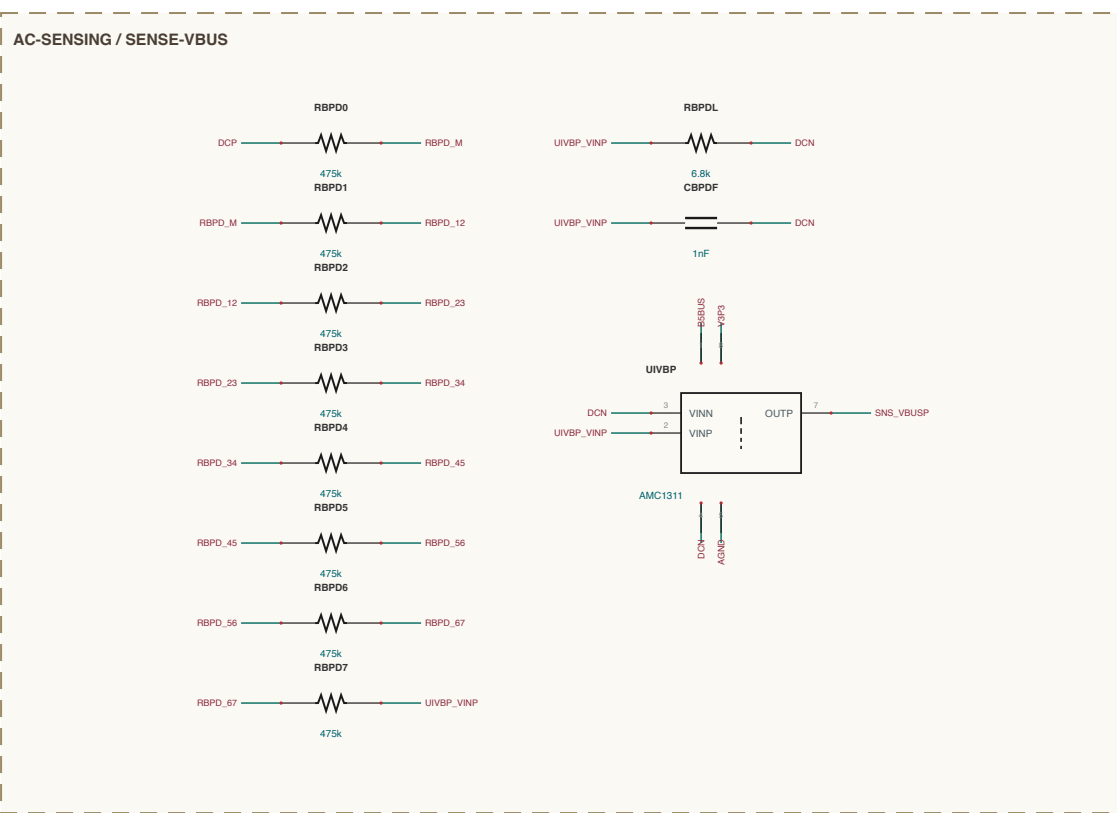
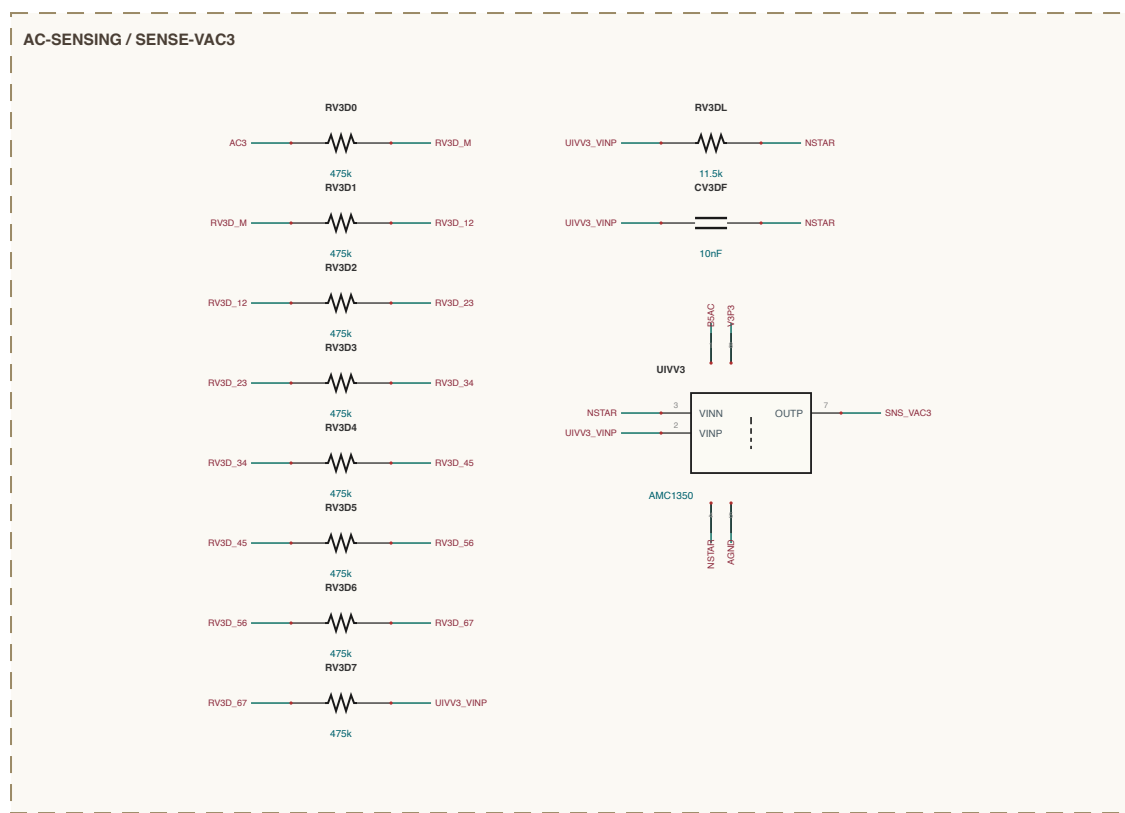
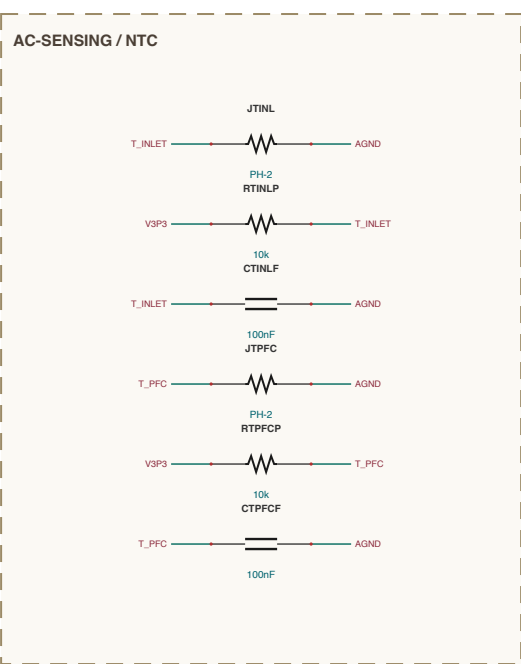
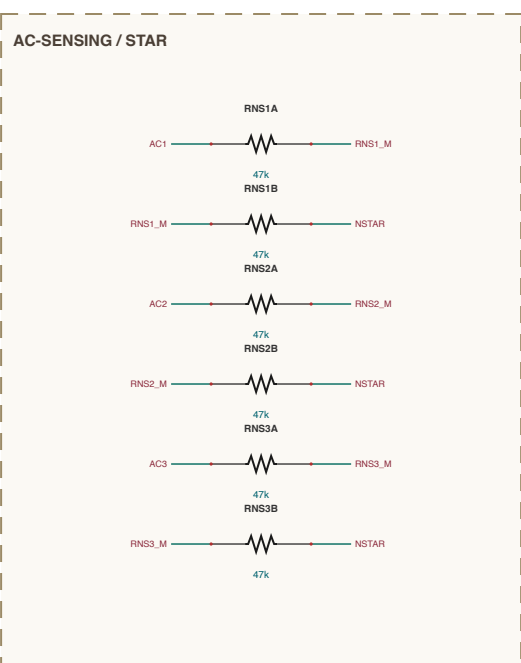
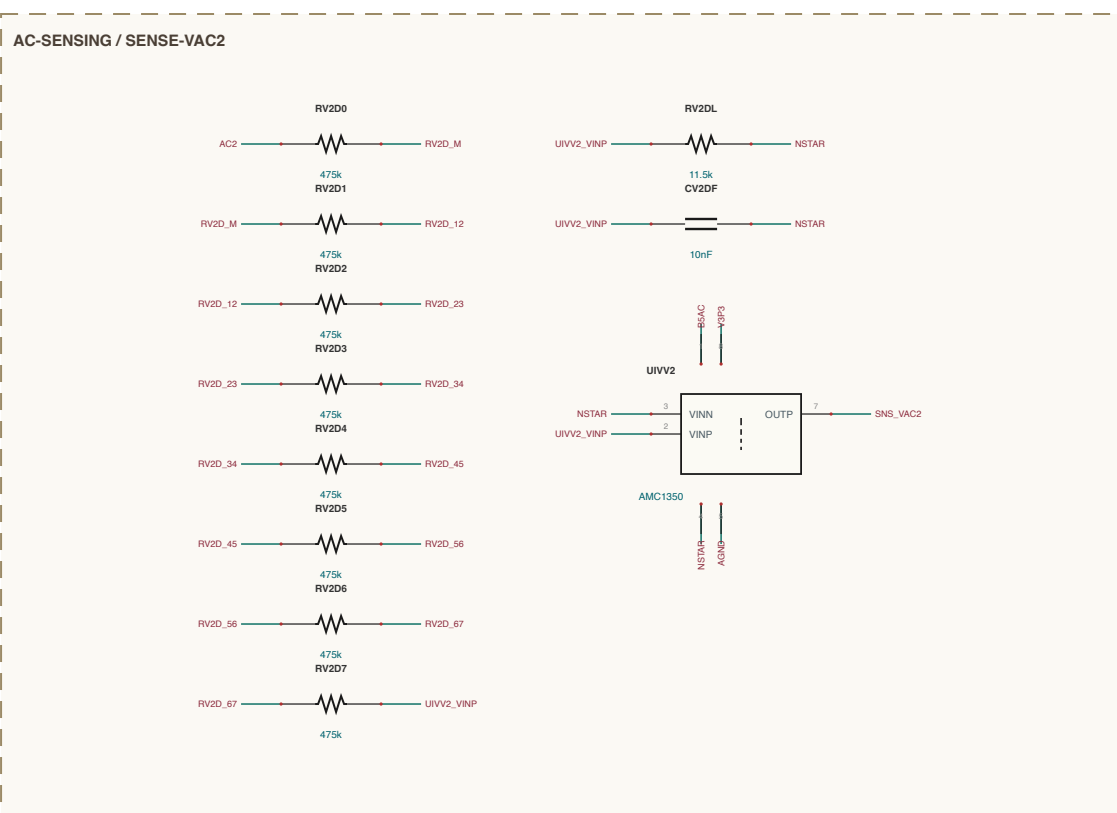
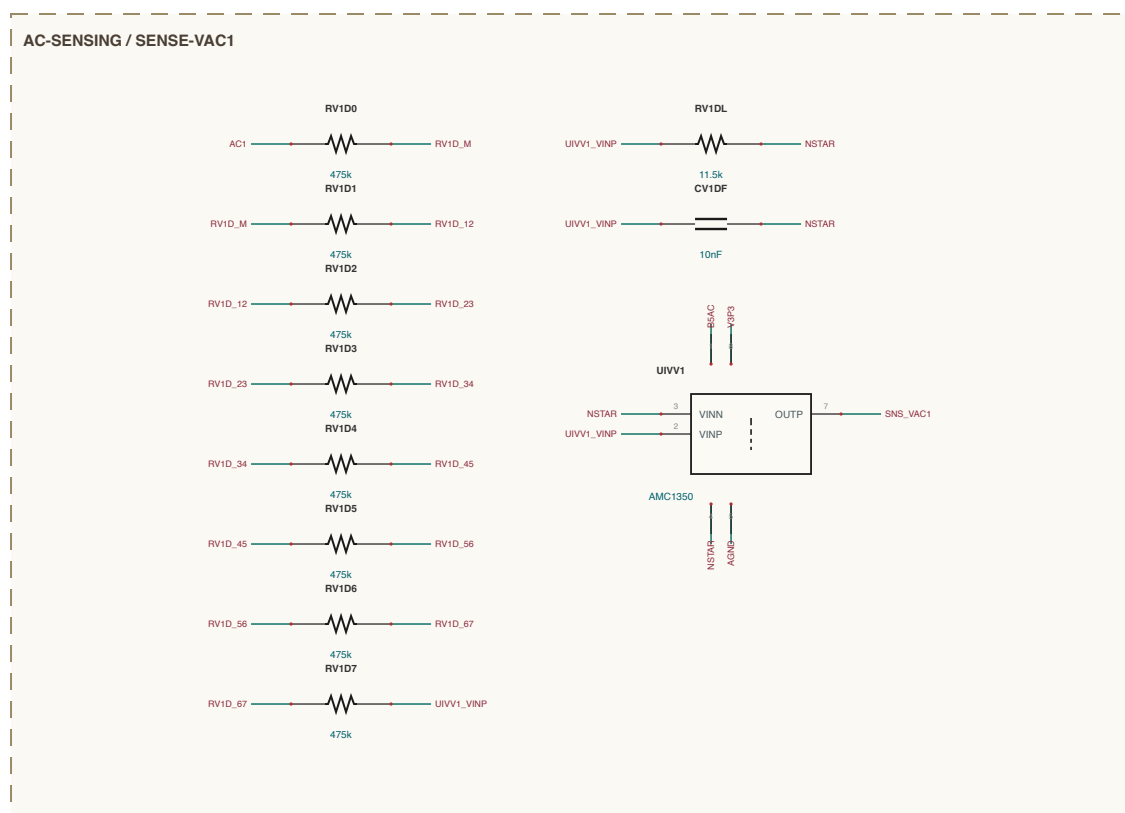


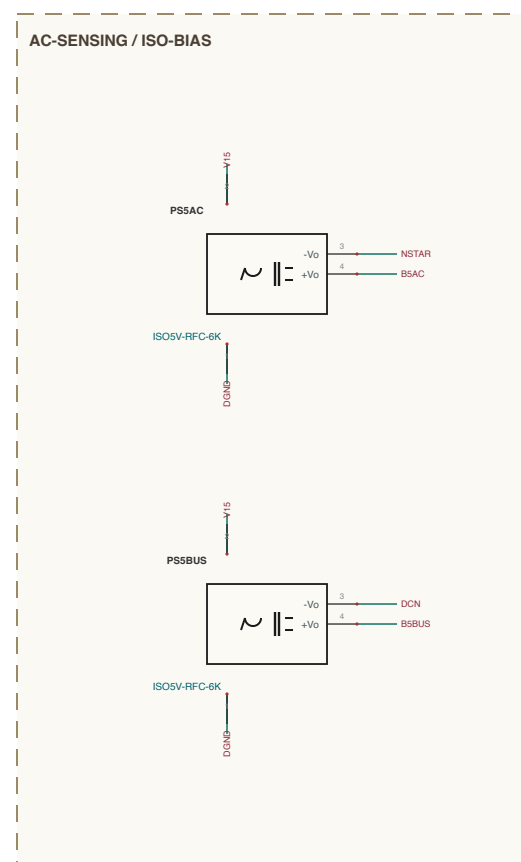

SHEET INDEX

30 kW AC-DC (over) 1 of 3

AC-SENSENG - 8 sections

AUX-POWER - 4 sections

CONTROL - 6 sections

REFUELLING - 4 sections

DC-LINK - 3 sections

WINDUP-PVC - 3 sections

rev D.3 - 27 sections - 271 components

NET NAMING

internal junctions are named for what they join


Usual: `«Pb»-node at that IC pin e.g. VDDA, VDDP`

Reflows: `M midpoint of a series pair e.g. REFLX_M`


Reflows: `cross-join between ReflowsICs e.g. RWD1_01`

all others are explicit design nets


BANKS-SP / SP-MATRIX

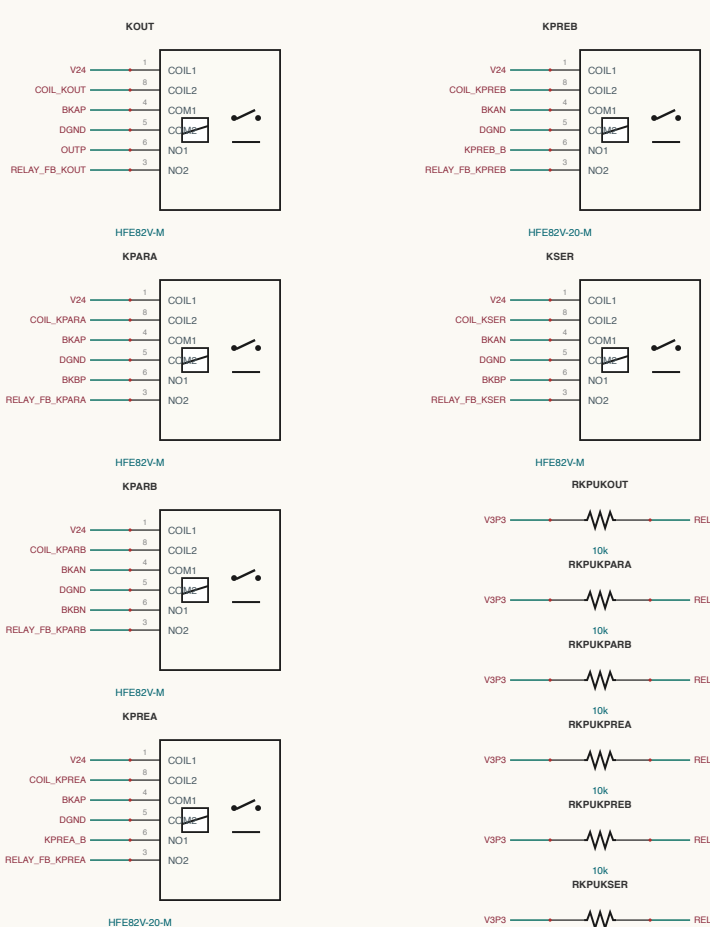


BANKS-SP / BLEEDERS

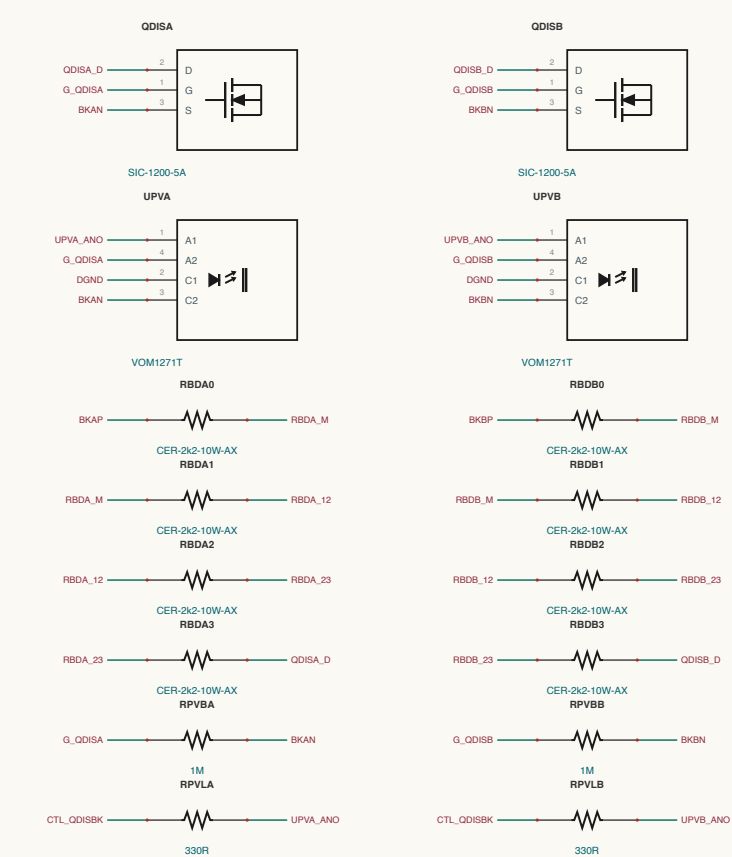


CONTROL / COL-DRIVER

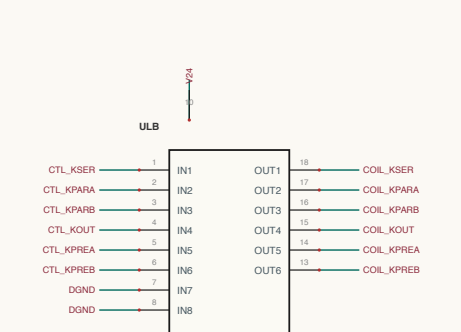


LLC-LEG3 / LEG-3

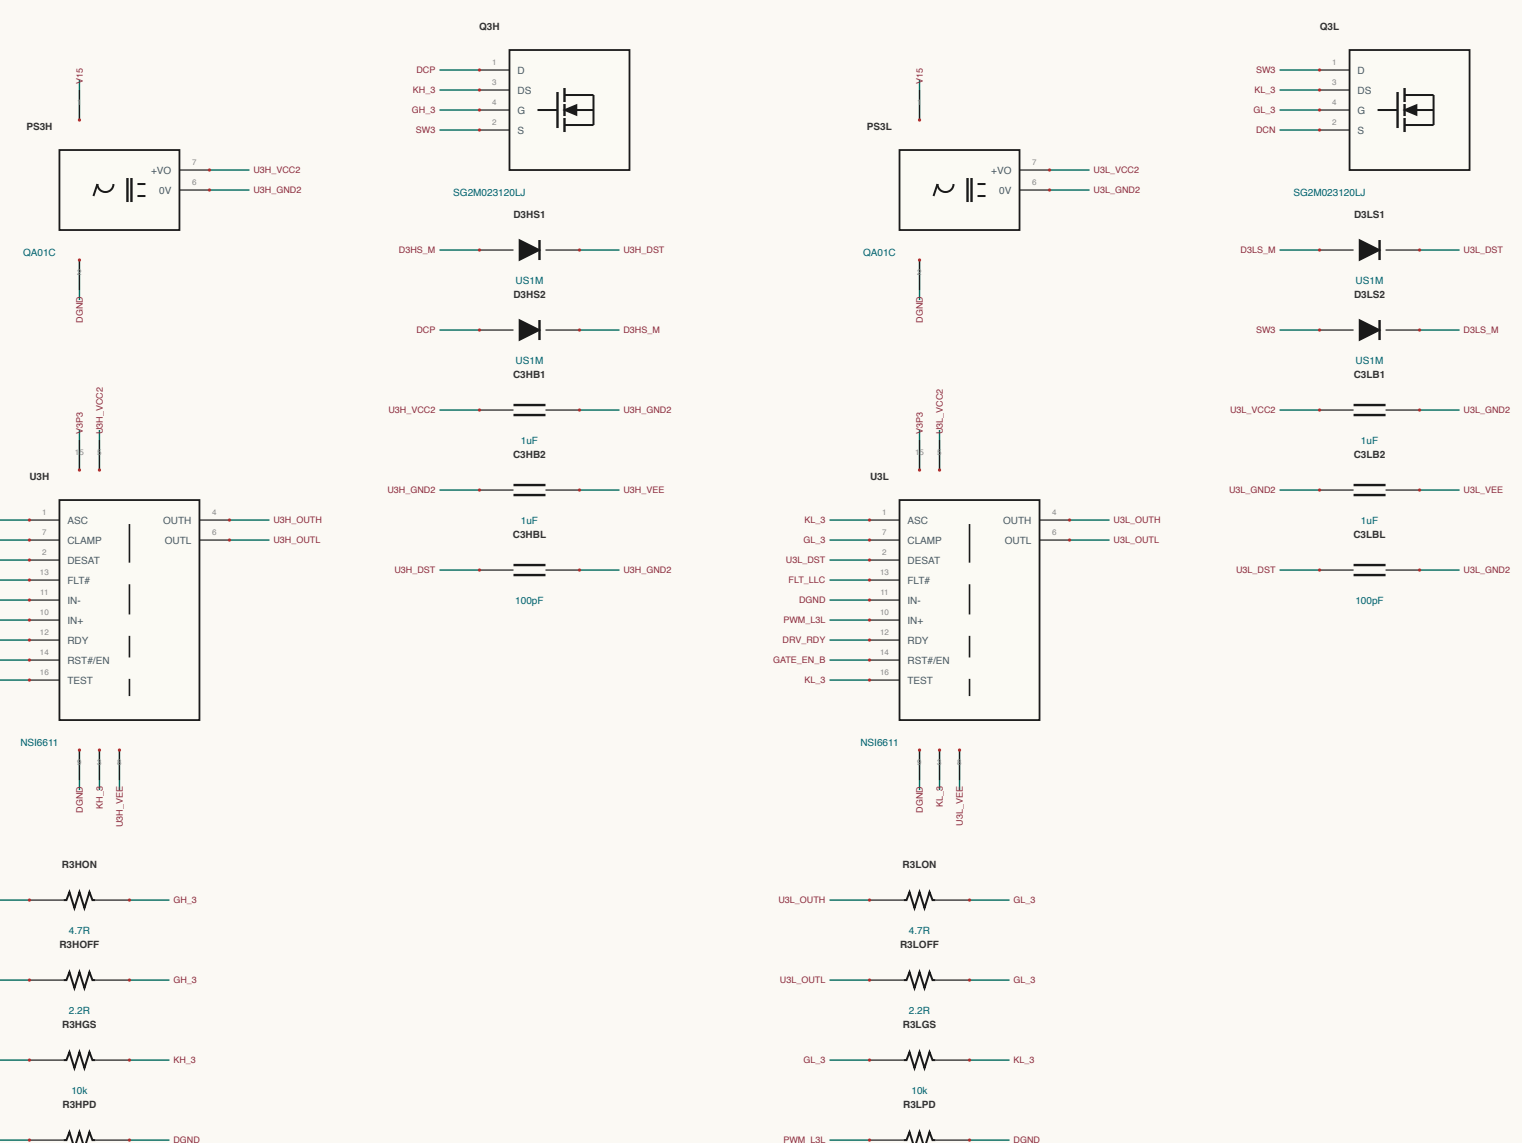


OUTPUT-SENSING / SO-BIAS

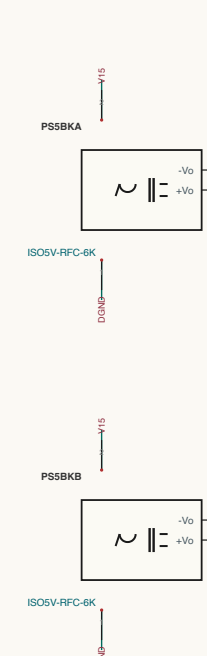


BANKS-SP / BANK-B

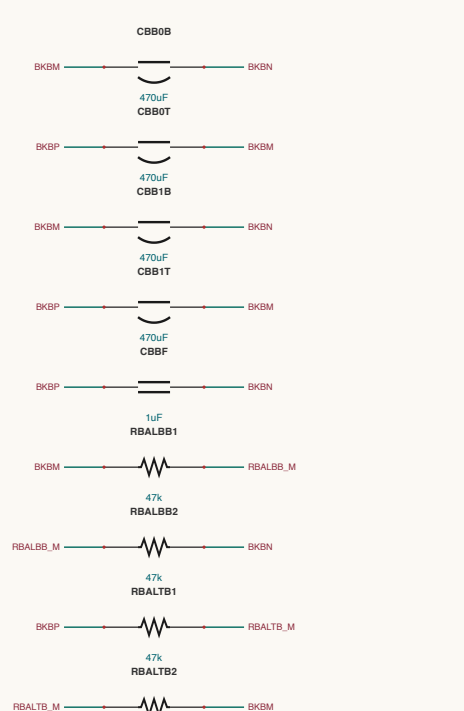


COMMS-HBI / CAN

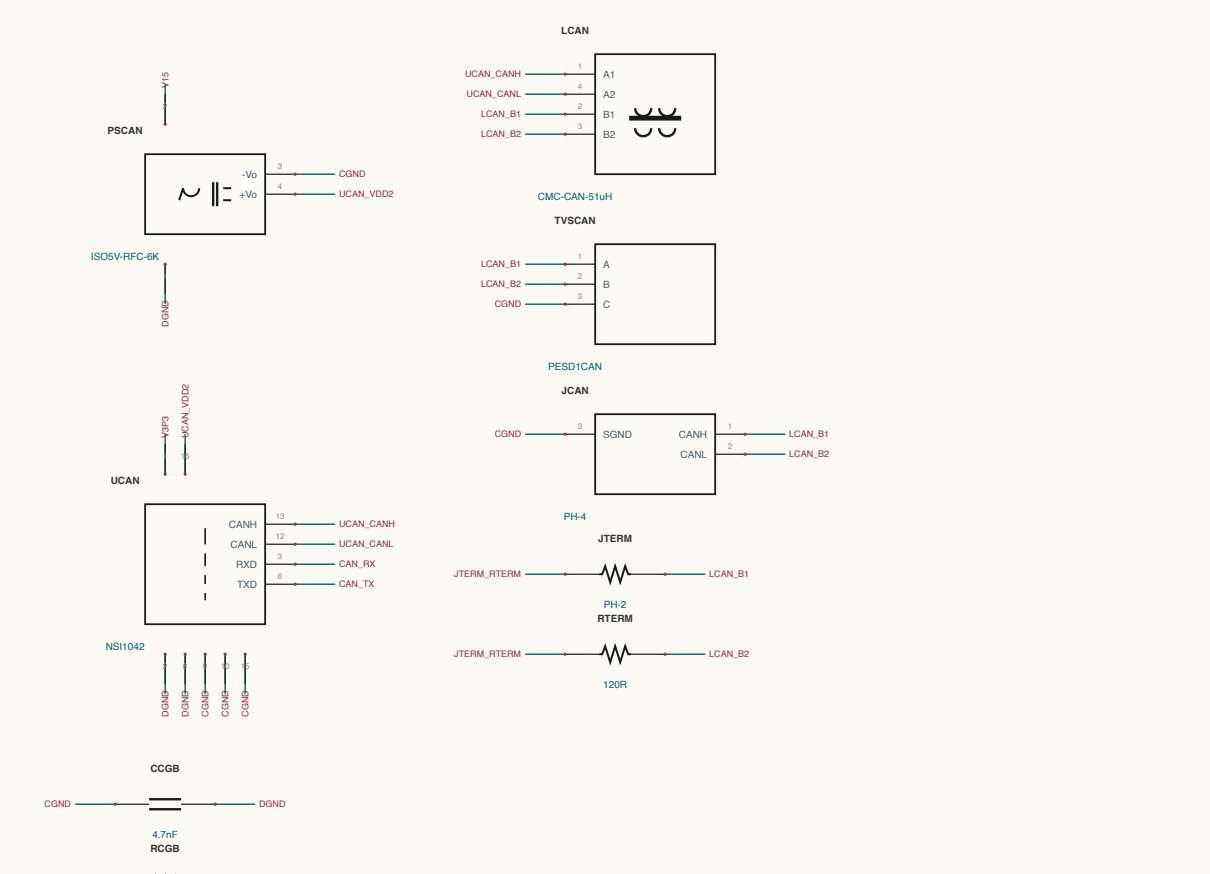


COMMS-HBI / HBI

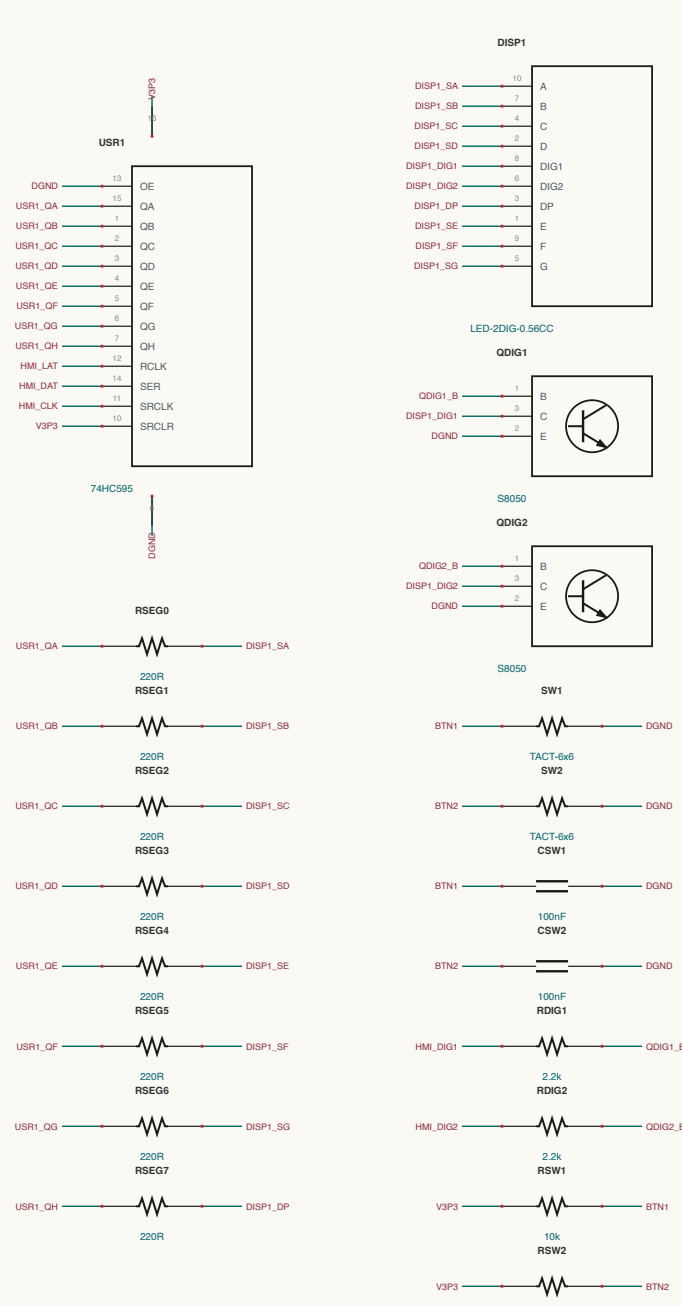


CONTROL / CARD-IF

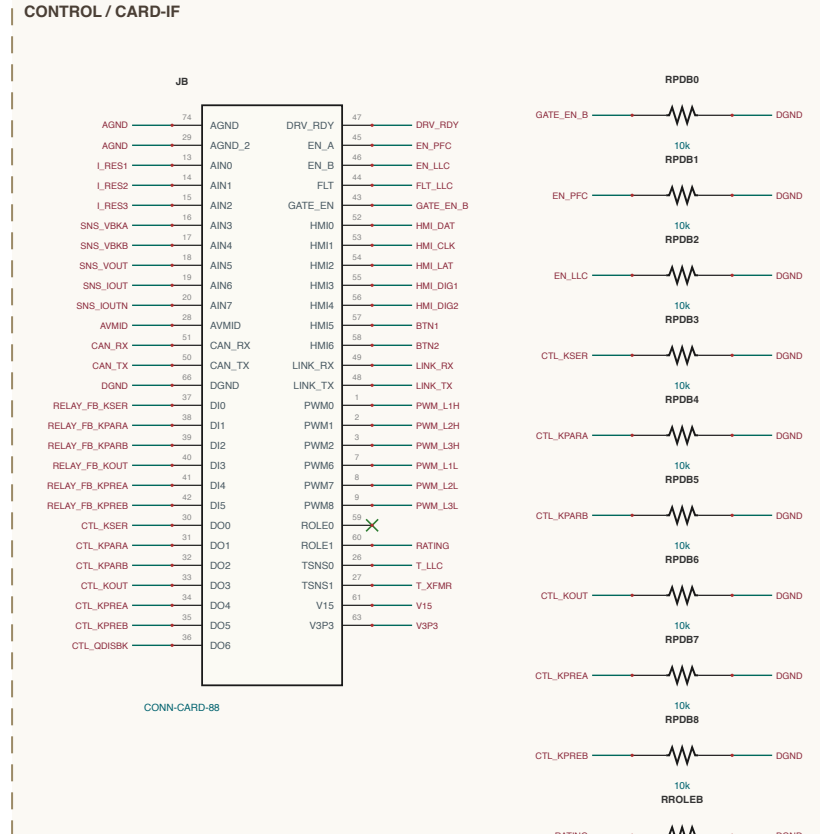


CONTROL / INTERCONNECT

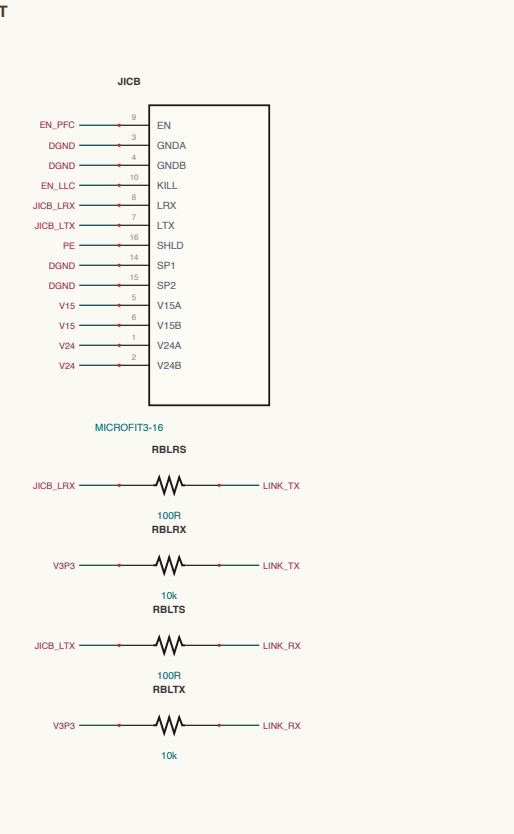

LLC-LEG2 / LEG-2

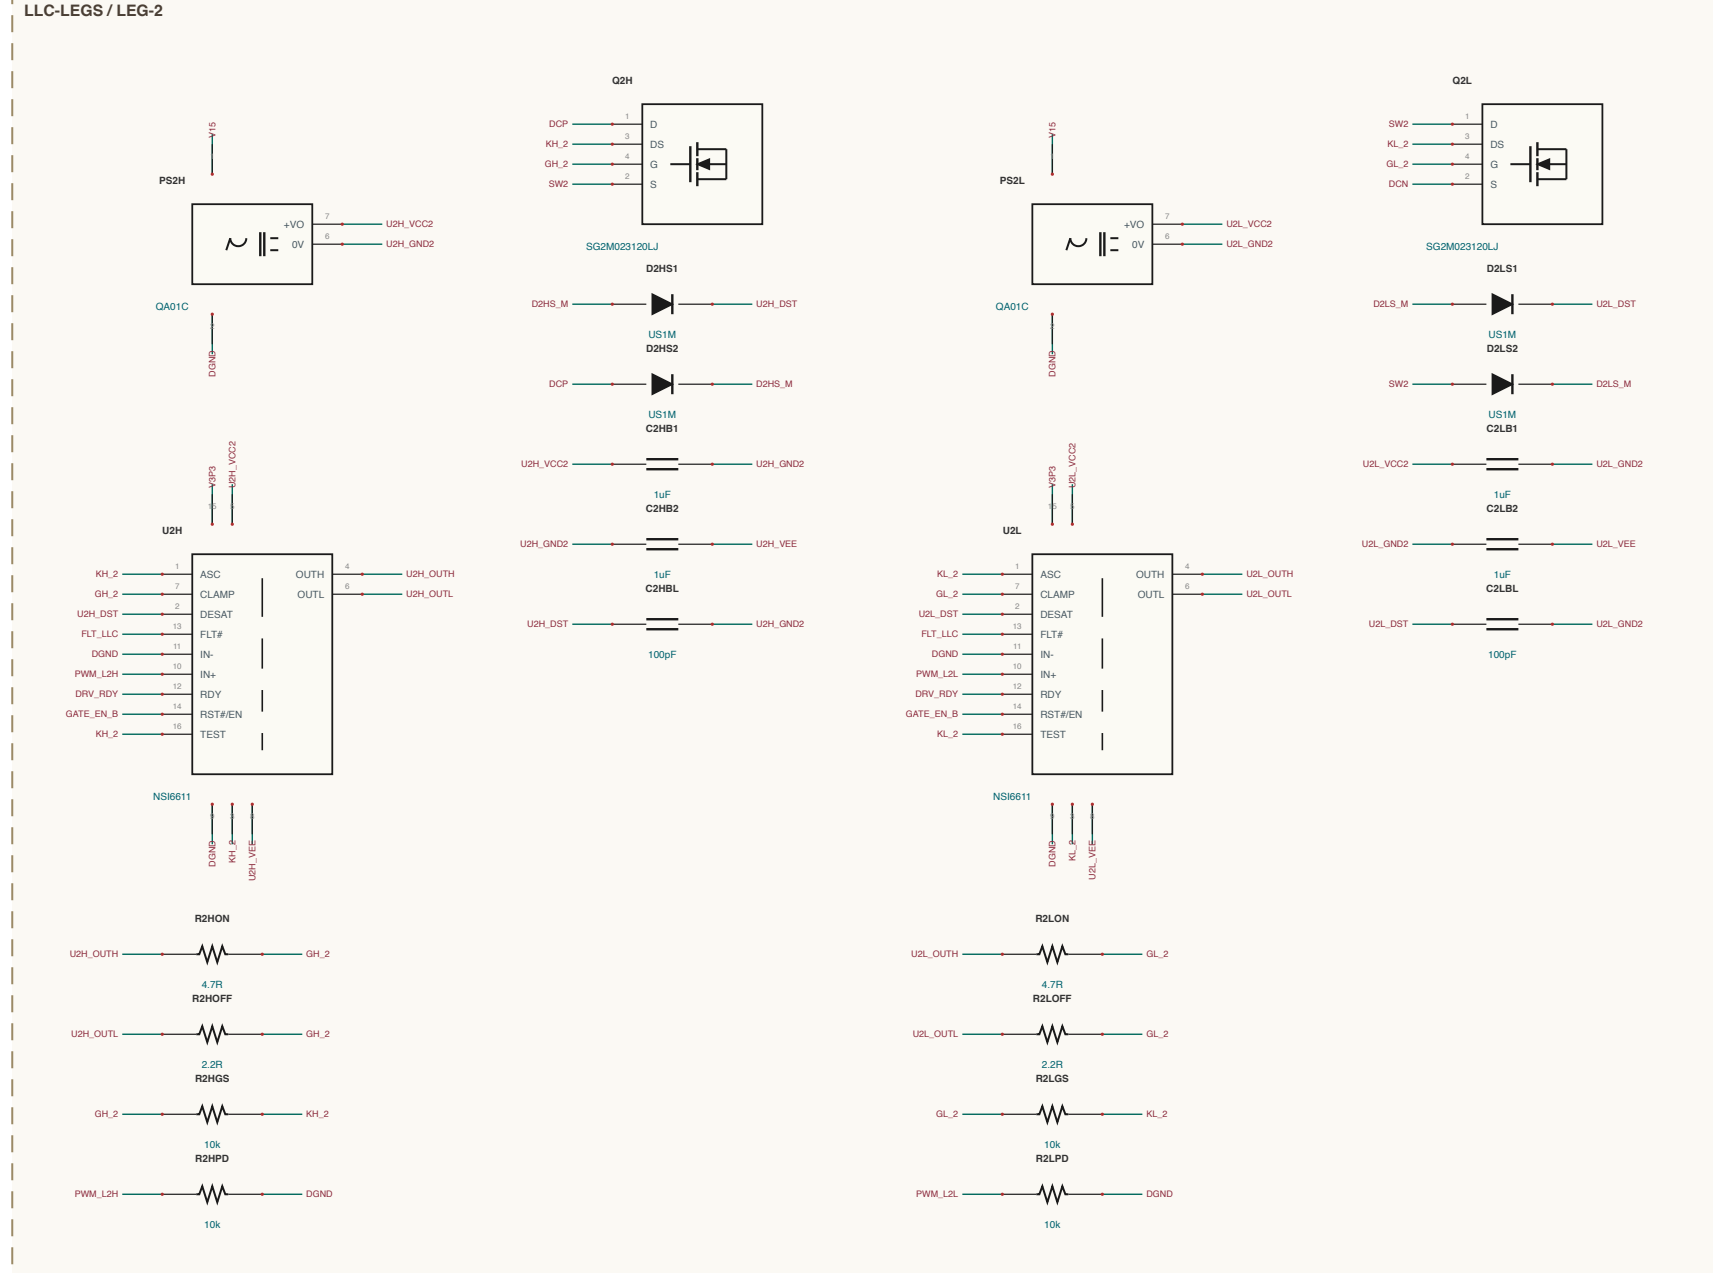

LLC-TANKS / TANK-3

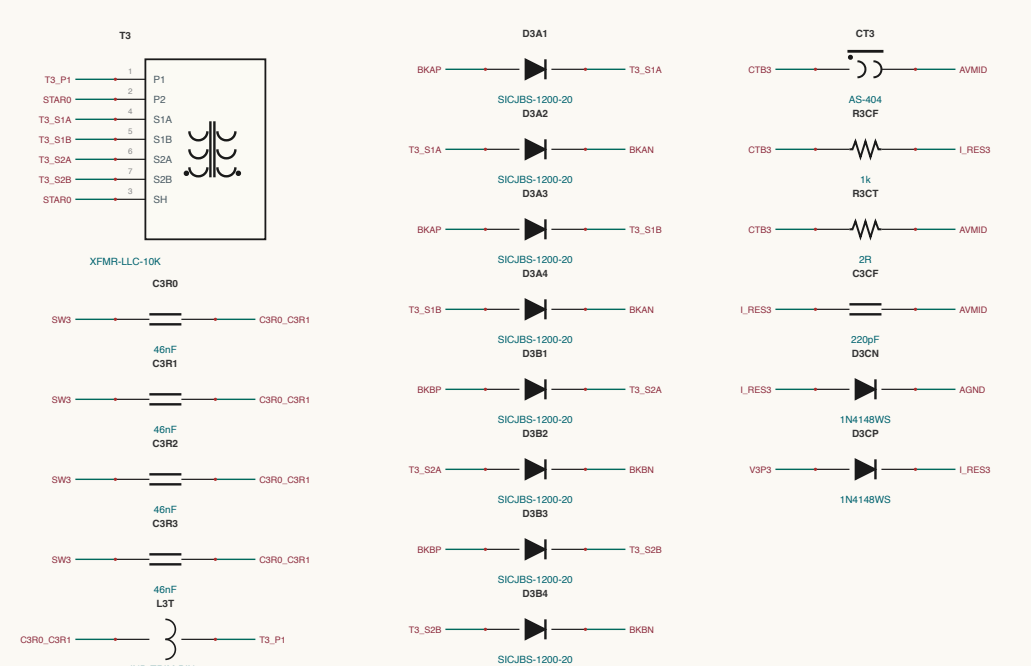

SHEET INDEX

30 kW DC-DC board (3-phase LLC)

OUTPUT-SENSING - 6 sections

BANKS-SP - 4 sections

LLC-LEG3 - 4 sections


CONTROL - 3 sections

LLC-TANKS - 3 sections



COMMS-HBI - 2 sections

See D-3 - 82 sections - 182 components


CONTROL / MCU

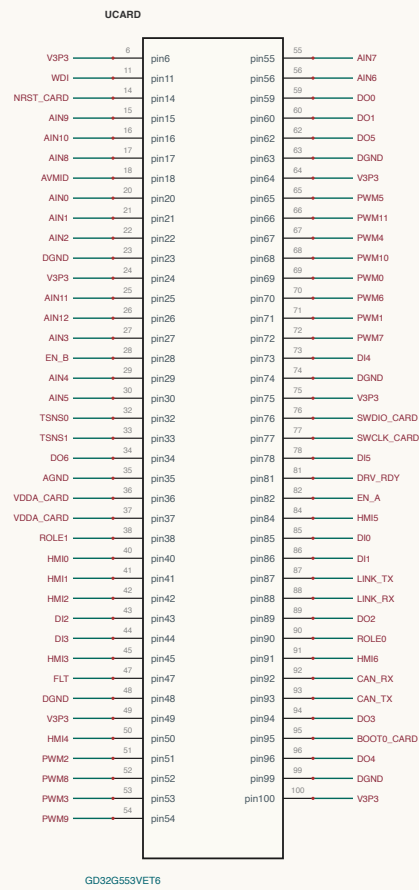


CONTROL / ANALOG-MID

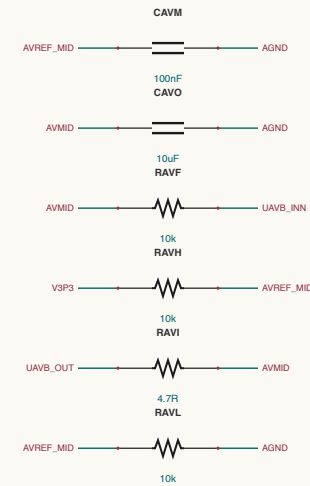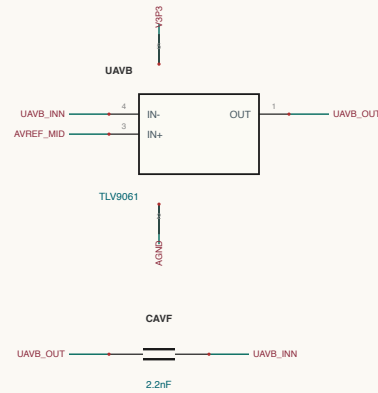


CONTROL / SAFETY

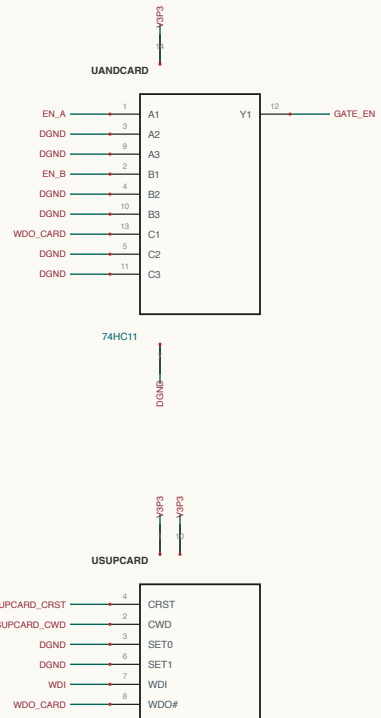


CONTROL / SWD-BOOT

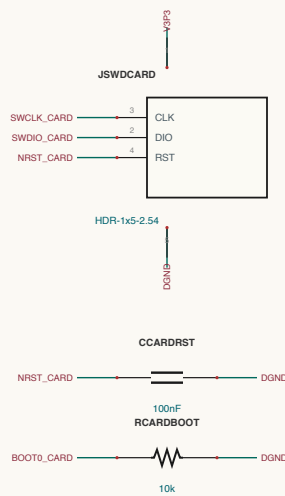


CONTROL / FLT-GROUND



CONTROL / ROLE



CONTROL / BUCK-3V3

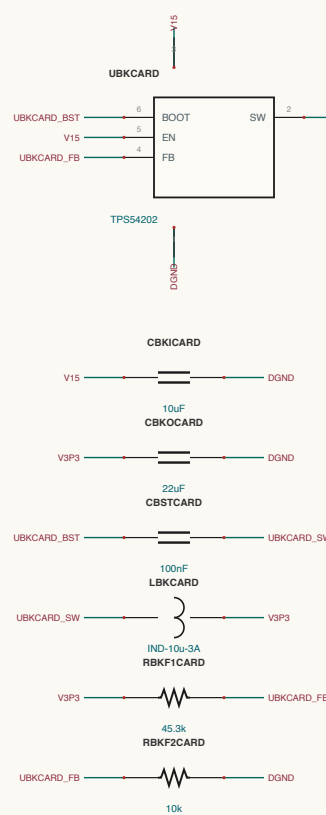

CONTROL / CARD-IF

