
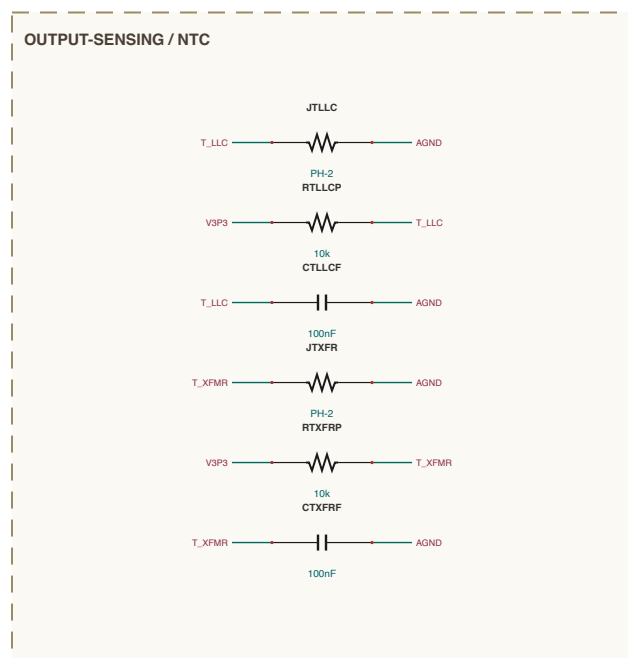
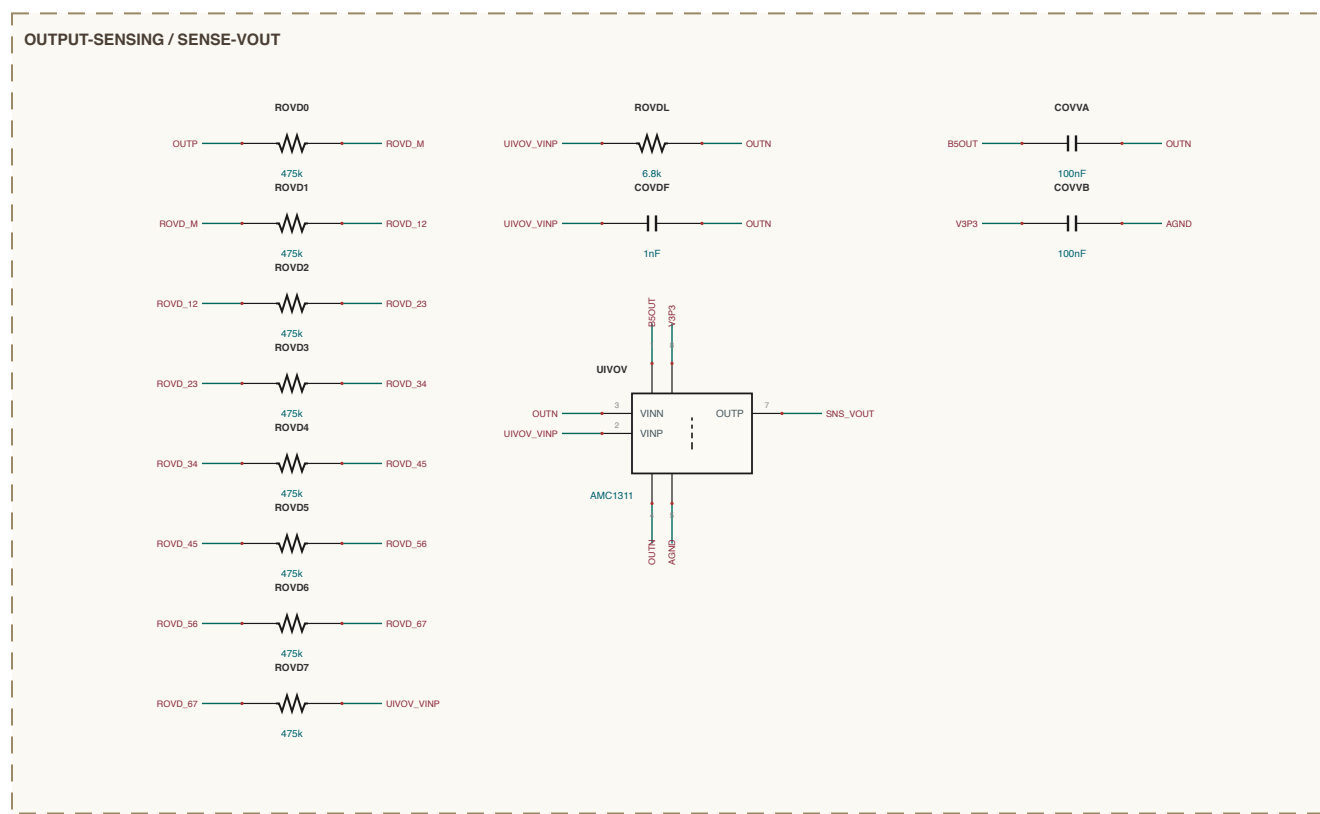
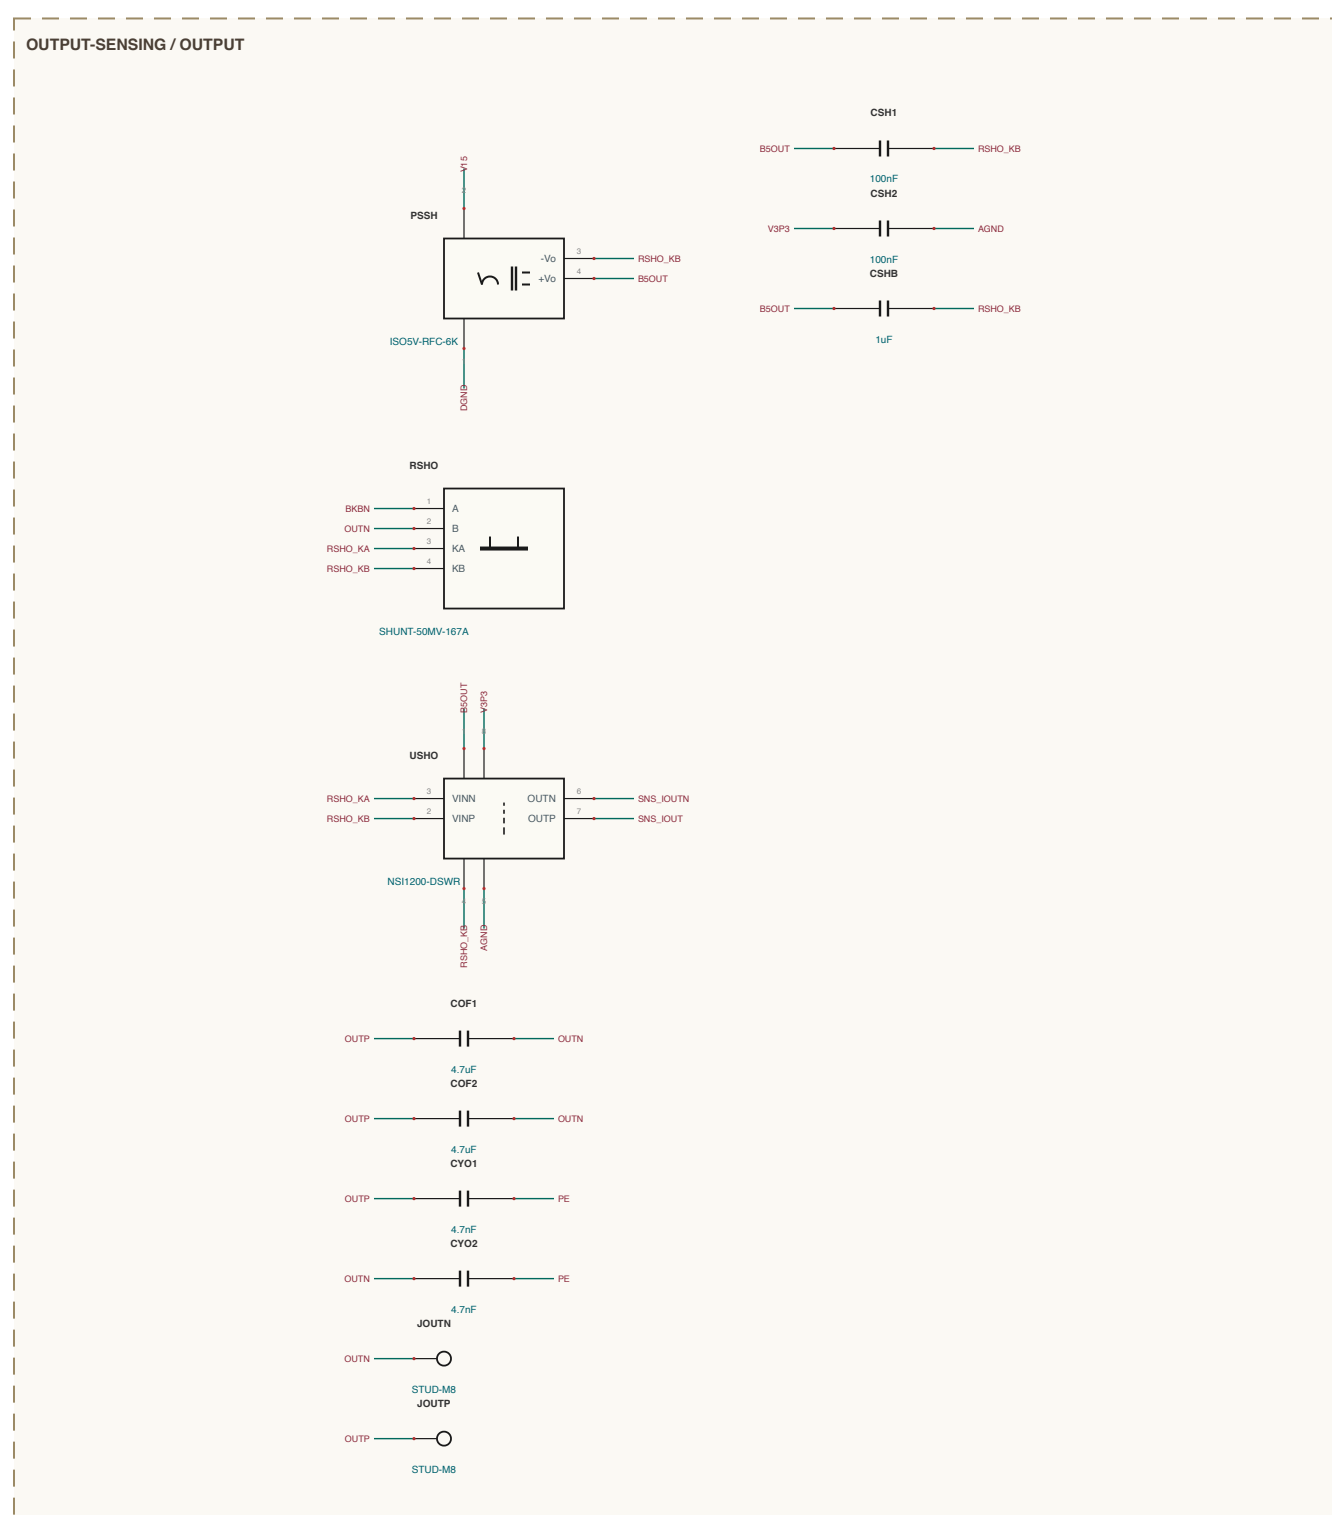
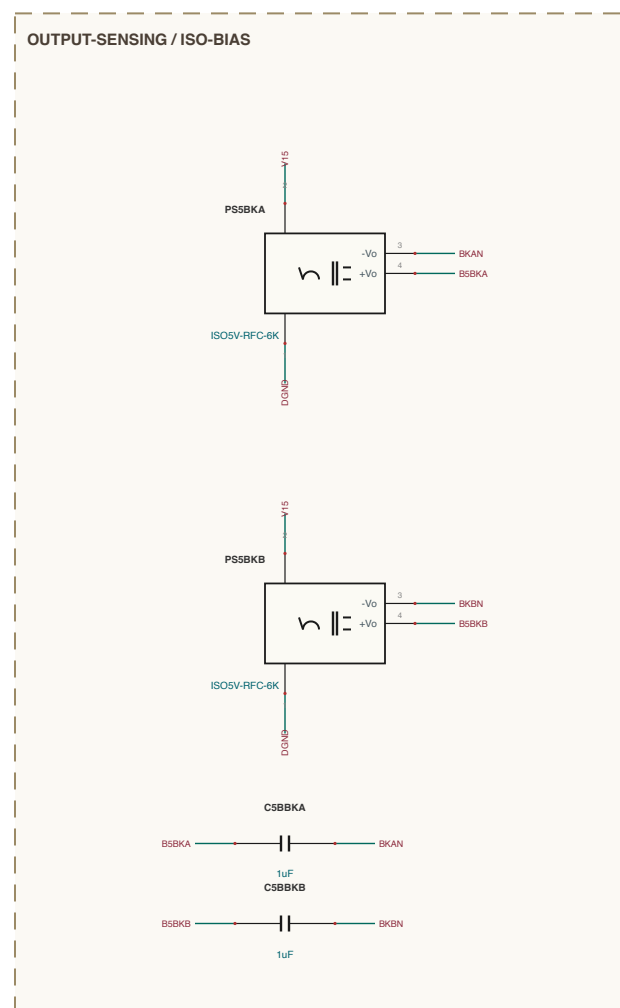
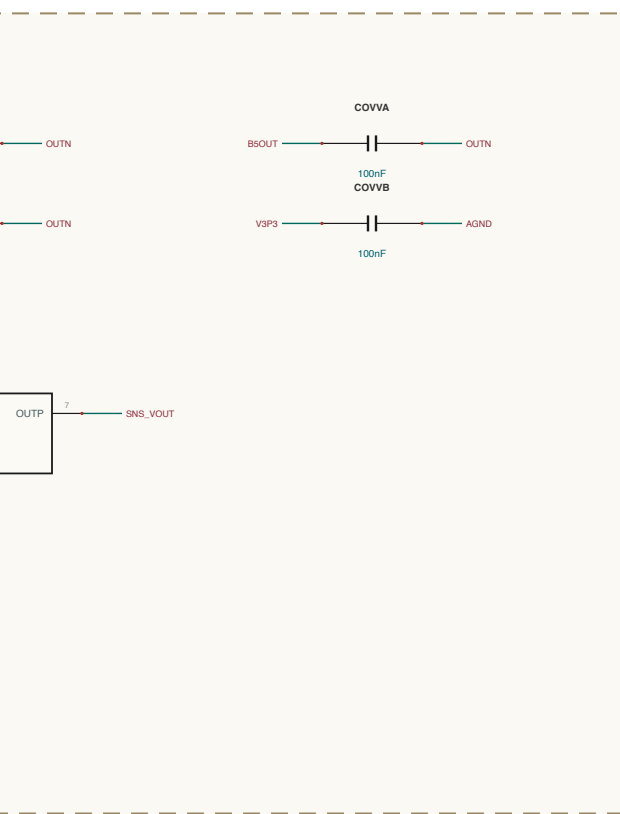
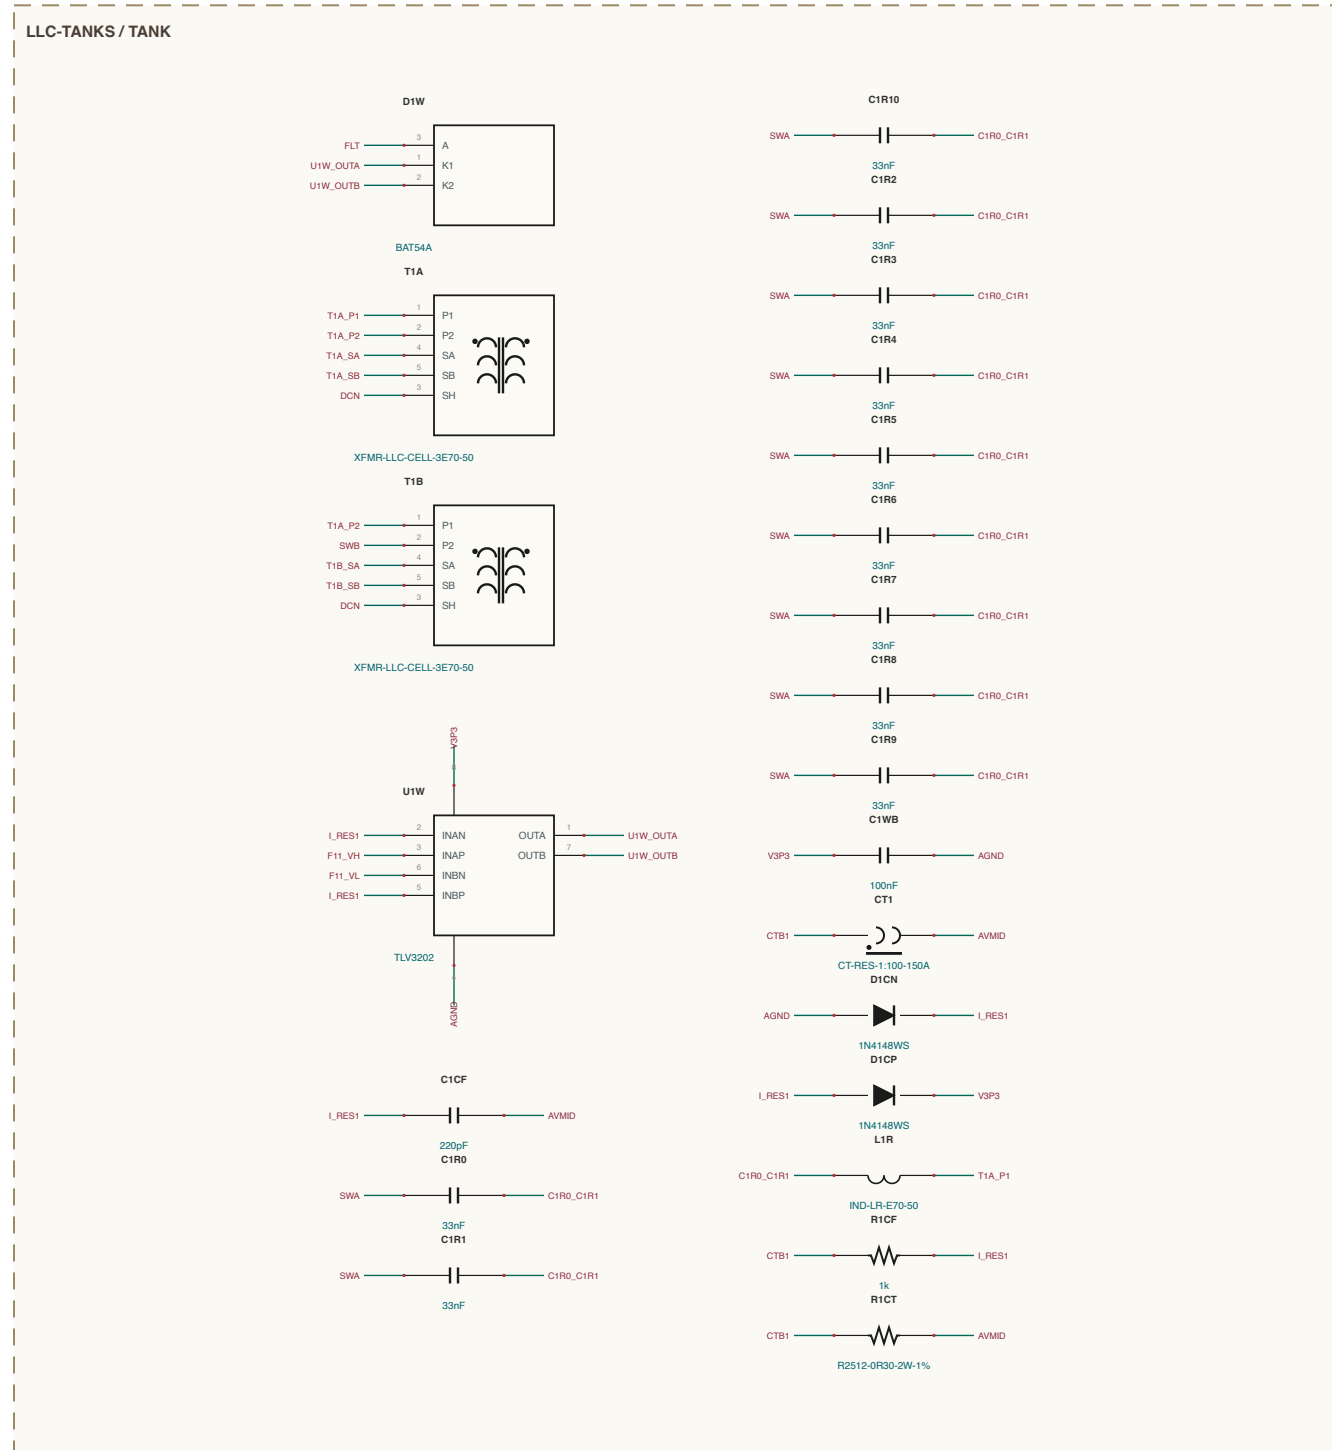
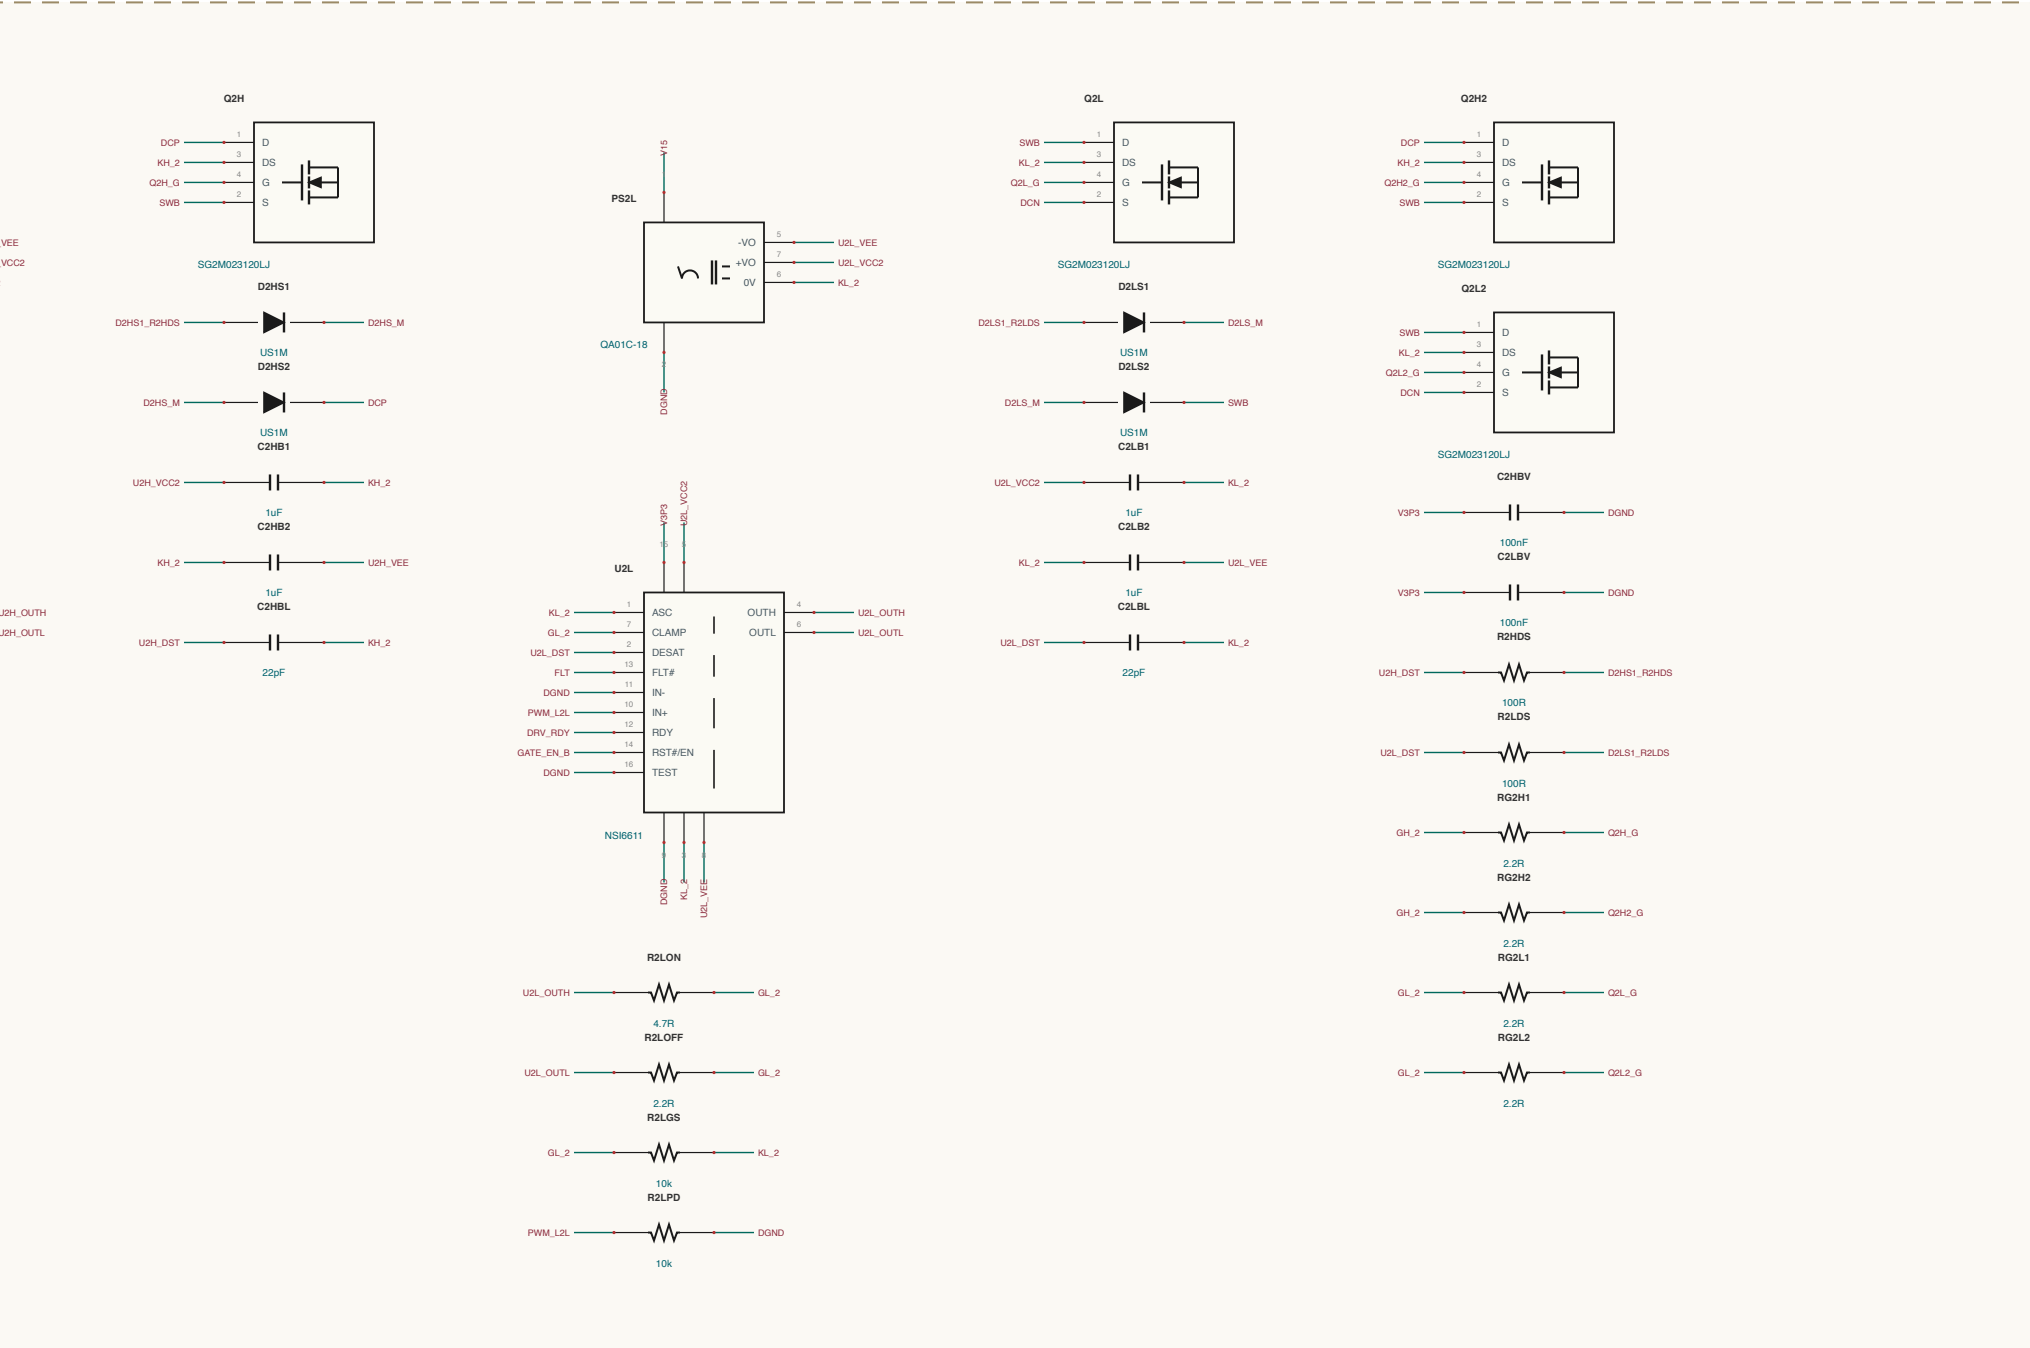
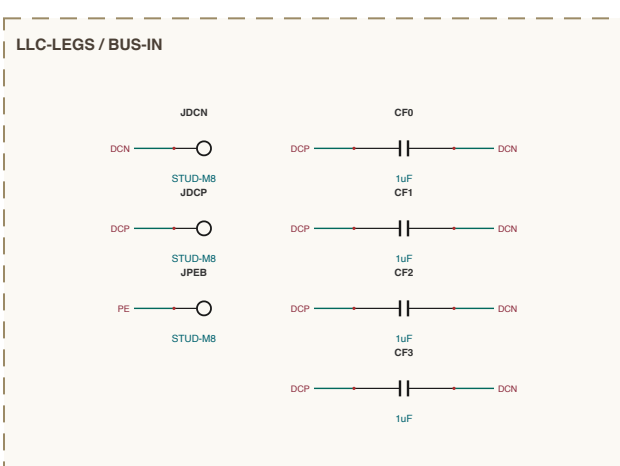
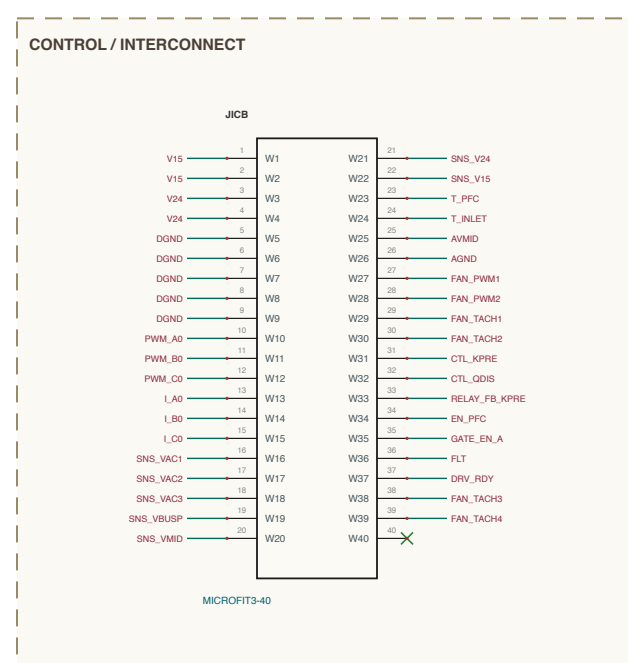
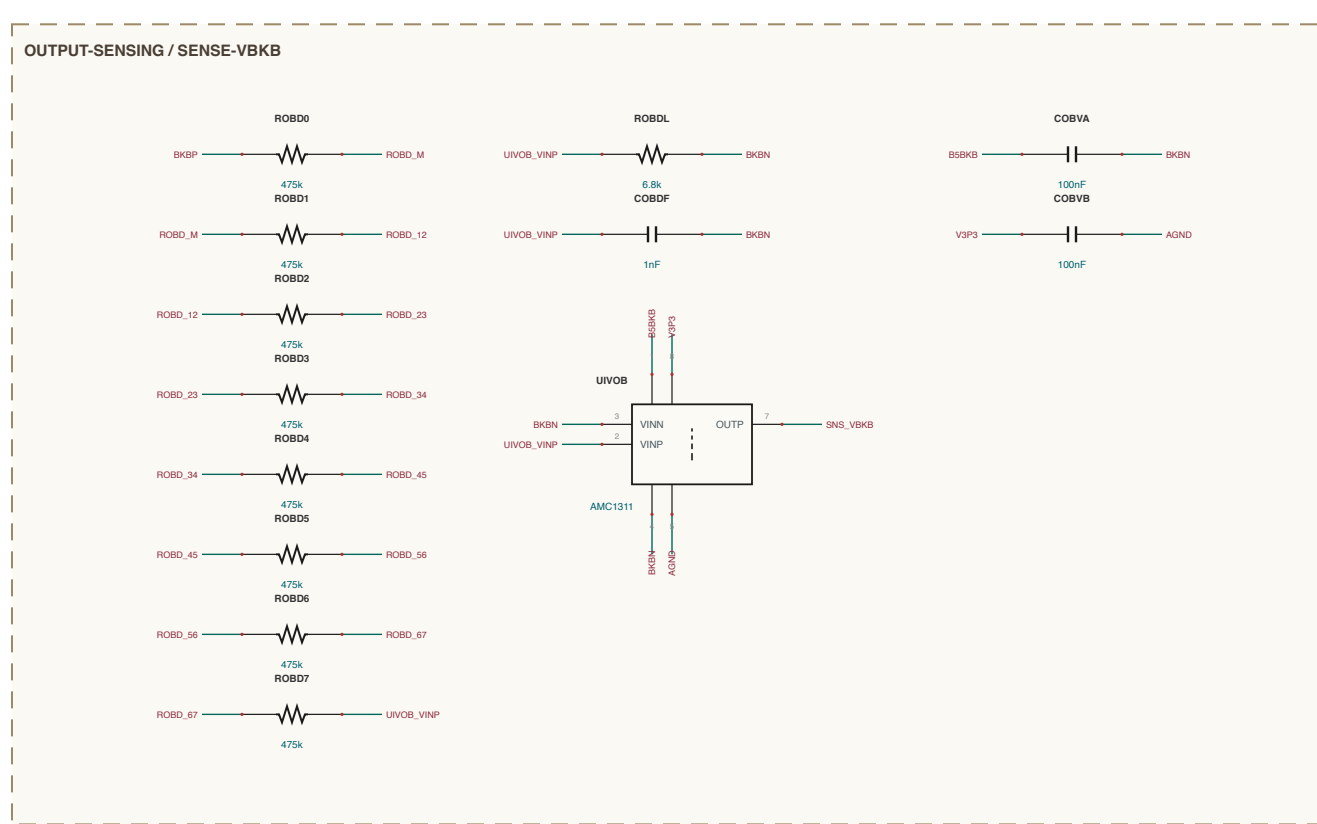
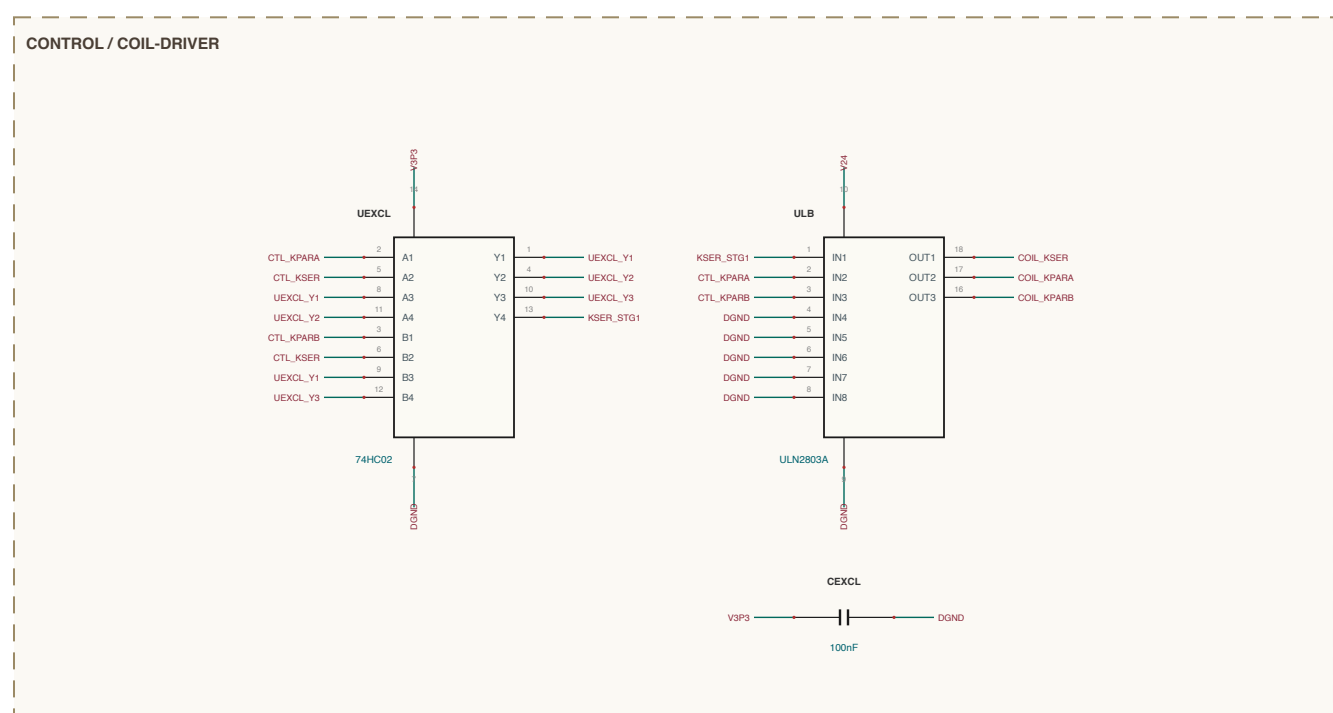
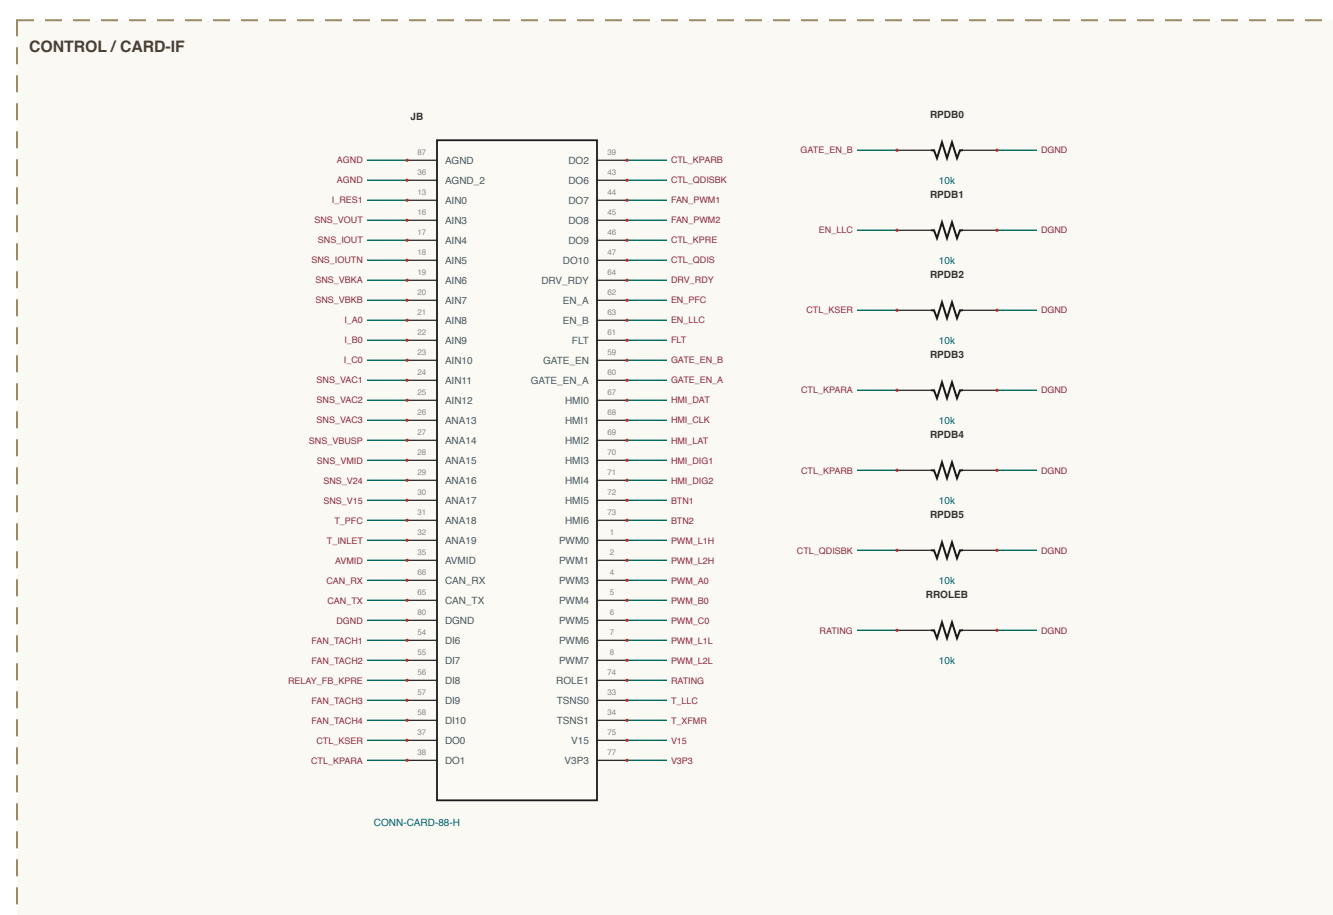
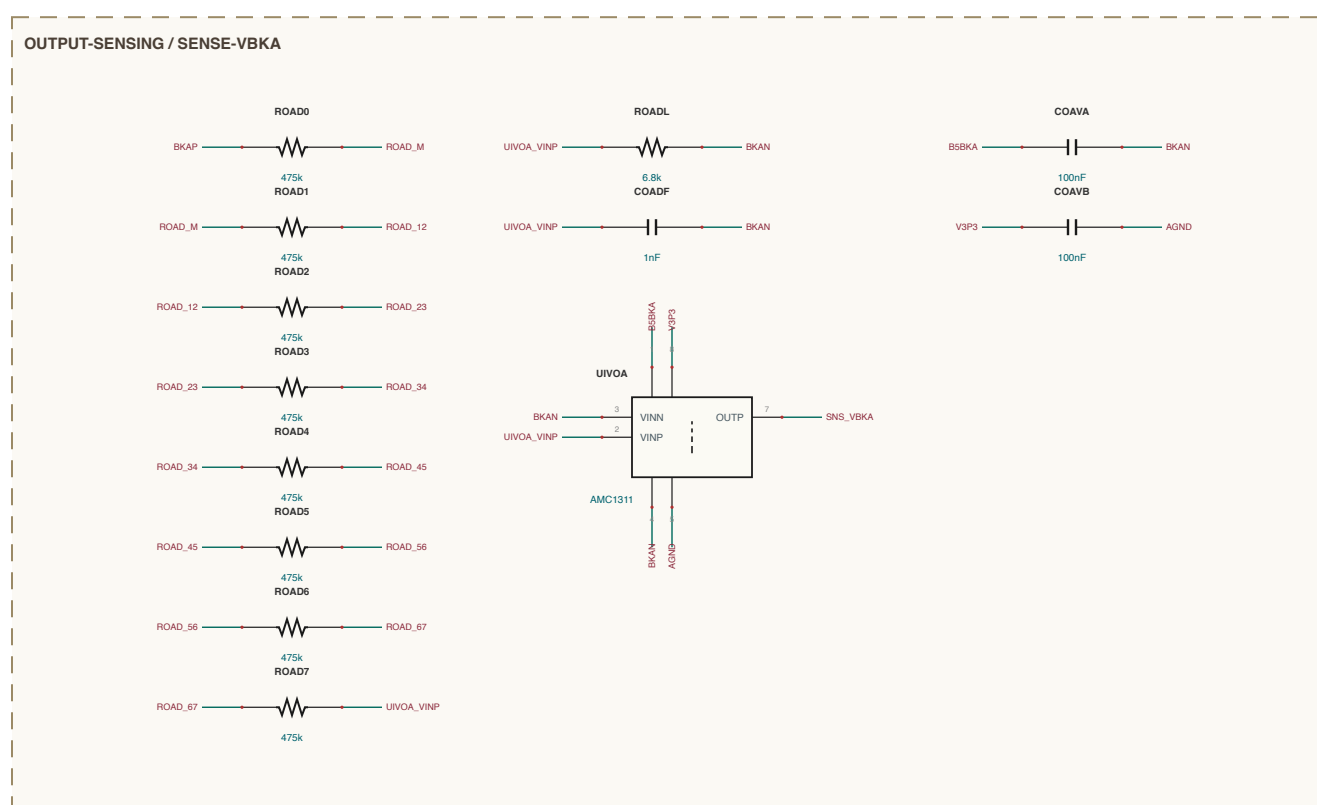
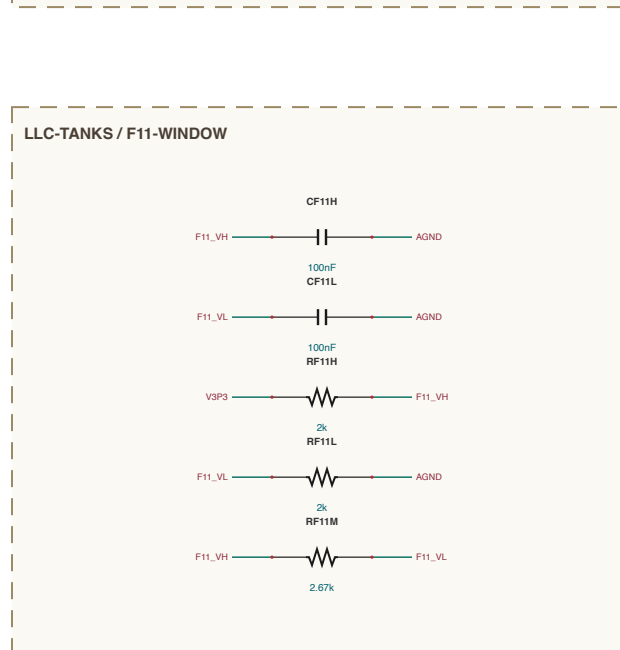
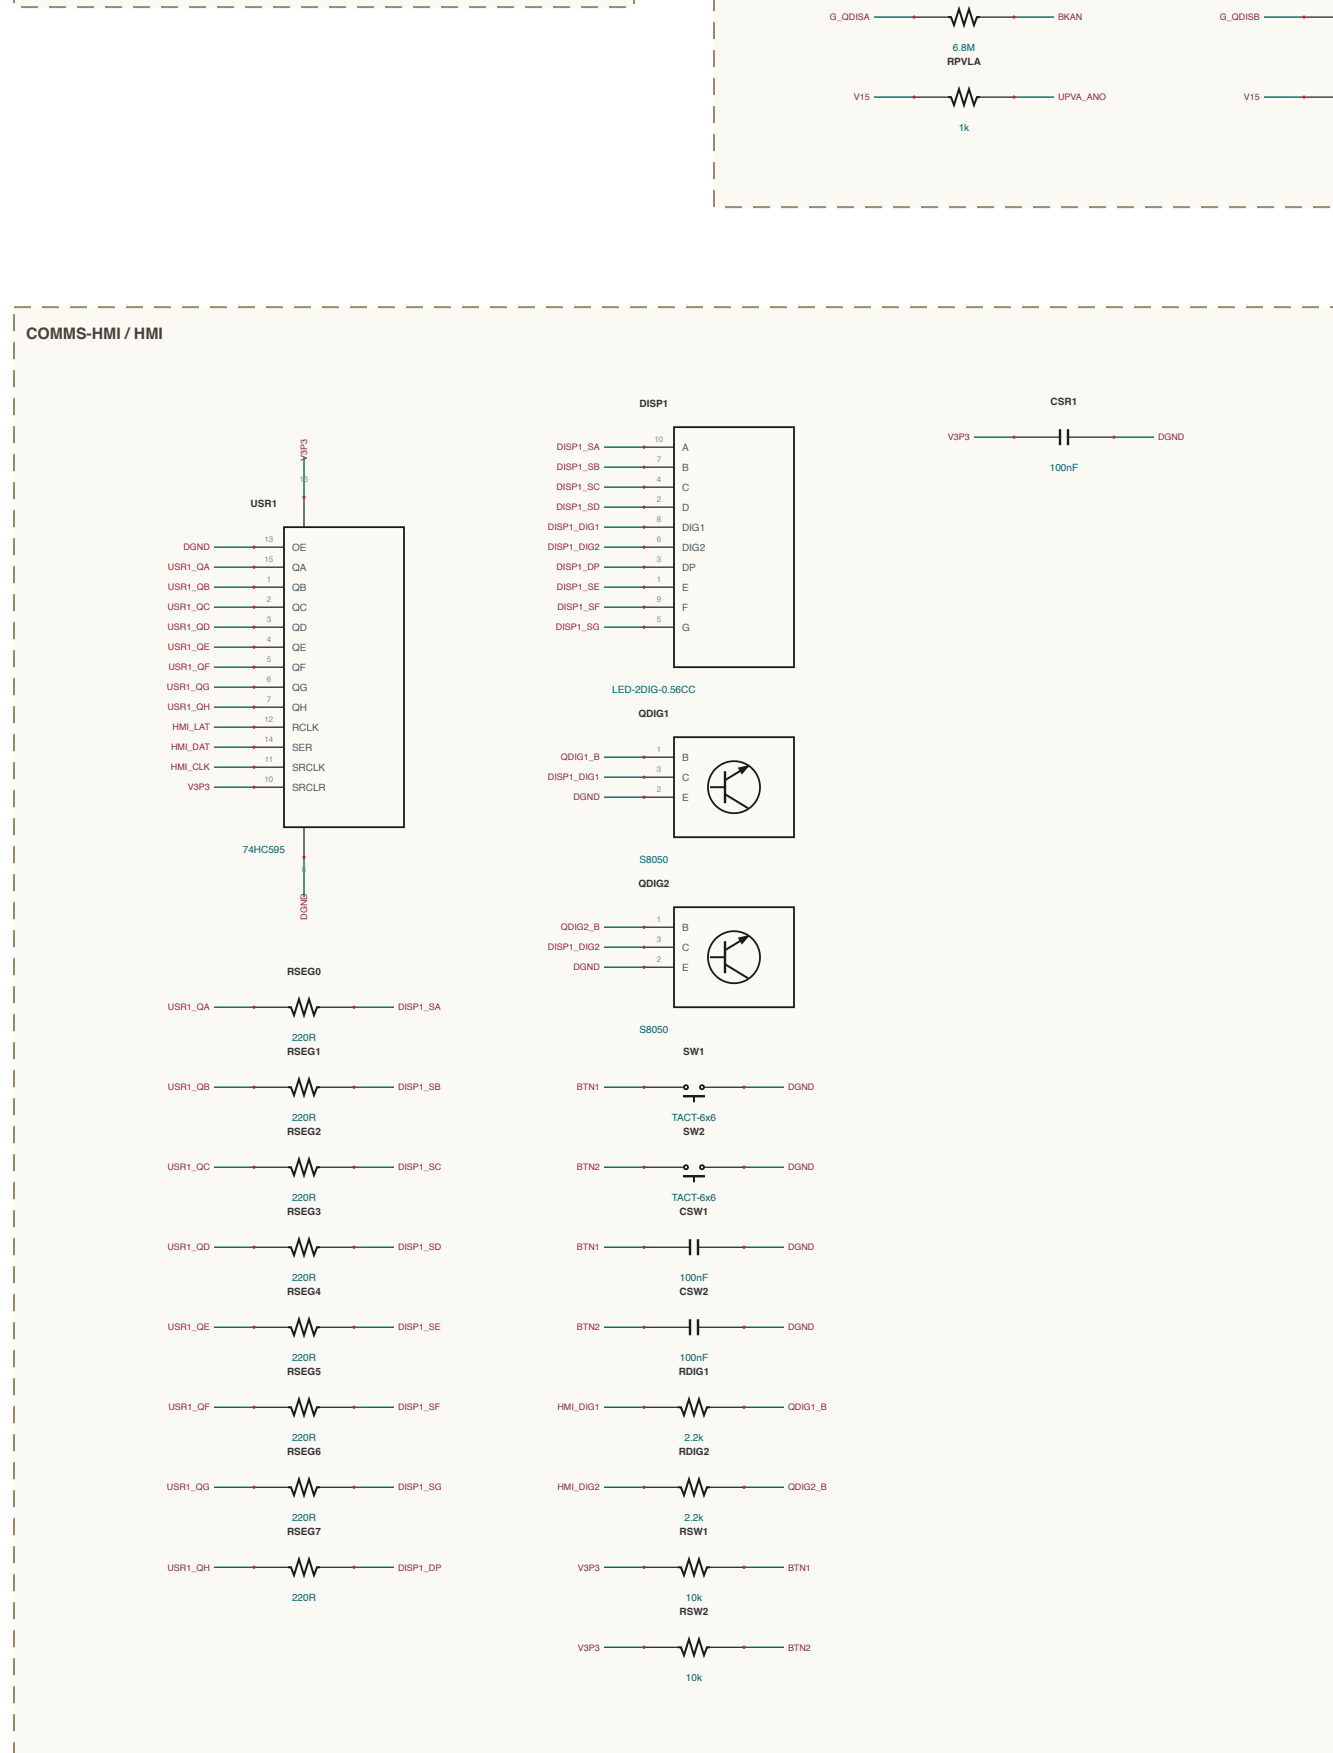
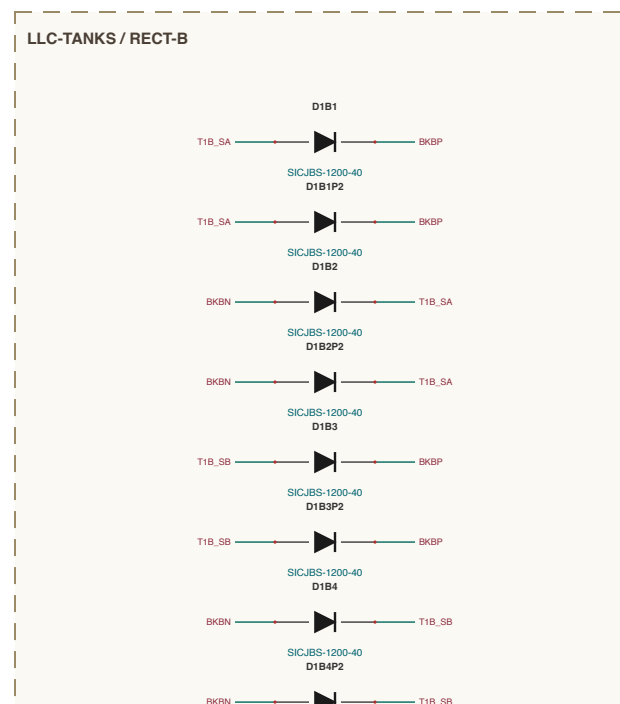
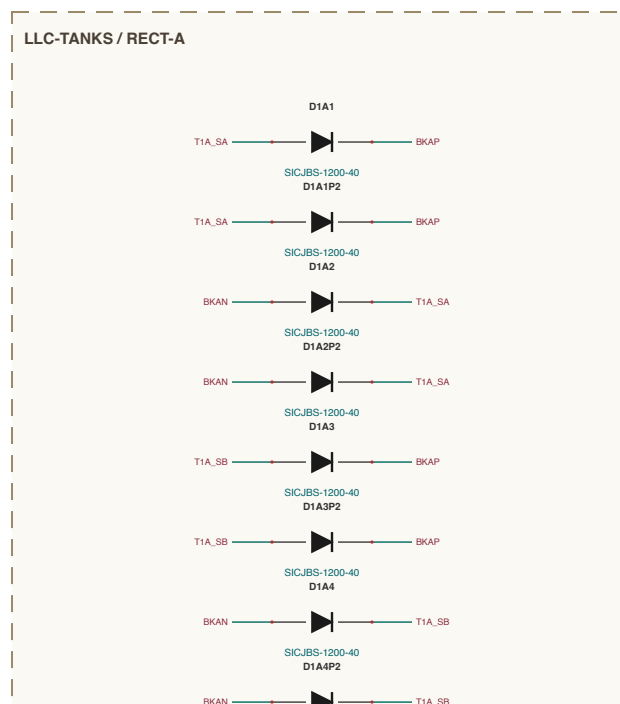
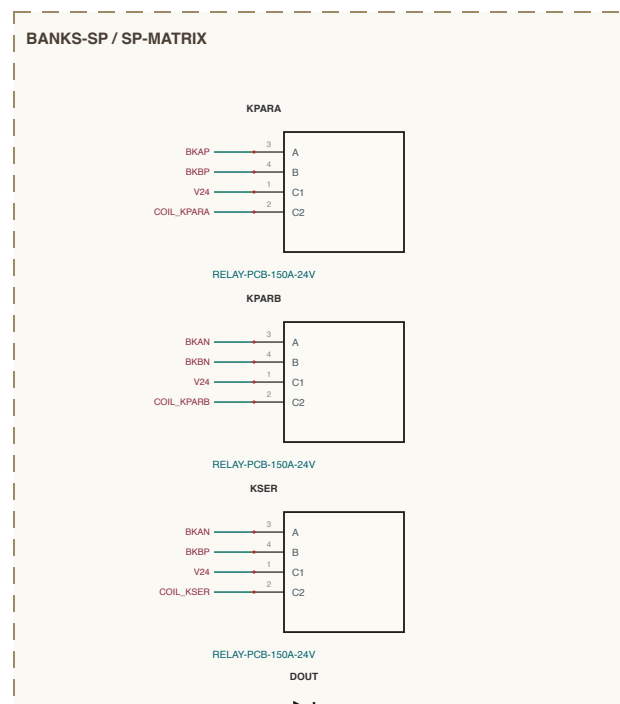


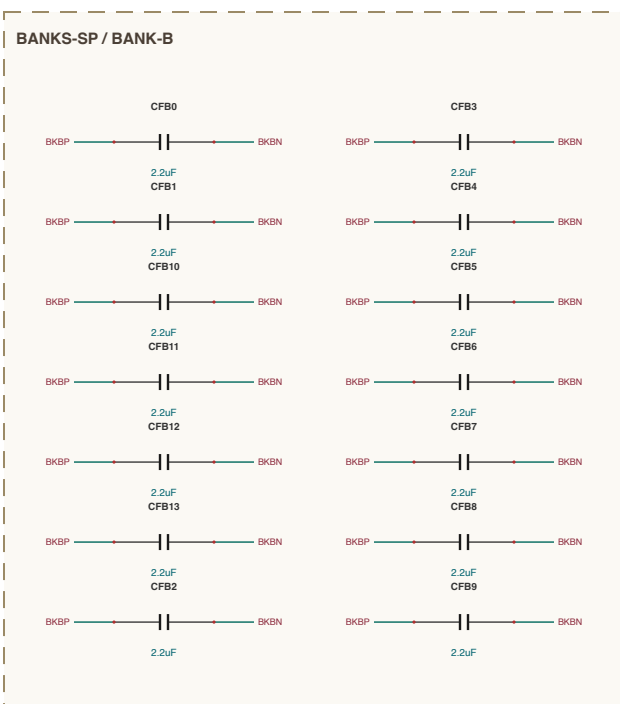

SHEET INDEX

SE W V 7 - 1 of 2
OUTPUT ADDRESS - 6 sections
BARCODE SP - 4 sections
LIC-TAXES - 4 sections
CONTROL - 3 sections
LIC-LEDS - 3 sections
CONMS-HIB - 2 sections
no D4 - 32 section - 178 components

NET NAMING

internal junctions are named for what they join

Unetn, nPbln nodes at that IC pin e.g. UNVOA_VBP

Radnetn, M midpoint of a series pair e.g. RAD3TA_M

= 2 more

MAGNETICS CONSTRUCTION	
Identify per discharge/charge/discharge, gase, gas, Vol, acceptance (how low there)	
02 174778 (BSE ref) 02 2 cells, parallel in series = n=2, each 2x 97303302 (not burned), 4.43E, per 833048.077 +, see 2x full 4.362E failure, 1x 17.48E (lost = 7%), R44, R46B7, 1748040E	
02 174877 (BSE ref) external 1x 1.260E + n=3%, 2x 97303302, No, the 100000.0E, distributed gap, bonded	
10E 1x 2 + 2x 2 cell leakage (consequence < 10%) + 4 cell long = n=1% considered, Co at 74M	
based loss screened by the EOS, bonded (thermal load [7_74M] NTC rate of heat load, 65E)	