
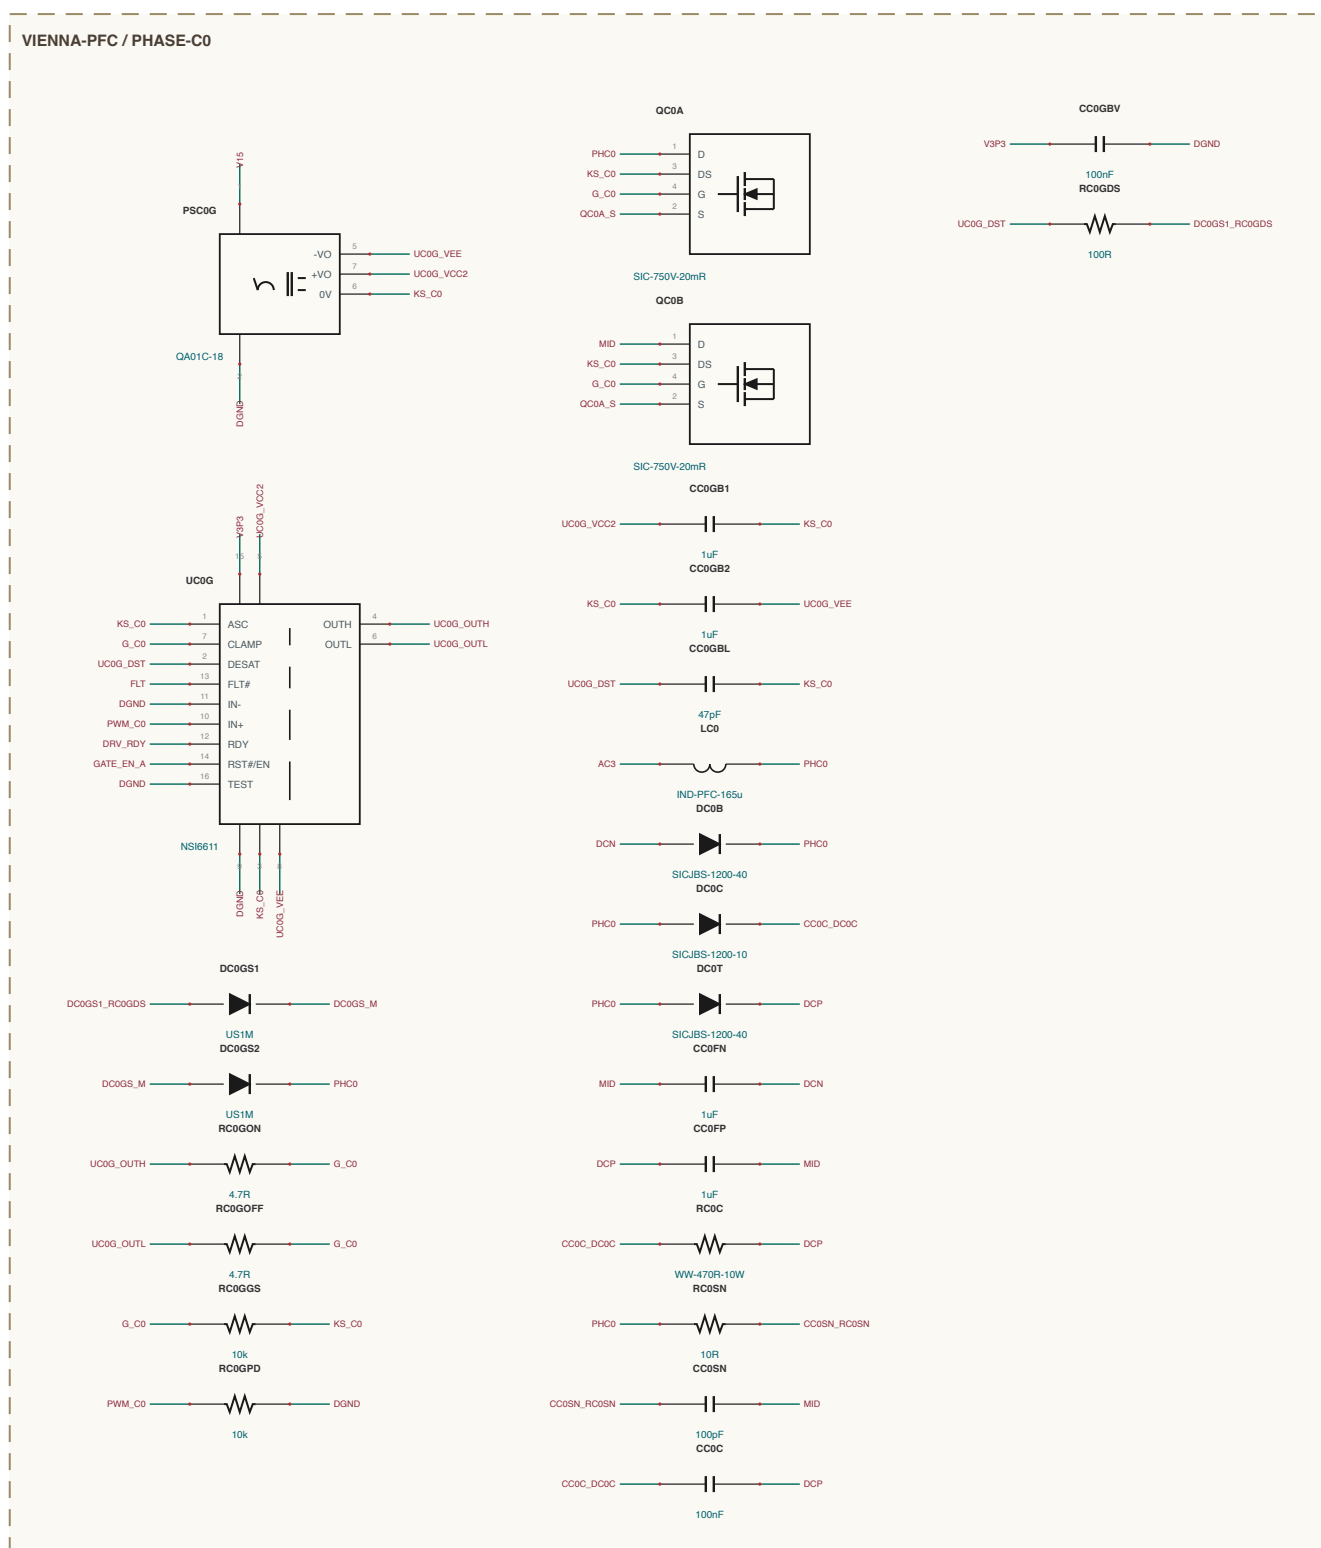
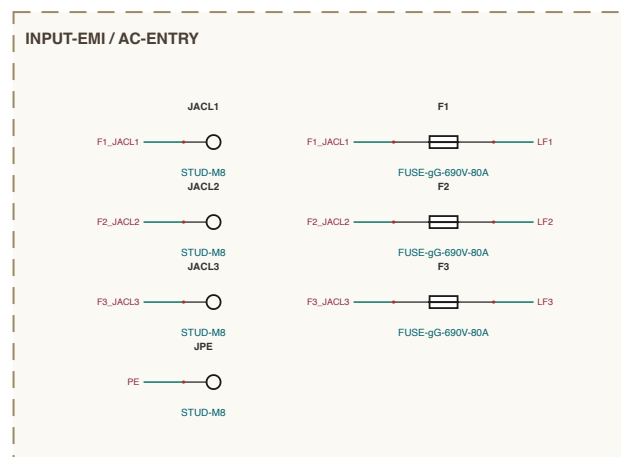
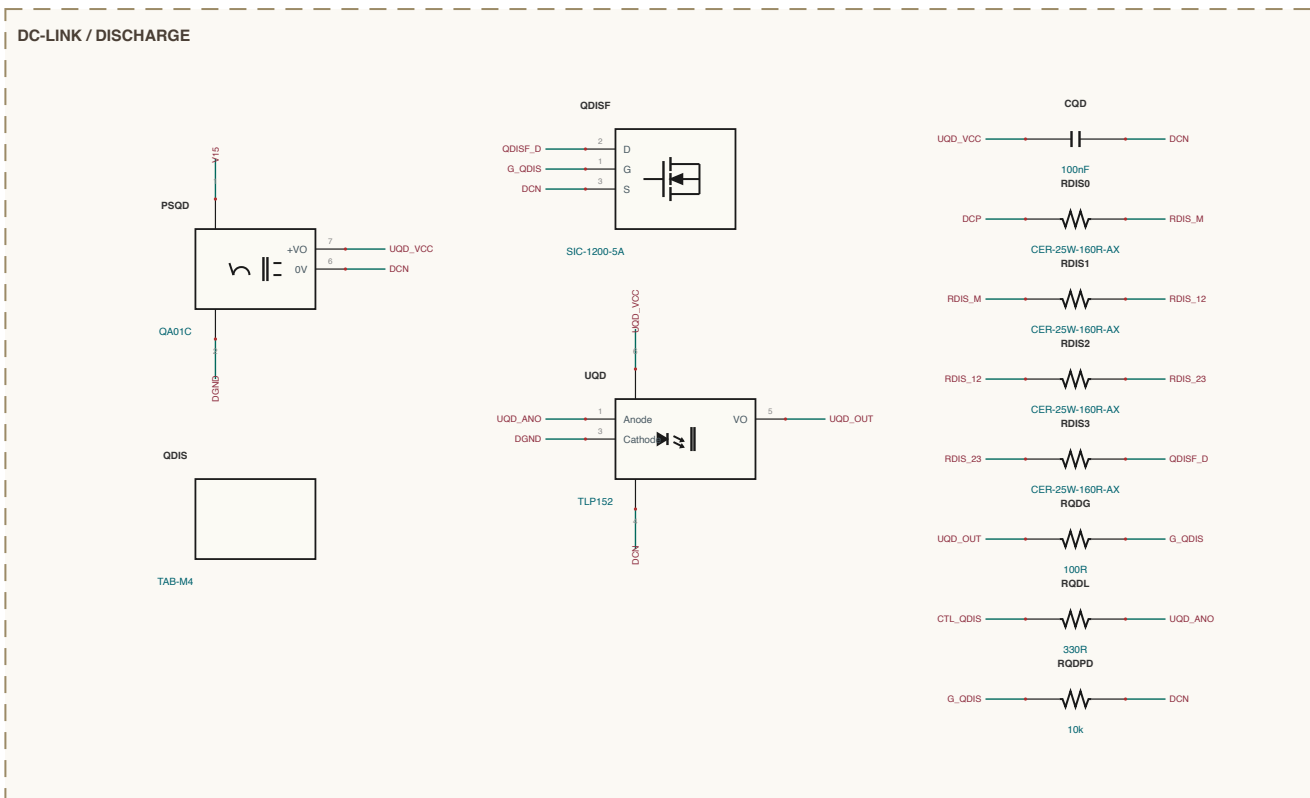
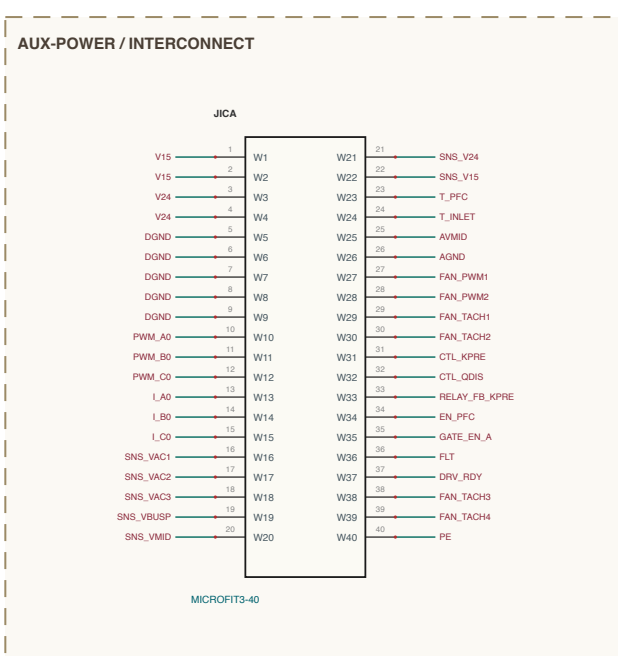
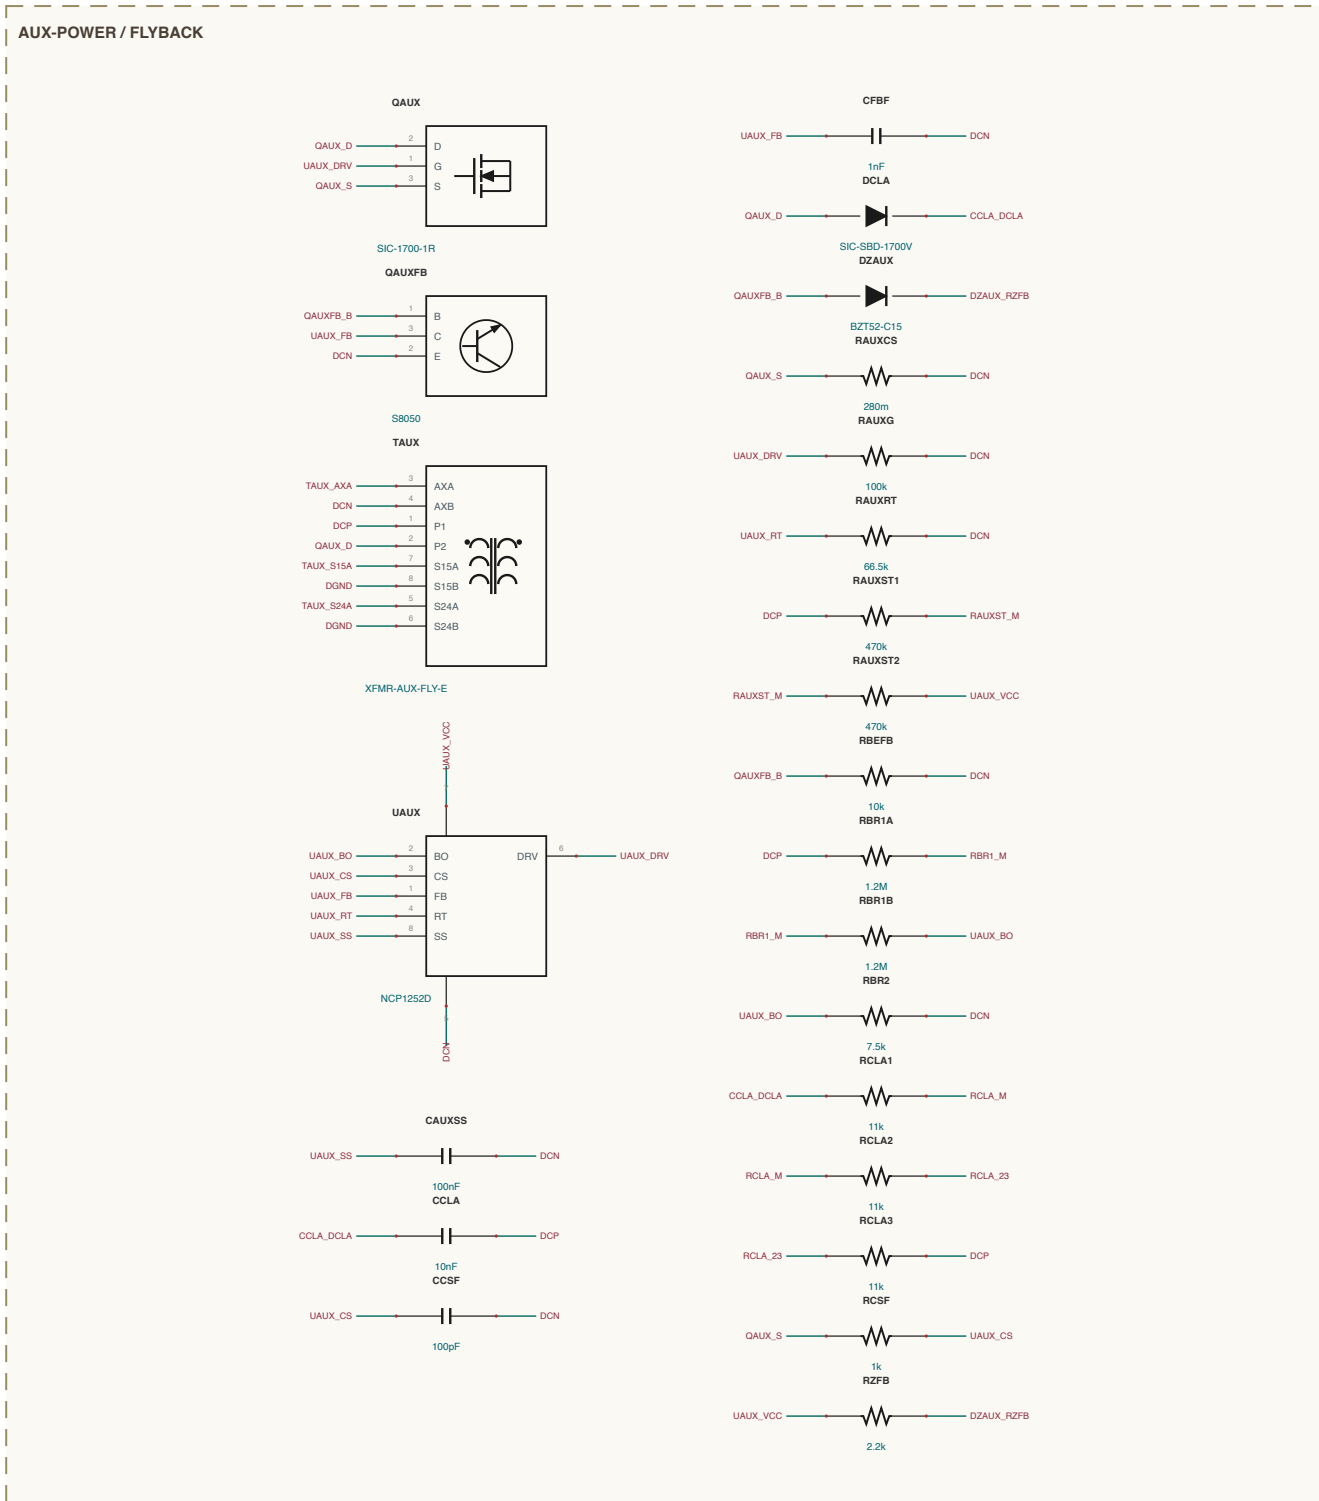
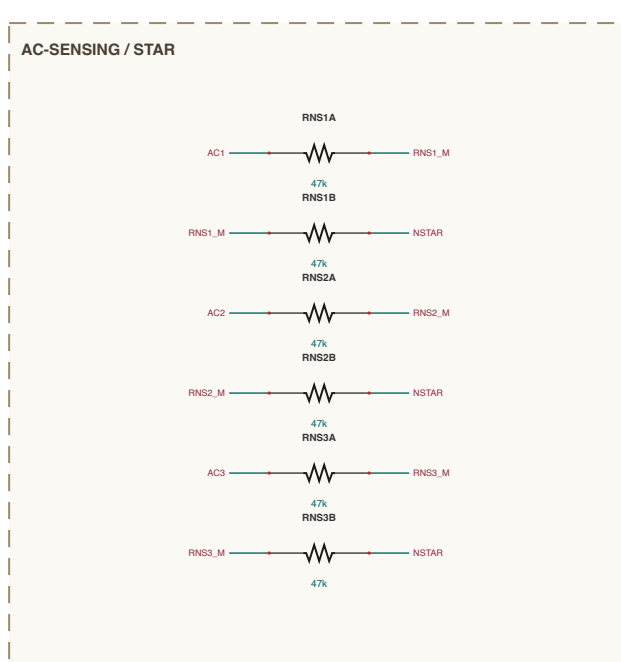
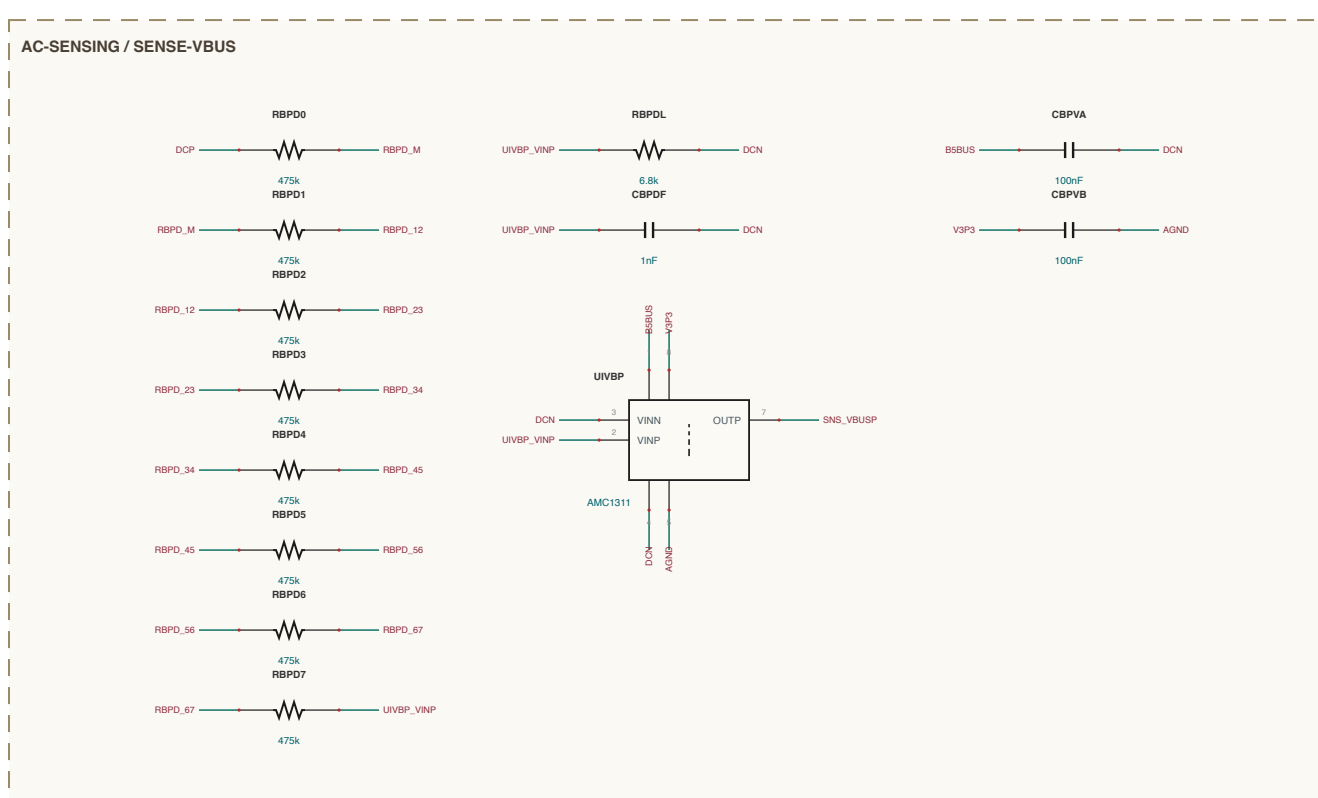
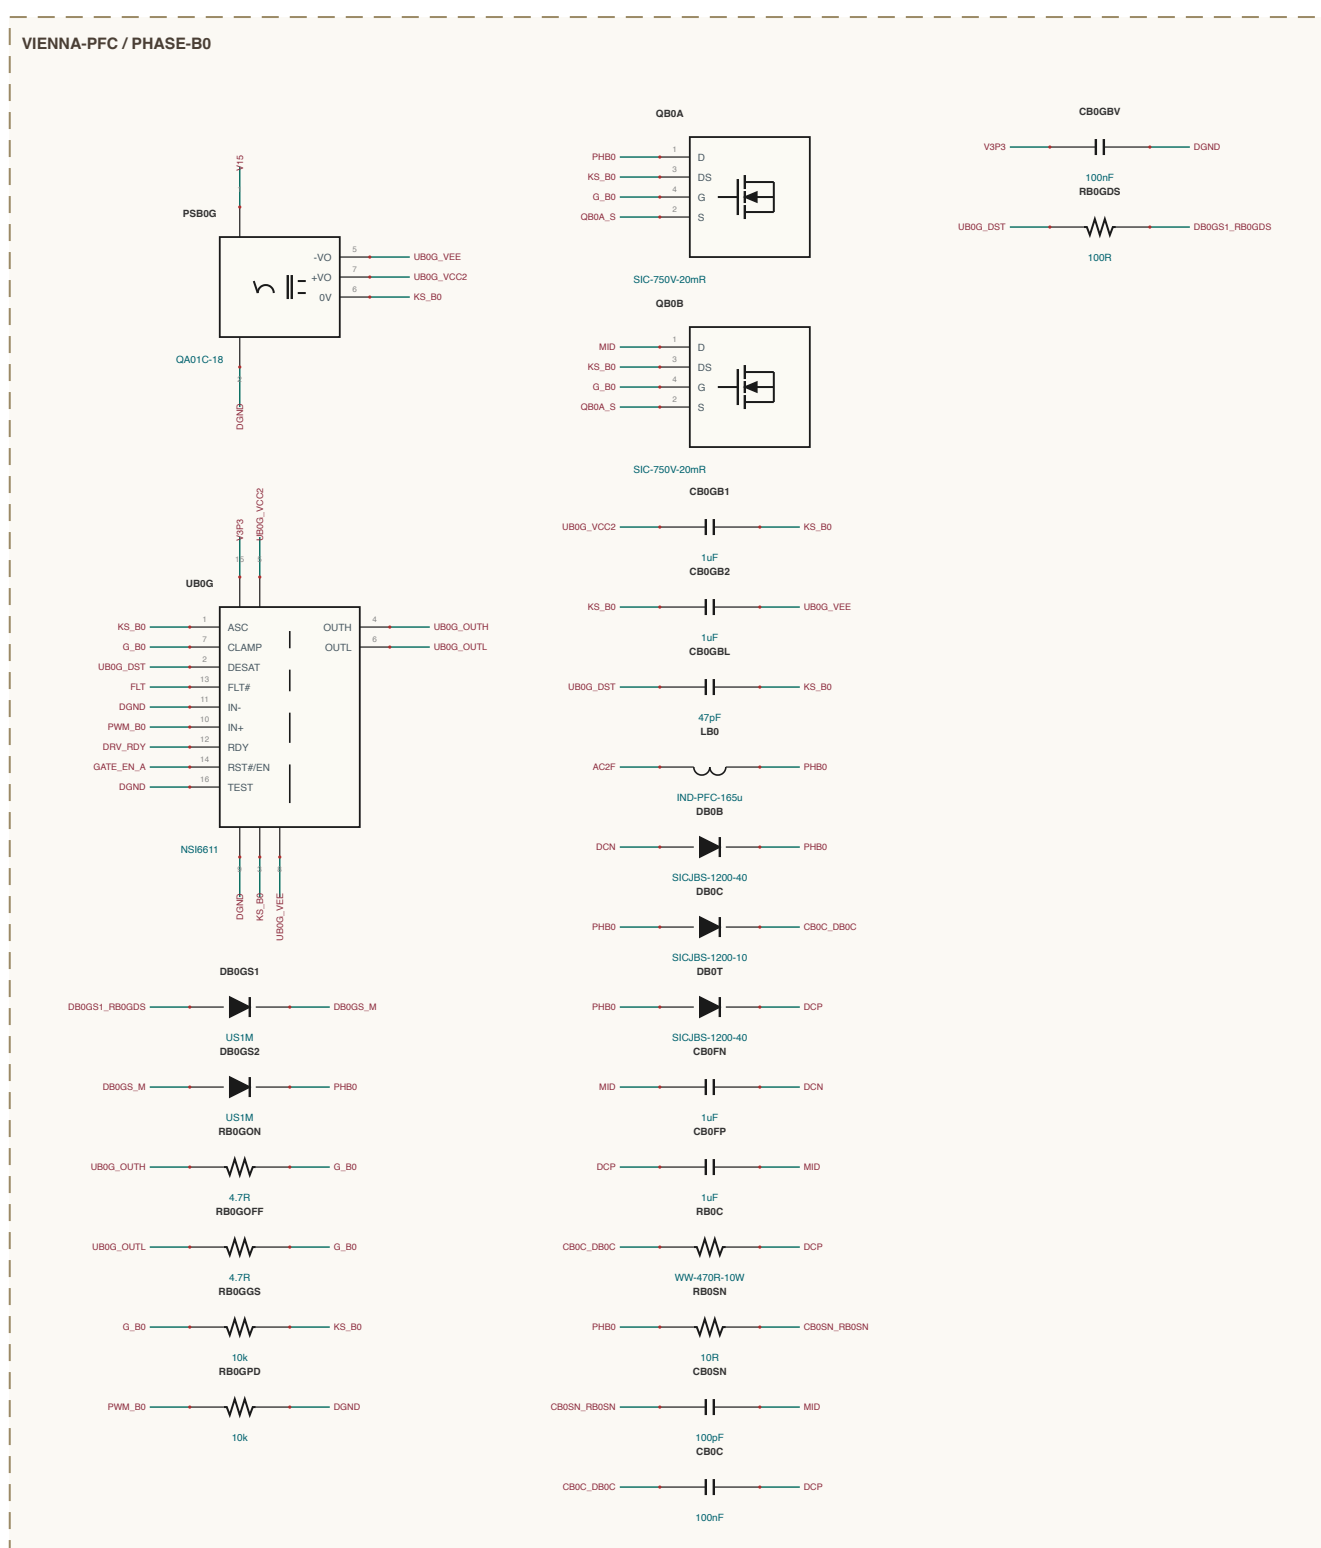
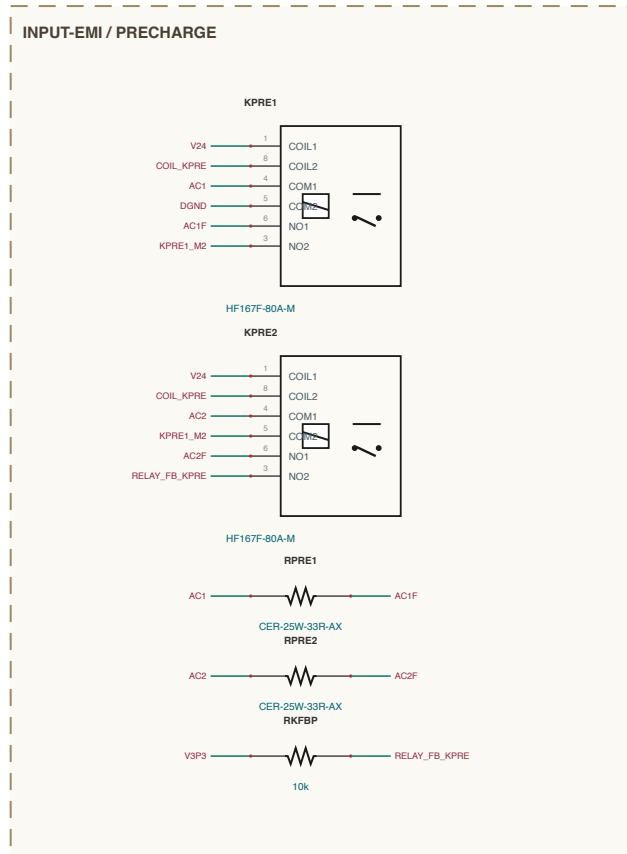
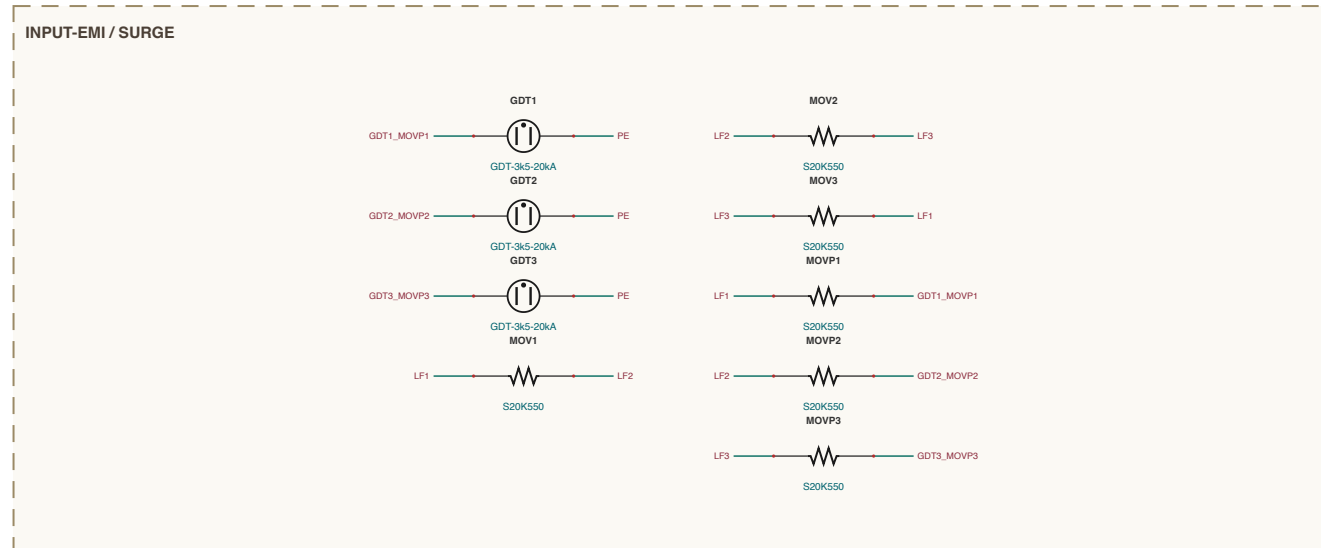
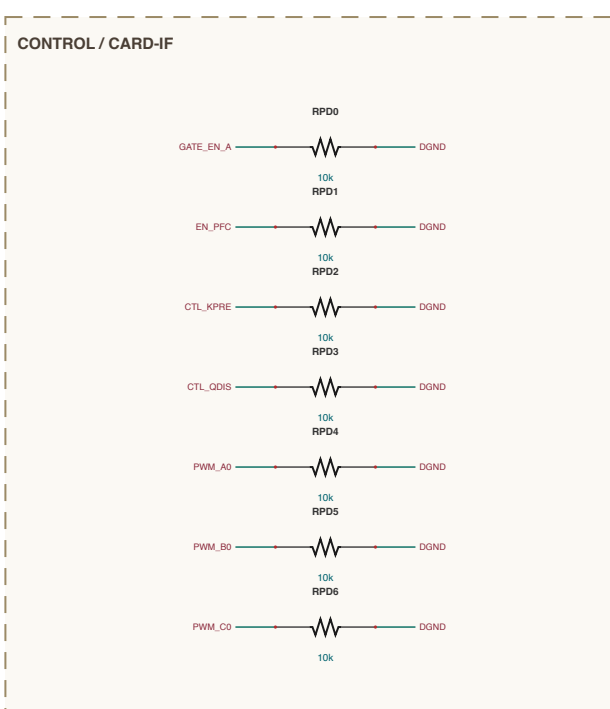
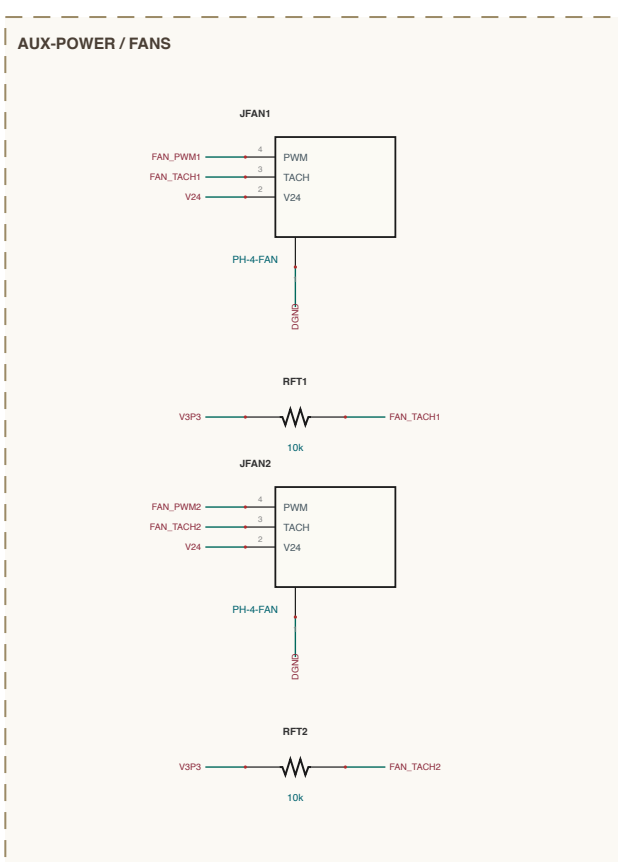
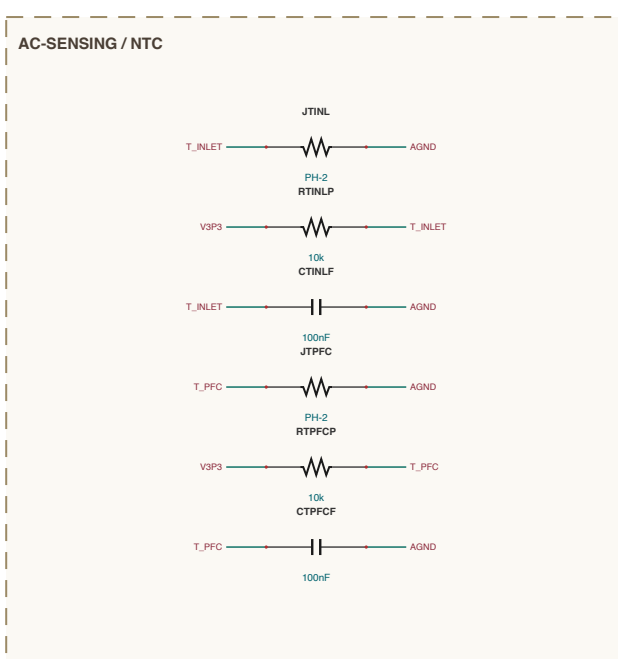
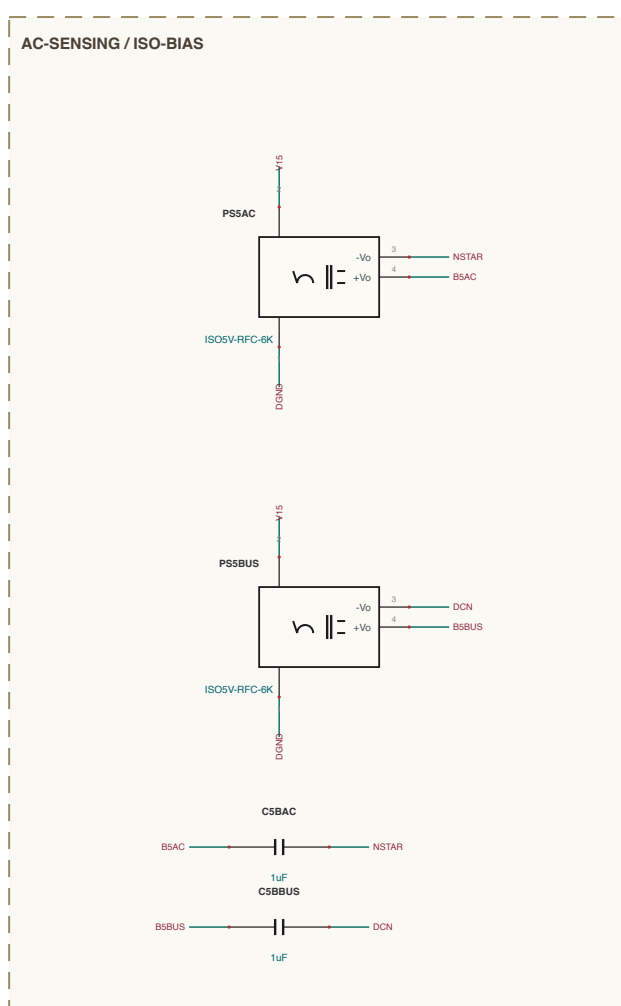
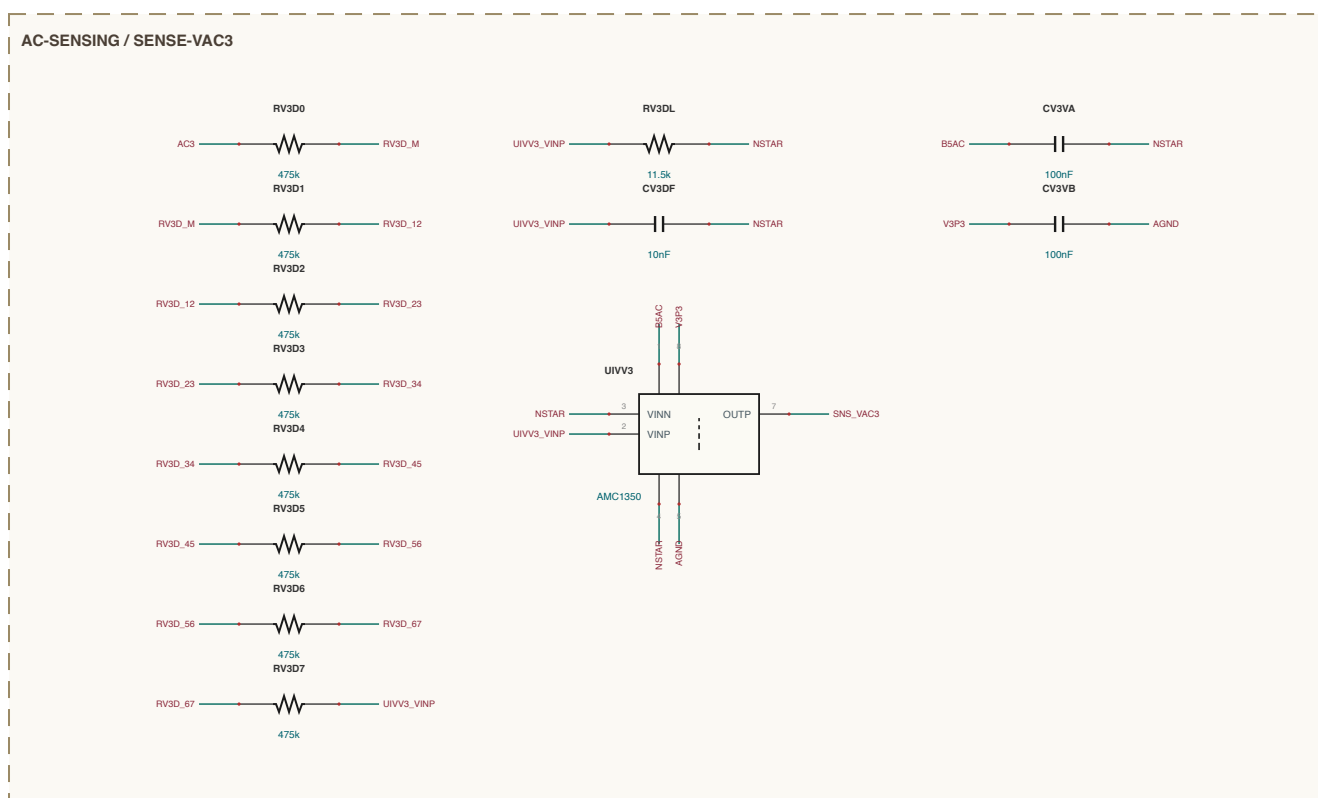
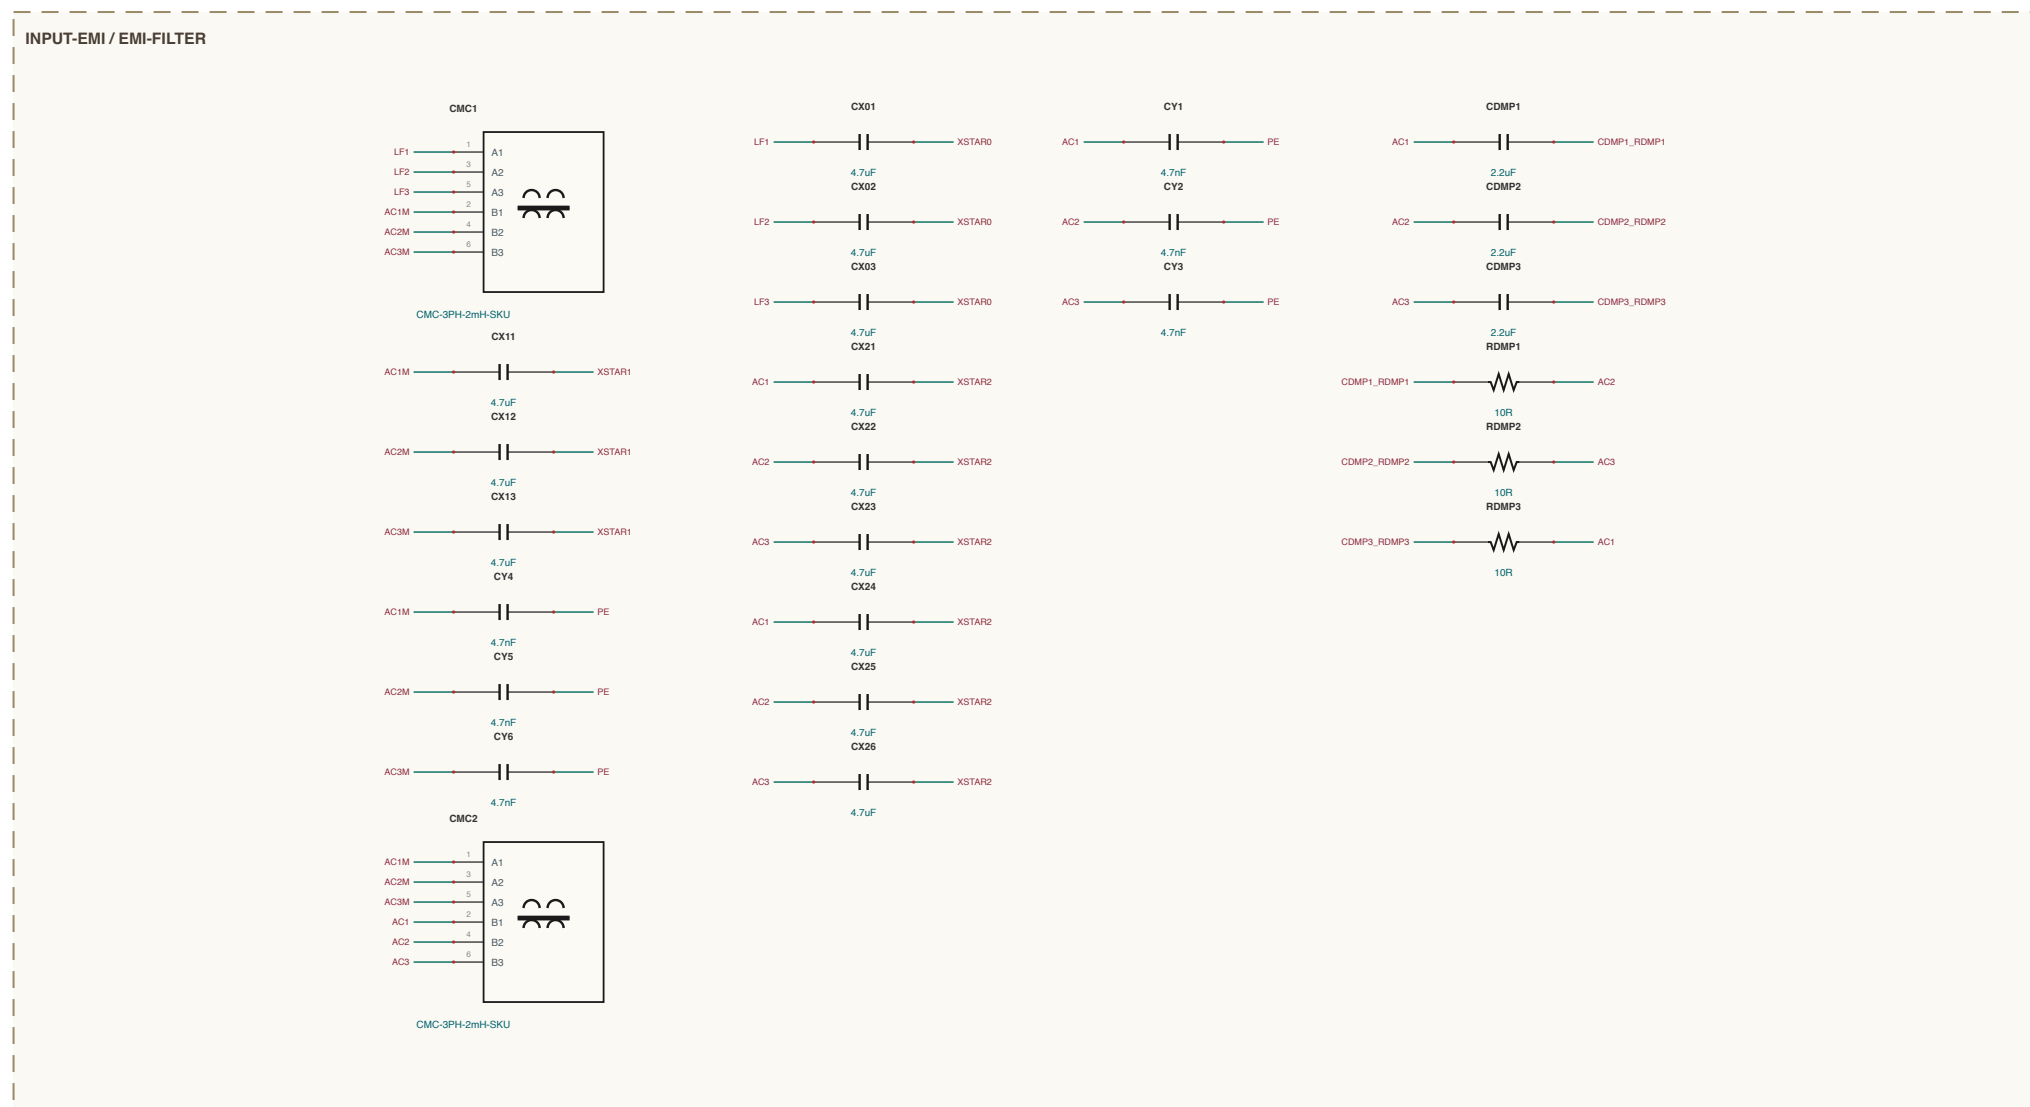
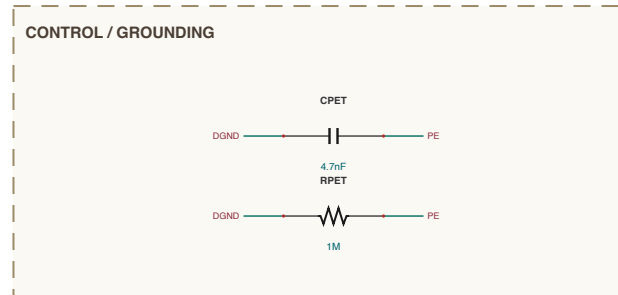
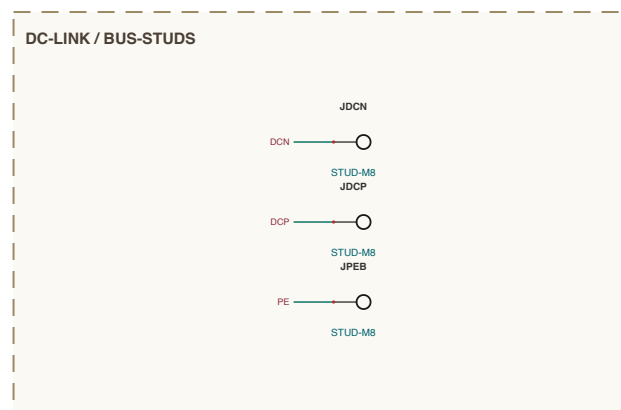
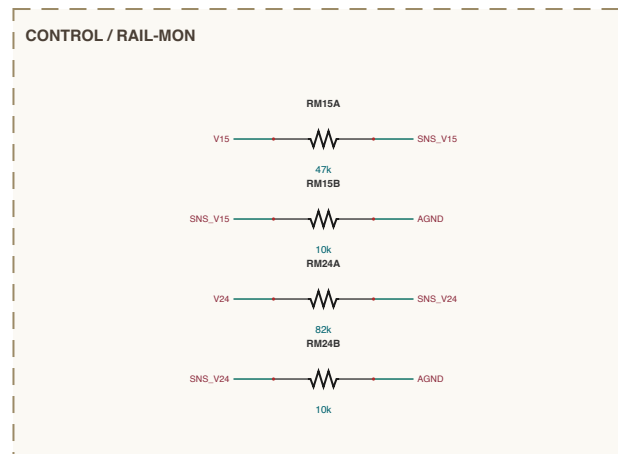
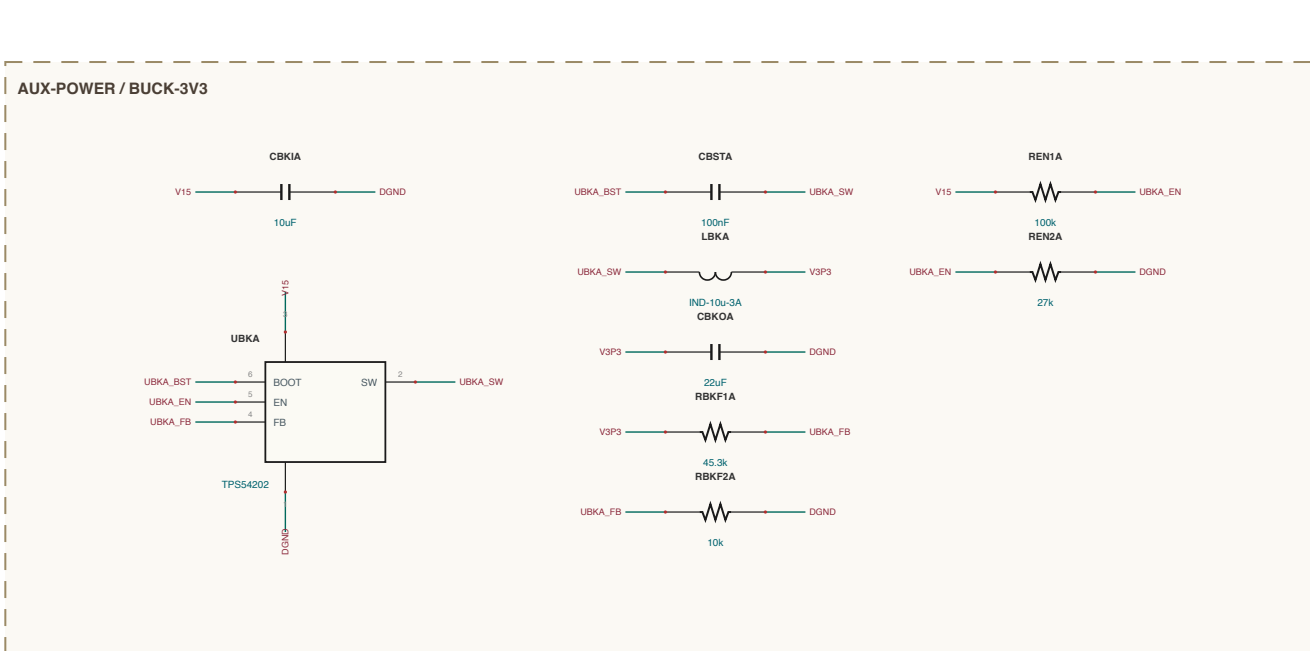
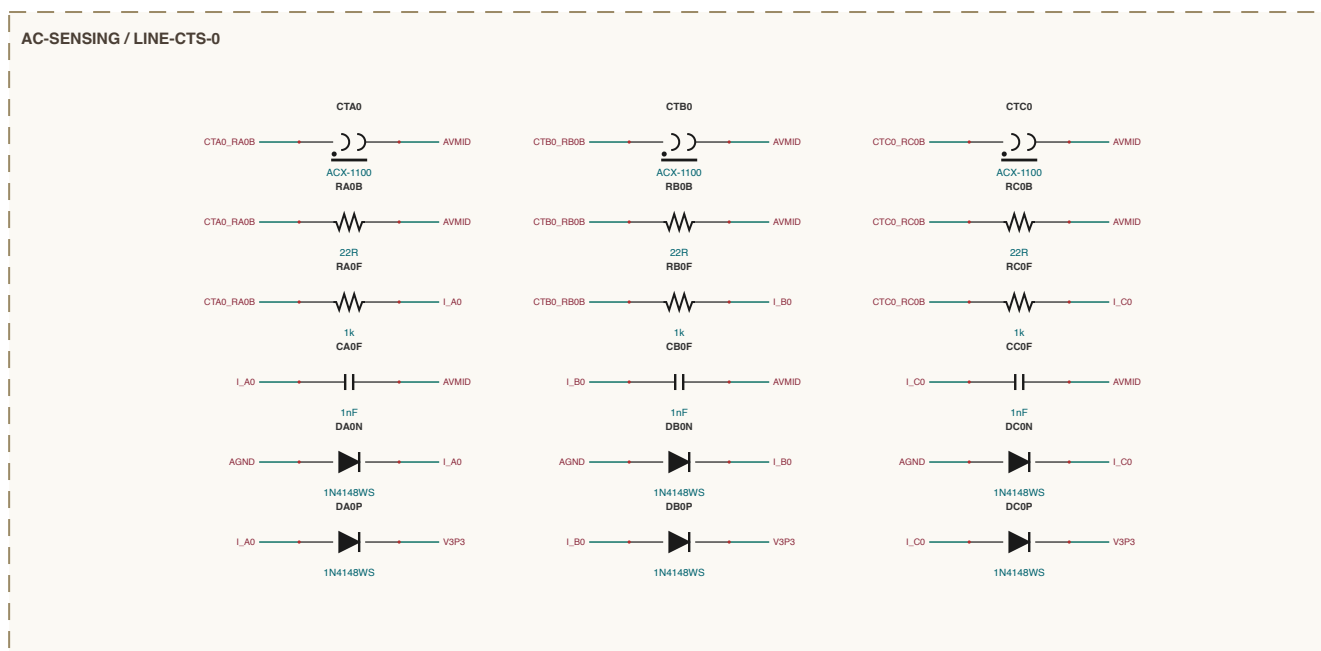
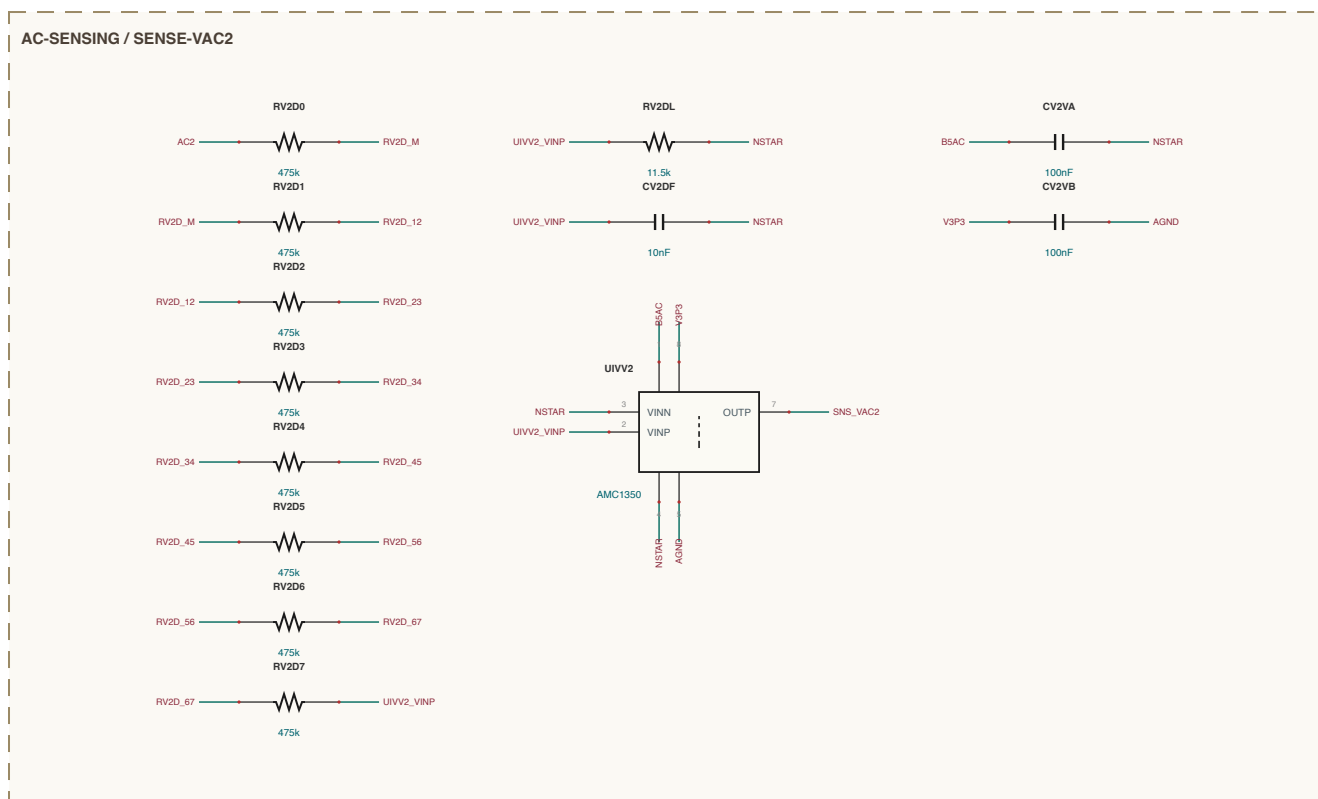
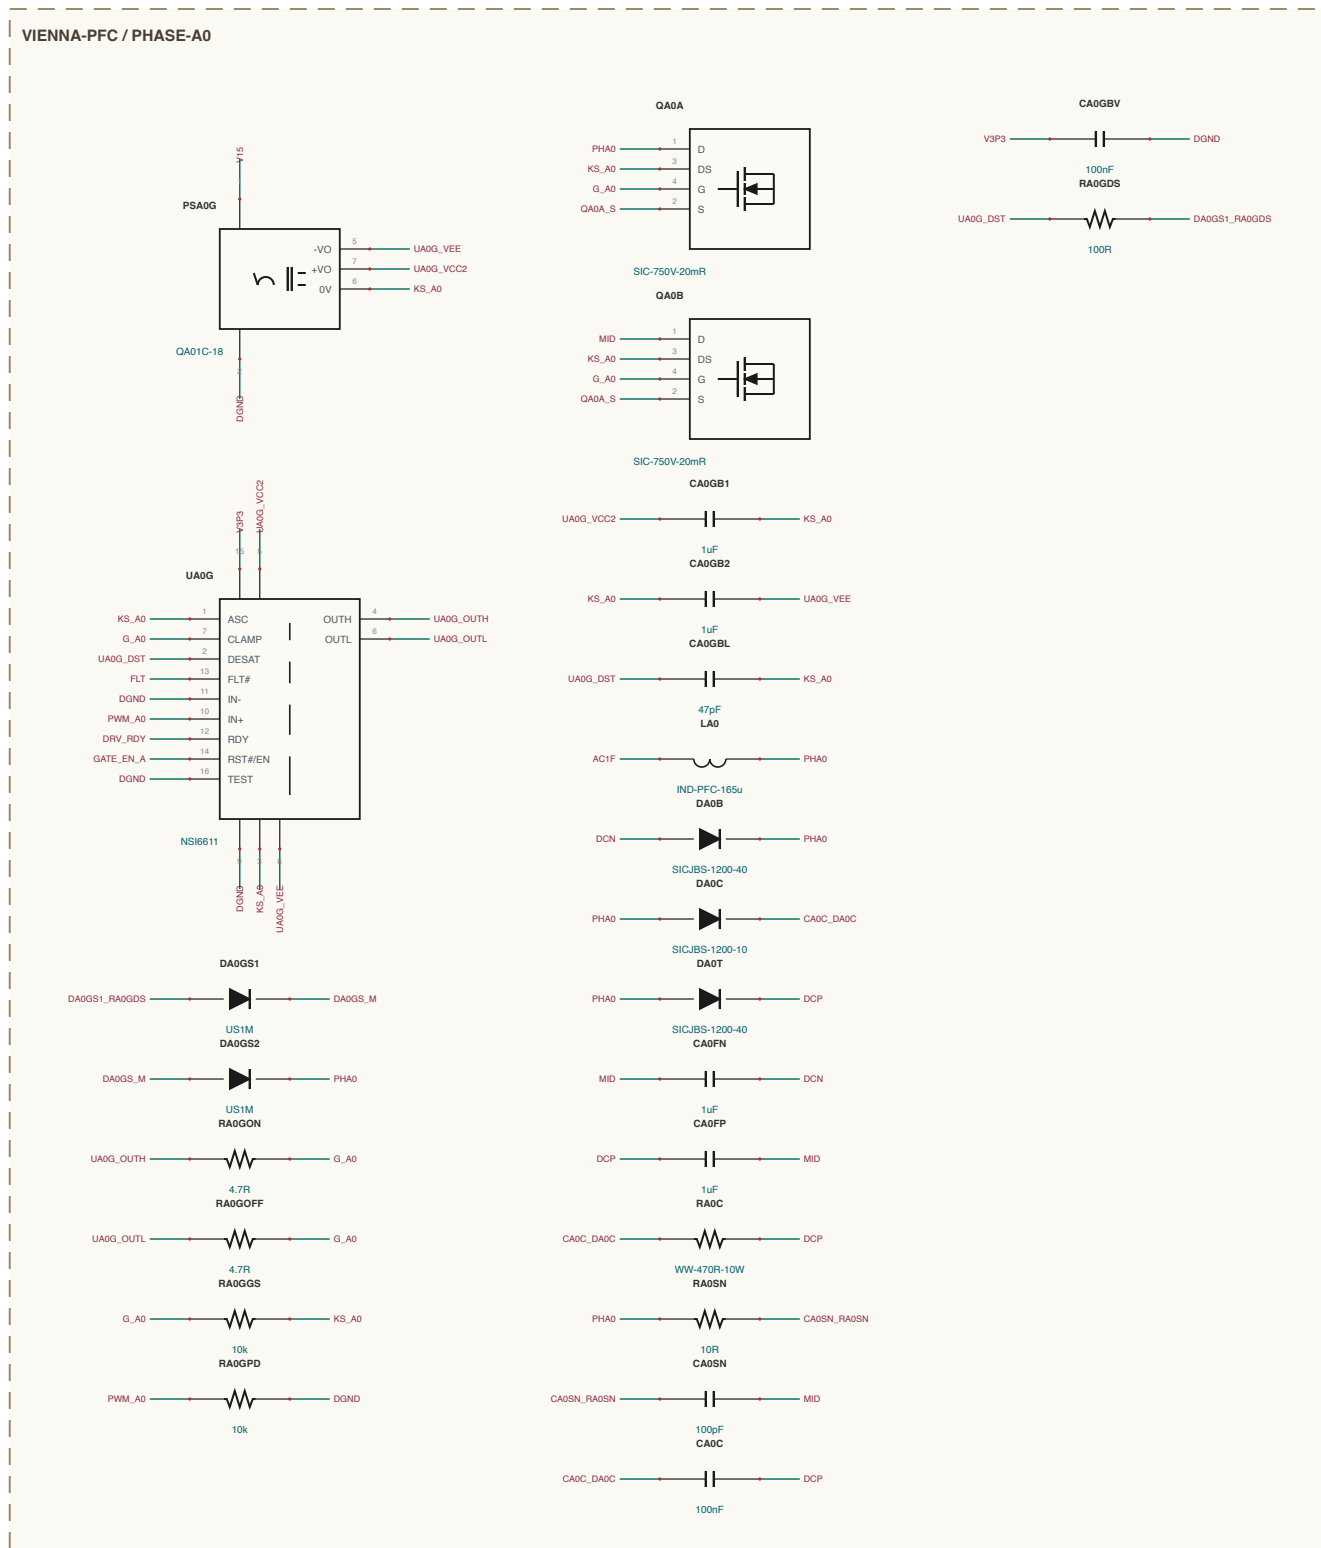
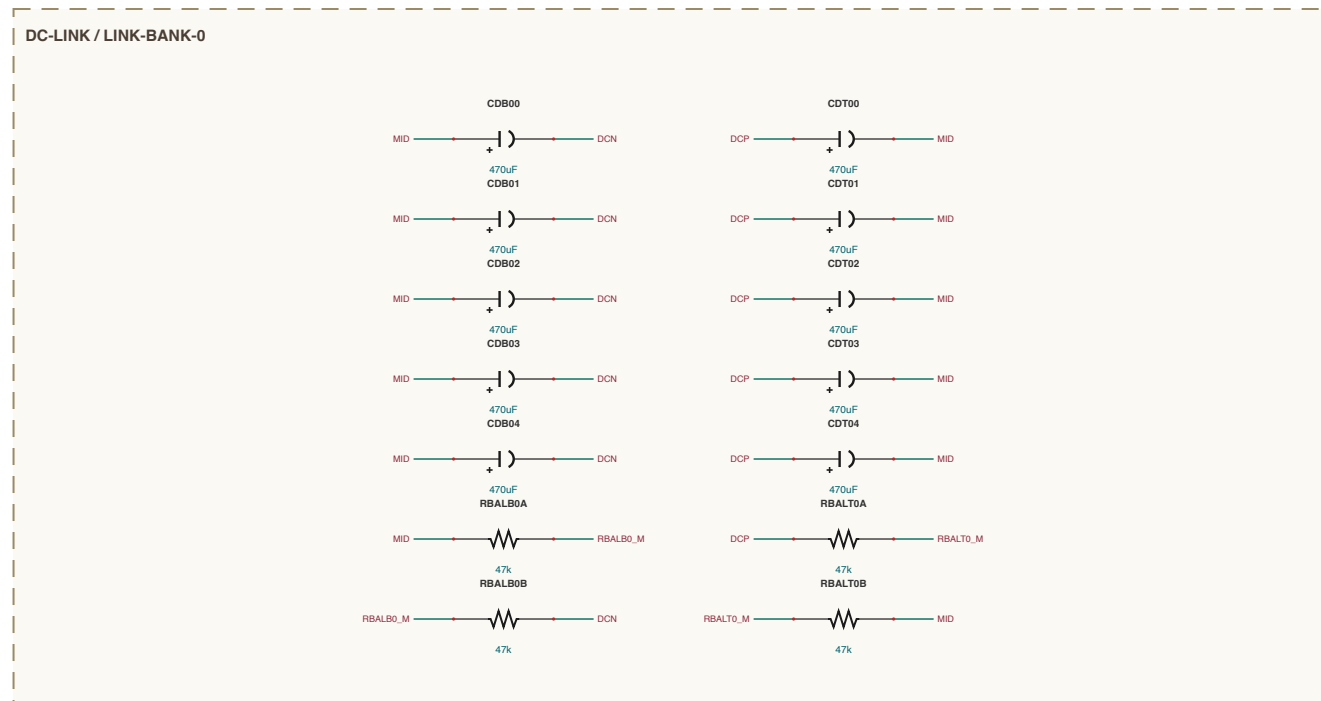
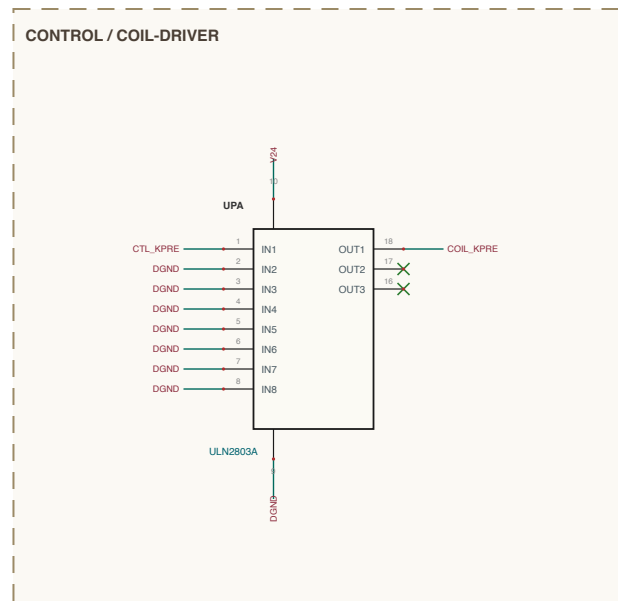
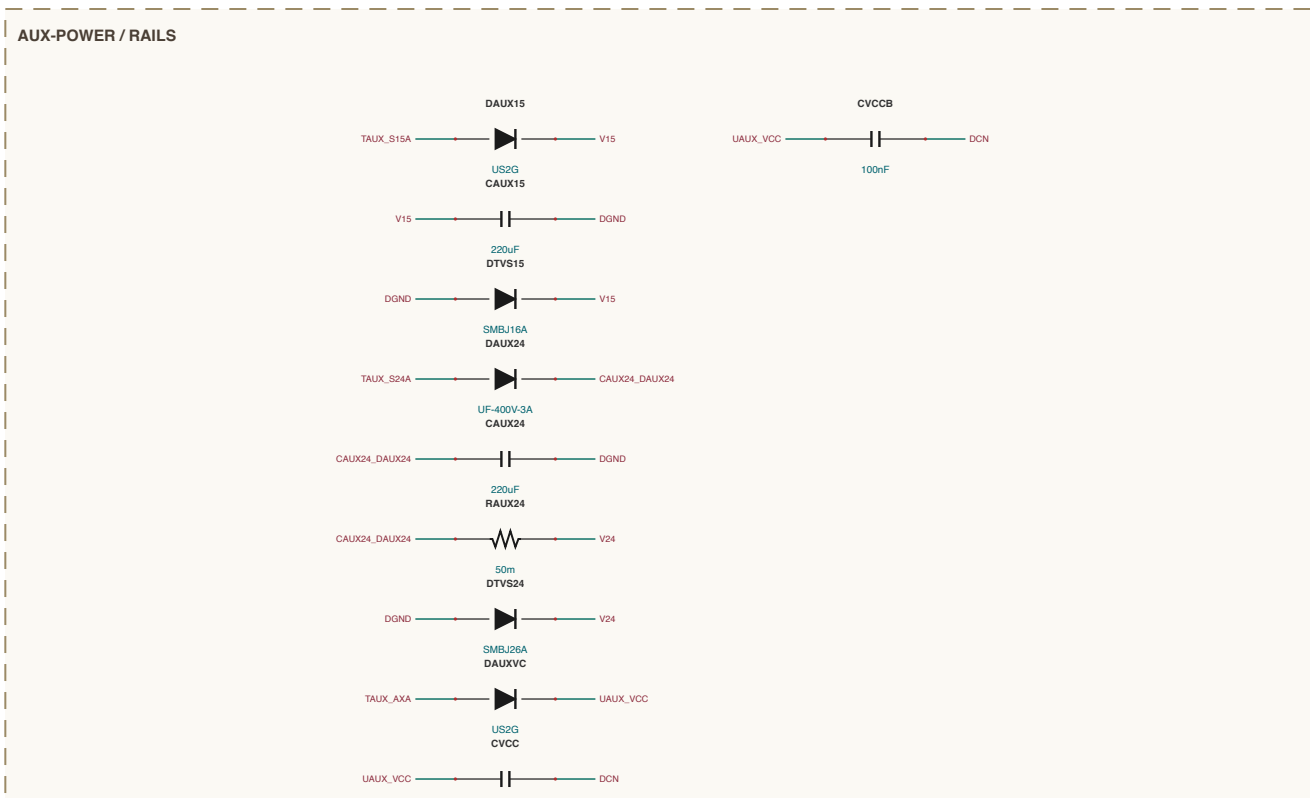
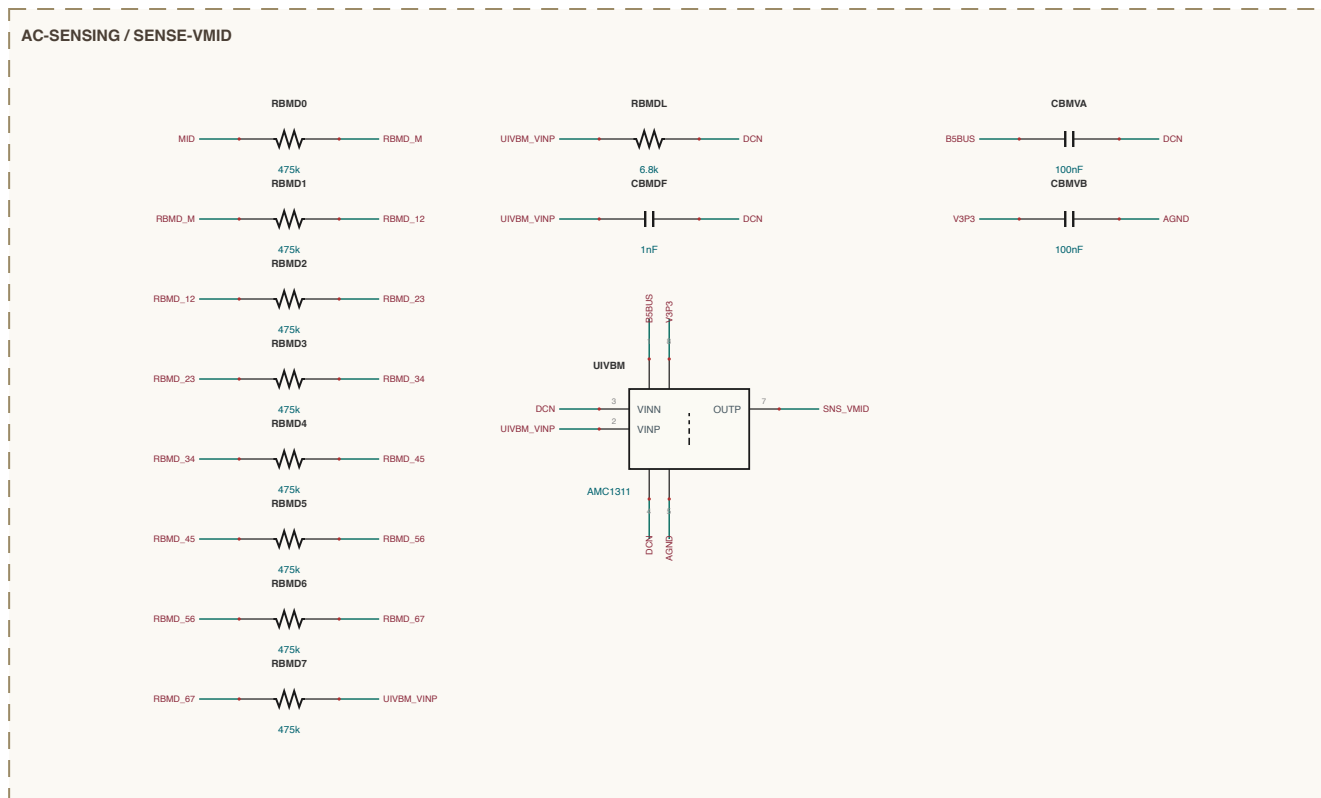


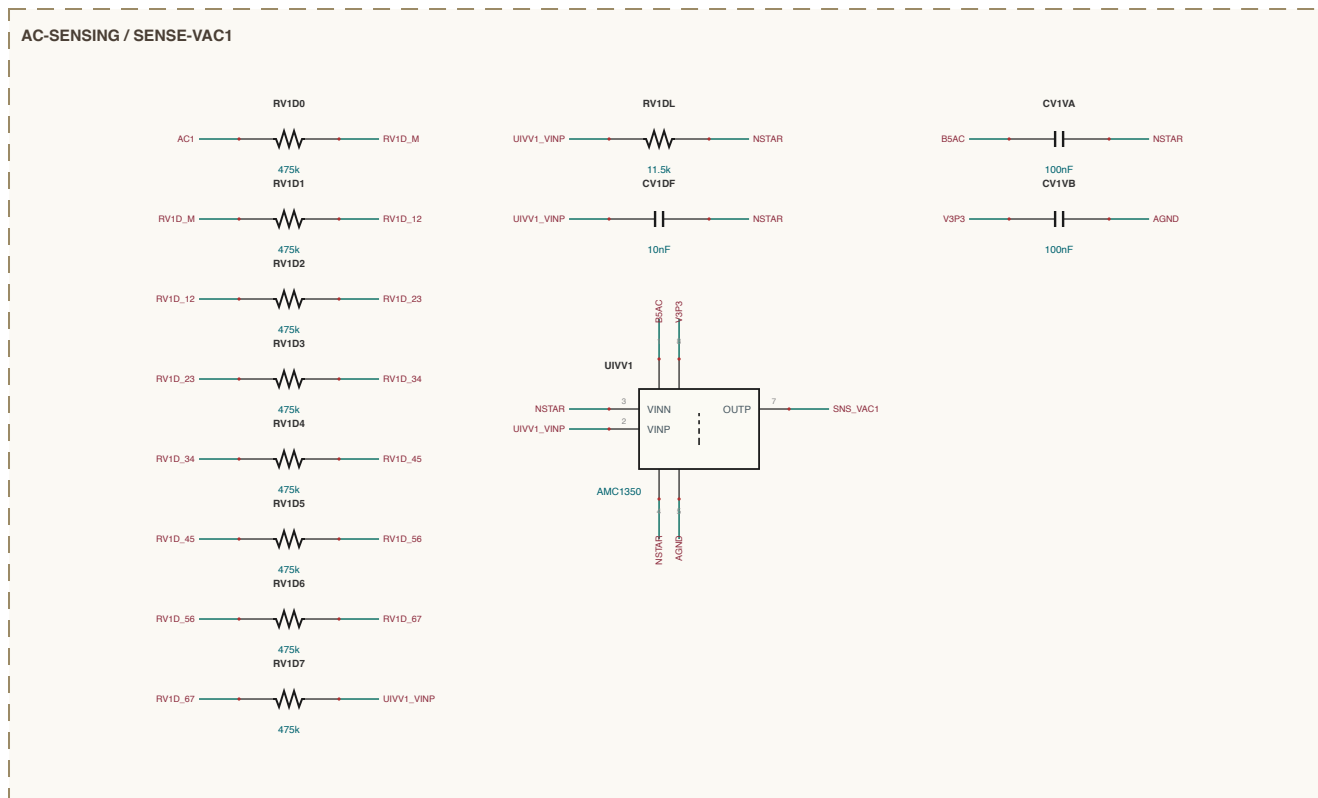

SHEET INDEX

18	BRWAC-DC (Drawn) - 1 of 3
AC	BRWAC - 4 sections
ADD-POWER	- 3 sections
CONTROL	- 4 sections
INPUT	BPV - 4 sections
DC LINK	- 3 sections
VERBOD-PPC	- 3 sections
20	2.1 - 20 sections - 273 subassemblies

NET NAMING

Internal junctions are named for what they join

Usually, *o* prefix made at that IC pin e.g. 15VCCA, VDD

Resistor: *R* midpoint of a series pair e.g. R3A1/2A, R

Resistor: *res* top between Resistorname e.g. R1/2, 01

all others are explicit design notes

MAGNETICS CONSTRUCTION

(Identify your characteristics and parameters, gaps, slots, acceptance limits, etc.)

D1 L&C-BS In 30778667 Kaulbitz, Inc. (x=1 lat time), [2x]151mm) (torque = 1.6 Nm), --TSM: 952A ps 95.85S values given rapidly/cut)

SIG ESR: CMX1 + 12x 82 x 74 = 3 per stage + CMX2 + RCI jumper DC DM chassis drilled

C or TANK sections