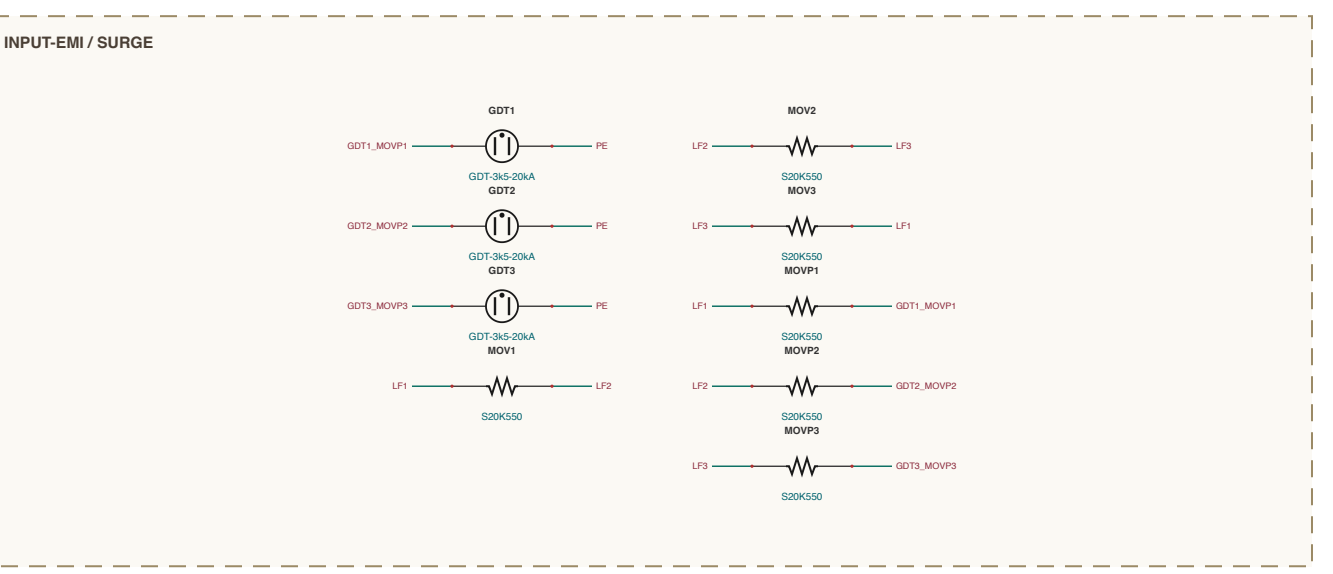
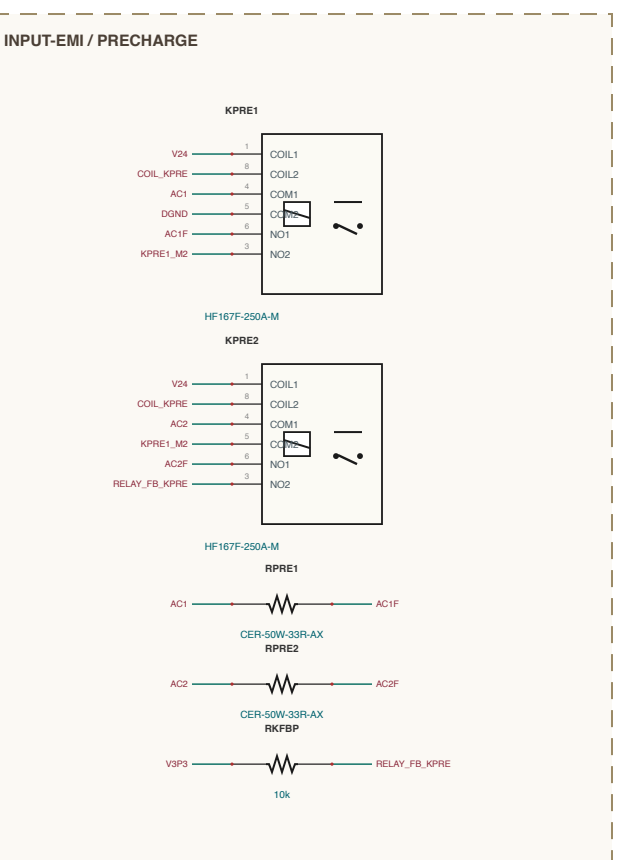
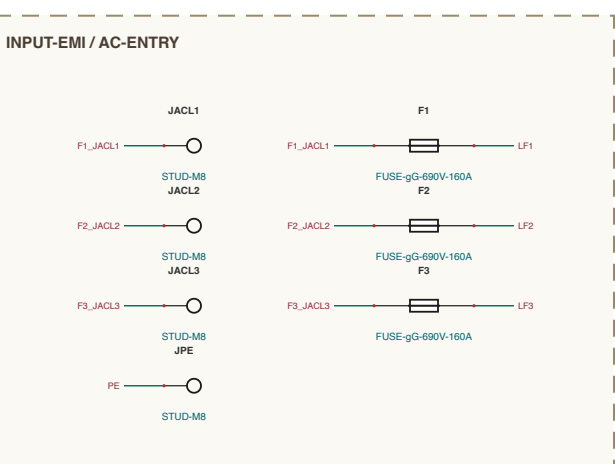
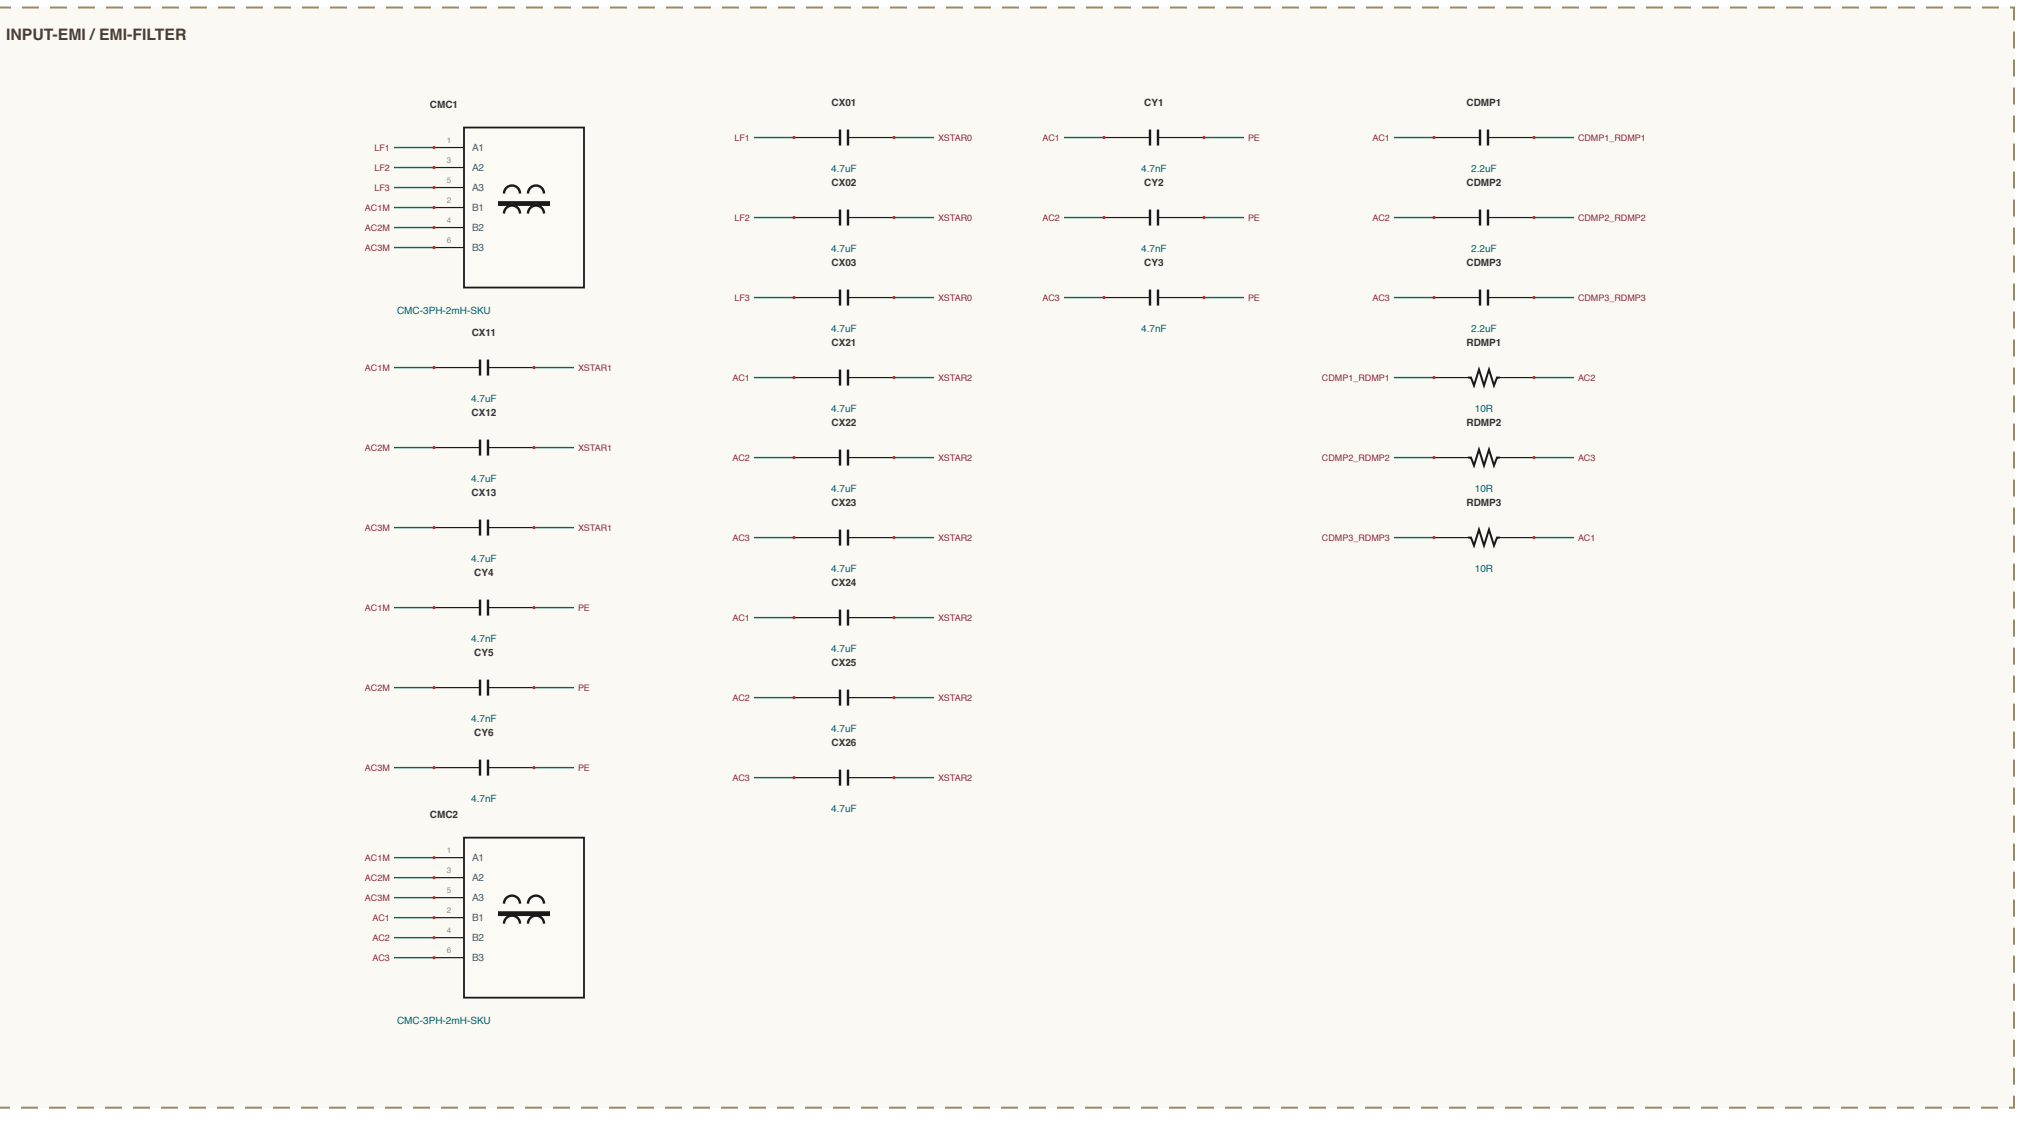
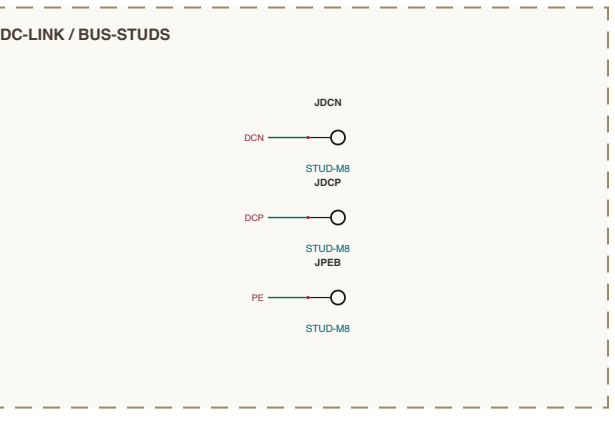
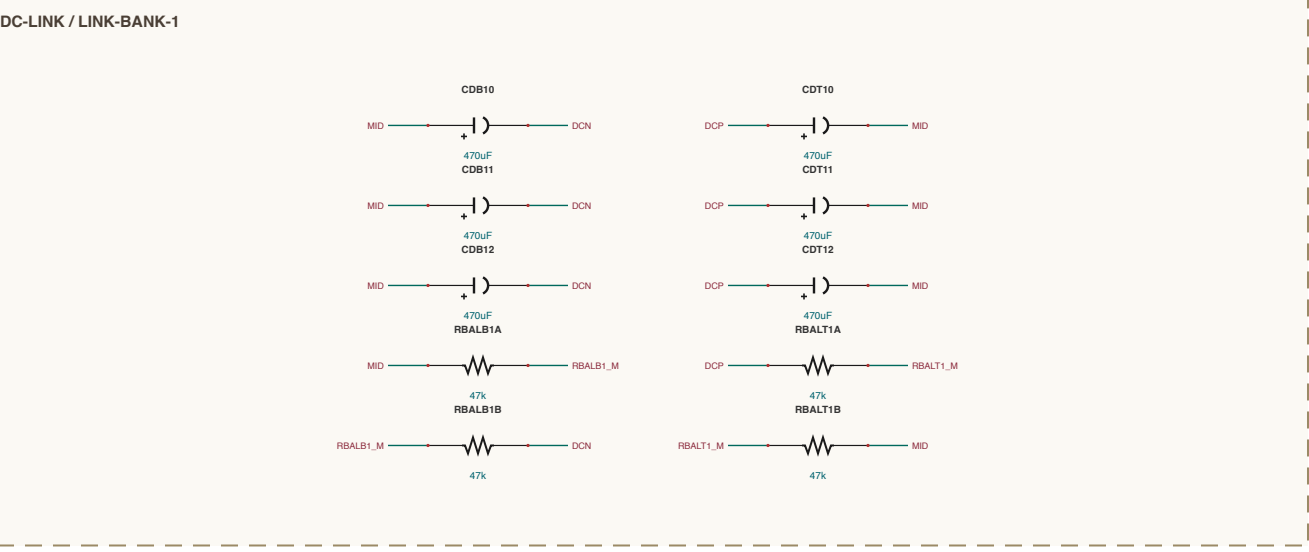
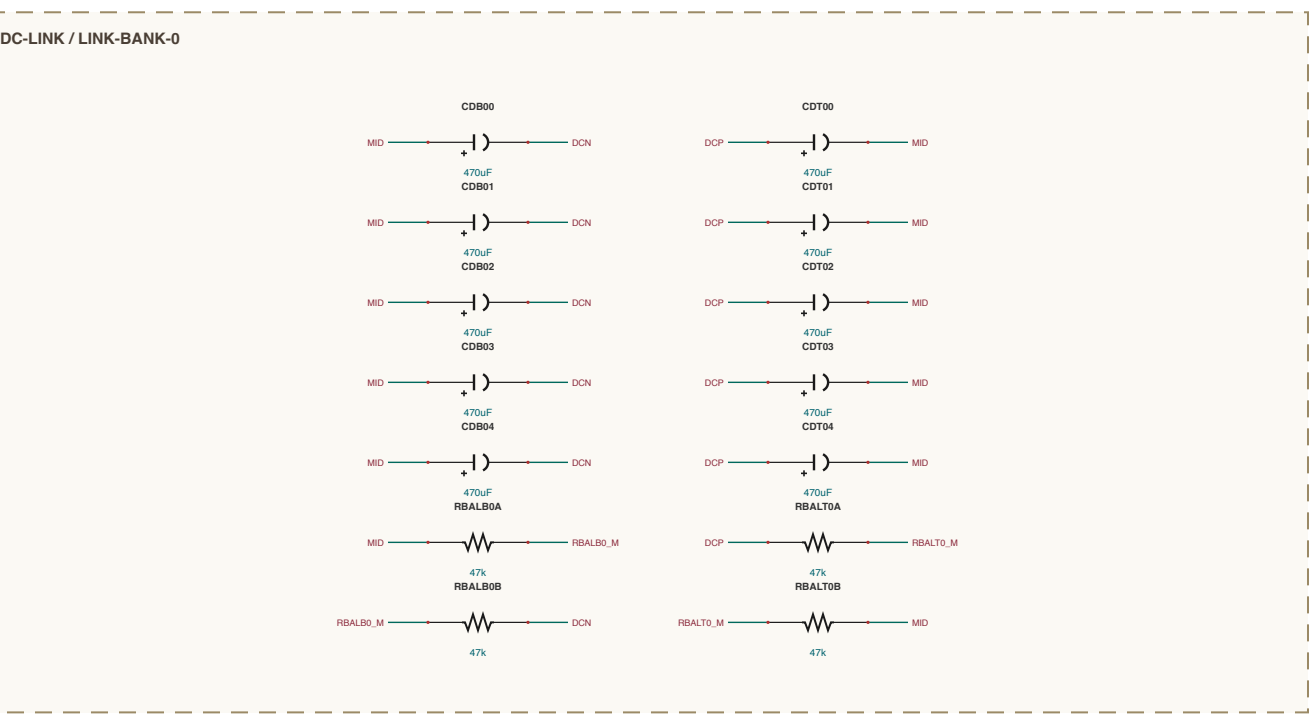
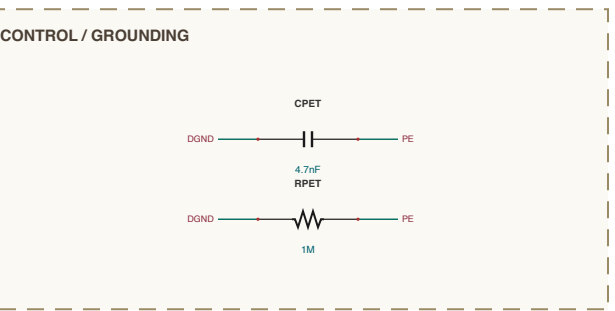
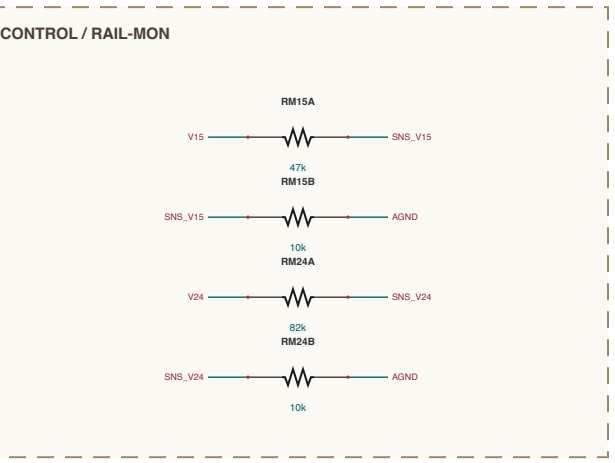
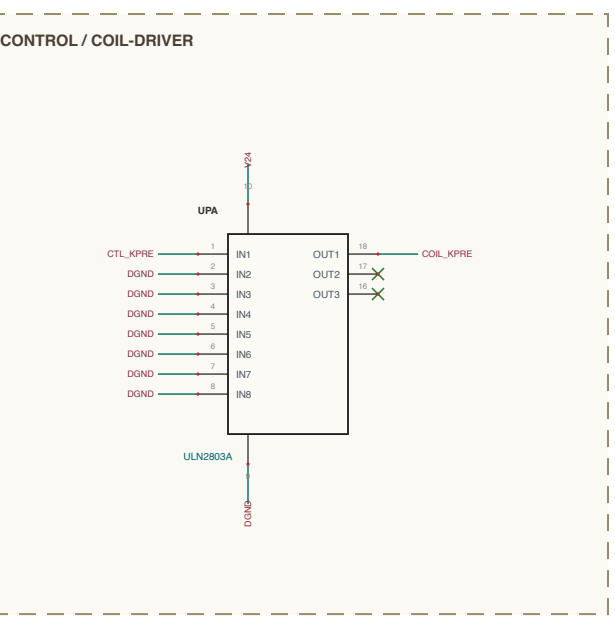
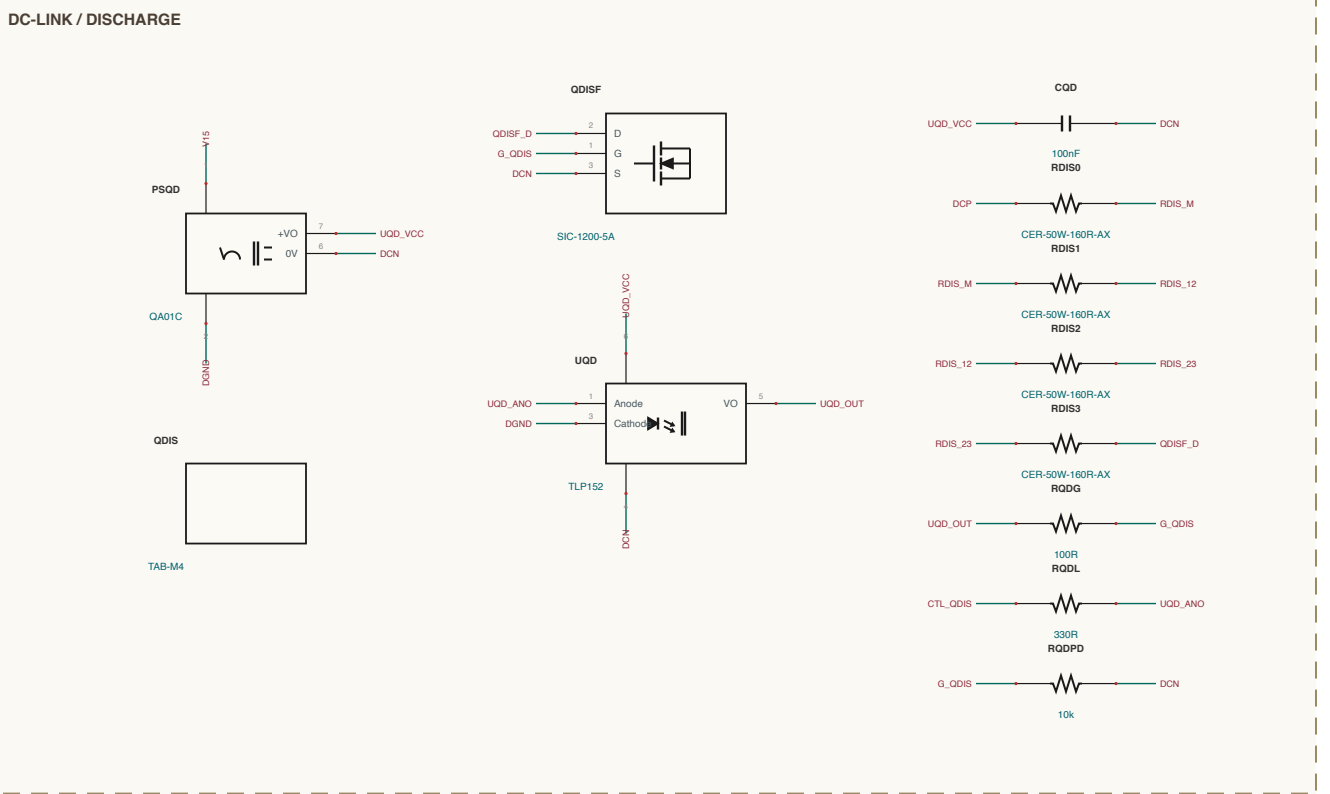
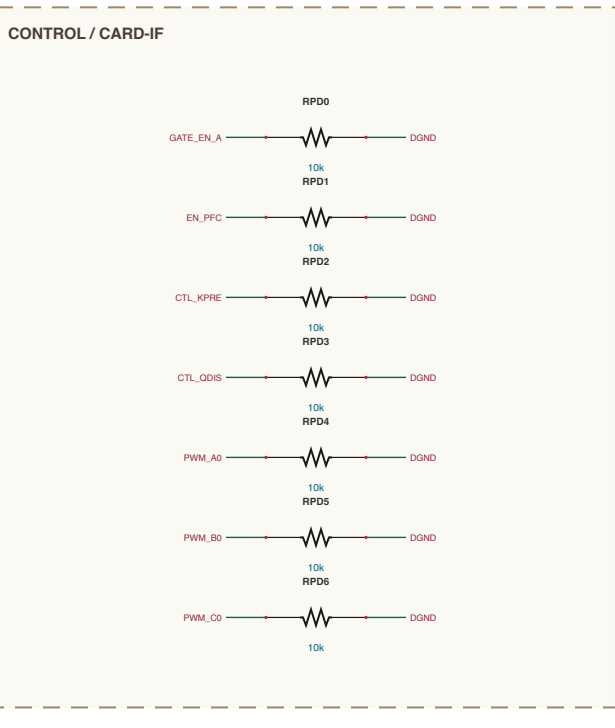
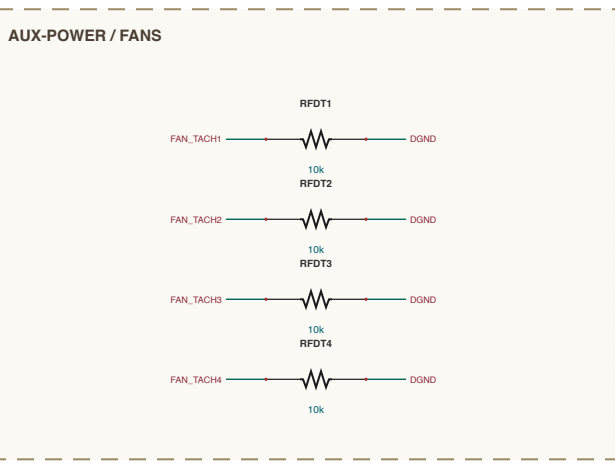
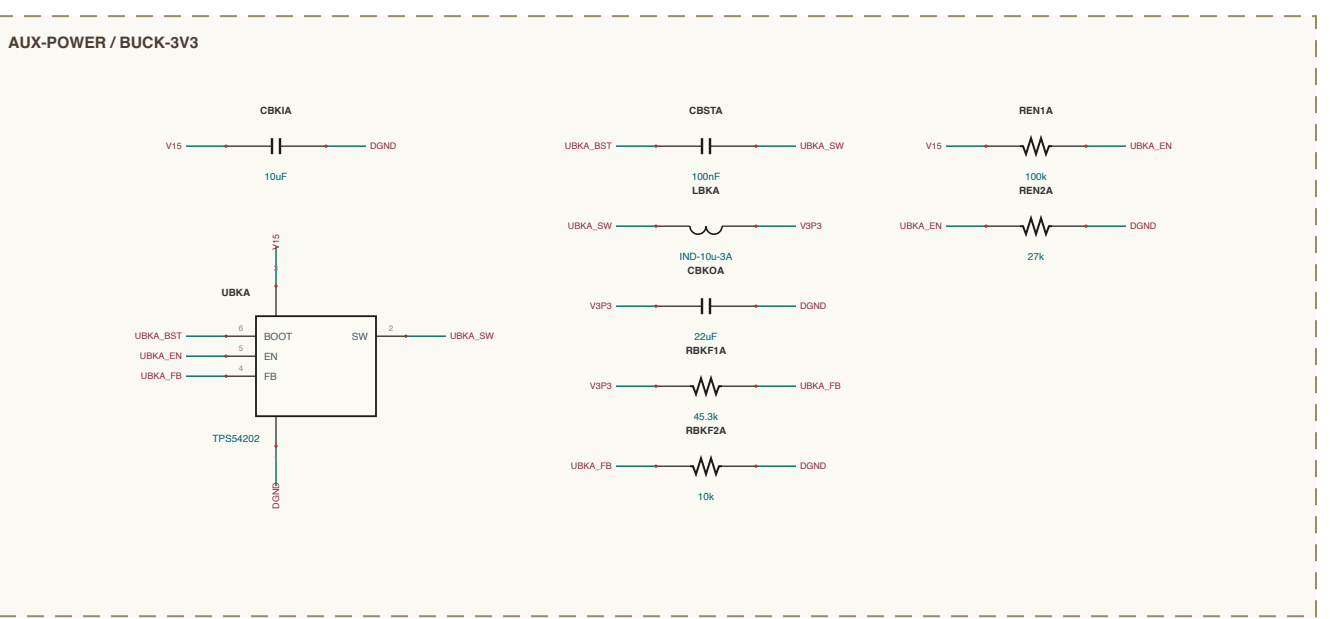
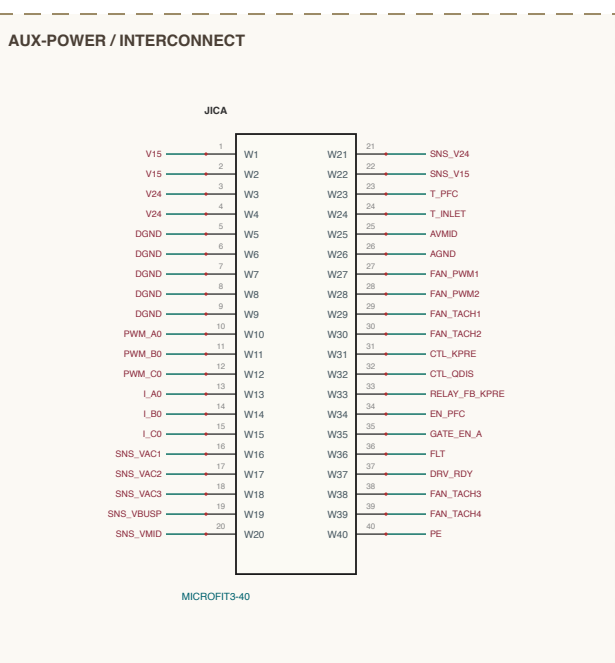
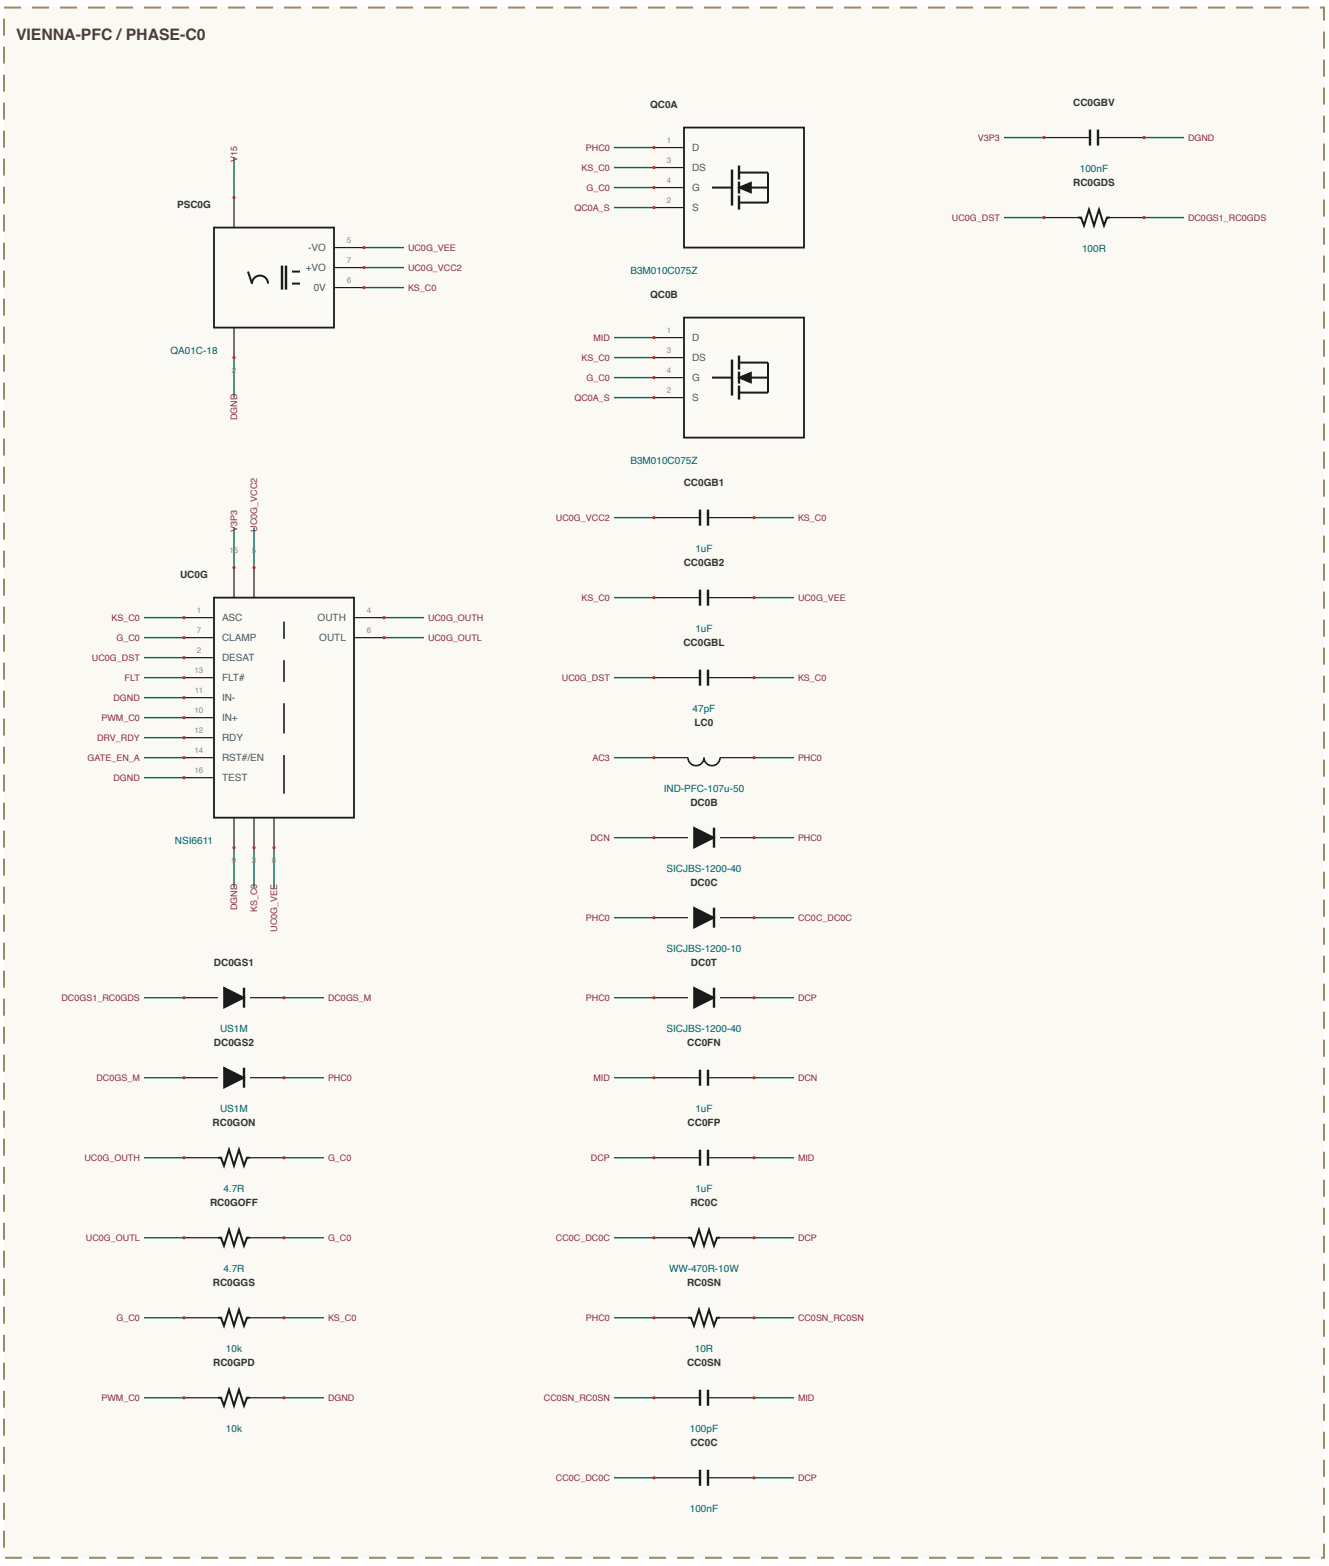
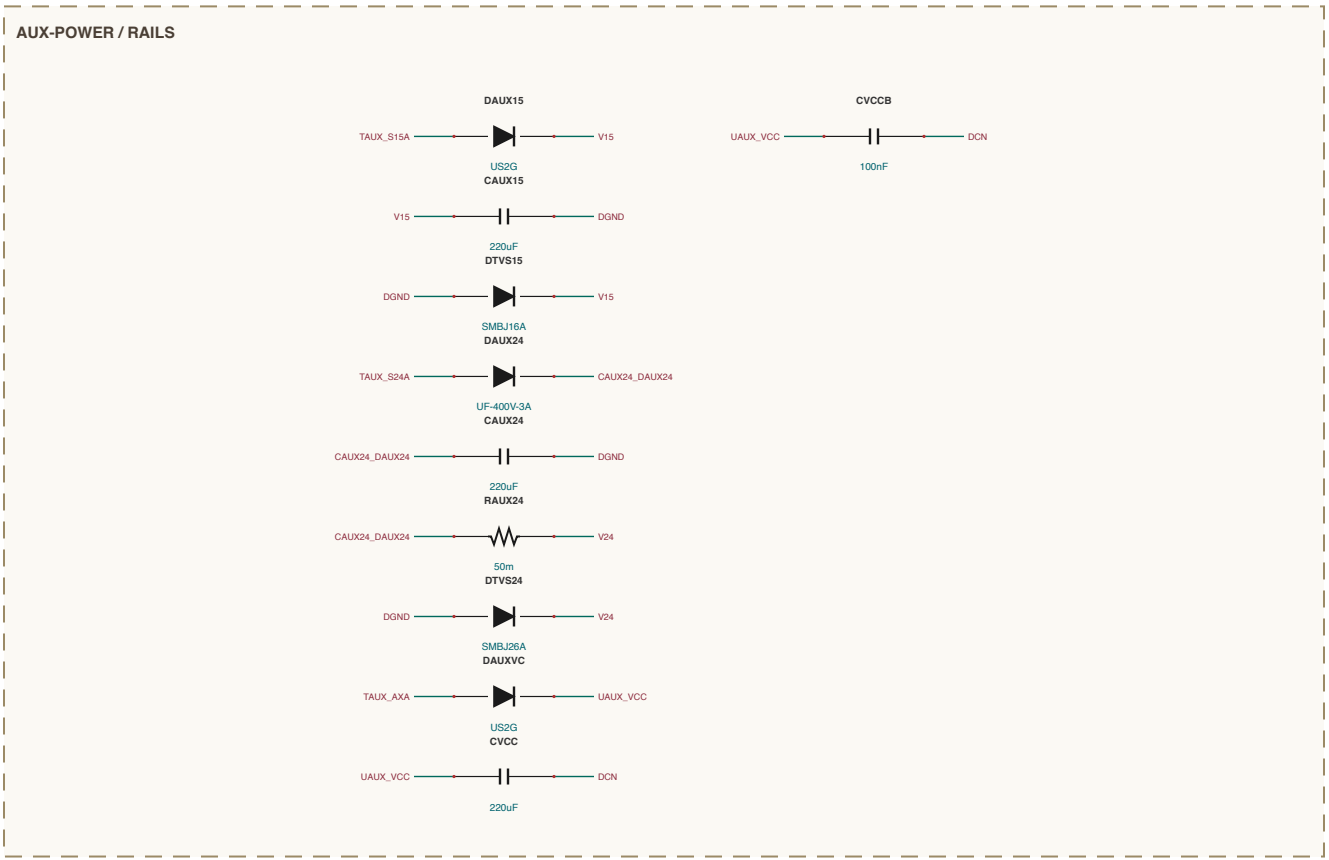
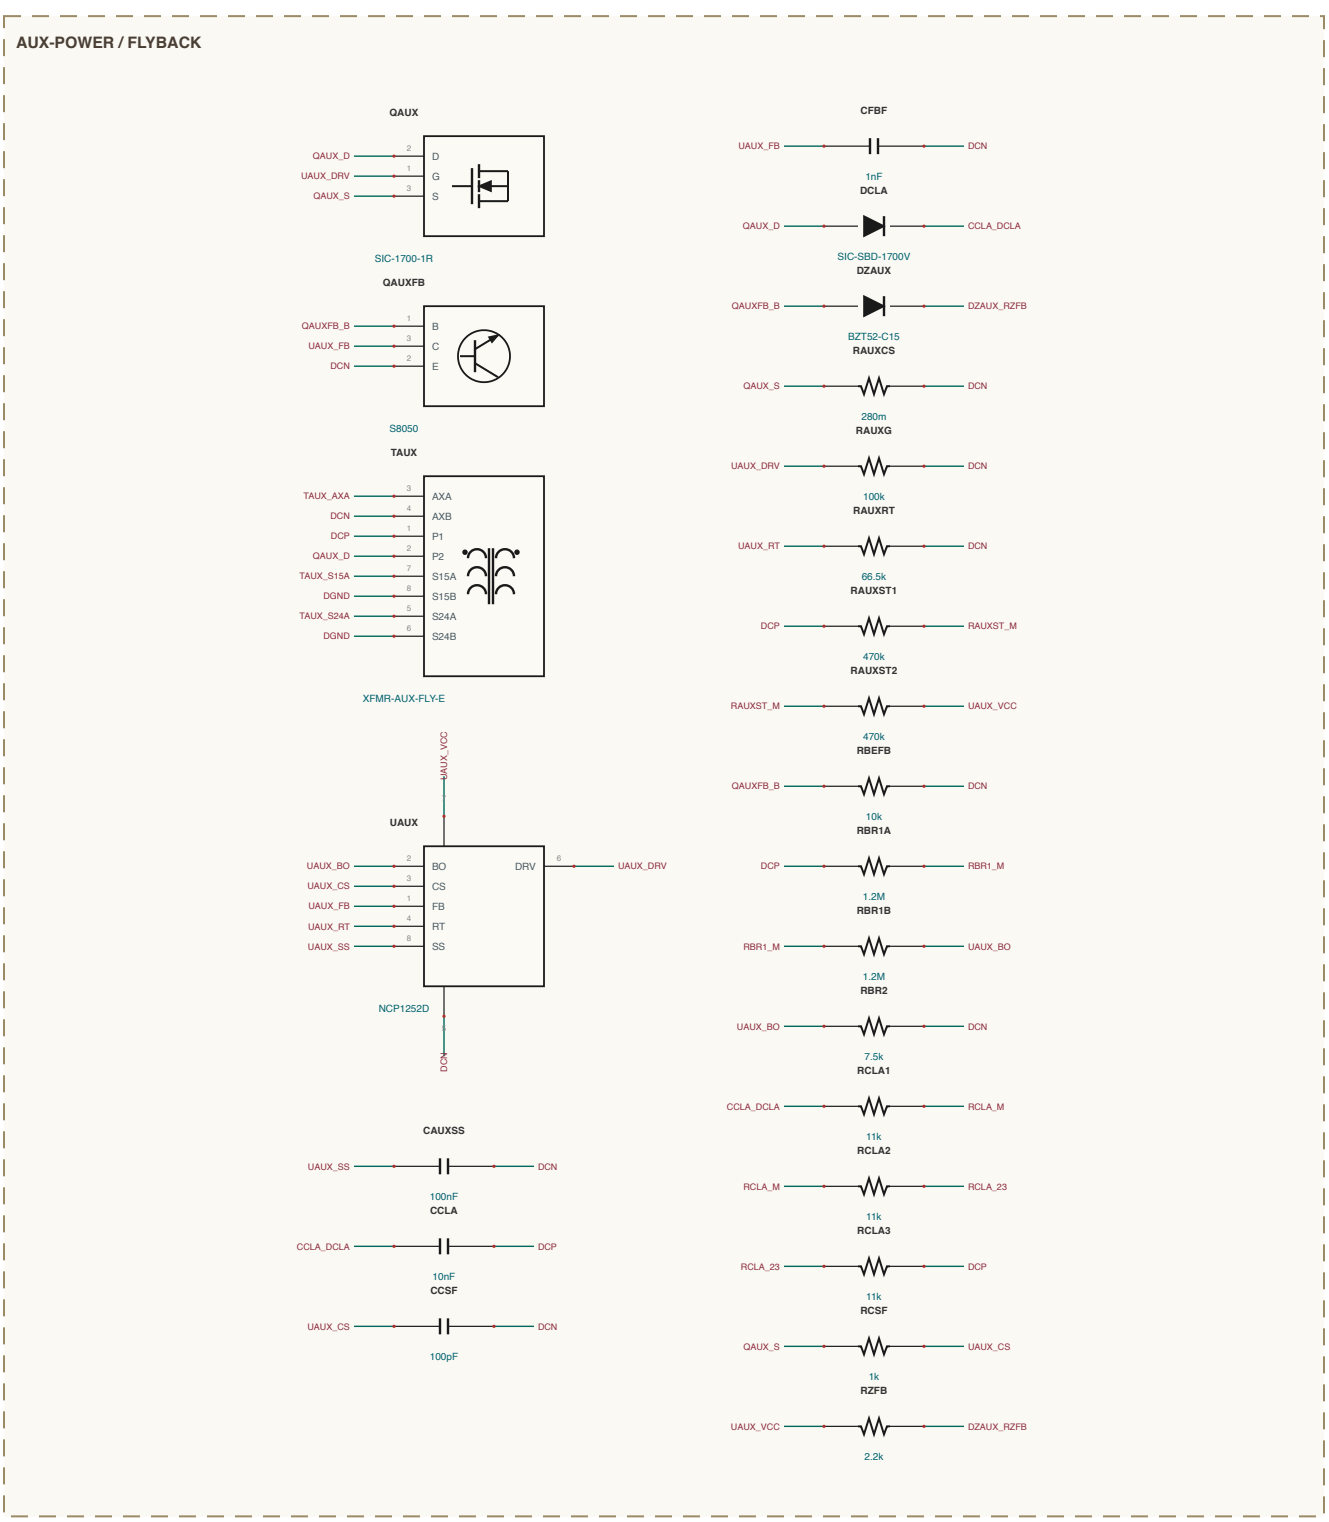
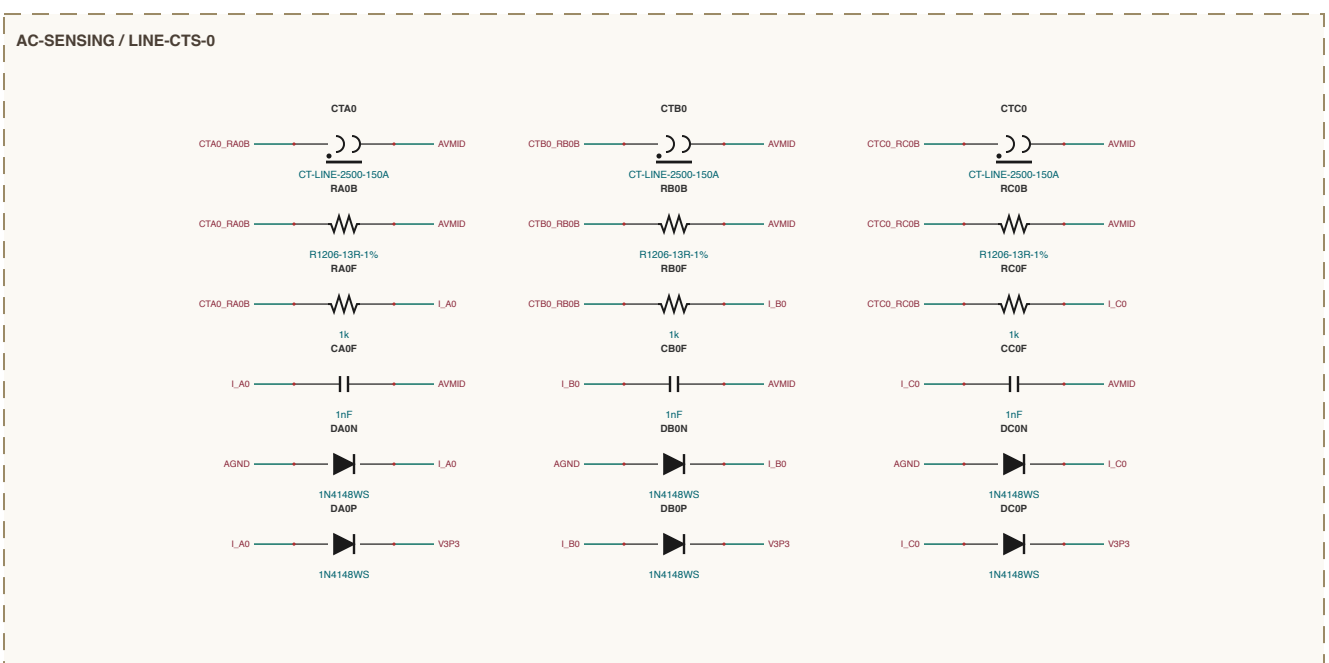
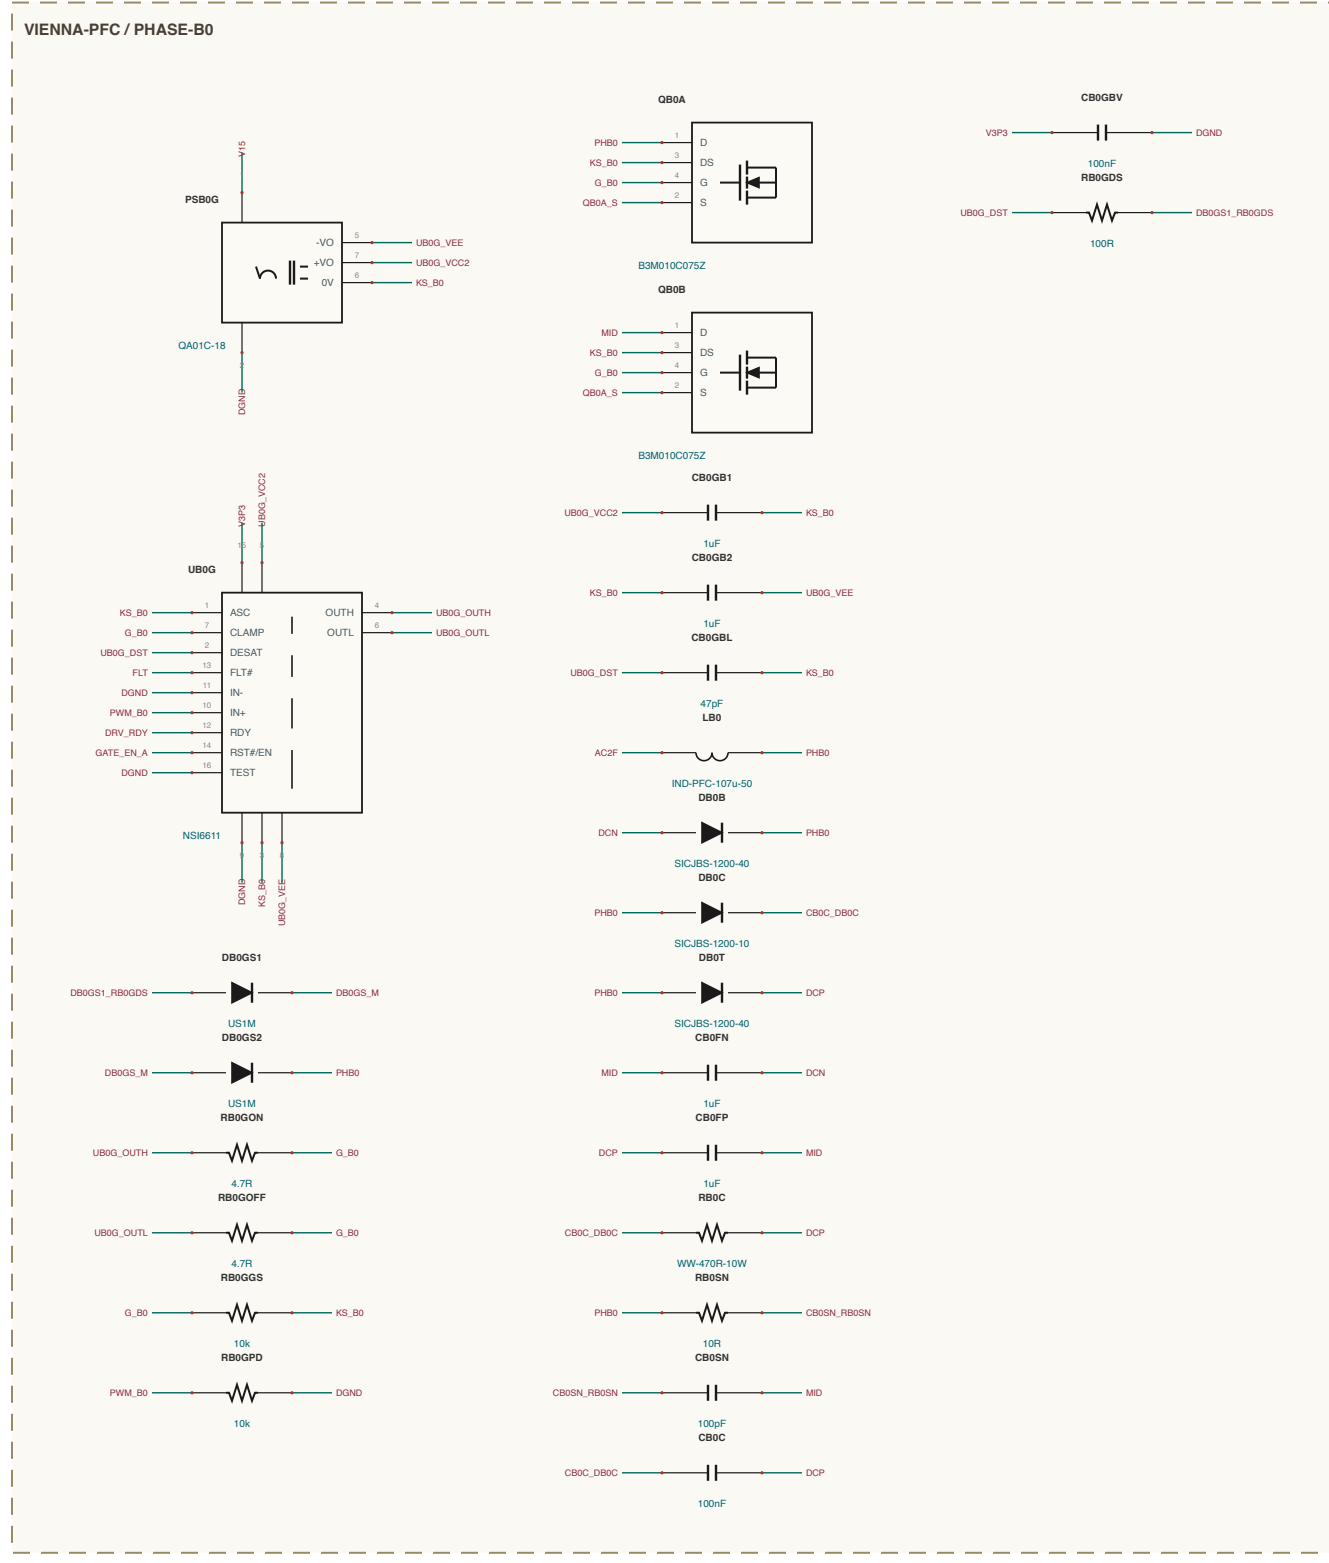
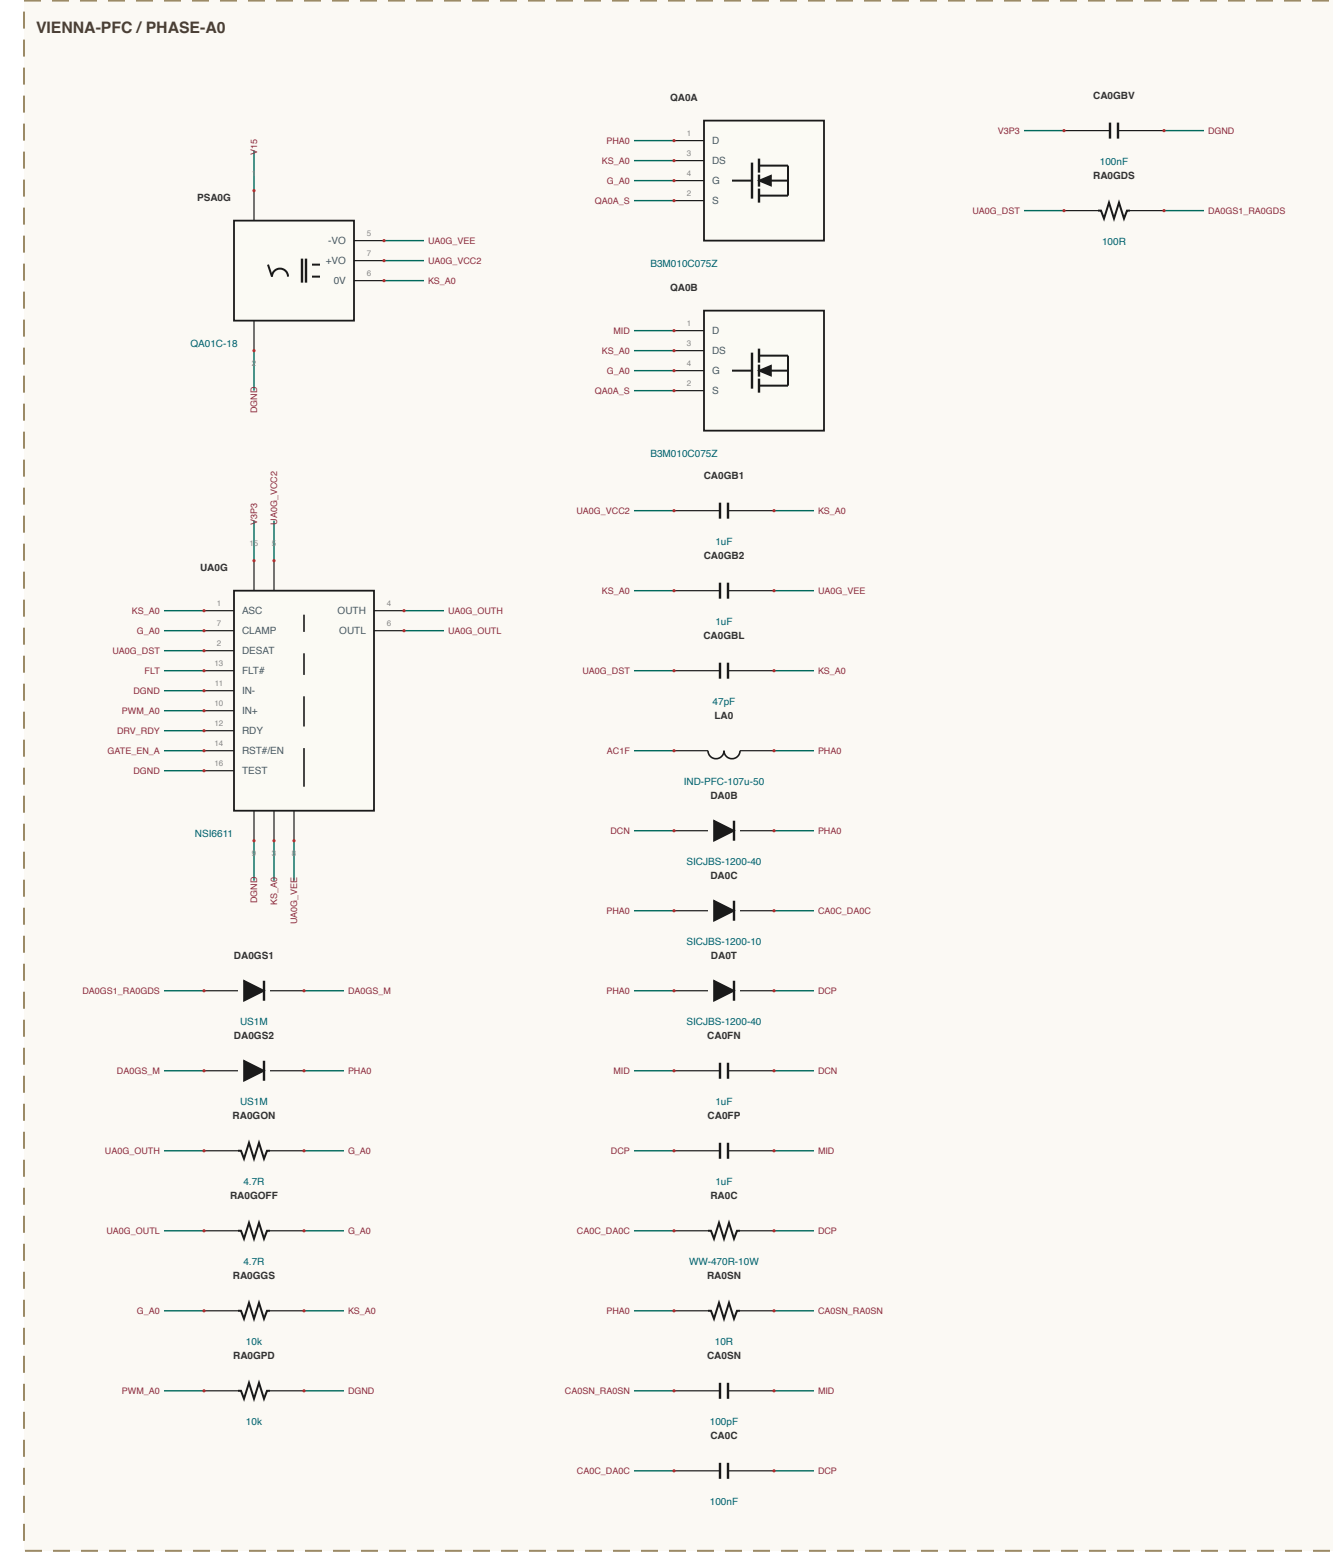
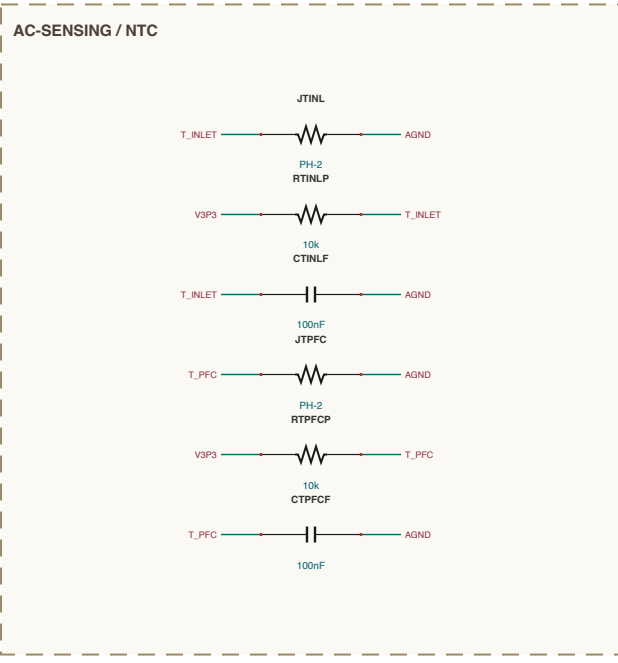
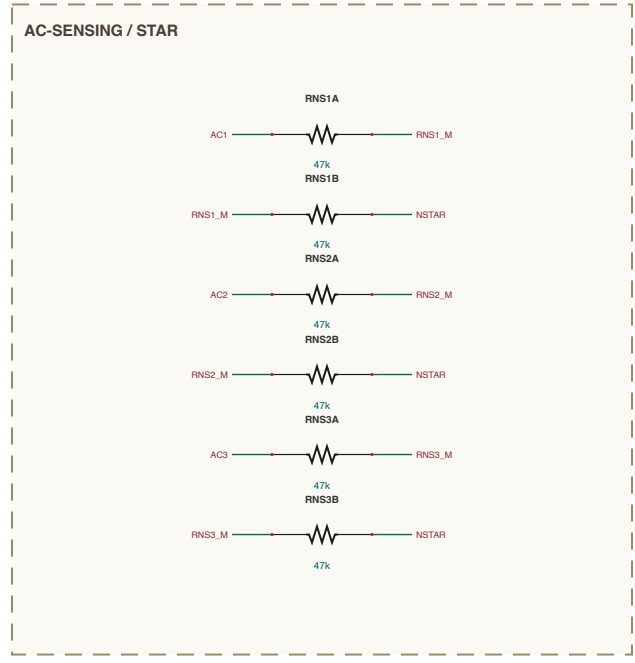
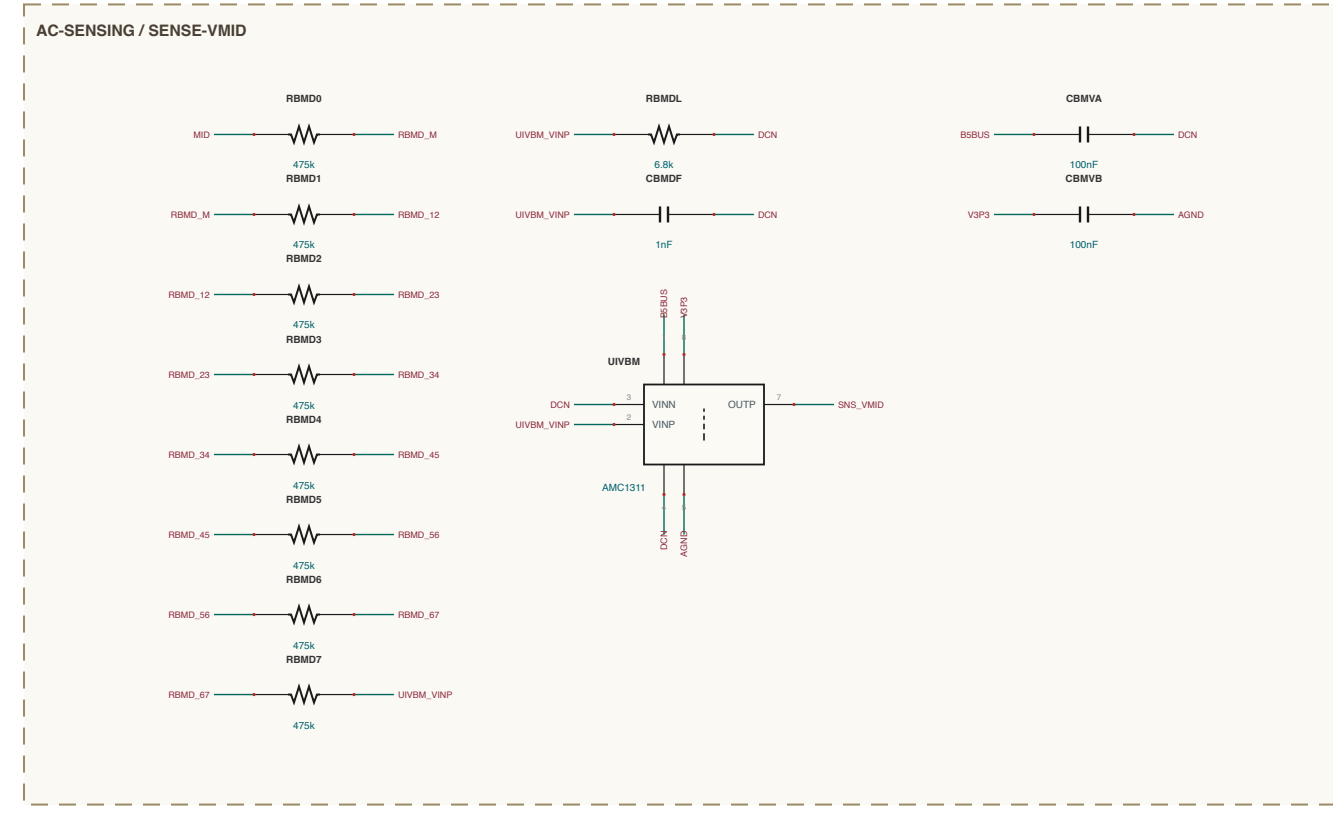
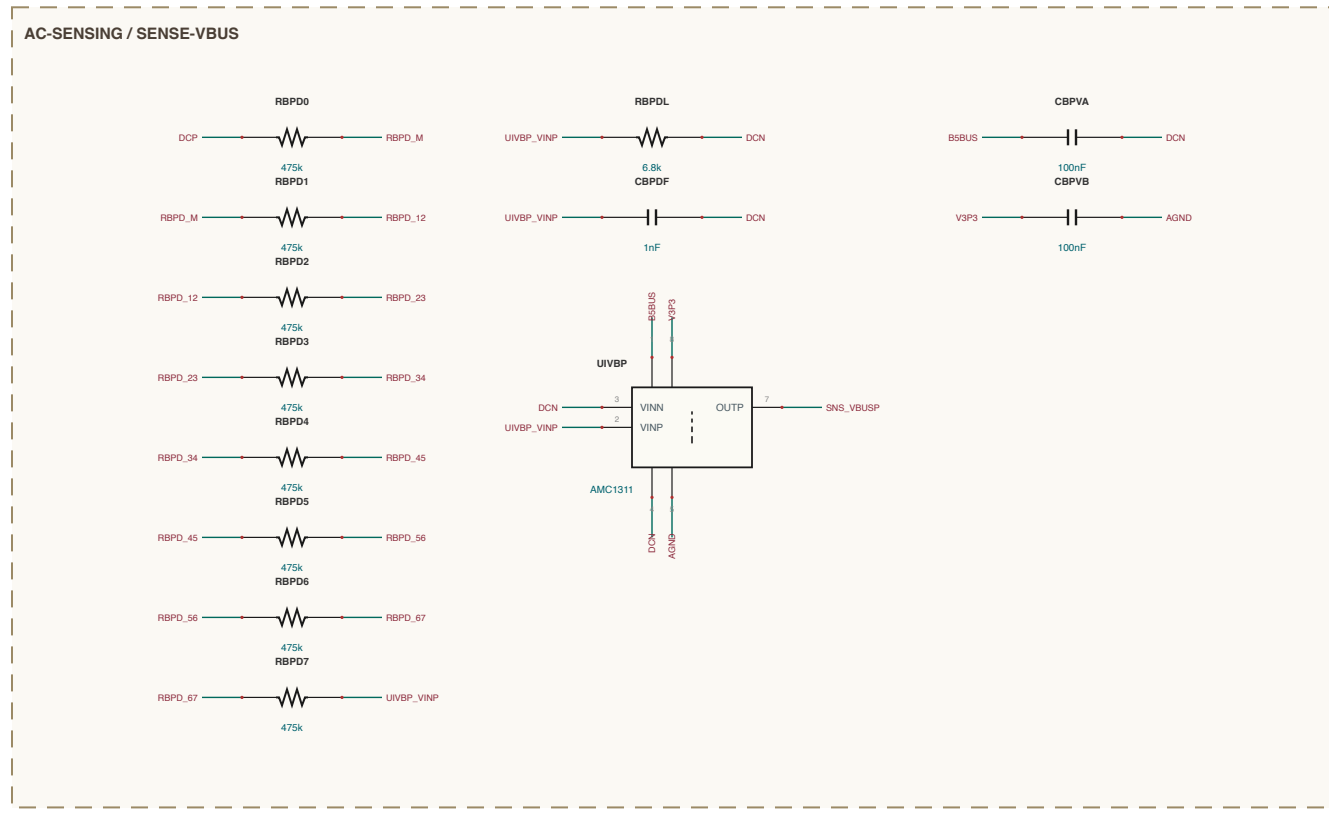
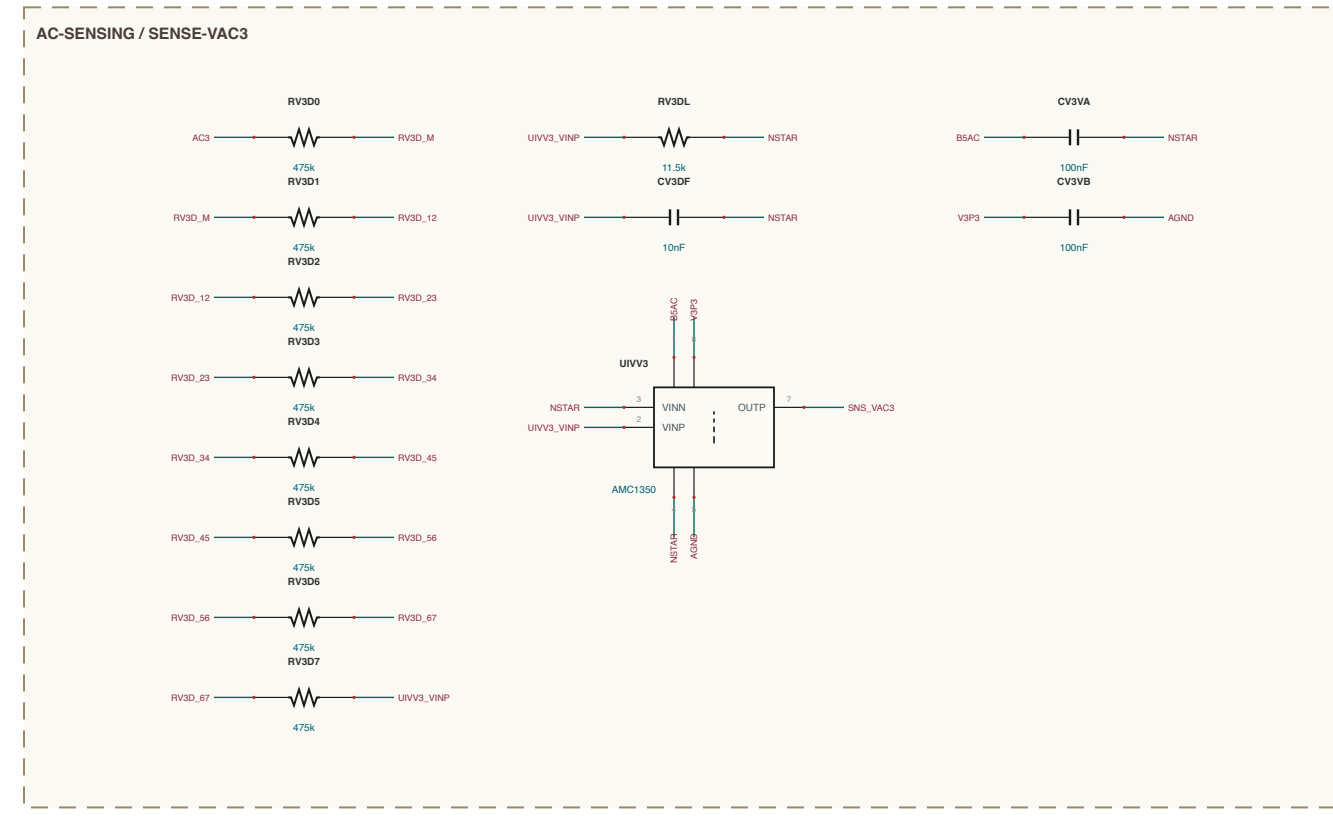
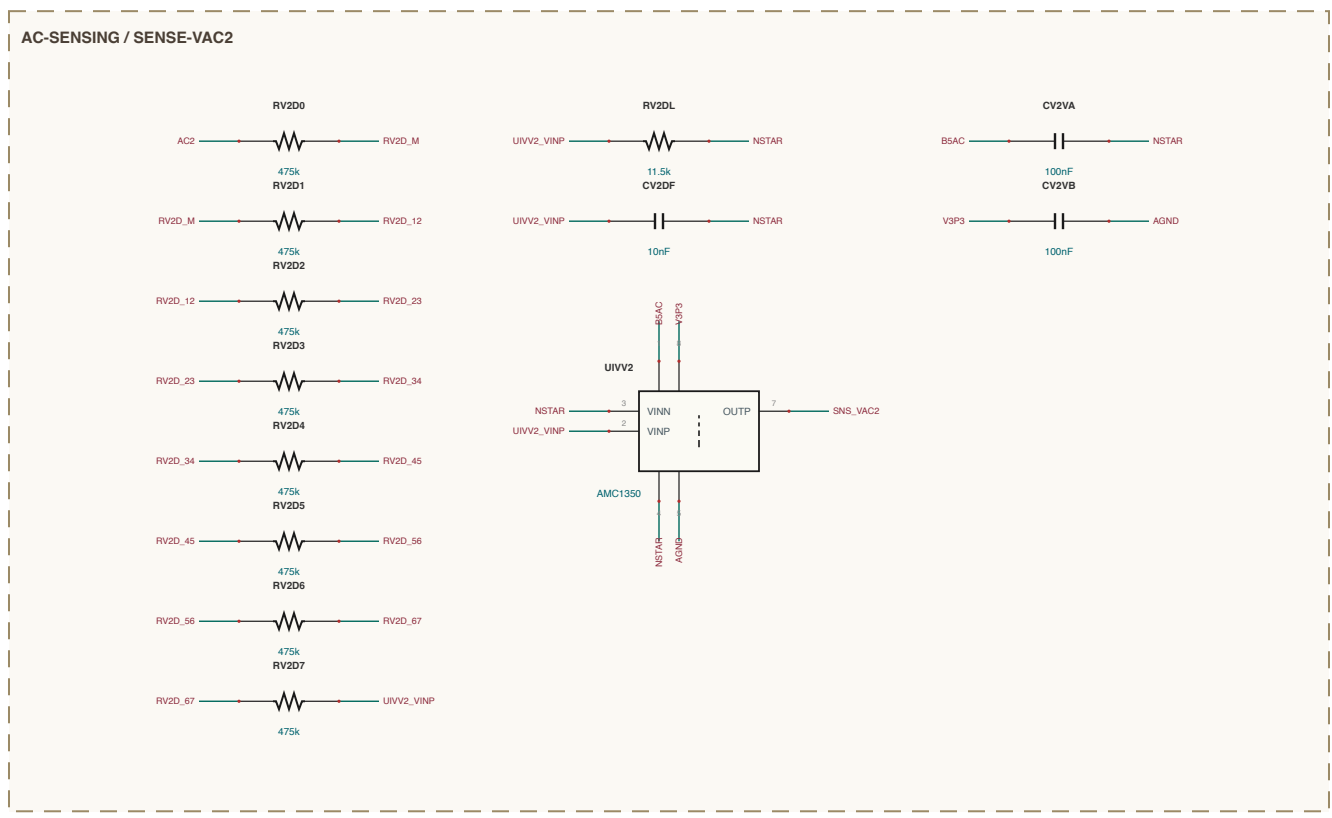
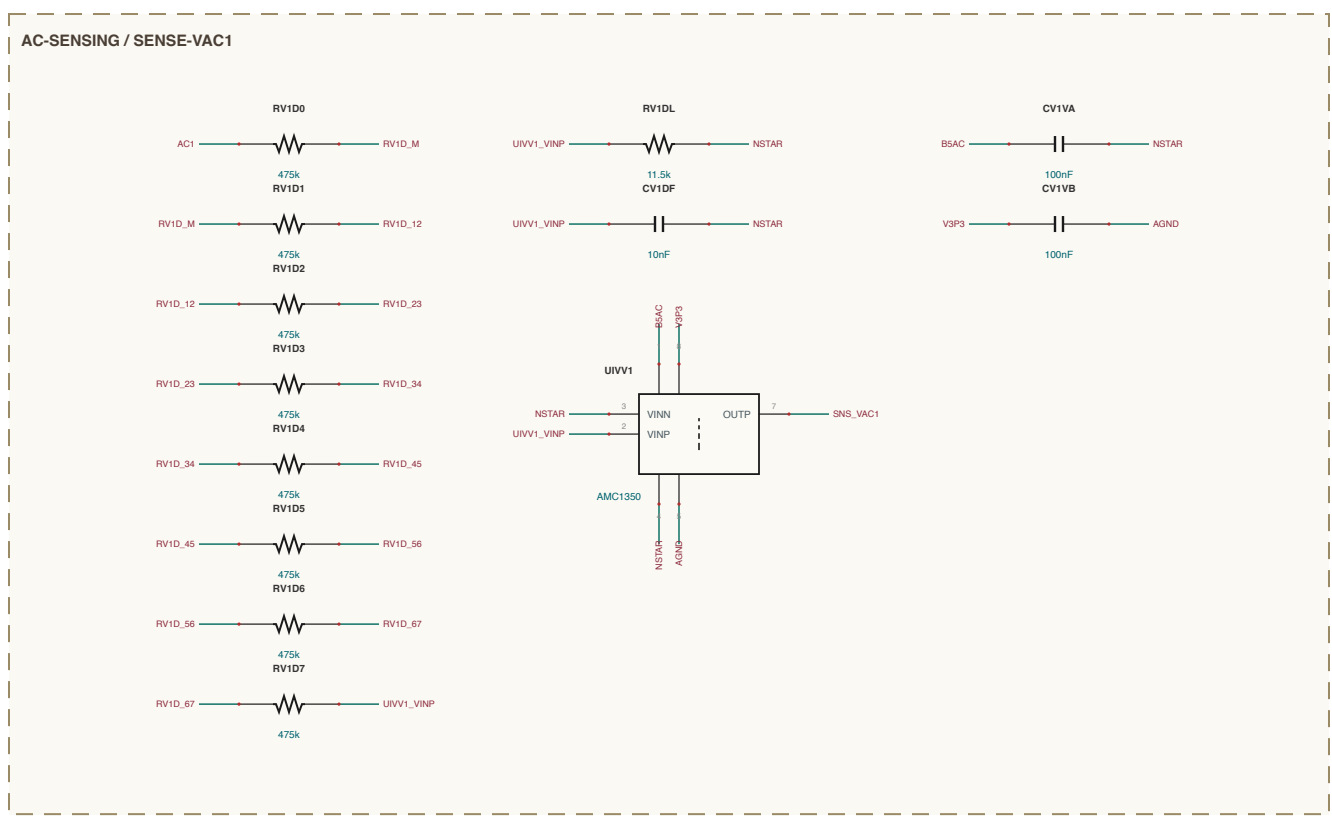
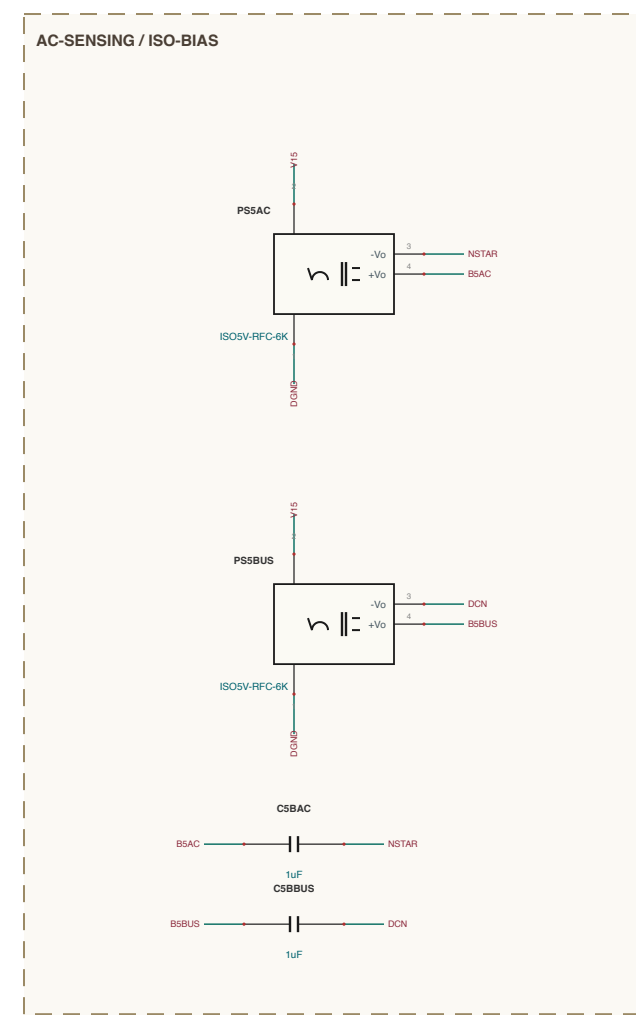


[illegible]

NET NAMING

General positions are named for what they join

Unsub. *offbe* ends at that CG join e.g. *GGTGA_30P*

Subunits. 1st midpoint of a series pair e.g. *SRALTA_M*

Subunits. *ortho* top between Subunits_{ortho} e.g. *RYVY_41*

All others are explicit design rules

MAGNETICS CONSTRUCTION

Identify per chain/magnetics and (dorms, gals, TSS, acceptance time from Bore)

BT LAB CODE: SA 770 (See manual) CAPACITORS KCL_NT_S, Node = 6 80 100V = 0.5 10T_S V_{CC}=0.60V @ 0.103A (see p435)

BIG END CIRC = 12k 5K 1K 10K in 3 star rings + CIRC2 + NC (range); DA 98H clocked divided

Cr or 768M windows