




AC-SENSING / ISO-BIAS

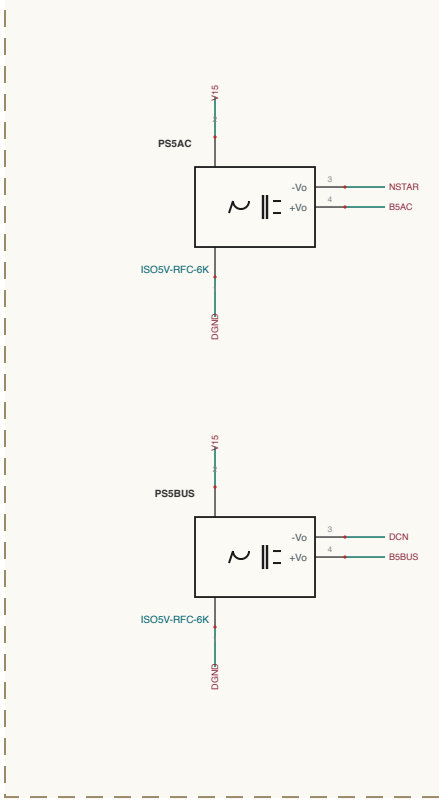


AC-SENSING / SENSE-VAC1

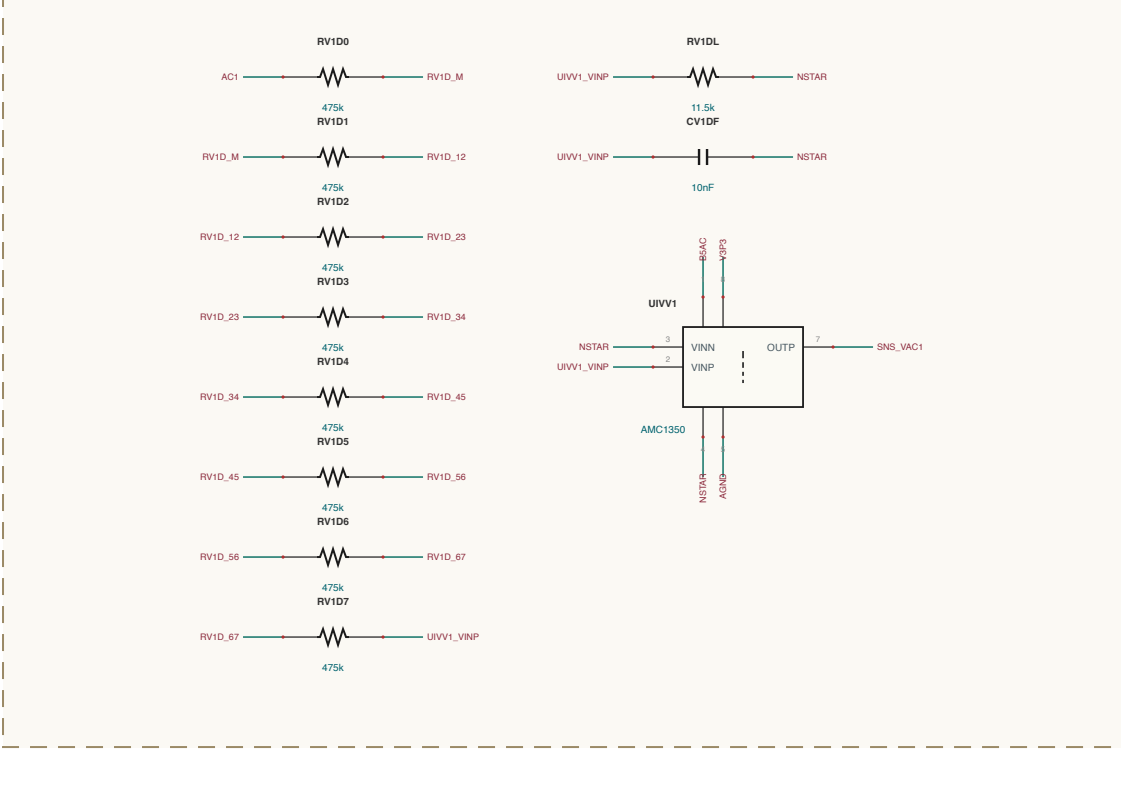


AC-SENSING / SENSE-VAC2

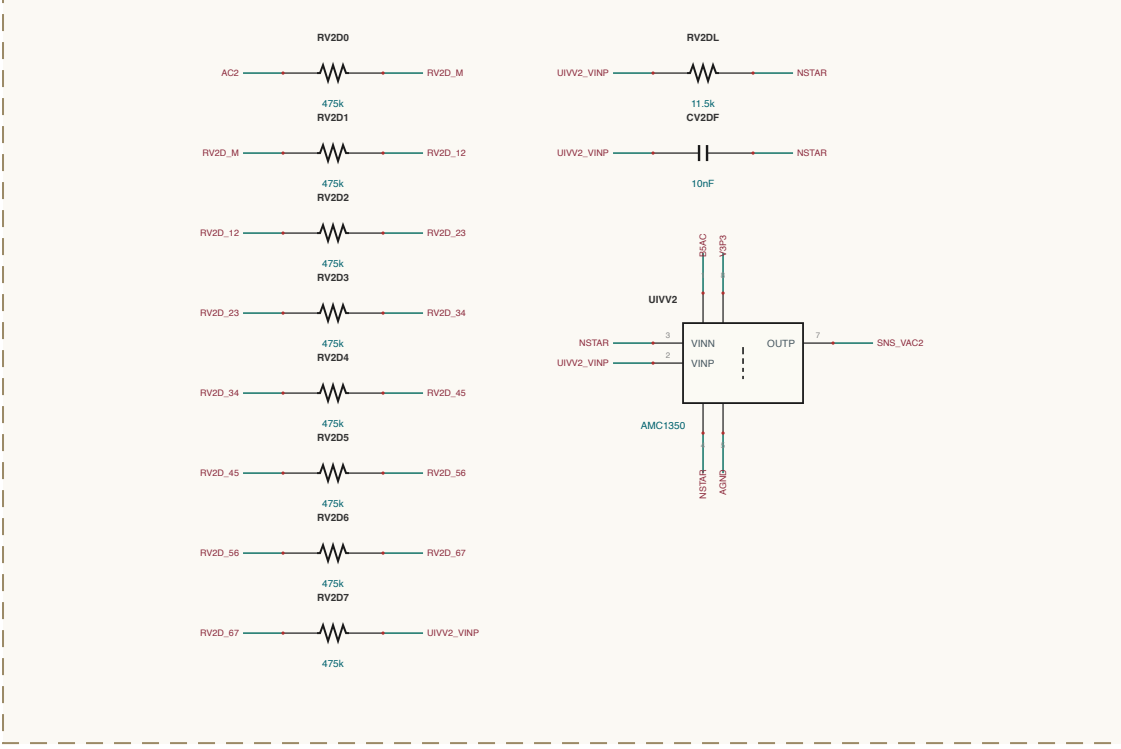


AC-SENSING / SENSE-VAC3

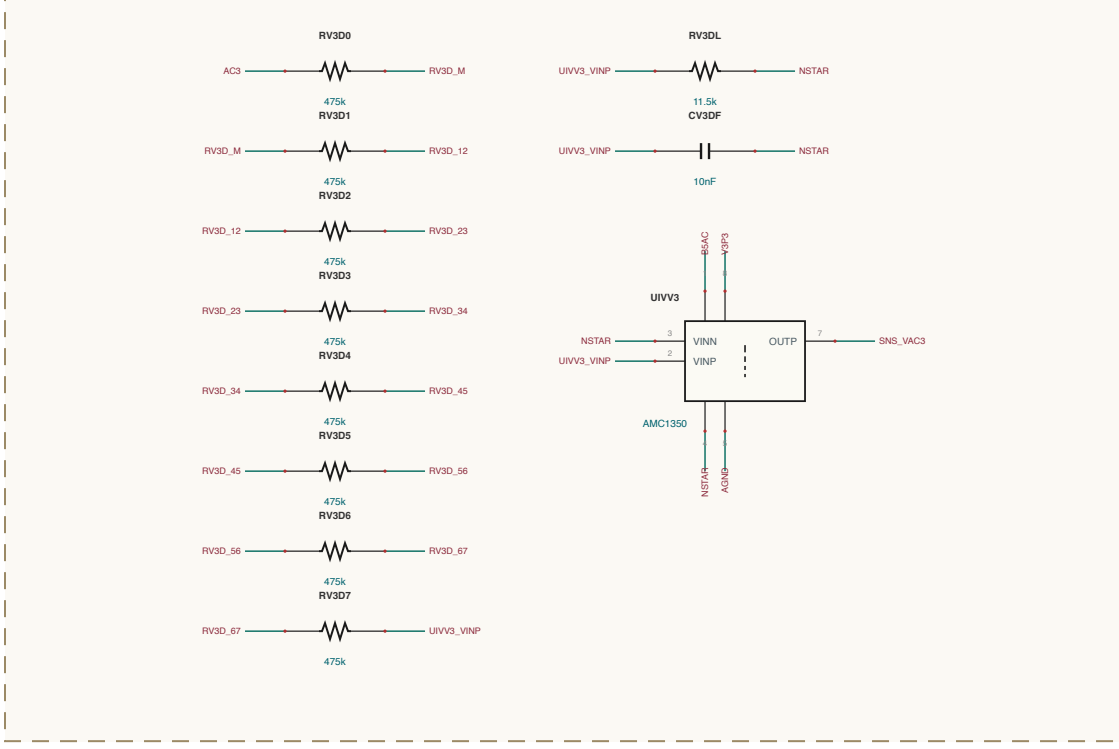


AC-SENSING / SENSE-VBUS

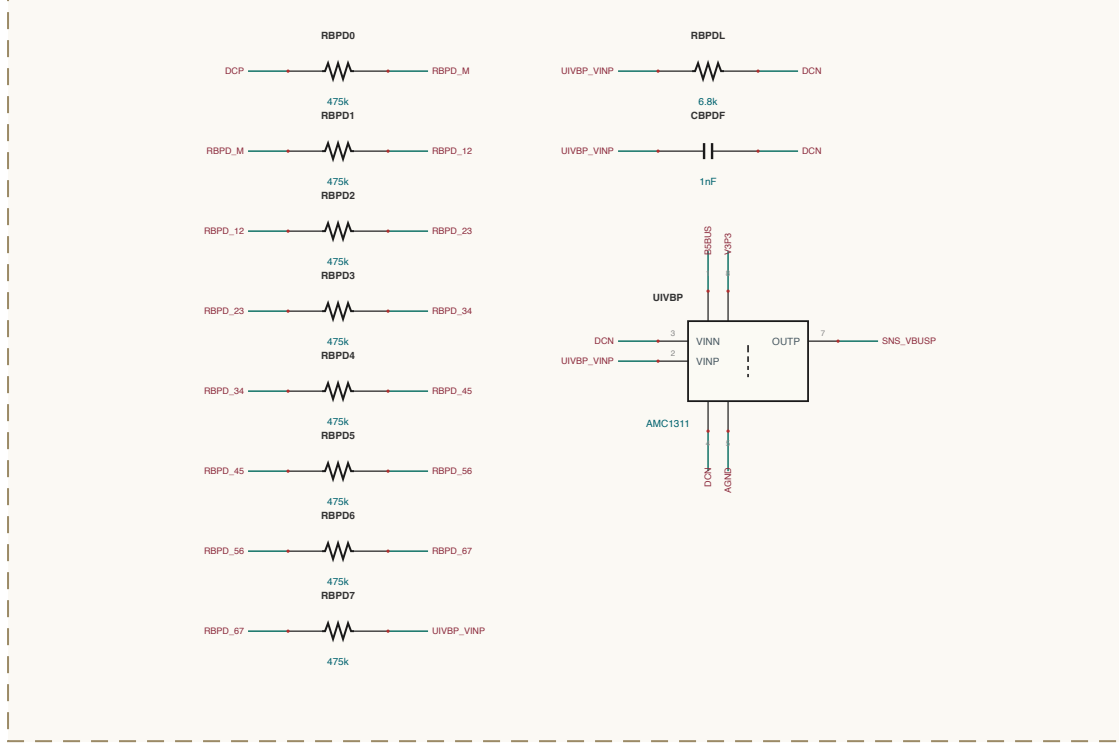


AC-SENSING / SENSE-VIND

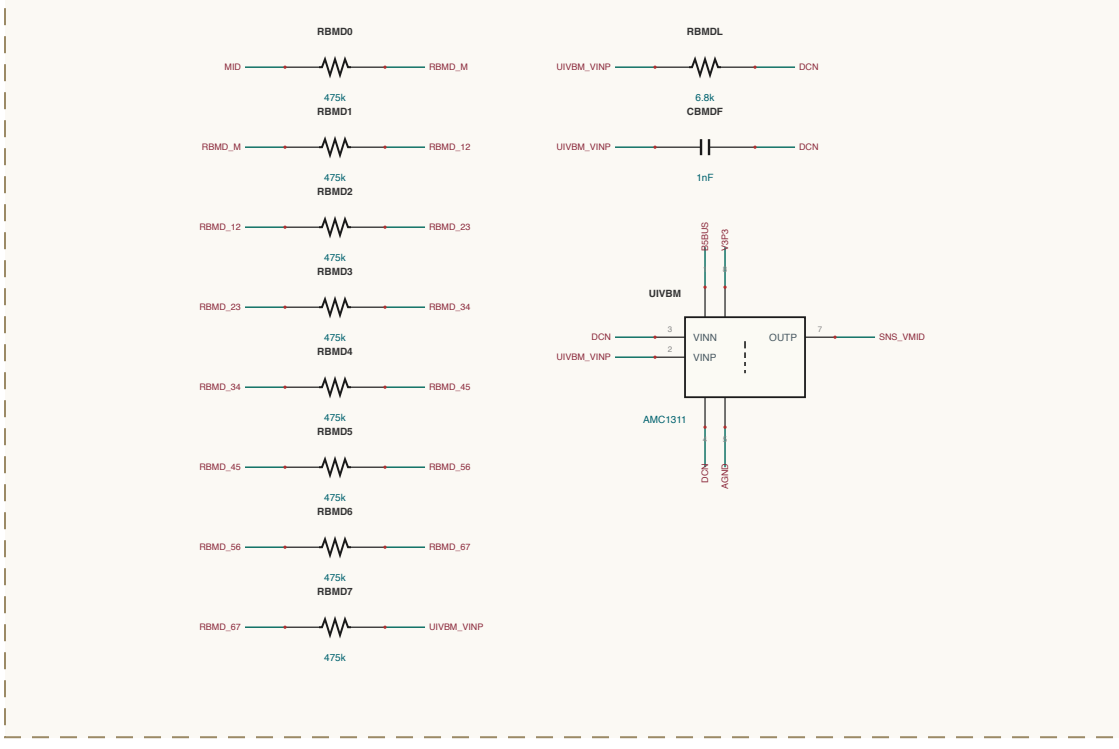


AC-SENSING / STAR

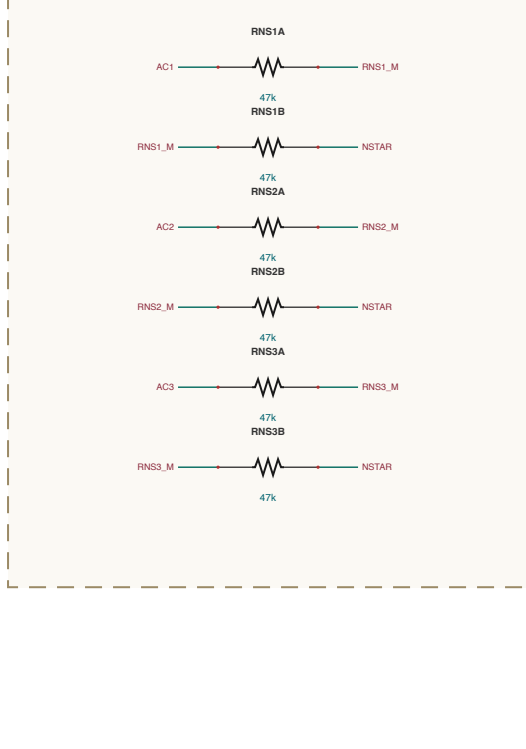


AC-SENSING / NTC

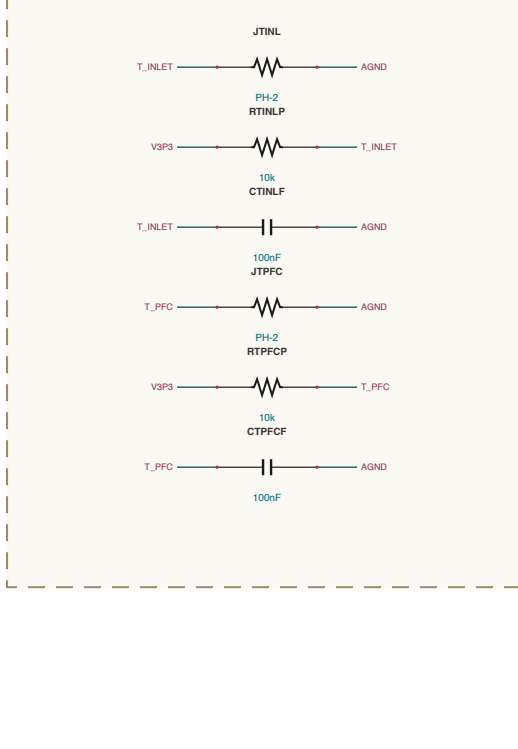


AC-SENSING / LINE-CTS-0

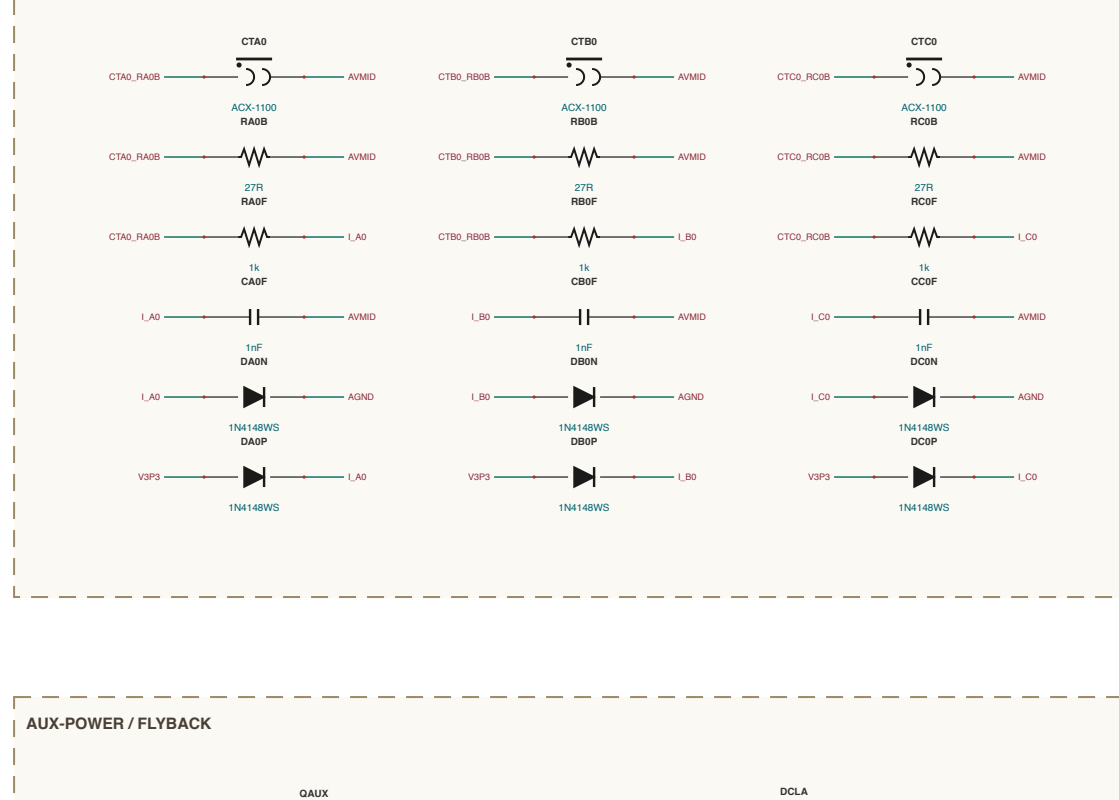


AUX-POWER / FLYBACK

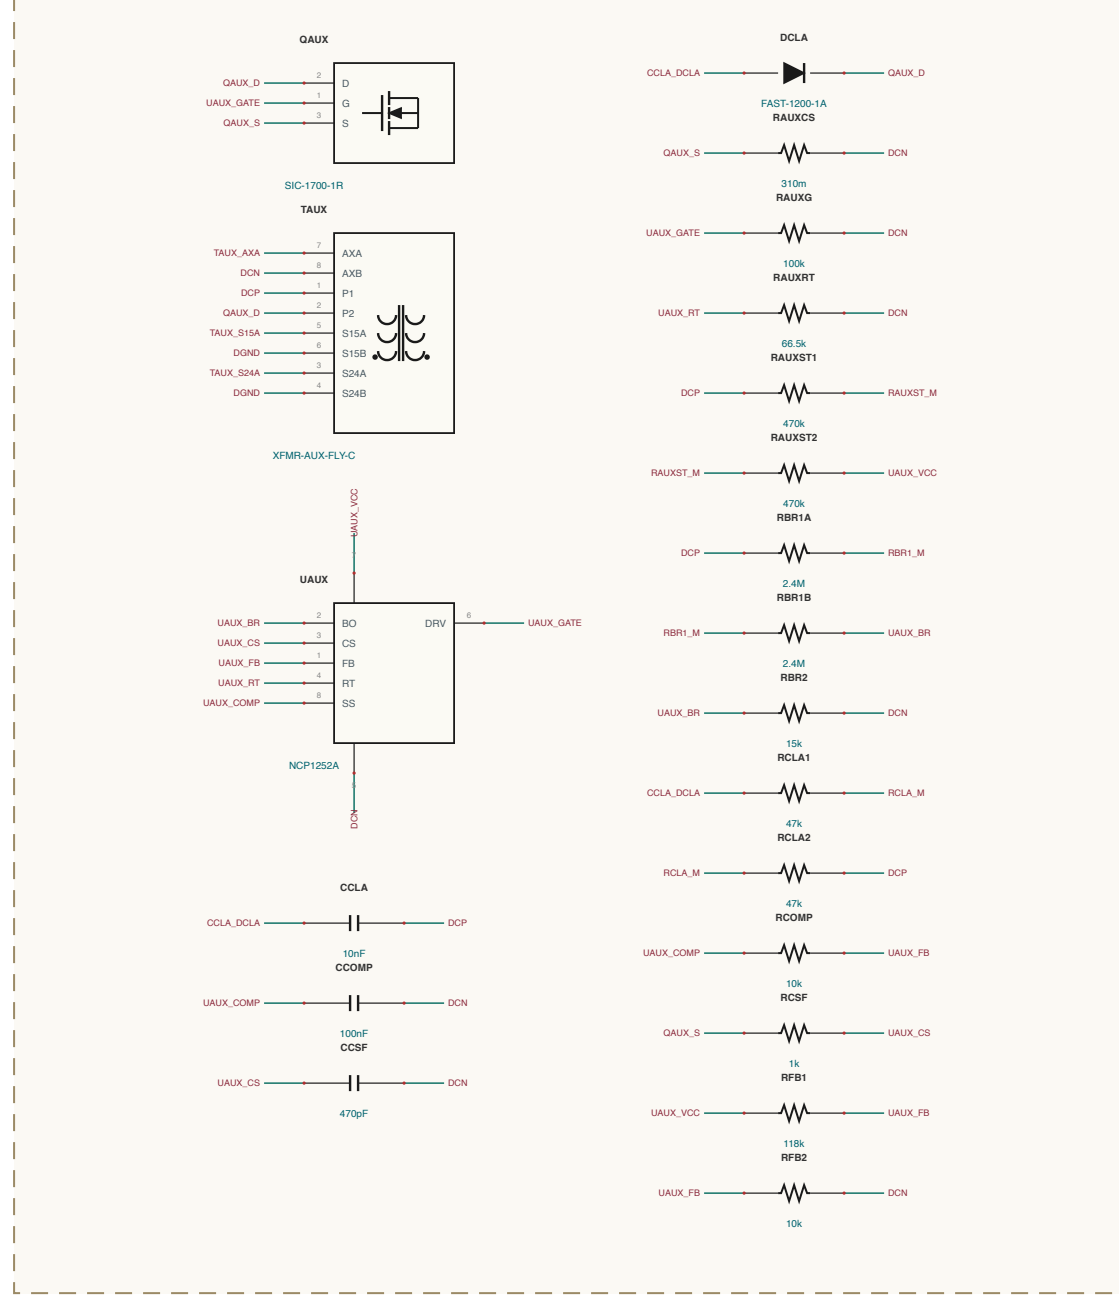


AUX-POWER / INTERCONNECT

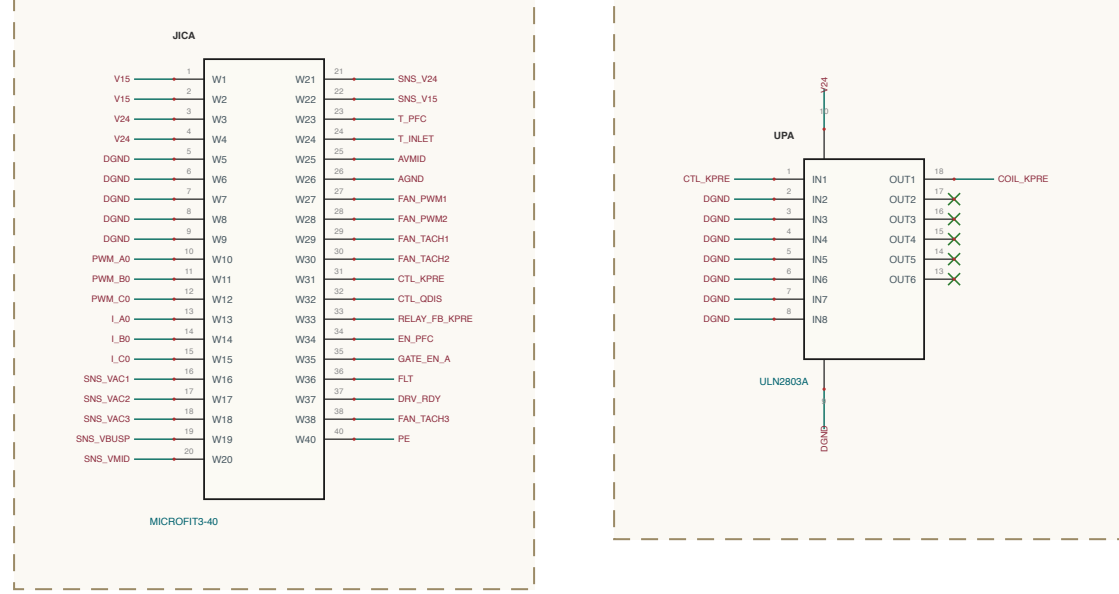


CONTROL / CARD-UP

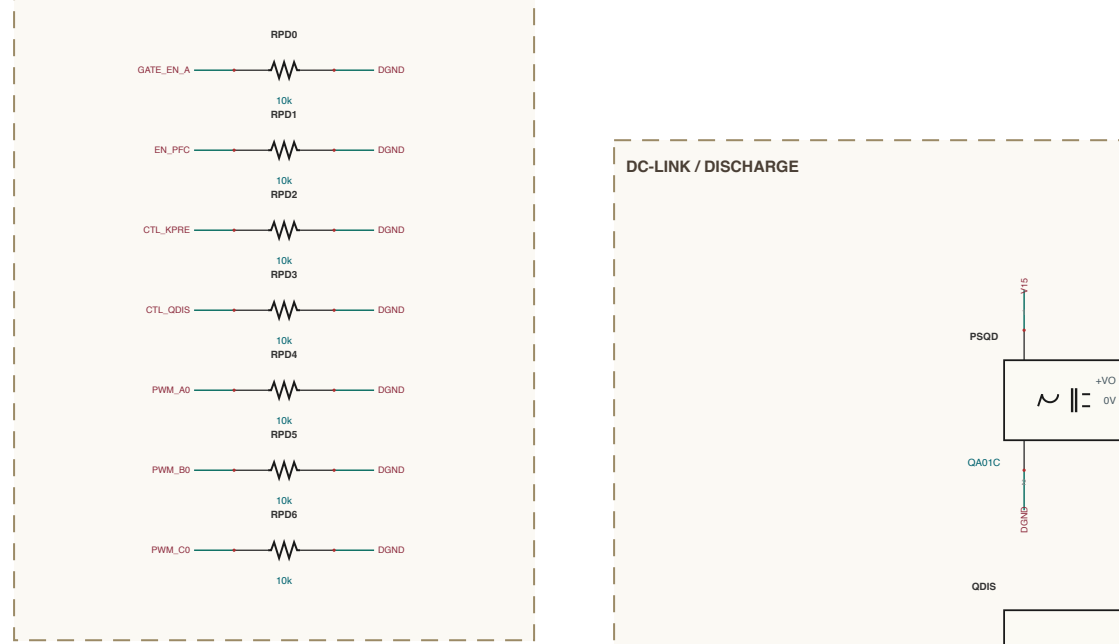


AUX-POWER / FANS

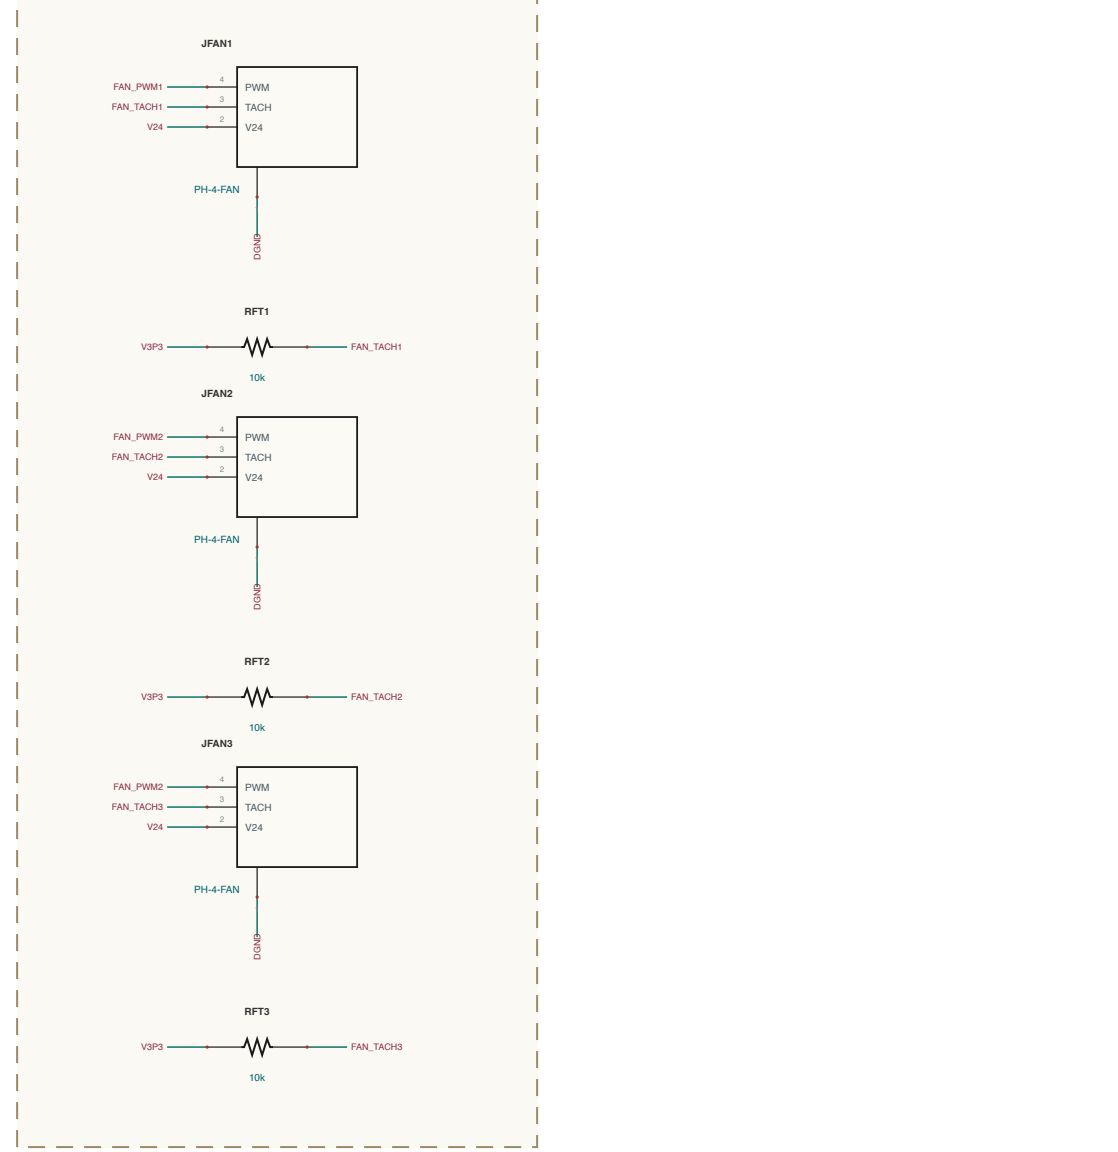


AUX-POWER / RAILS

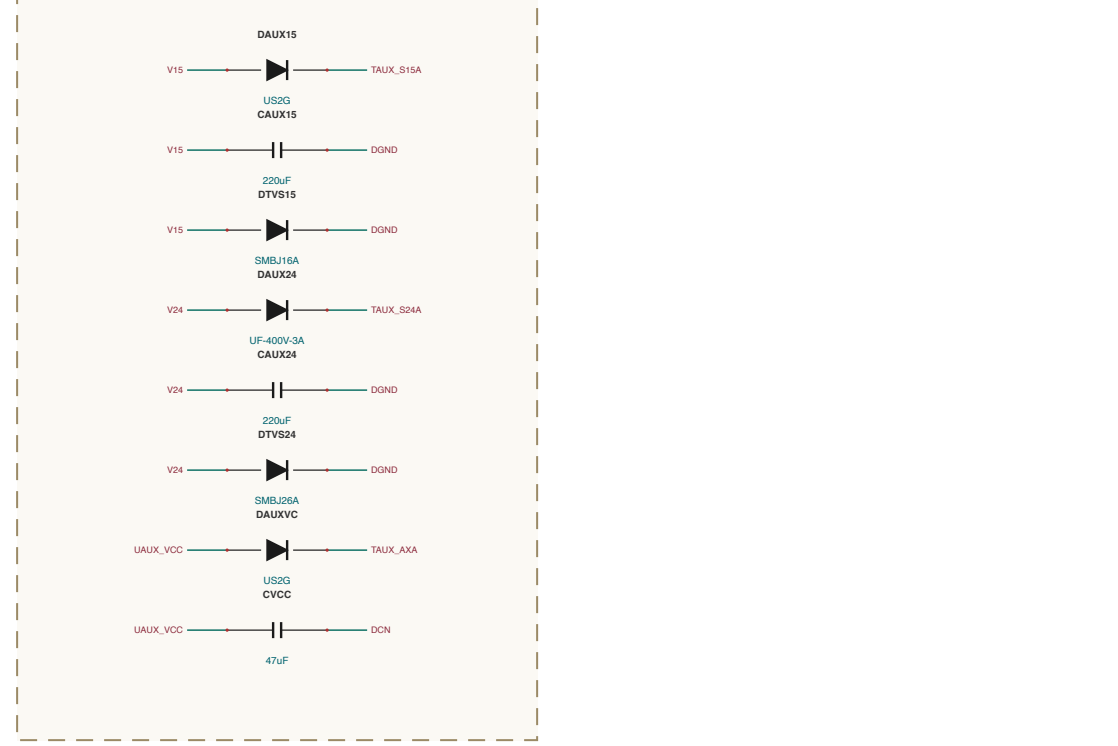


CONTROL / COL-DRIVER

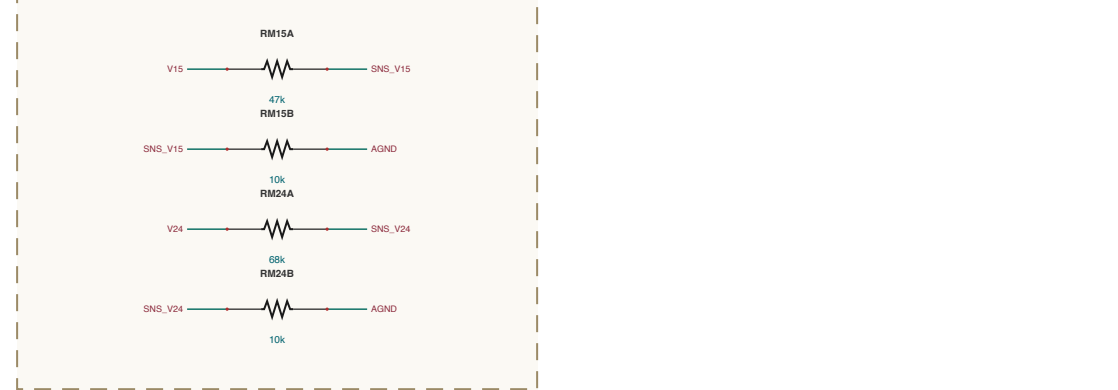


CONTROL / RAIL-MON

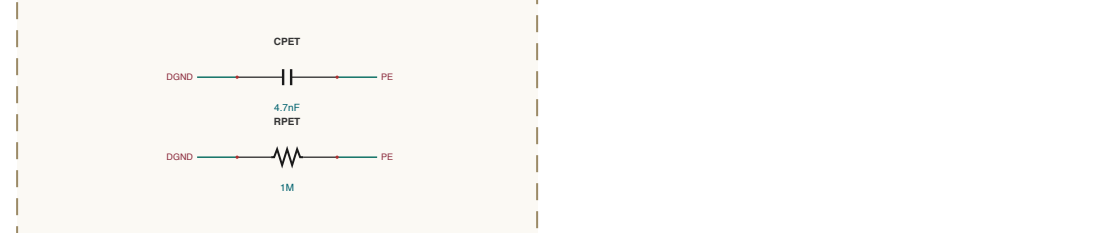


CONTROL / GROUNDING

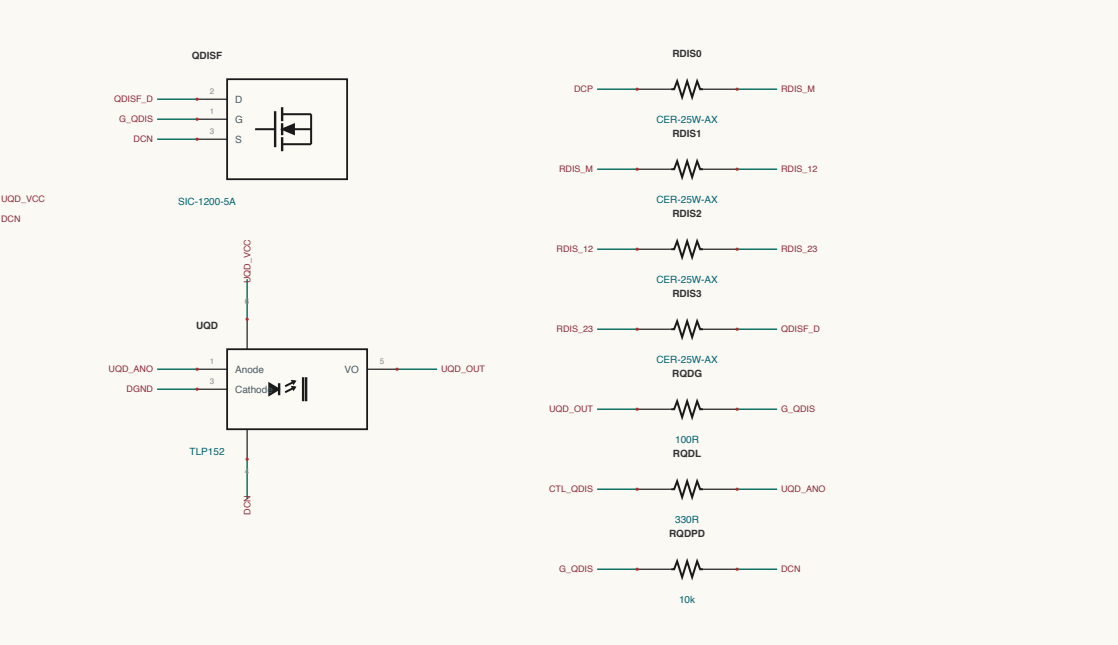


DC-LINK / LINK-BANK-0

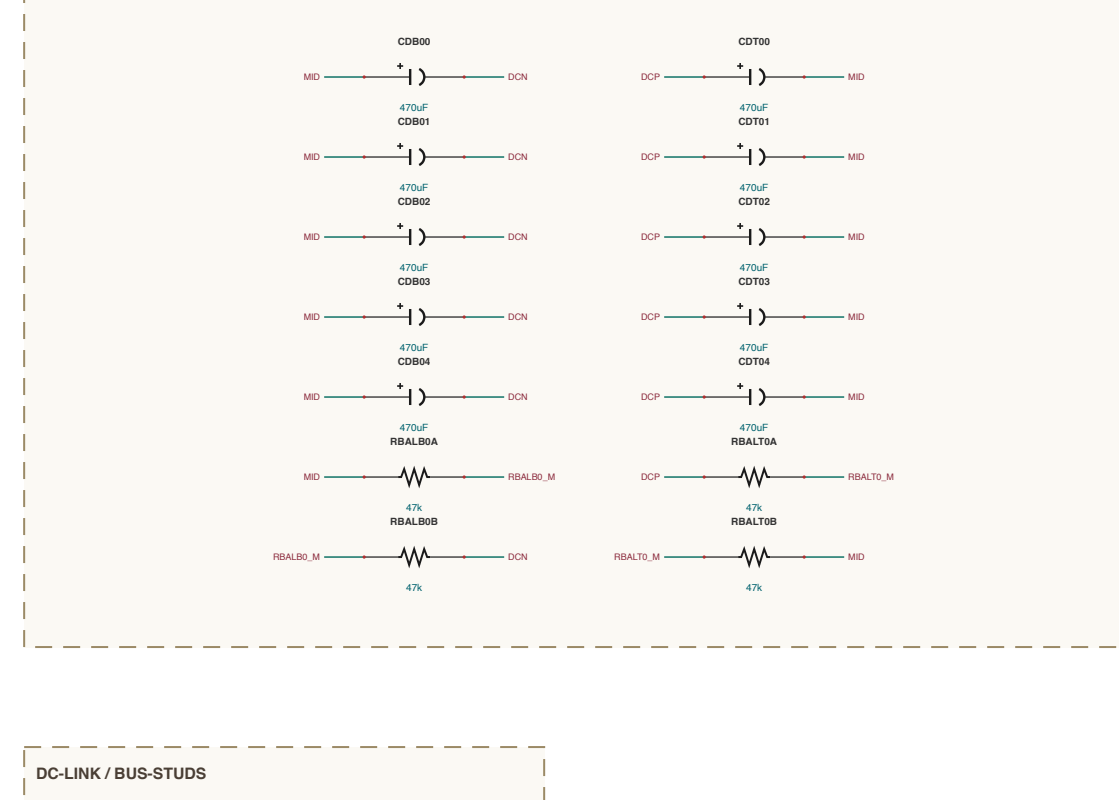


DC-LINK / BUS-STATUS

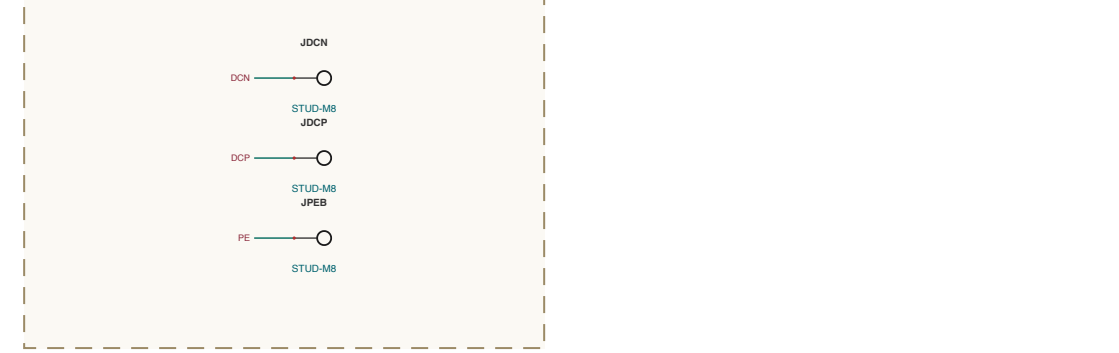


DC-LINK / LINK-BANK-1

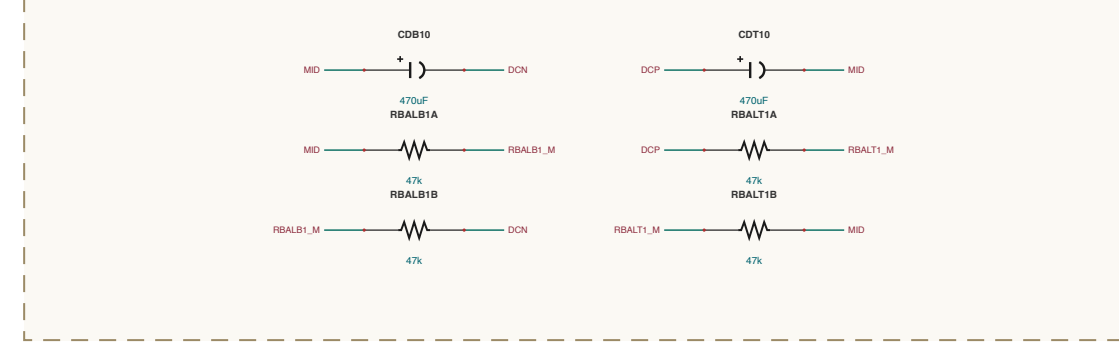


INPUT-EM / EMI-FILTER

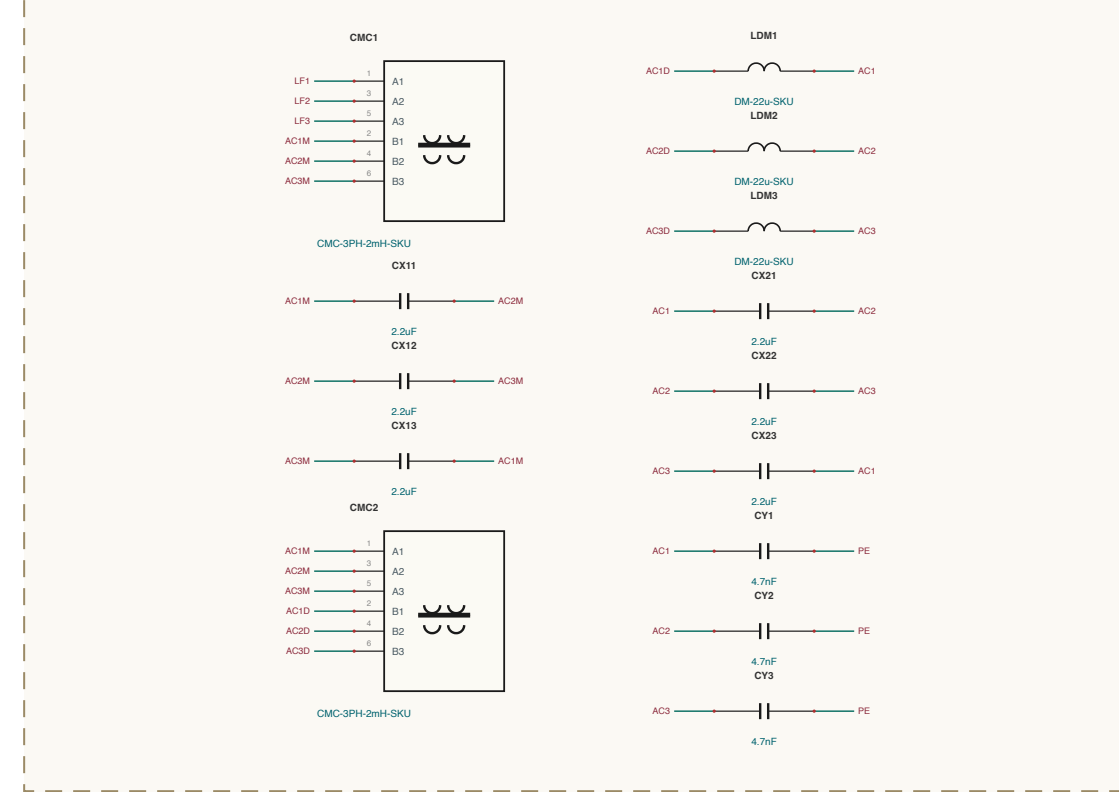


INPUT-EM / AC-ENTRY

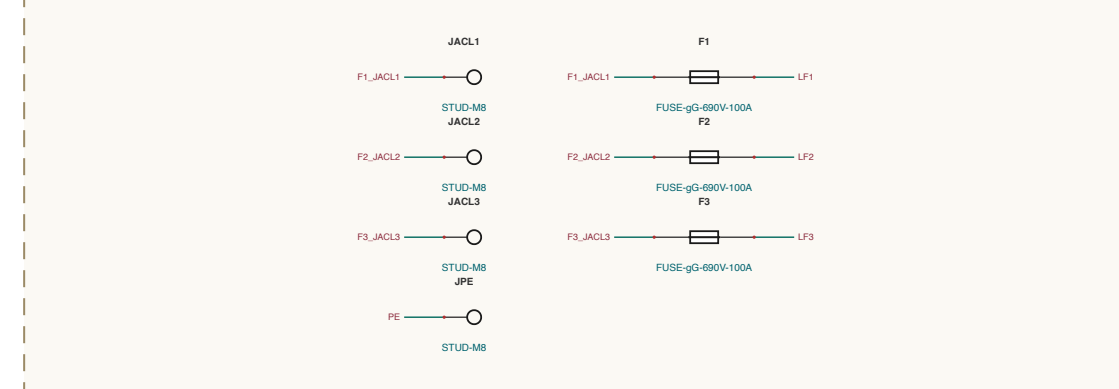


INPUT-EM / PRECHARGE

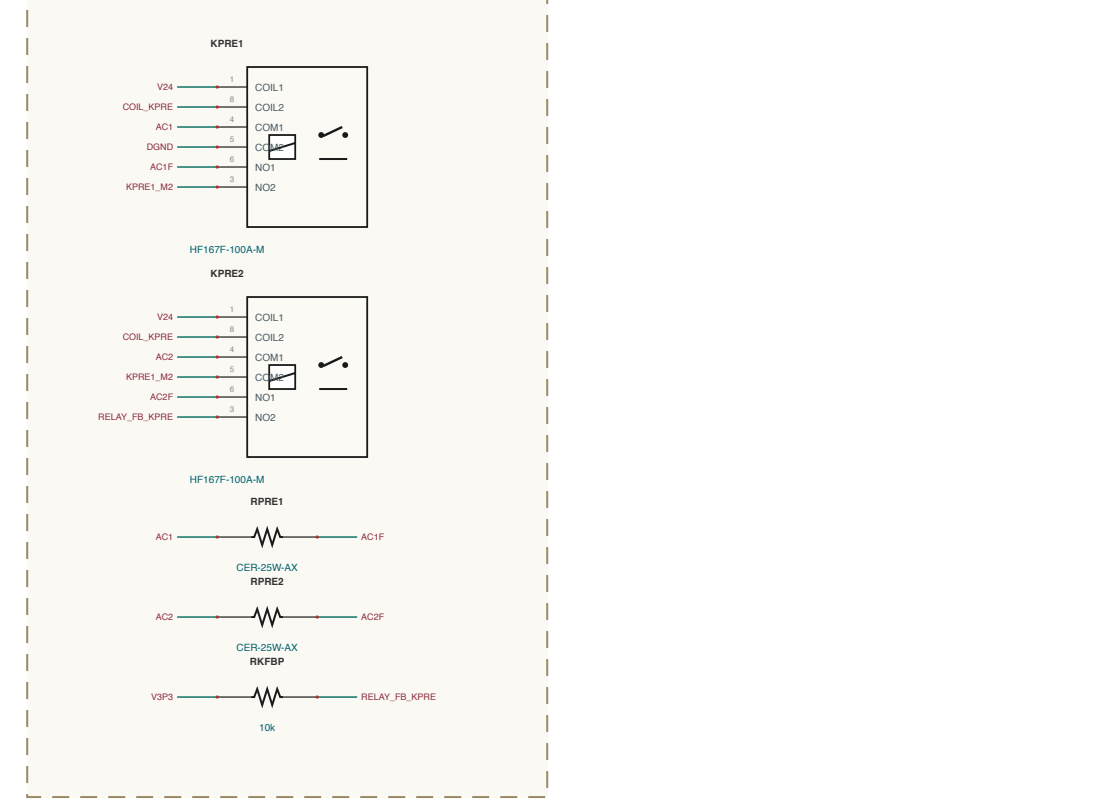


INPUT-EM / SURGE

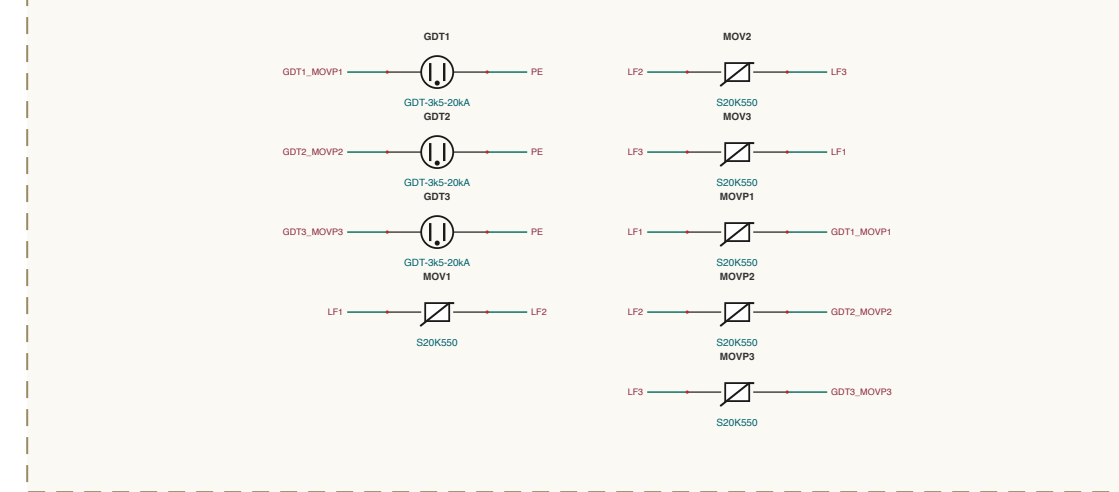


VIENNA-PFC / PHASE-A0

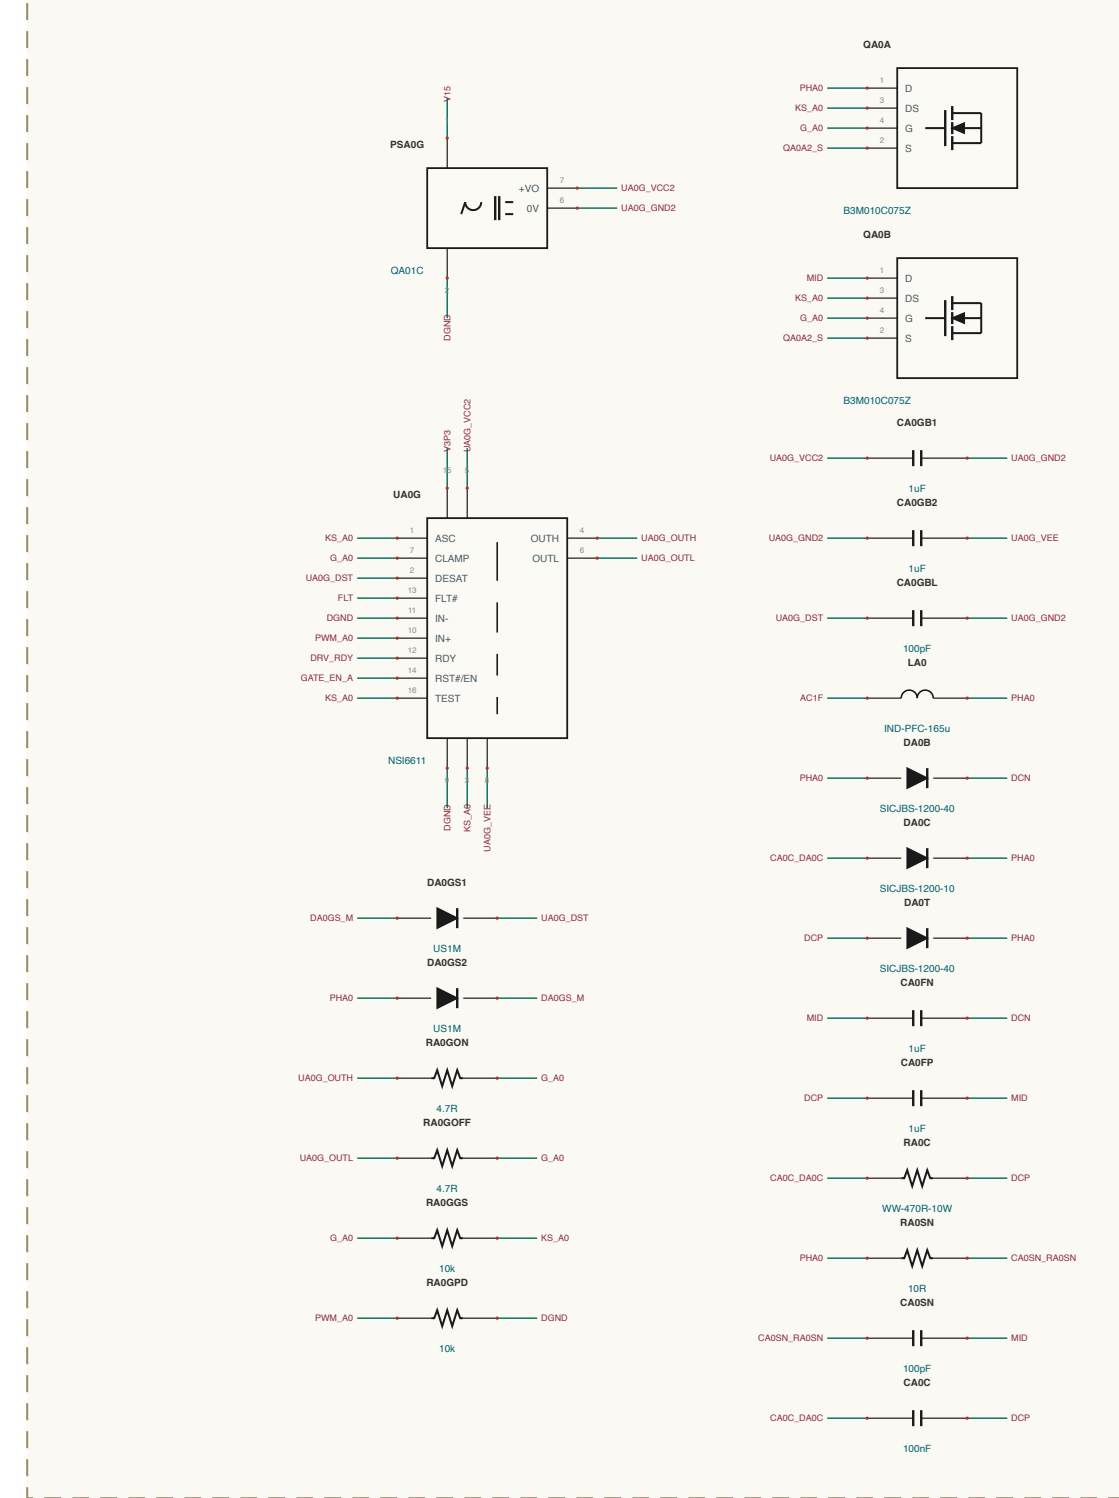

VIENNA-PFC / PHASE-C0

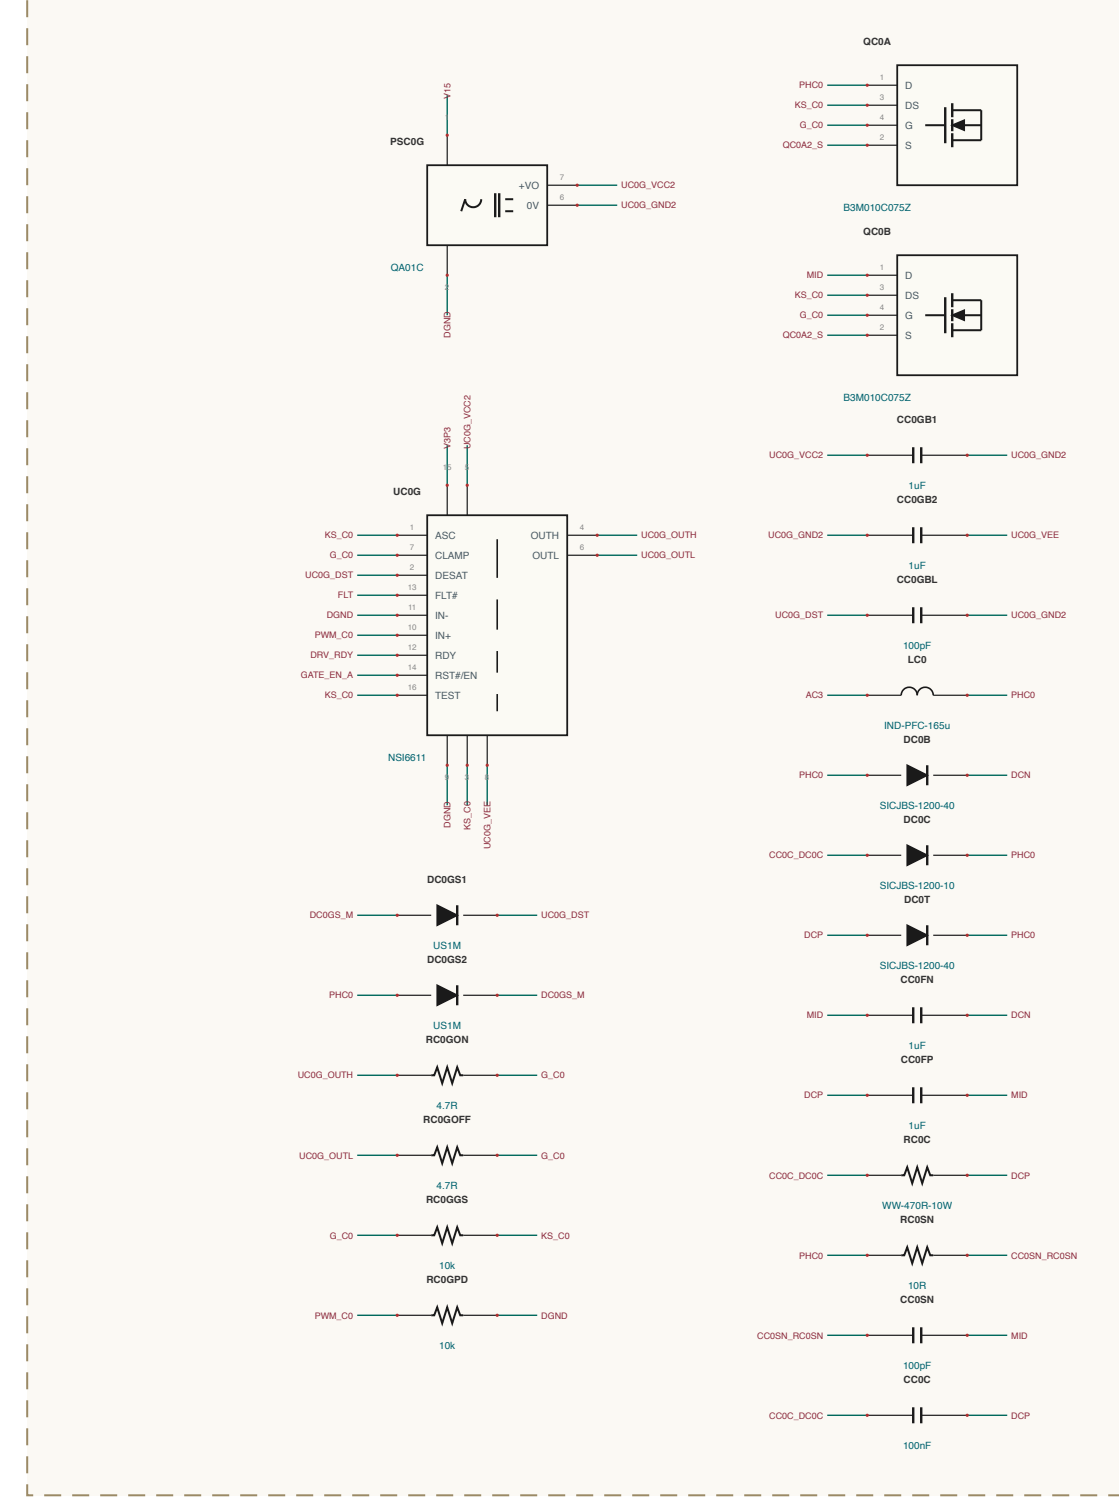


VIENNA-PFC / PHASE-B0




















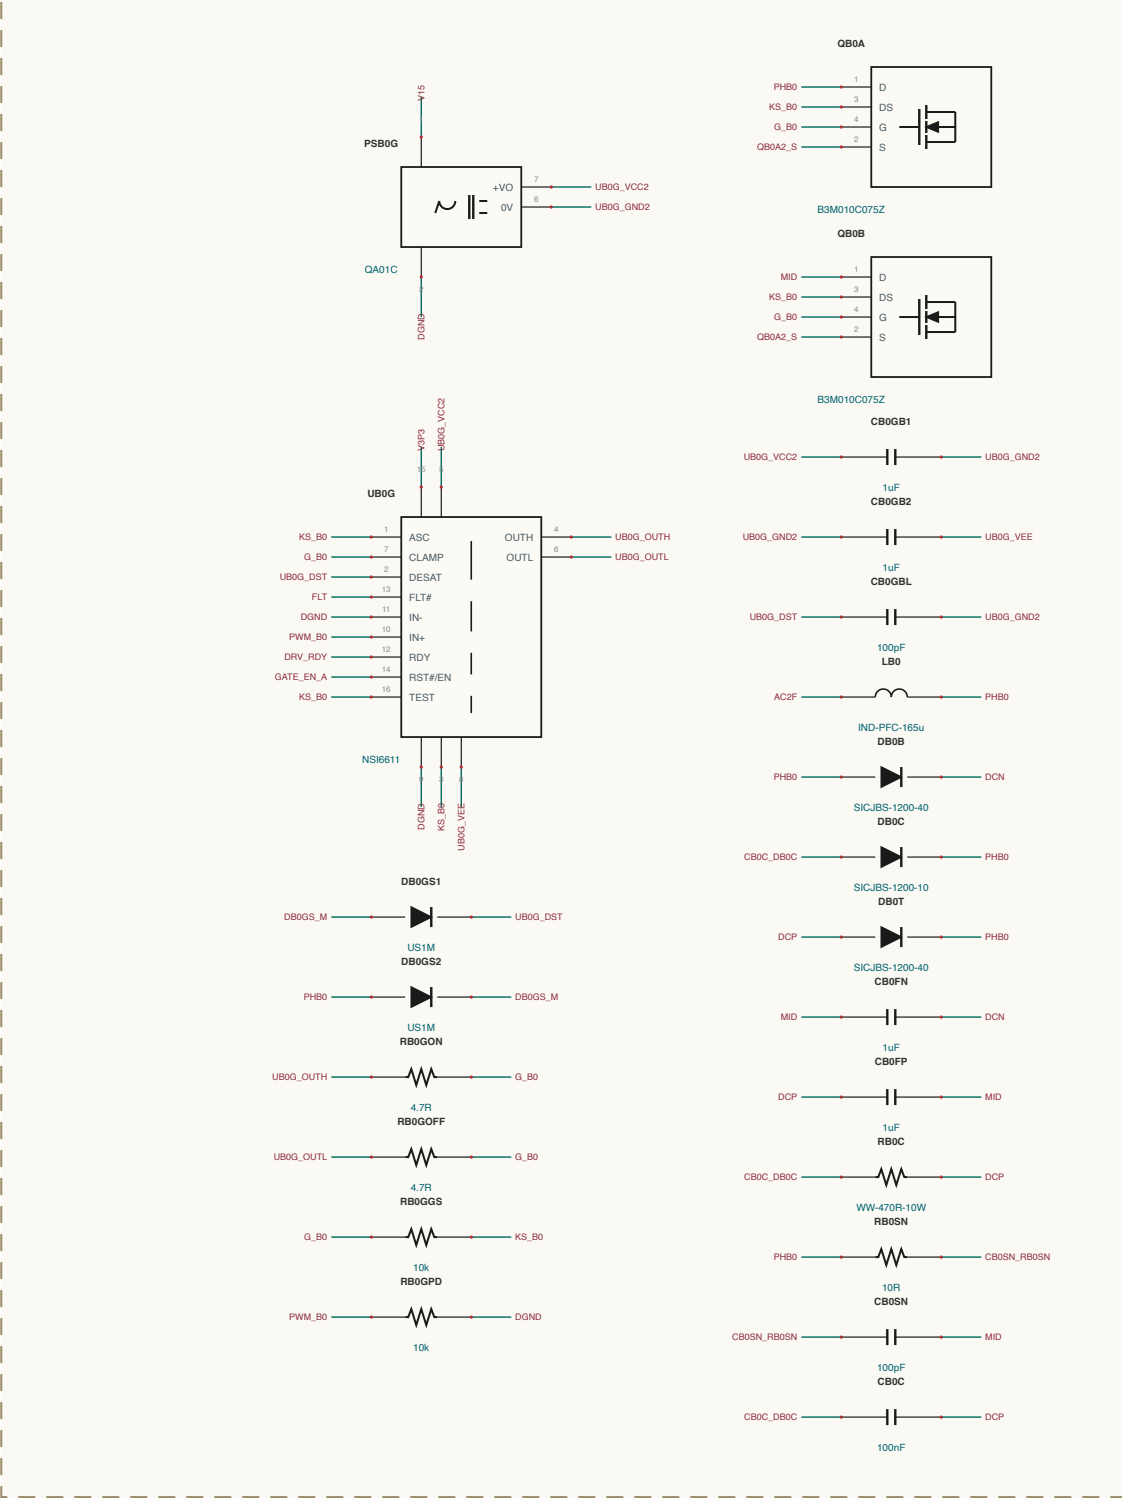


SHEET INDEX



NET NAMING

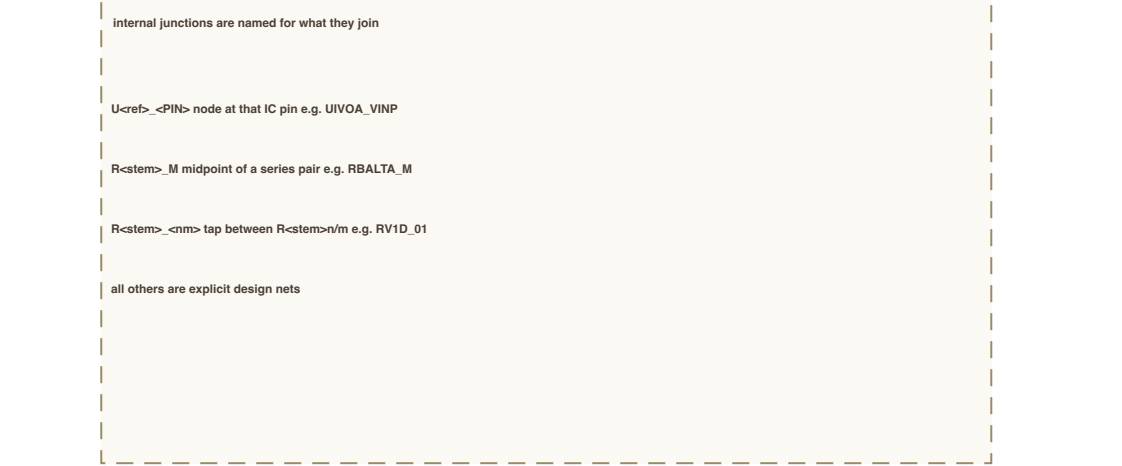

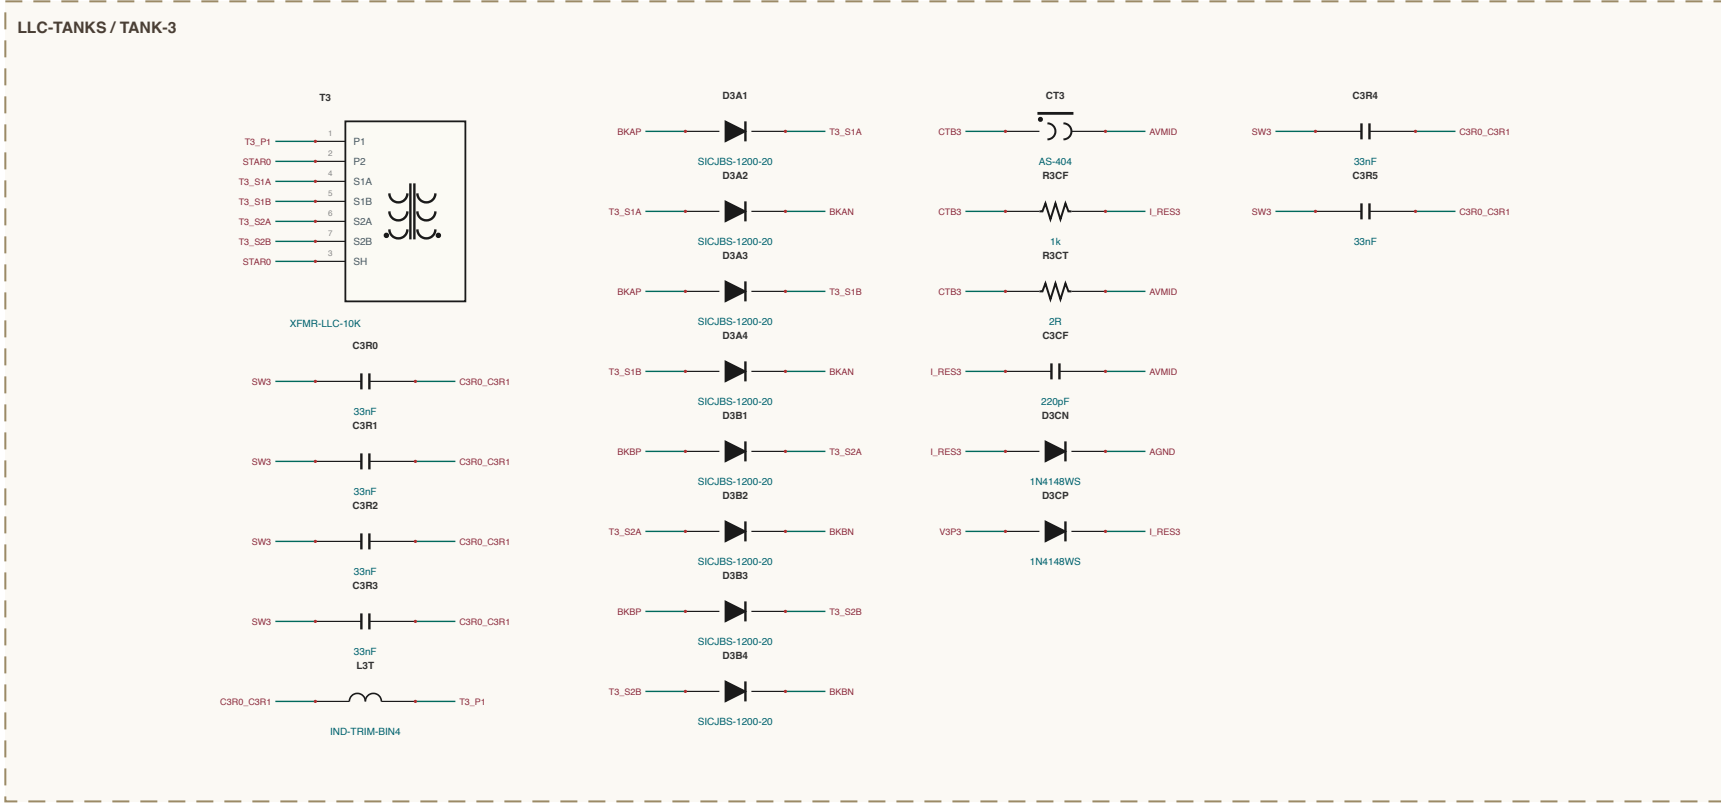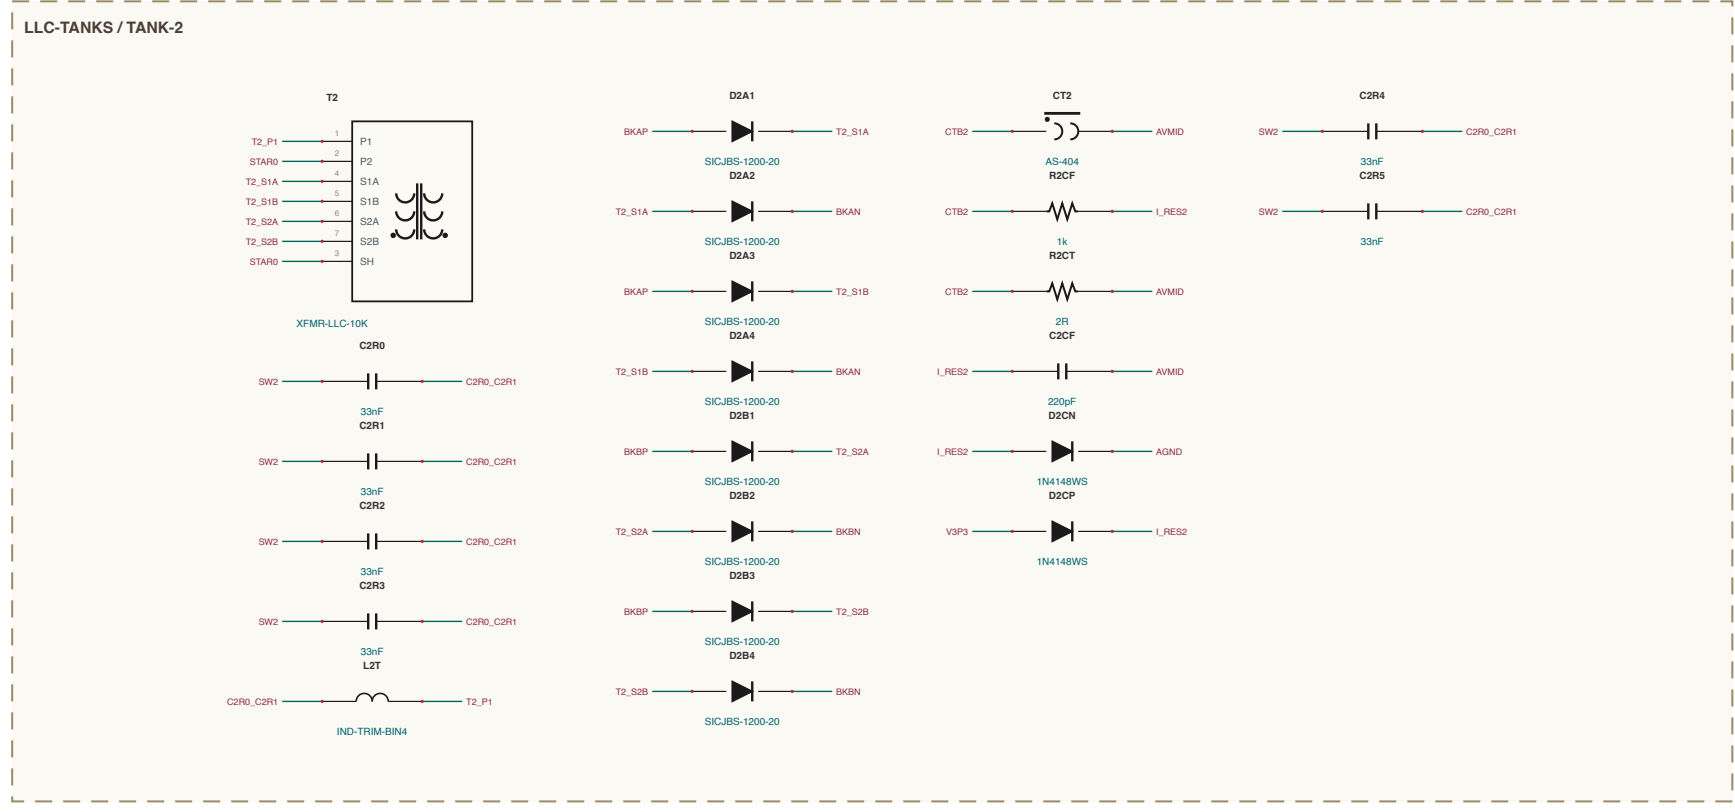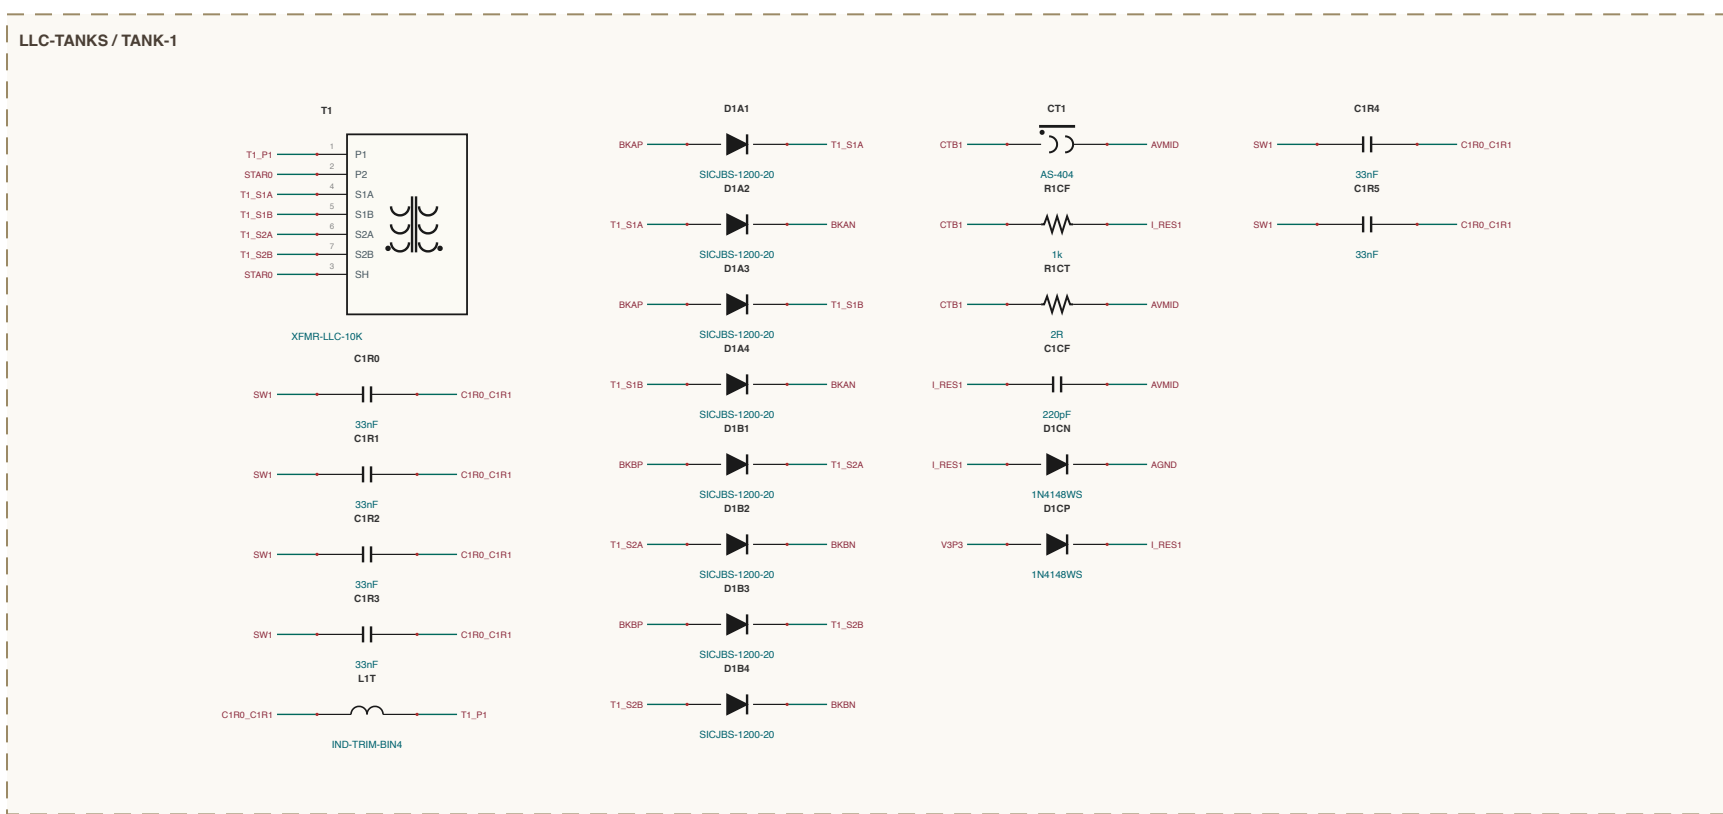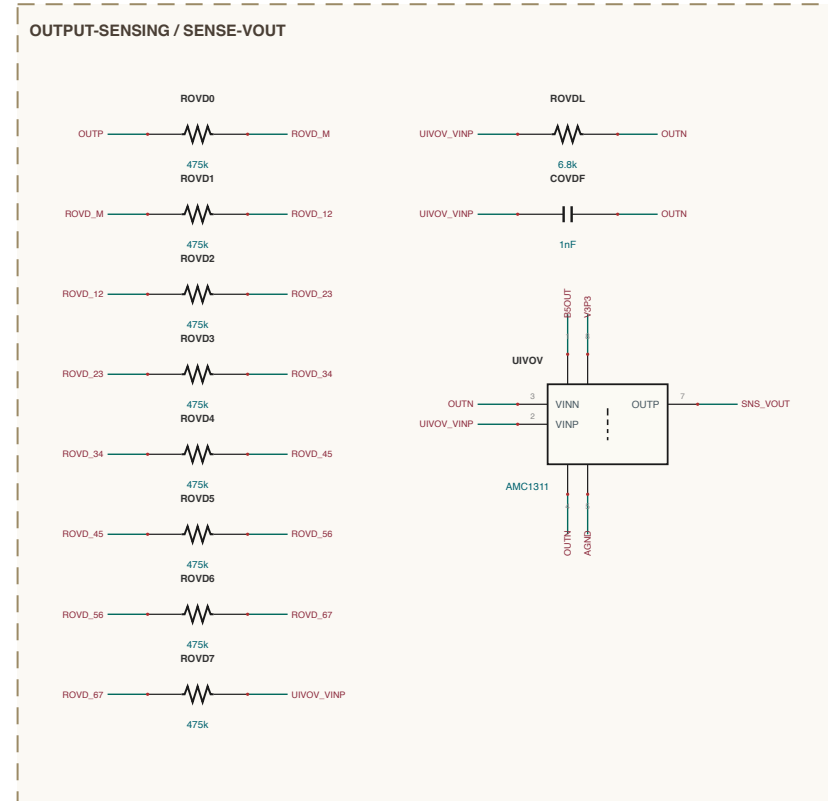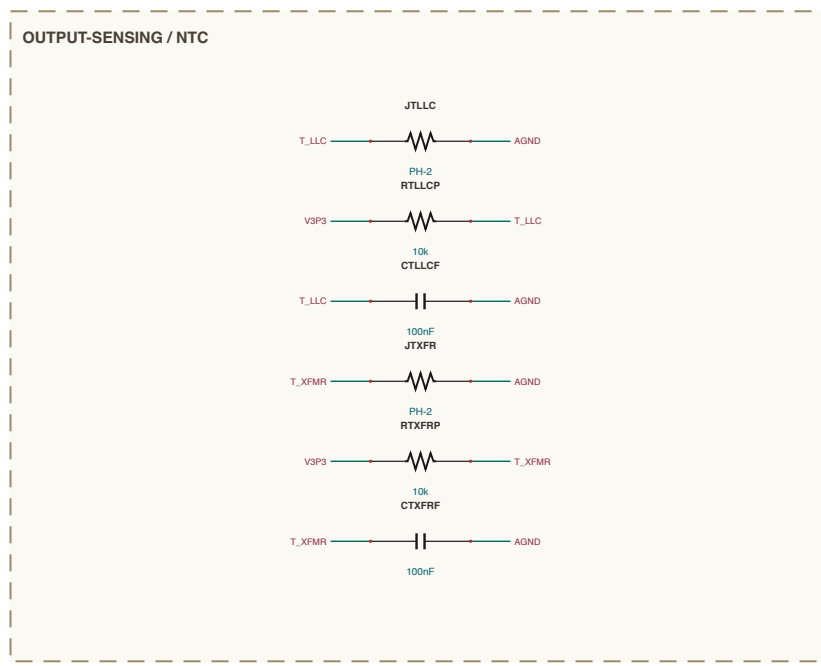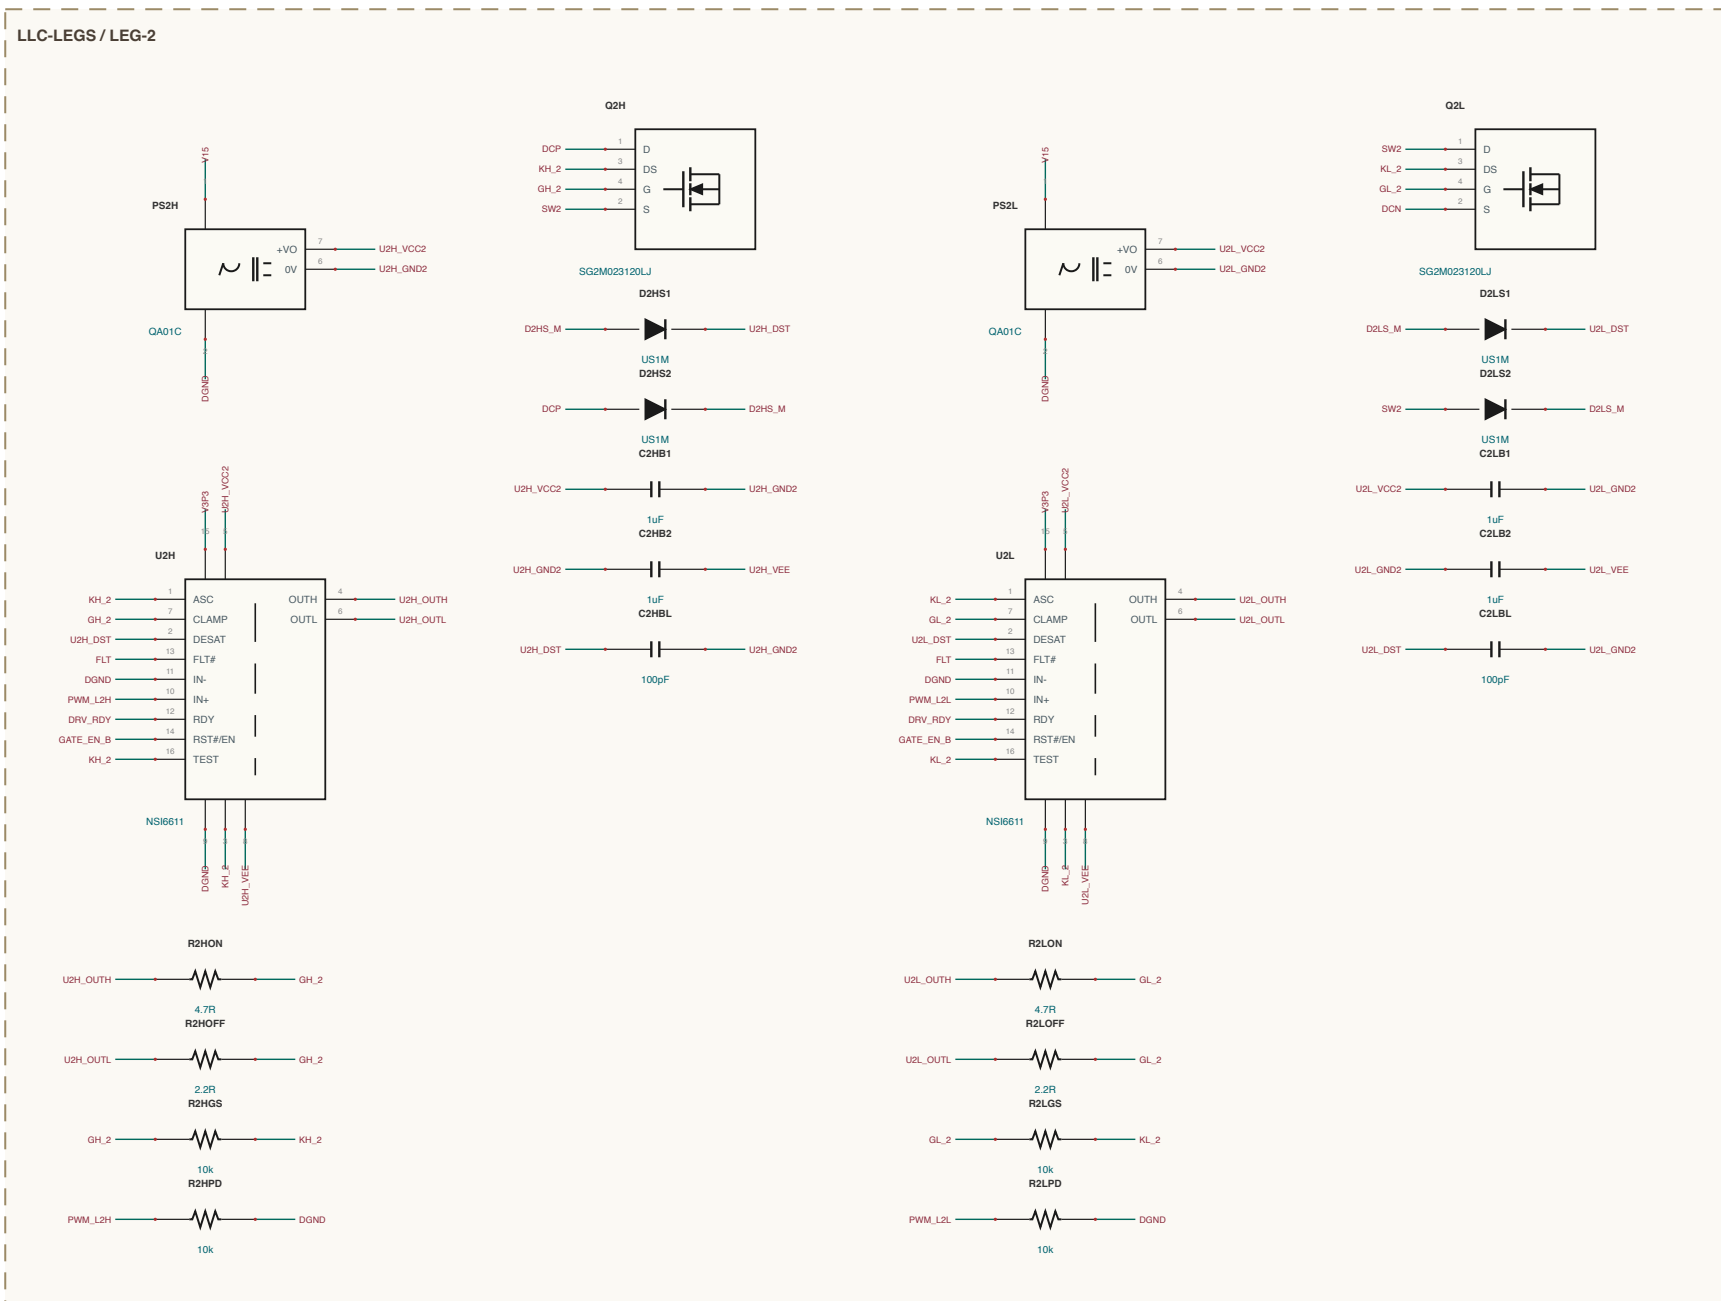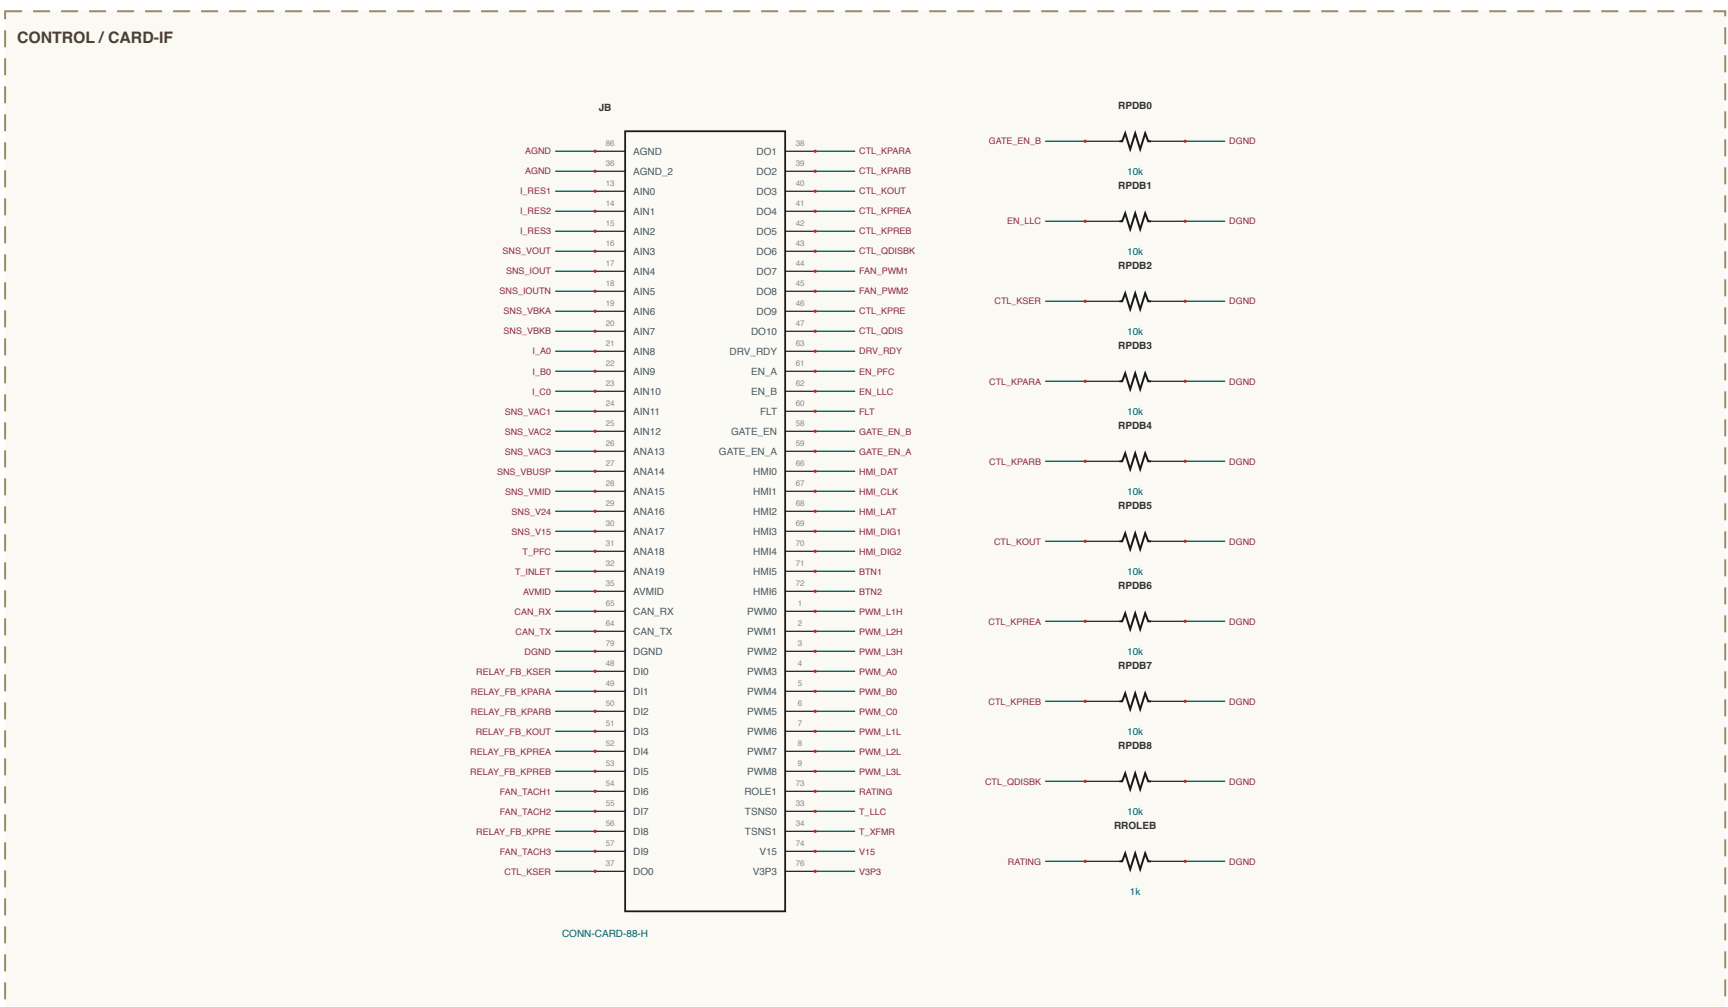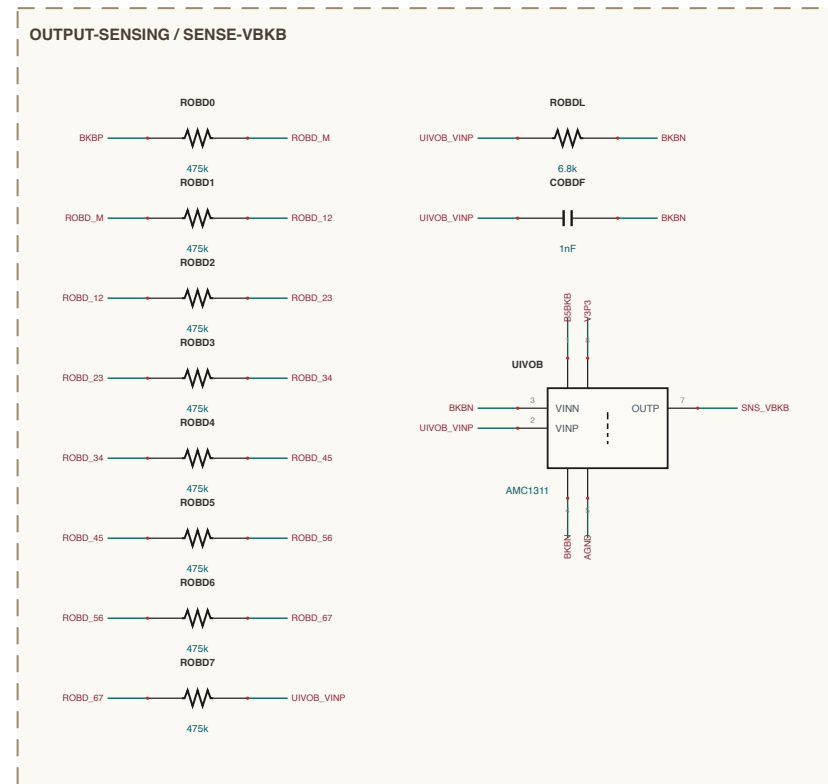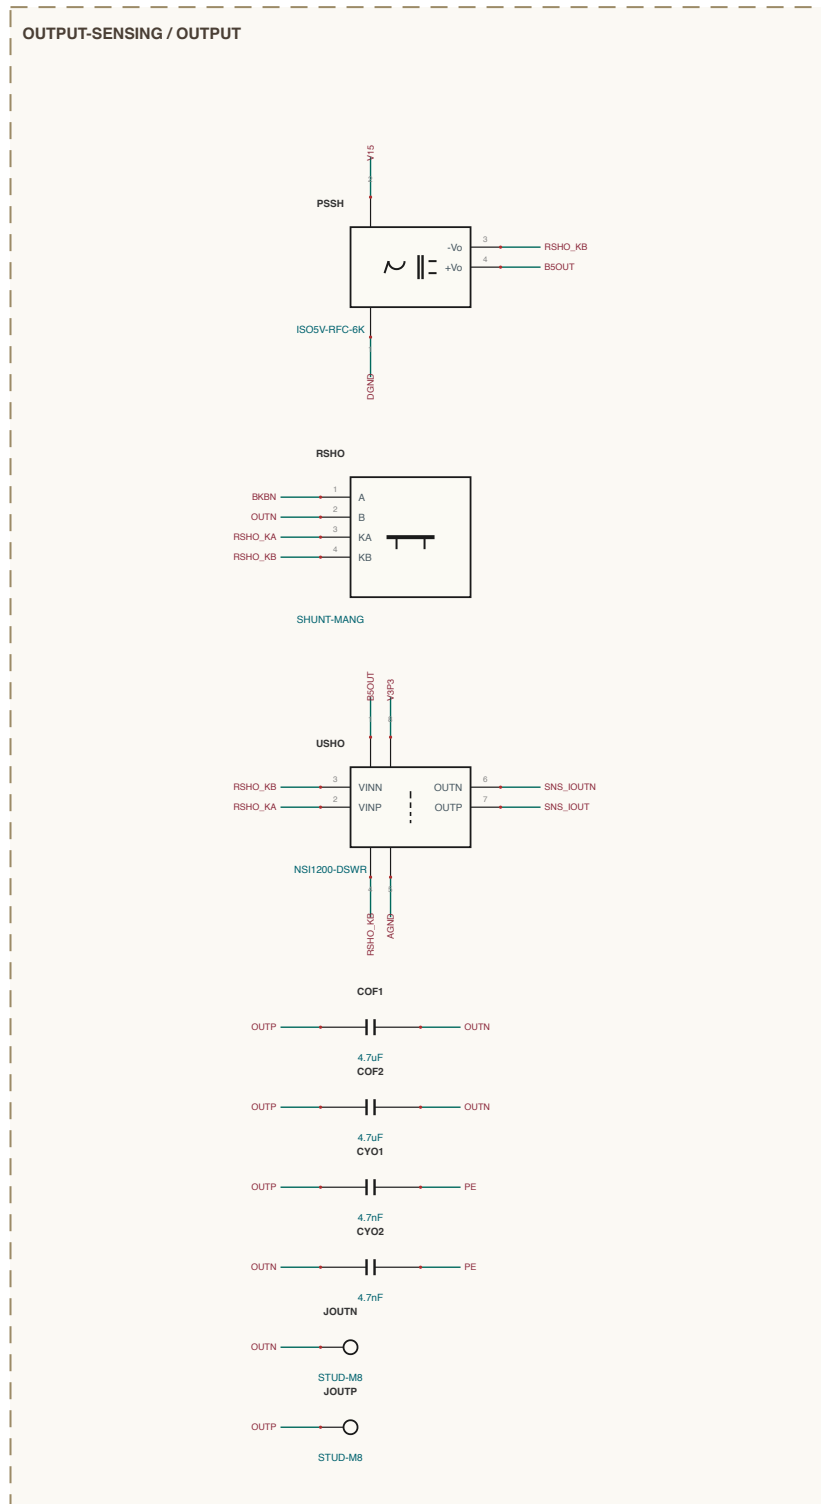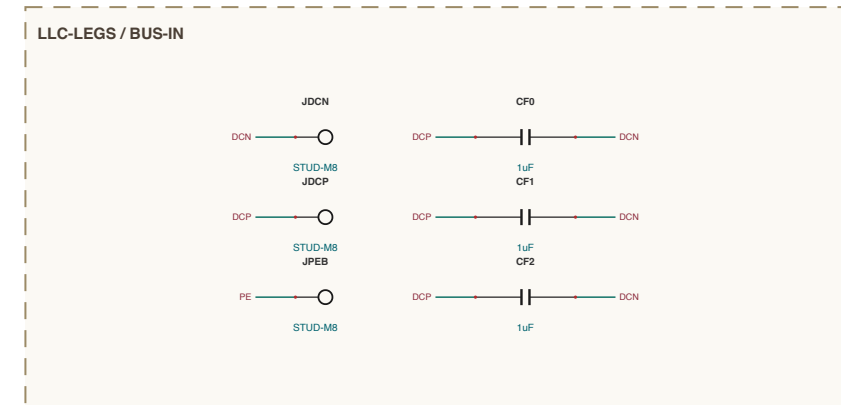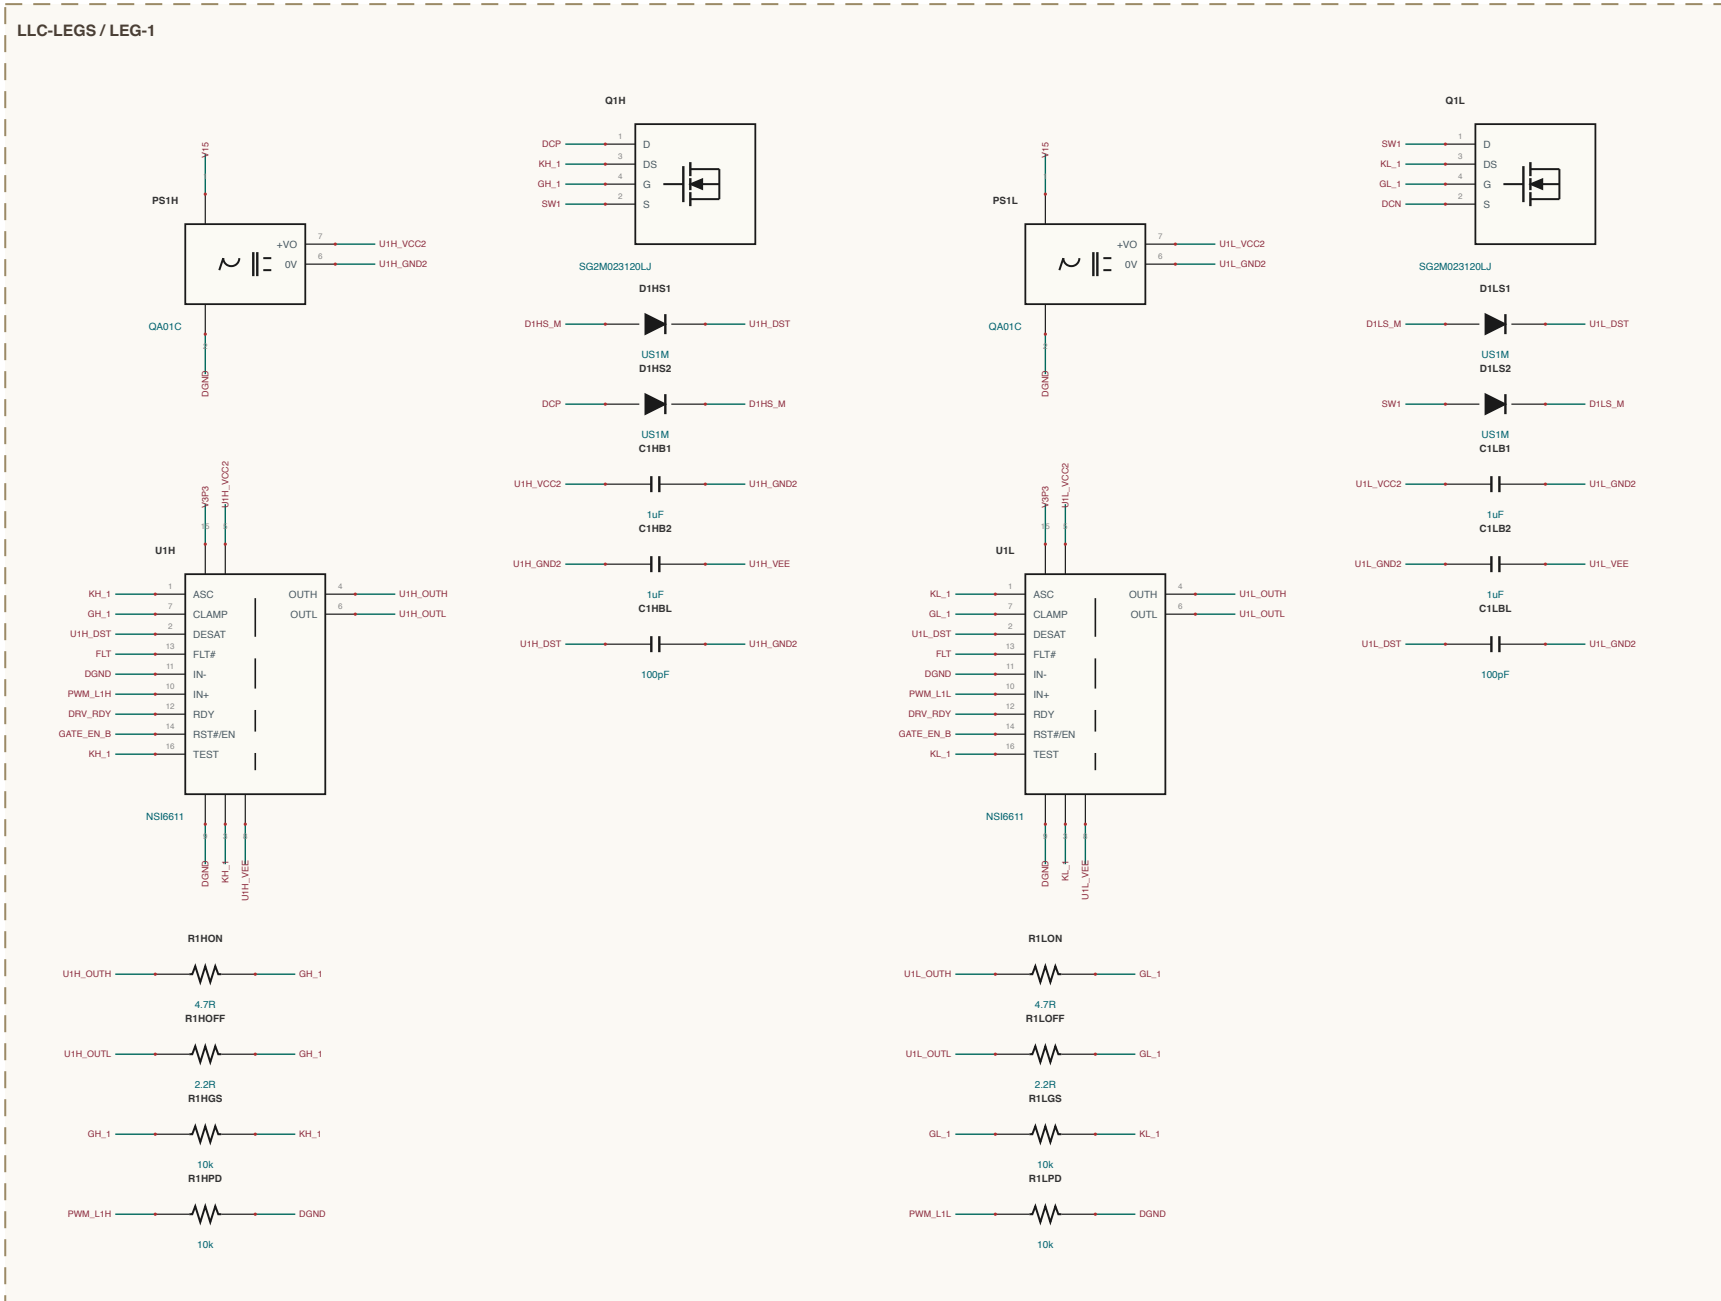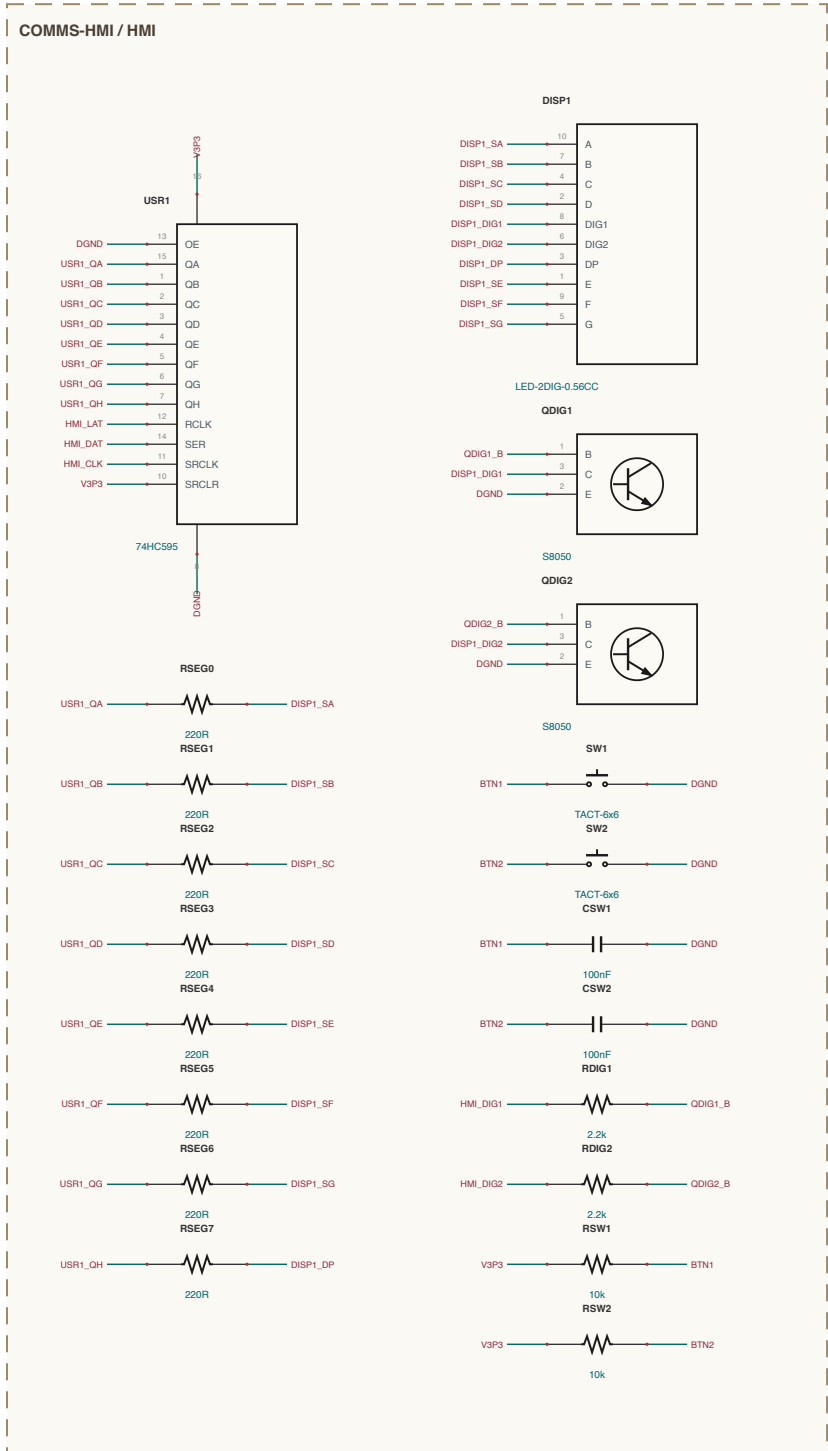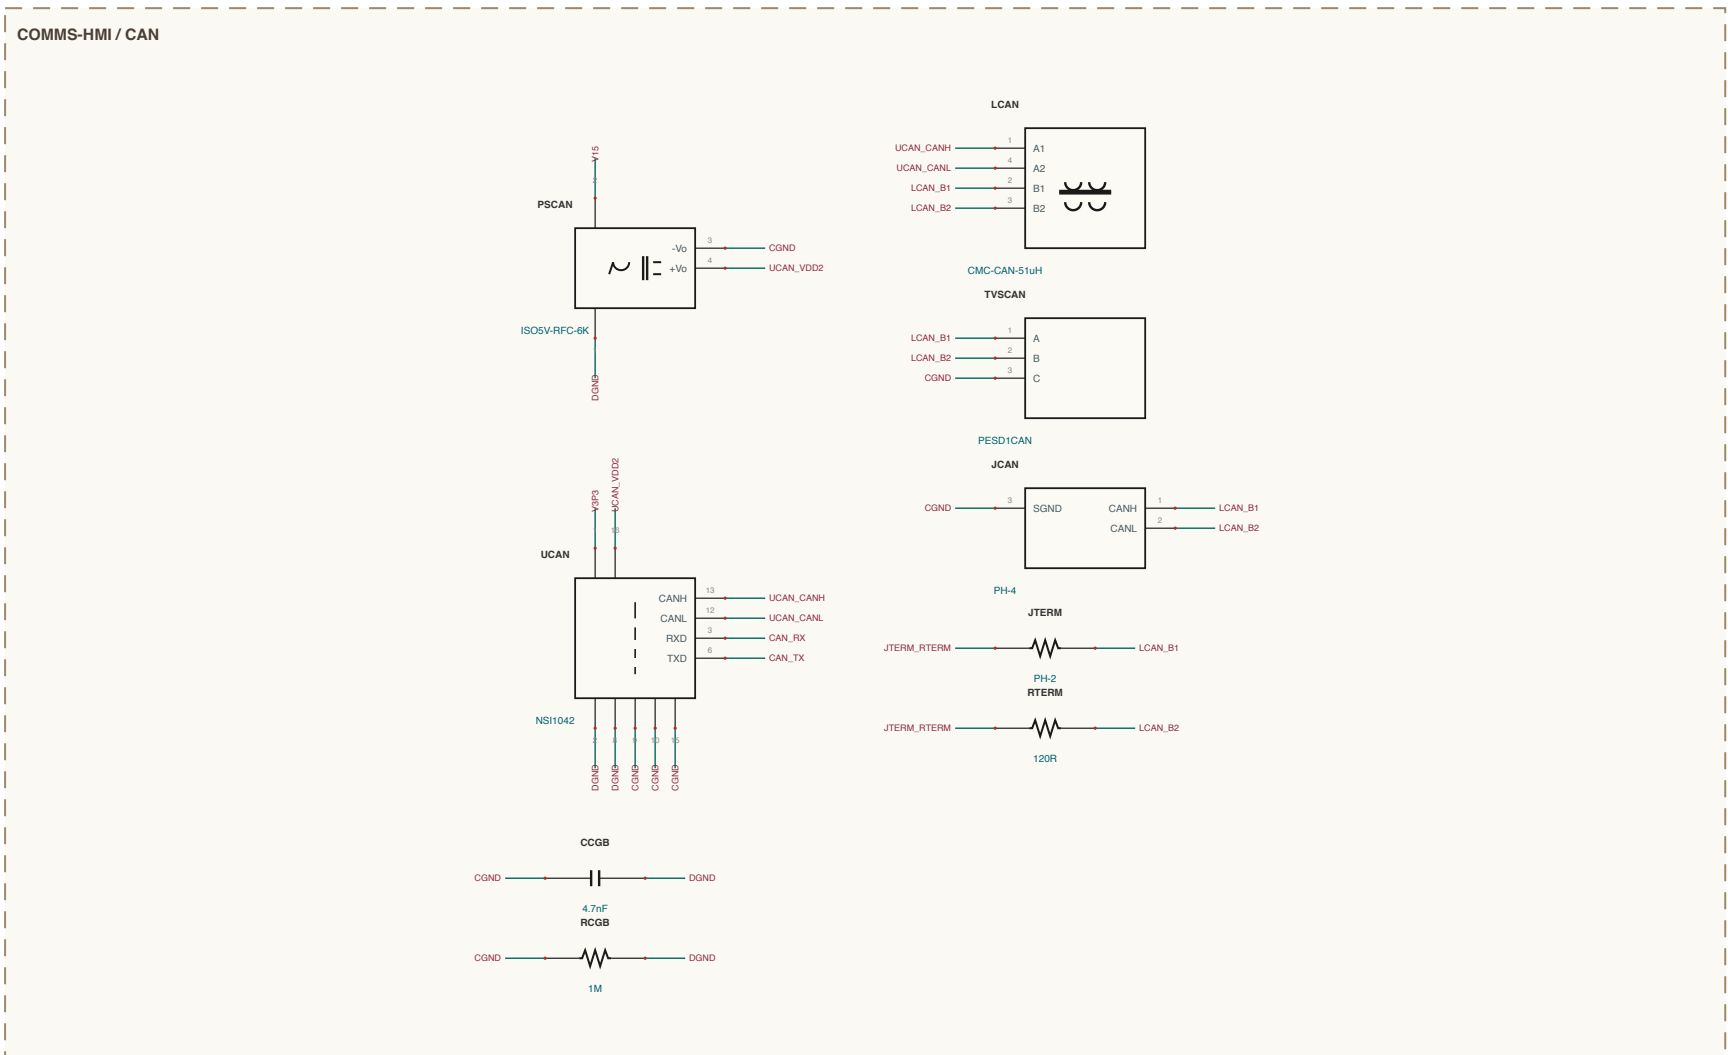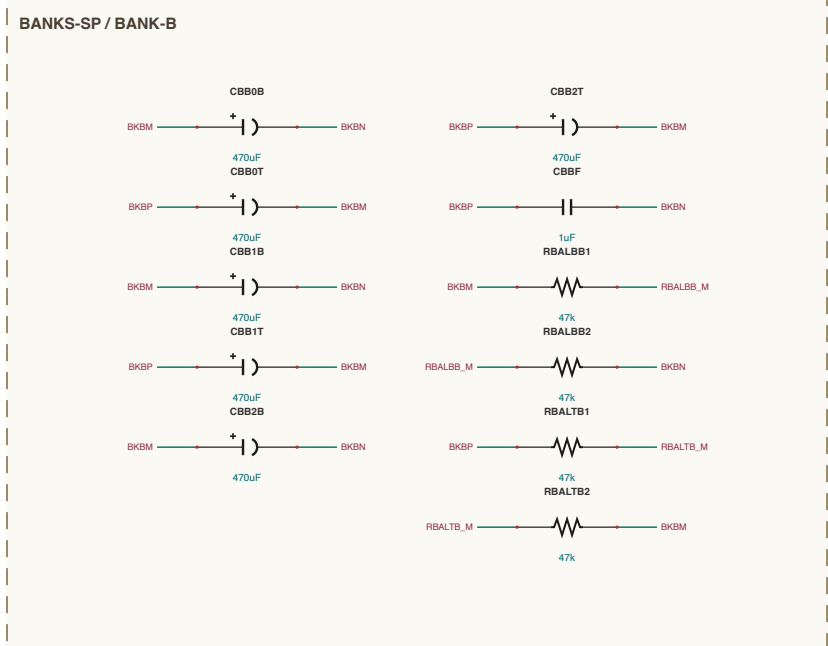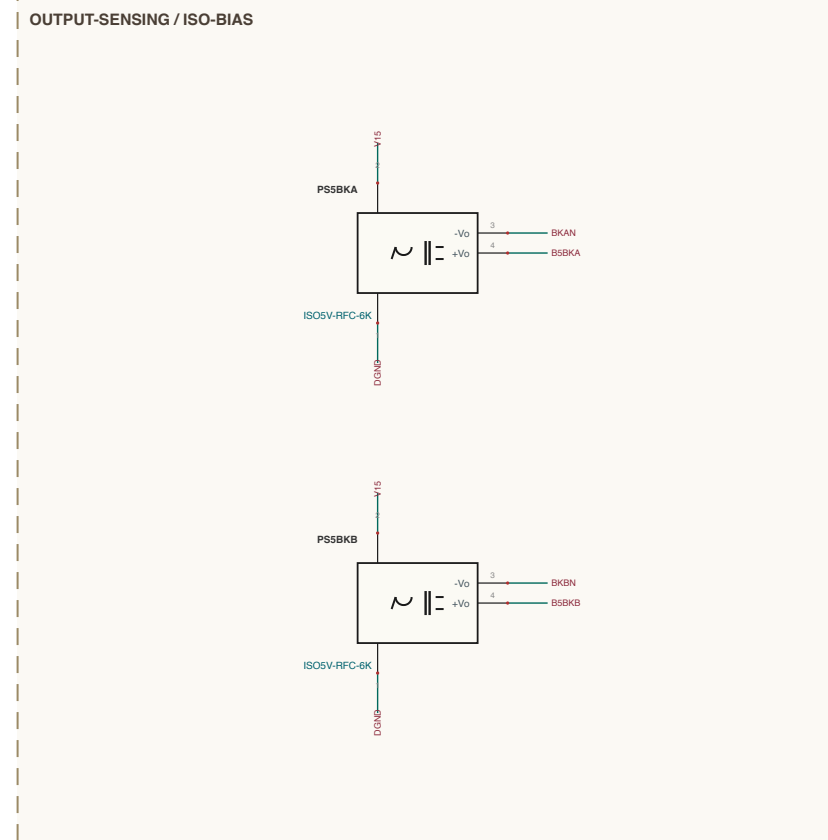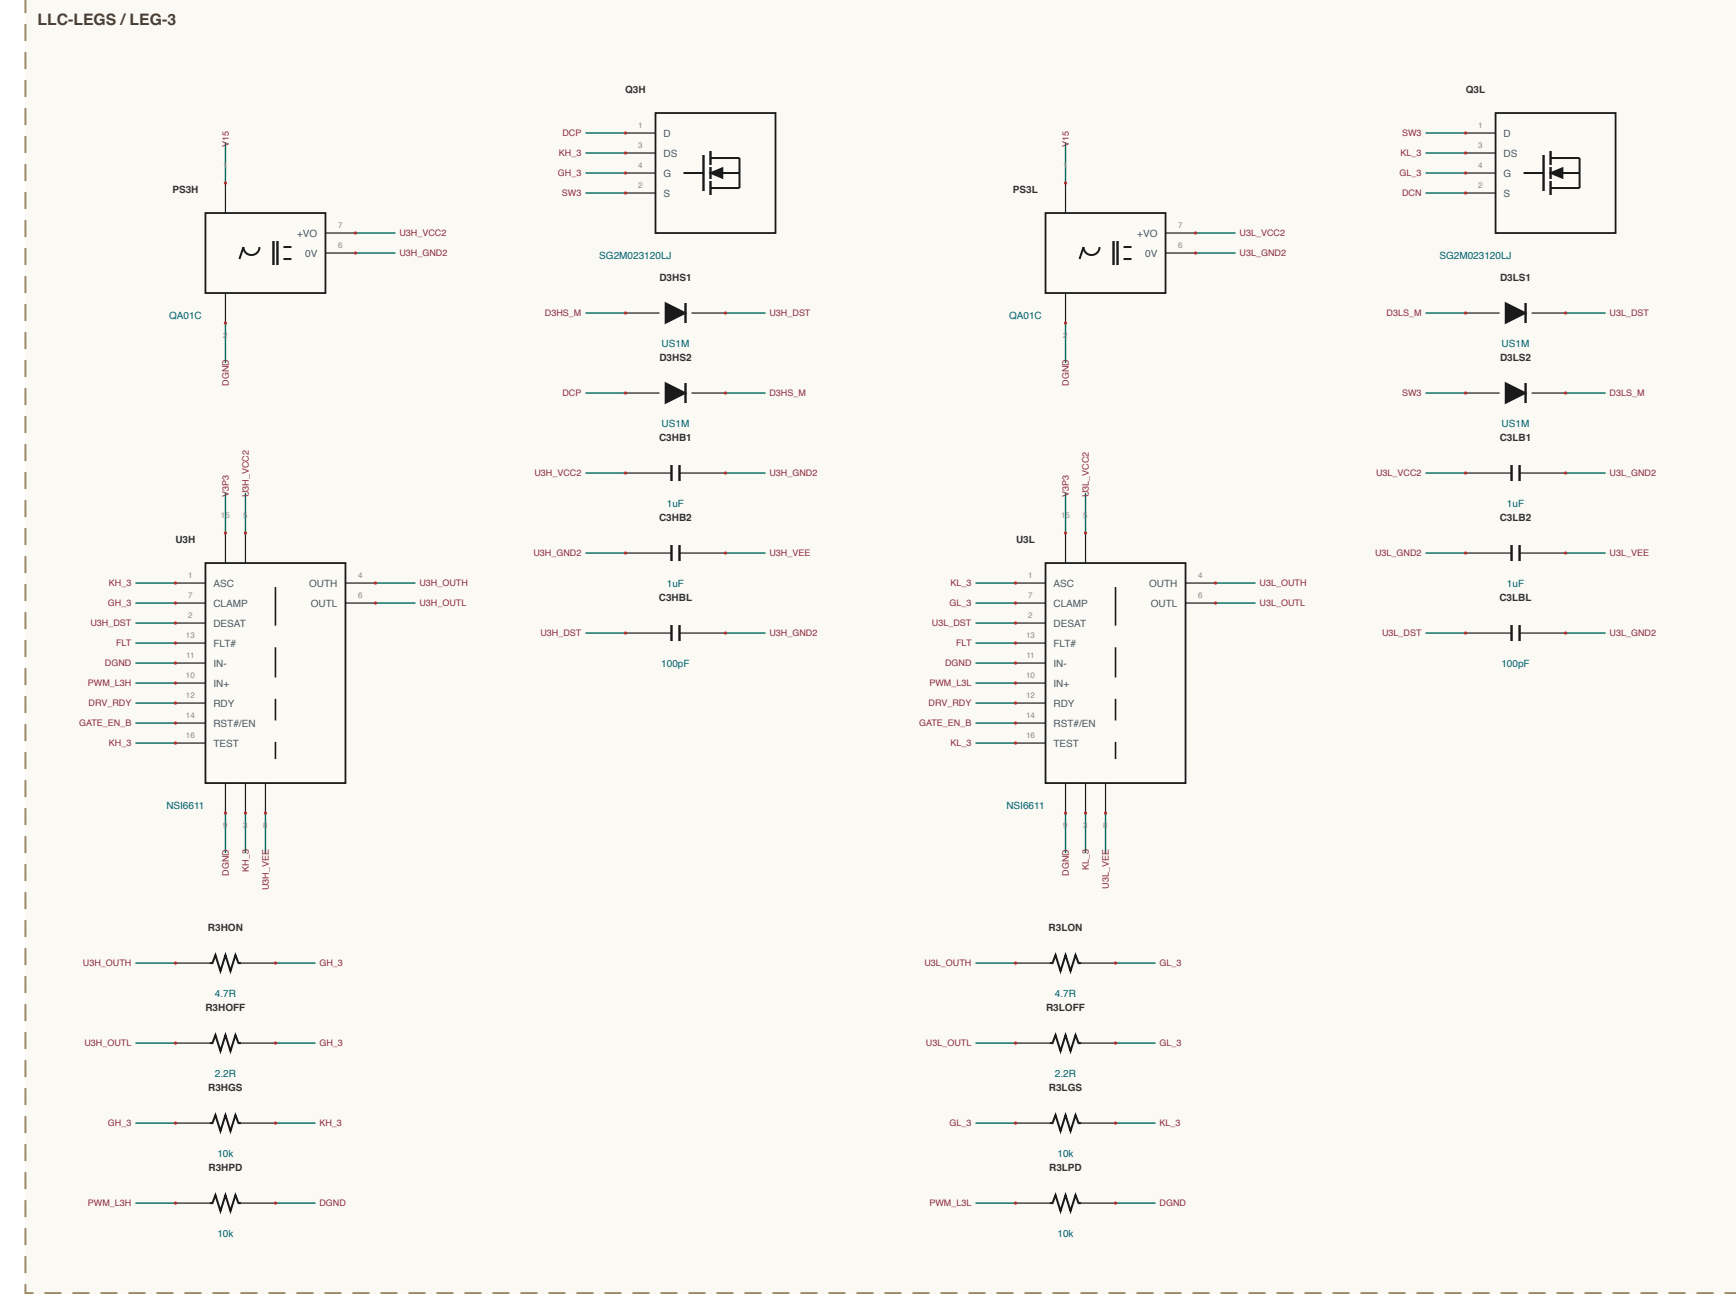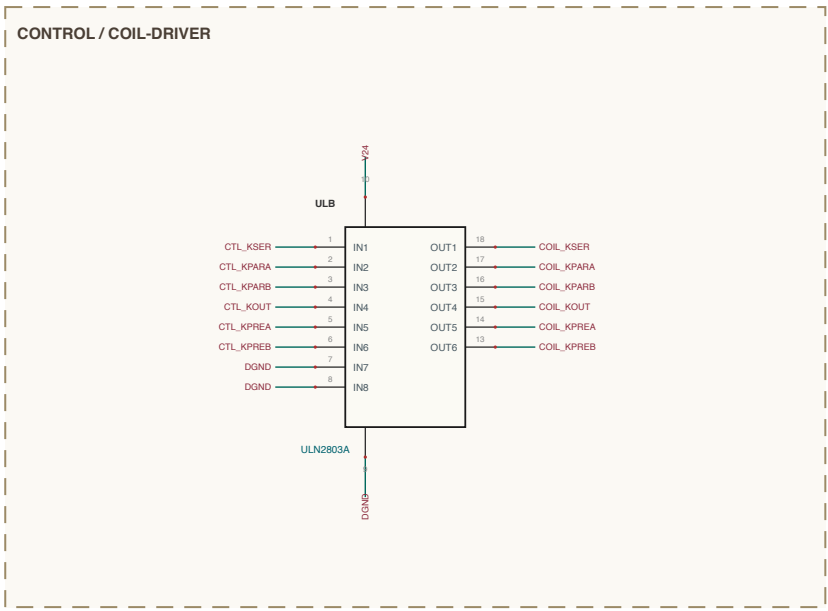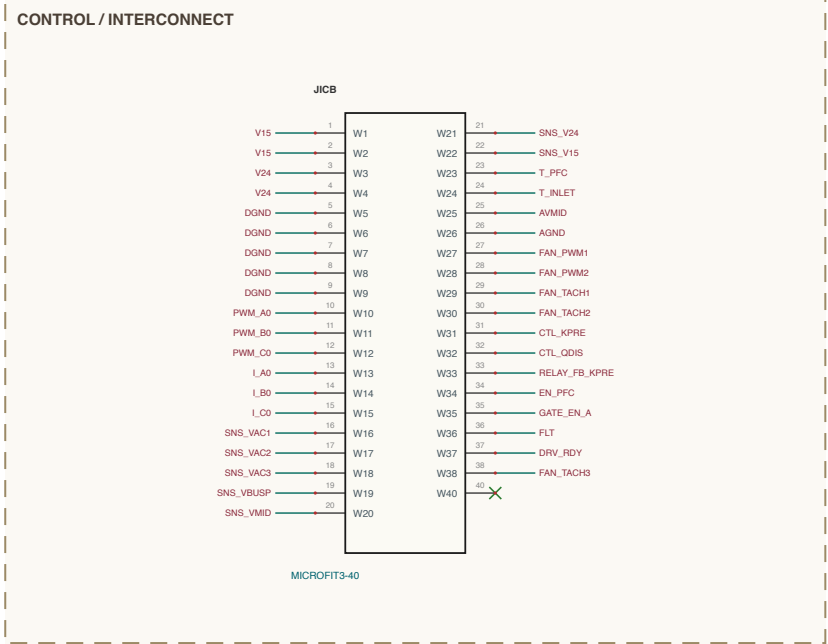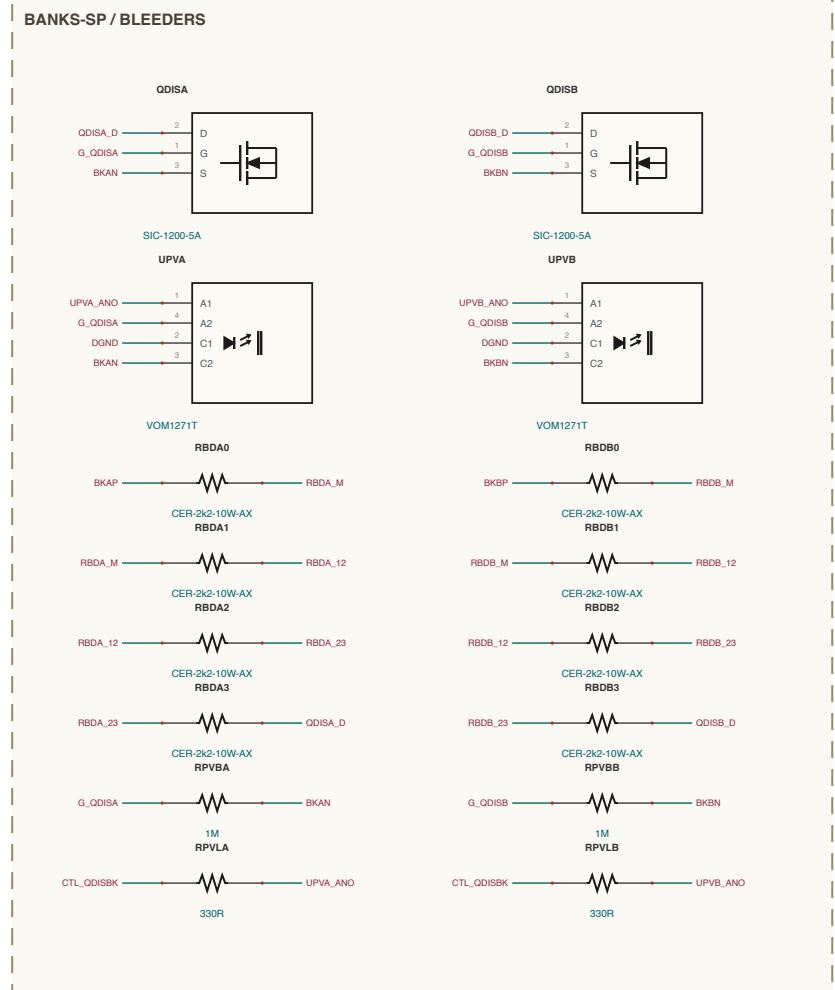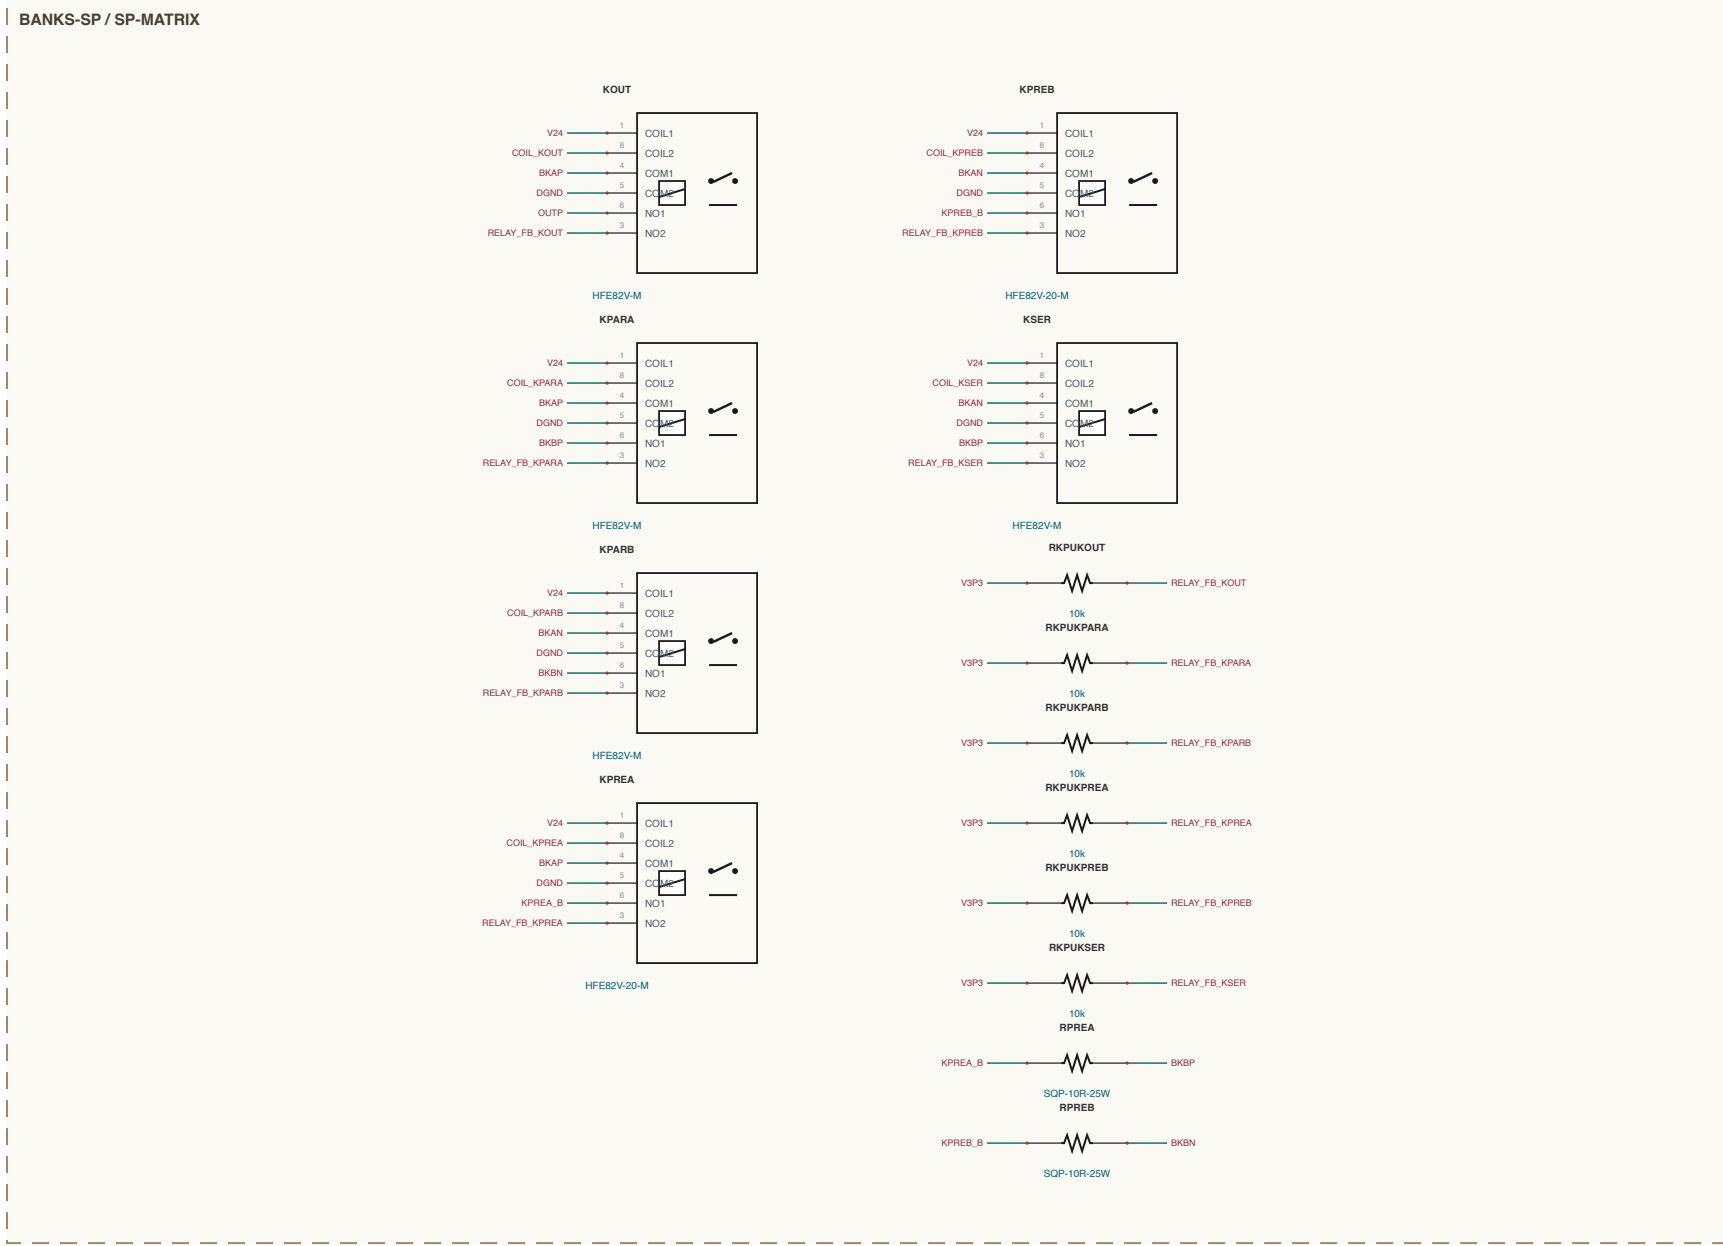

SHEET INDEX
40 kW DC-DC (upper) - 2 of 3
OUTPUT-SENSING - 6 sections
BANKS-SP - 4 sections
LLC-LEG8 - 4 sections
CONTROL - 3 sections
LLC-TANKS - 3 sections
COMMS-HBI - 2 sections
net CL - 22 sections - 388 components
NET NAMING
Internal junctions are named for what they join
Useful - JPNs node at that IC pin e.g. UPNDA, VBP
Resistor - M midpoint of a series pair e.g. RBKLA_M
Resistor - vcc/vss tip between Resistor e.g. RPTD_01
All others are explicit design nets

