
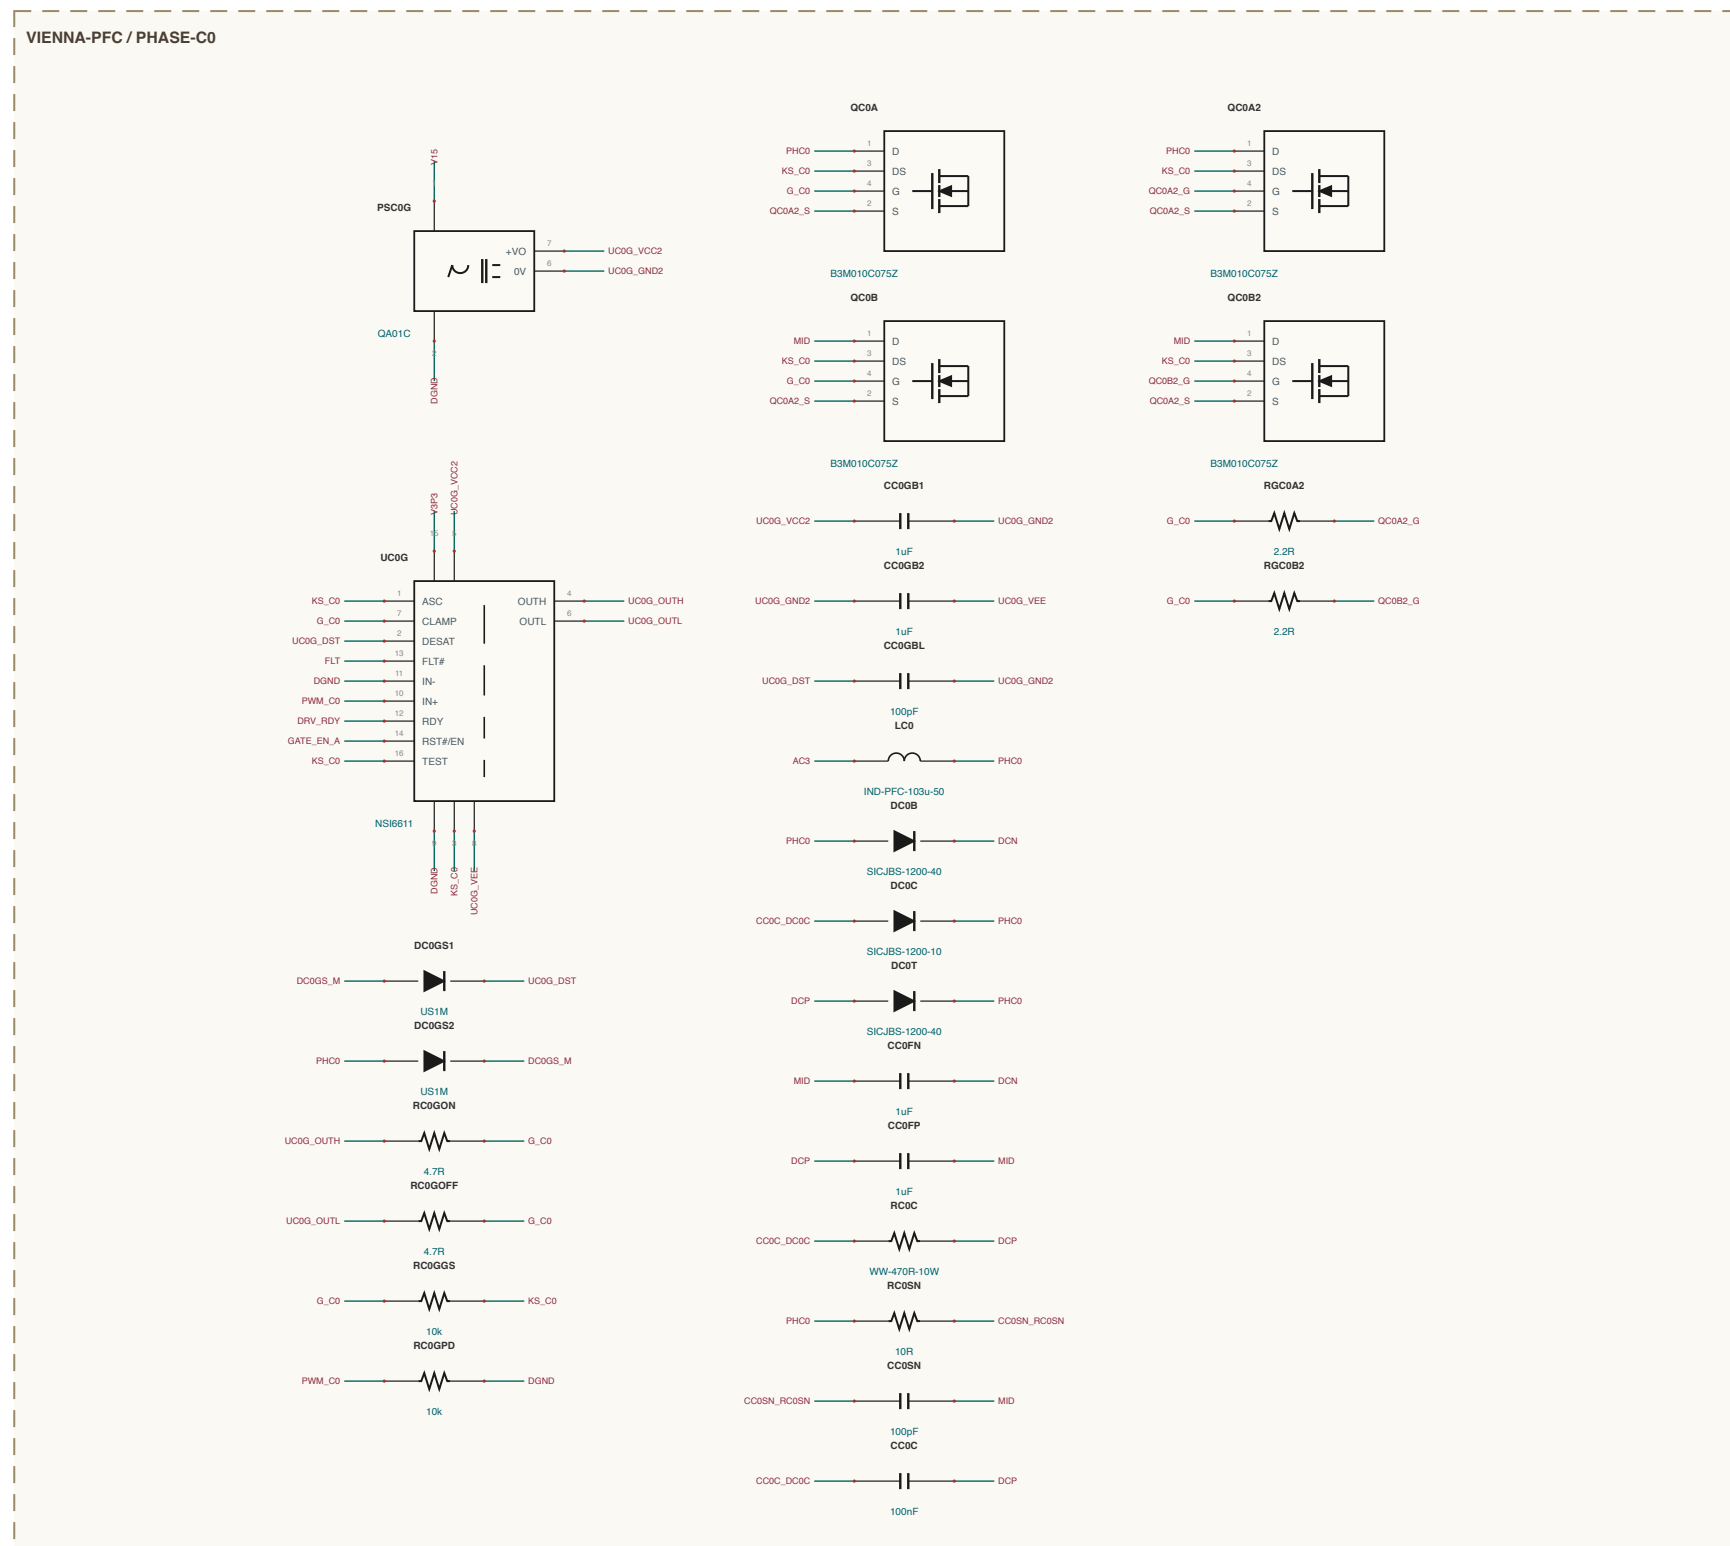
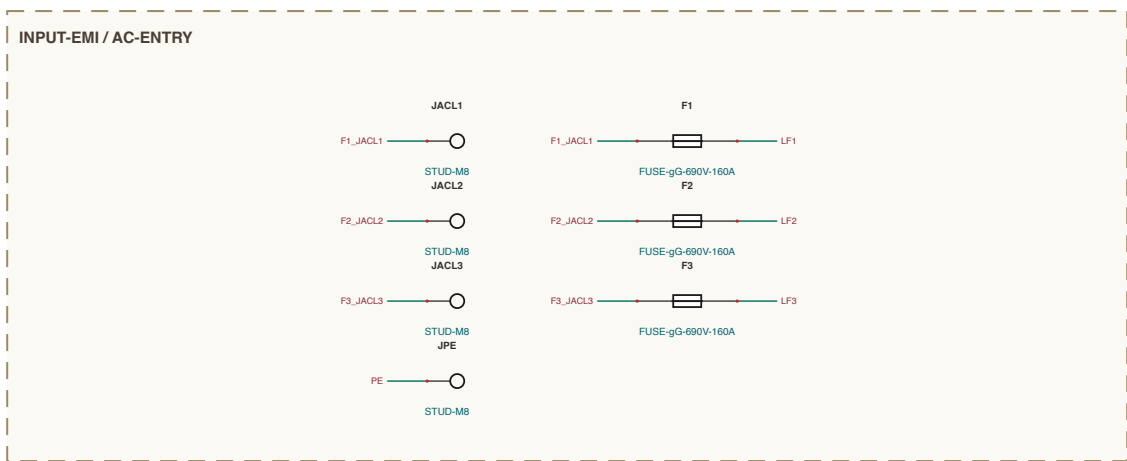
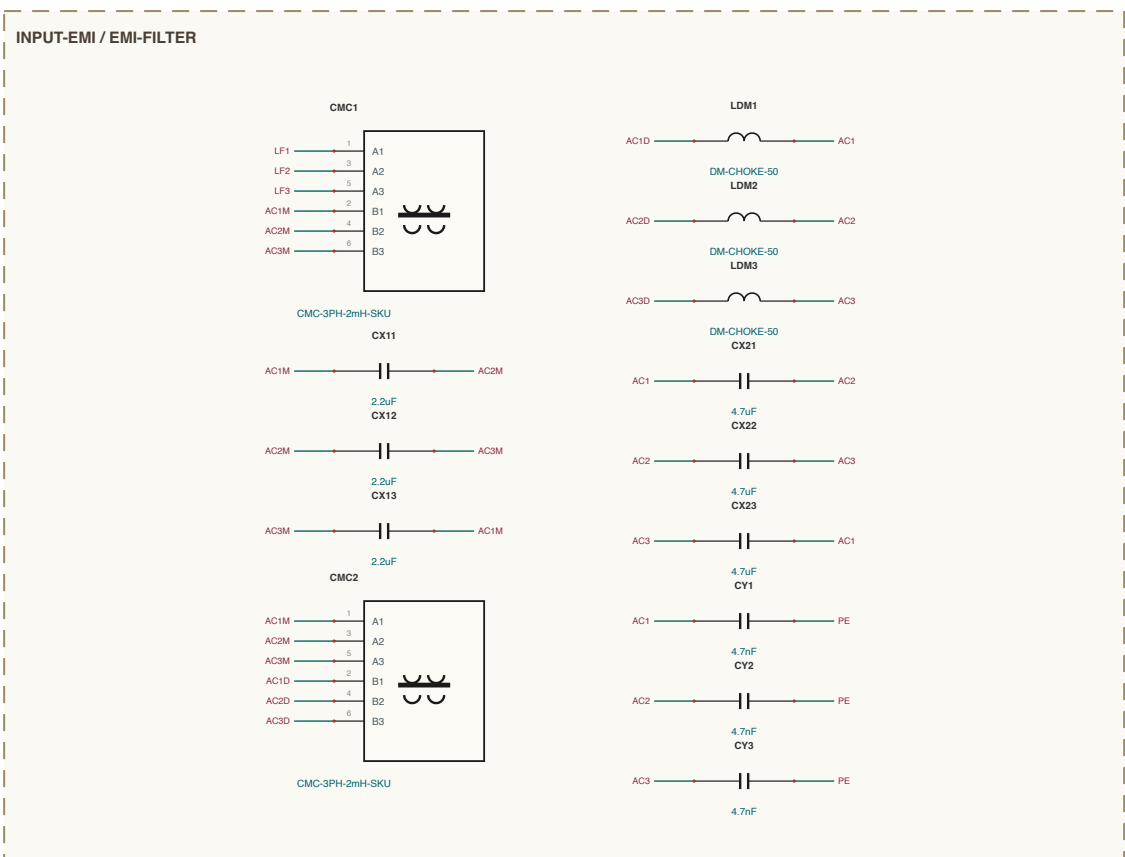
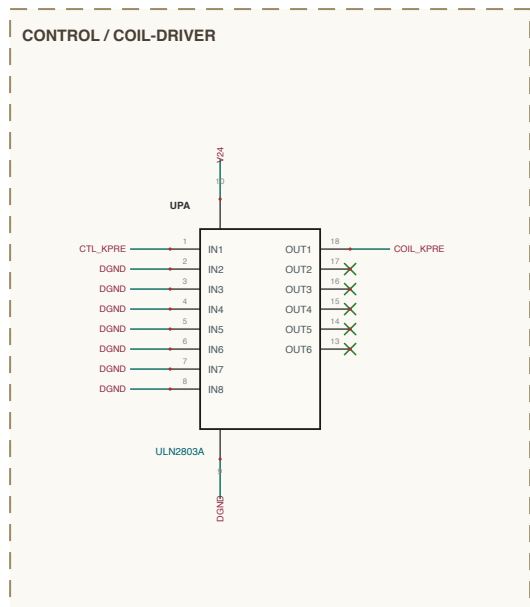
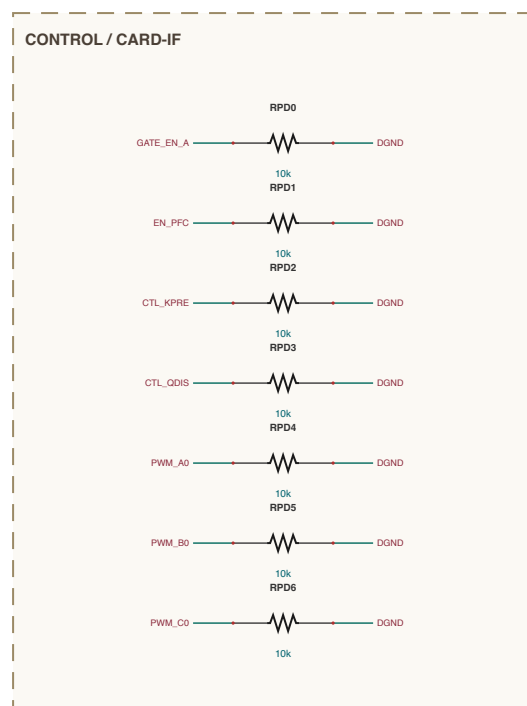
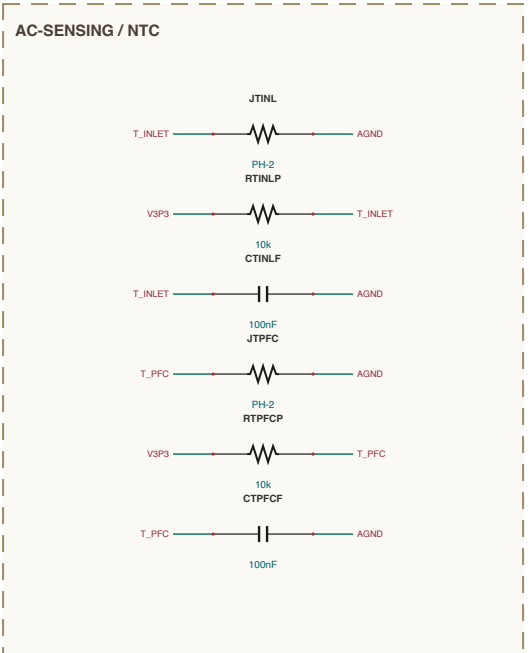
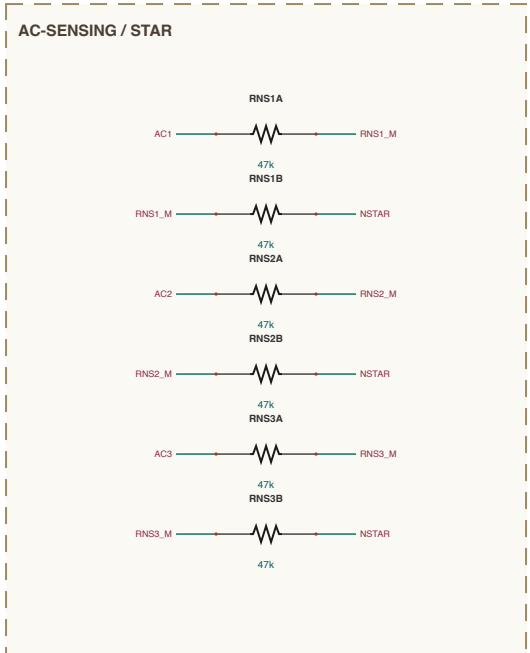
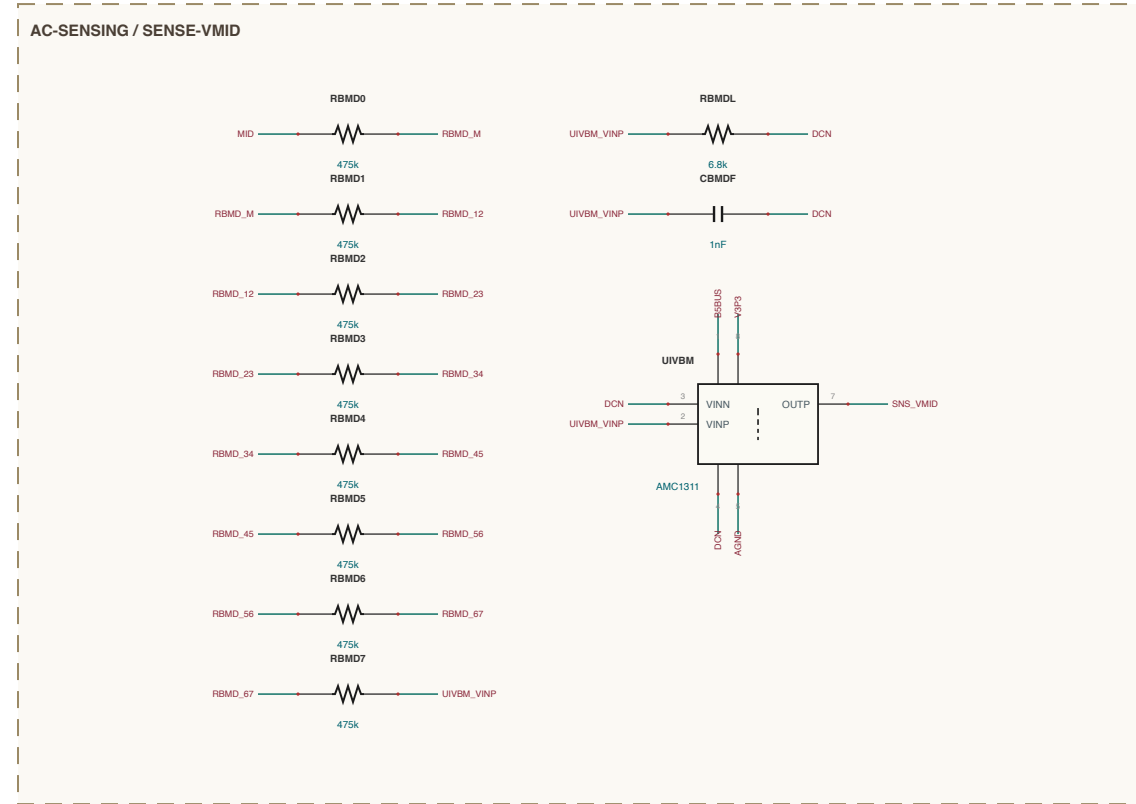
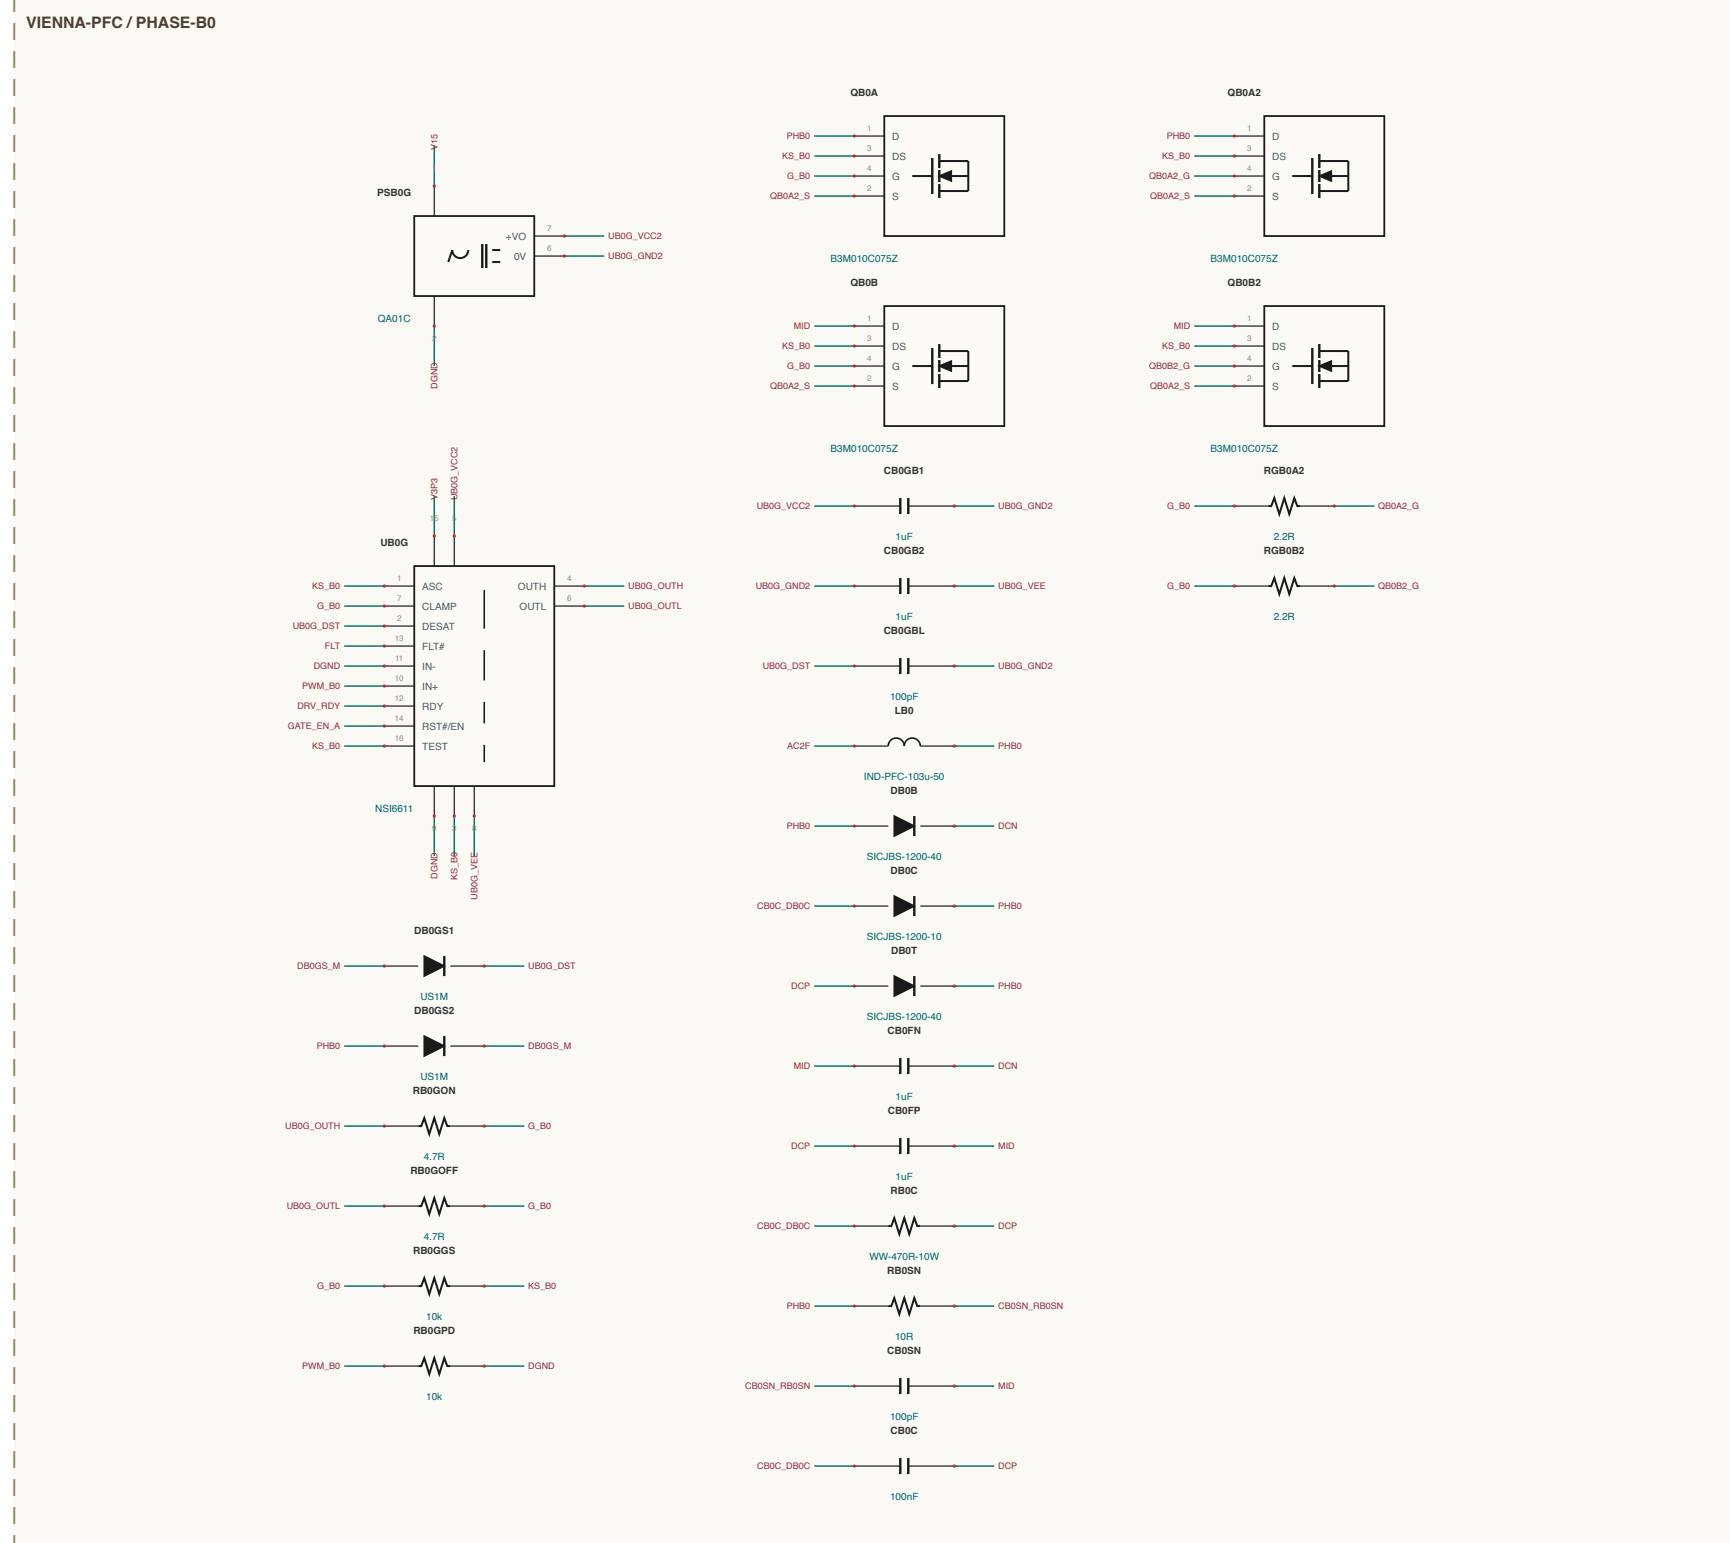
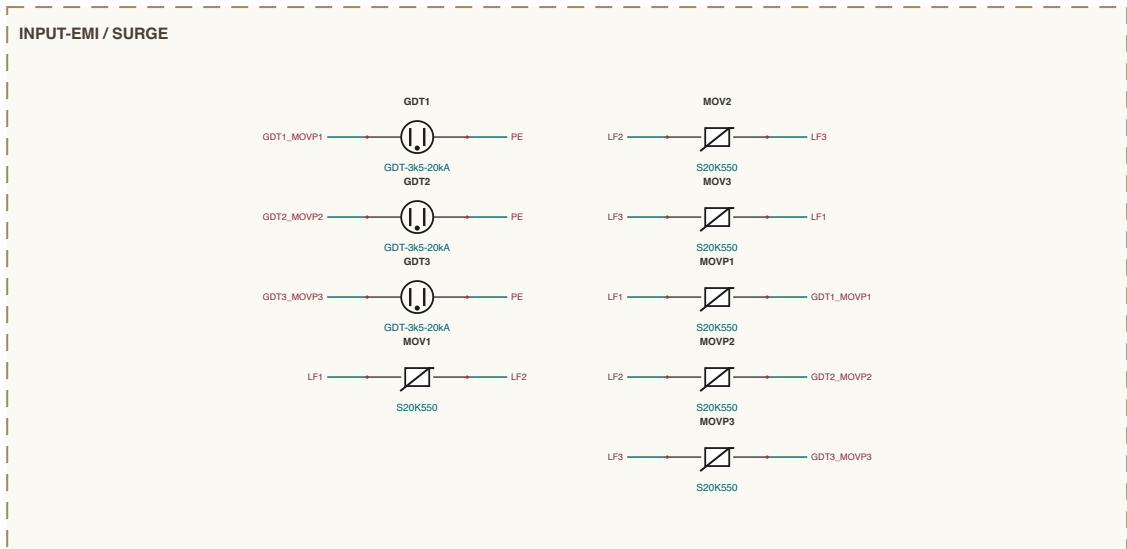
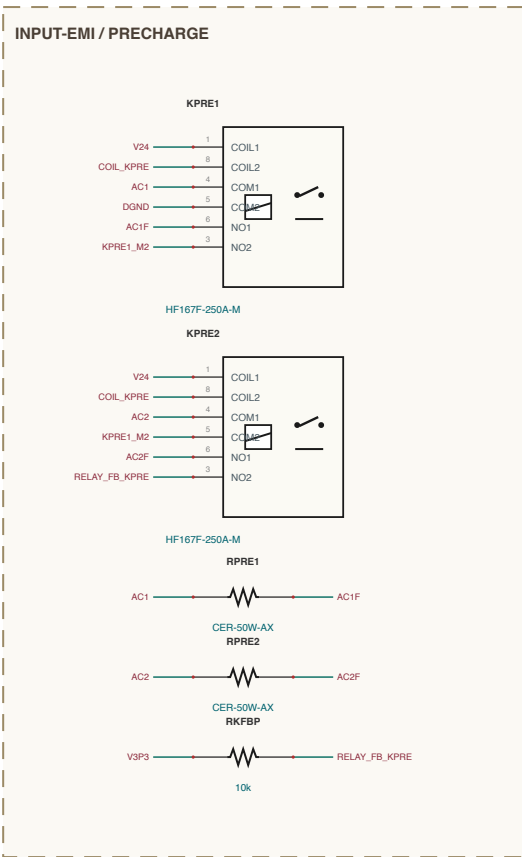
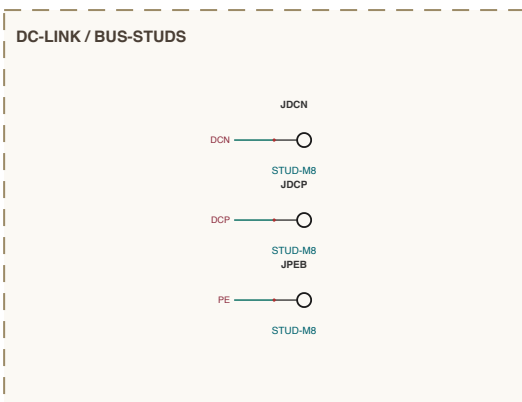
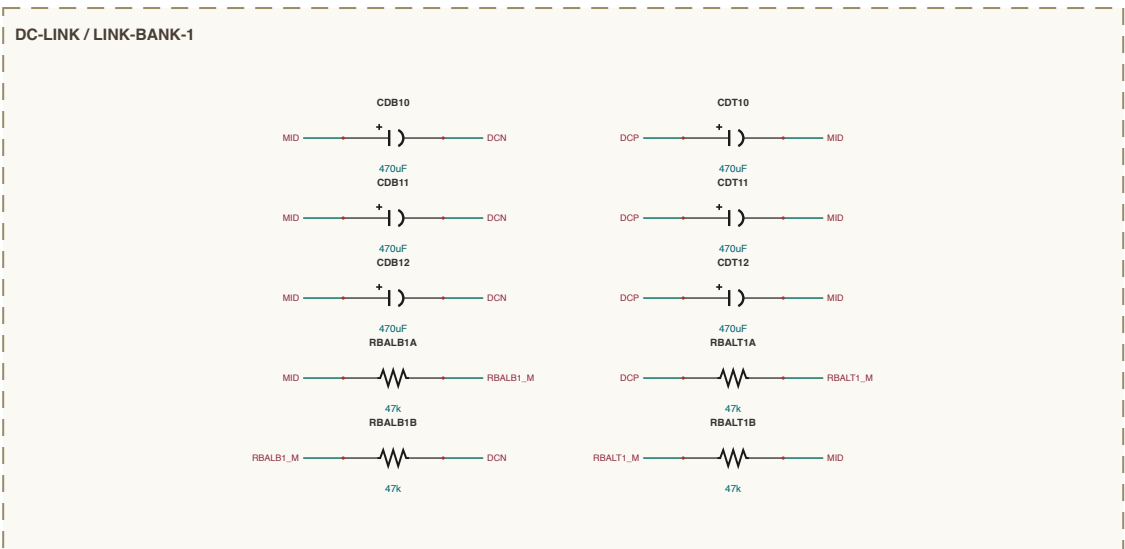
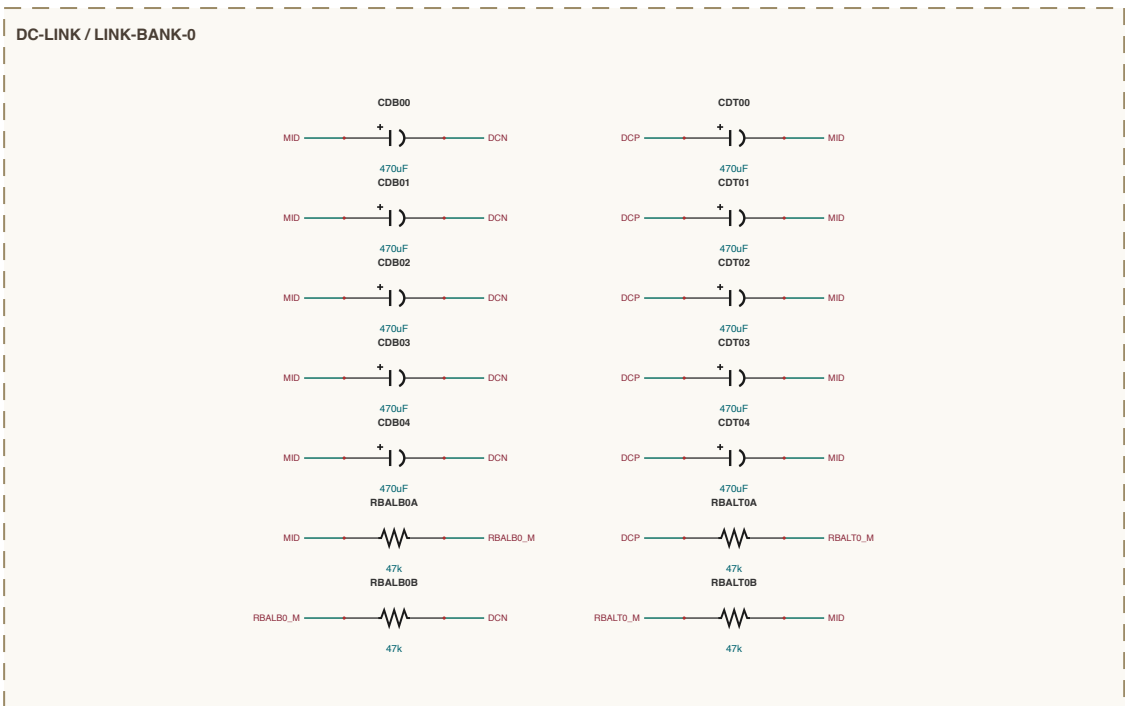
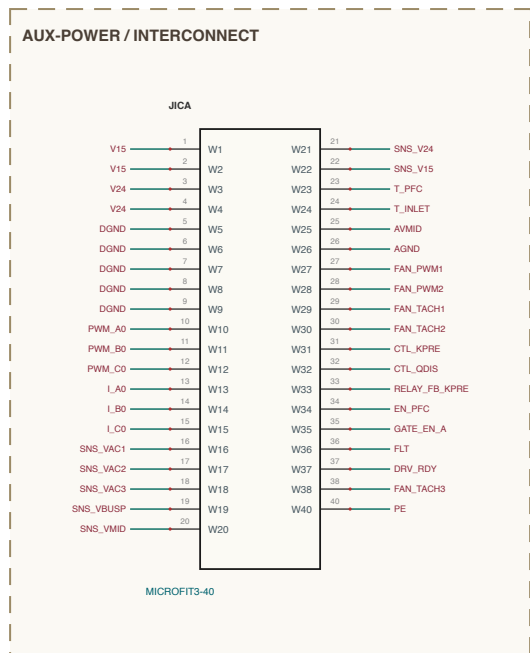
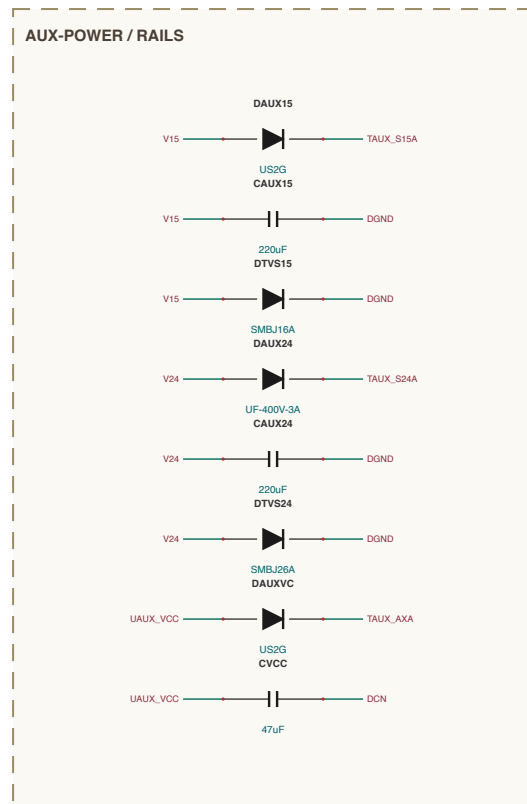
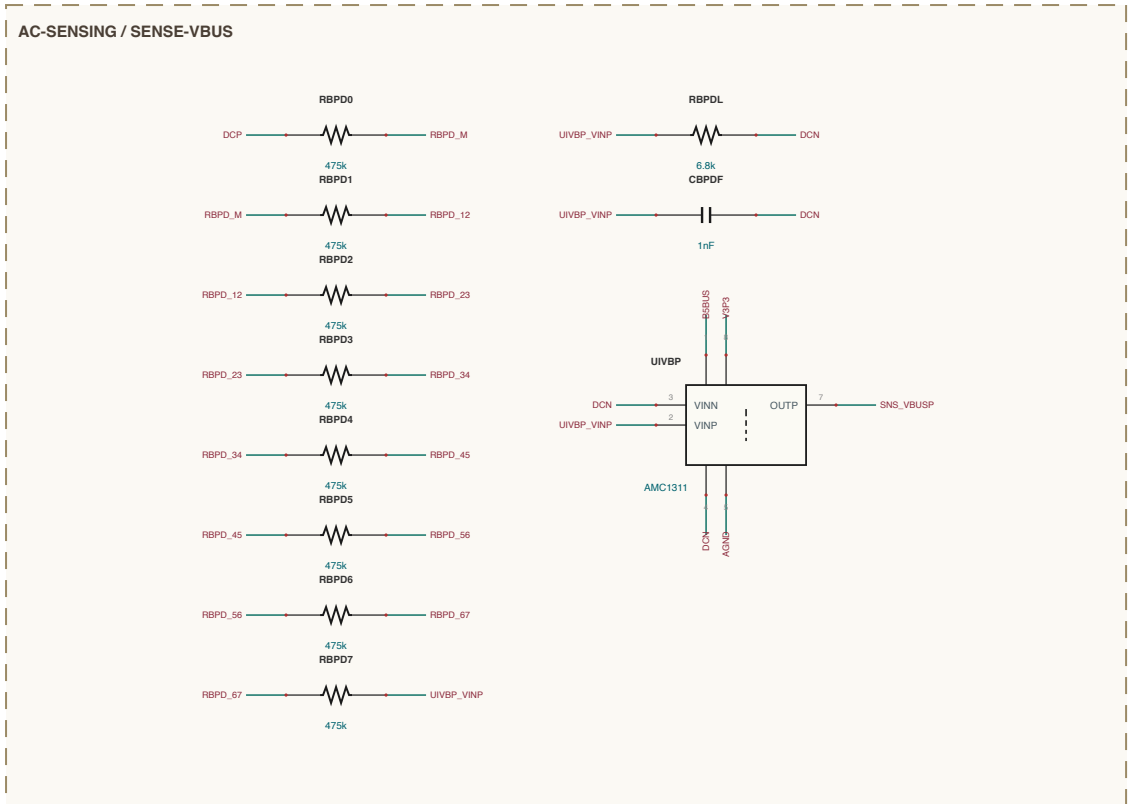
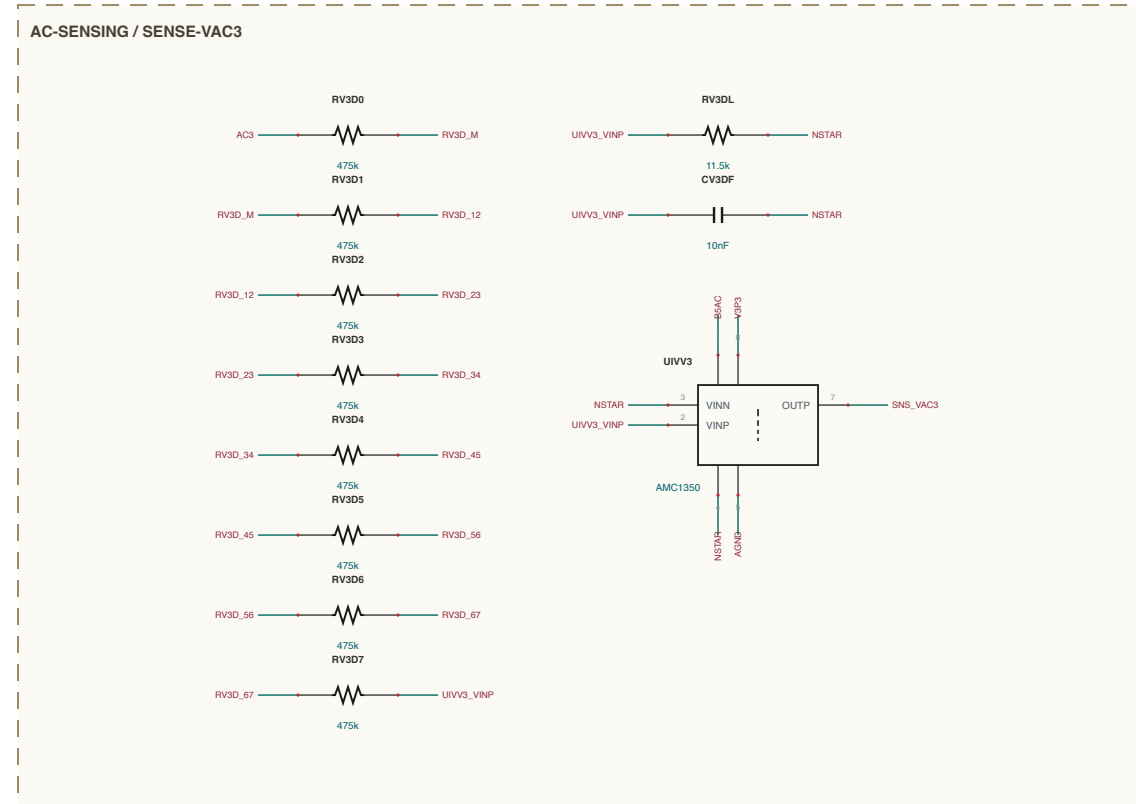
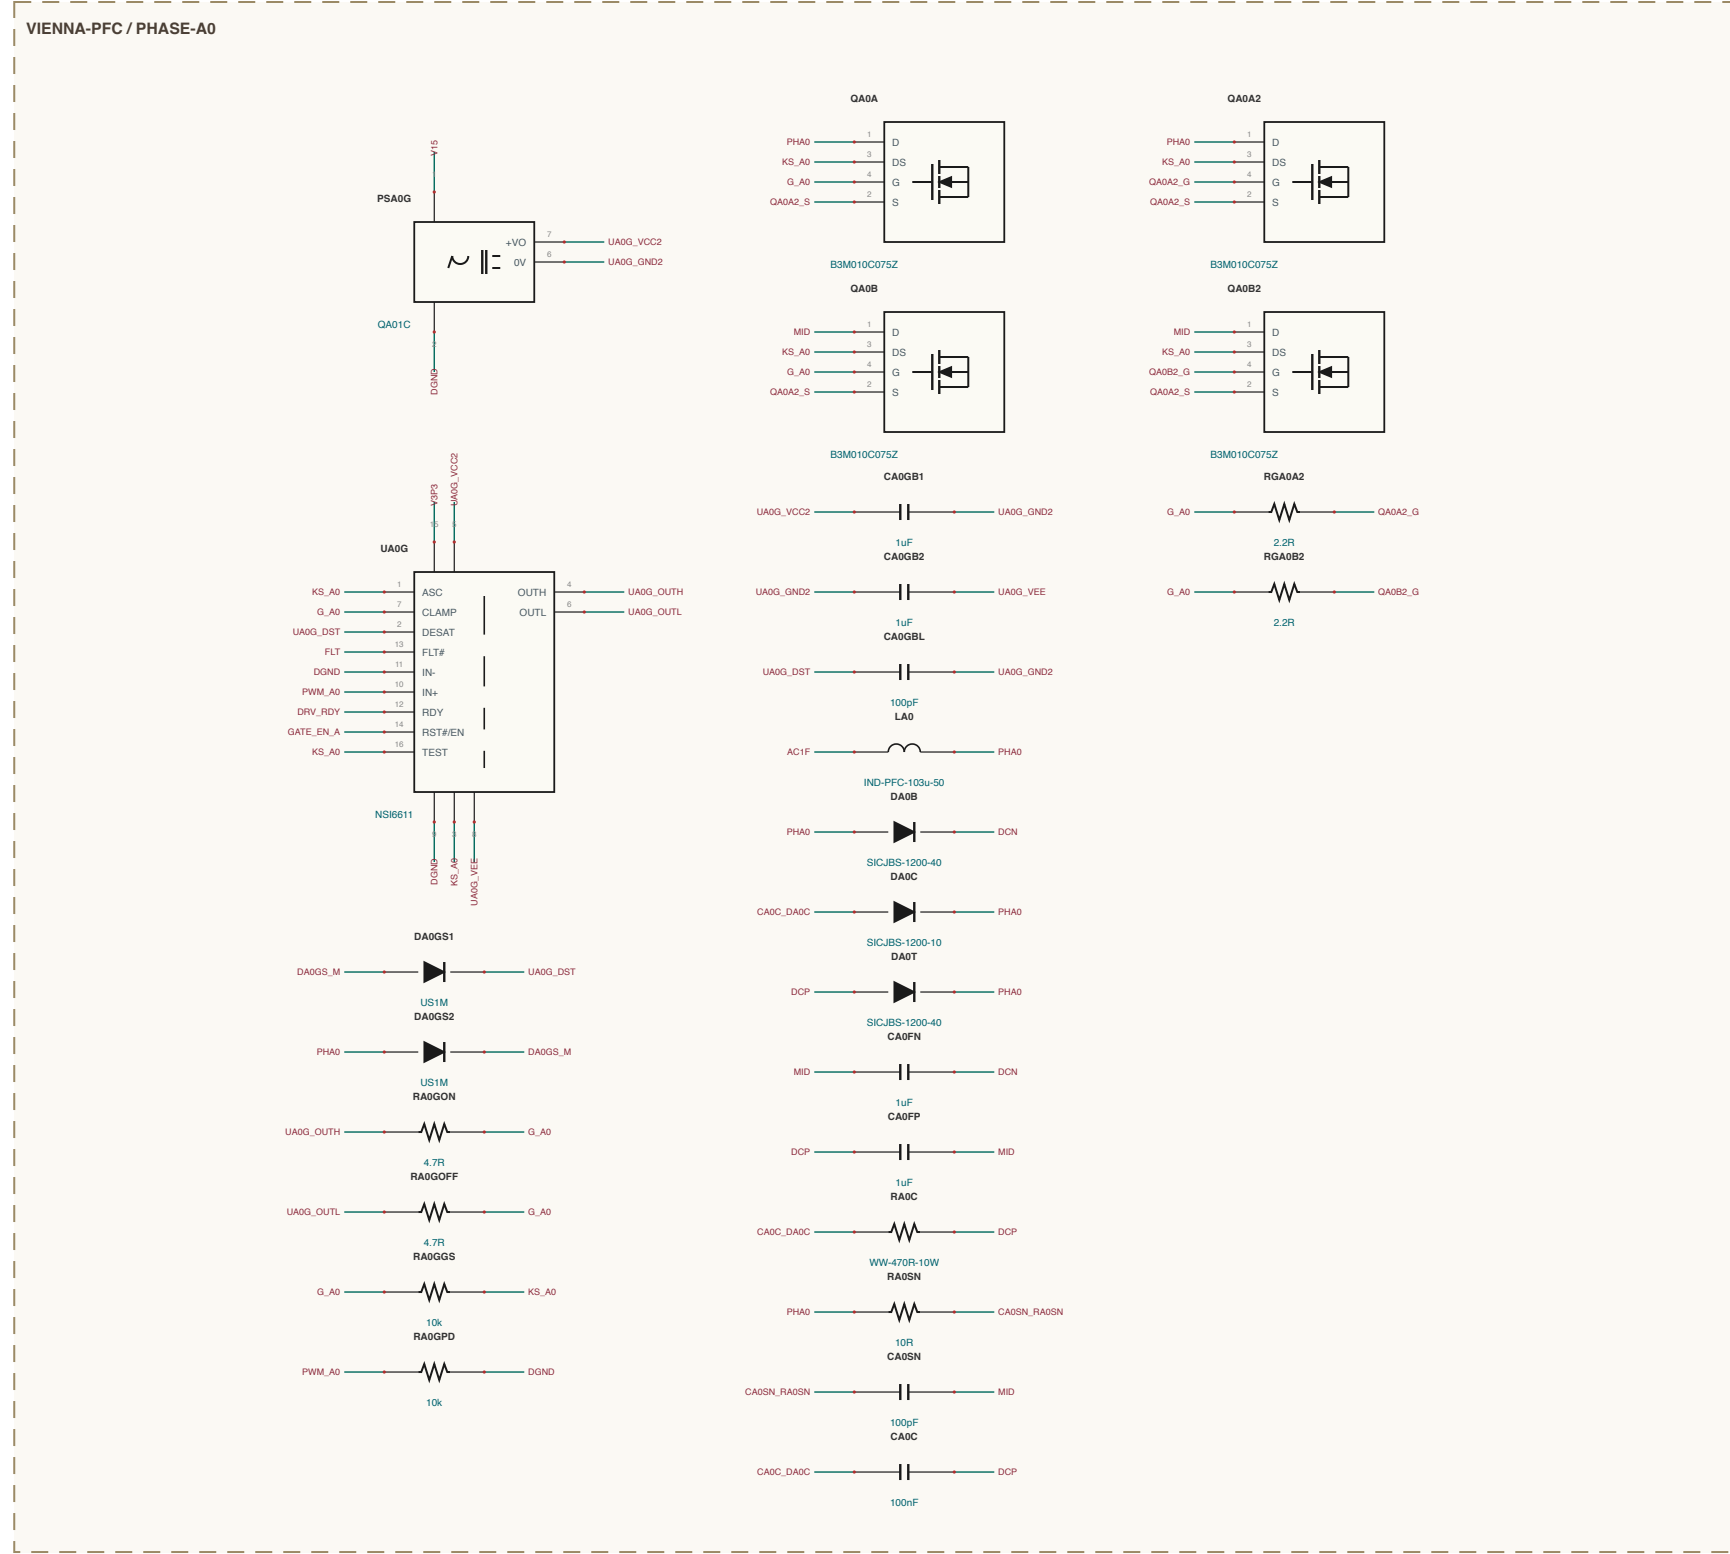
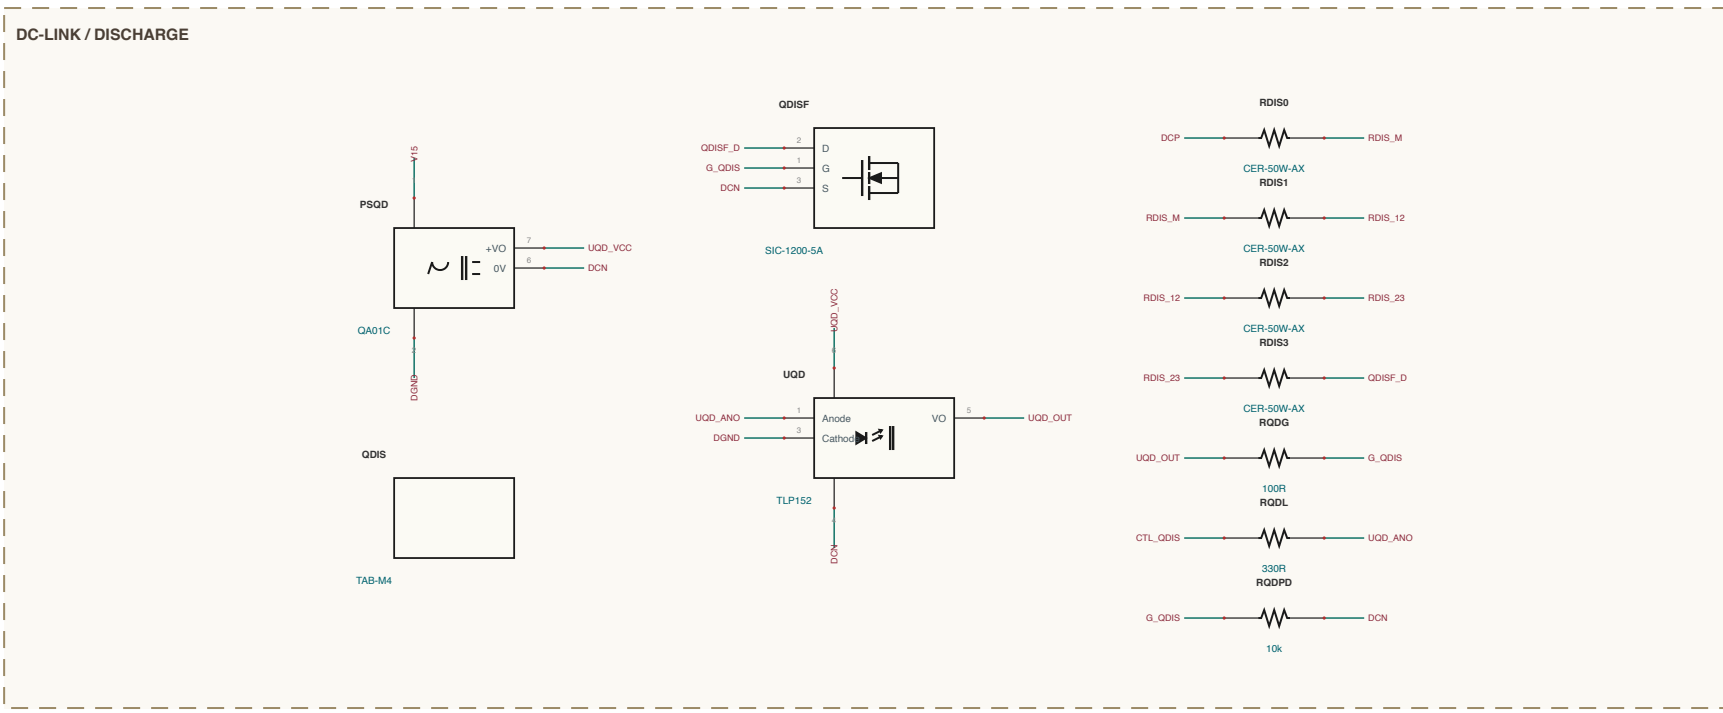
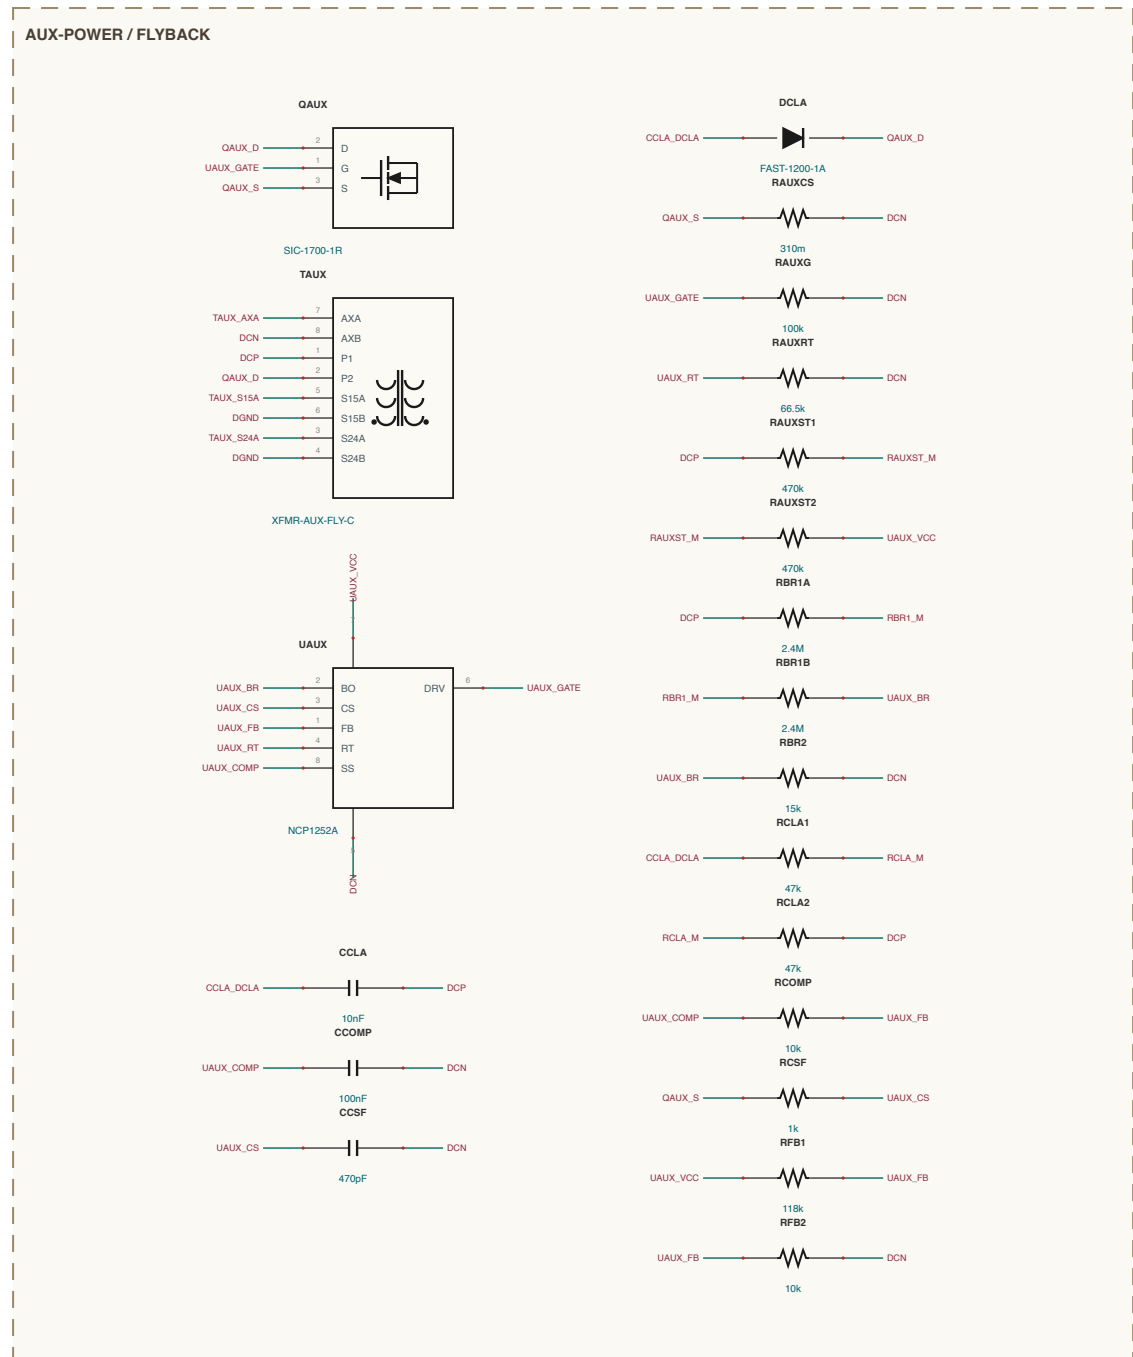
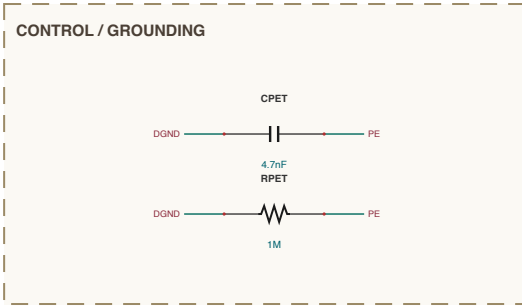
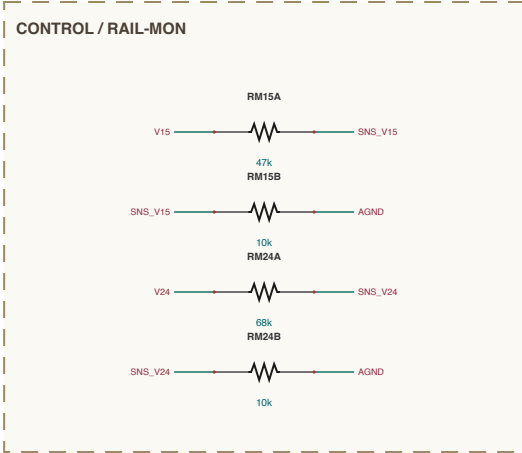
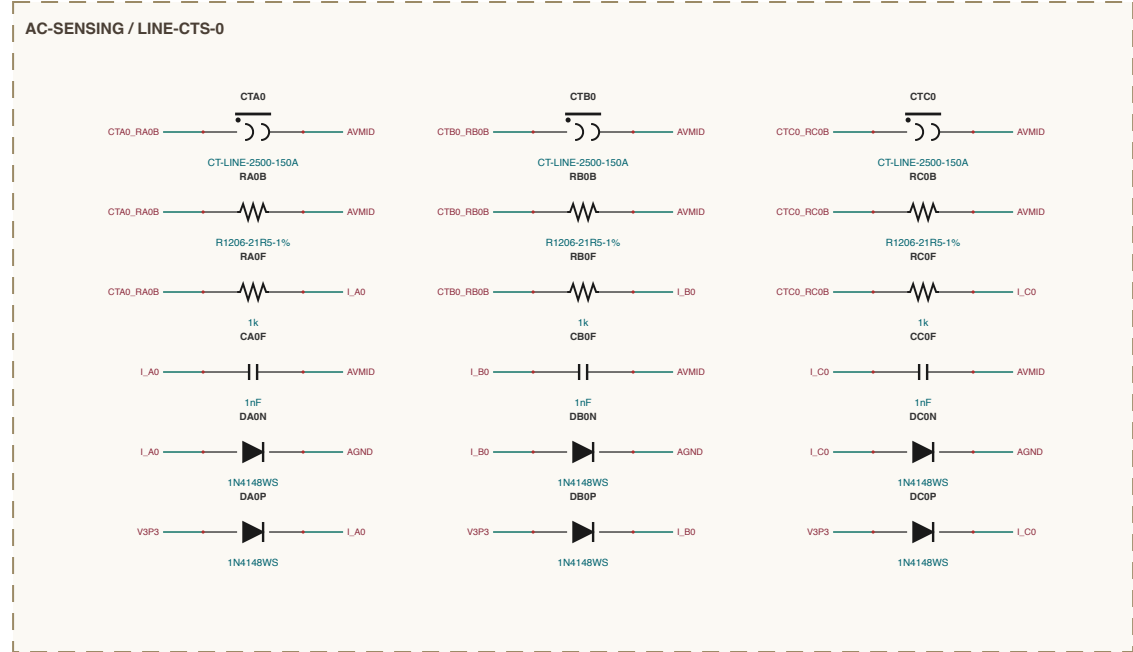
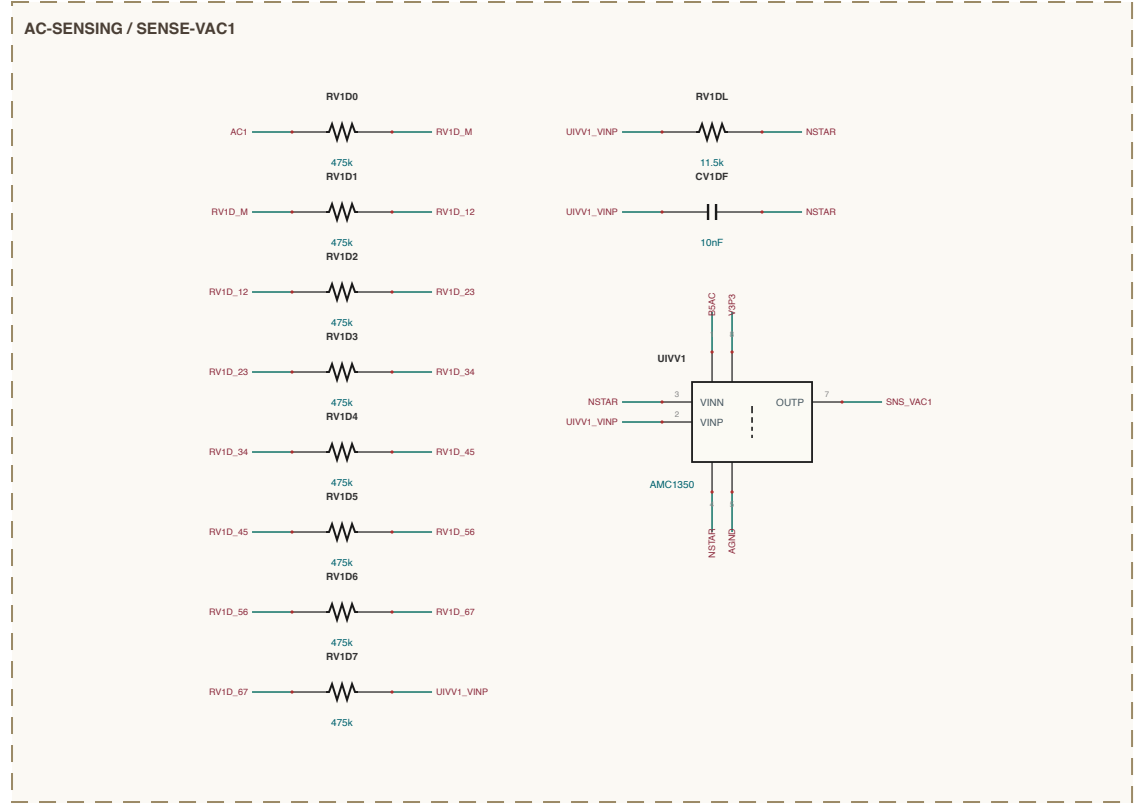


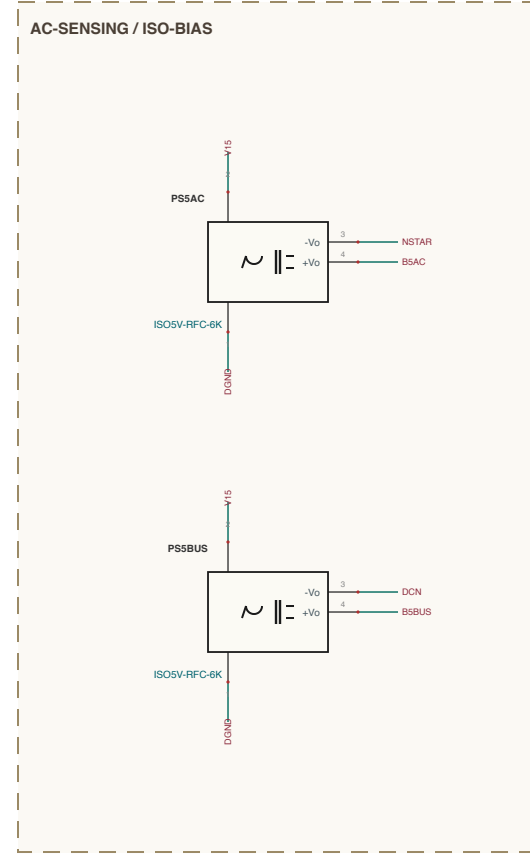

SHEET INDEX
Sheet 1 of 1
AC SENSING - 5 sections
CONTROL - 4 sections
DC-LINK - 4 sections
INPUT-EM - 4 sections
AUX-POWER - 3 sections
VIENNA-PFC - 3 sections
rev 0.1 - 17 sections - 280 components

NET NAMING
Internal junctions are named for what they join
Locality, while made at that I pin e.g. VAC1A, VOUT
Customers, M, support of a series pin e.g. RAIL1A, M
Resistors, across top between ResistorName e.g. R101, M
all others are explicit design rules