
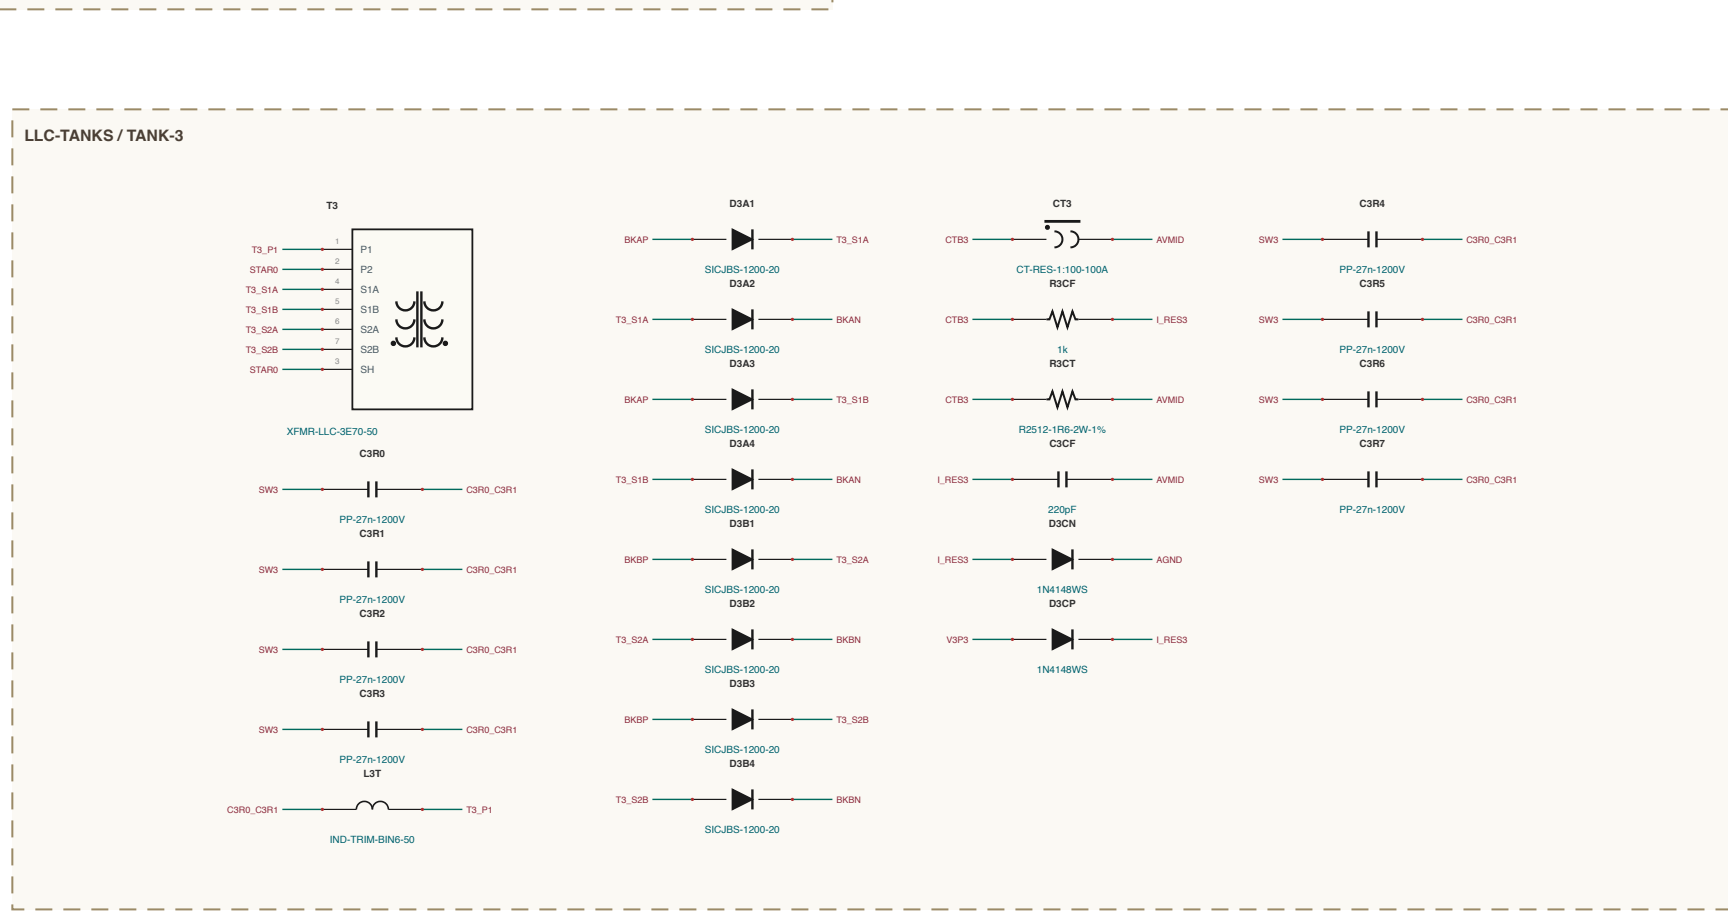
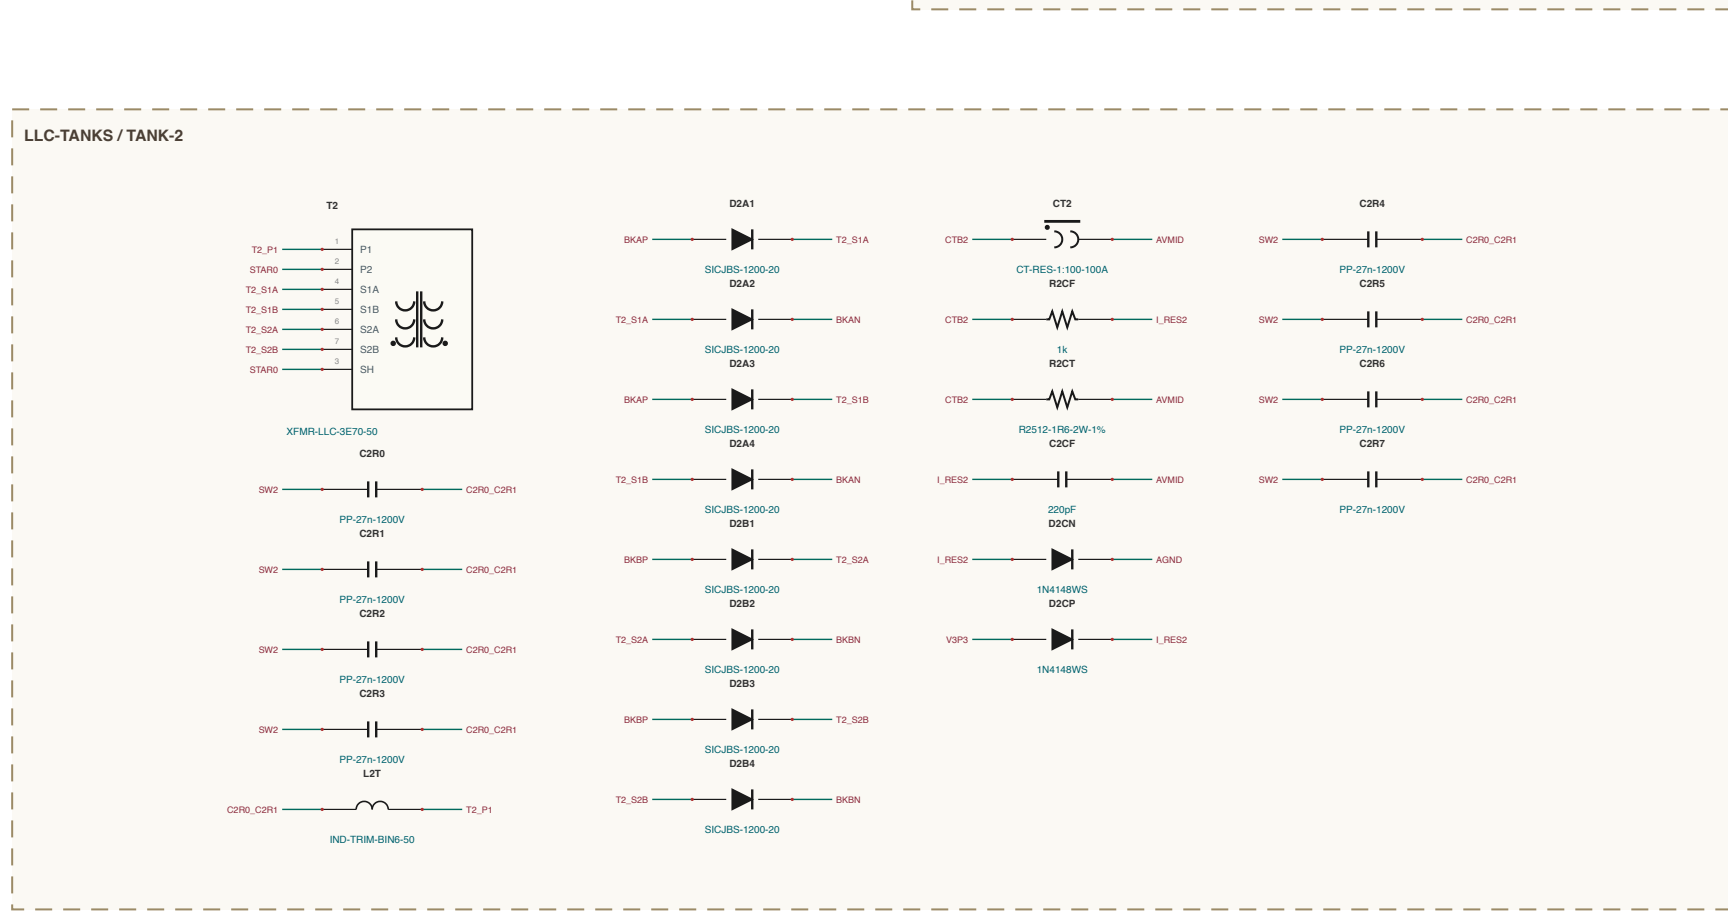
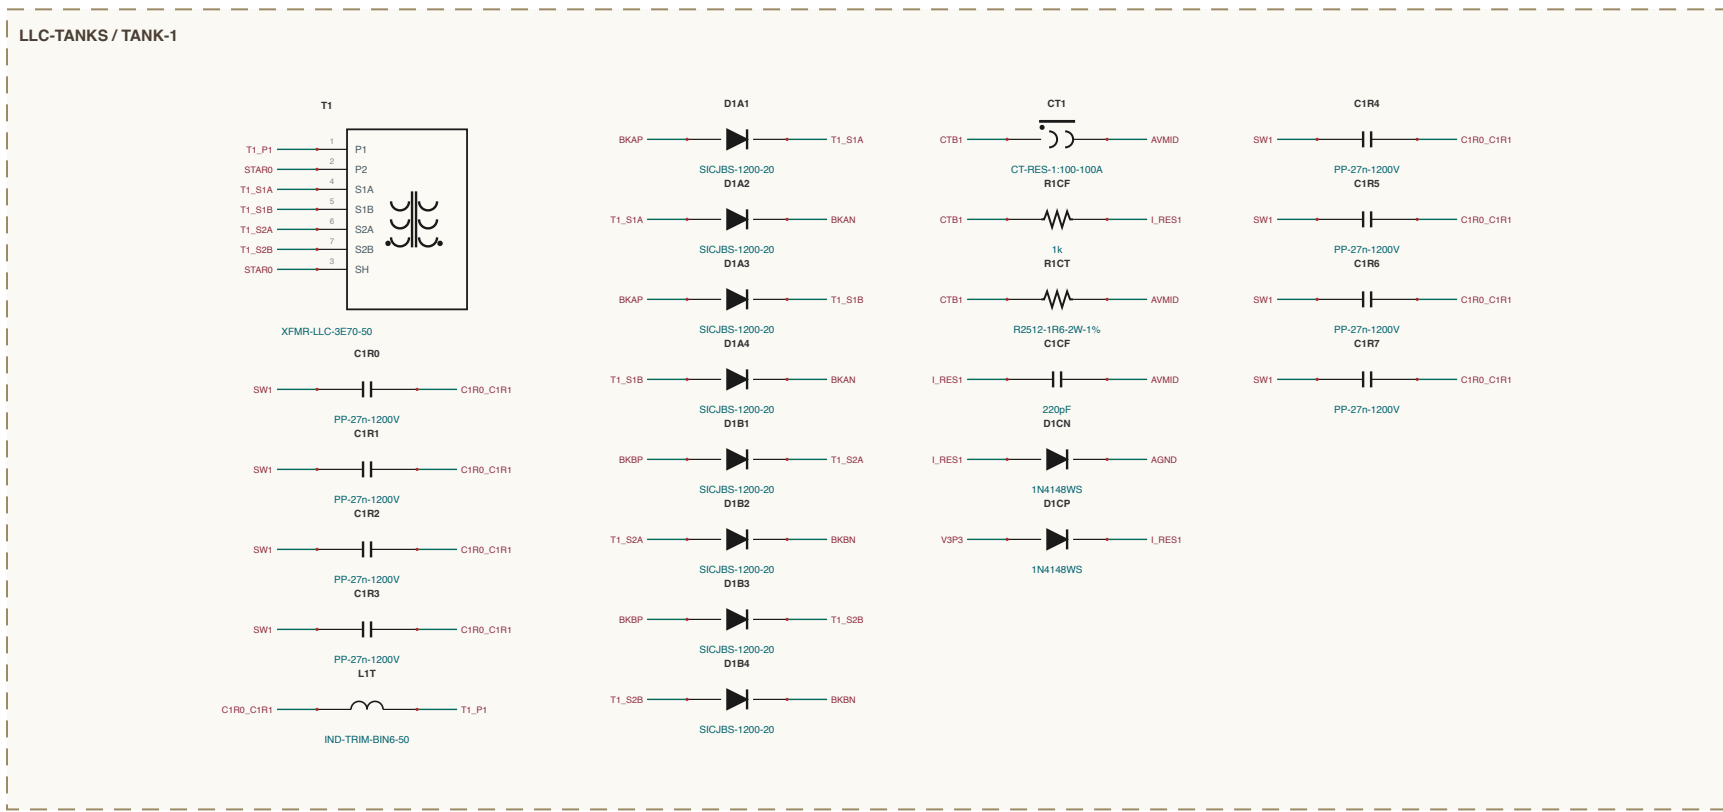
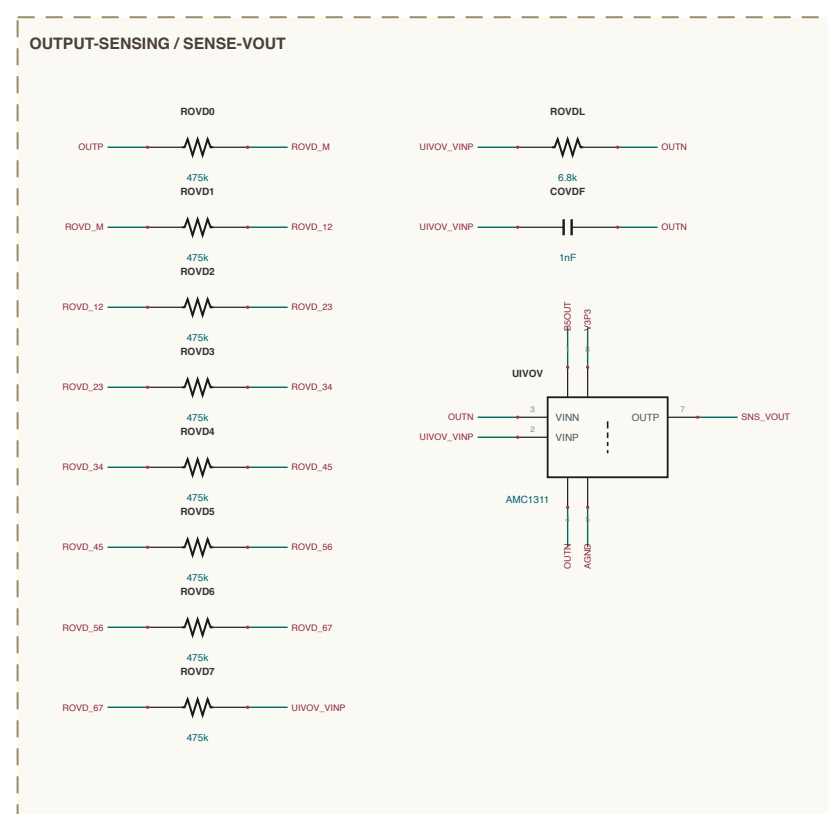
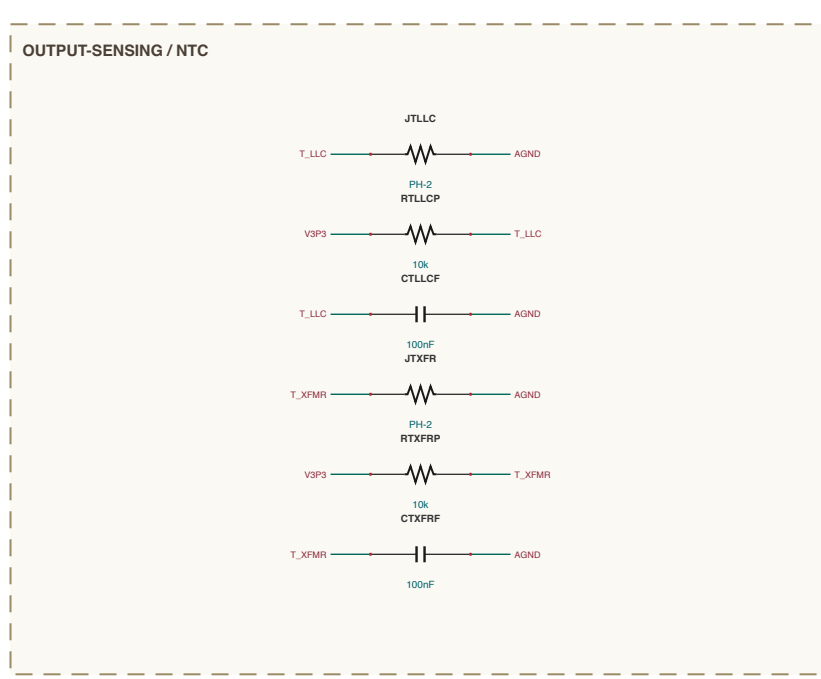
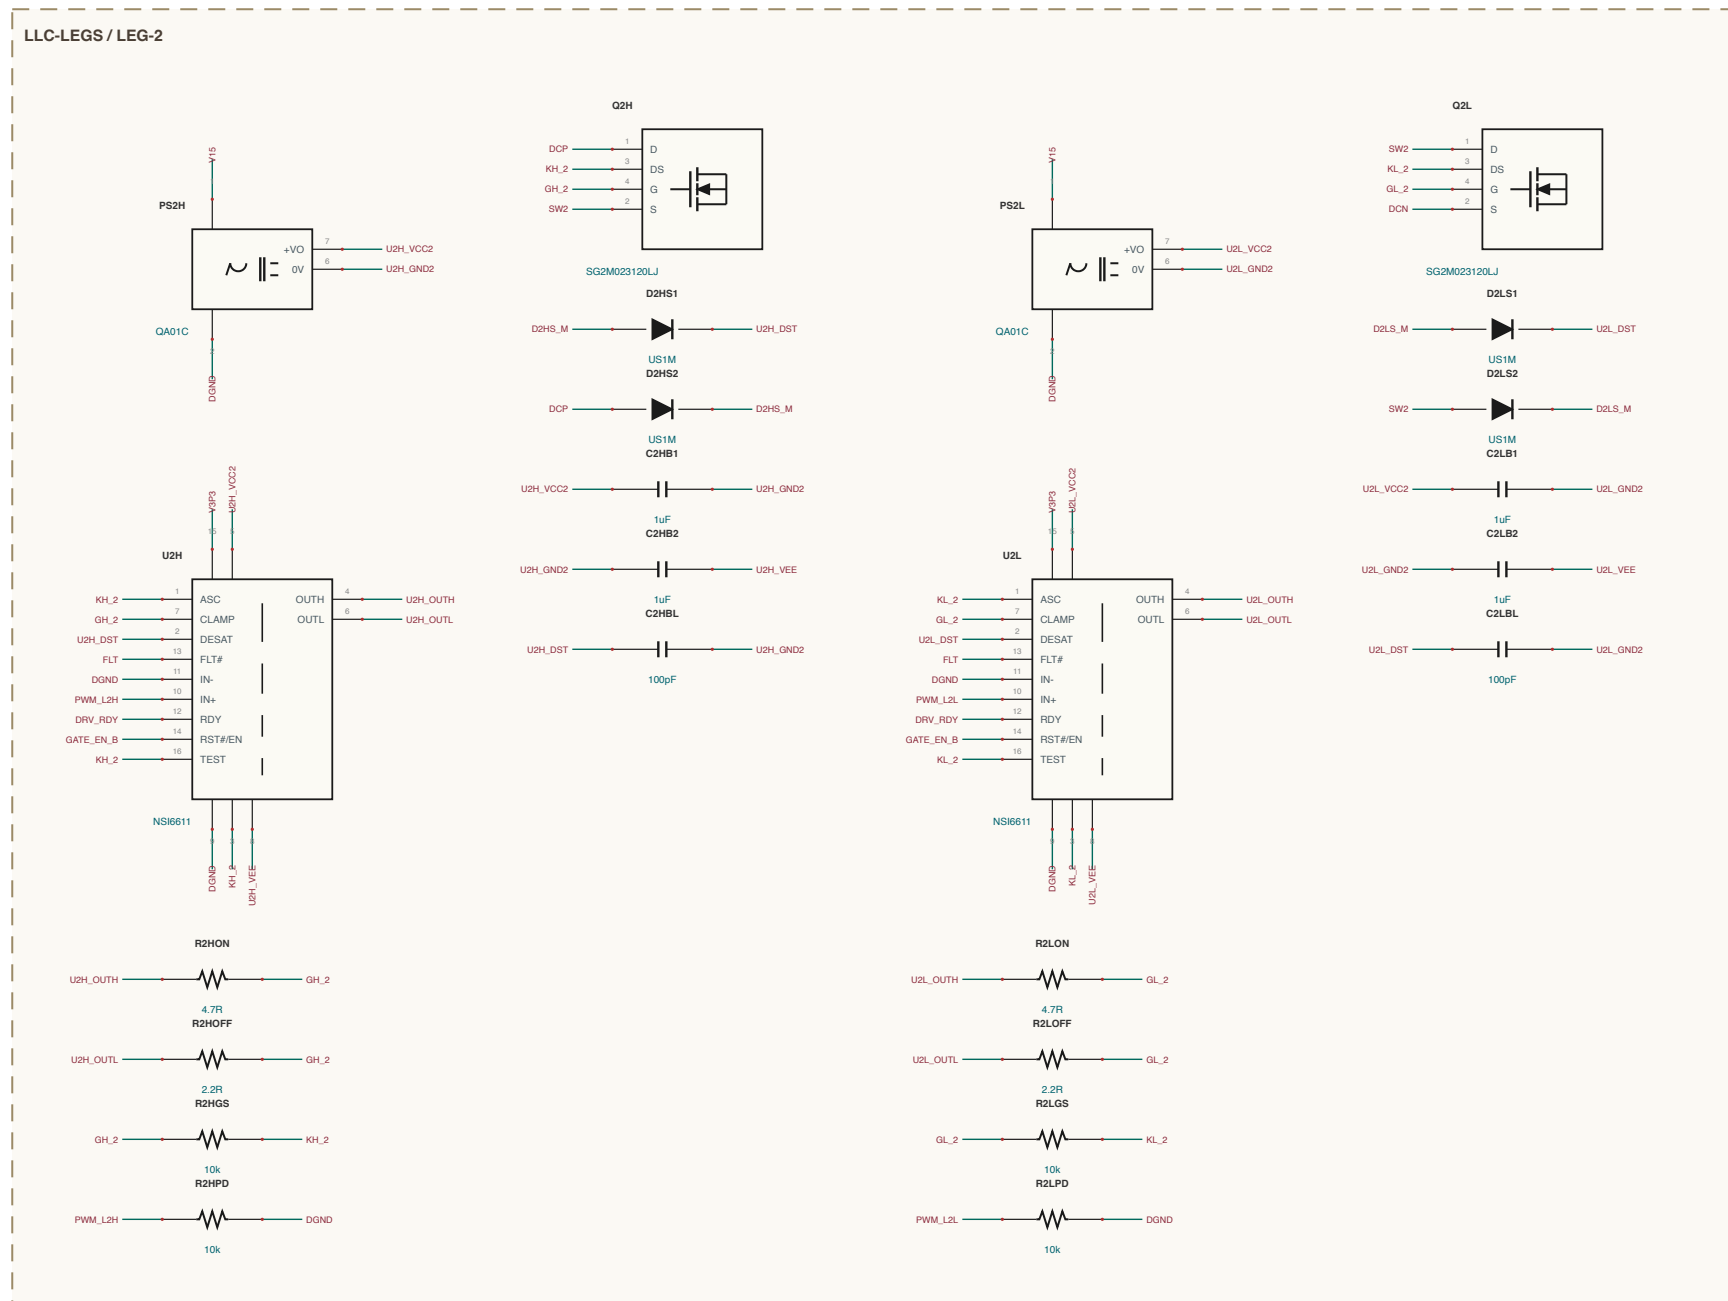
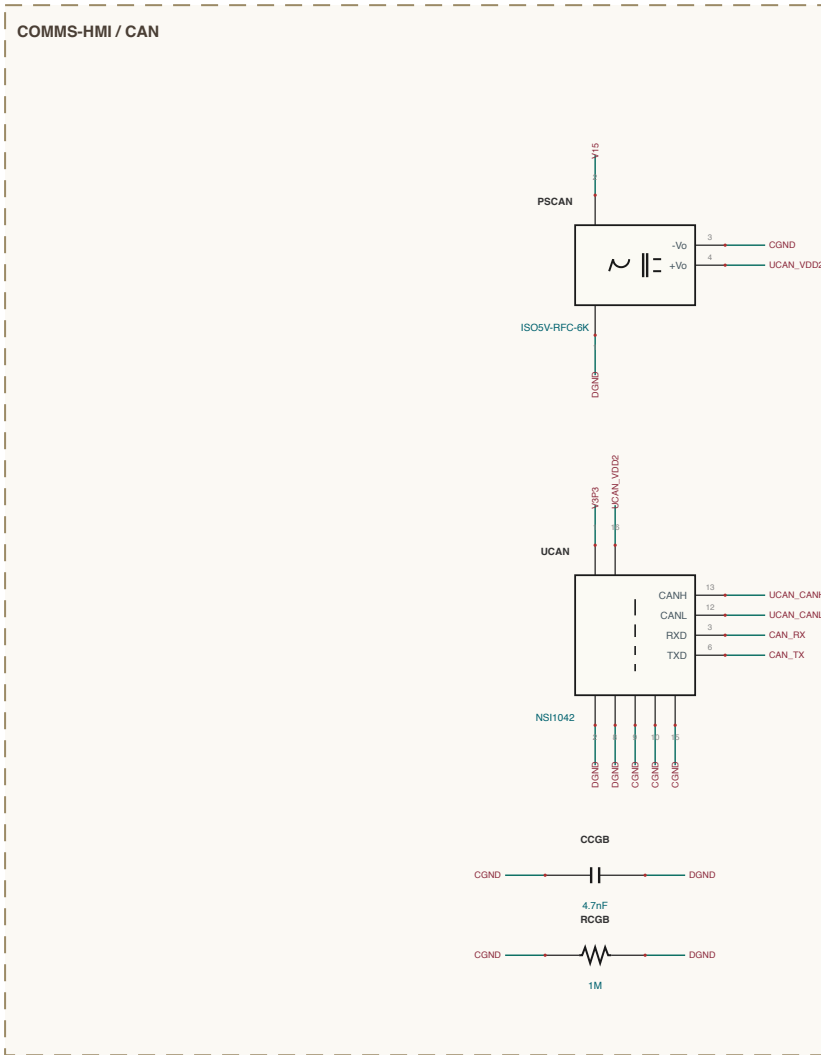
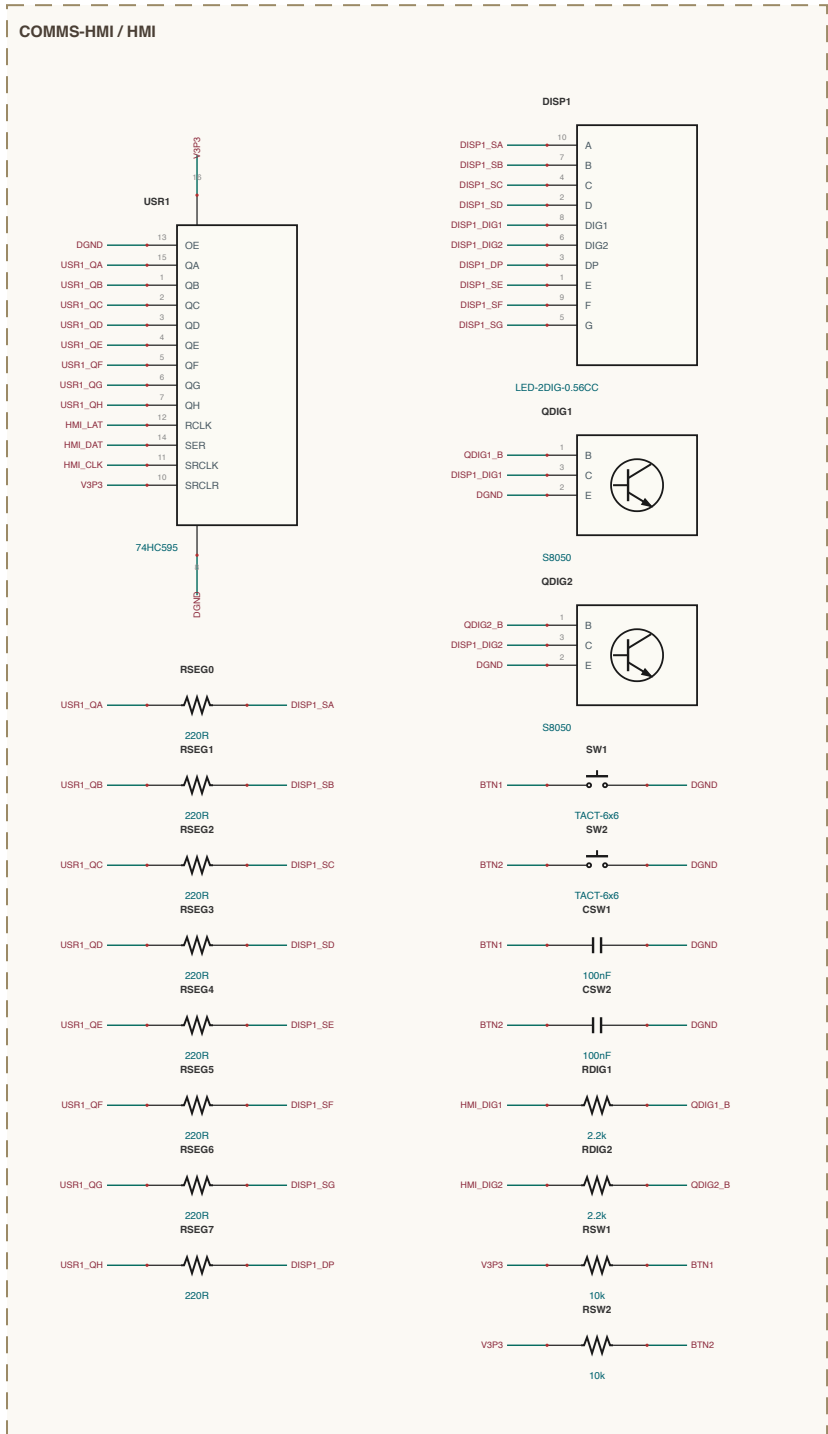
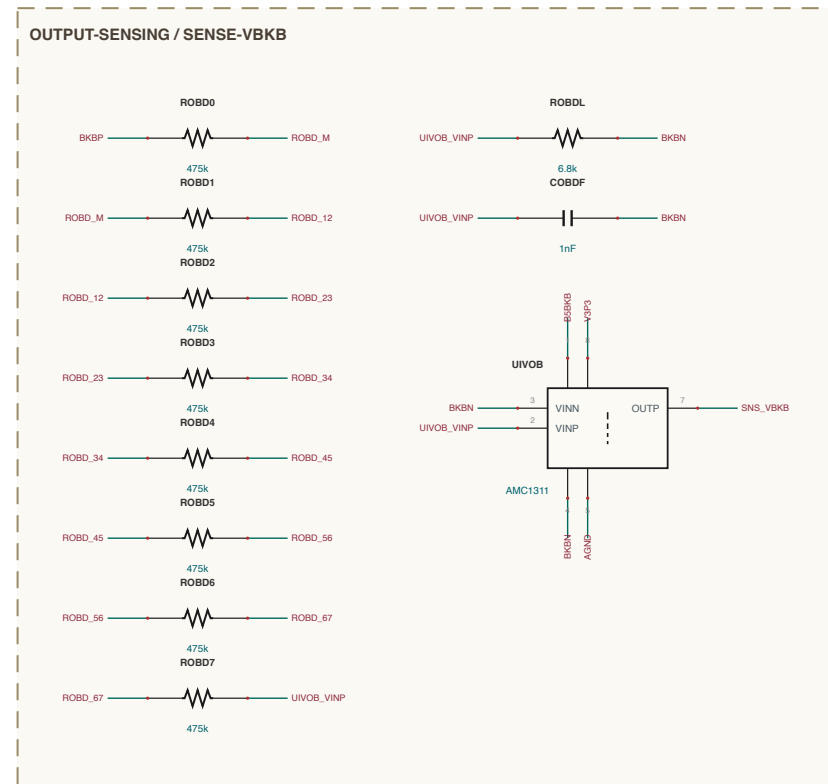
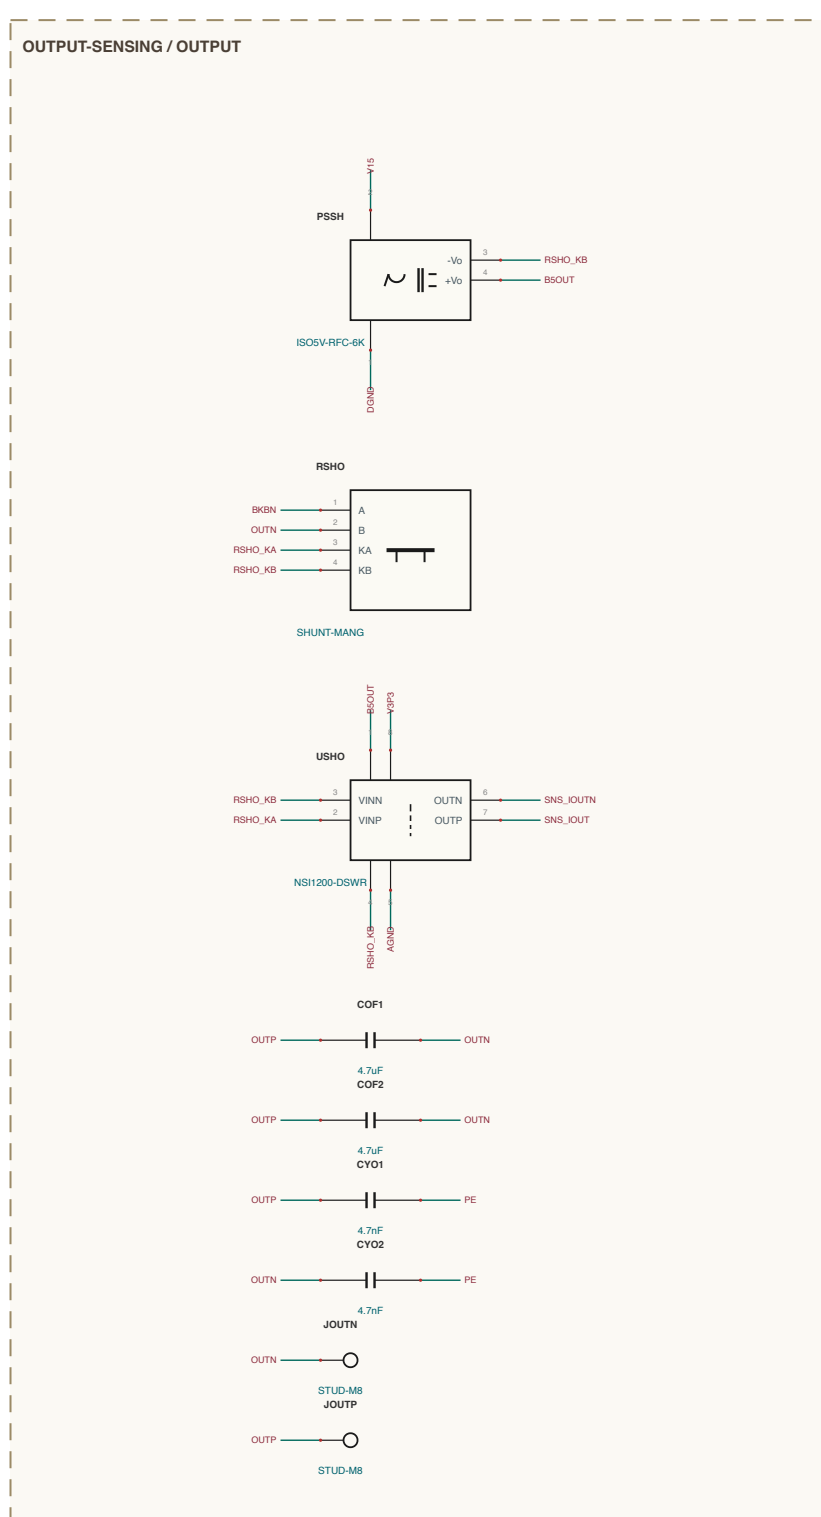
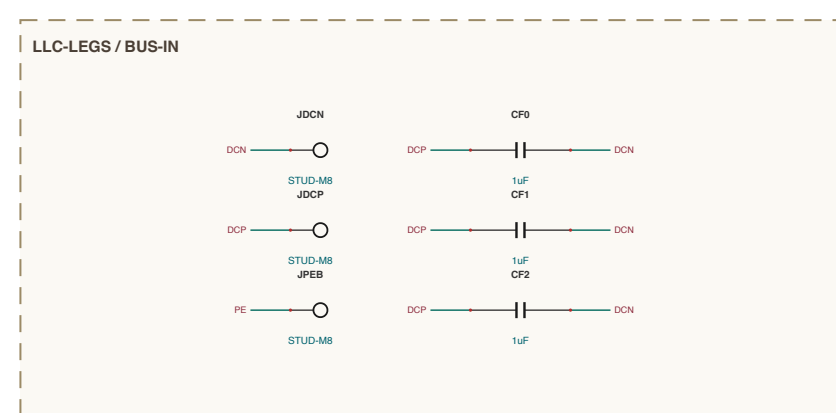
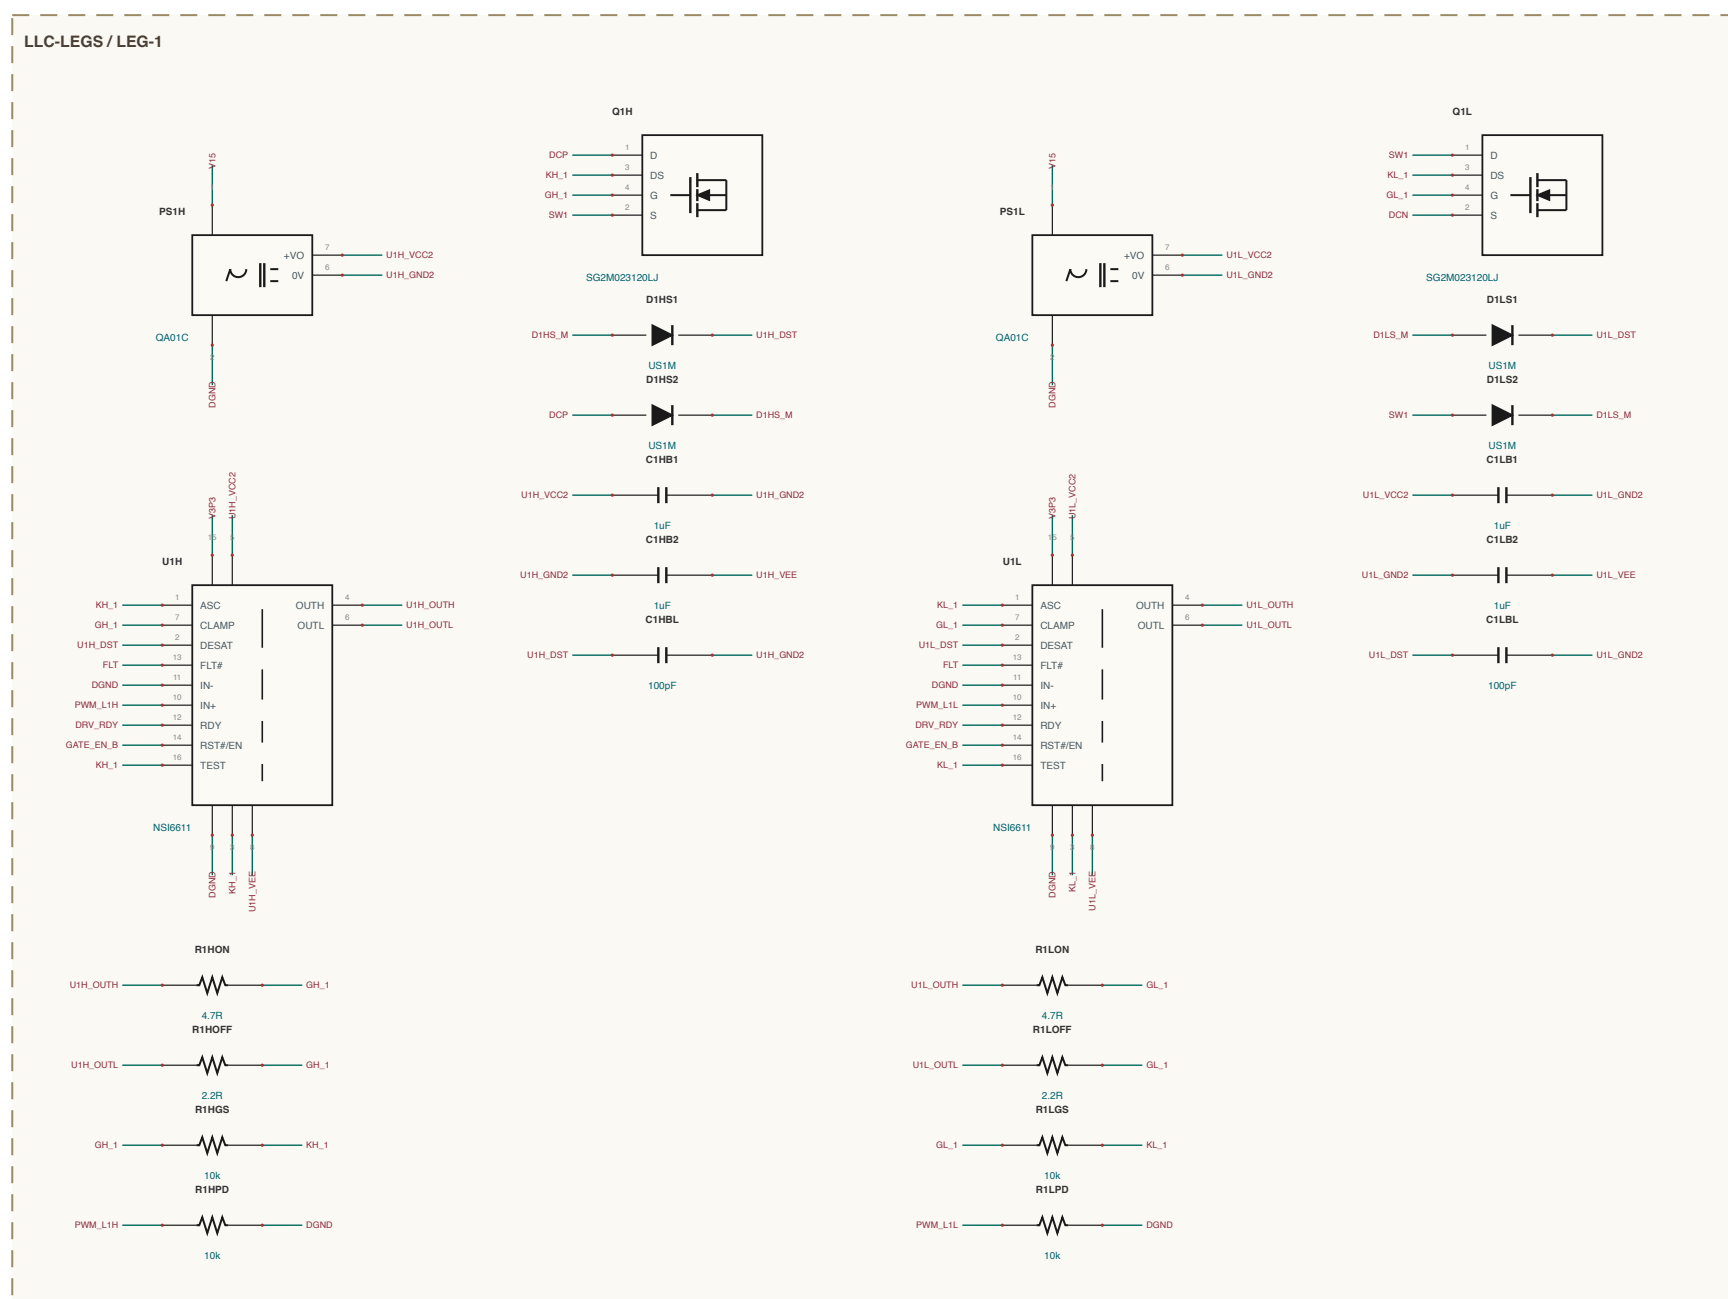
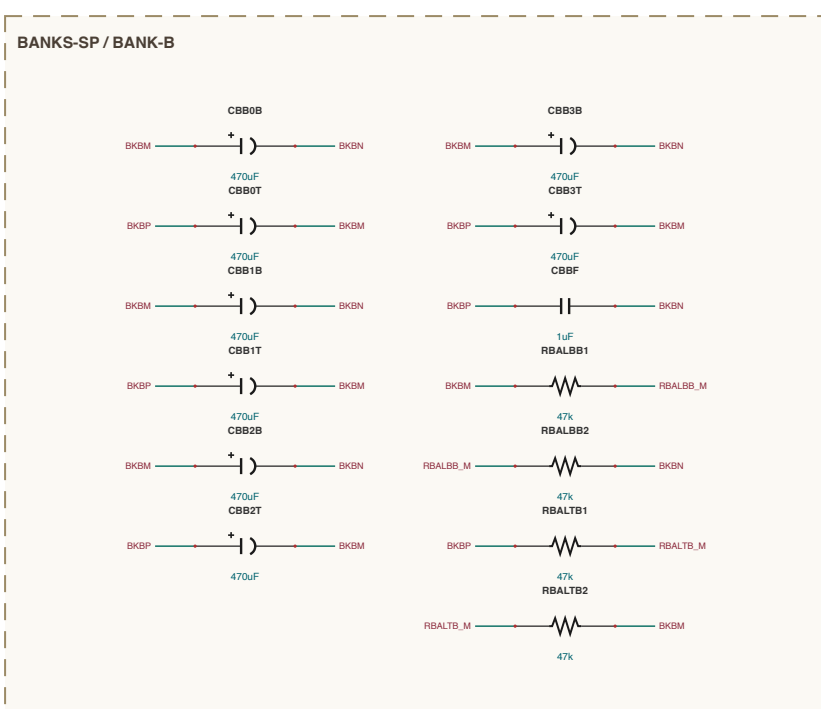
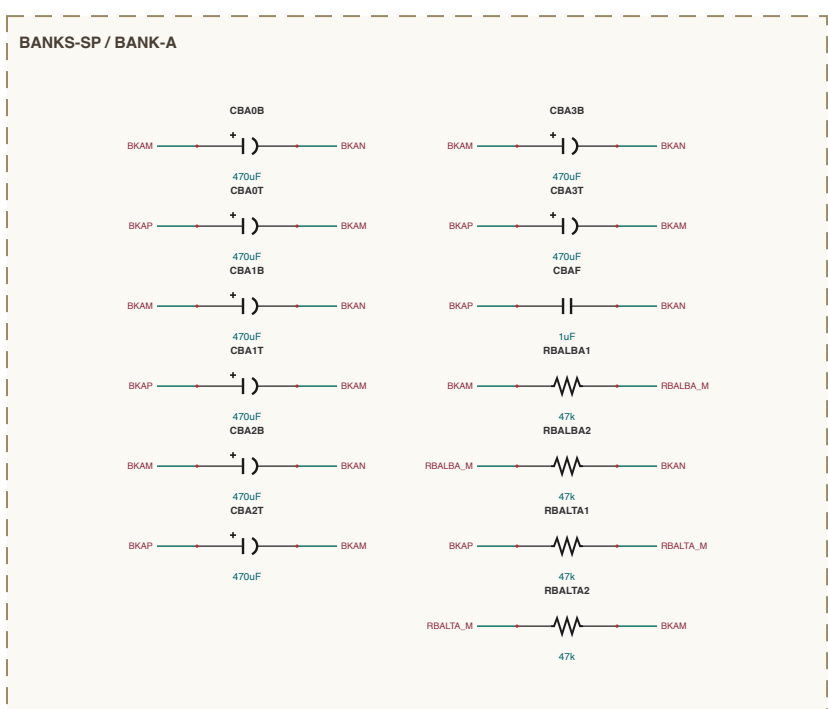
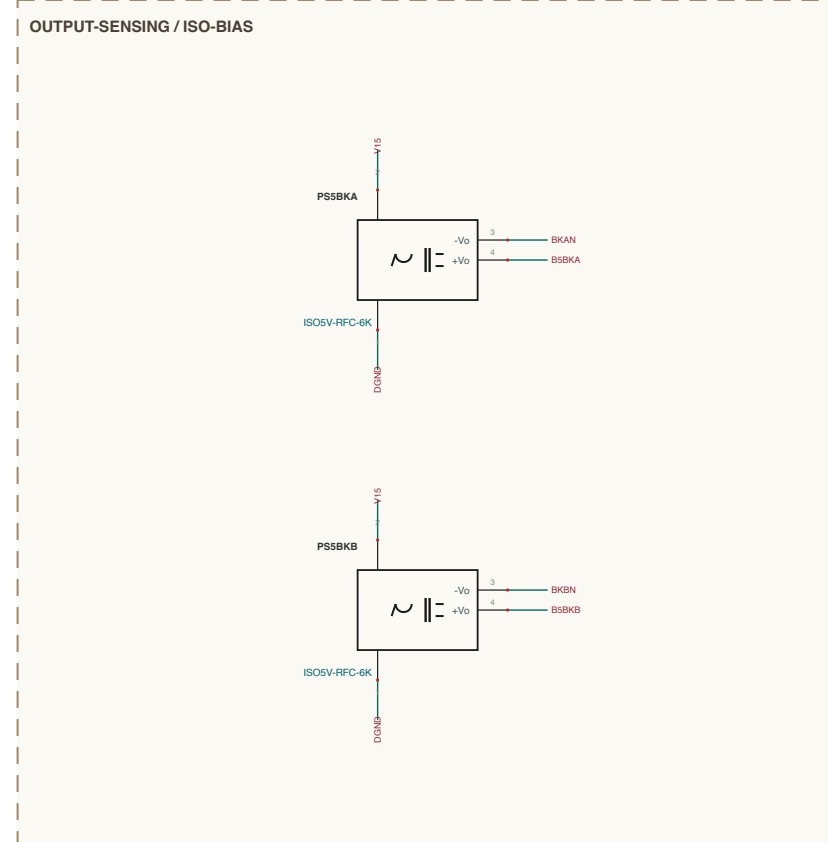
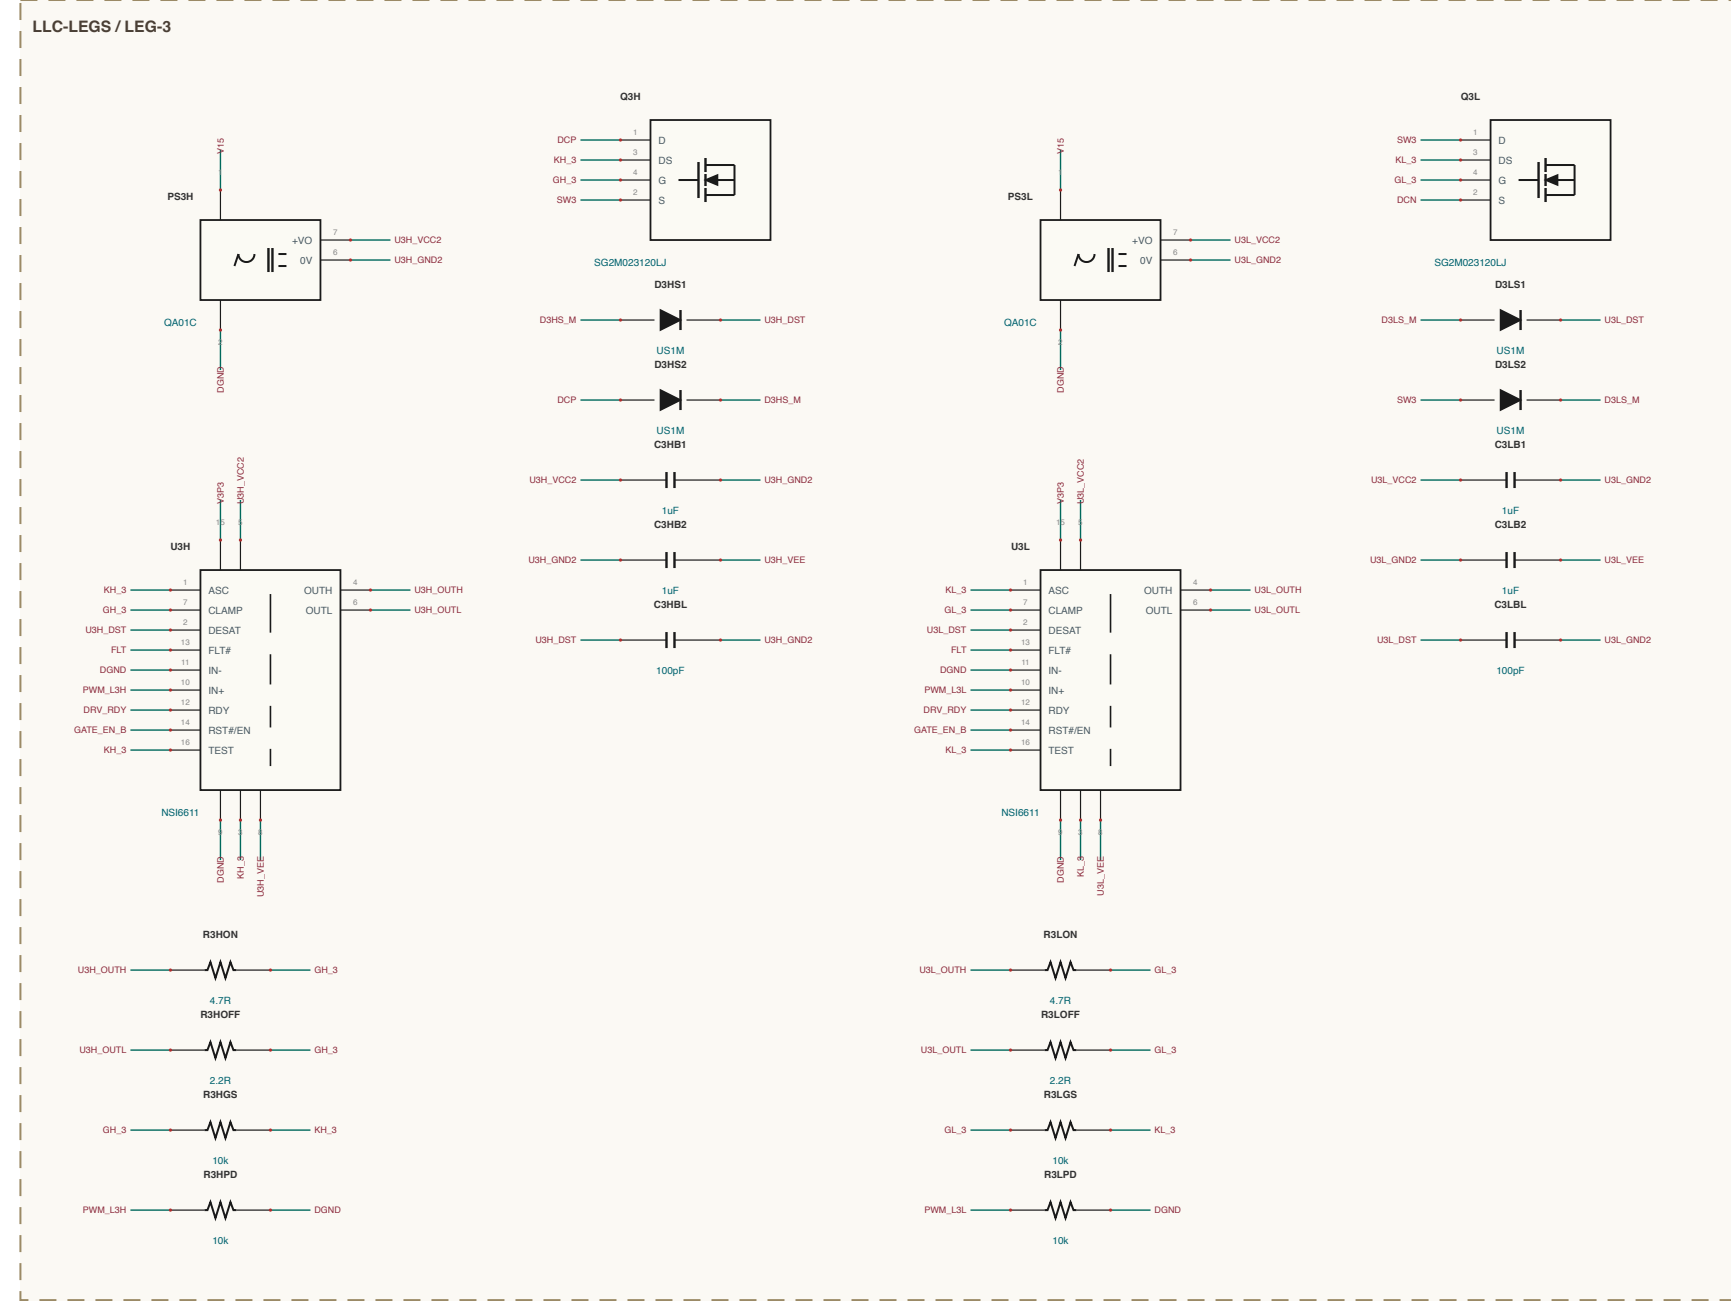
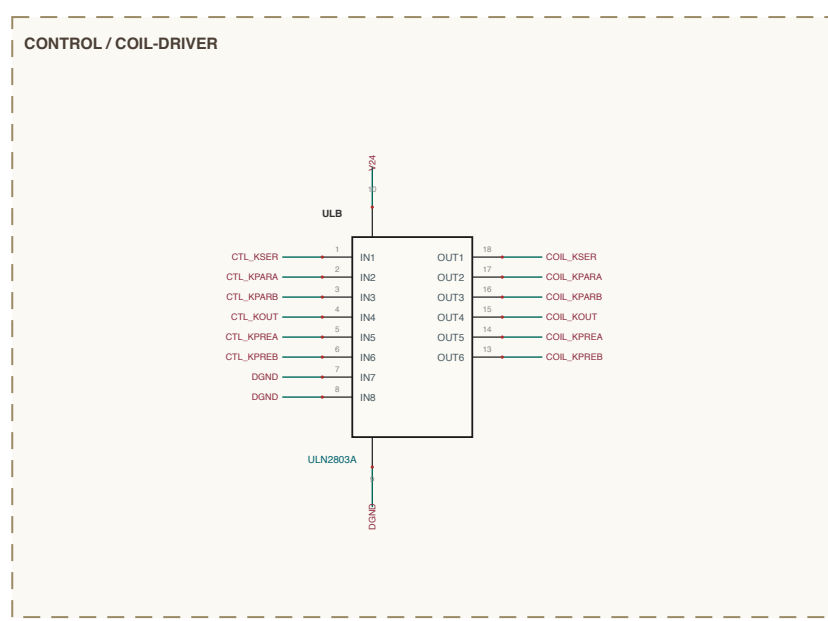
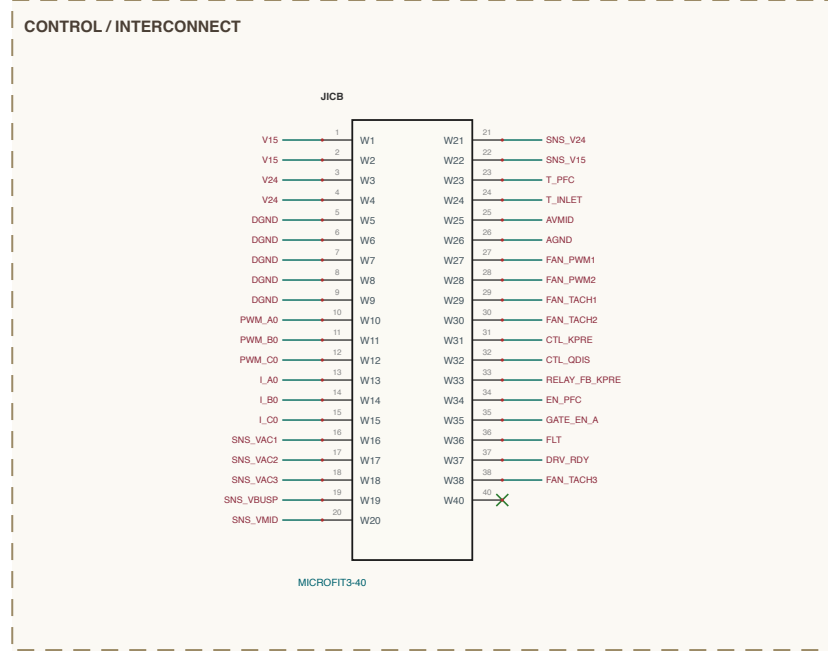
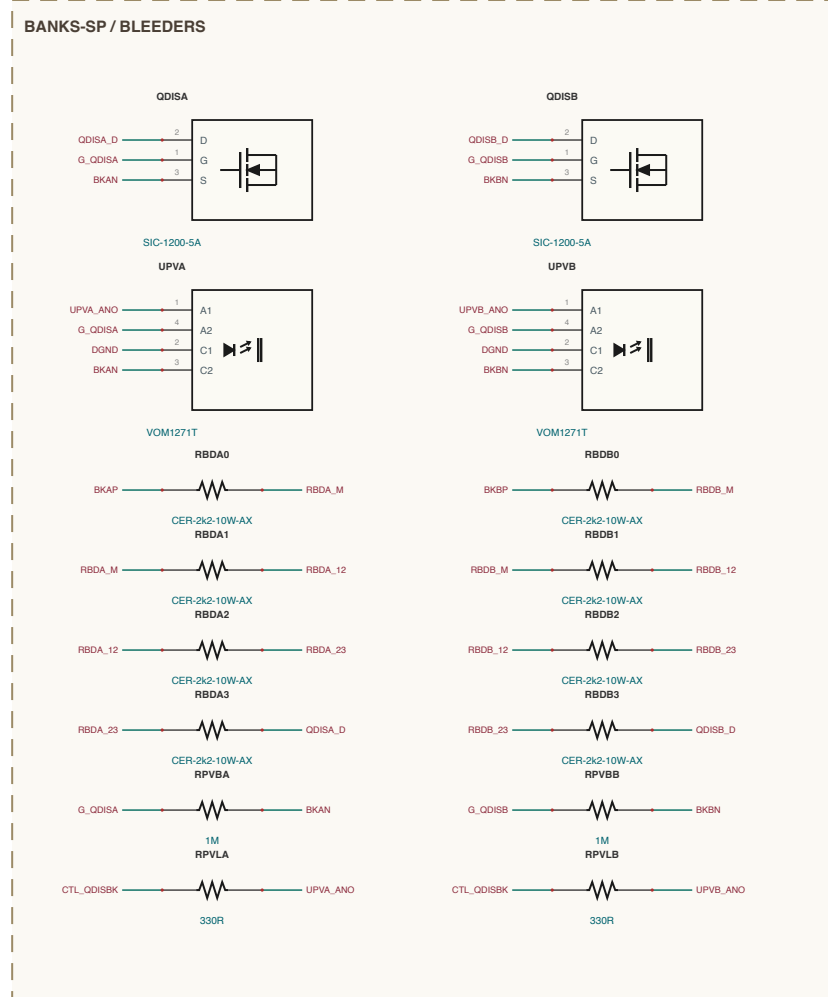


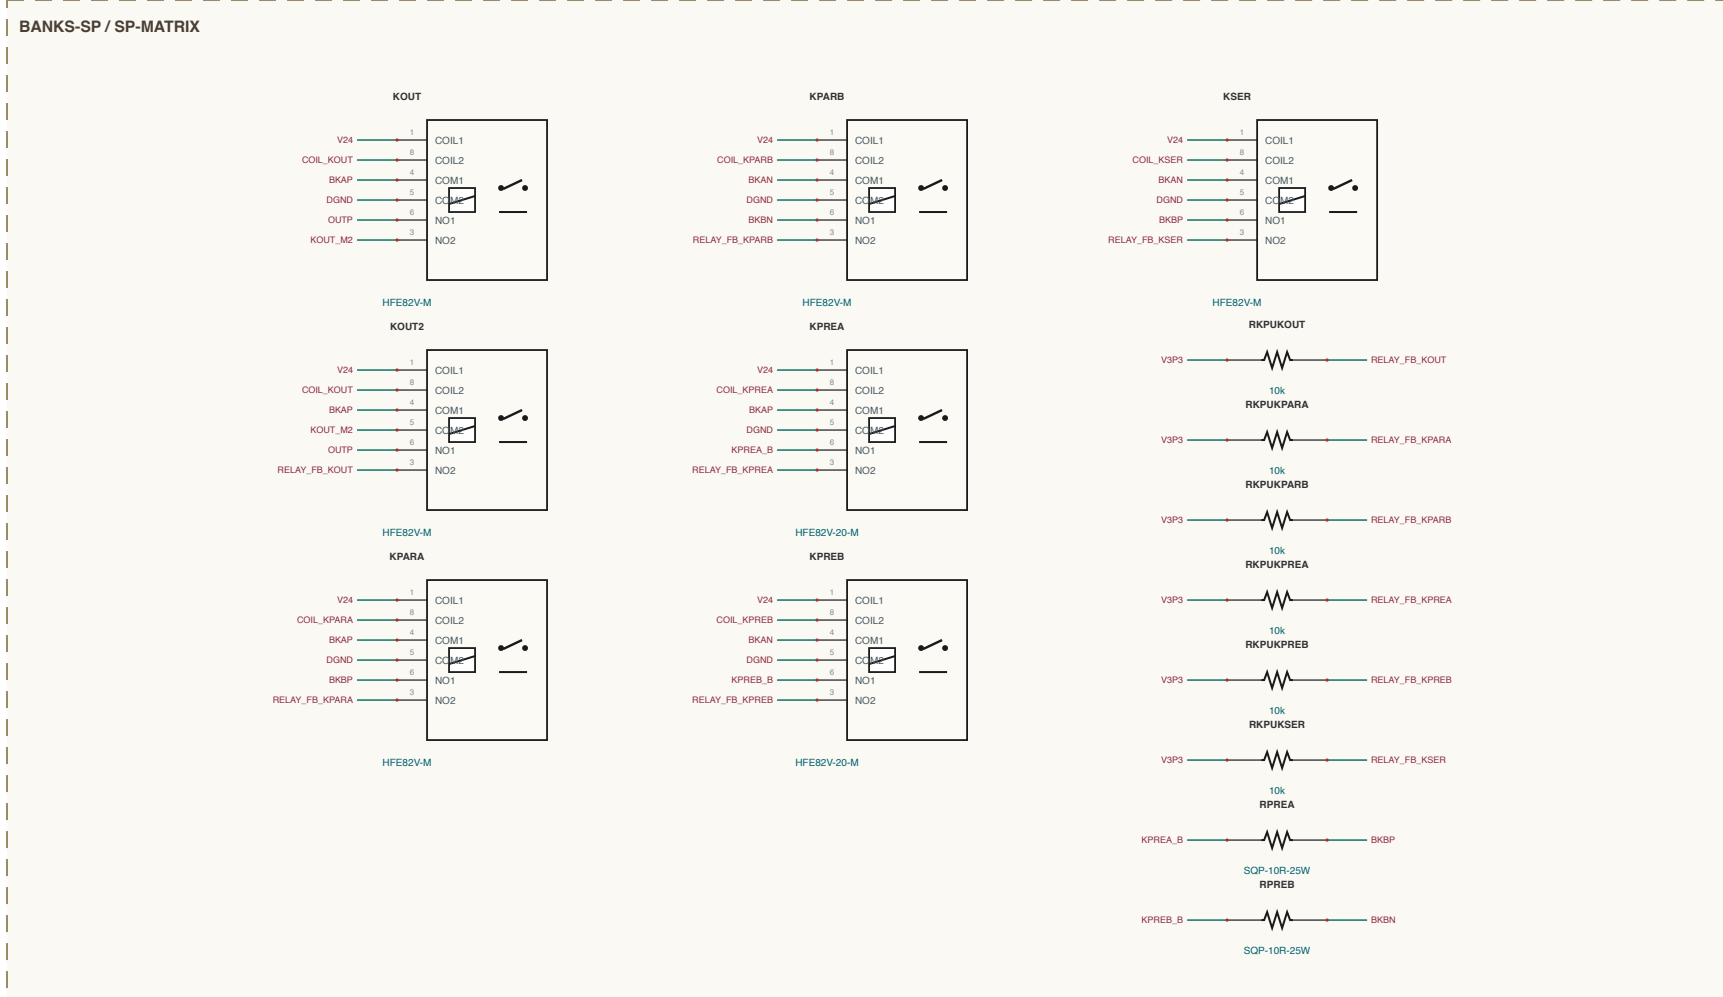

SHEET INDEX	
SW 7.1-7.2	
OUTPUT-SENSING - 6 sections	
BANKS-SP - 4 sections	
LLC-LEG8 - 4 sections	
CONTROL - 3 sections	
LLC-TANKS - 3 sections	
COMMS-HMI - 2 sections	
rev 0.1 - 22 sections - 399 components	
NET NAMING	
Internal junctions are named for what they join	
Useful: JPNs node at that IC pin e.g. UPV0A_VBP	
Resistor: M midpoint of a series pair e.g. RBAC1A_M	
Resistor: vvvv-xxx-yyy between Resistorv and e.g. PPT02_01	
All others are explicit design nets	