

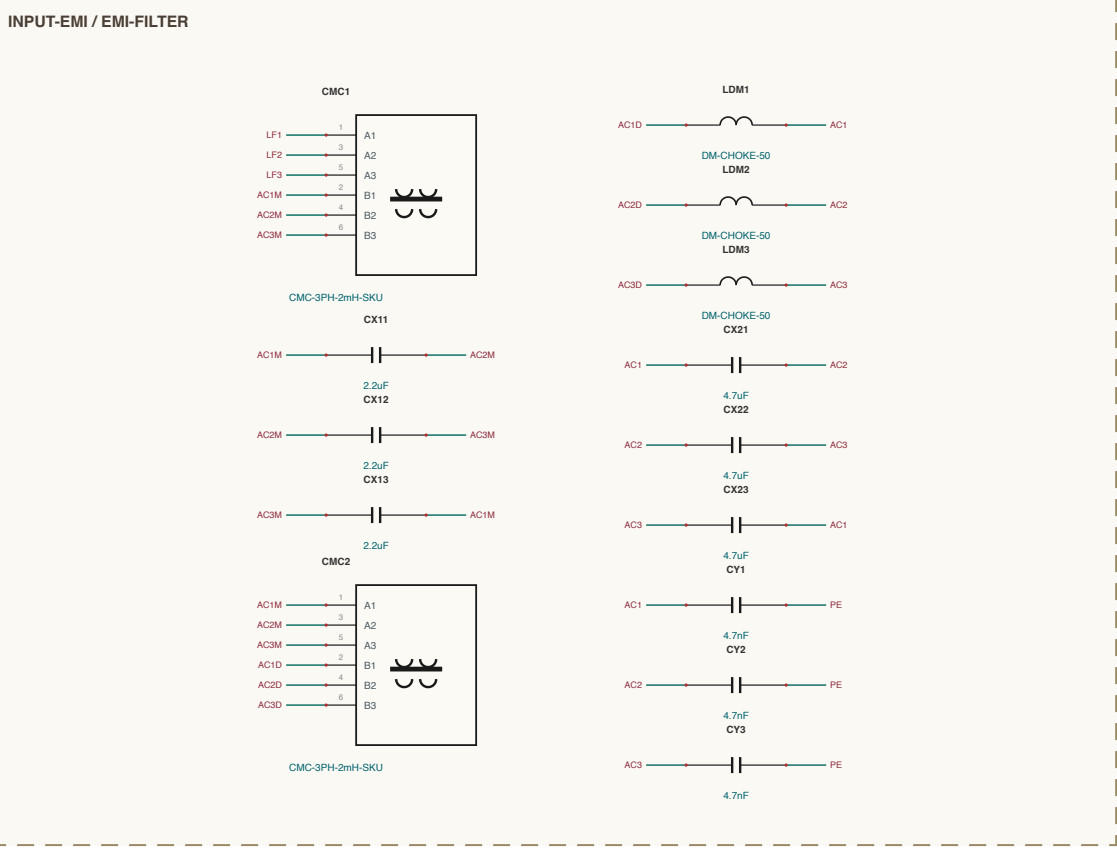
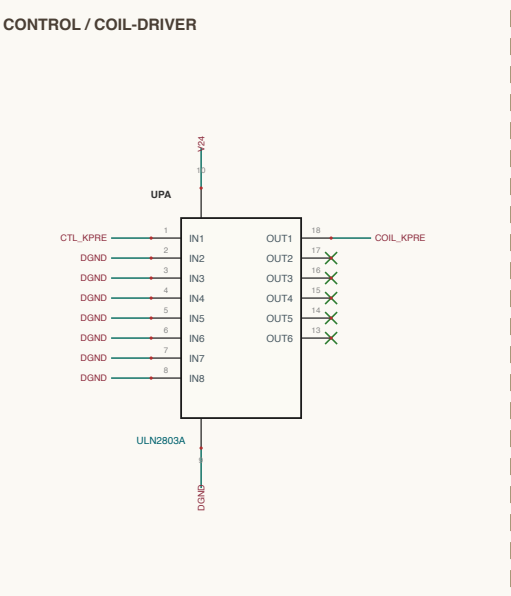
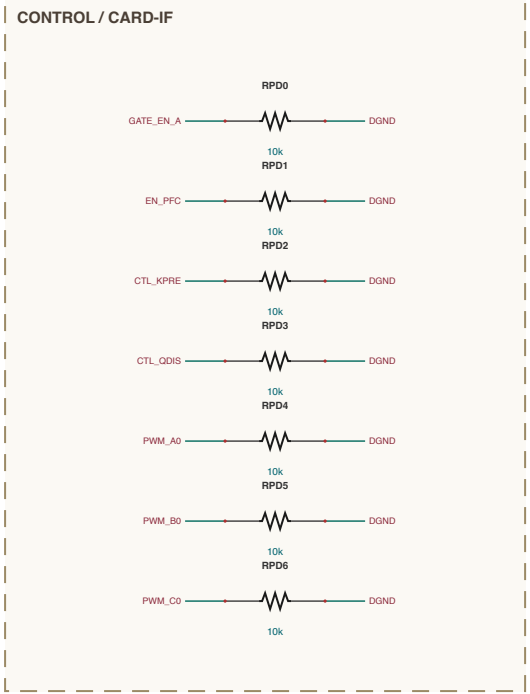
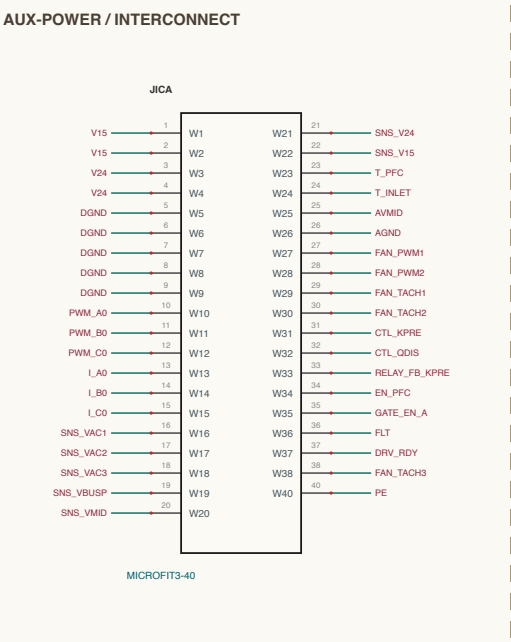
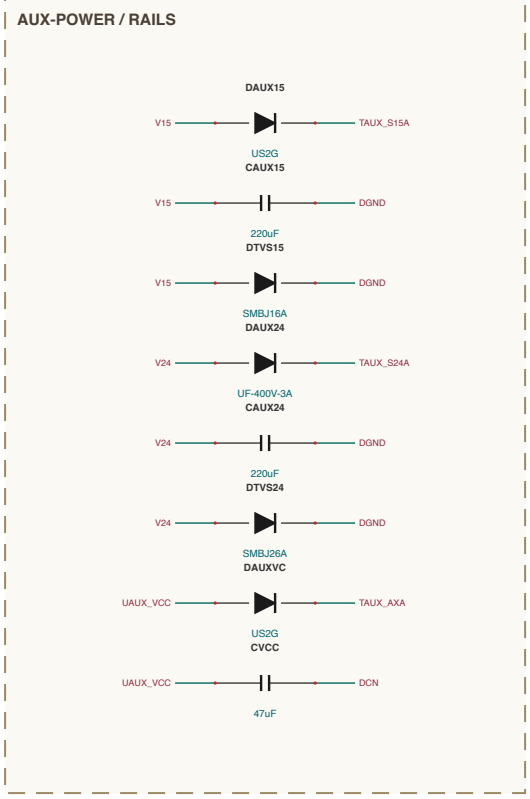
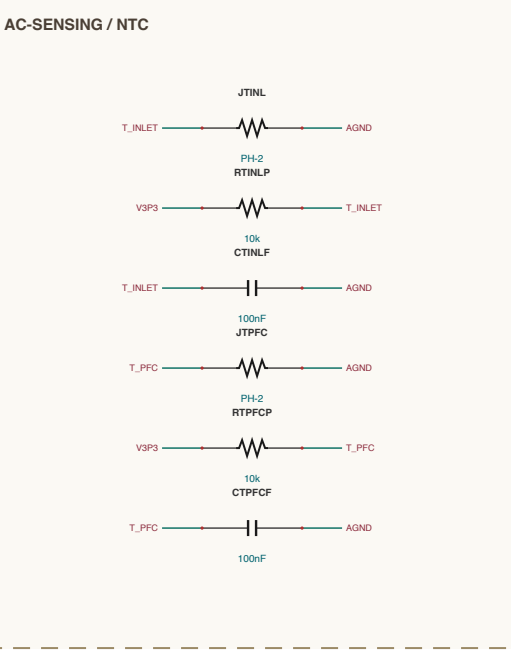
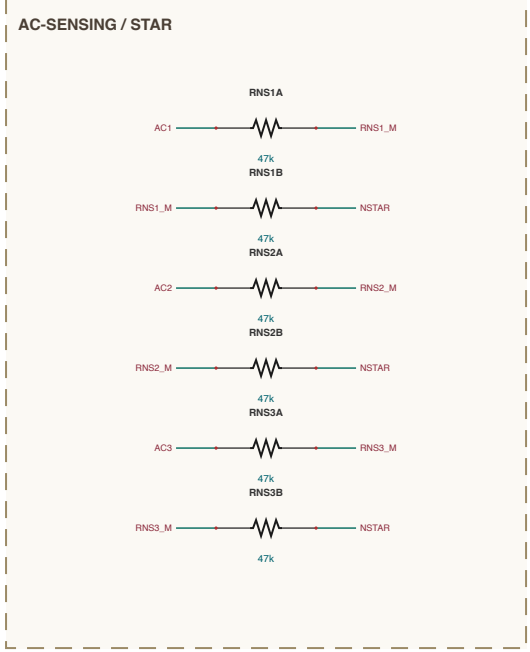
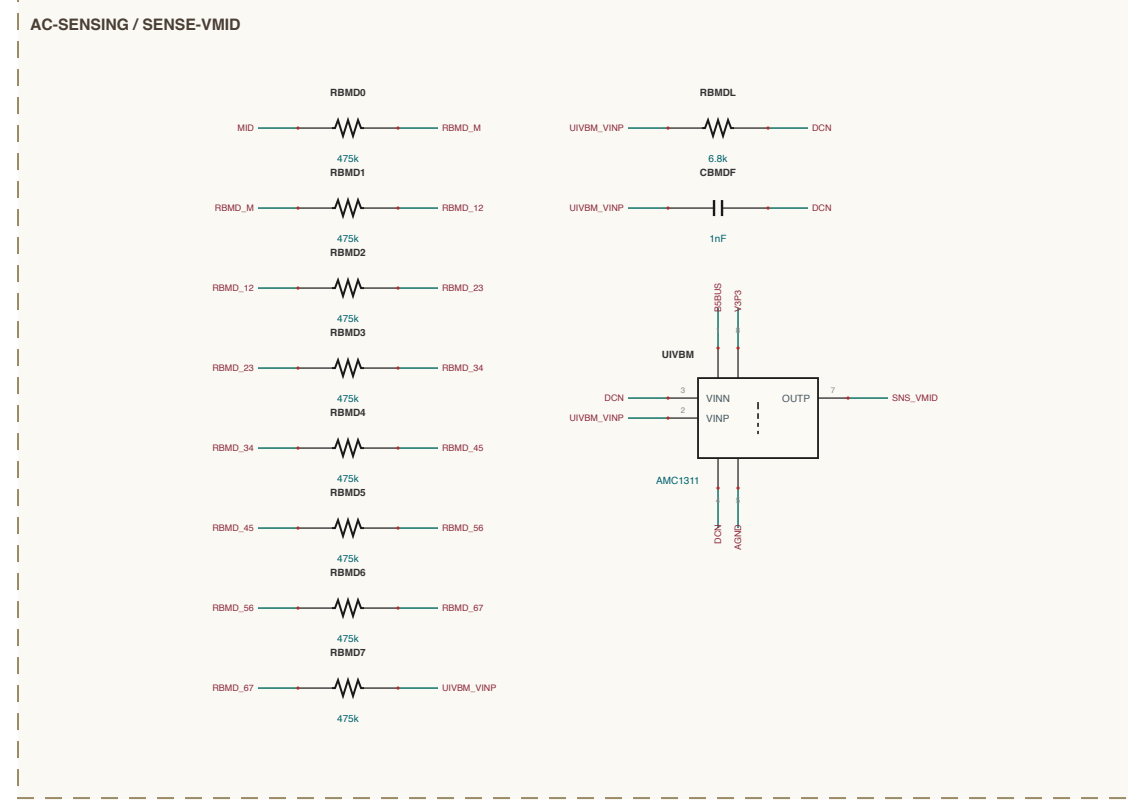
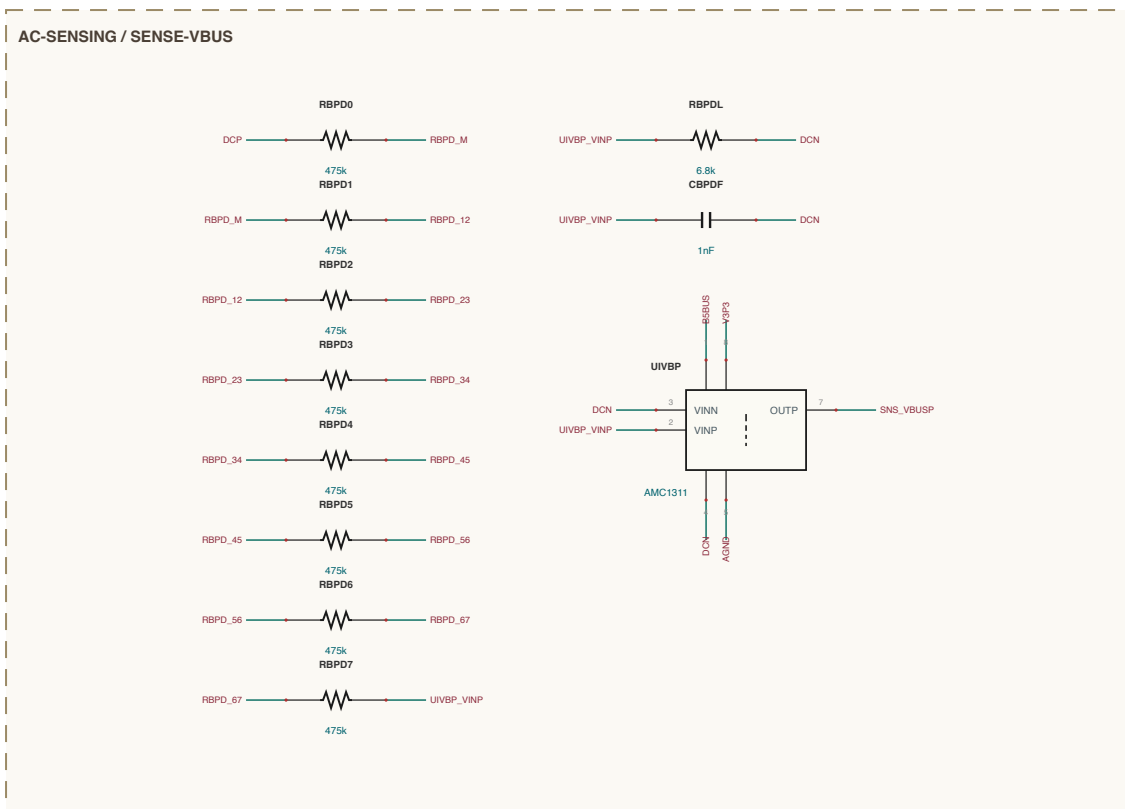
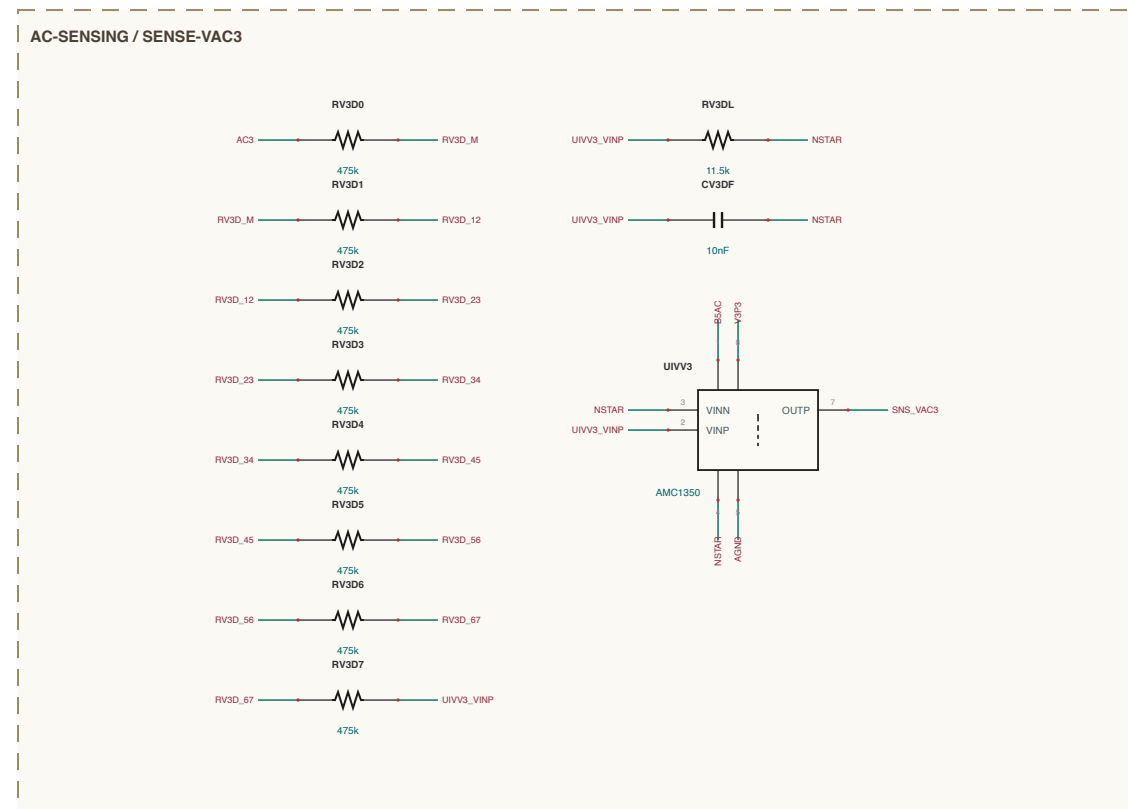
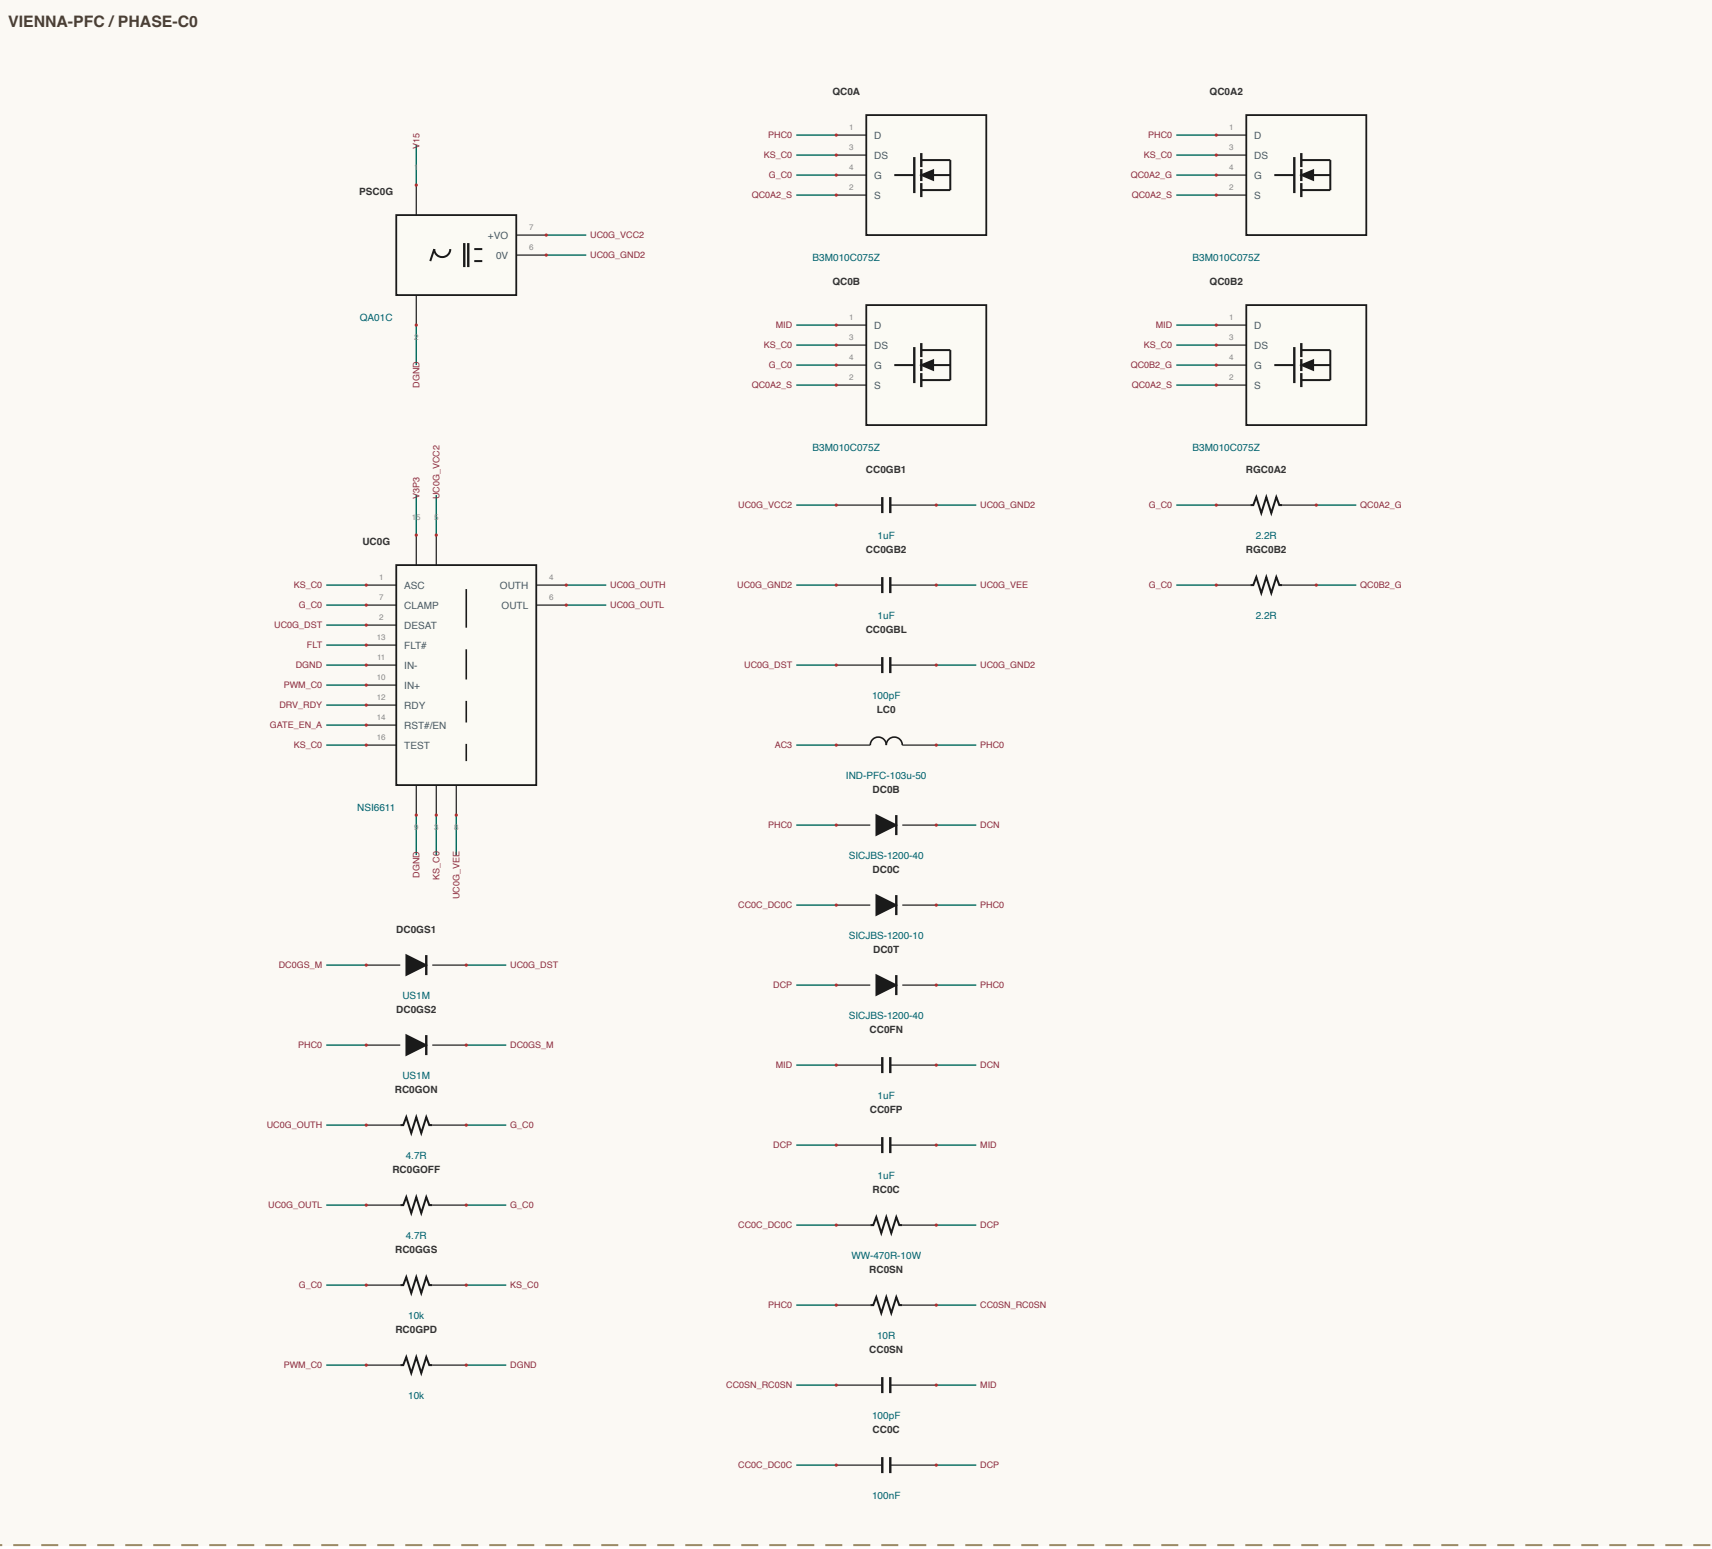
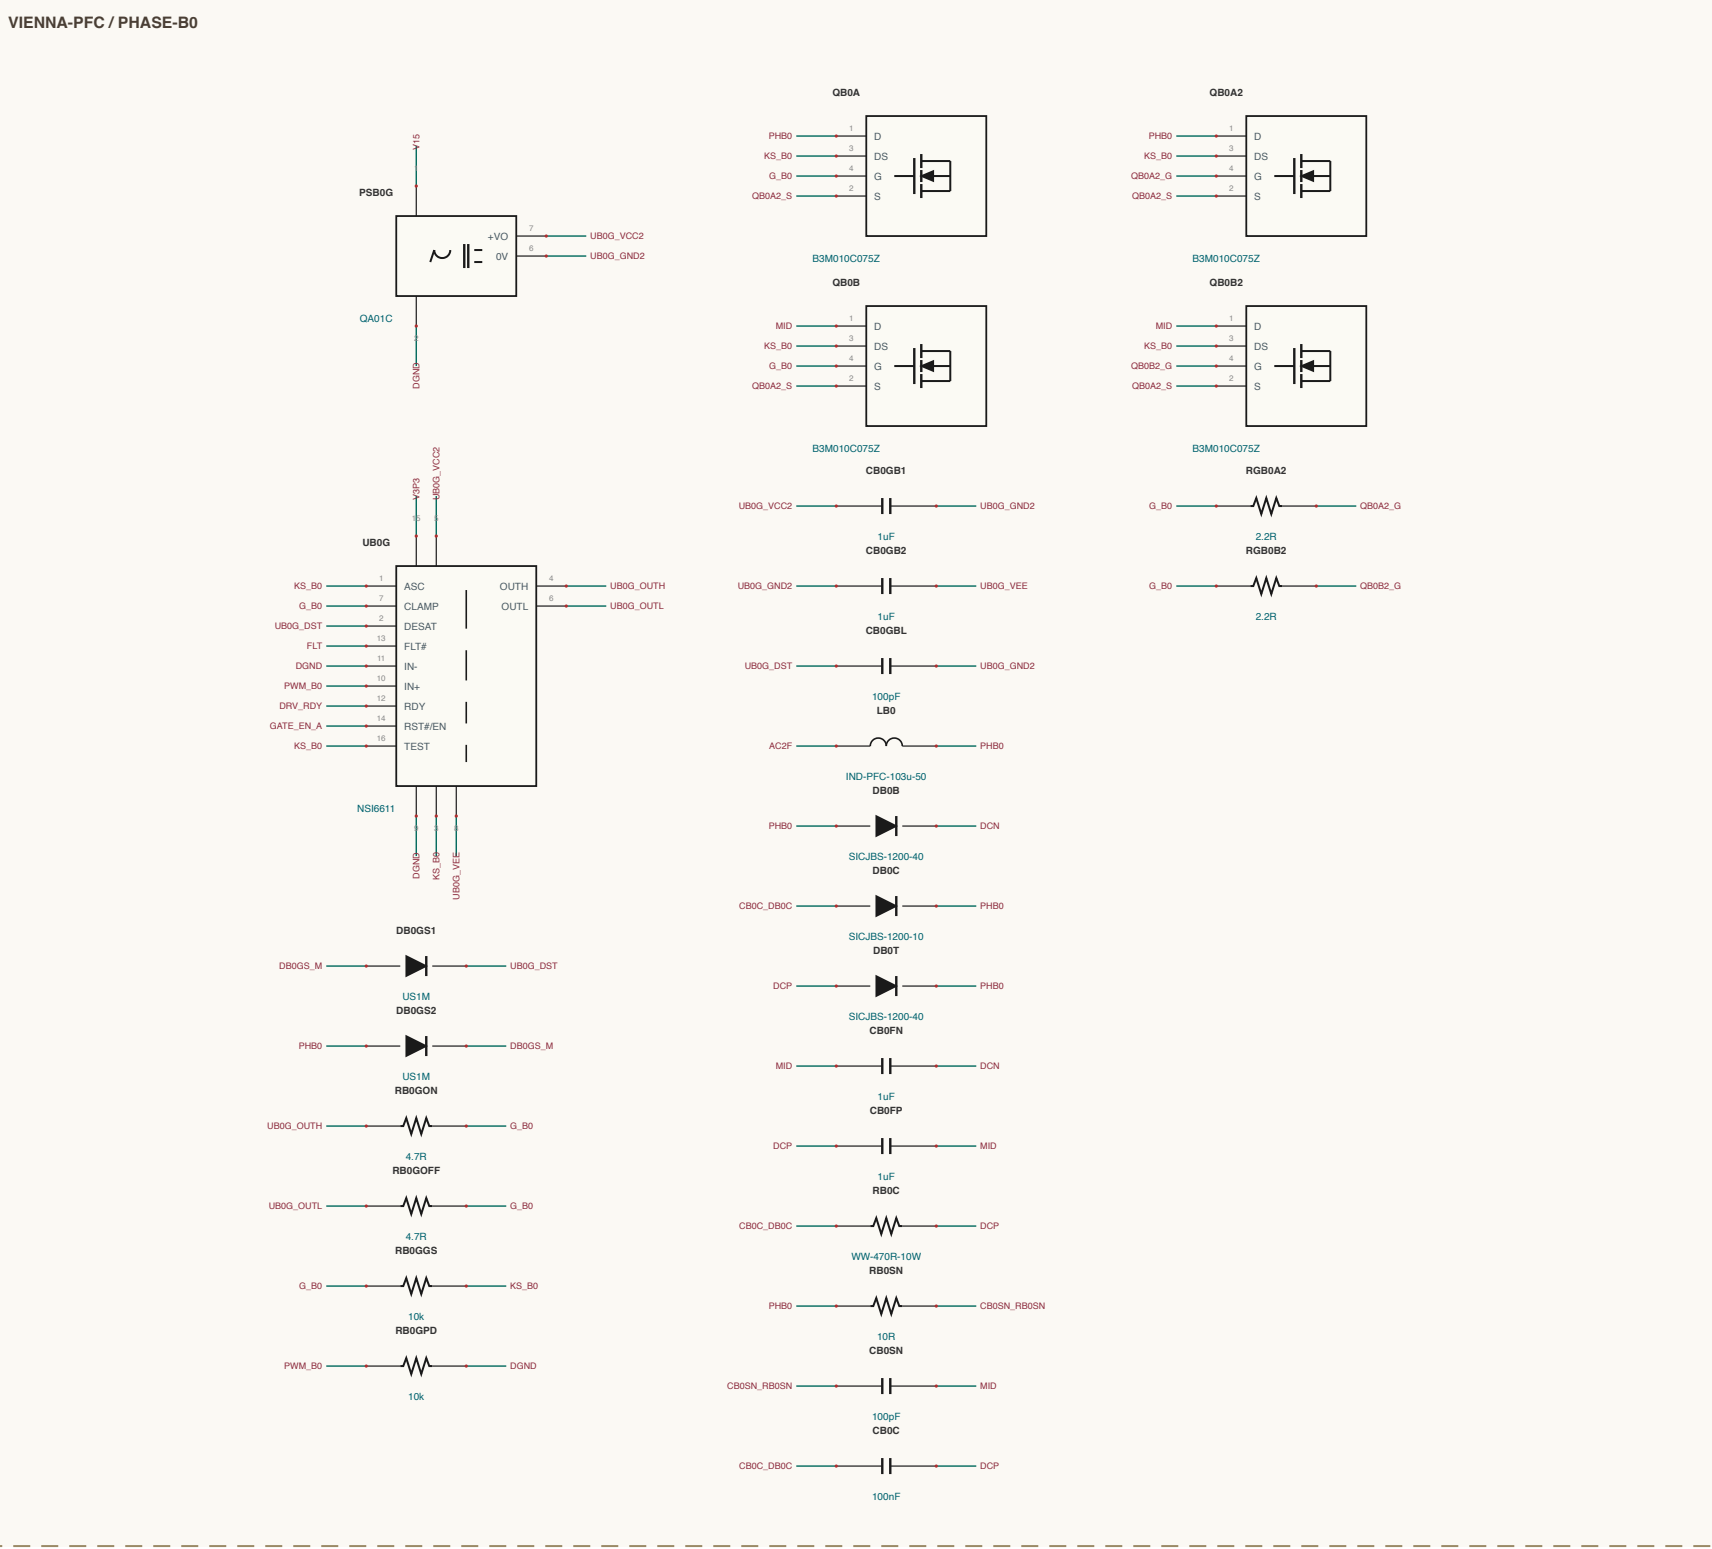
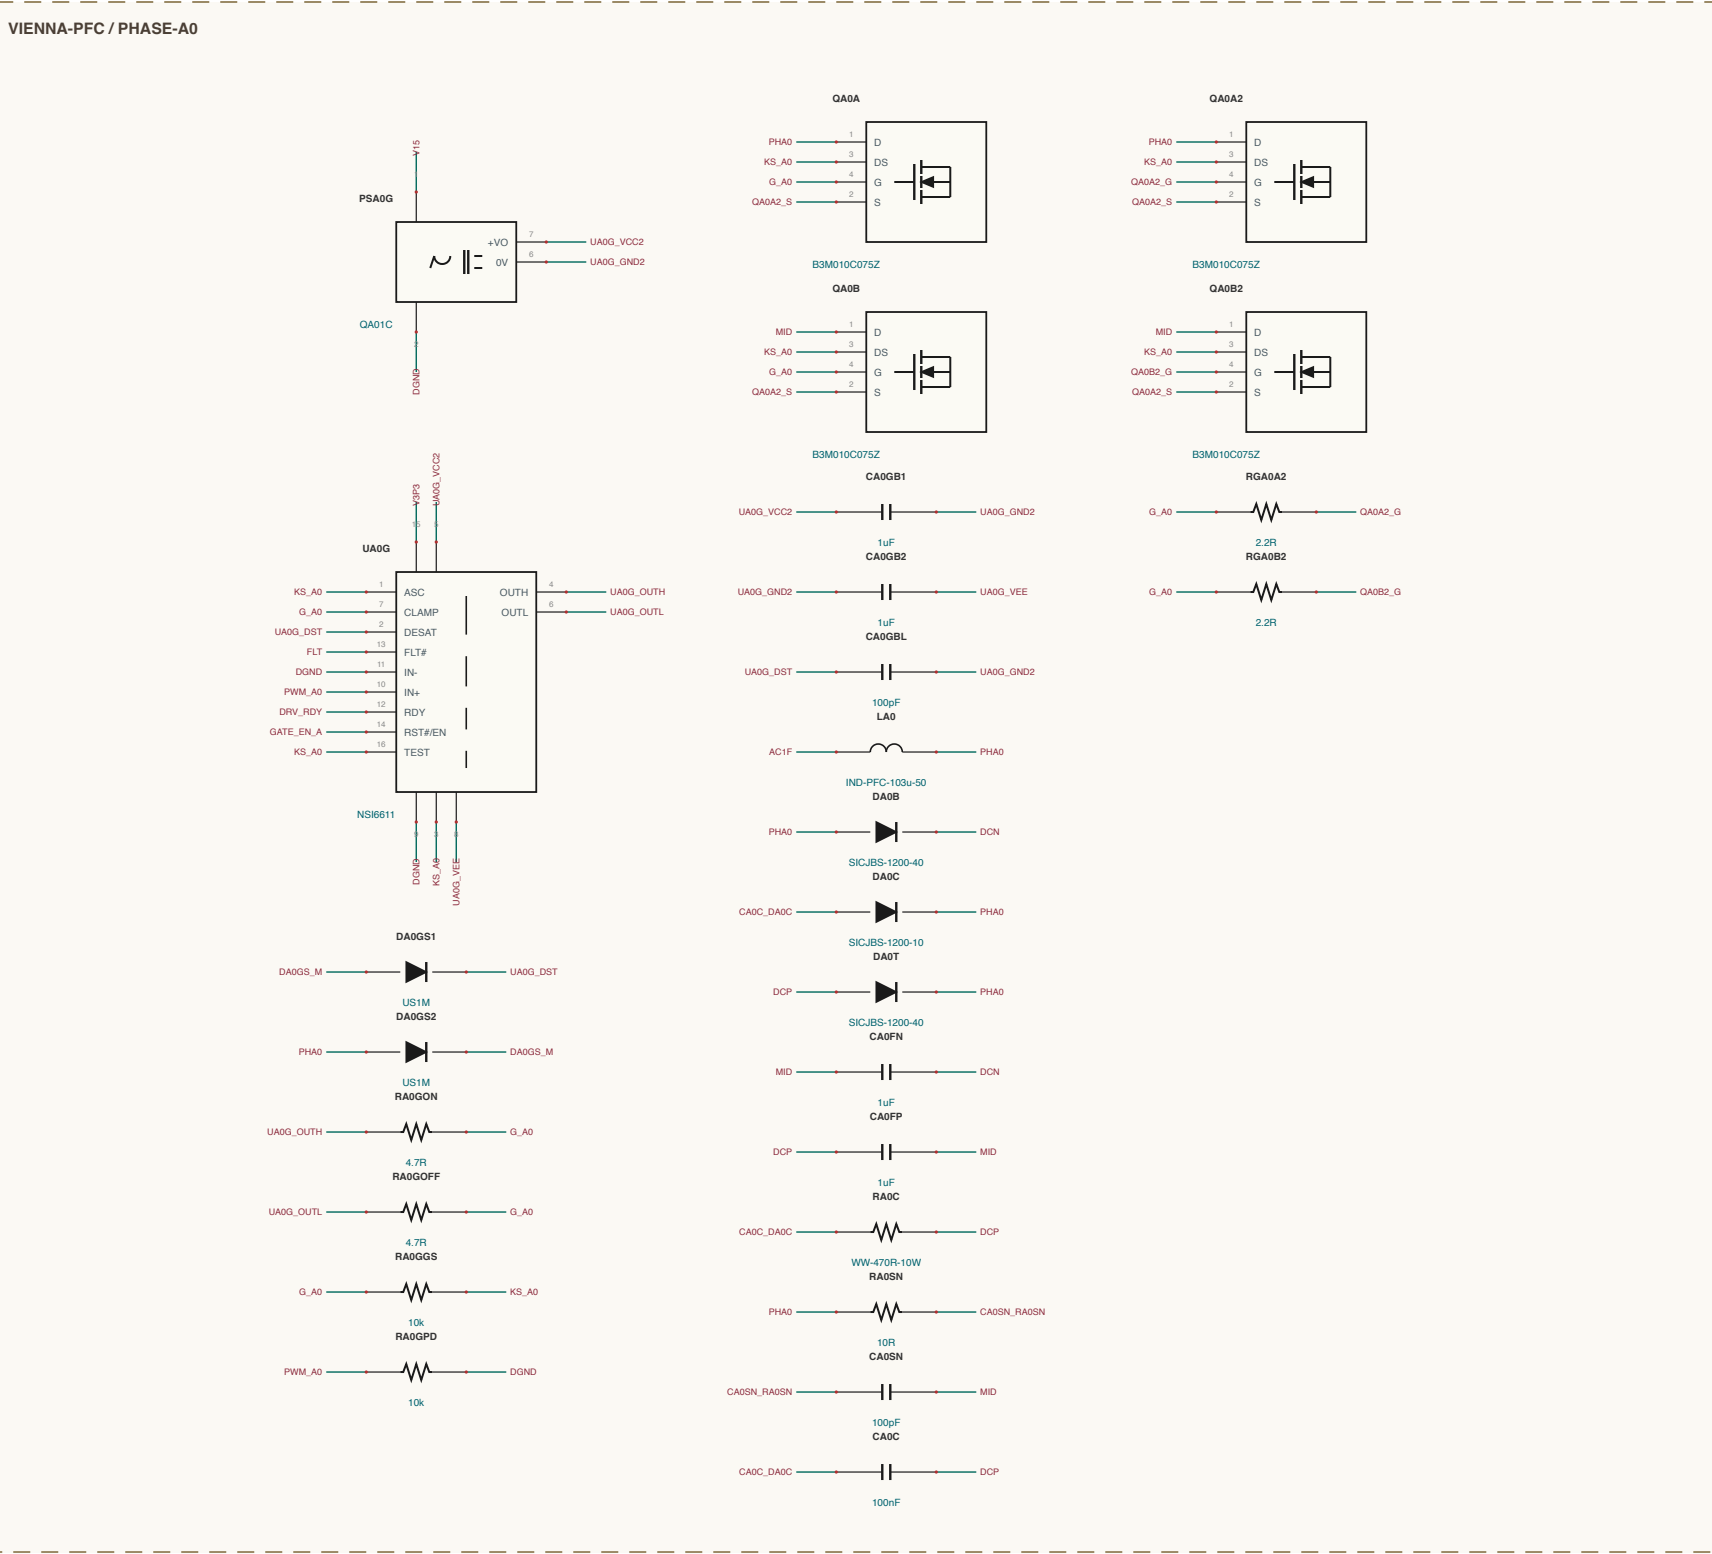
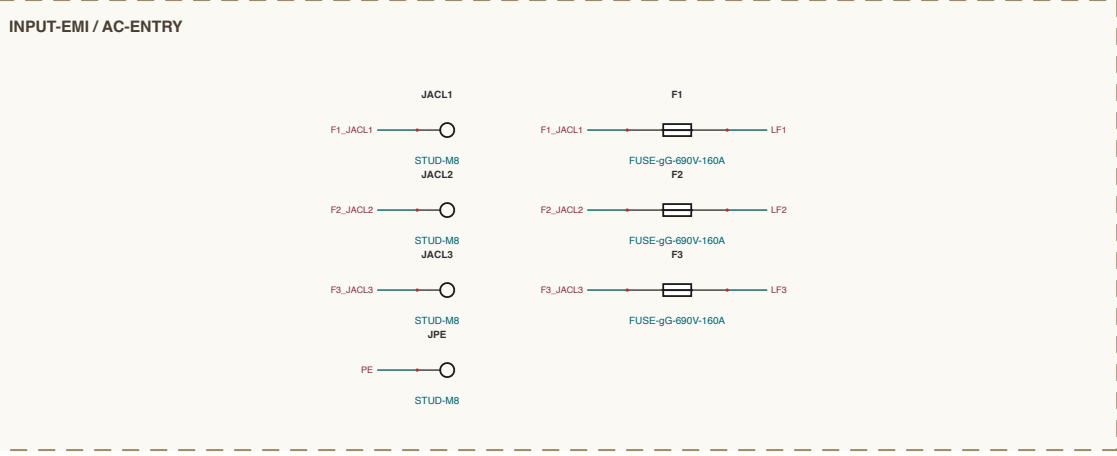
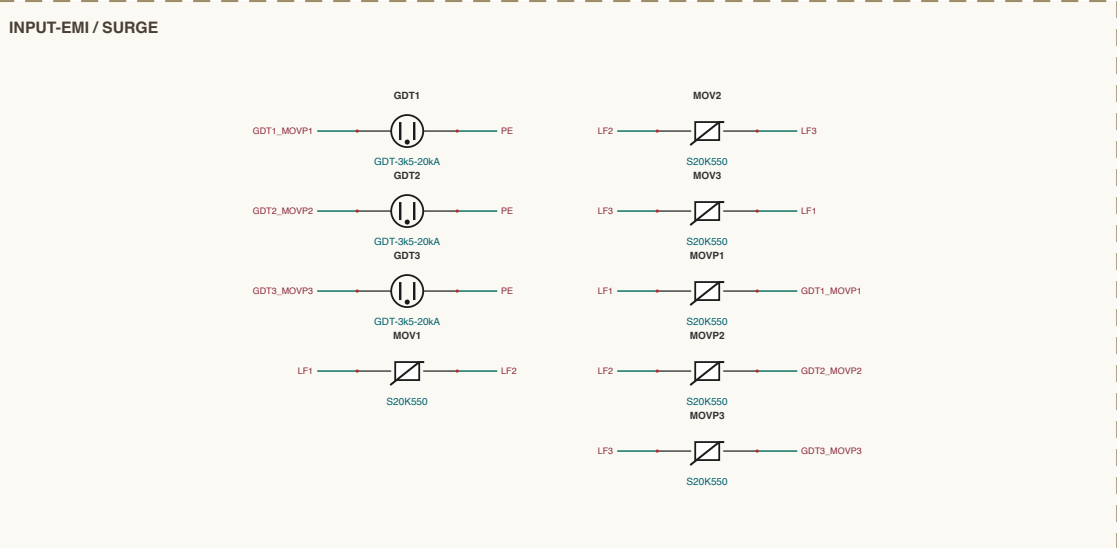
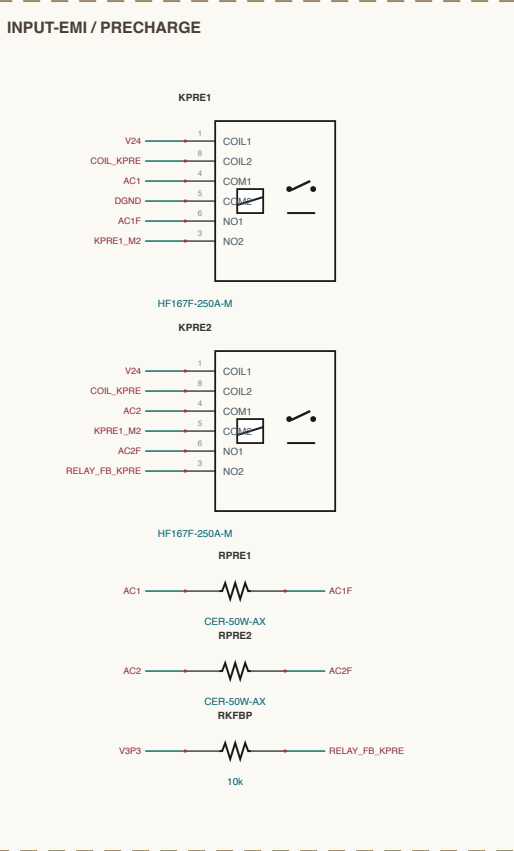
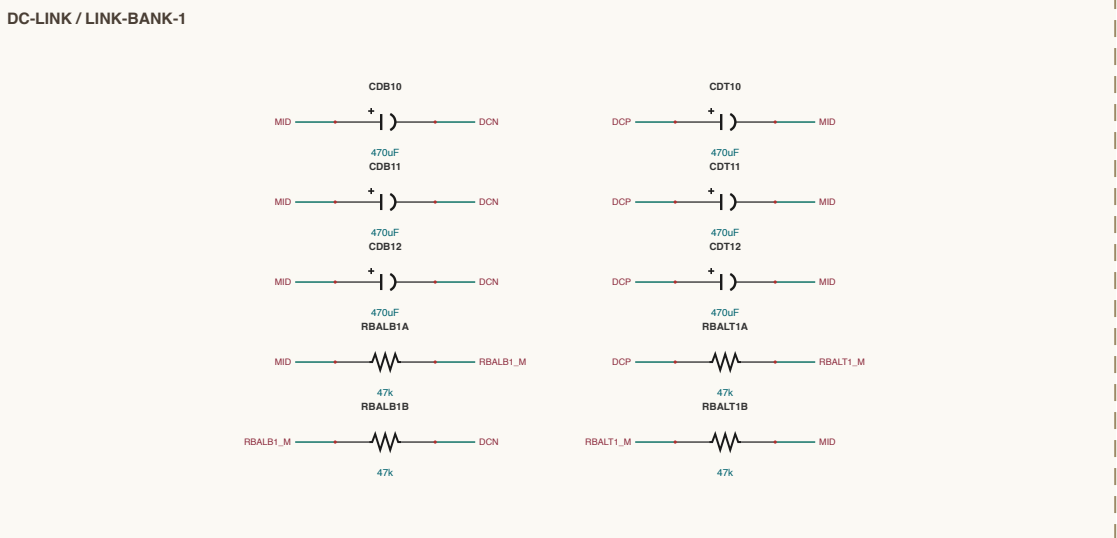
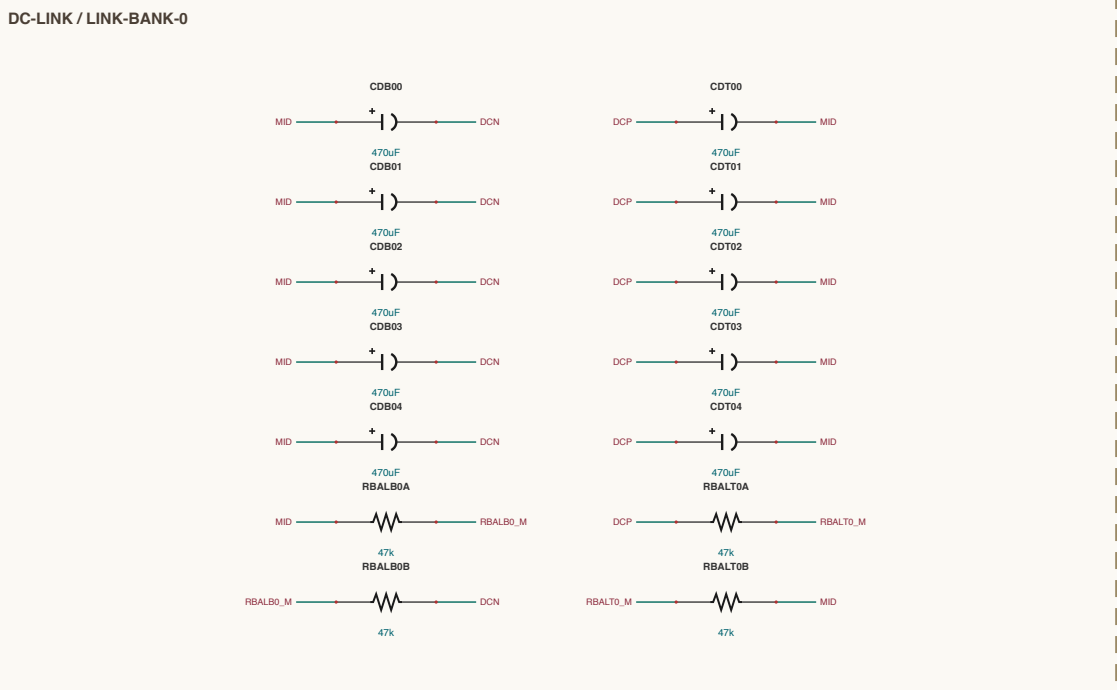
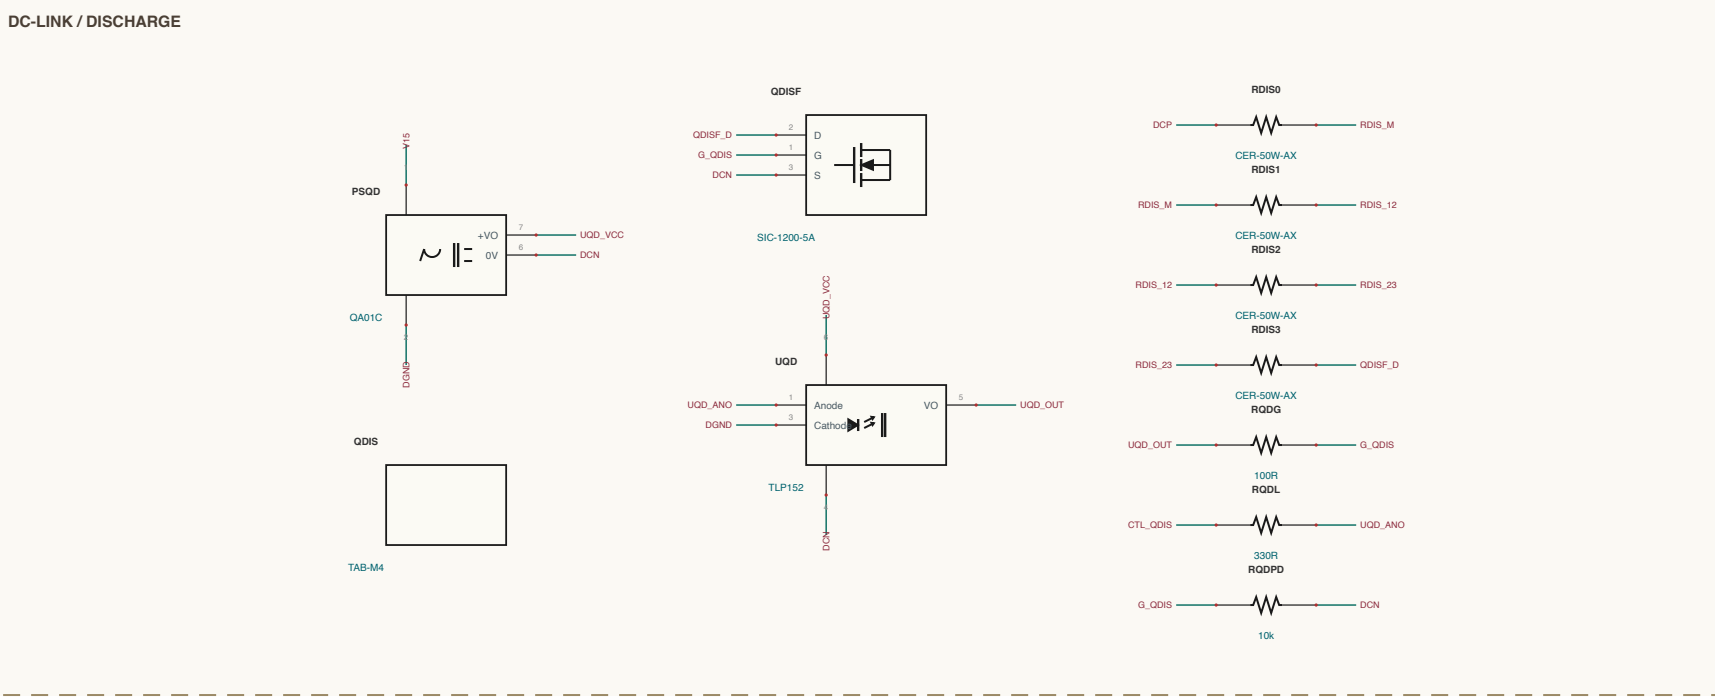
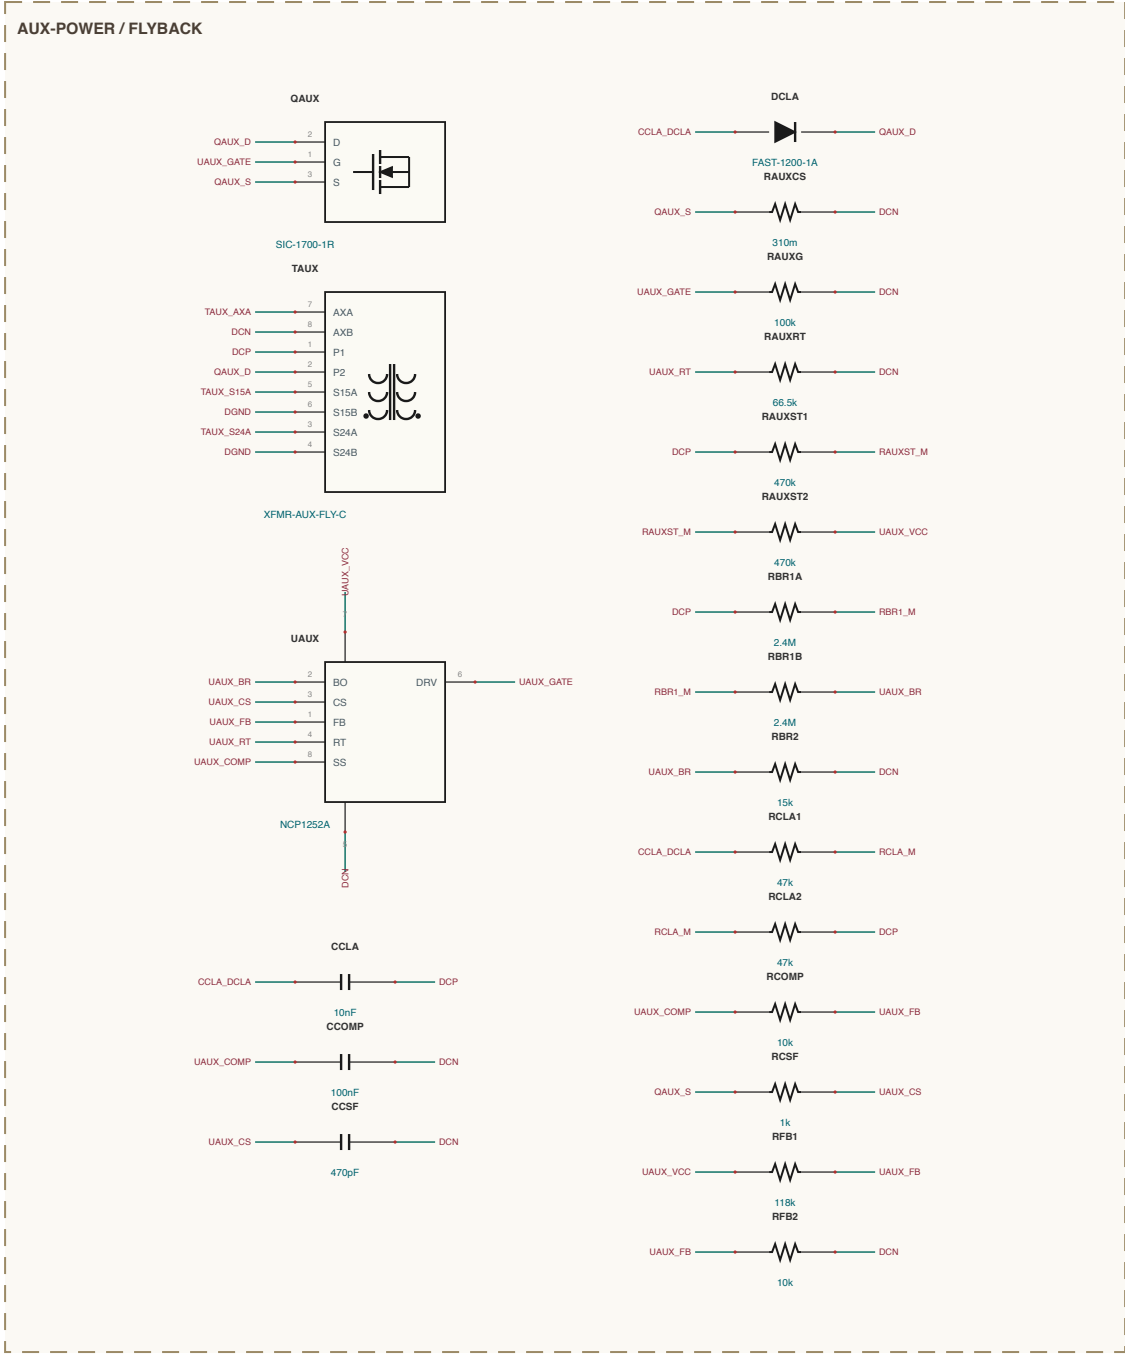
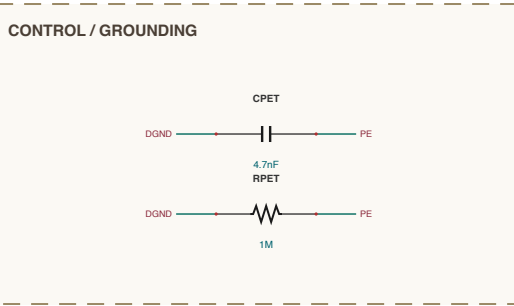
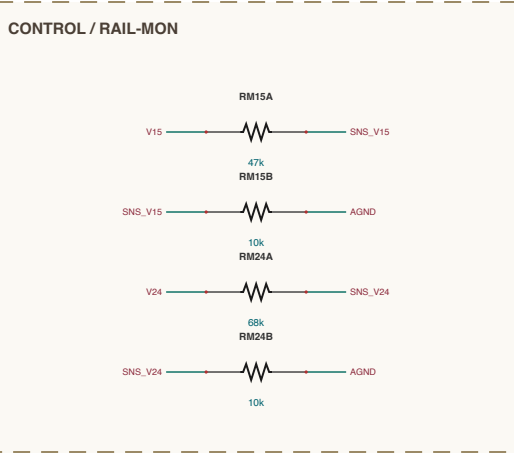
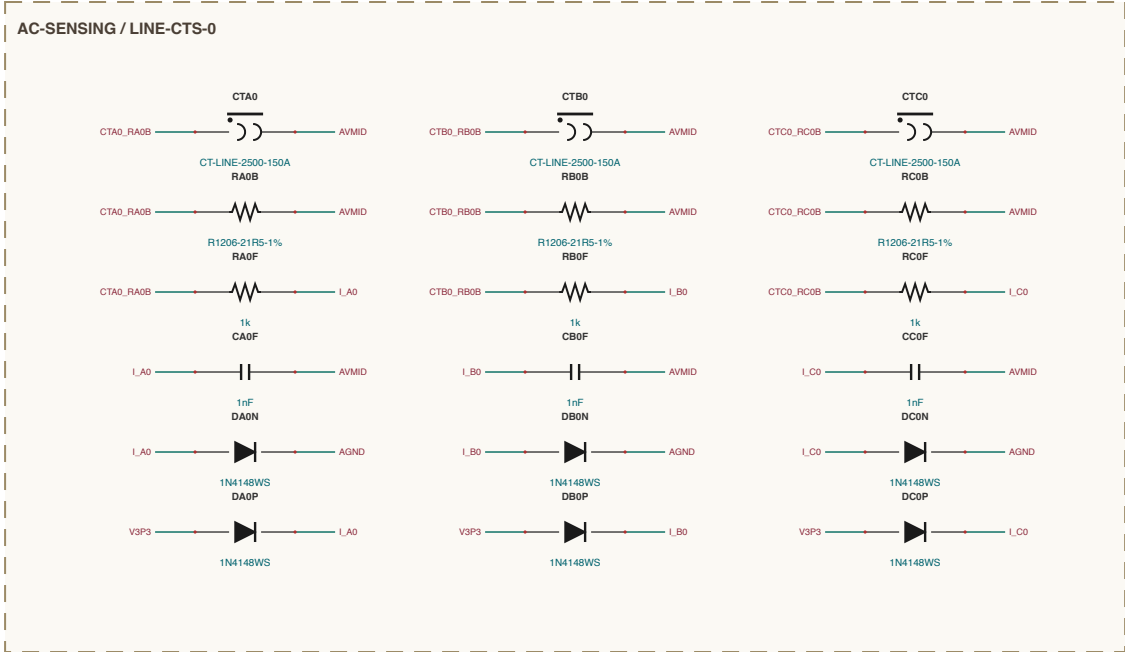
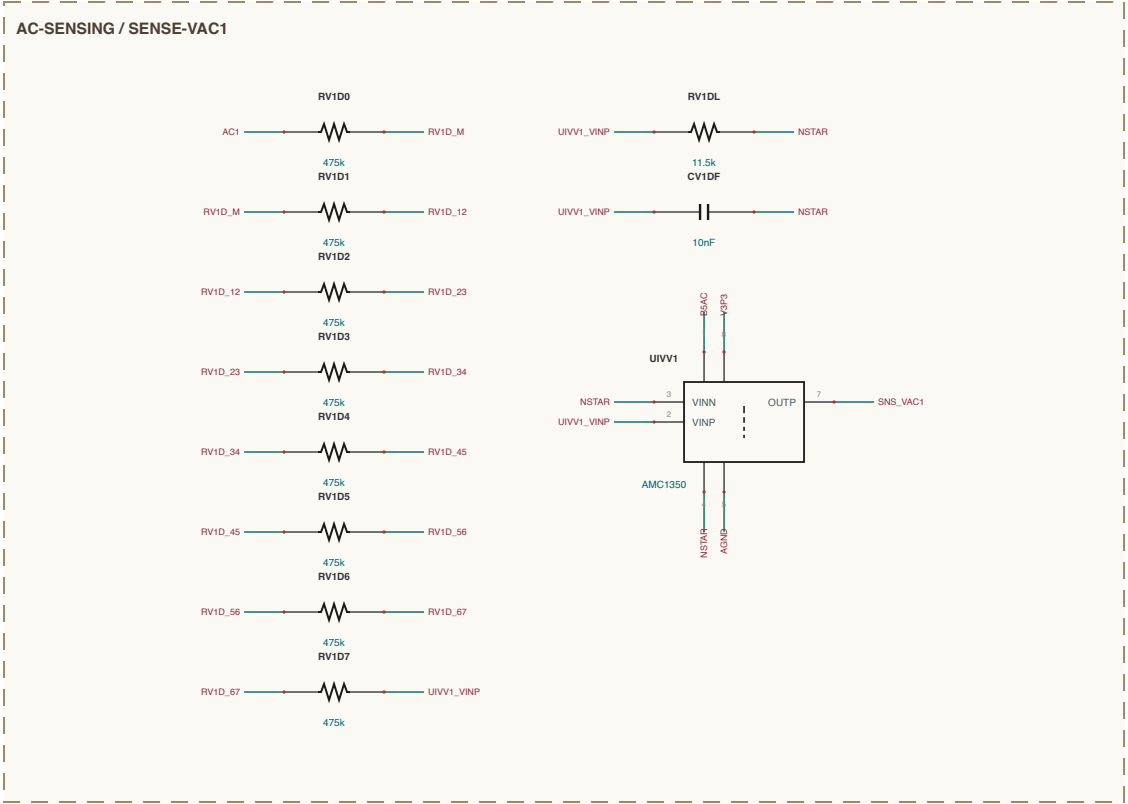
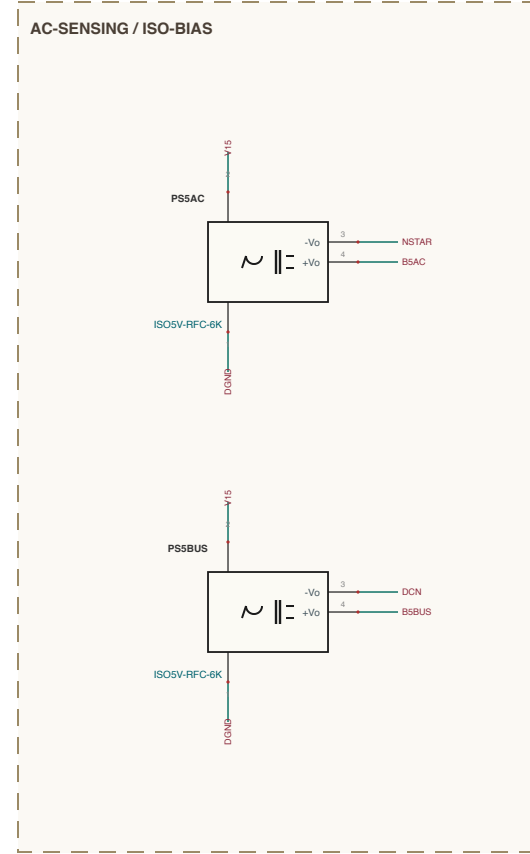
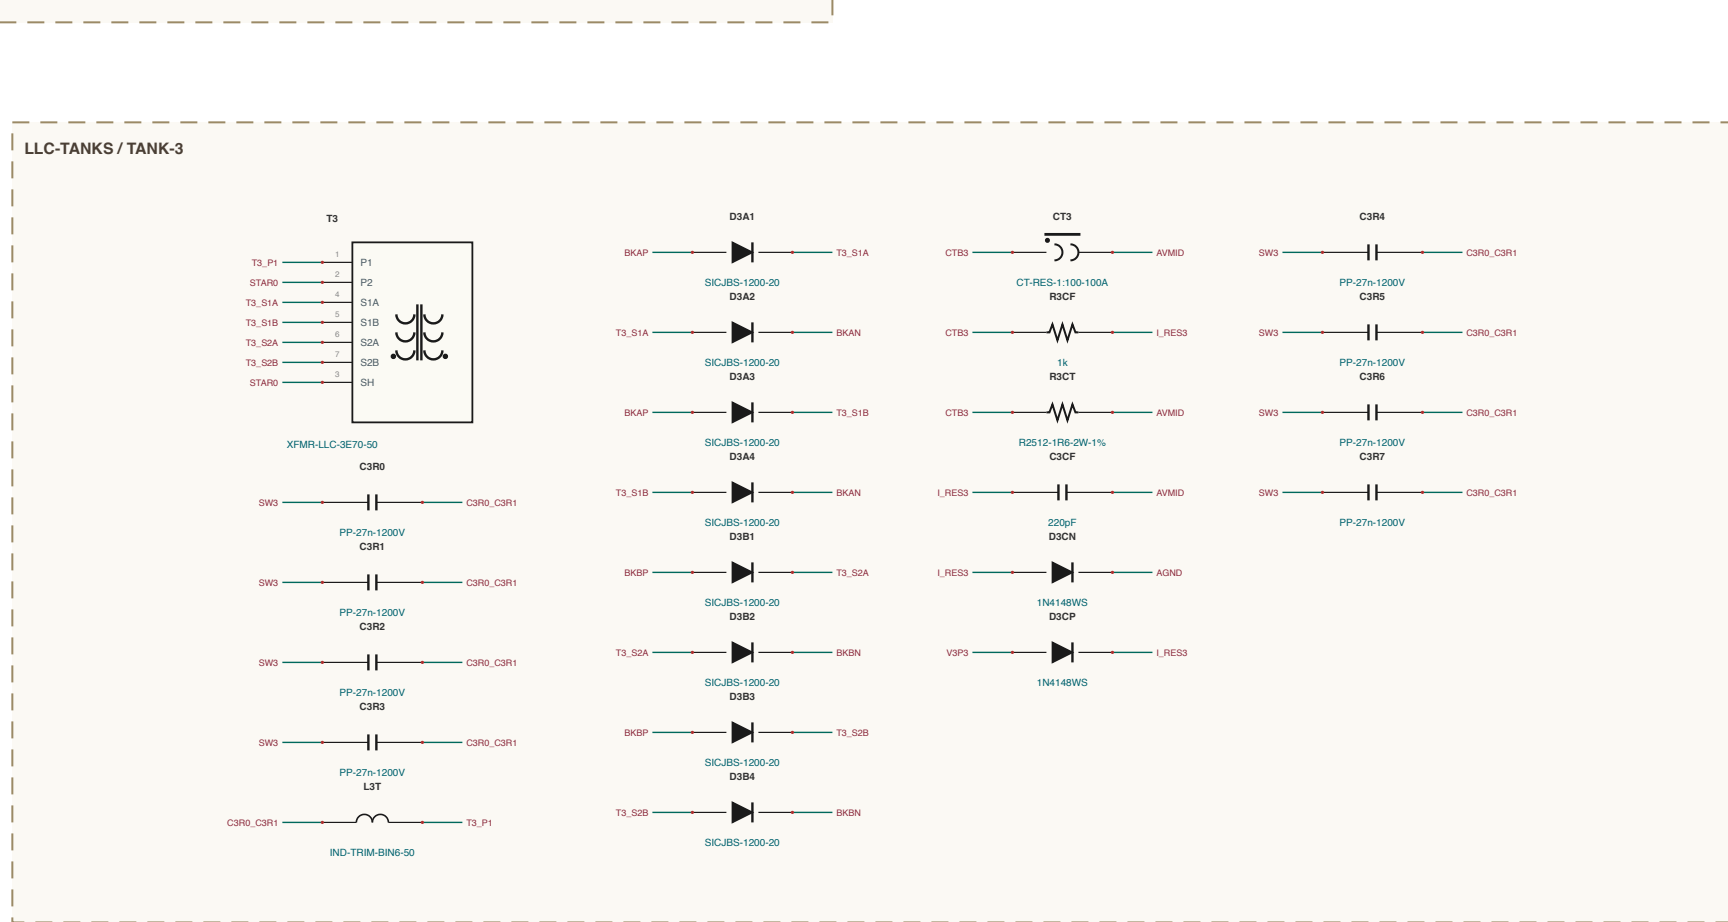
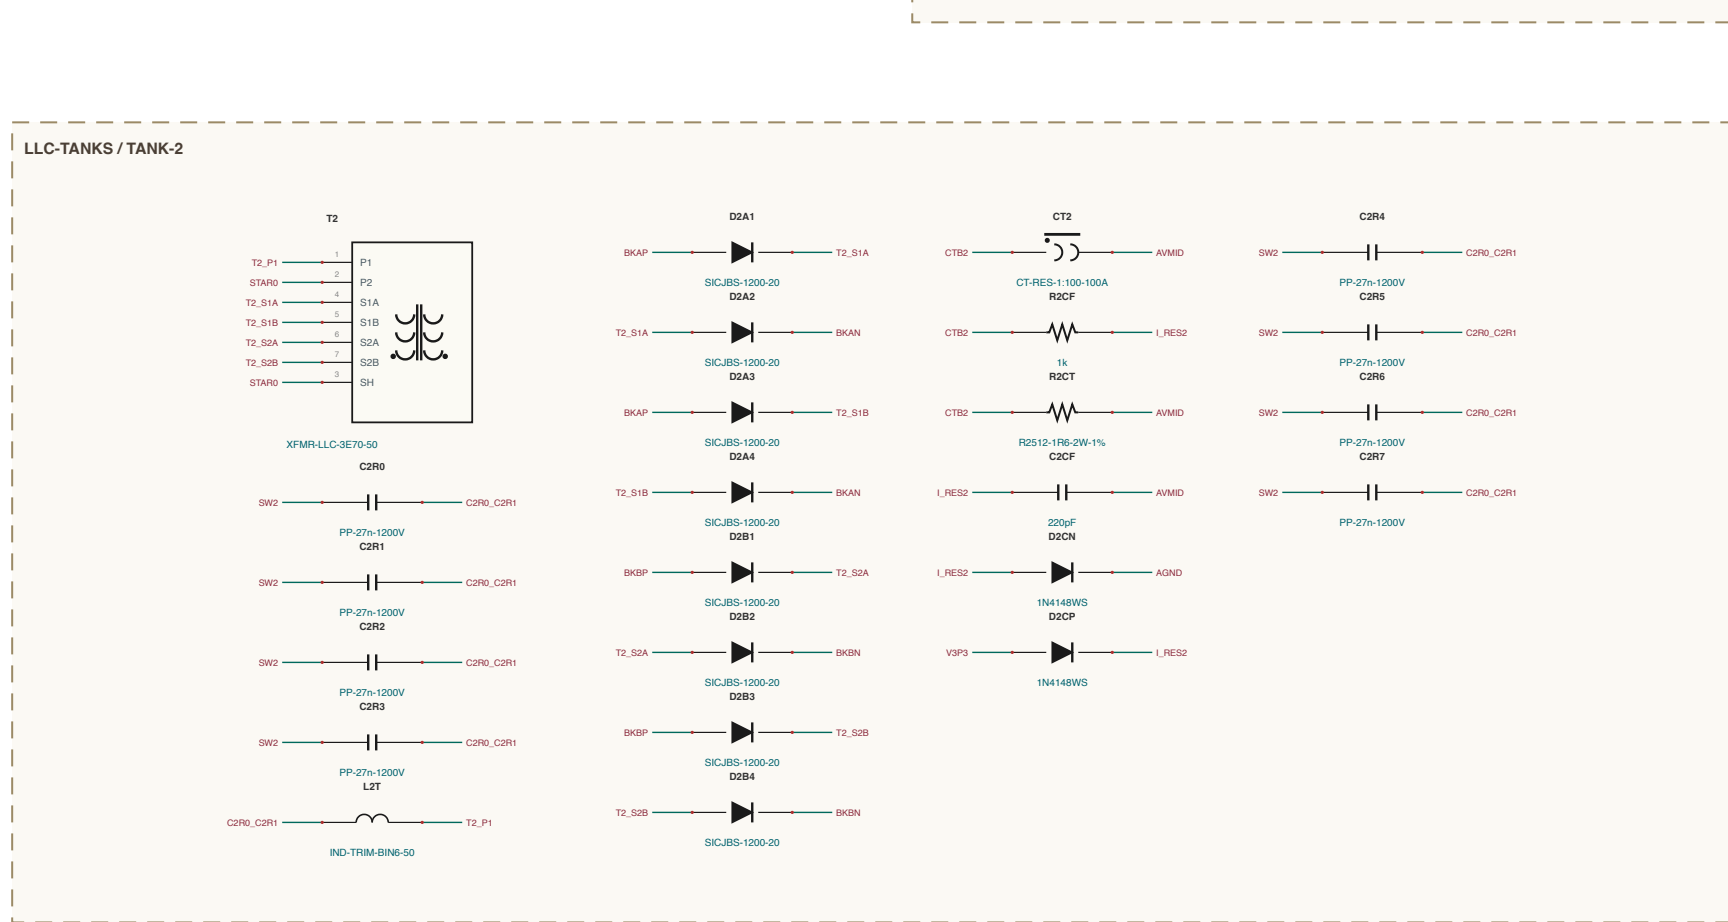
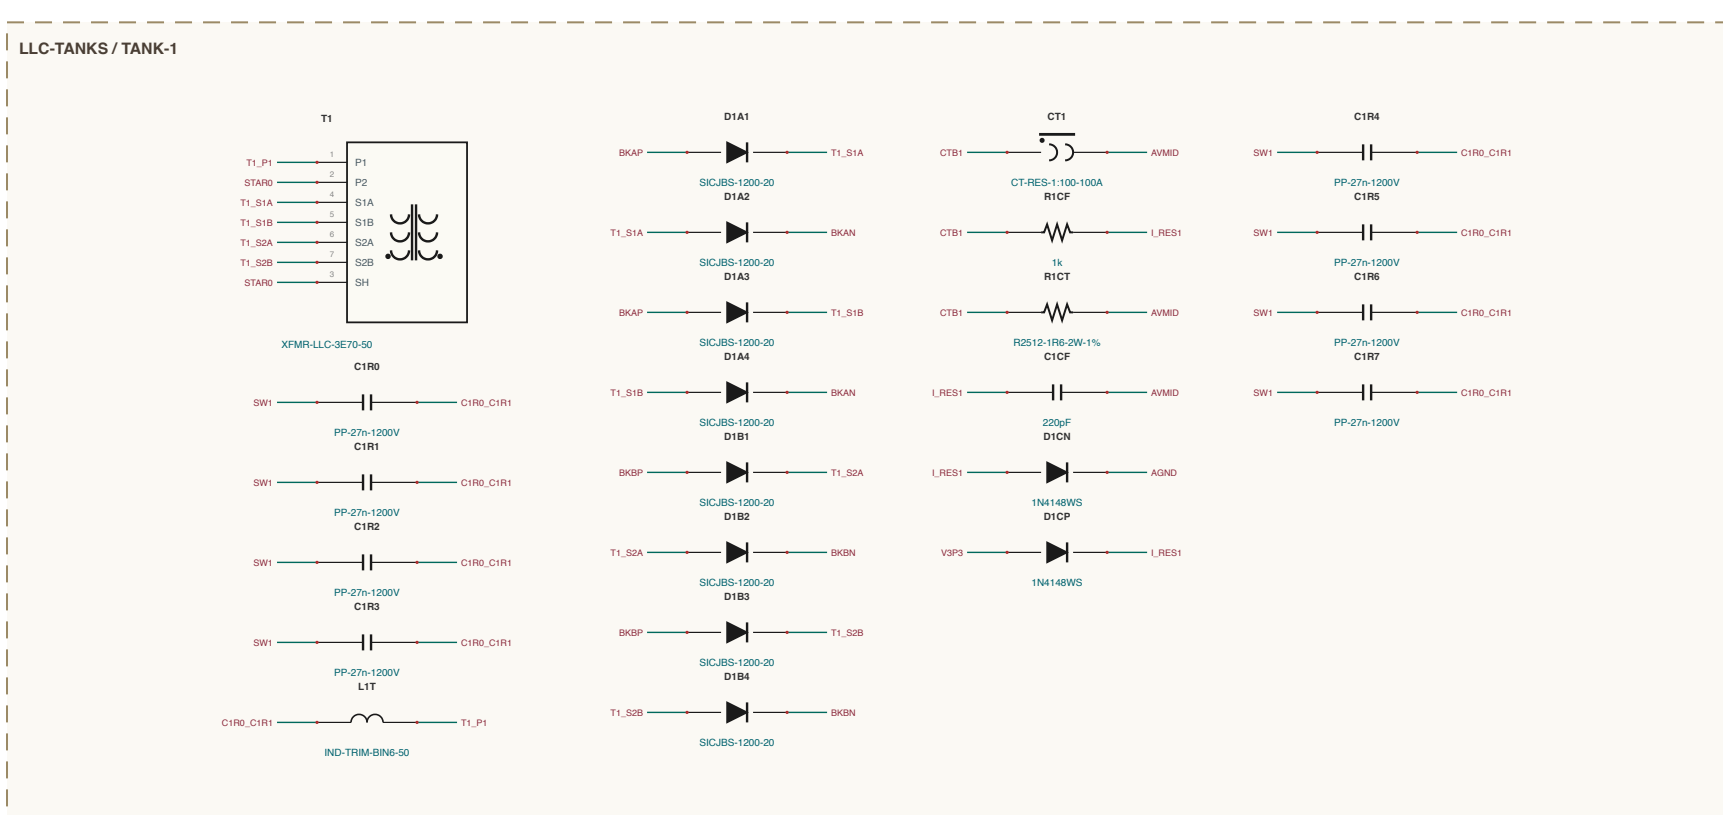
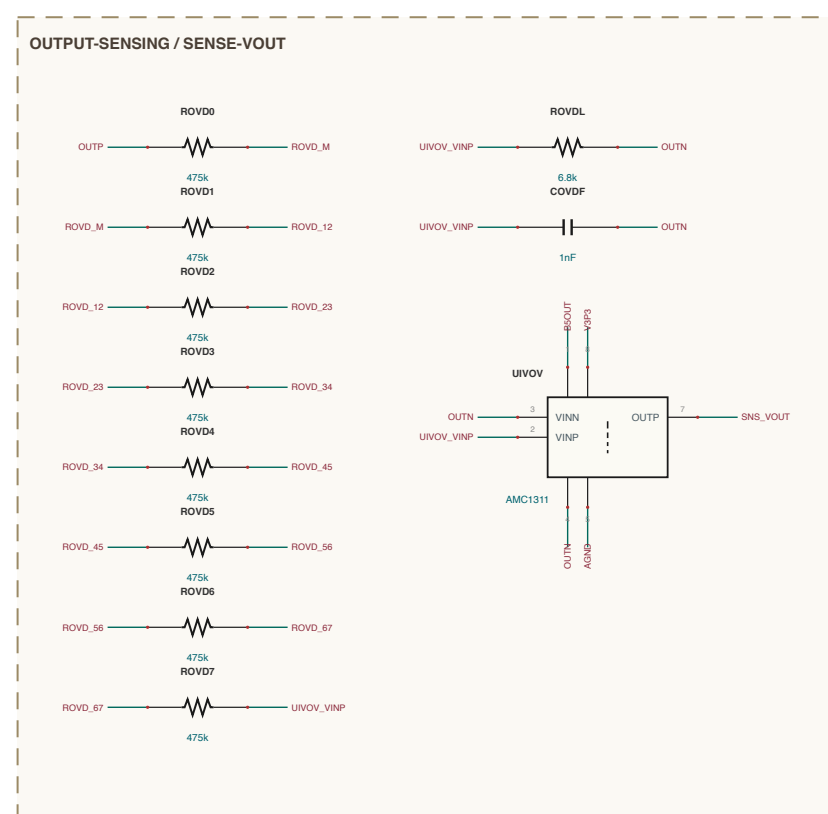
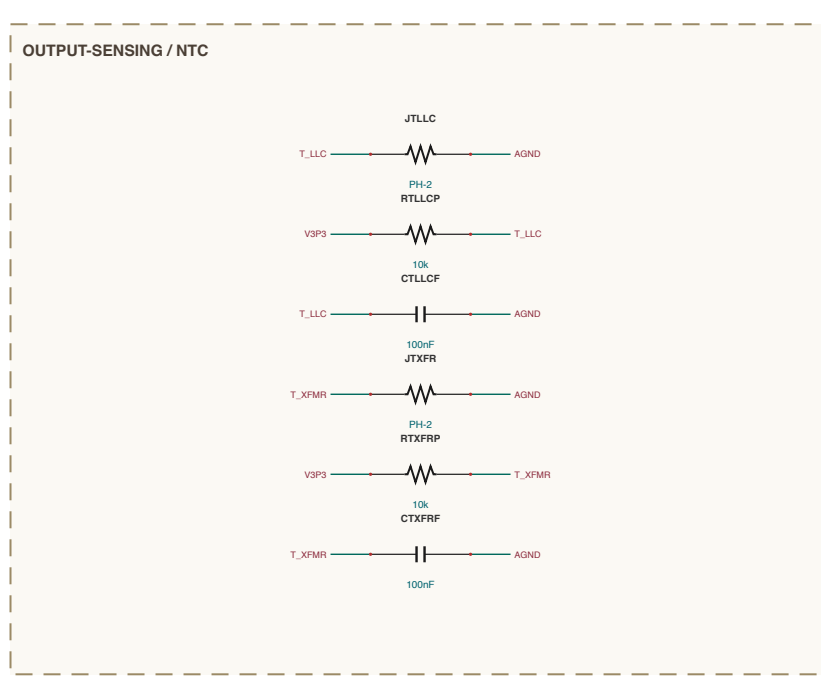
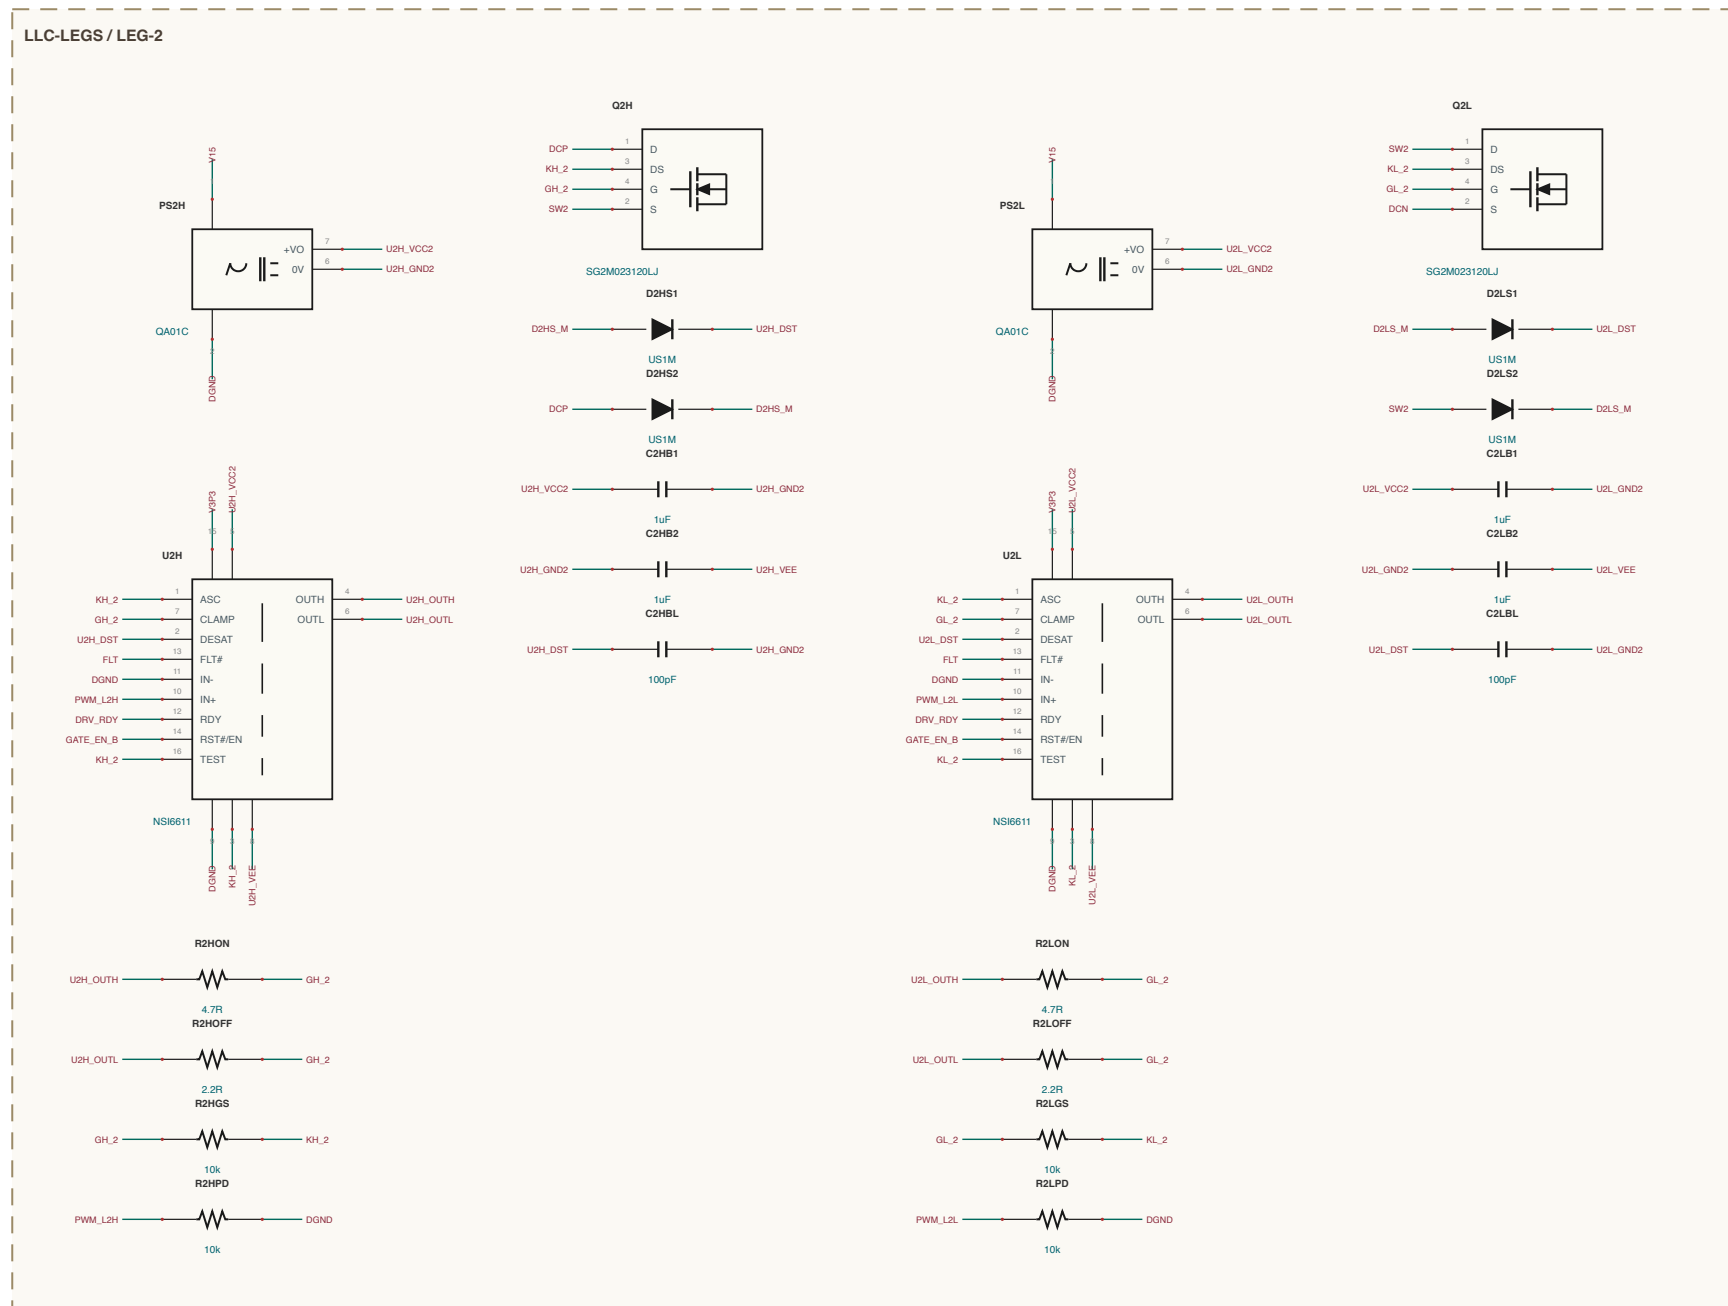
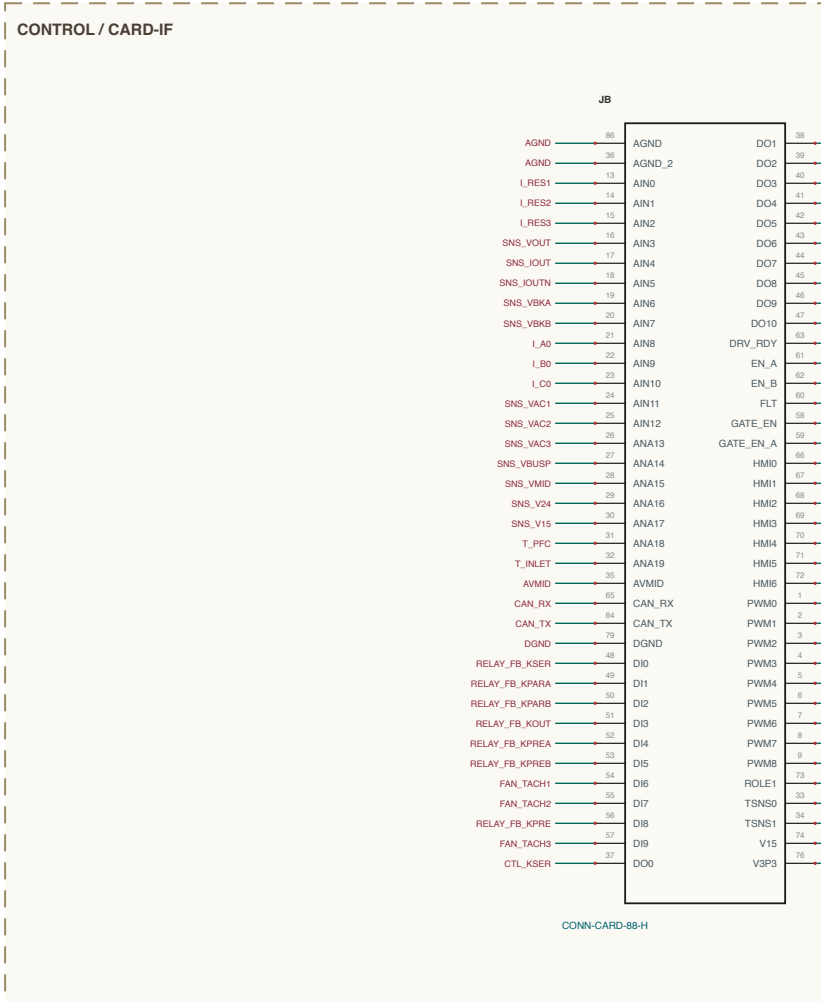
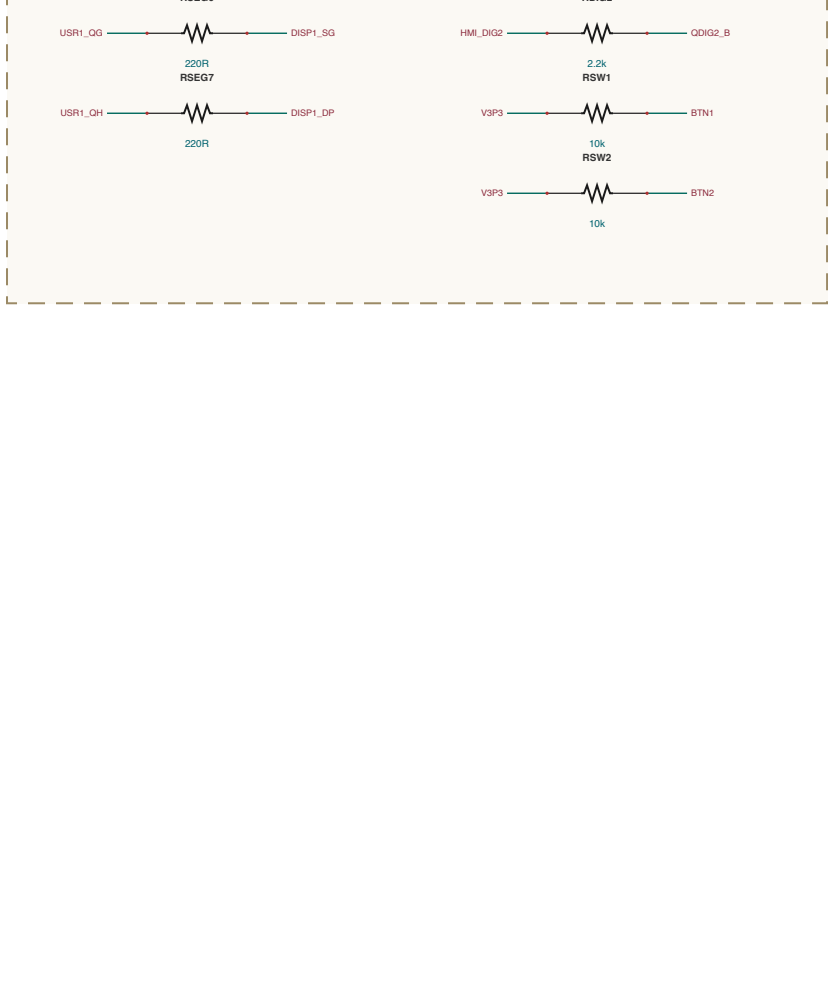
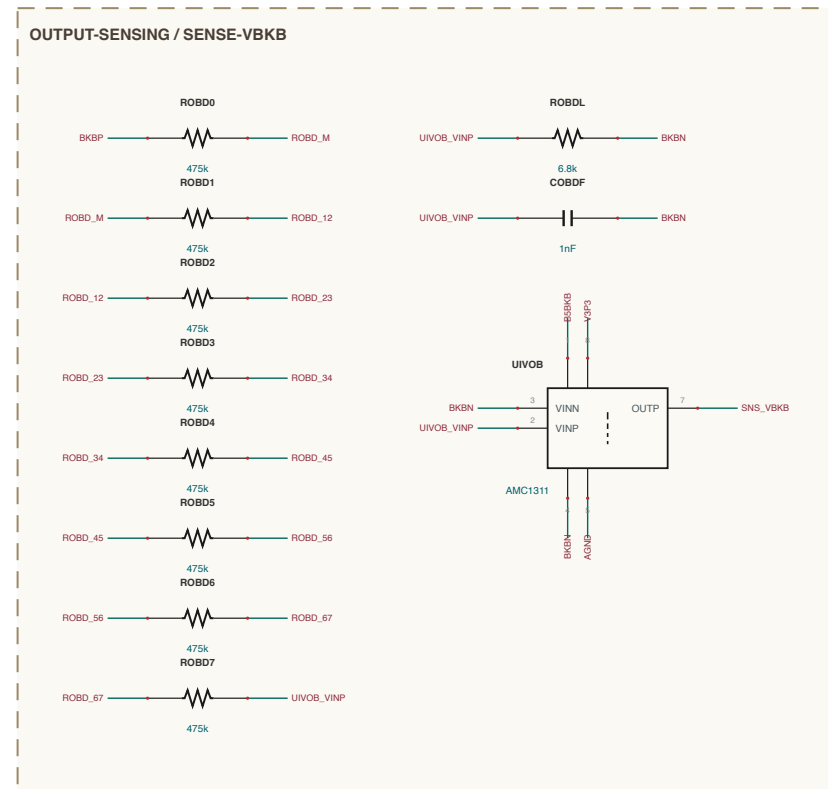
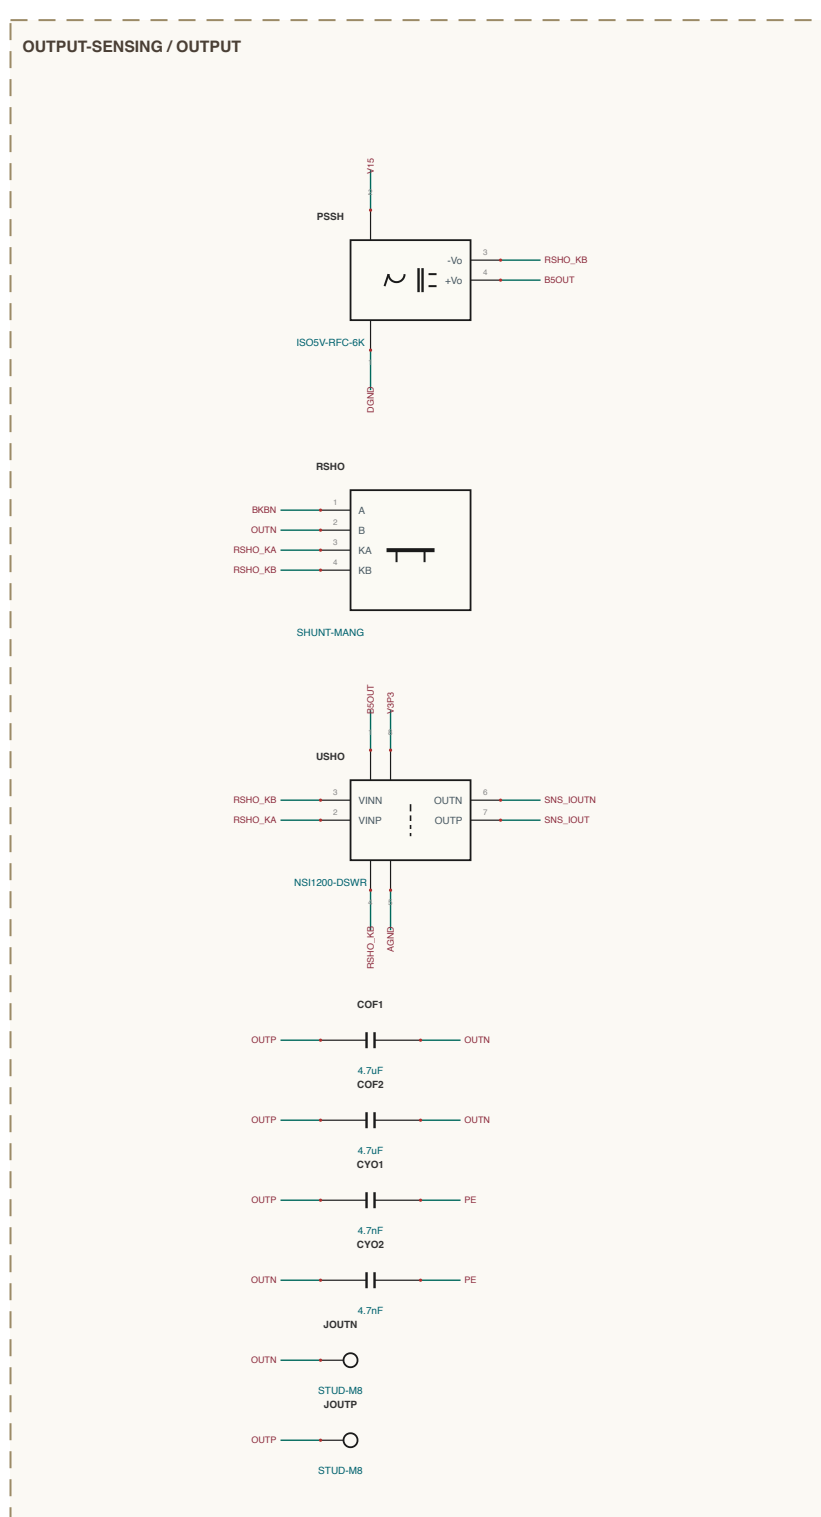
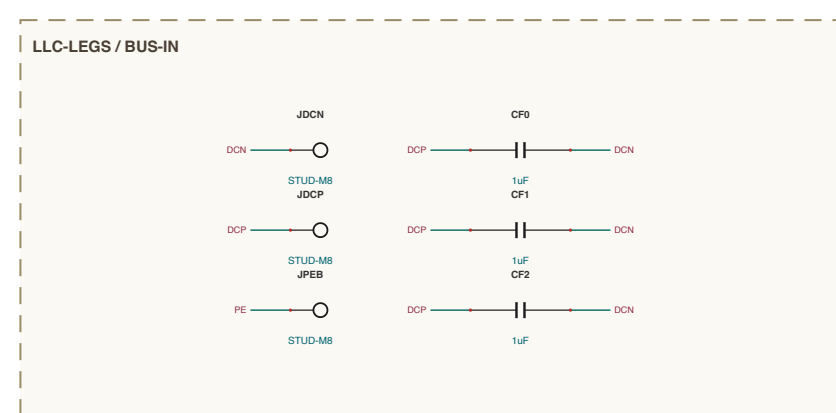
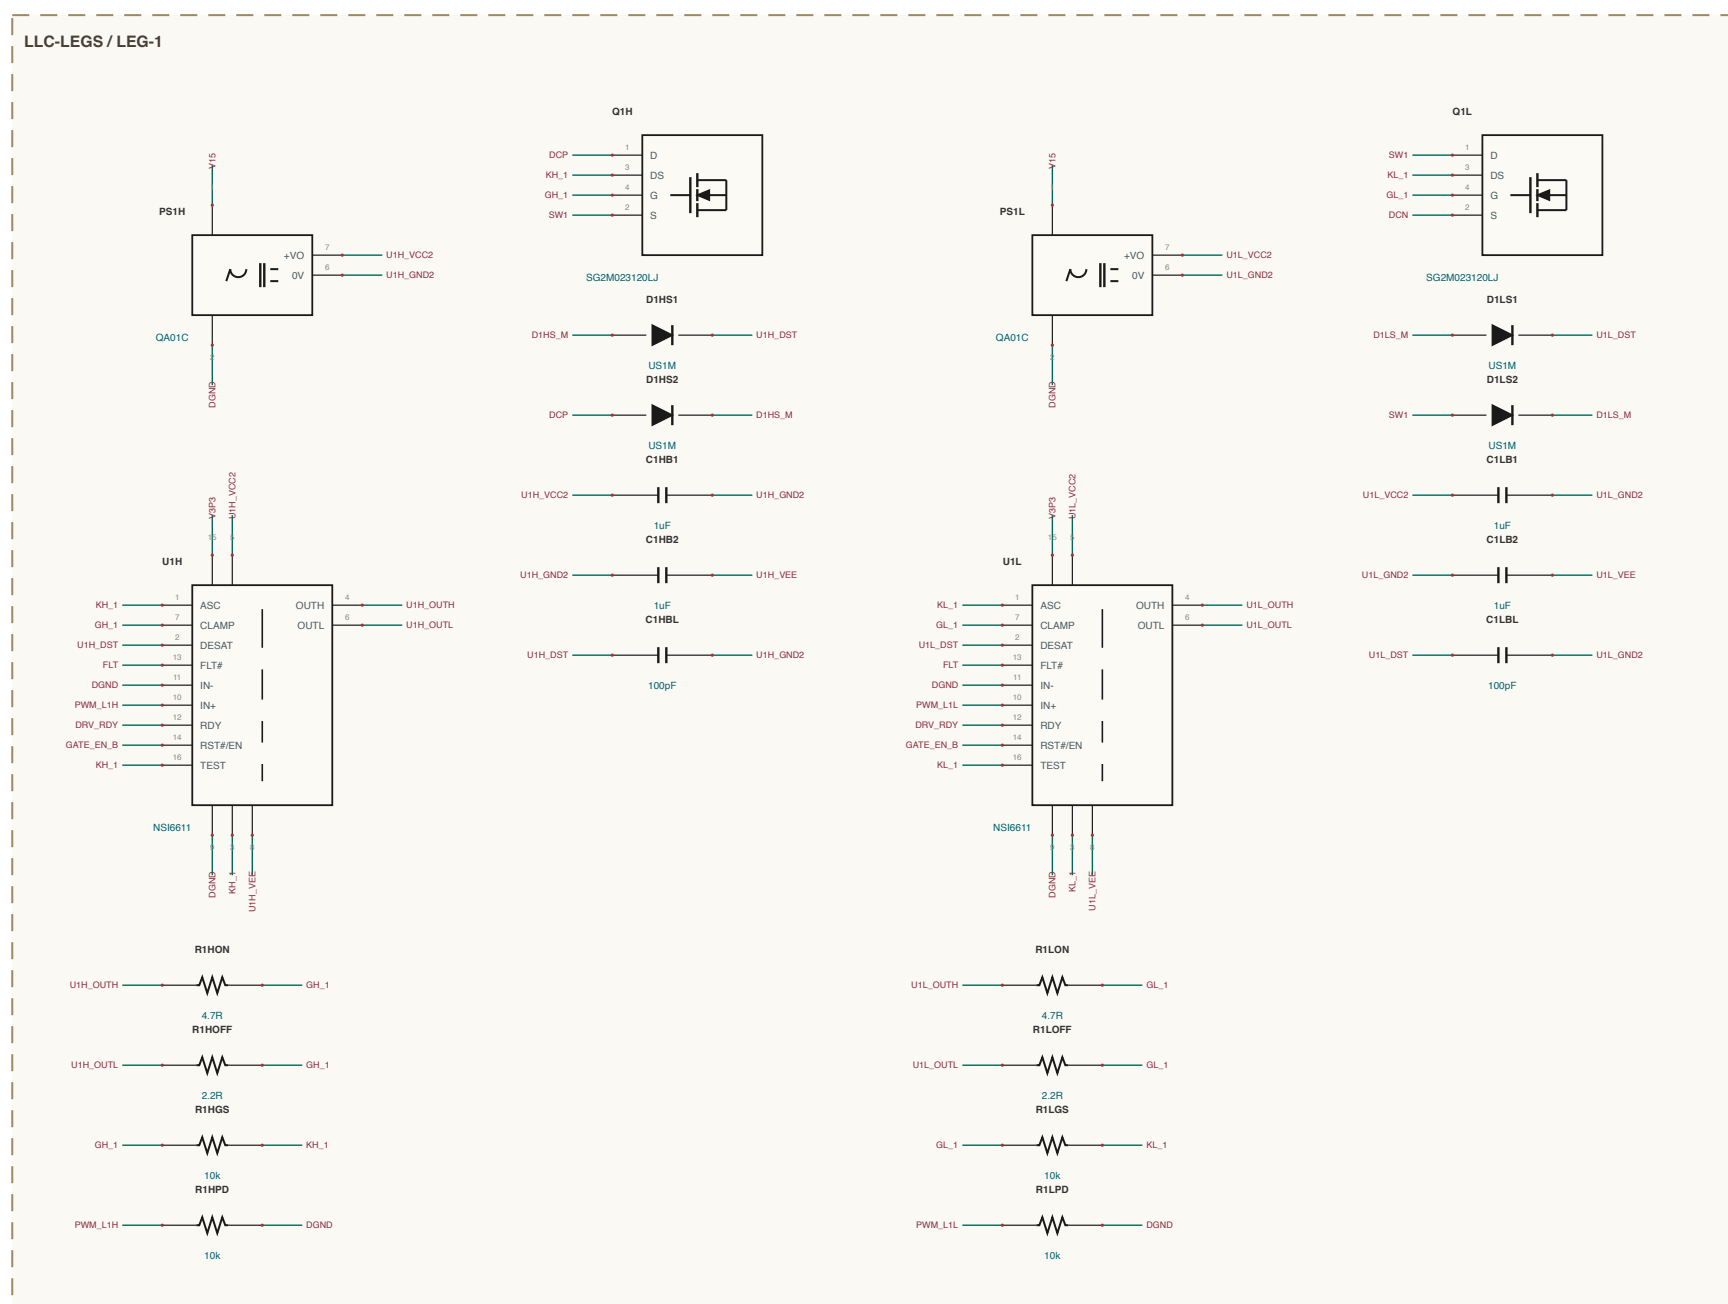
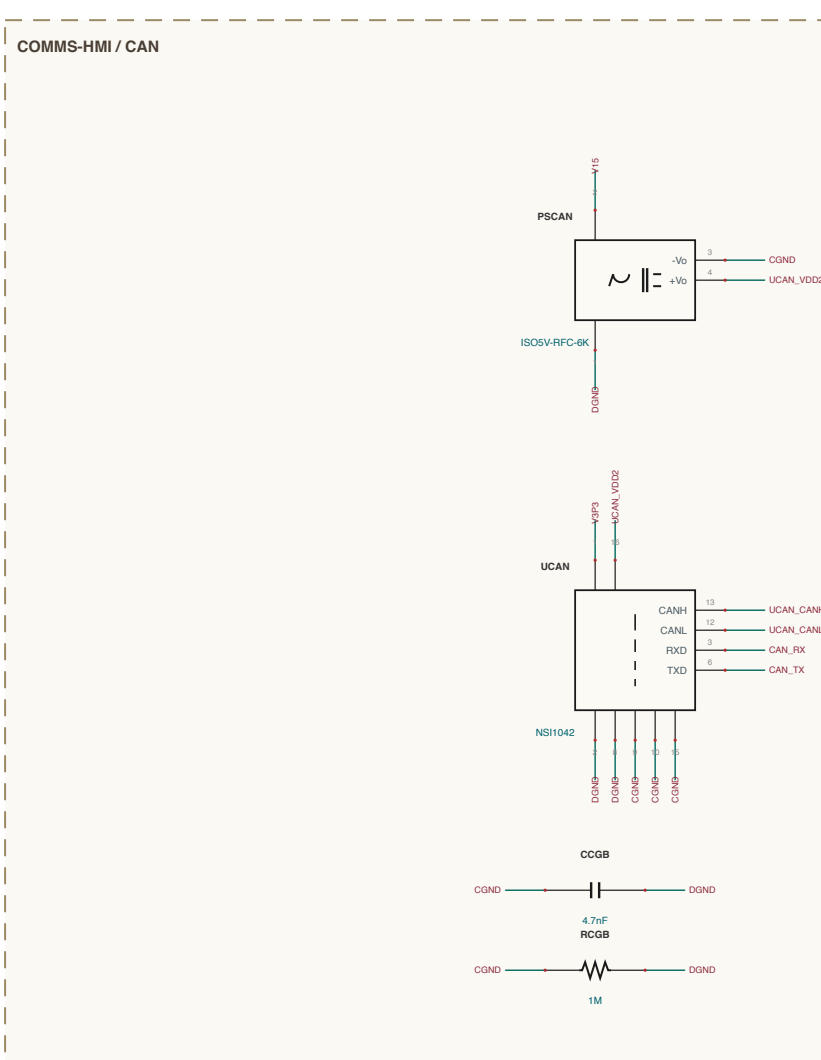
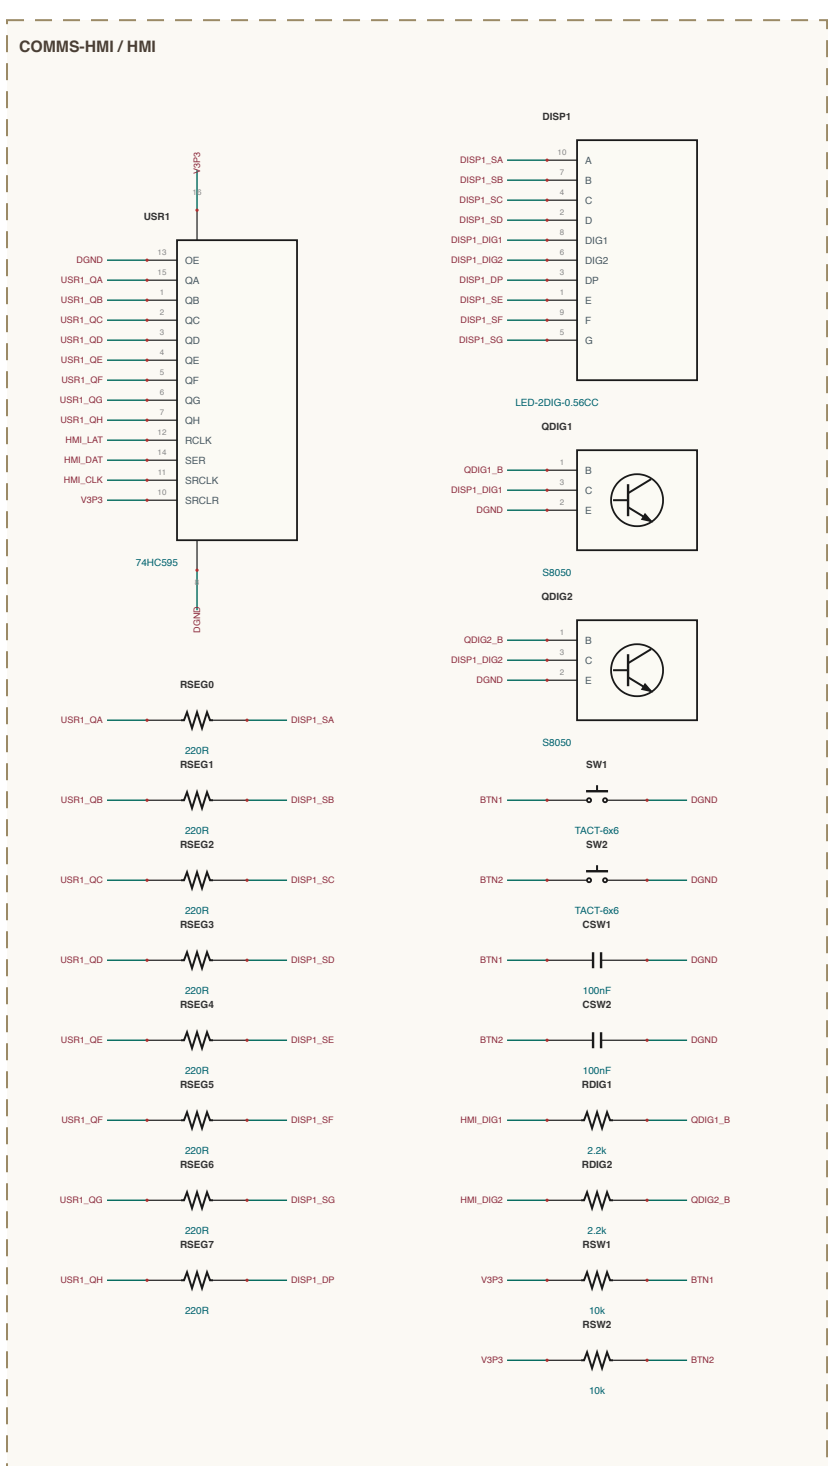
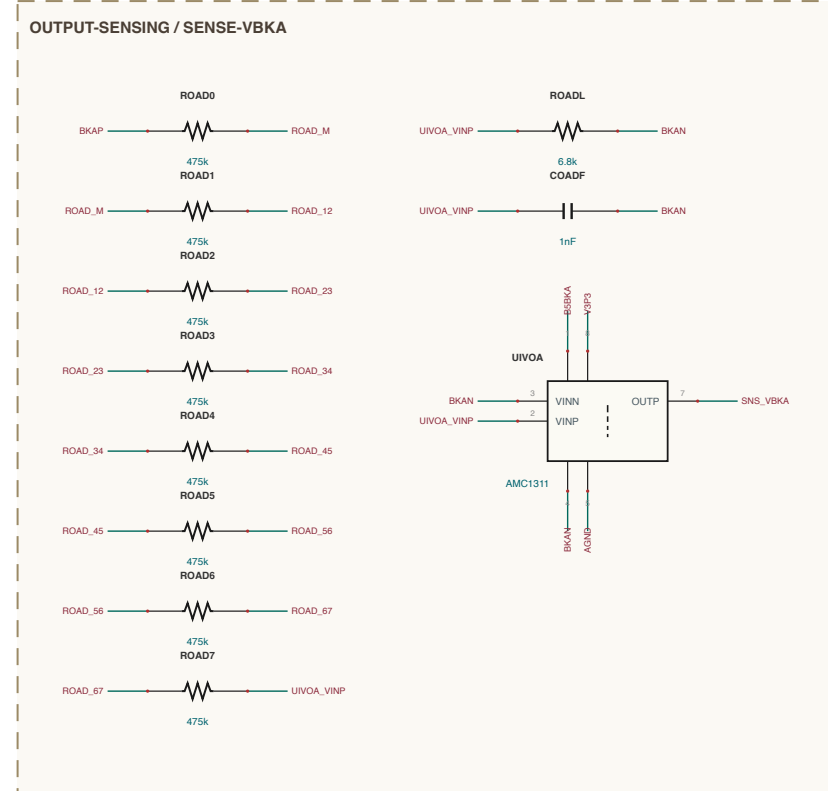
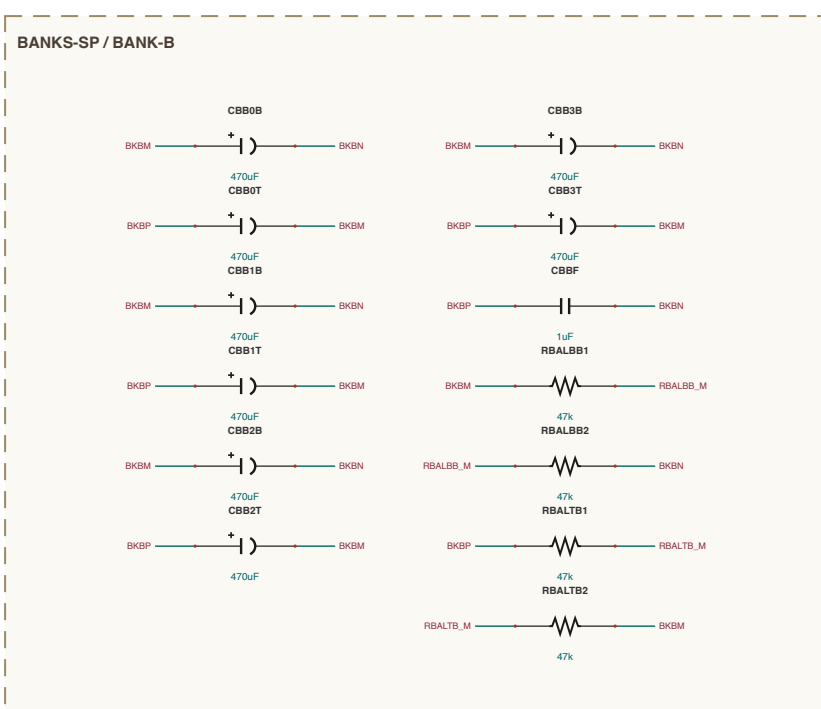
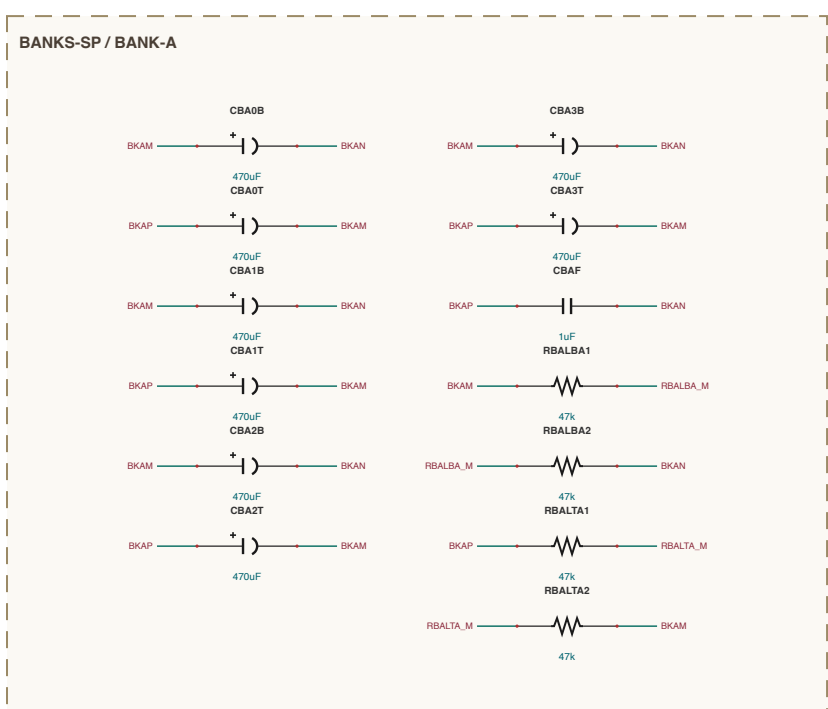
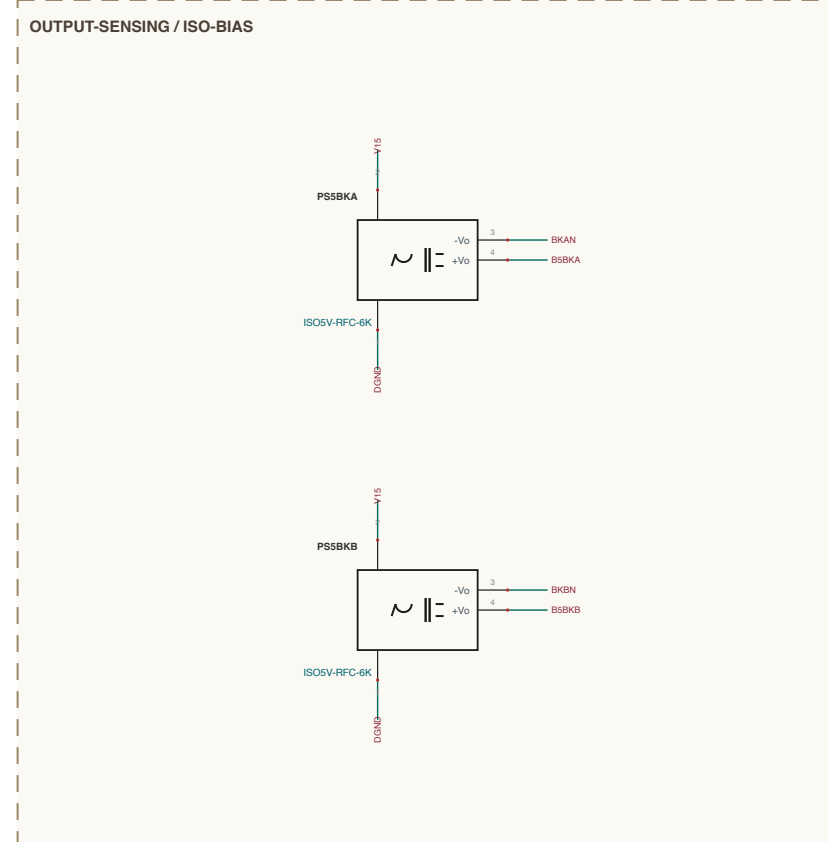
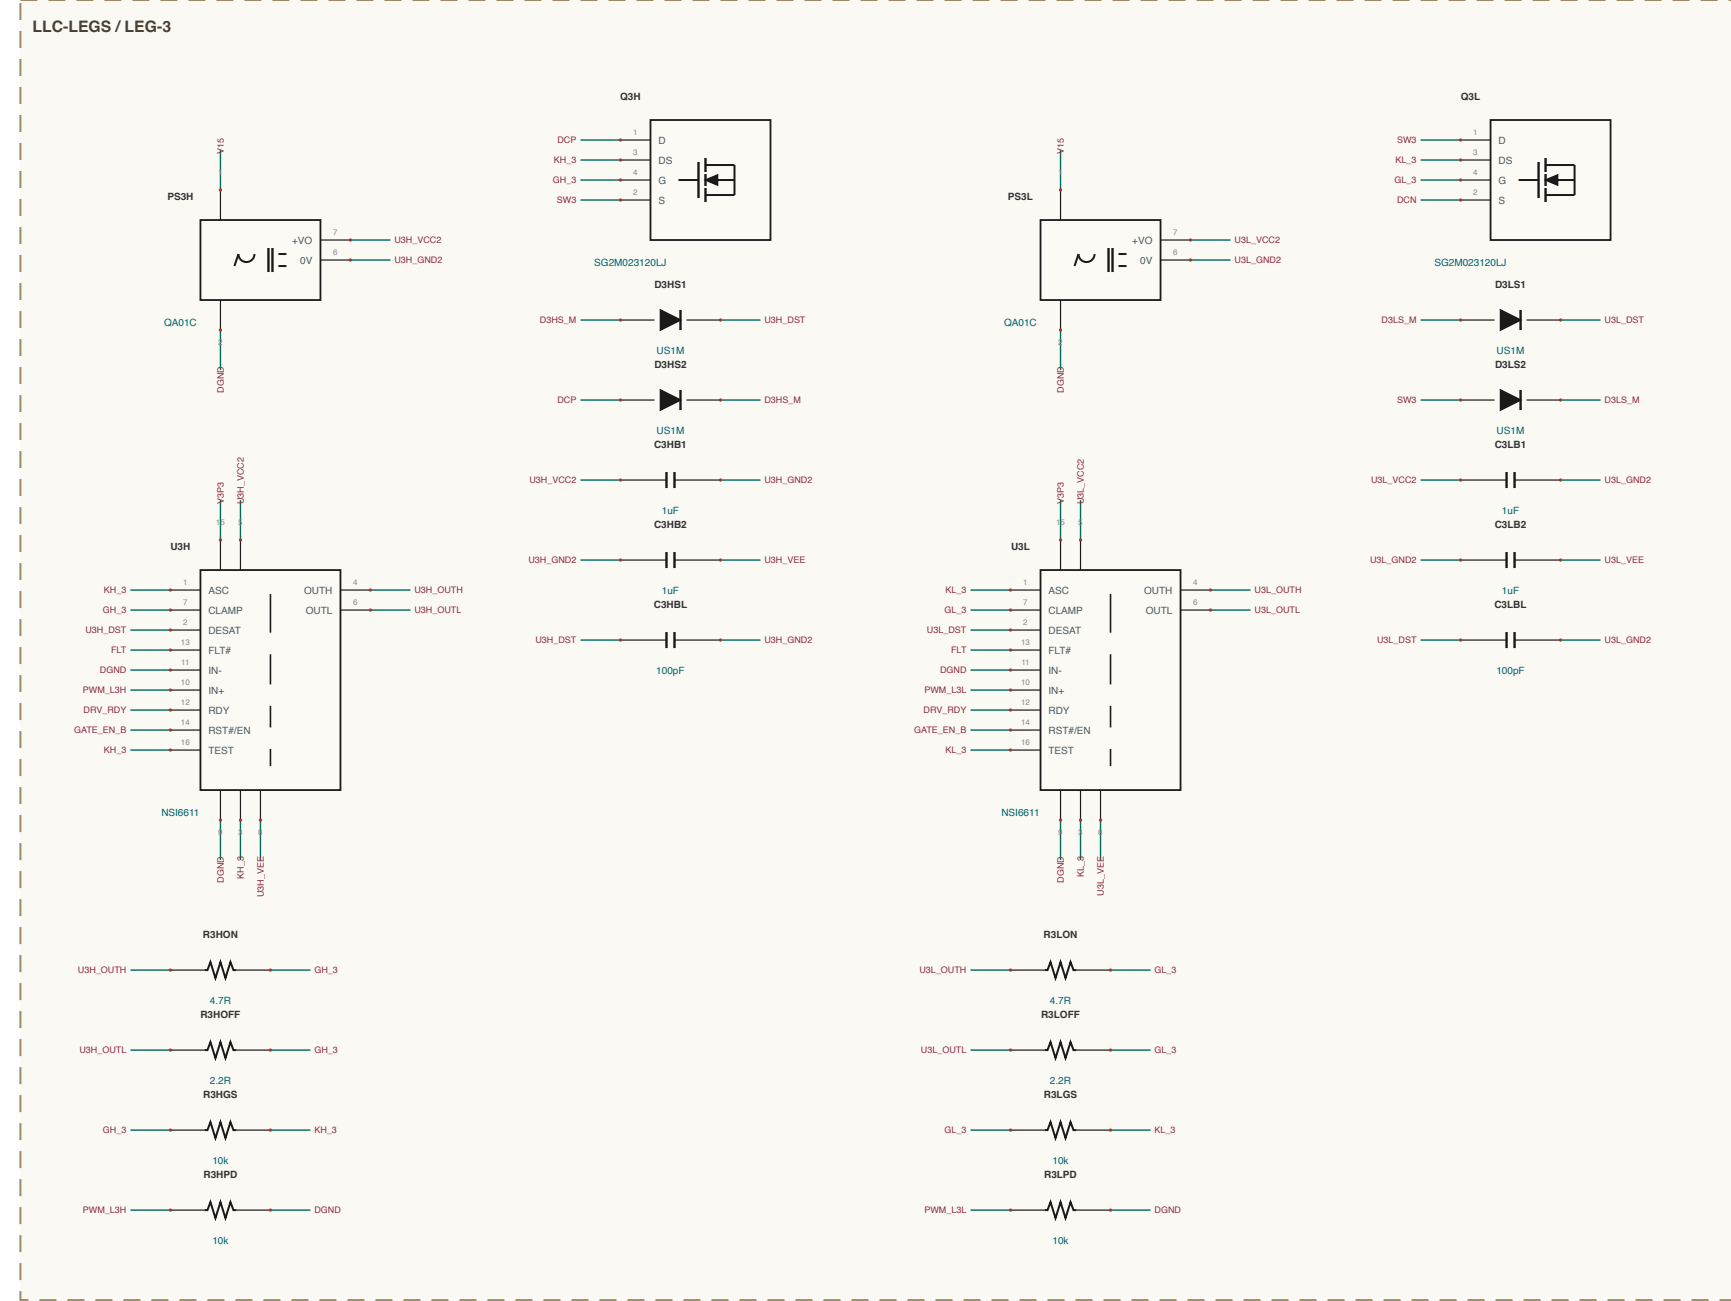
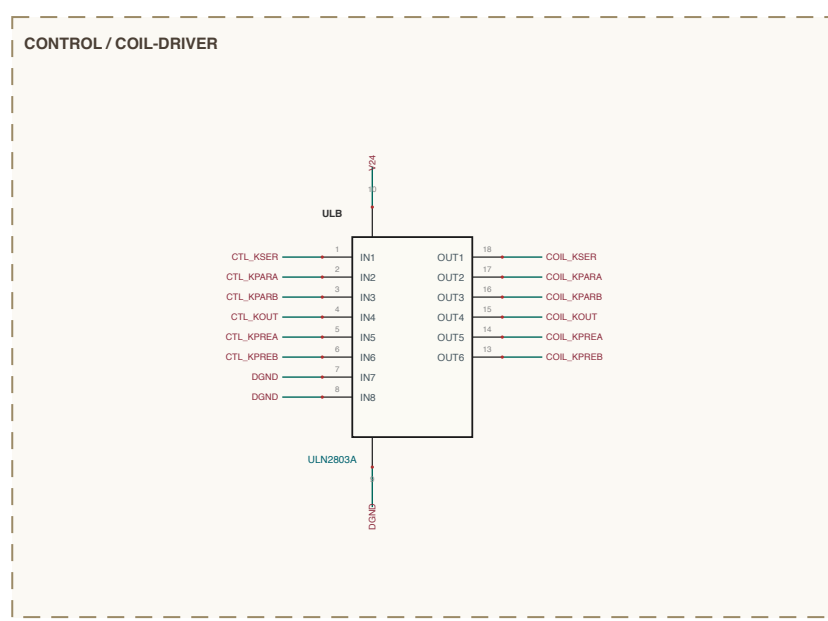
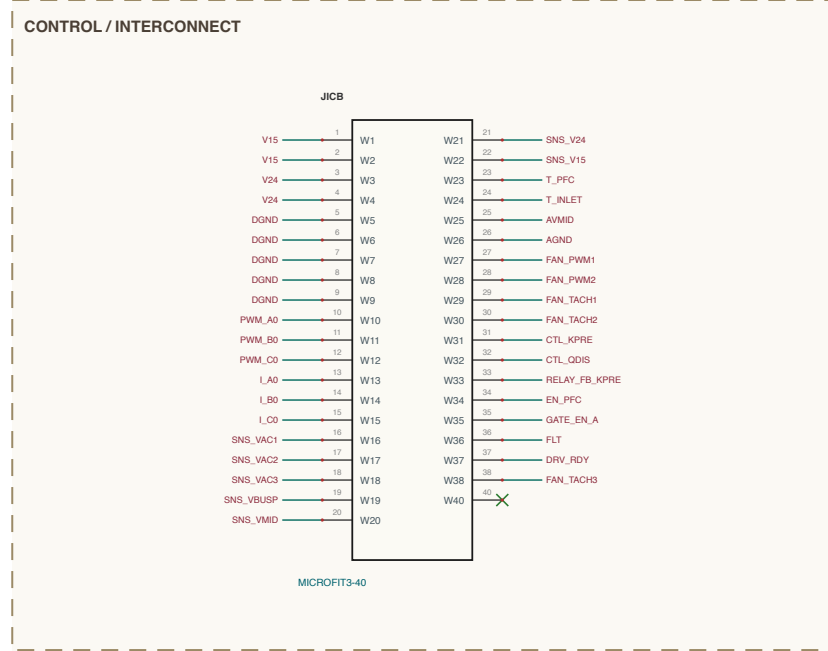


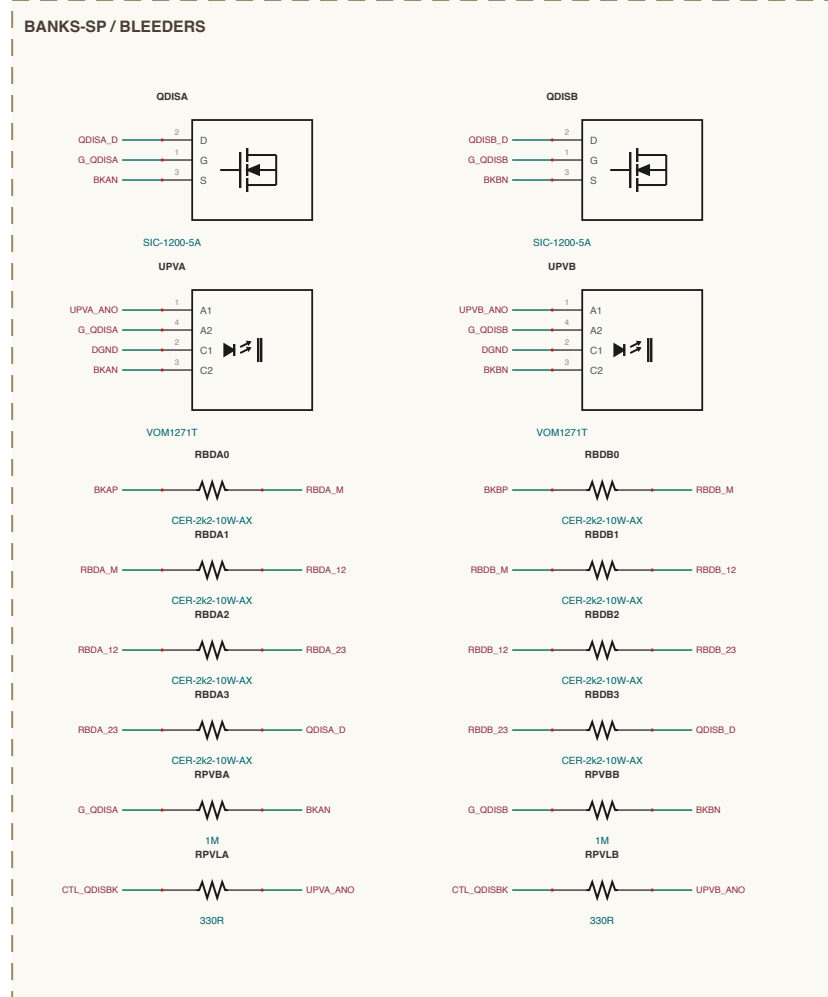


SHEET INDEX
BOARD 7-1 of 2
AC SENSING - 5 sections
CONTROL - 4 sections
DC-LINK - 4 sections
INPUT-EM - 4 sections
AUX-POWER - 3 sections
VIENNA-PFC - 3 sections
rev 0.2 - 27 sections - 280 components

NET NAMING
Internal junctions are named for what they join
Capacitors, while made at that I/O pin e.g. CAP10A, 100P
Resistors, M-resistor of a series pin e.g. RES10A, 10
Resistors, series tap between Resistorpins e.g. RES10, 01
all others are explicit design rules

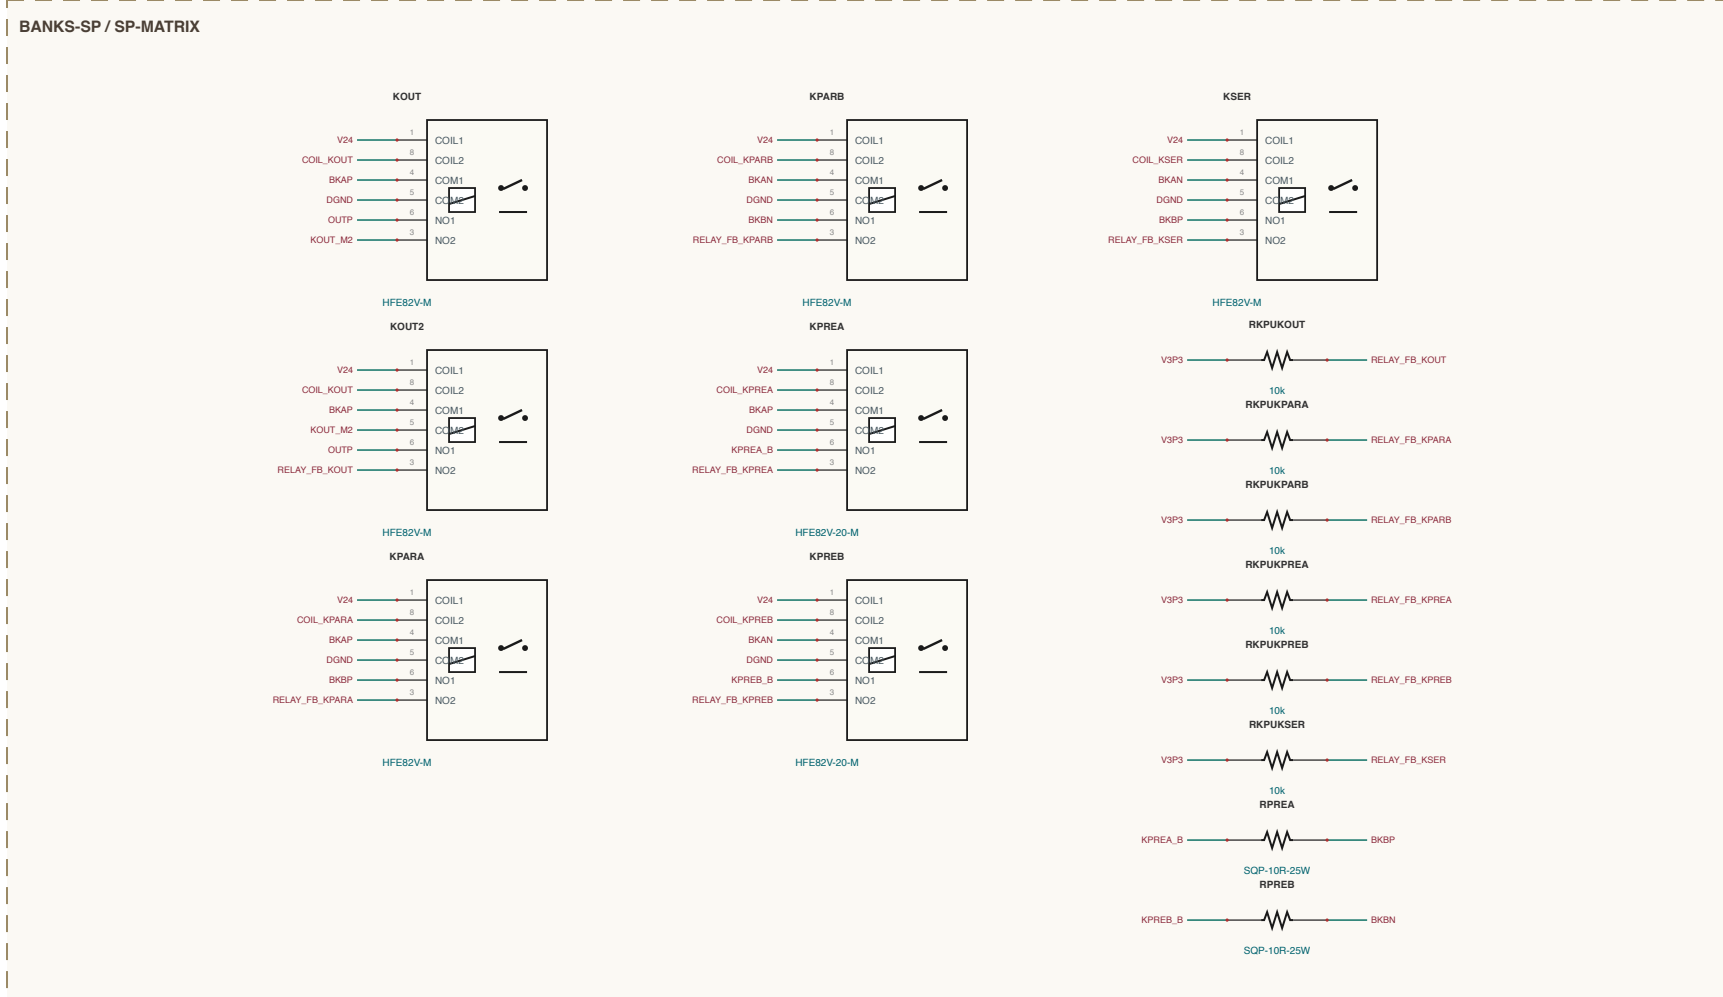


SHEET INDEX	
SW 7.1 of 2	
OUTPUT-SENSING - 6 sections	
BANKS-SP - 4 sections	
LLC-LEG8 - 4 sections	
CONTROL - 3 sections	
LLC-TANKS - 3 sections	
COMMS-HMI - 2 sections	
rev 0.1 - 22 sections - 399 components	
NET NAMING	
Internal junctions are named for what they join	
Useful: JPNs node at that IC pin e.g. UPV0A_VBP	
Resistor: M midpoint of a series pair e.g. RBA12A_M	
Resistor: vvvv-xxx-yyy between Resistorv and e.g. RY123_01	
All others are explicit design nets	


CONTROL / SAFETY

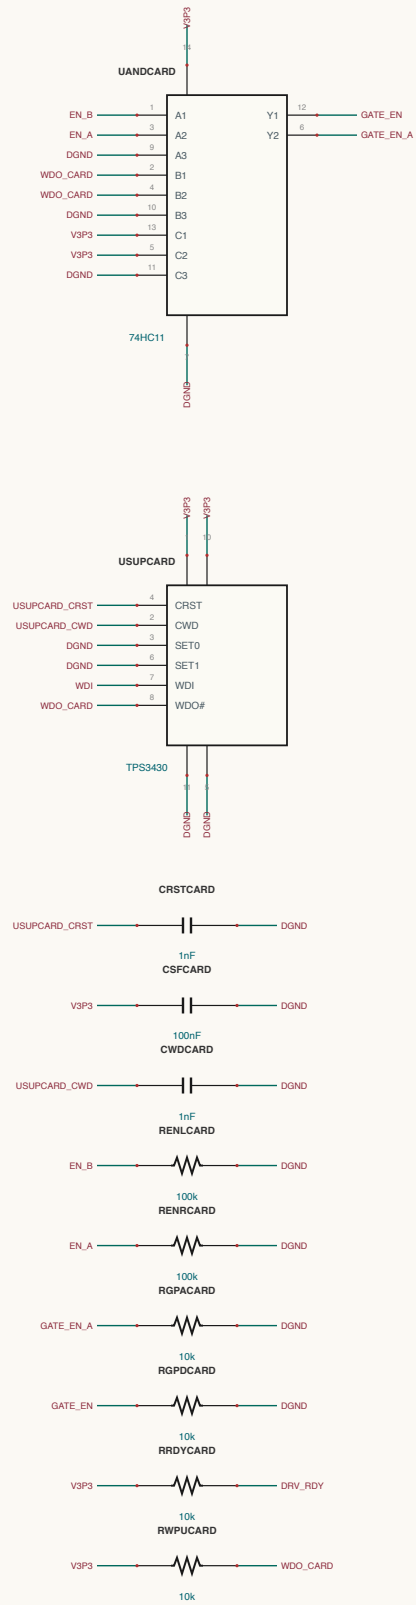


CONTROL / MCU

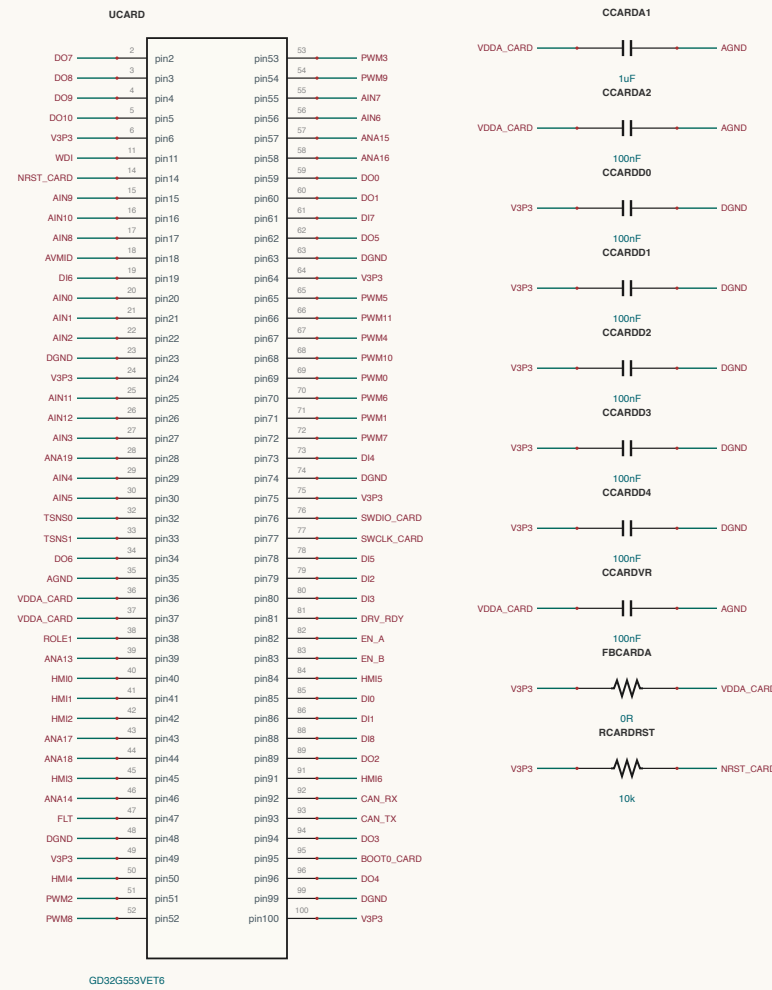


CONTROL / ANALOG-MID

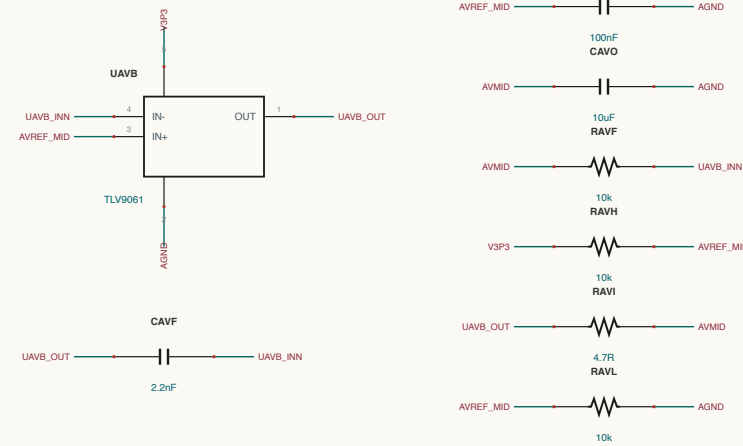


CONTROL / BUCK-3V3

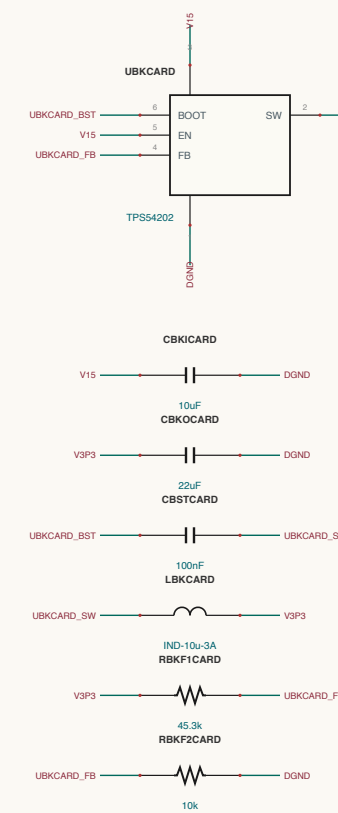


CONTROL / SWD-BOOT

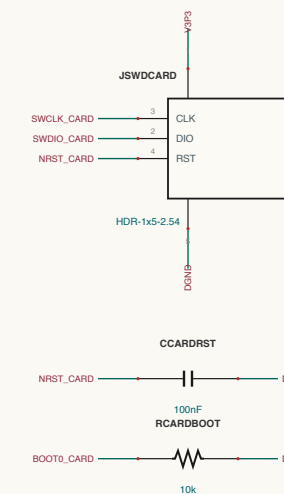

CONTROL / CARD-IF

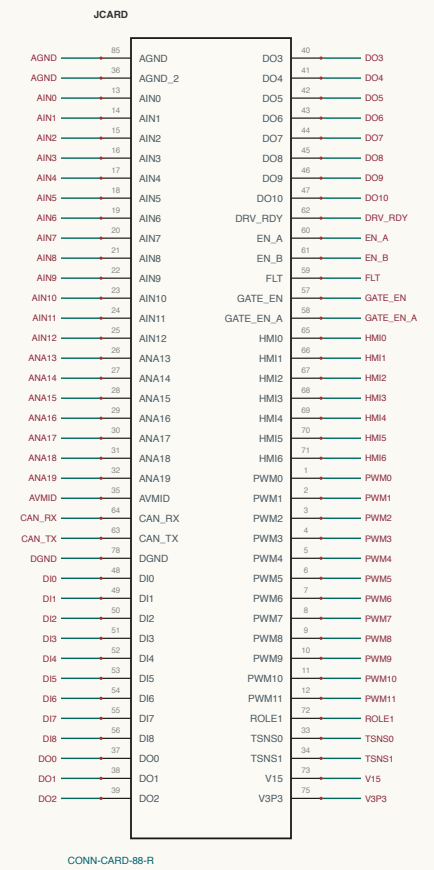

CONTROL / FLT-GROUND



CONTROL / ROLE

