
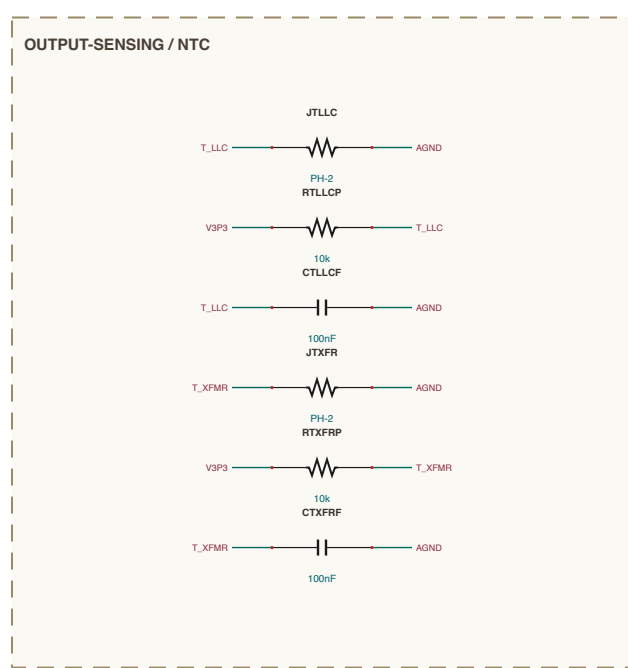
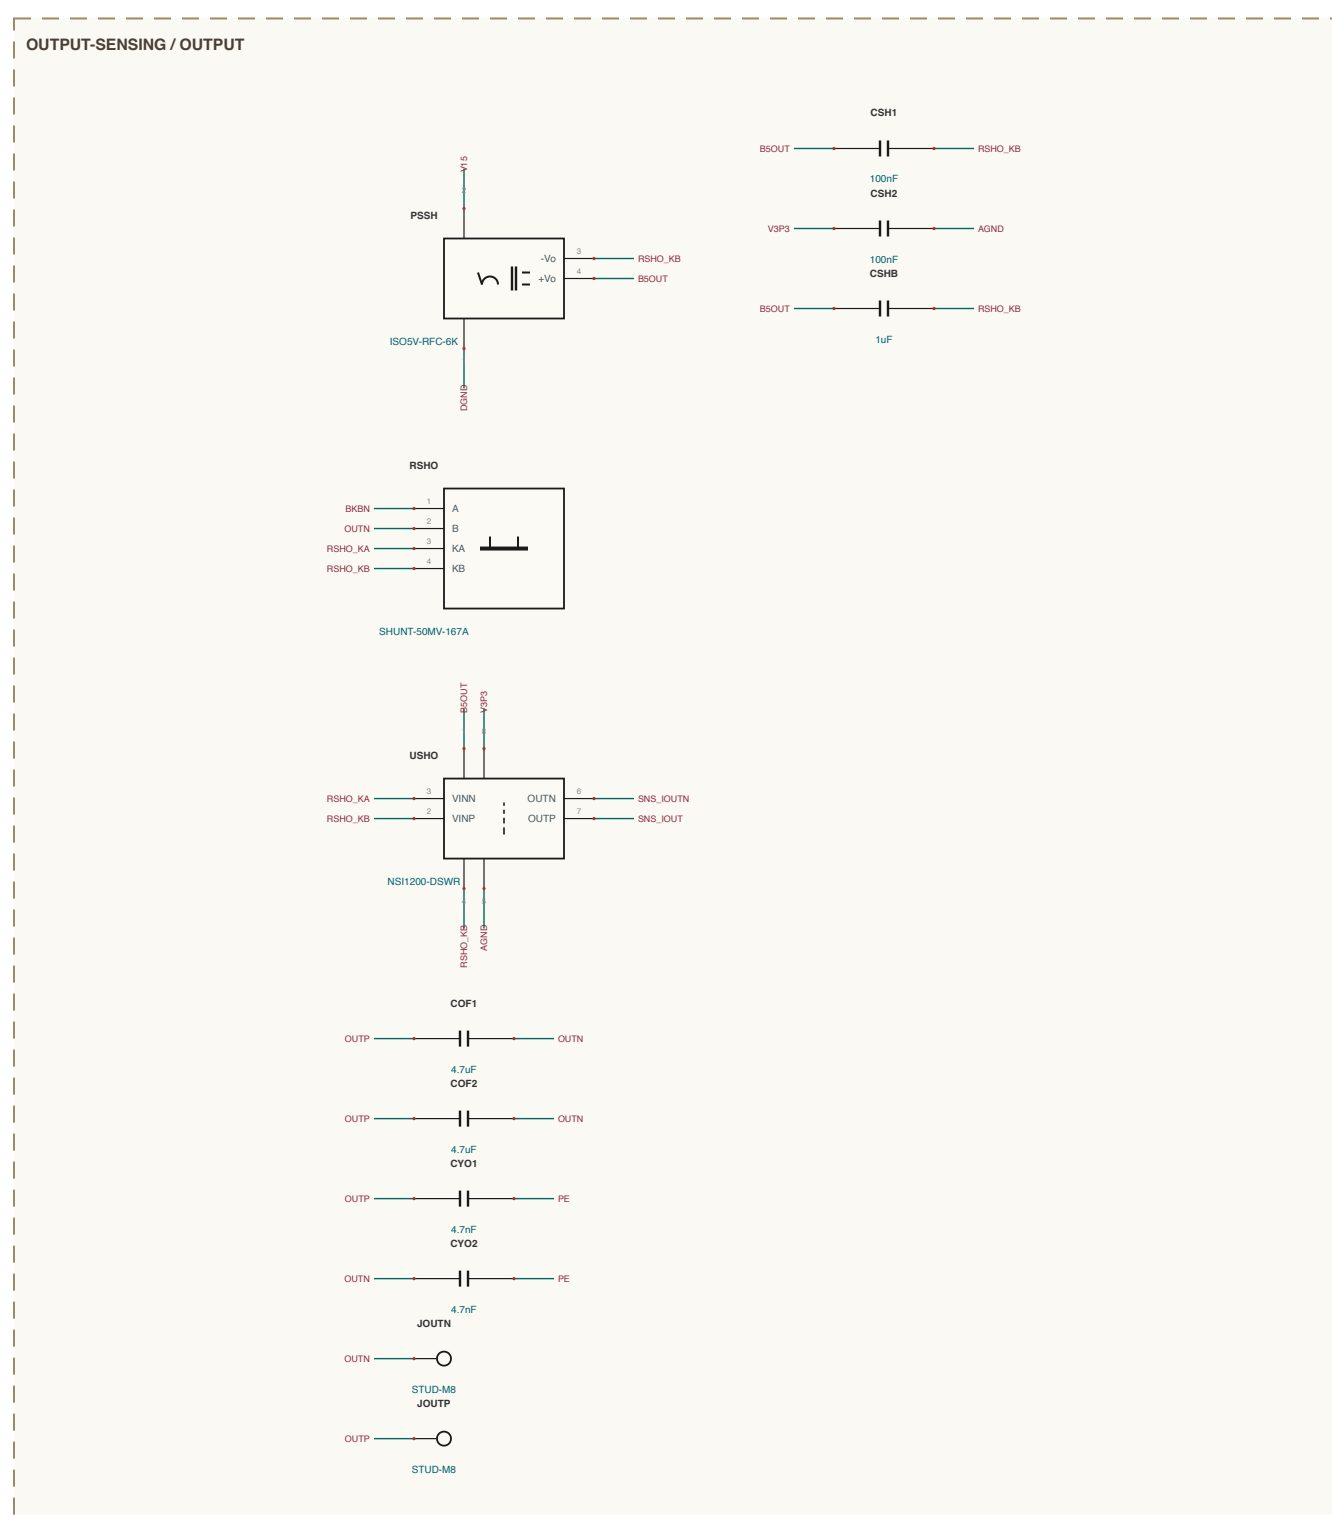
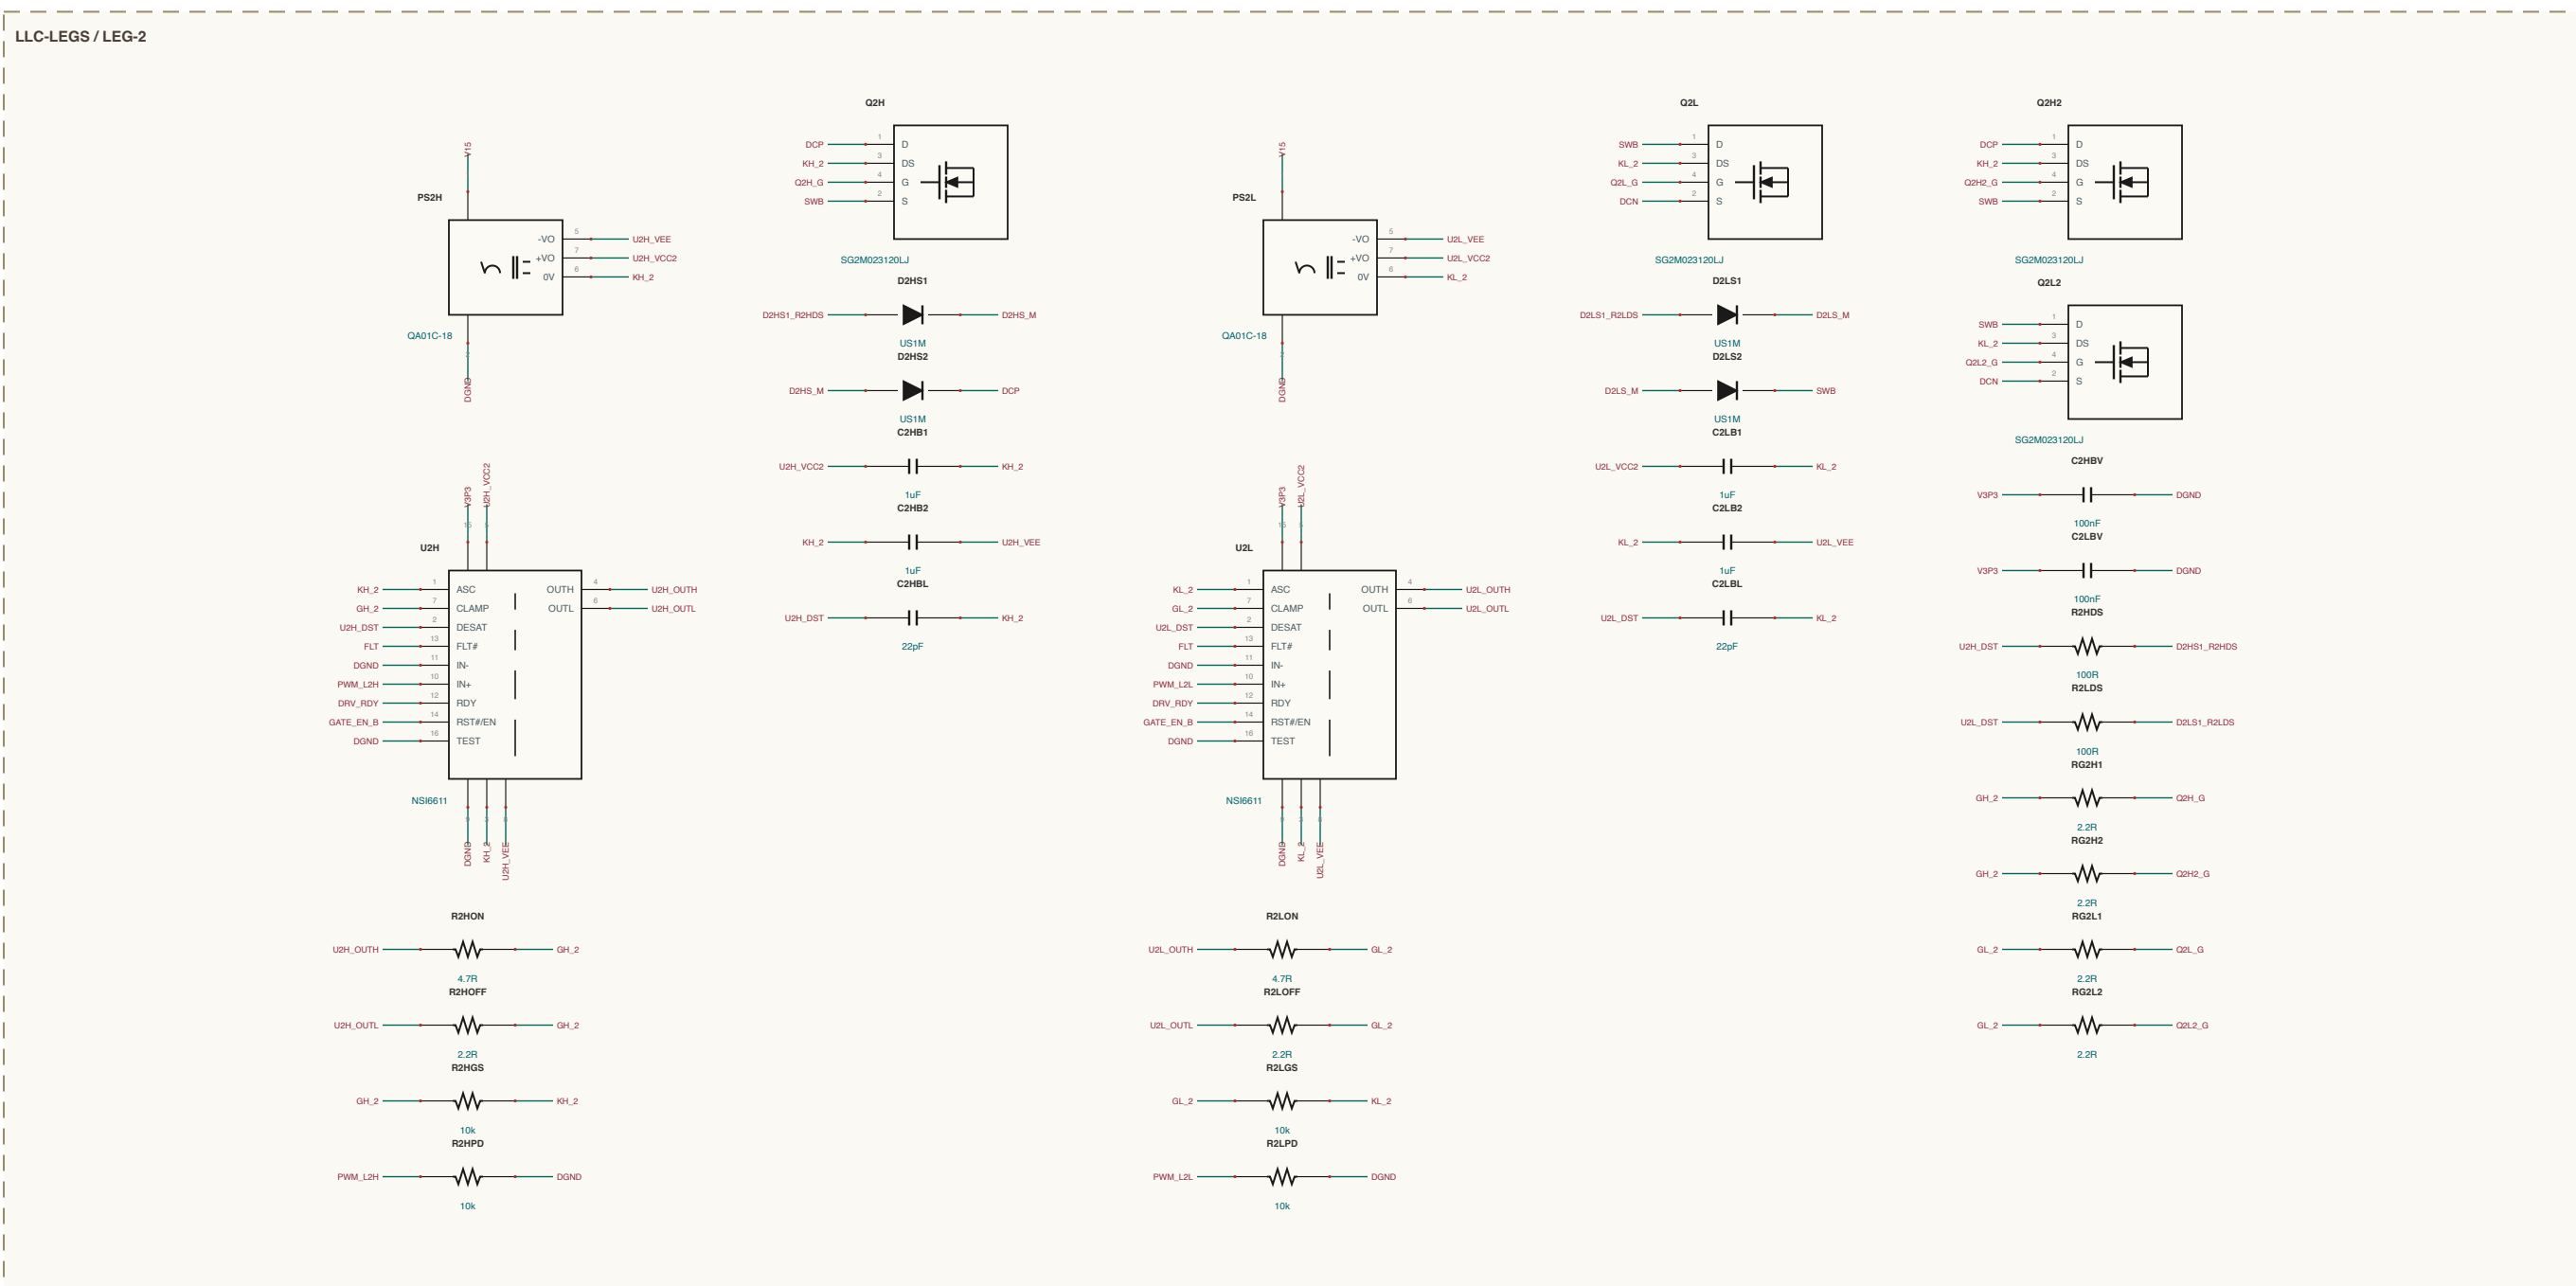
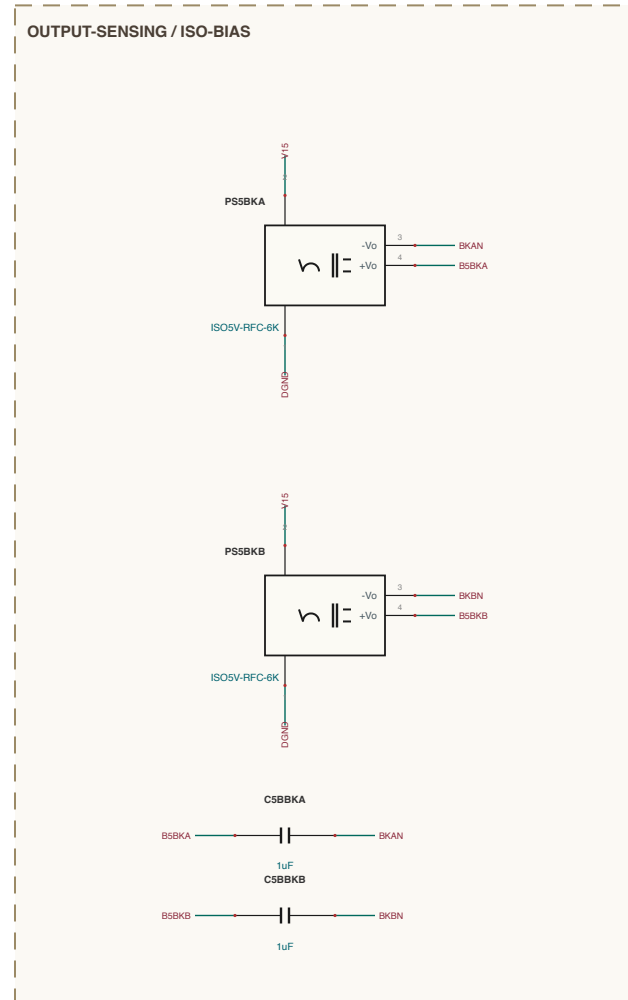
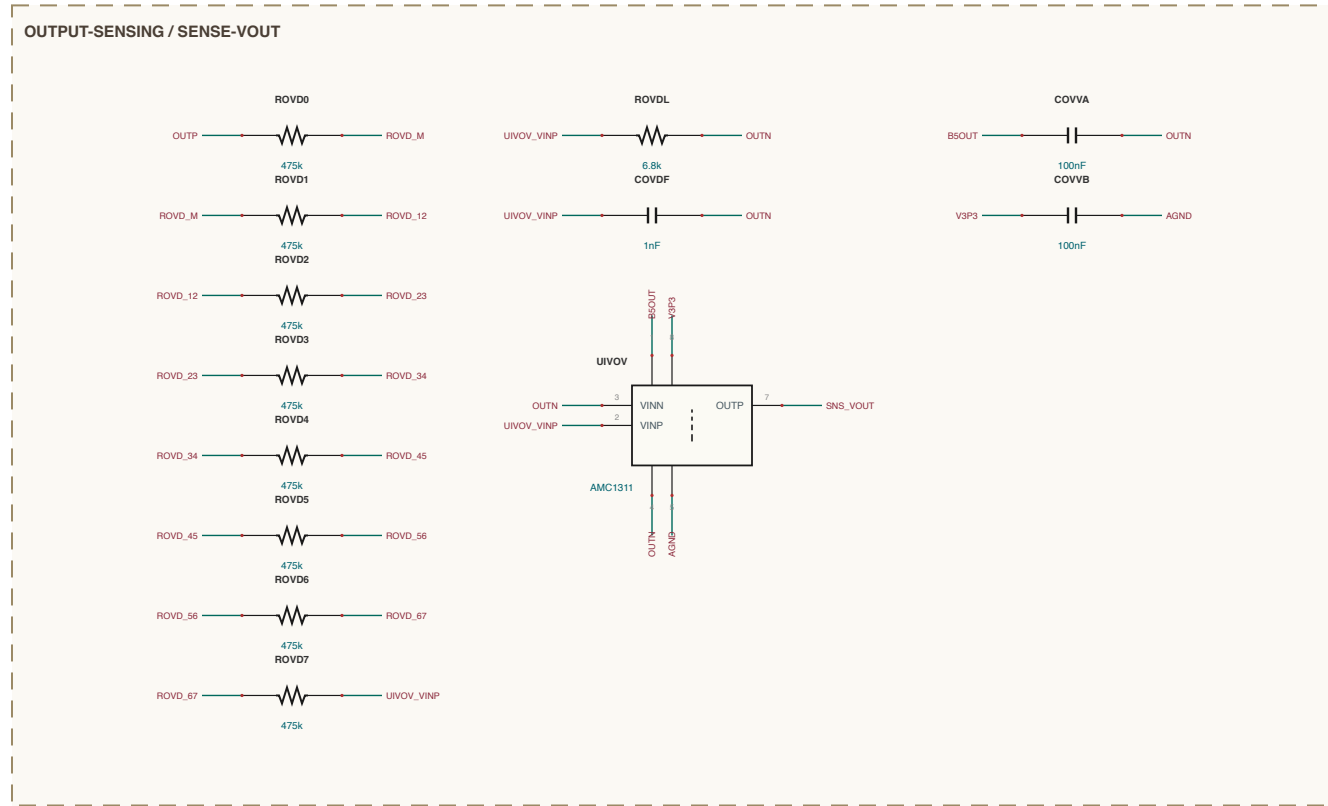
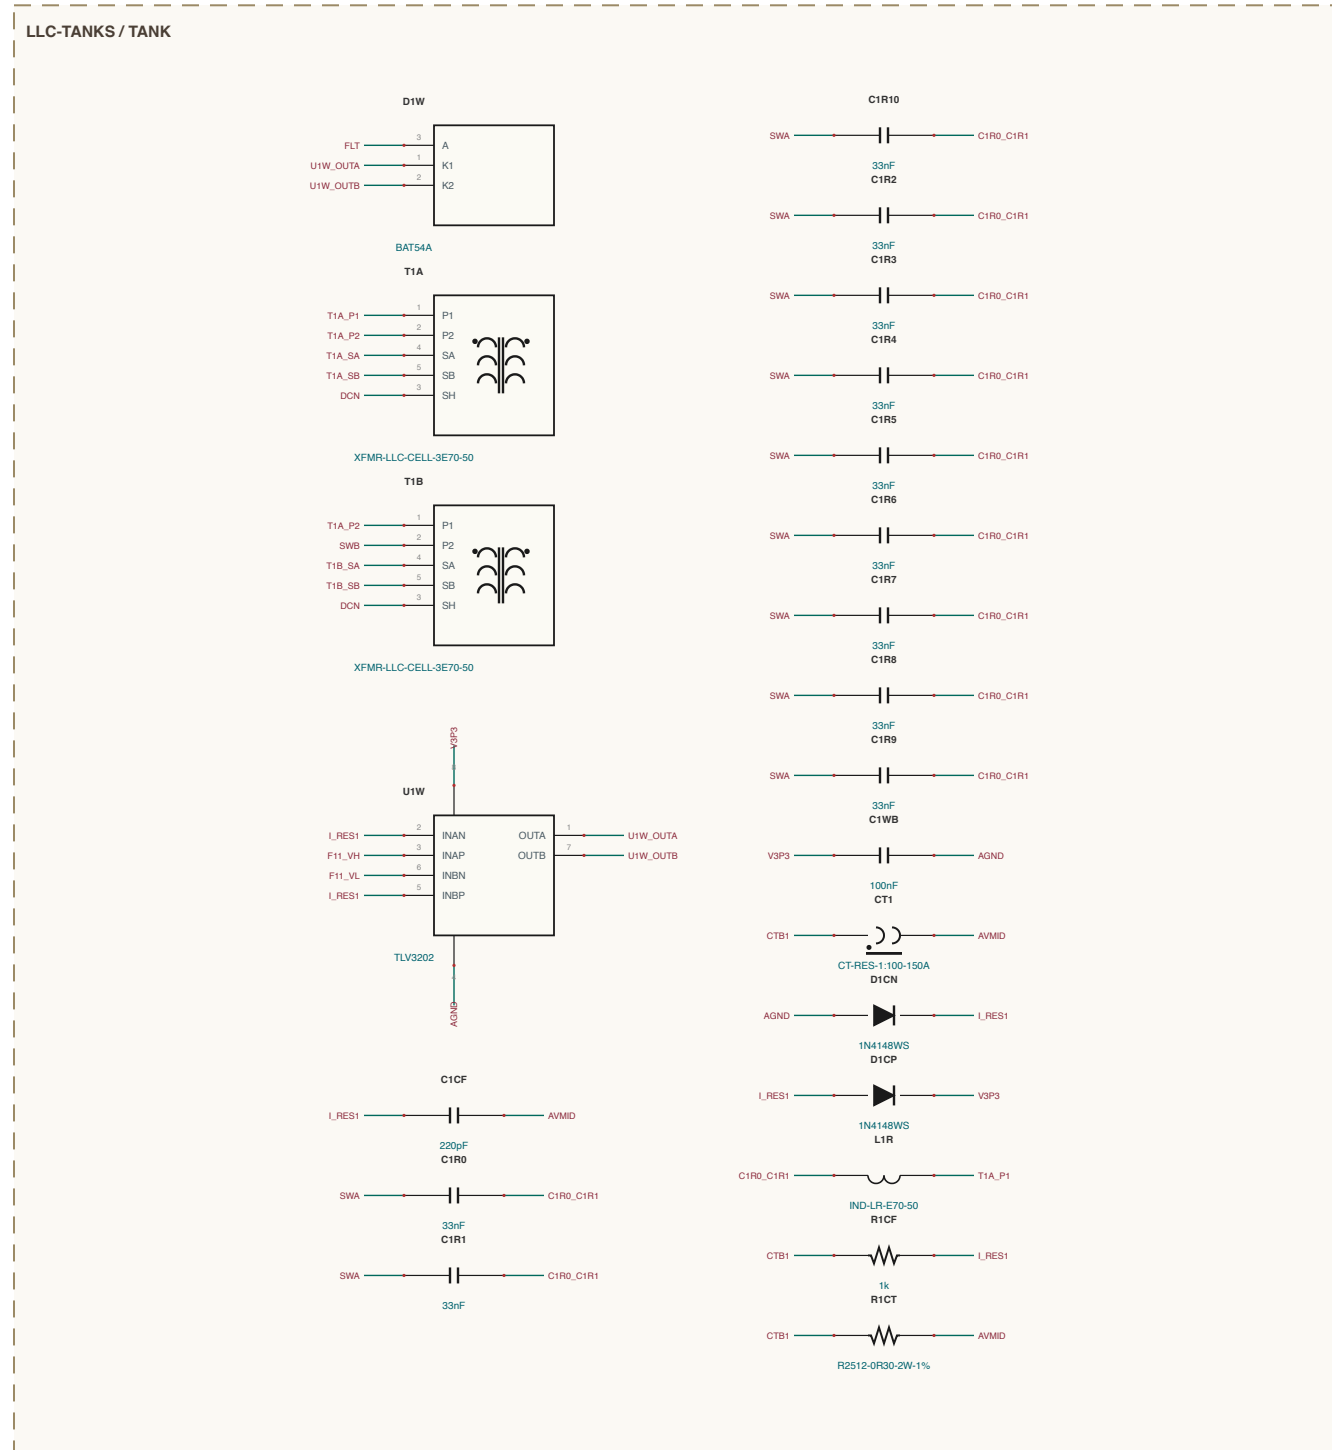
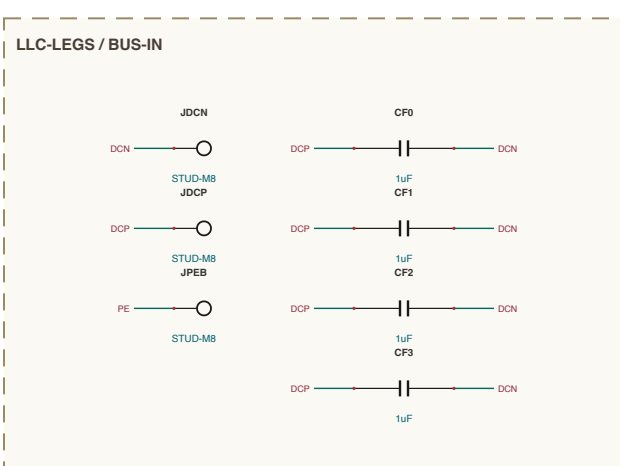
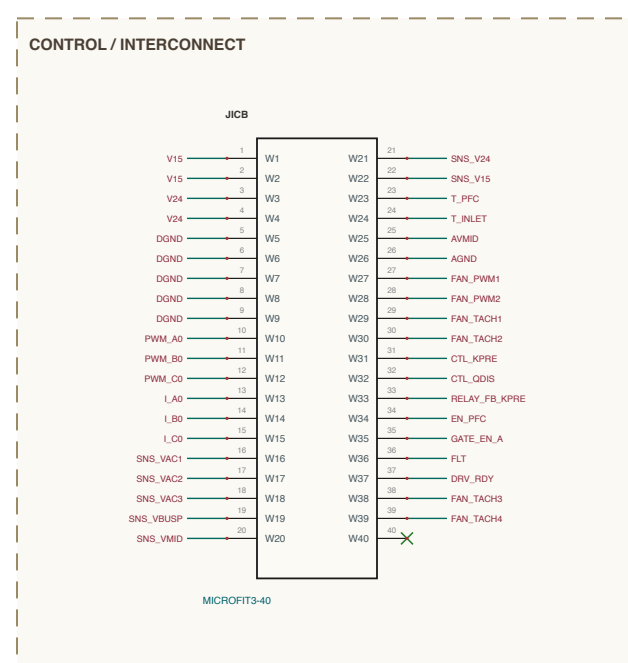
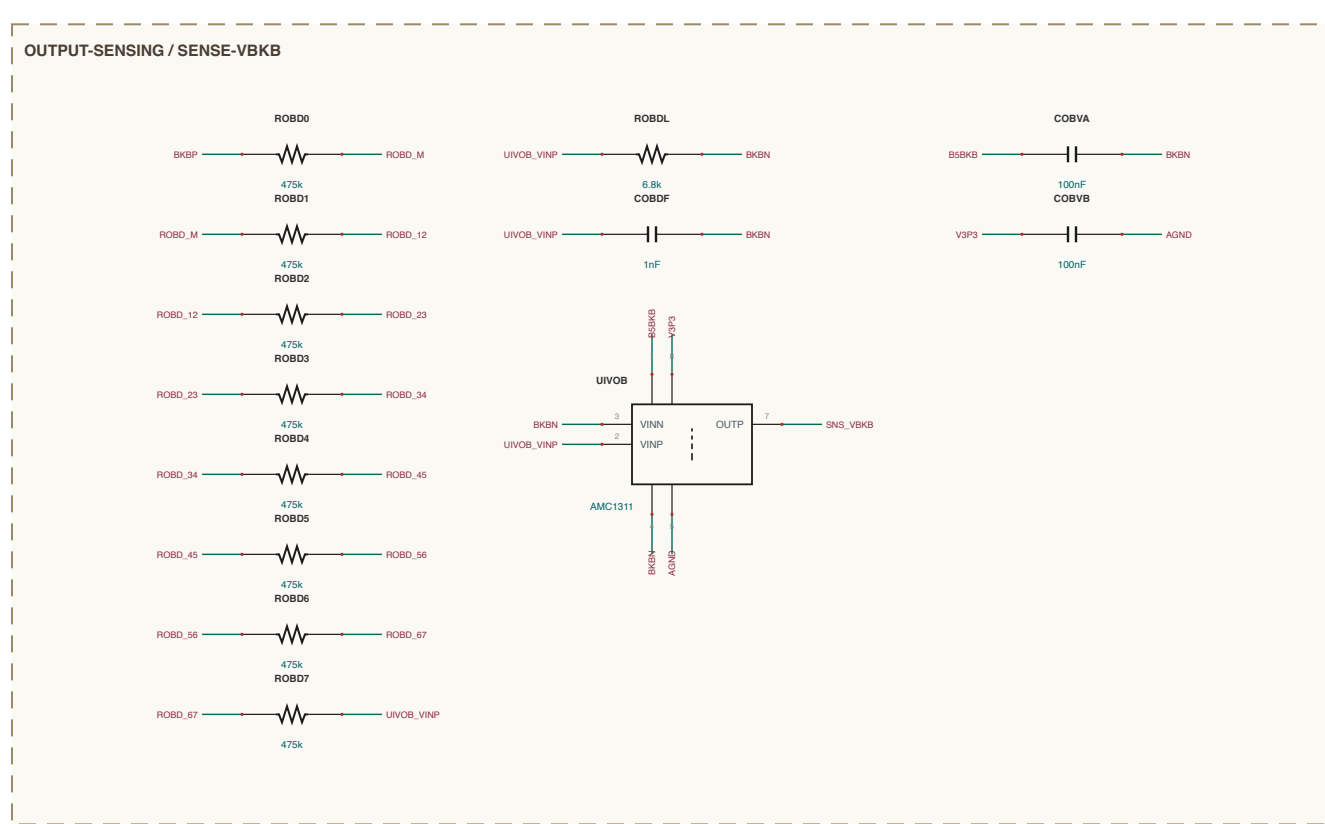
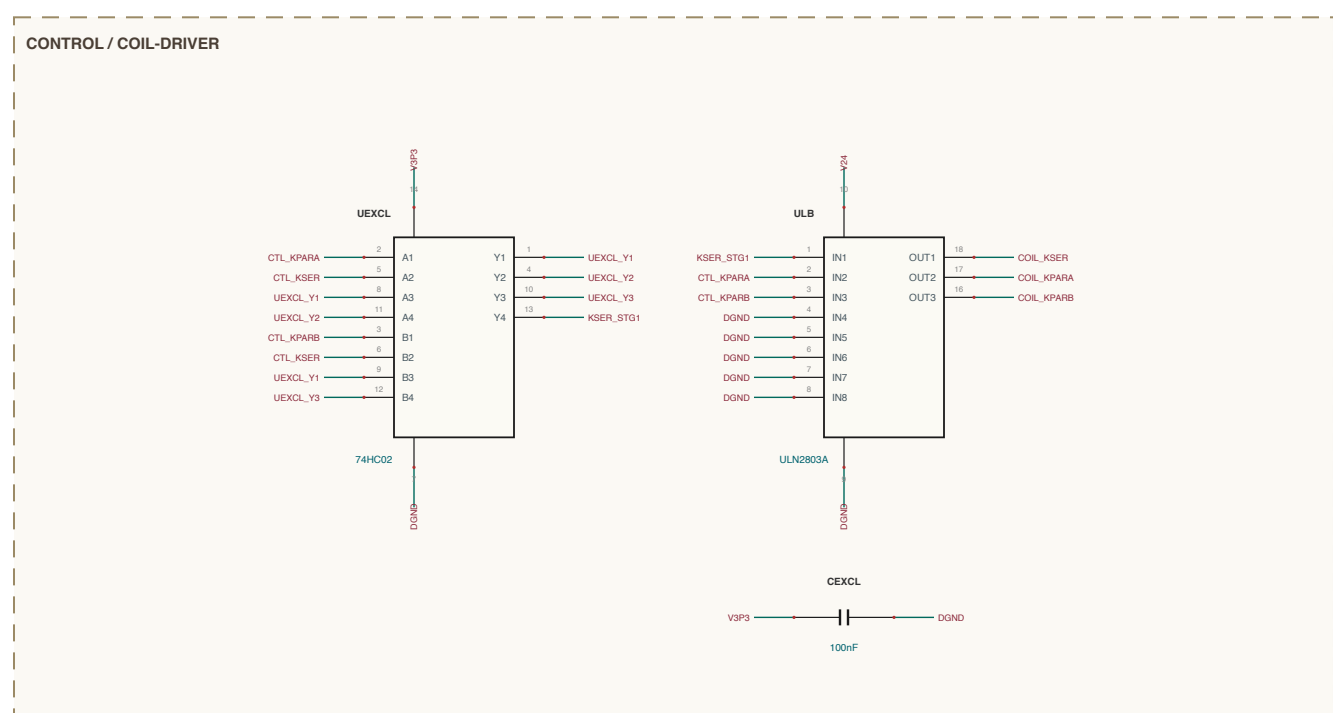
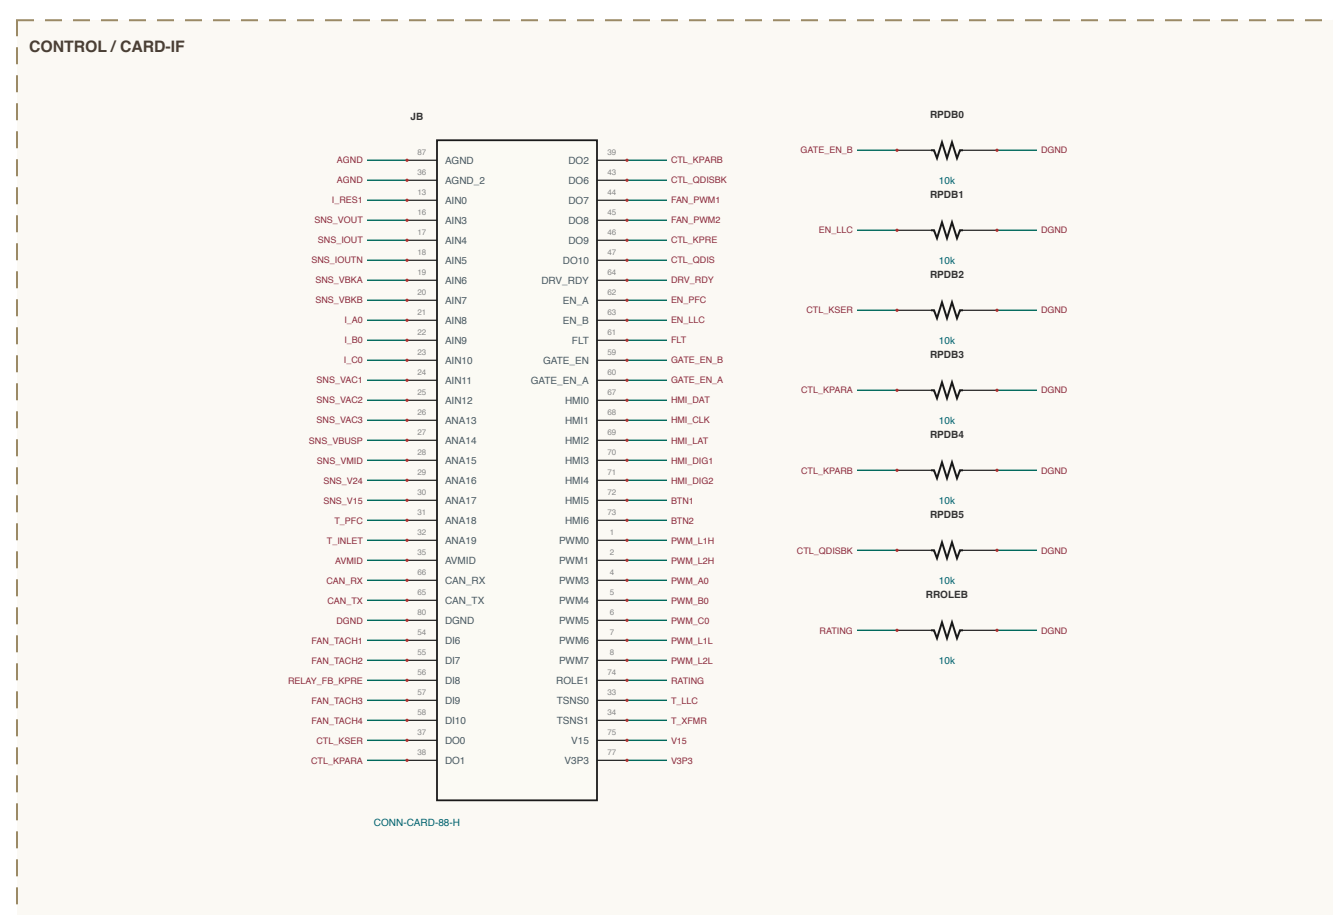
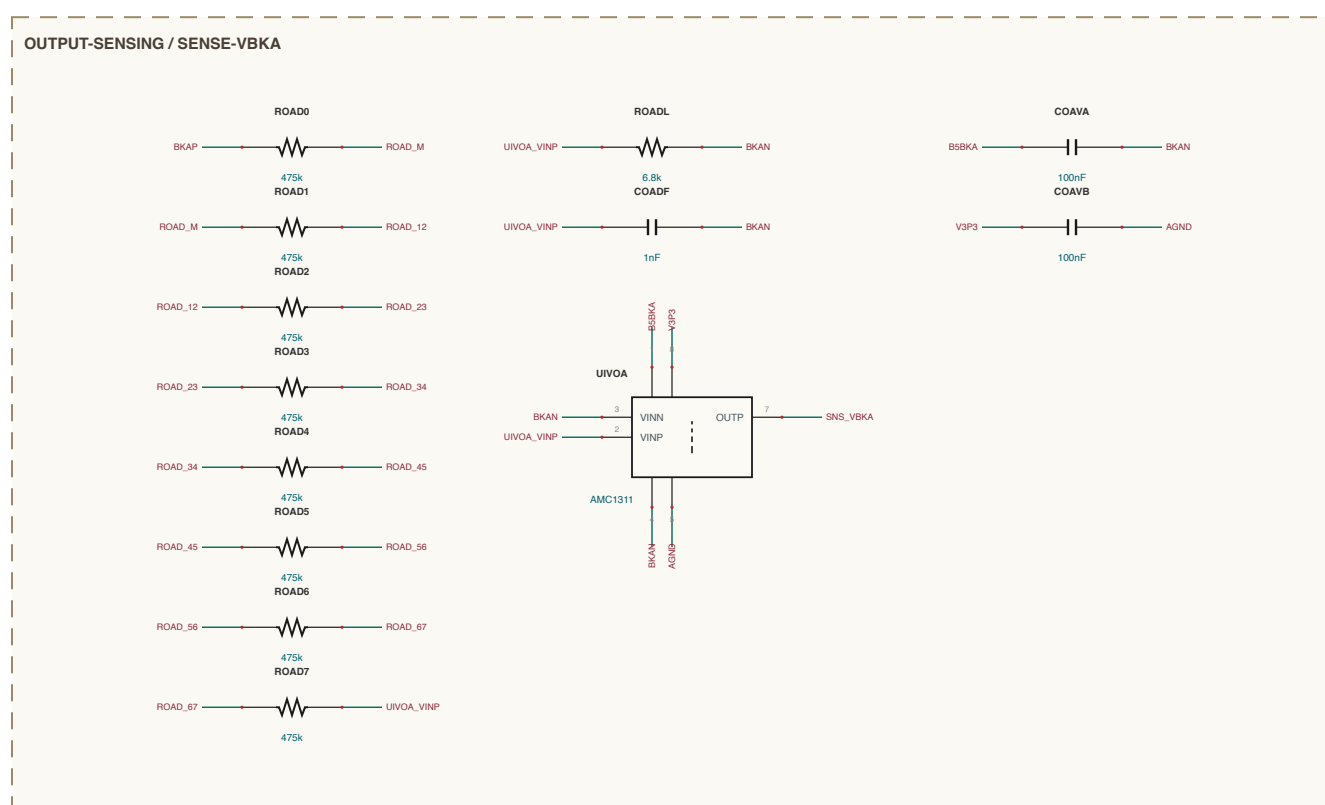
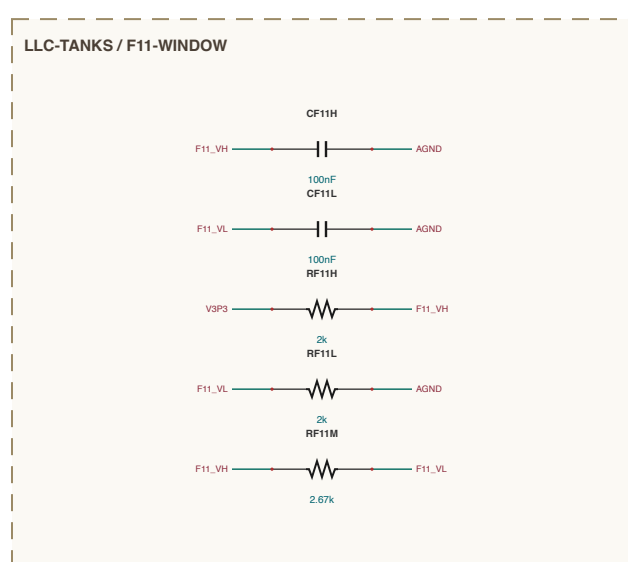
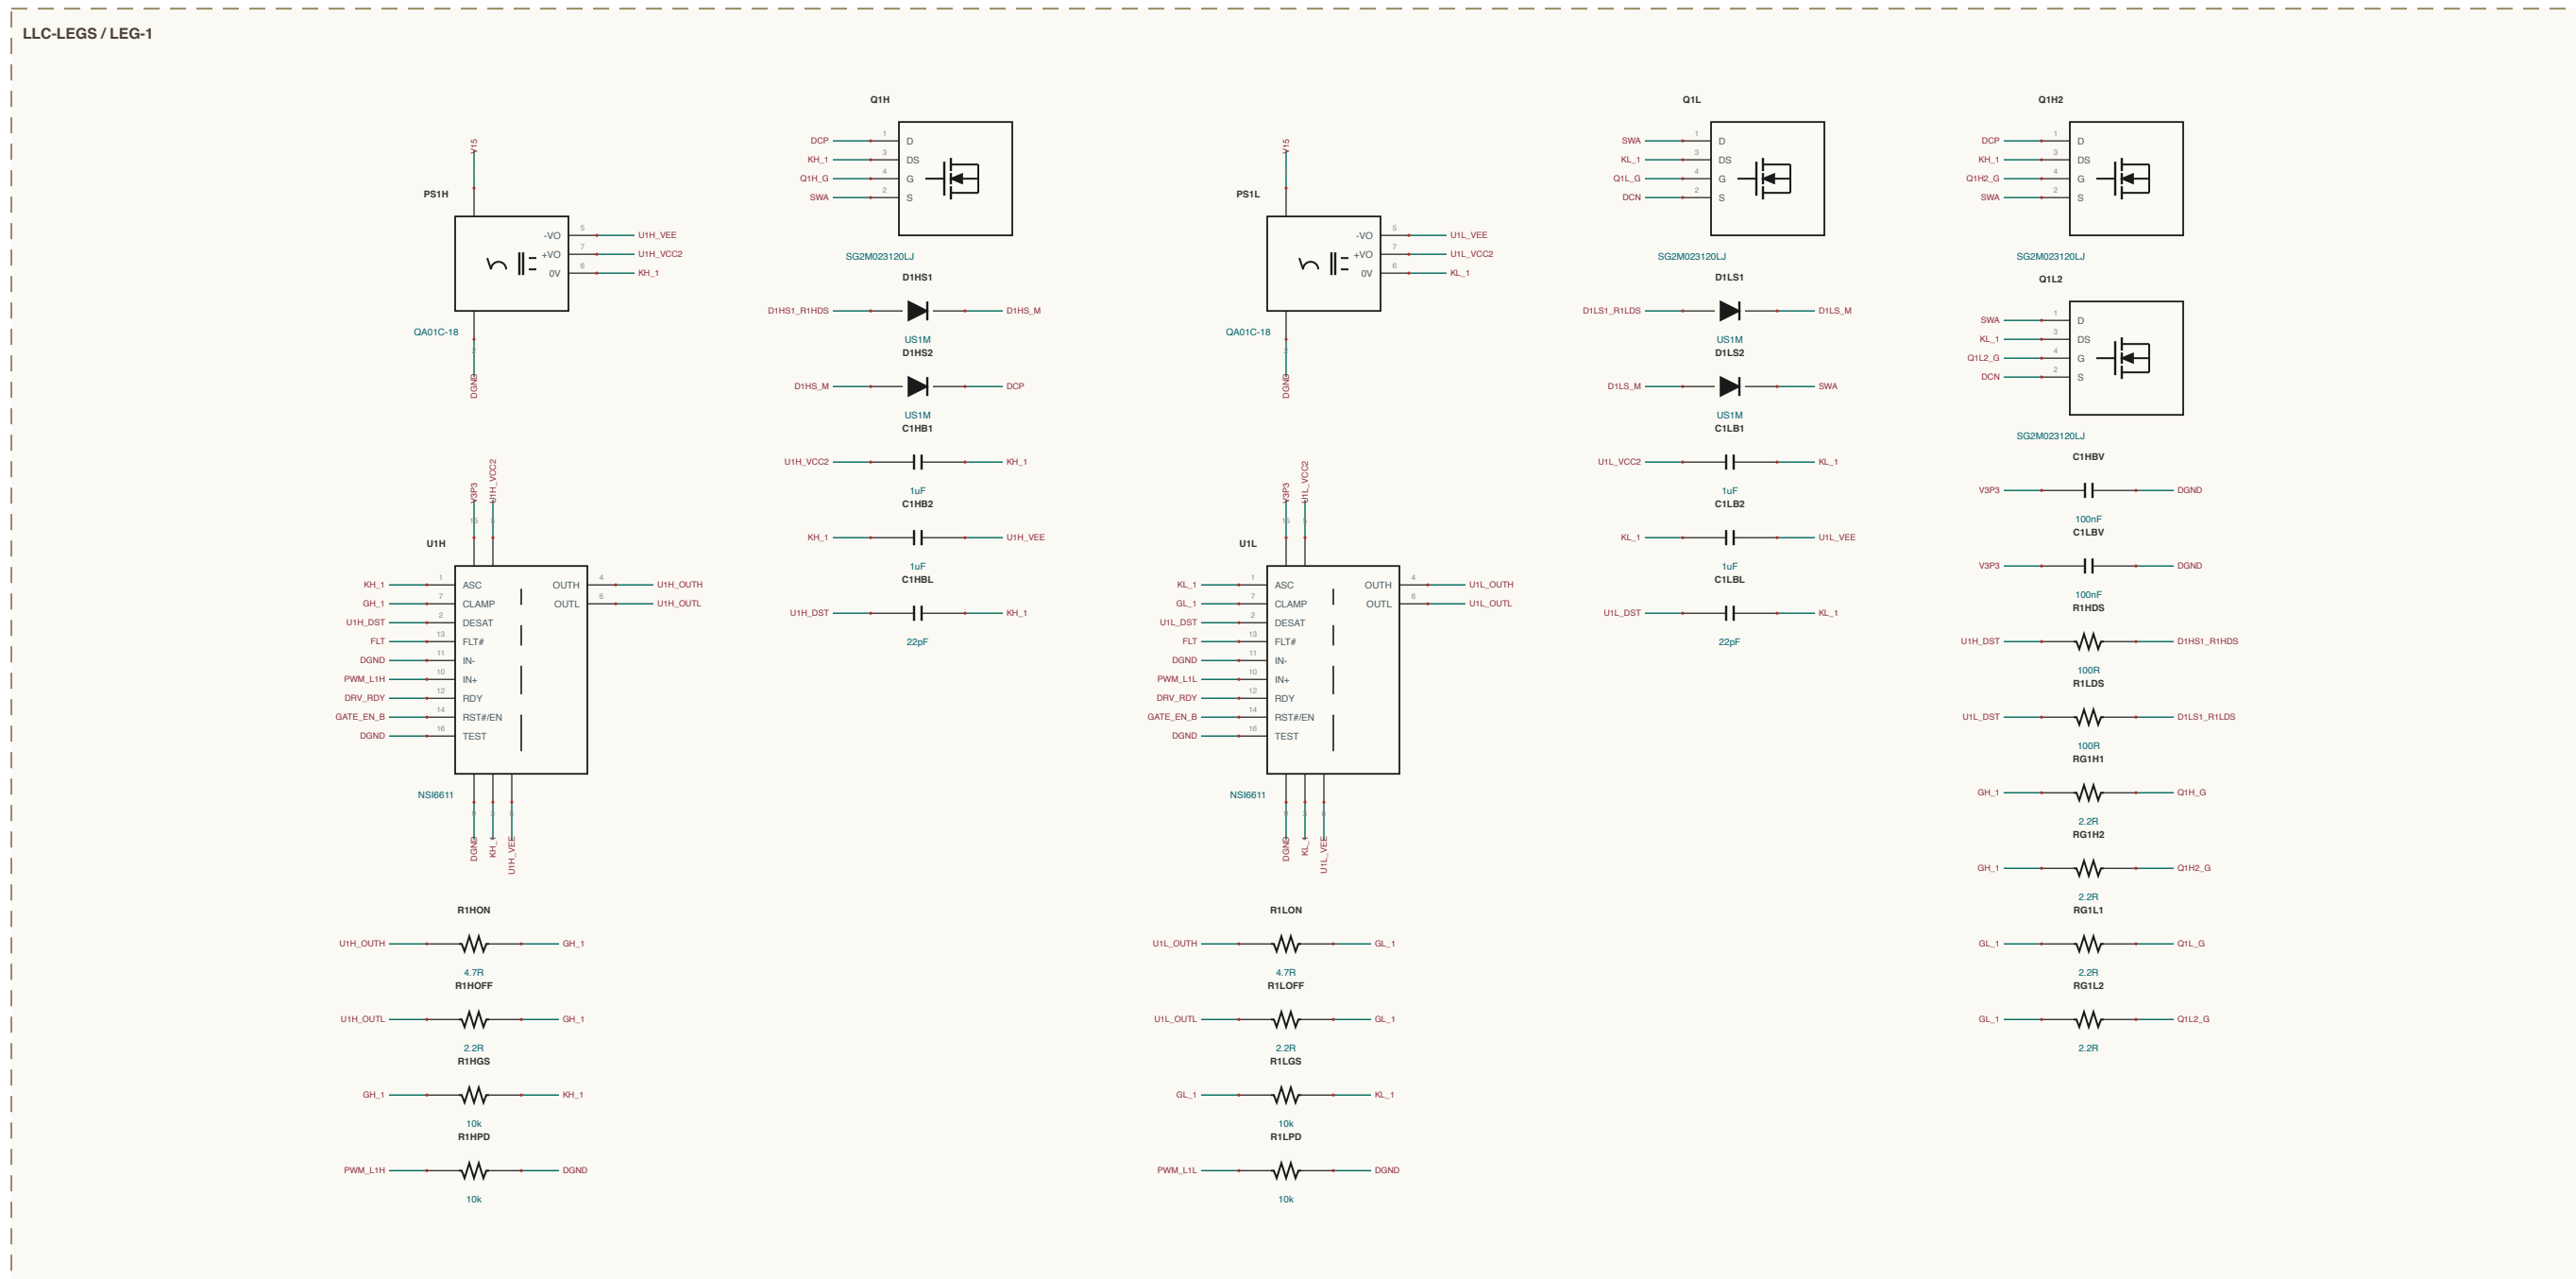
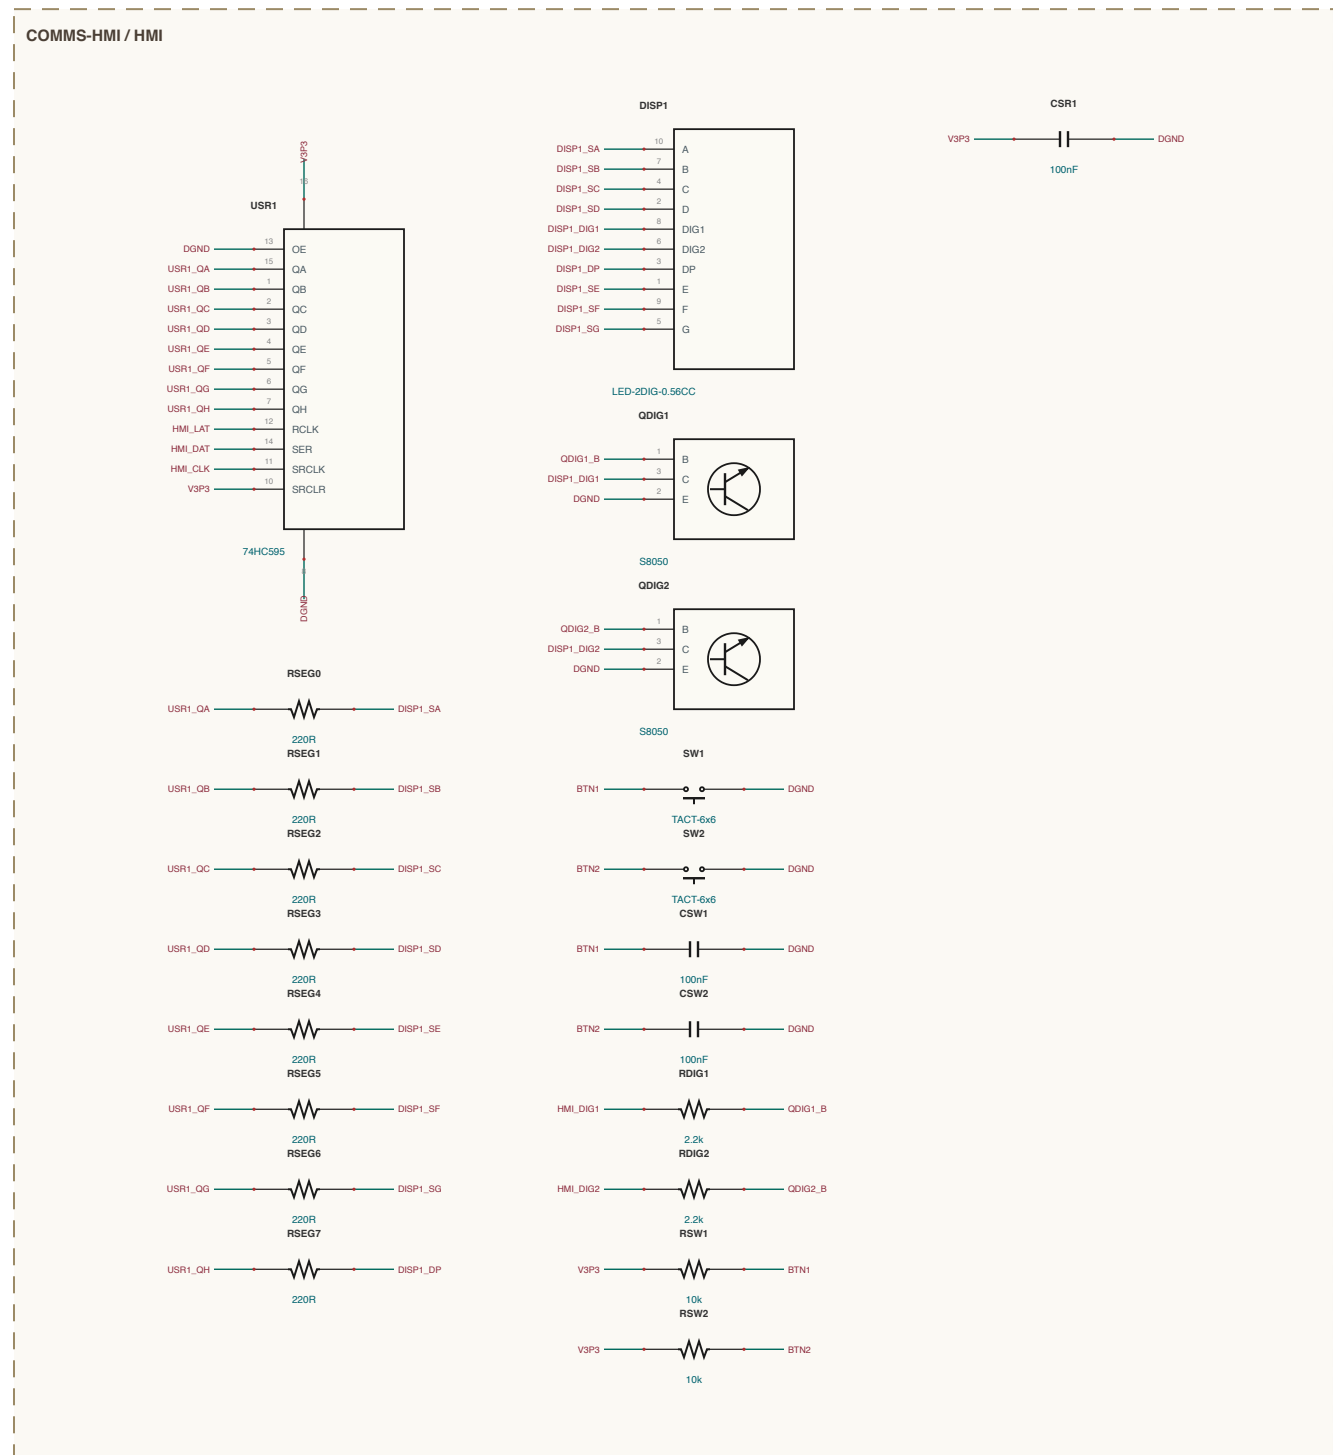
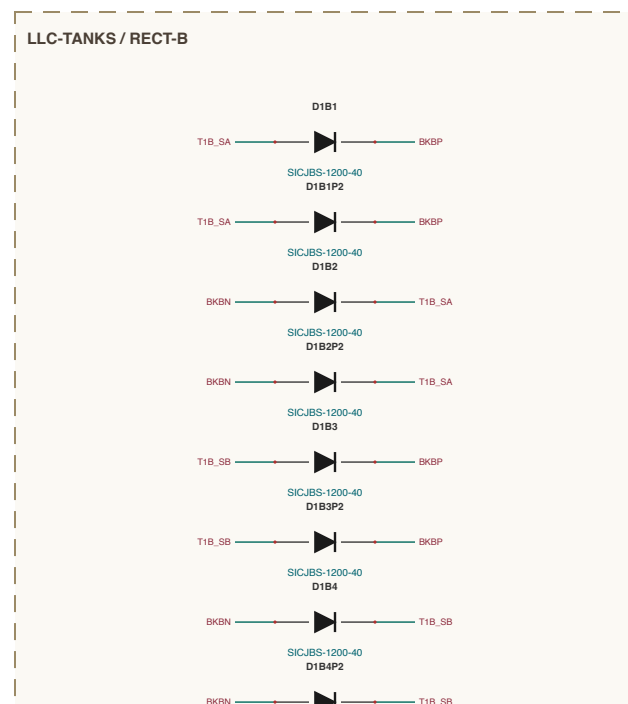
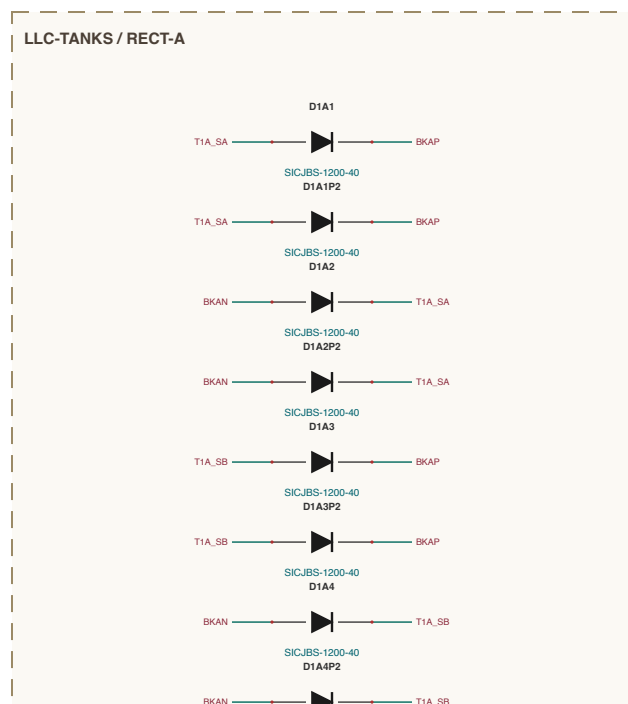
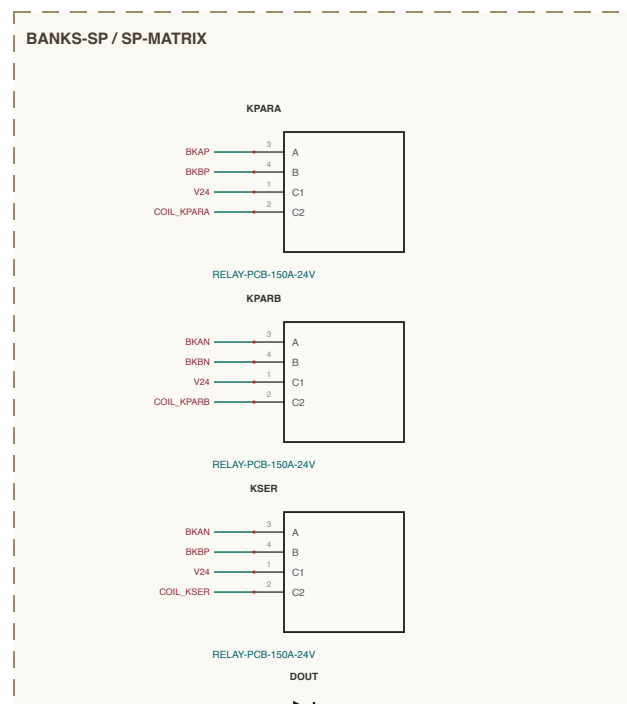


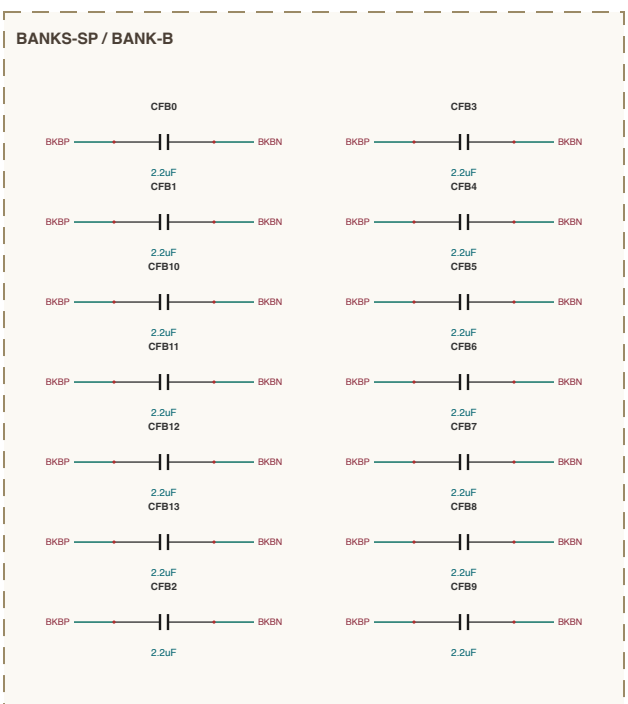

SHEET INDEX

MW Equid BC-DC Support - 3 of 3

OUTPUT ADDRESS - 6 sections
BASIS.SP - 8 sections
LIC TAXES - 8 sections
CONTROL - 3 sections
LIC LEOS - 3 sections
COWMS-HB - 2 sections
ms D-A - 12 sections - 278 components

NET NAMING

Internal junctions are named for what they join

Unrel. «Pb» node at that IC pin e.g. U10A, V10P

Relatm. M midpoint of a series pair e.g. RESA2A, M

+ 2 more

[illegible]