




BANKS-SP / SP-MATRIX

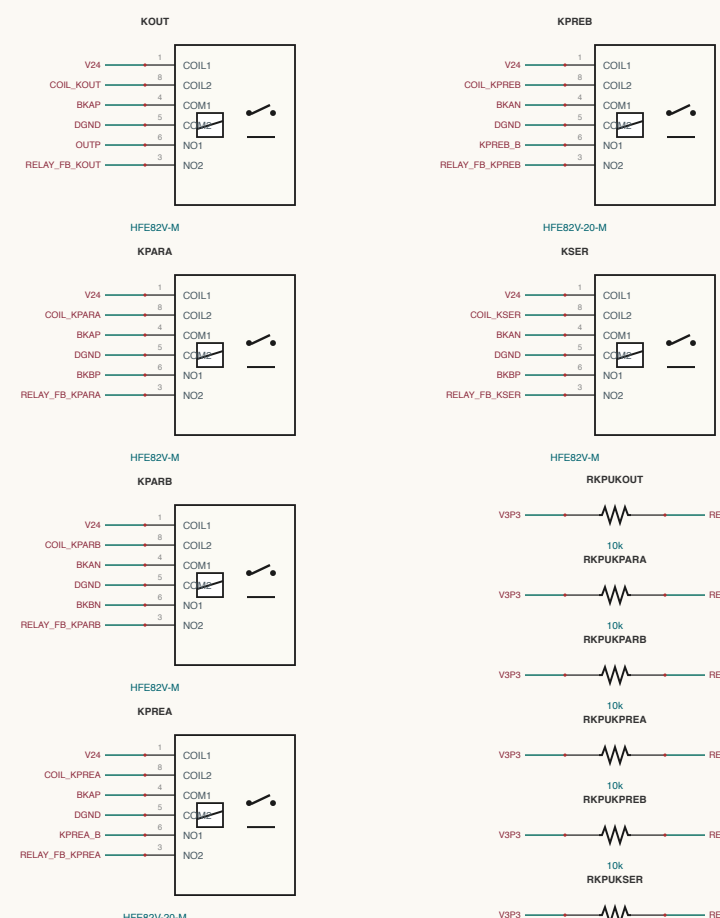


BANKS-SP / BANK-B

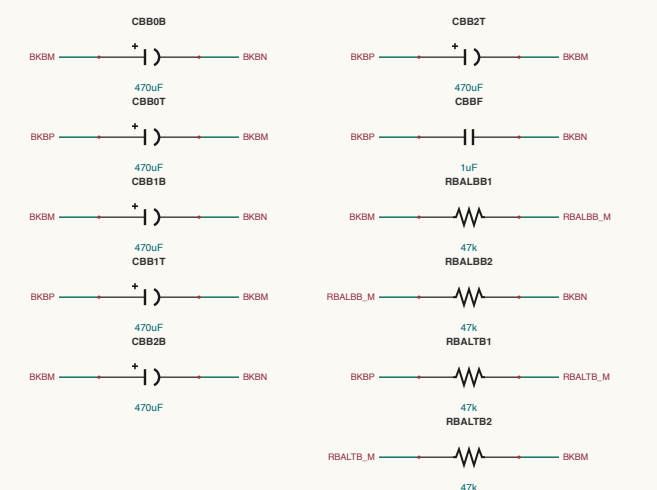


COMBS-HB / HB

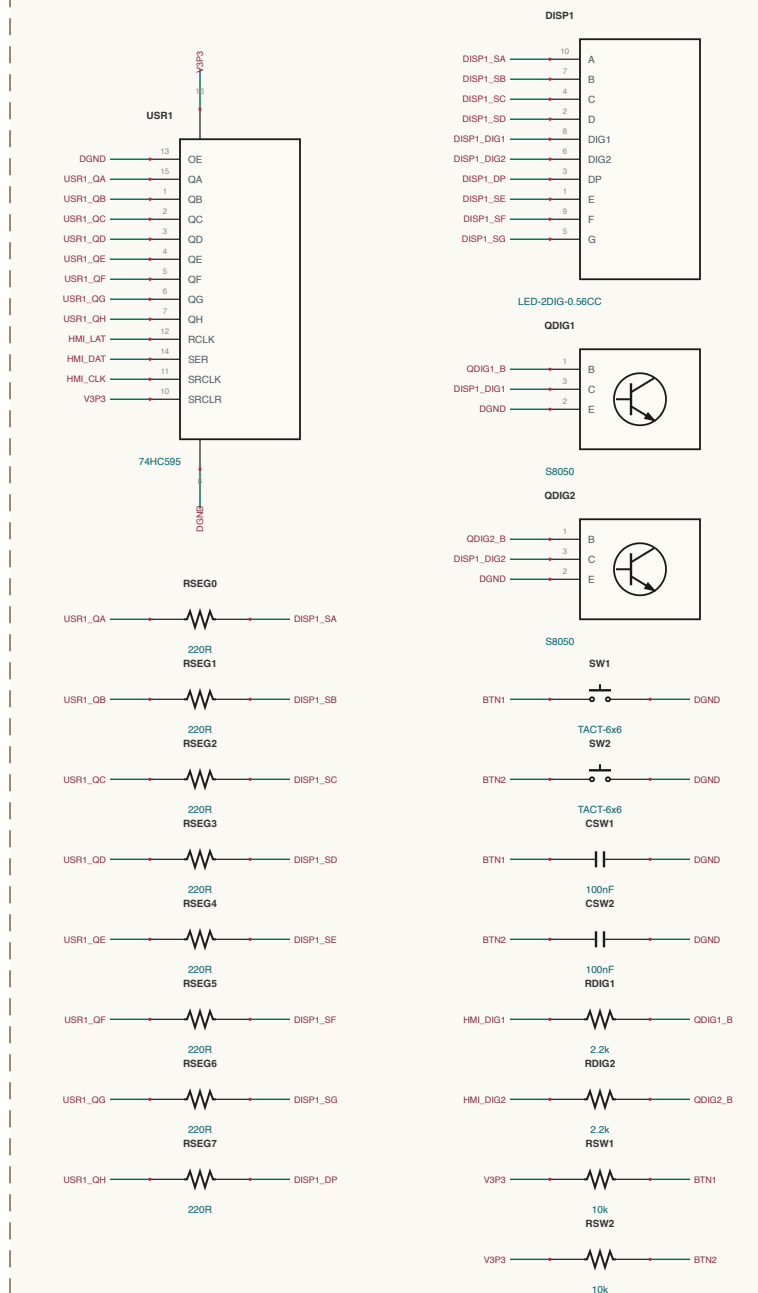


COMBS-HB / CAN

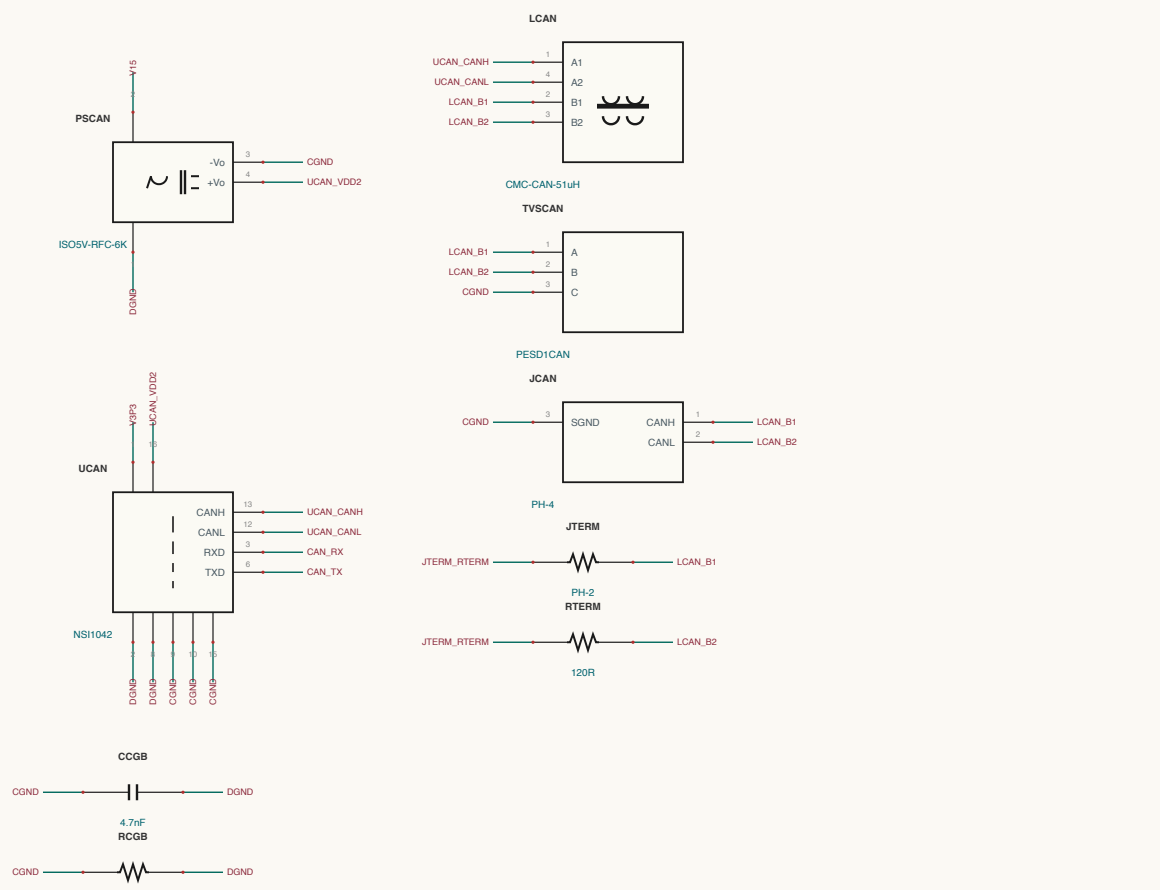


CONTROL / CARD-IP

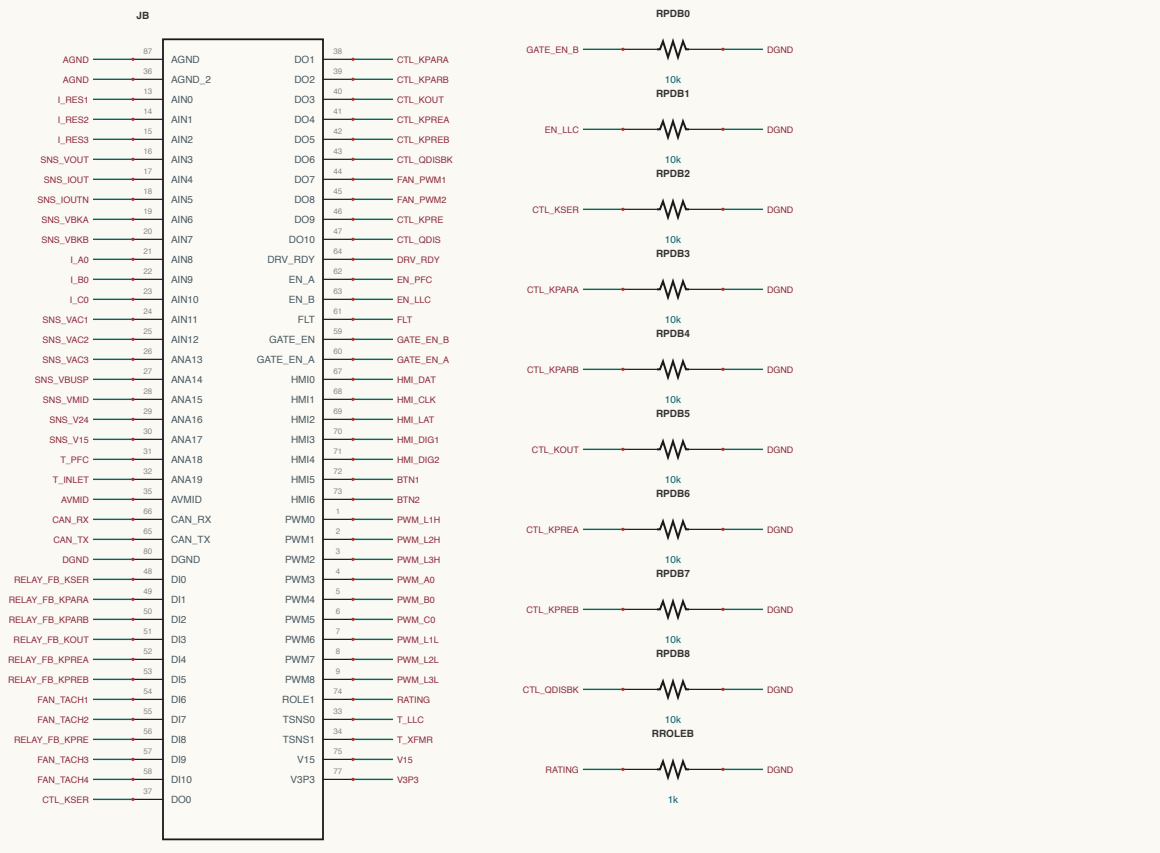


BANKS-SP / BLEEDERS

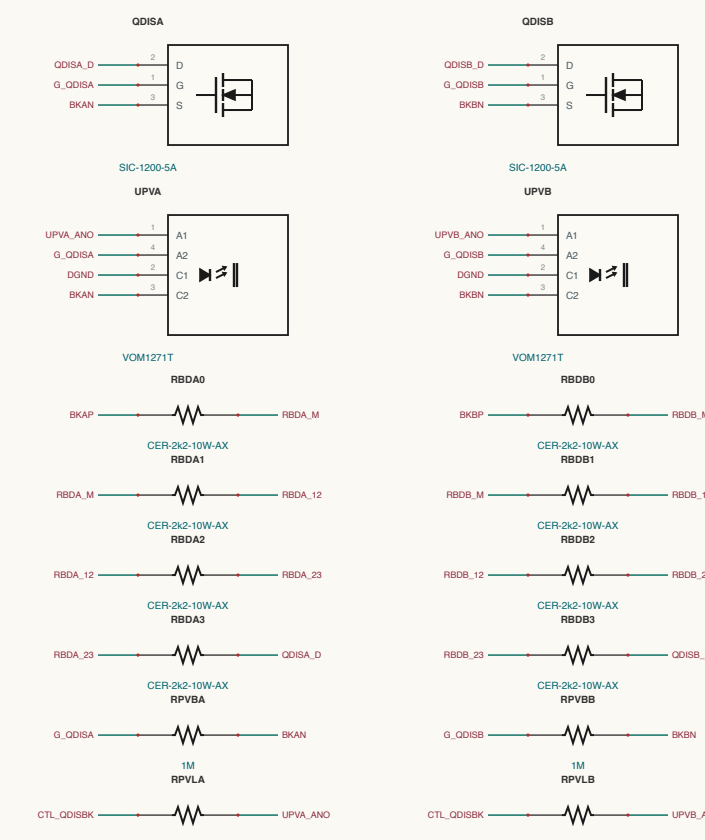


BANKS-SP / BANK-A

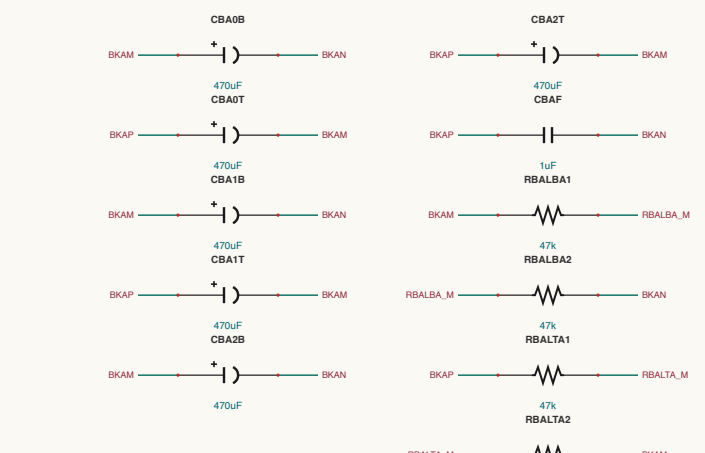


CONTROL / INTERCONNECT

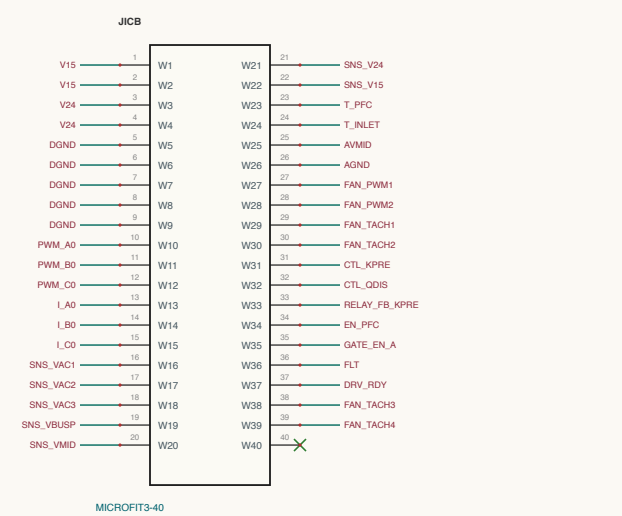


CONTROL / COL-DRIVER

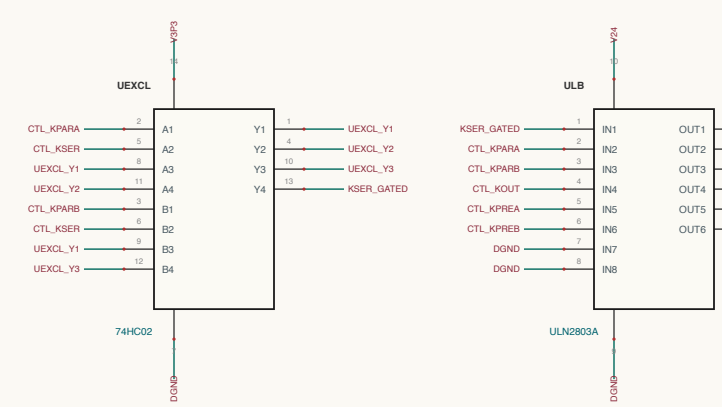


LLC-LEGS / LED-1

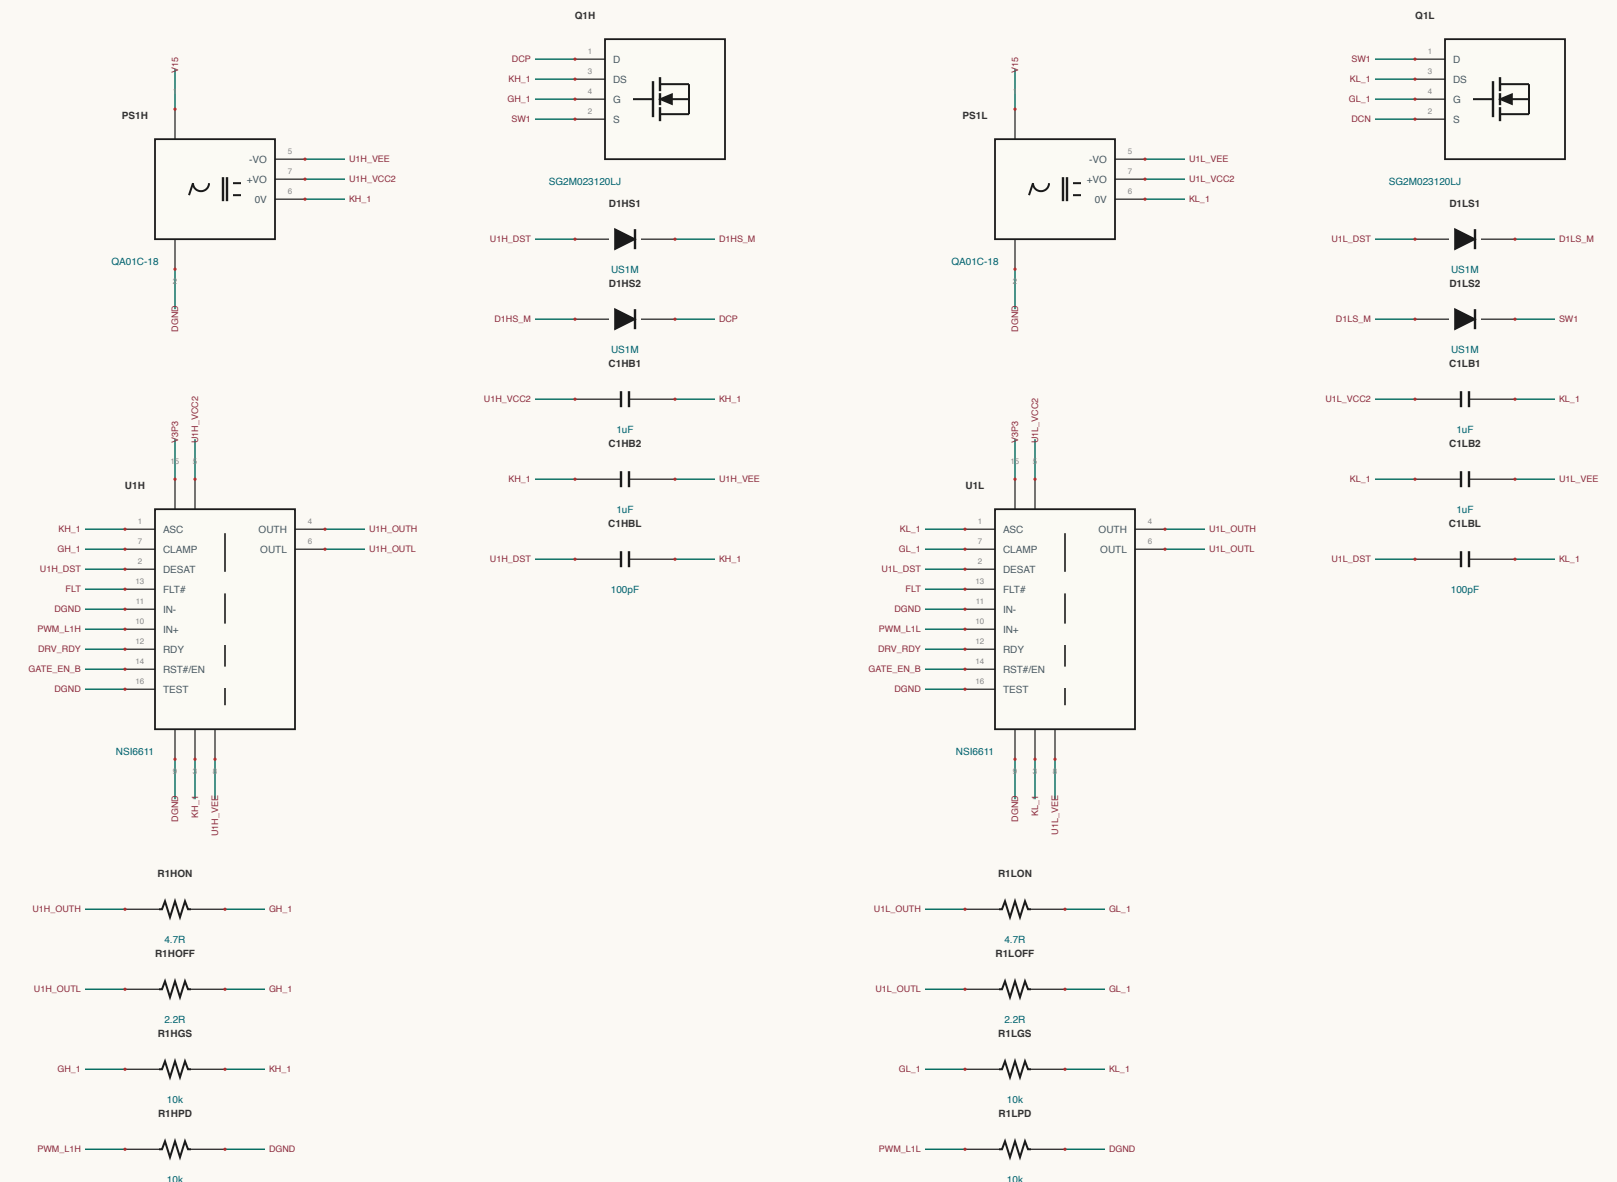


LLC-LEGS / LED-2

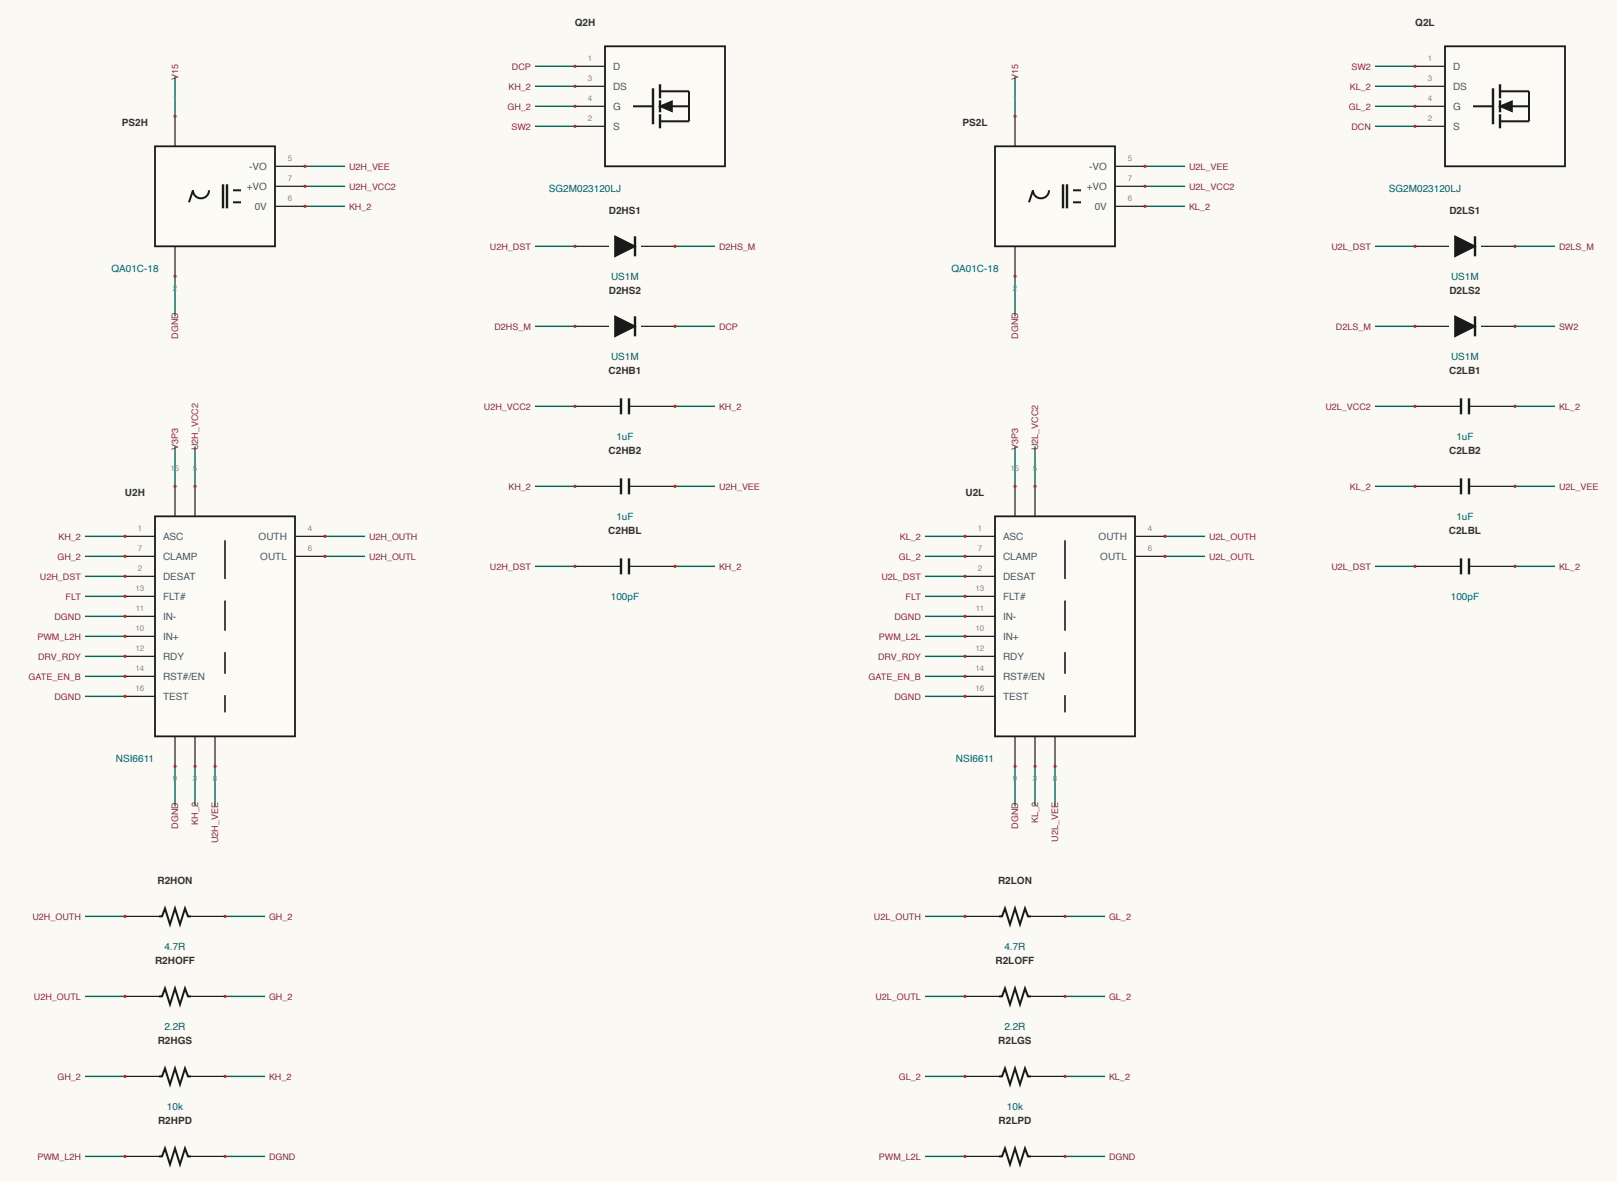


LLC-LEGS / LED-3

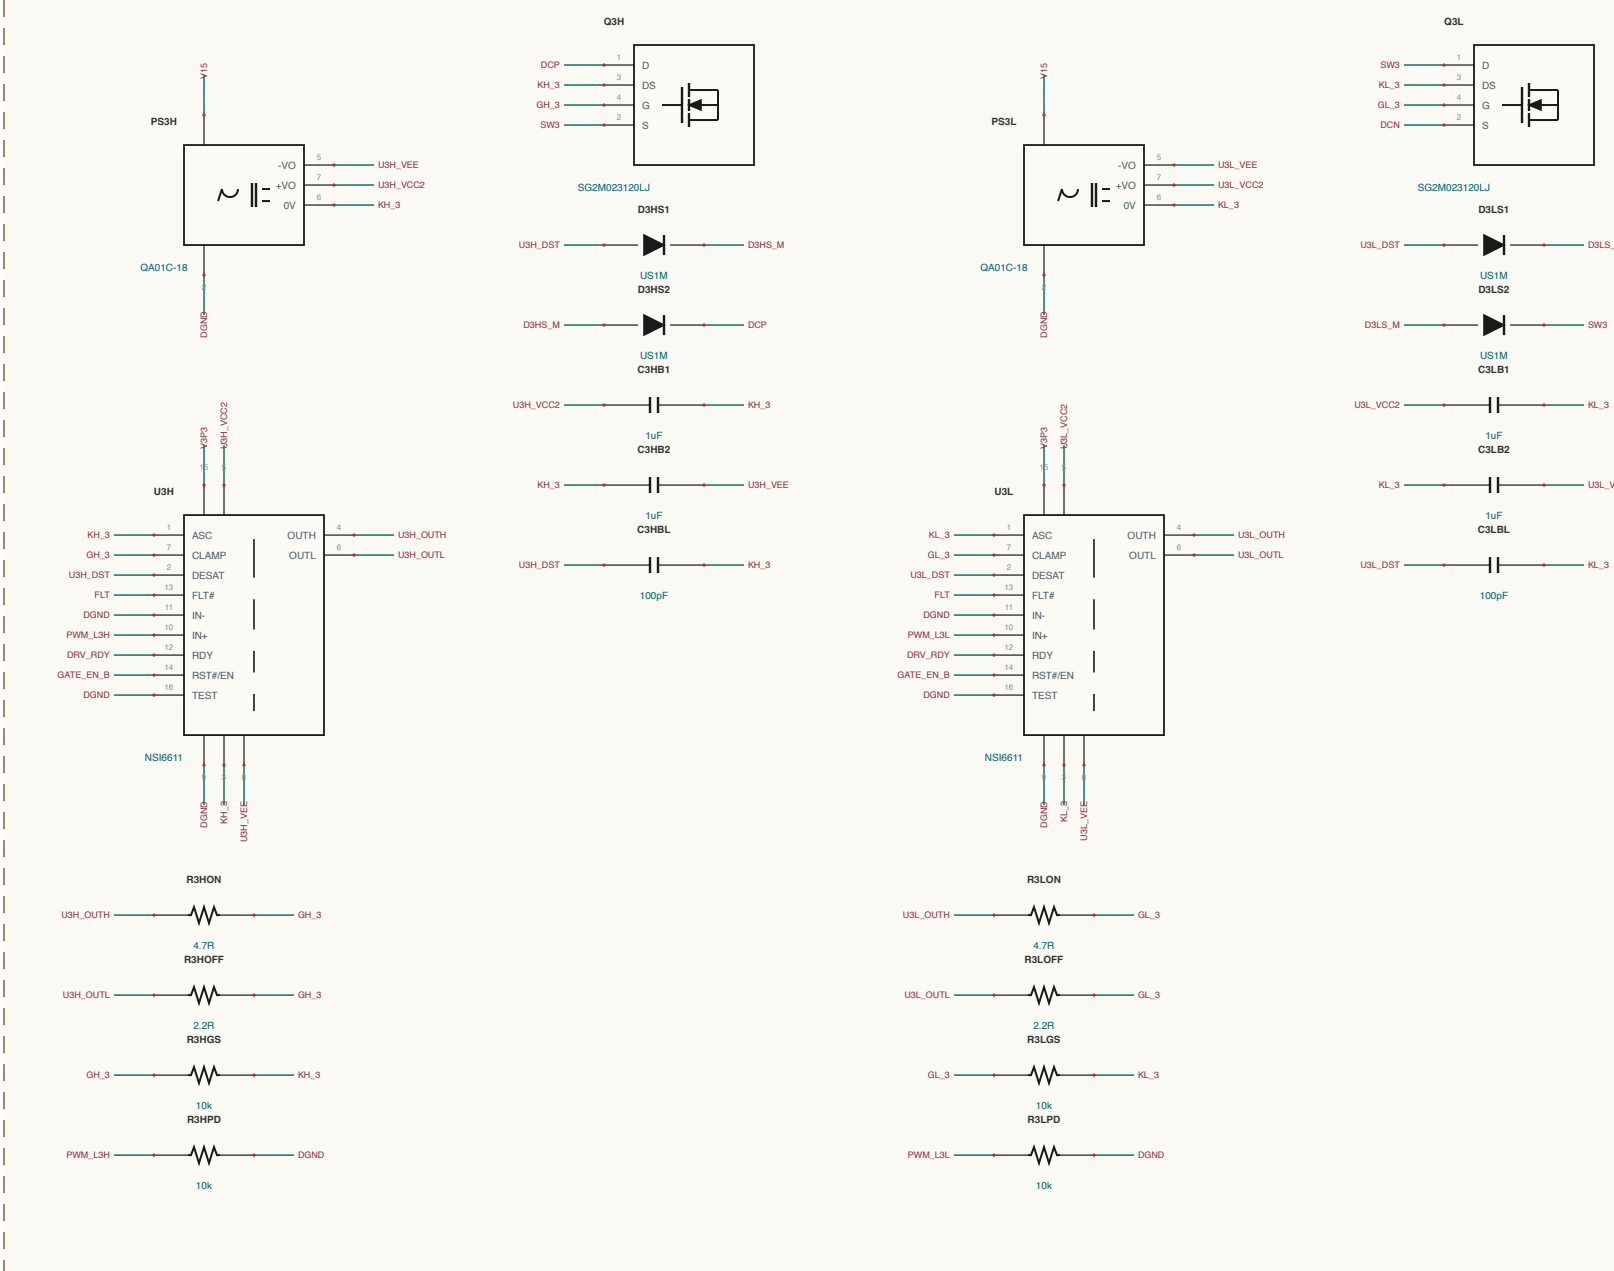


LLC-LEGS / BUS-IN

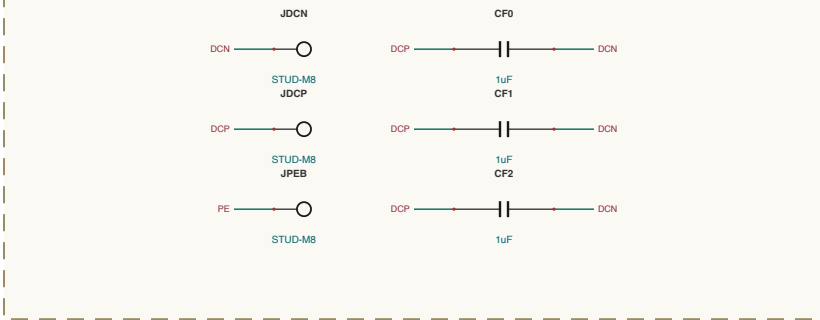


LLC-TANKS / TANK-1

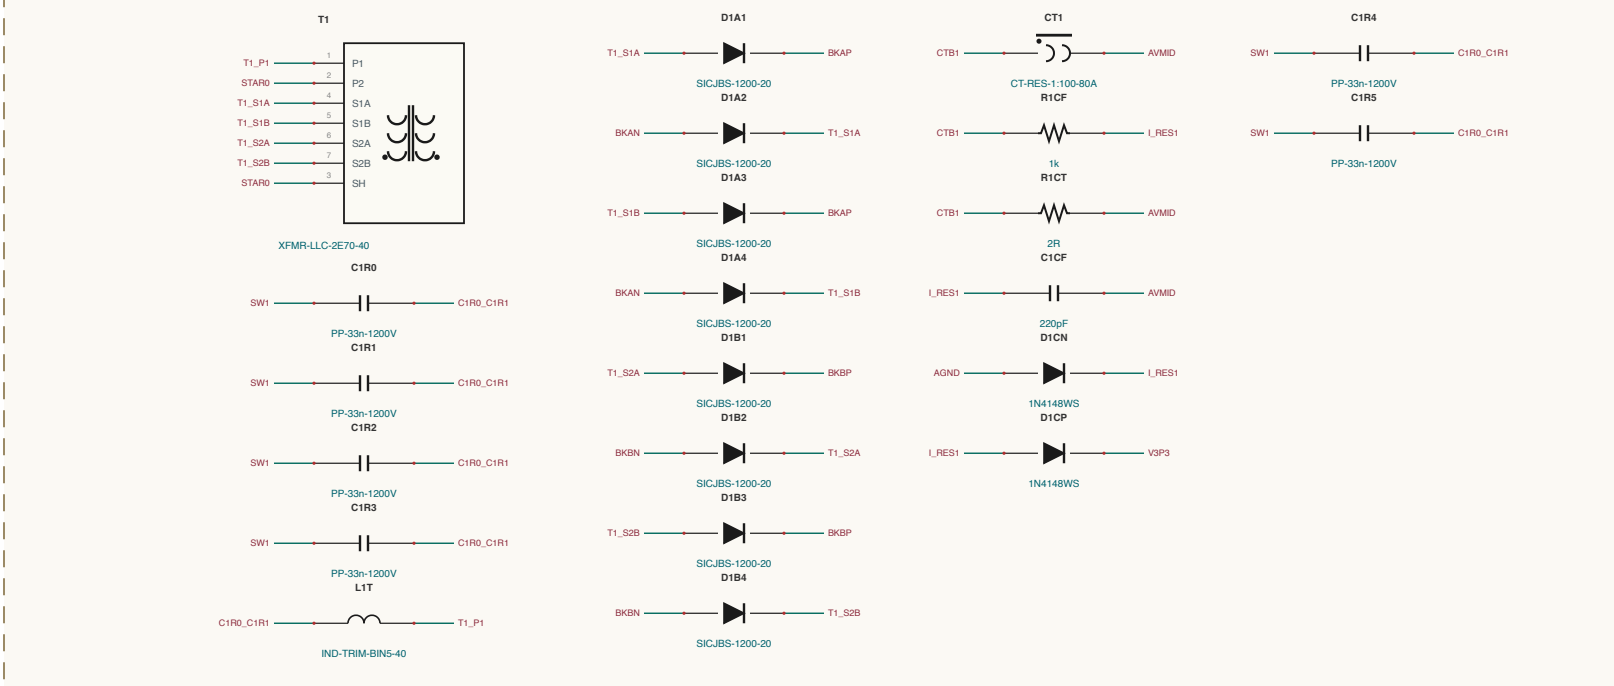


LLC-TANKS / TANK-2

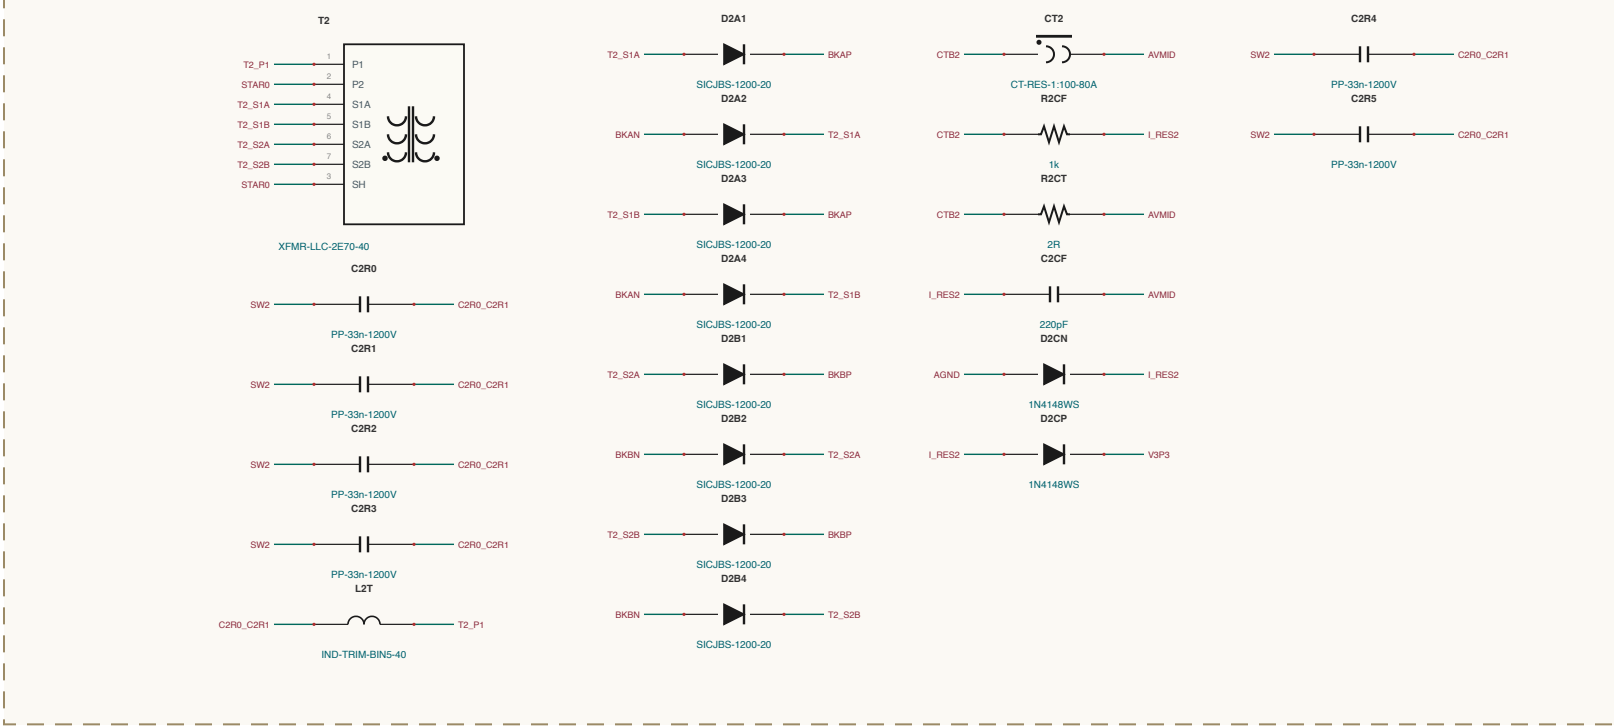


LLC-TANKS / TANK-3

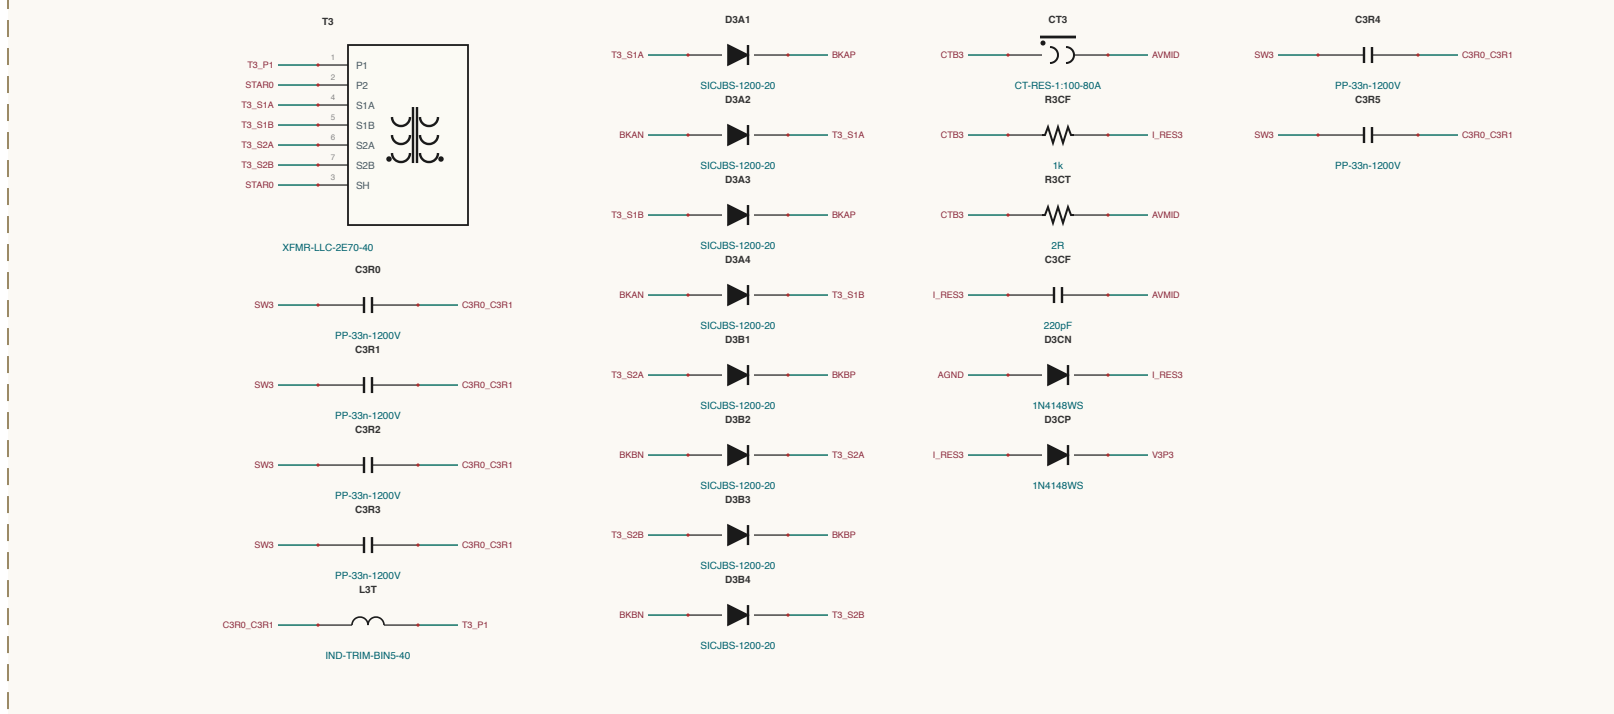


OUTPUT-SENSING / OUTPUT

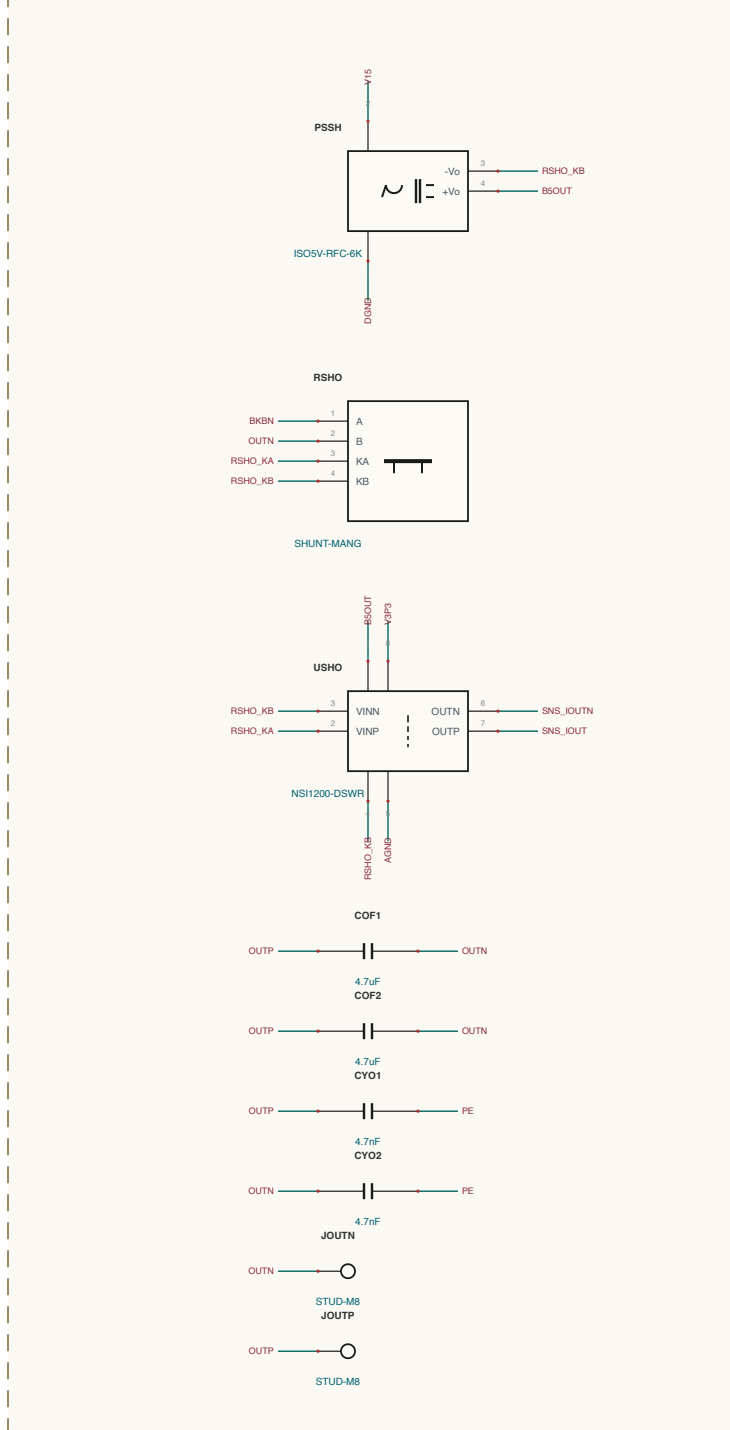


OUTPUT-SENSING / SENSE-VOLTA

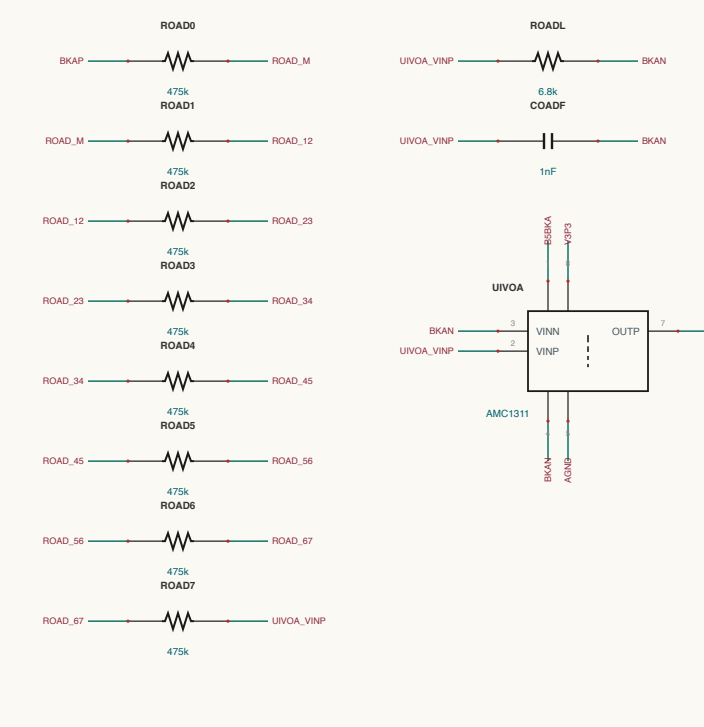


OUTPUT-SENSING / SENSE-VOLTB

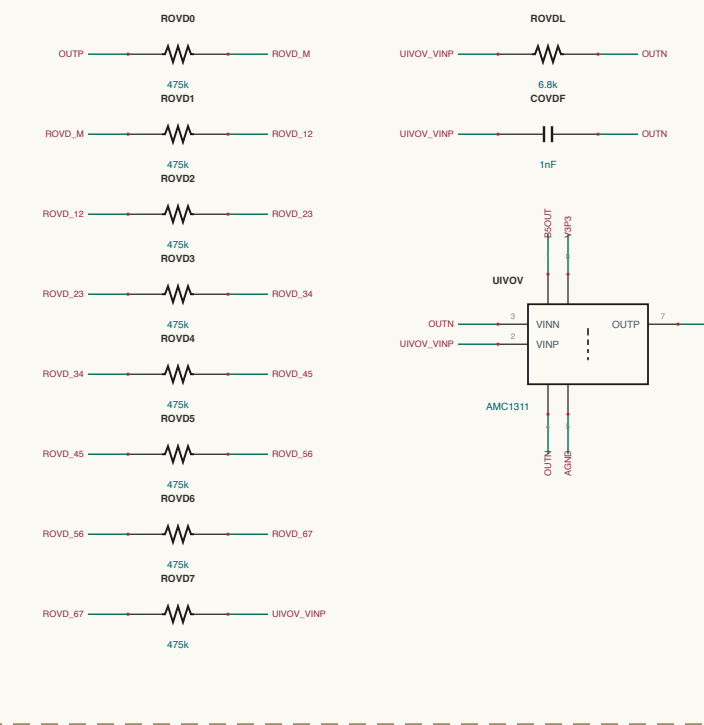


OUTPUT-SENSING / ISO-BIAS

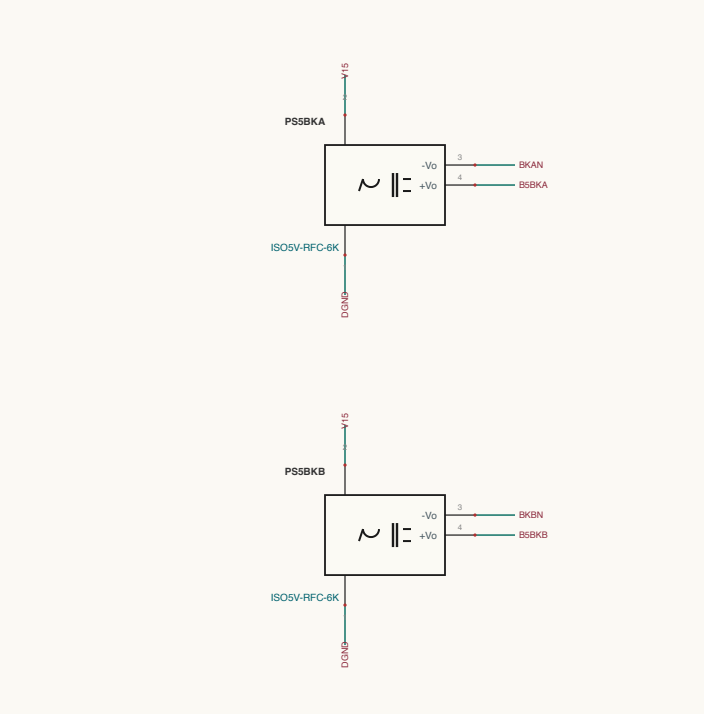

OUTPUT-SENSING / SENSE-VKBS

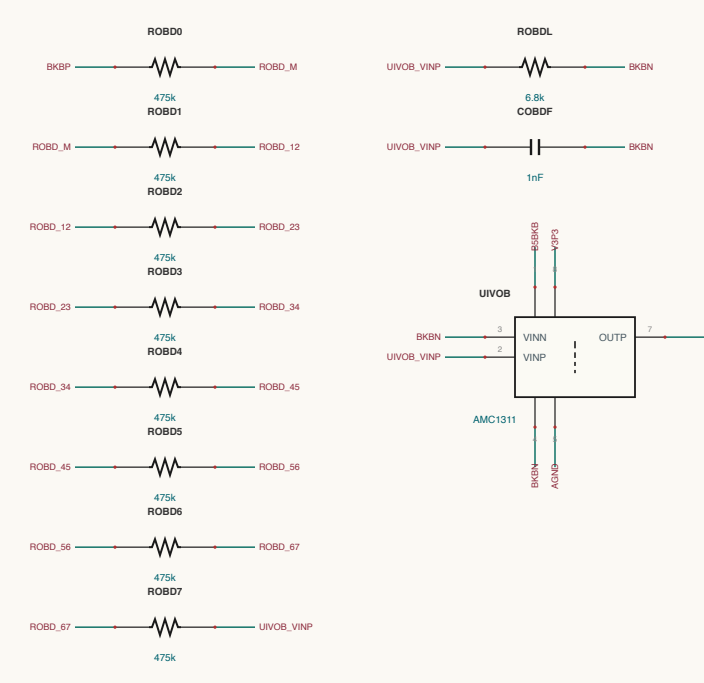

OUTPUT-SENSING / NTC

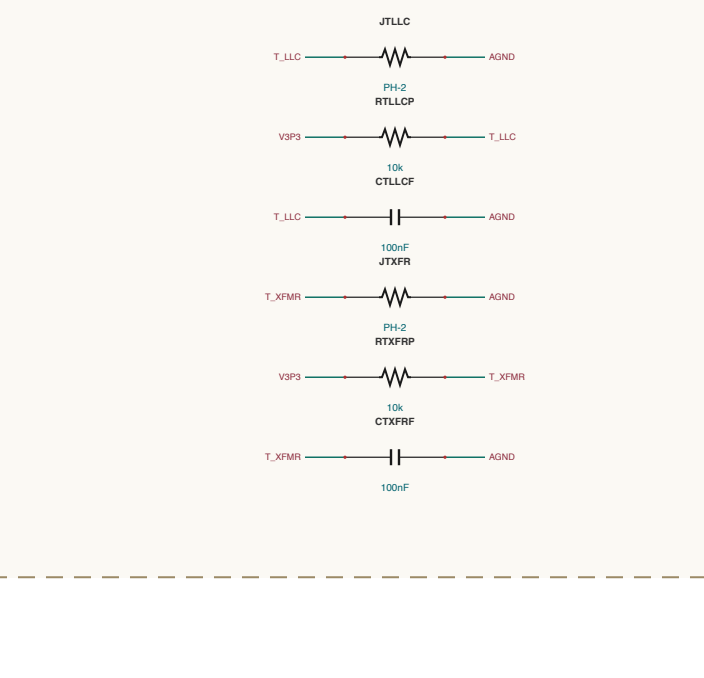

SHEET INDEX

40 kW DC-DC (upper) 2 of 3

OUTPUT-SENSING - 6 sections

BANKS-SP - 4 sections

LLC-LEGS - 4 sections

CONTROL - 3 sections

LLC-TANKS - 3 sections

COMBS-HB - 2 sections

rev 0.3 - 12 sections - 288 components

NET NAMING

Internal functions are named for what they join

Banks-SP: SP: node at that IC pin e.g. SP1A1, SP1B

Bleeders: M: midpoint of a series pair e.g. BLE1A1, M

Bleeders: -: series tap between Bleeders e.g. BLE1A1, -

All others are explicit design data