
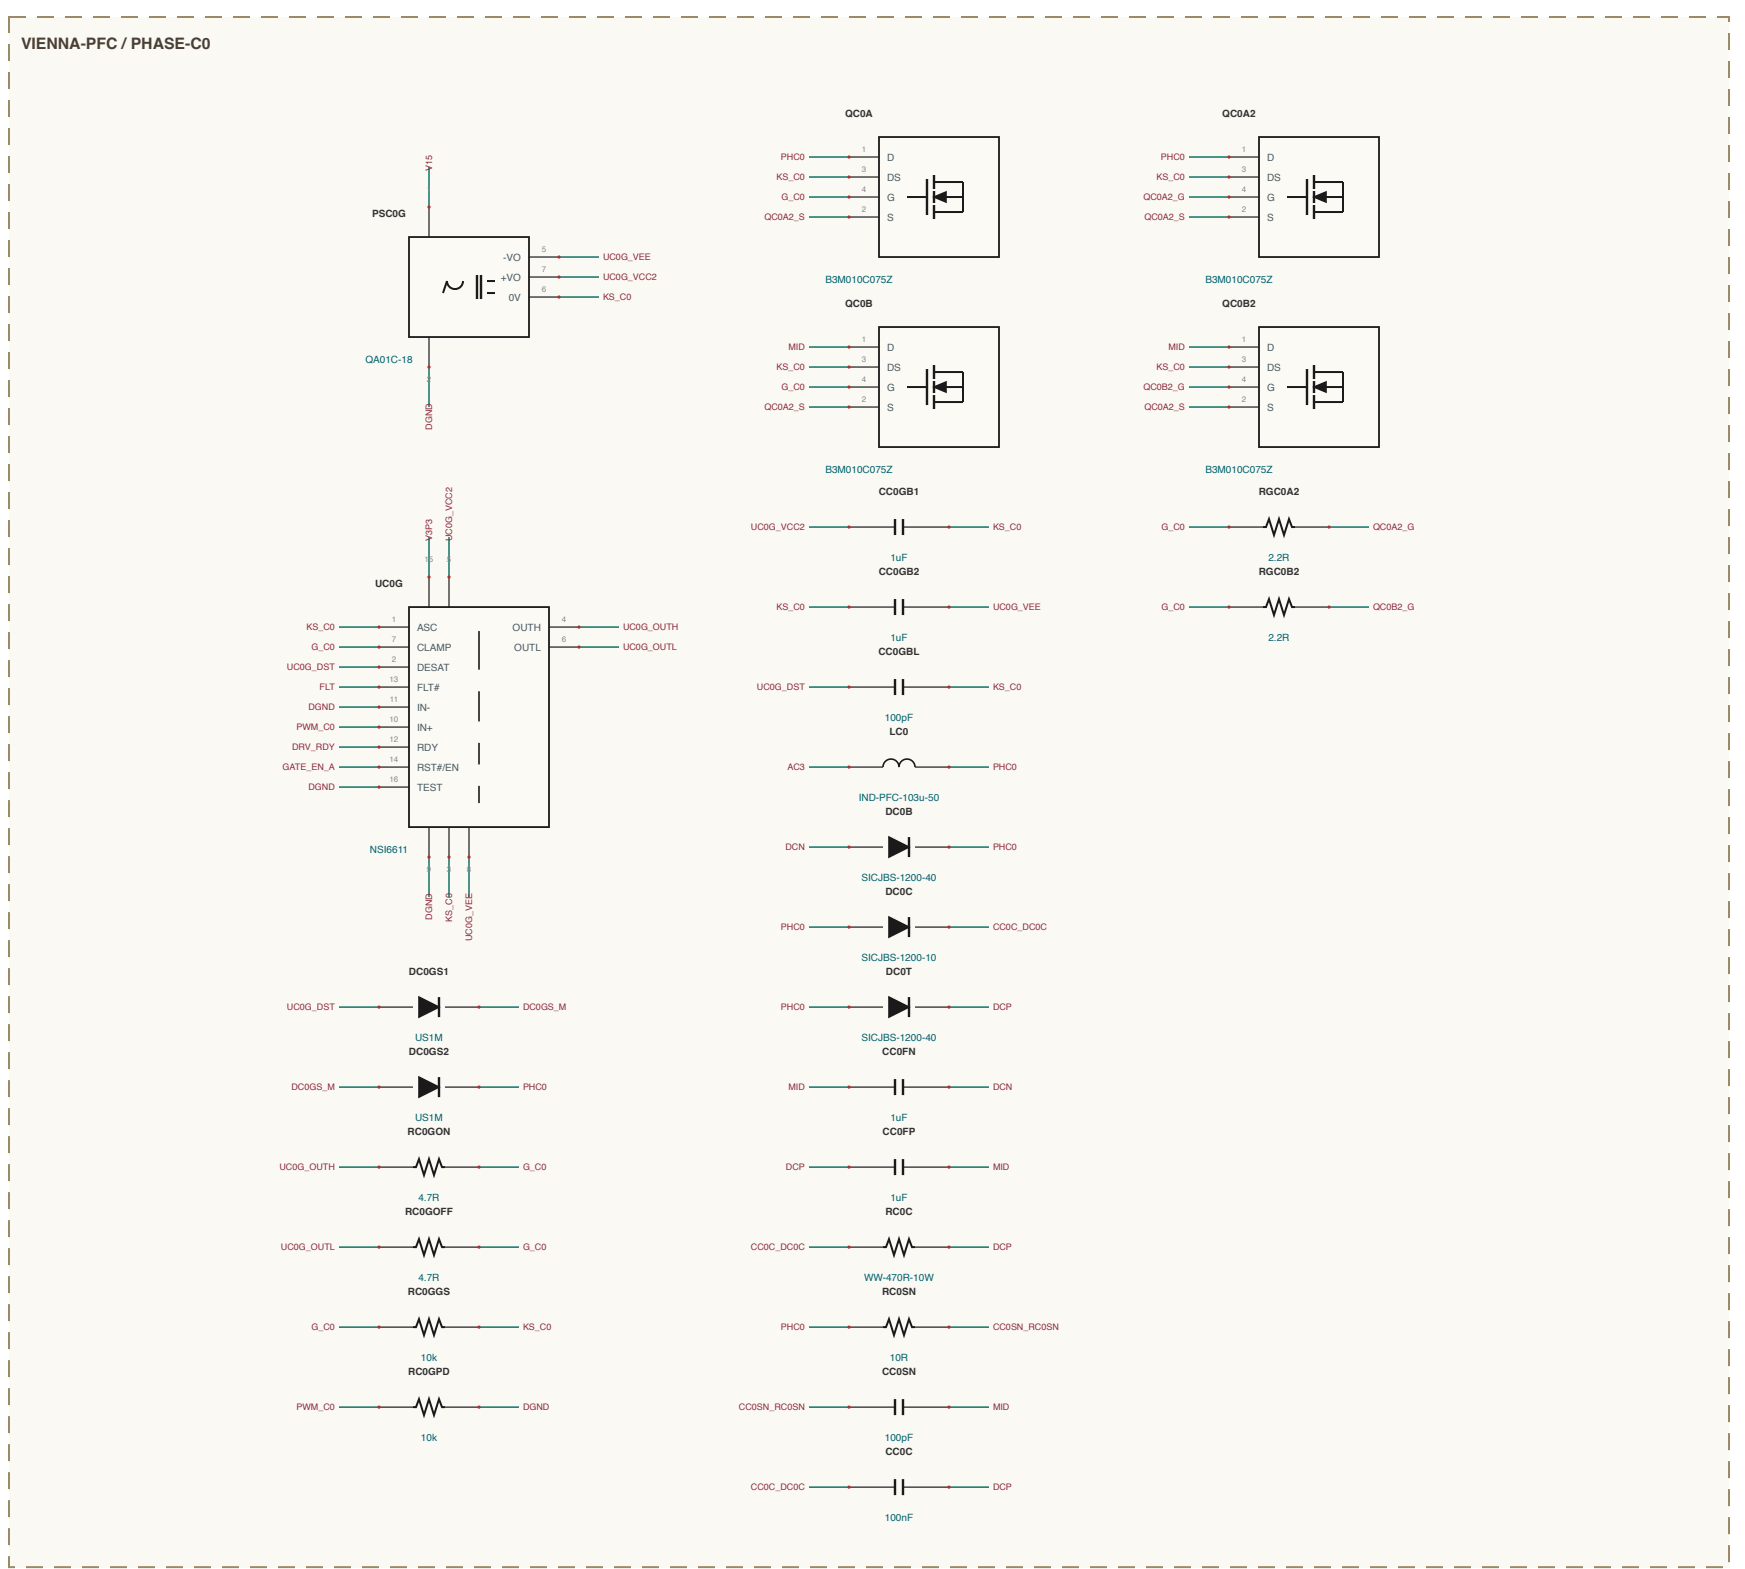
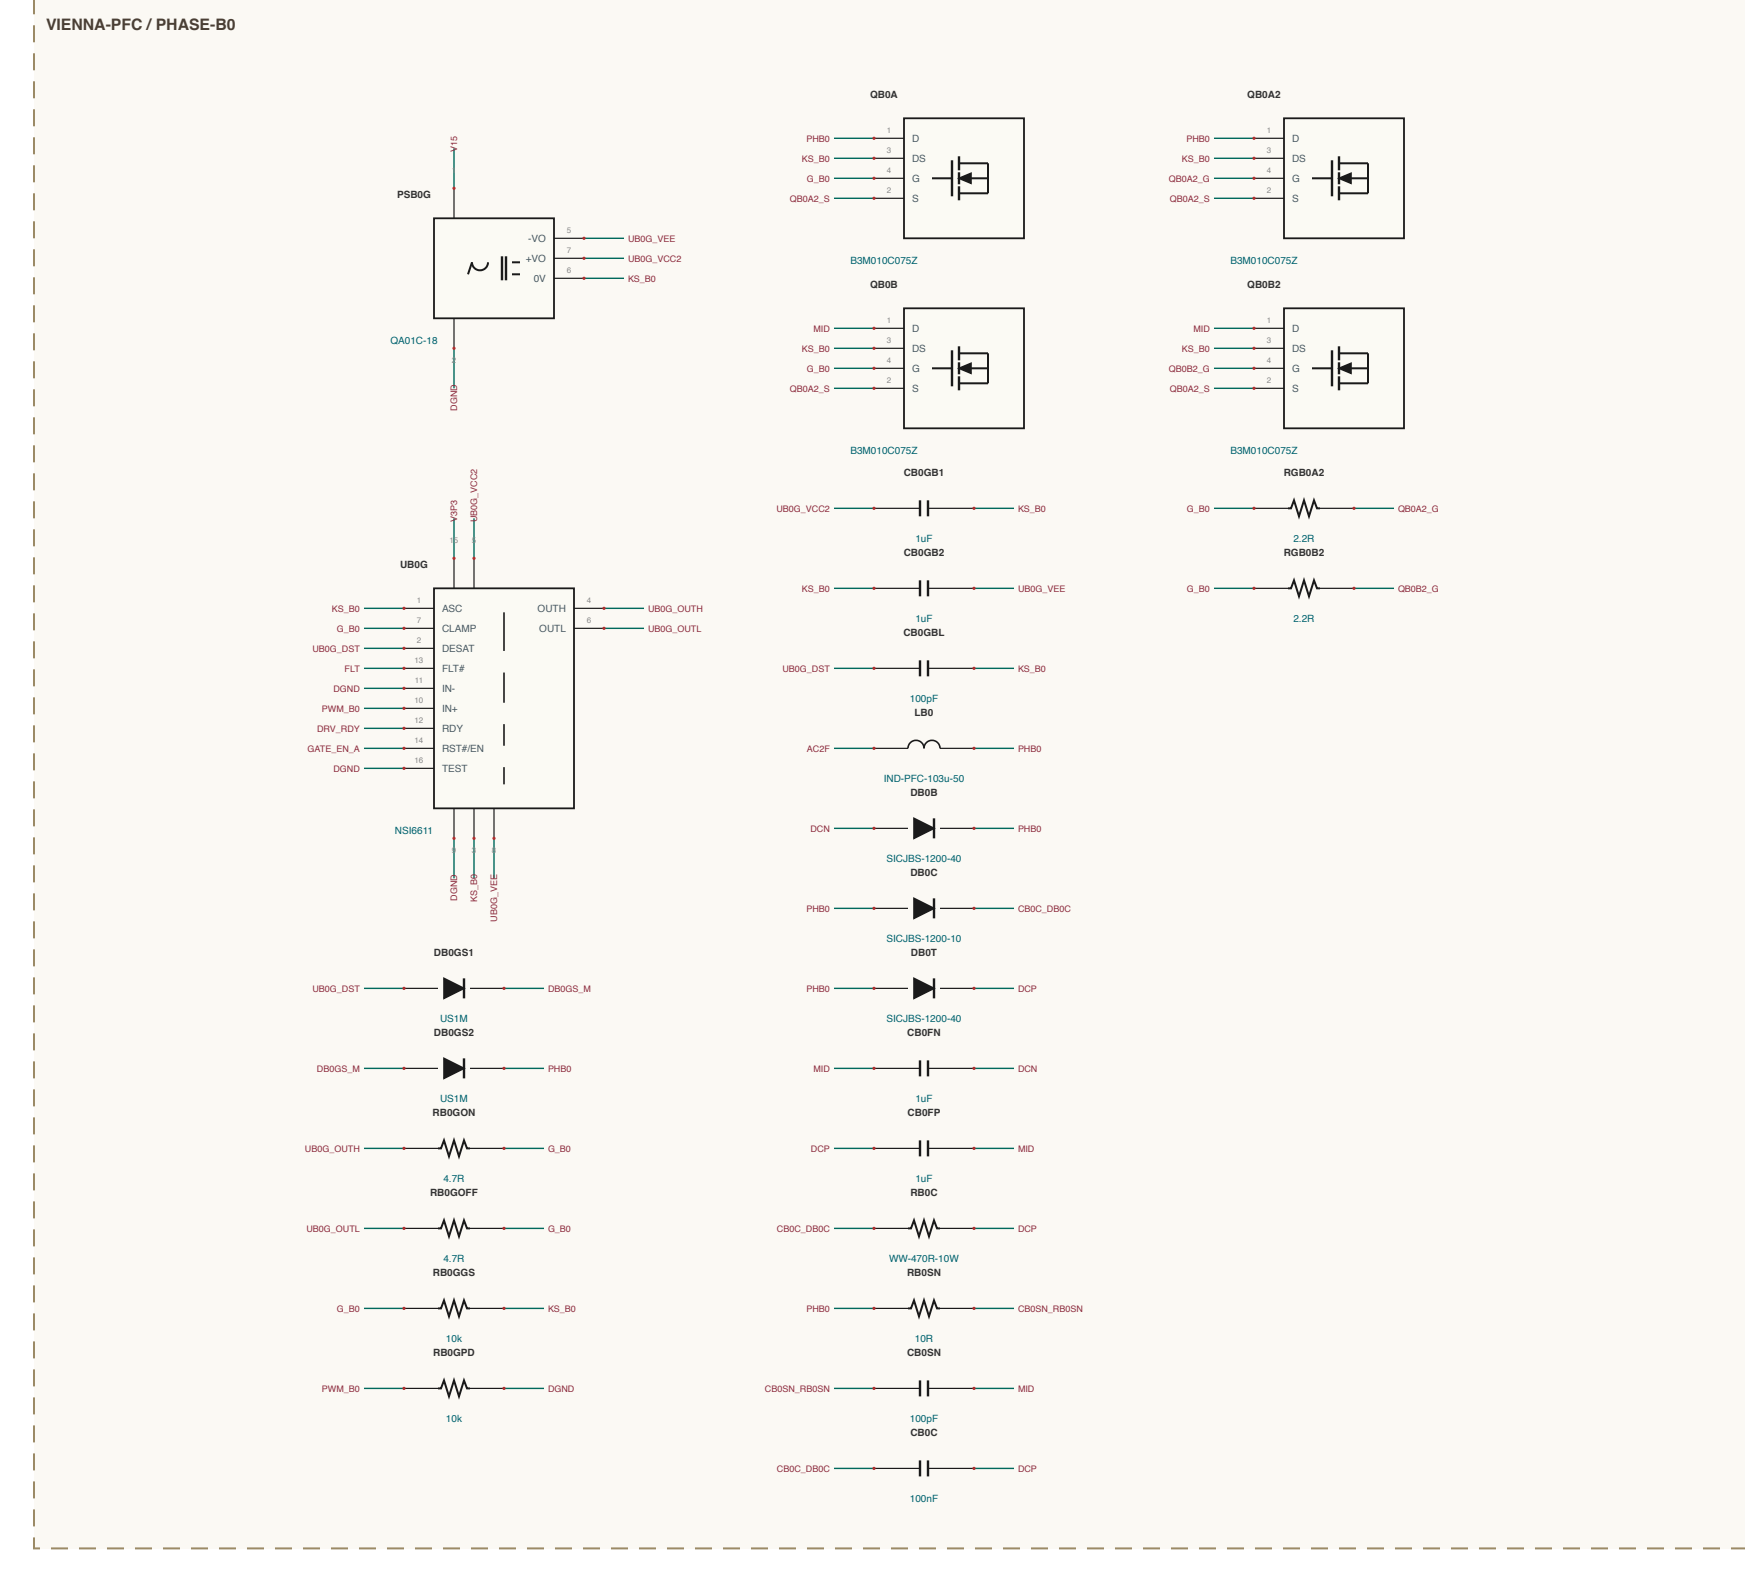
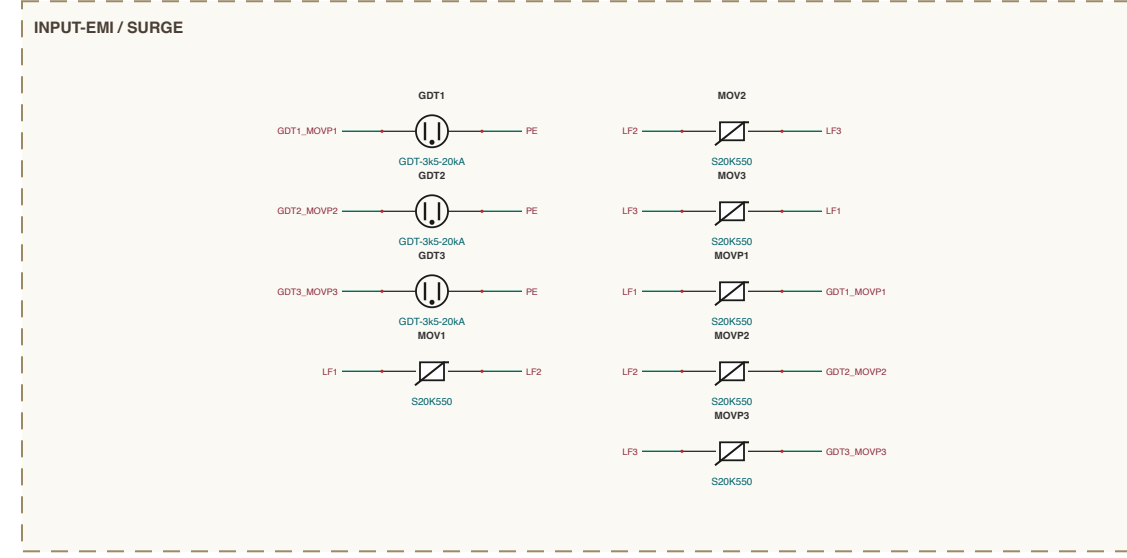
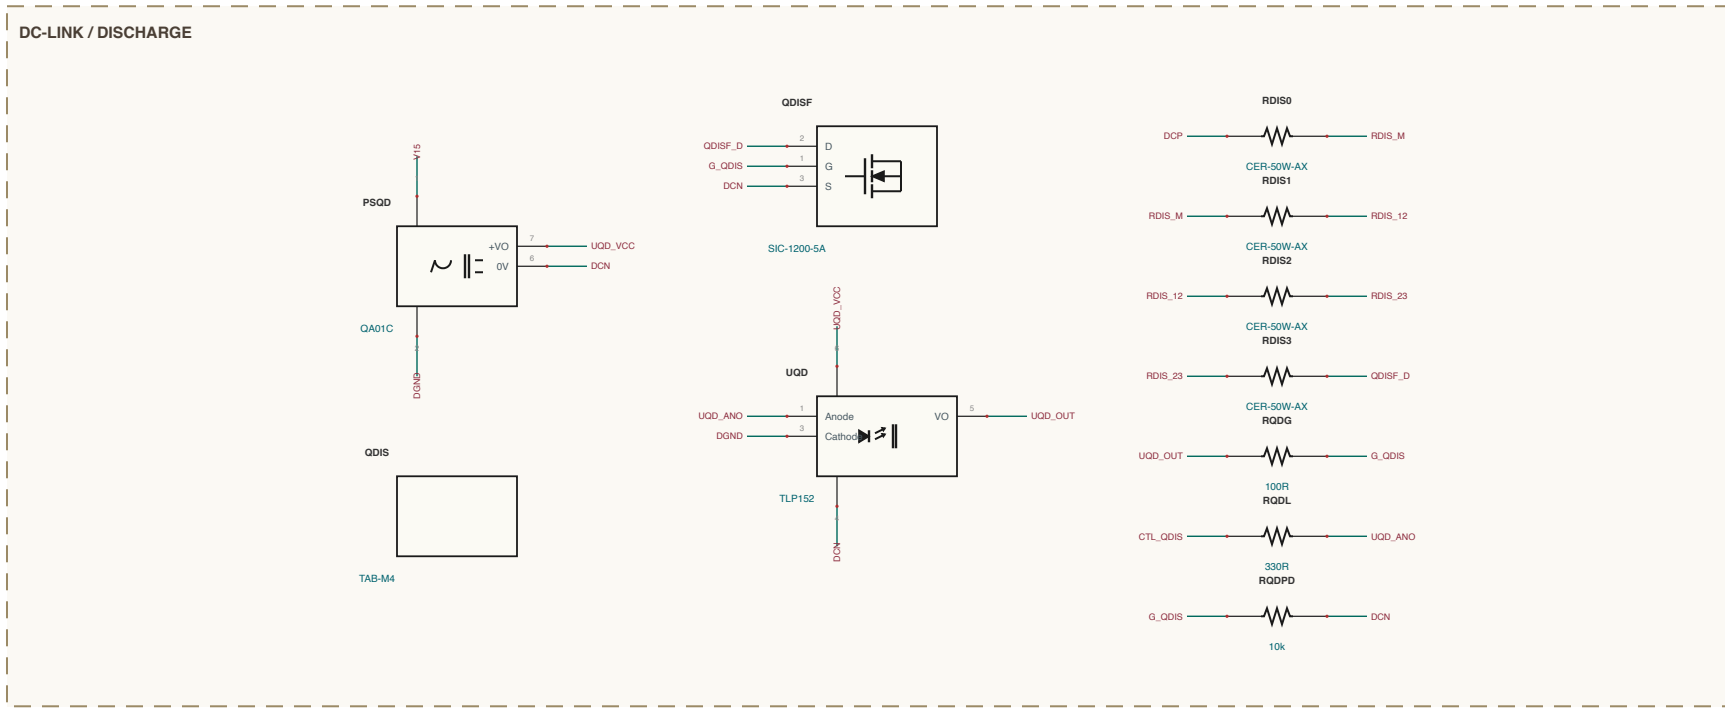
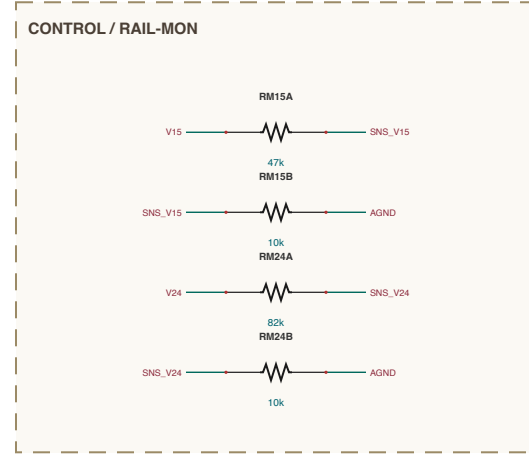
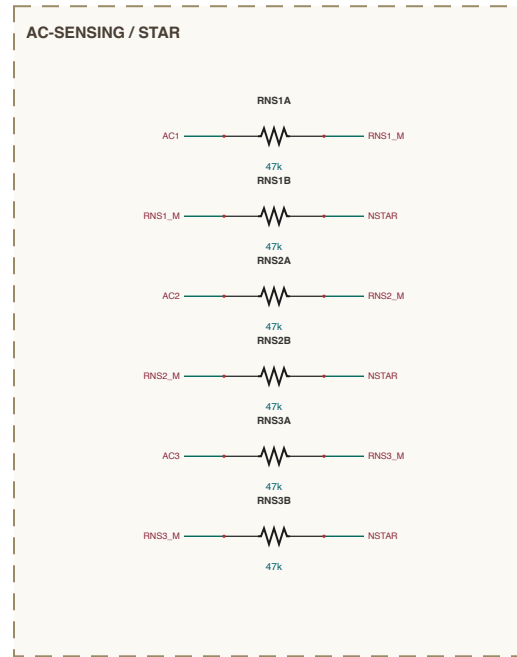
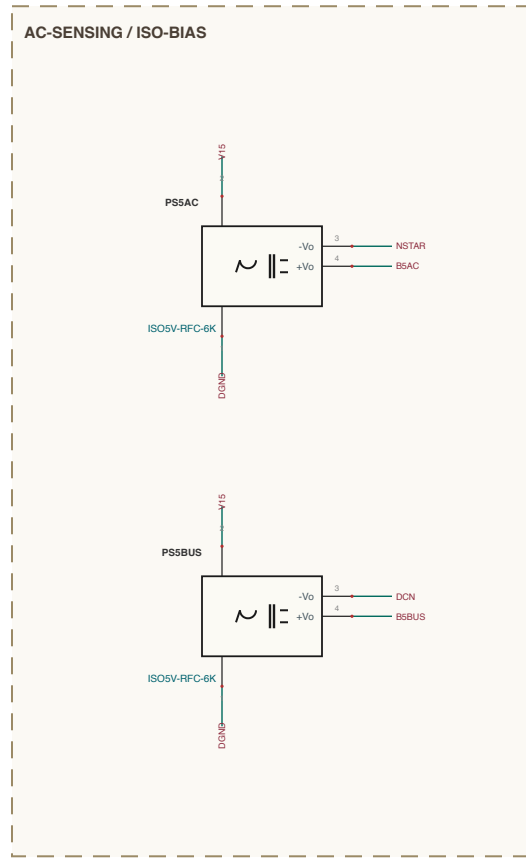
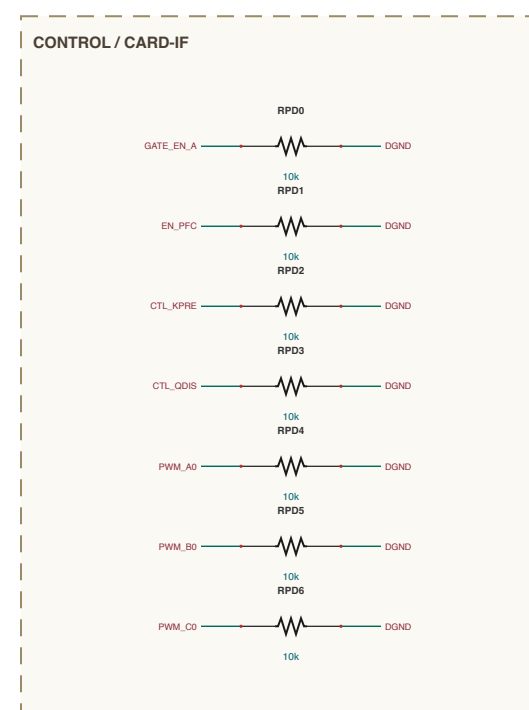
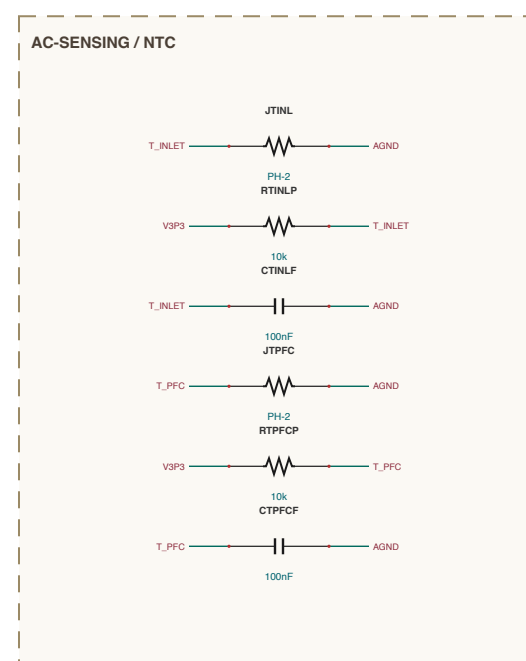
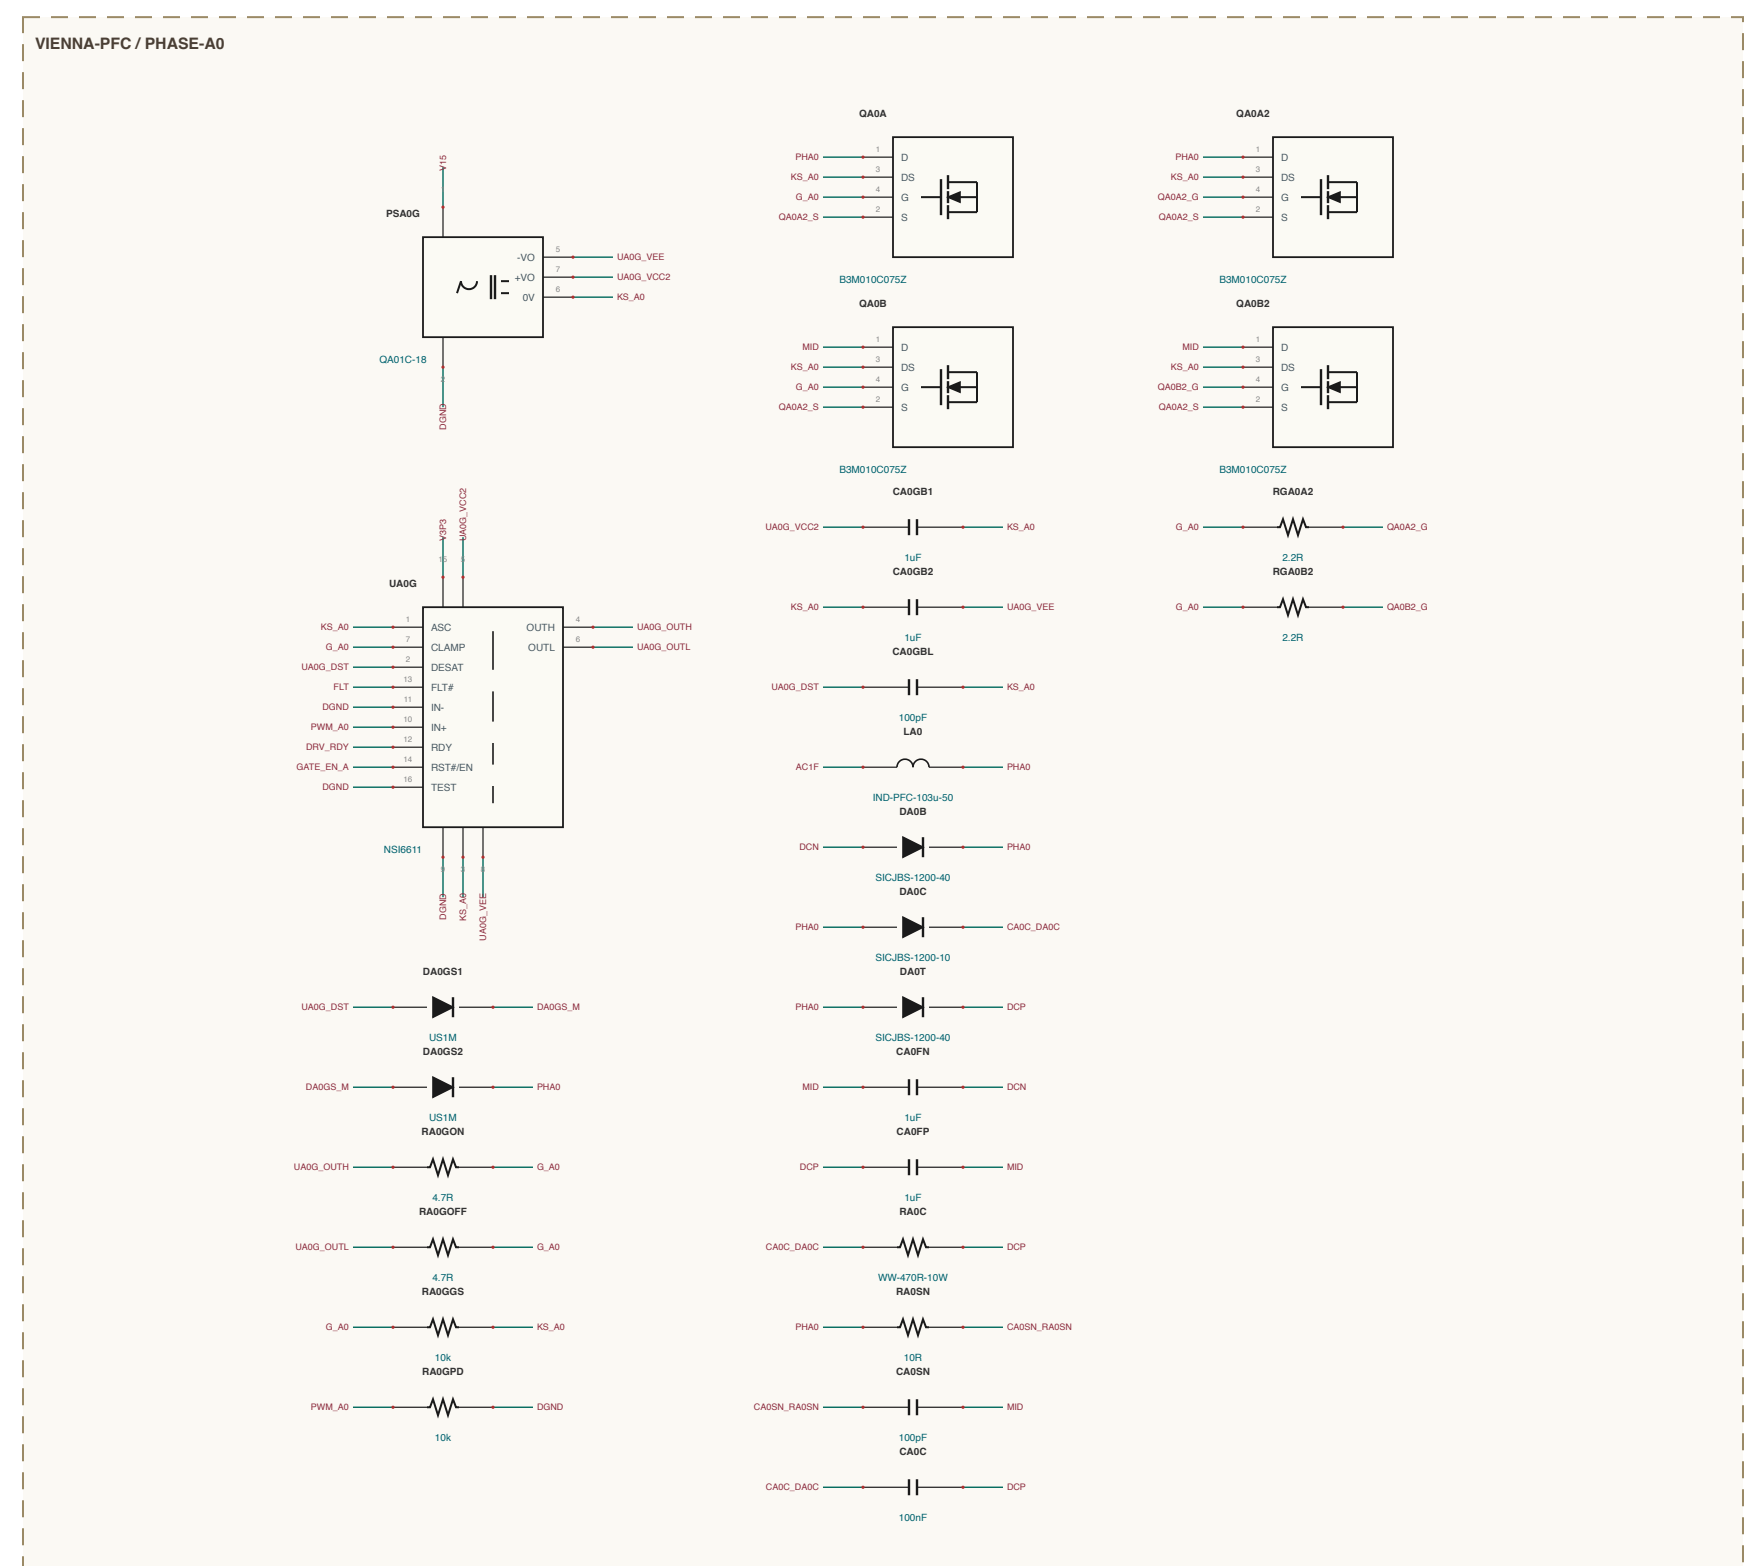
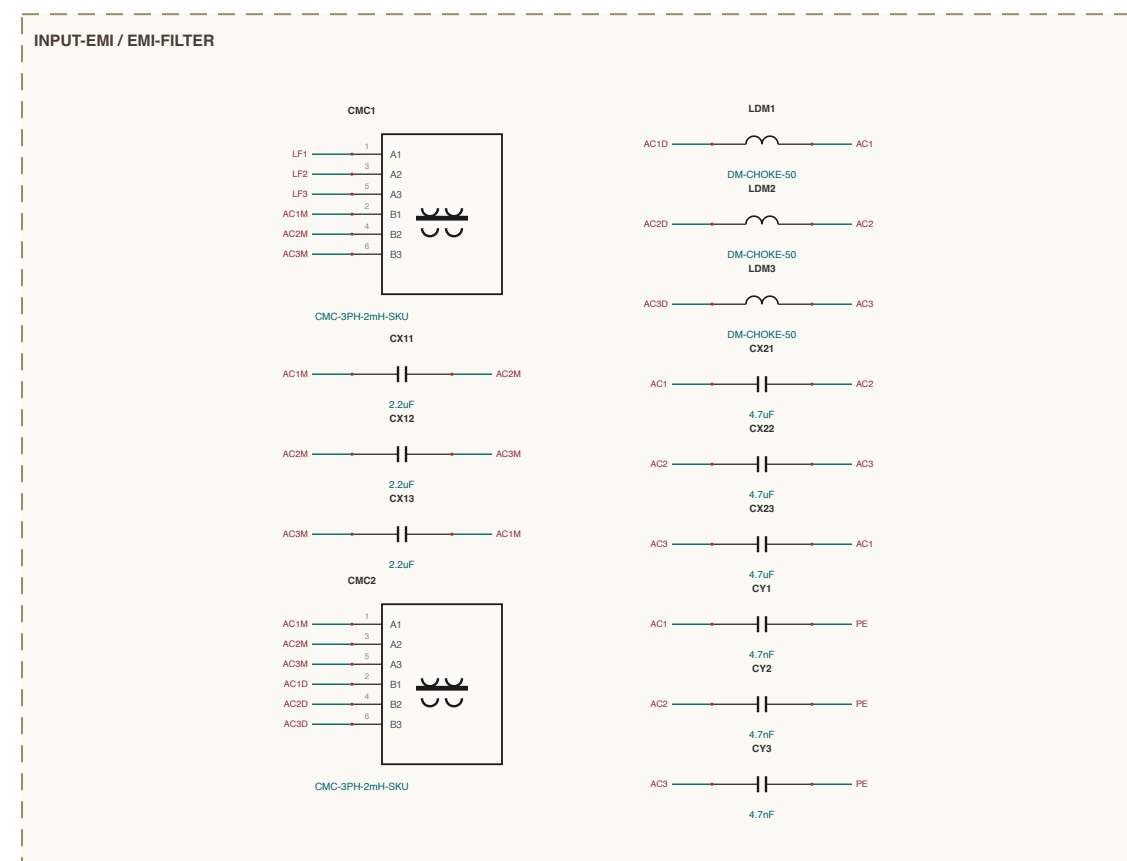
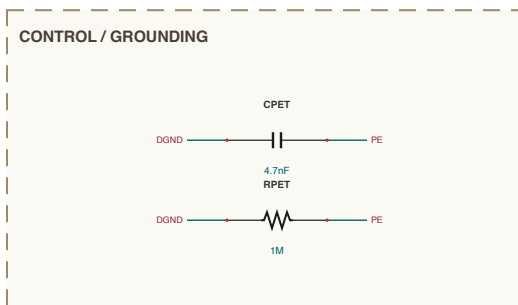
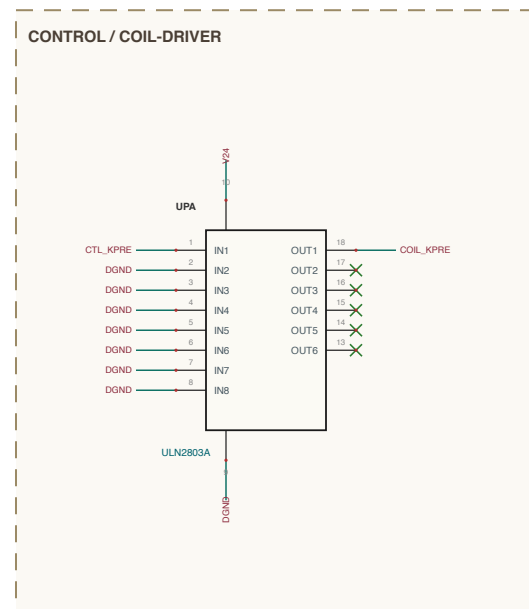
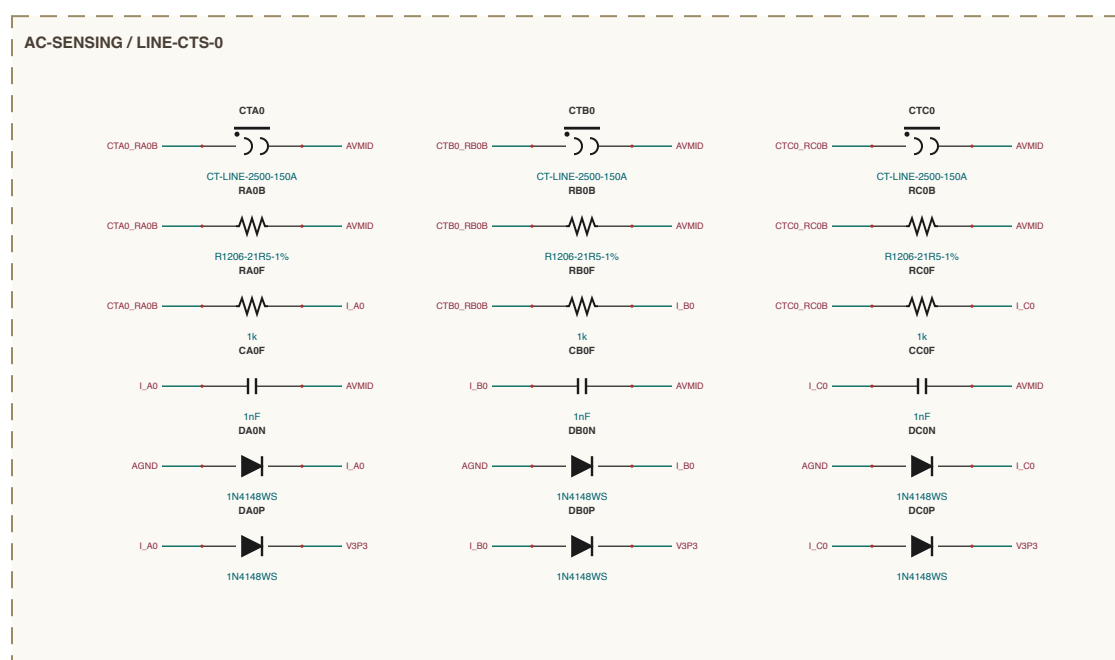
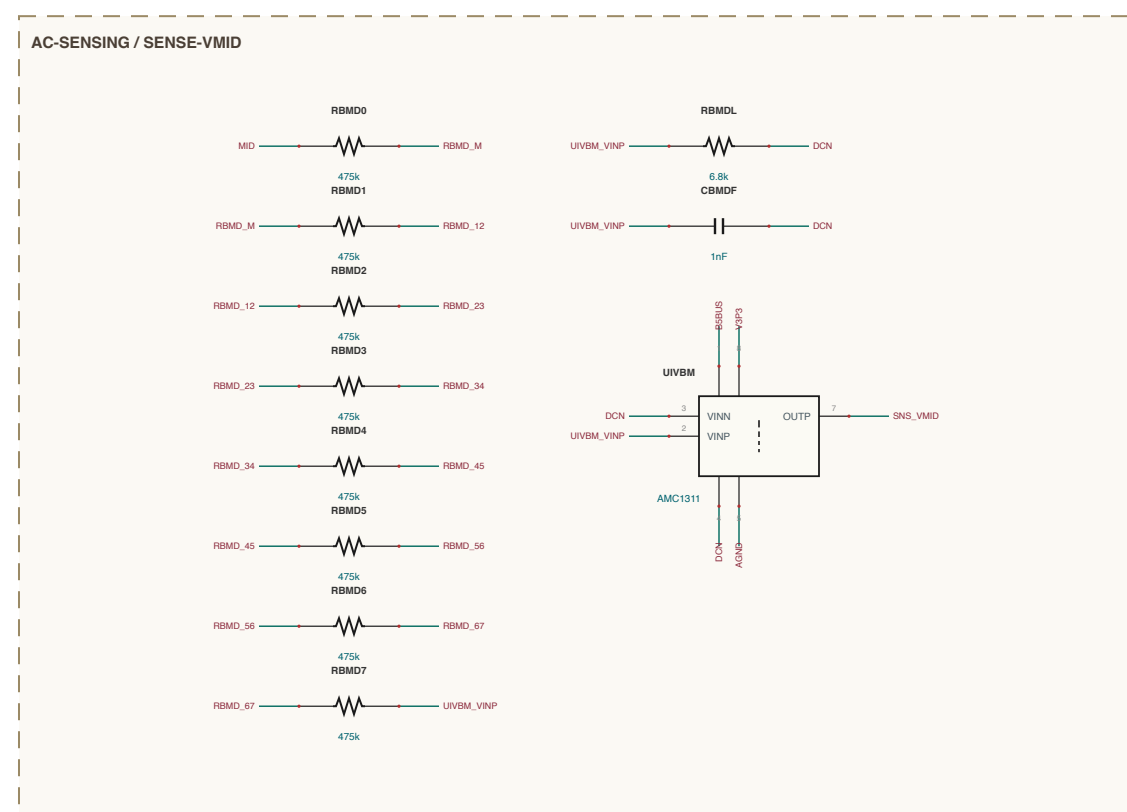
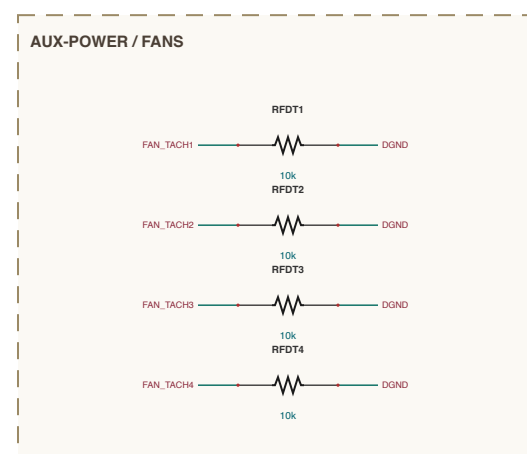
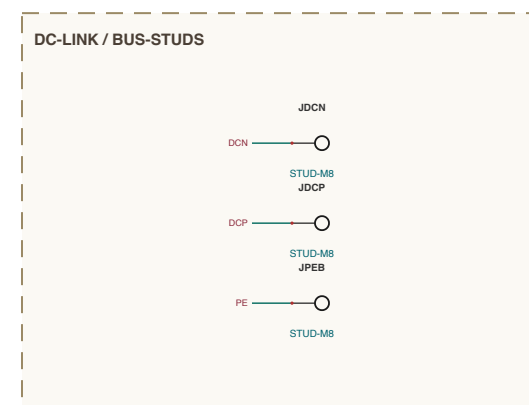
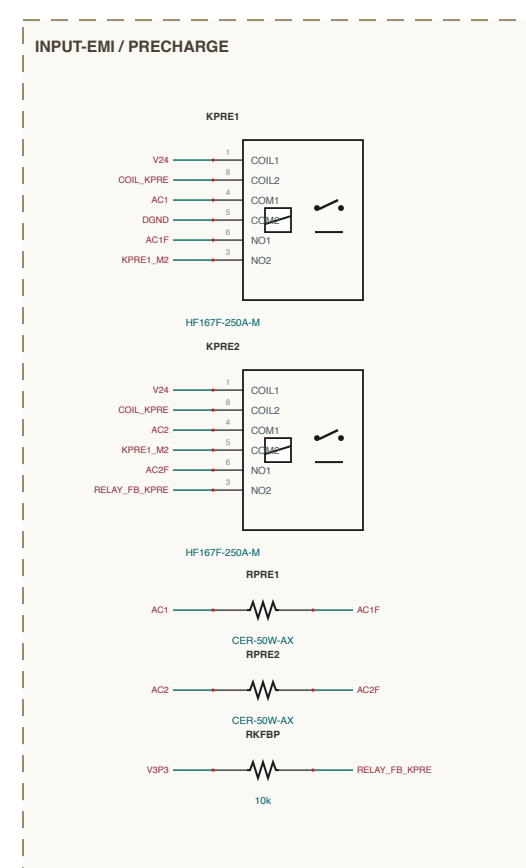
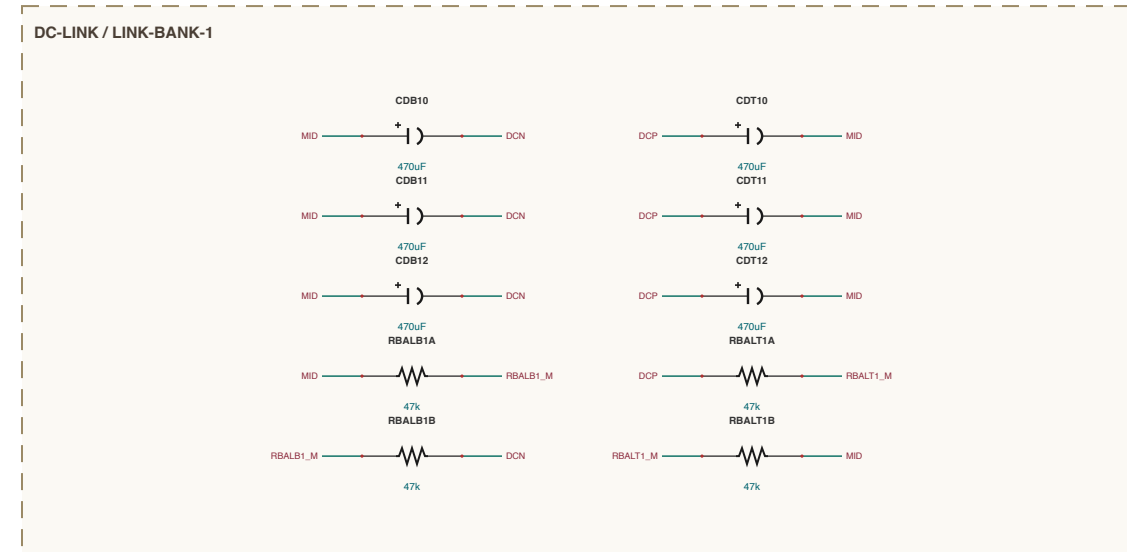
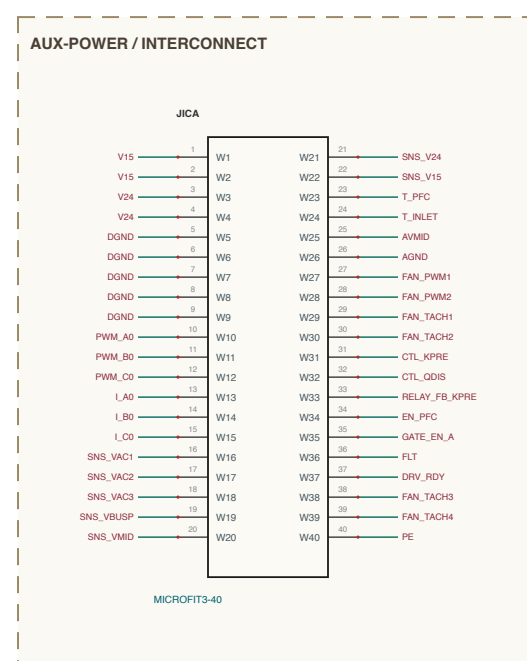
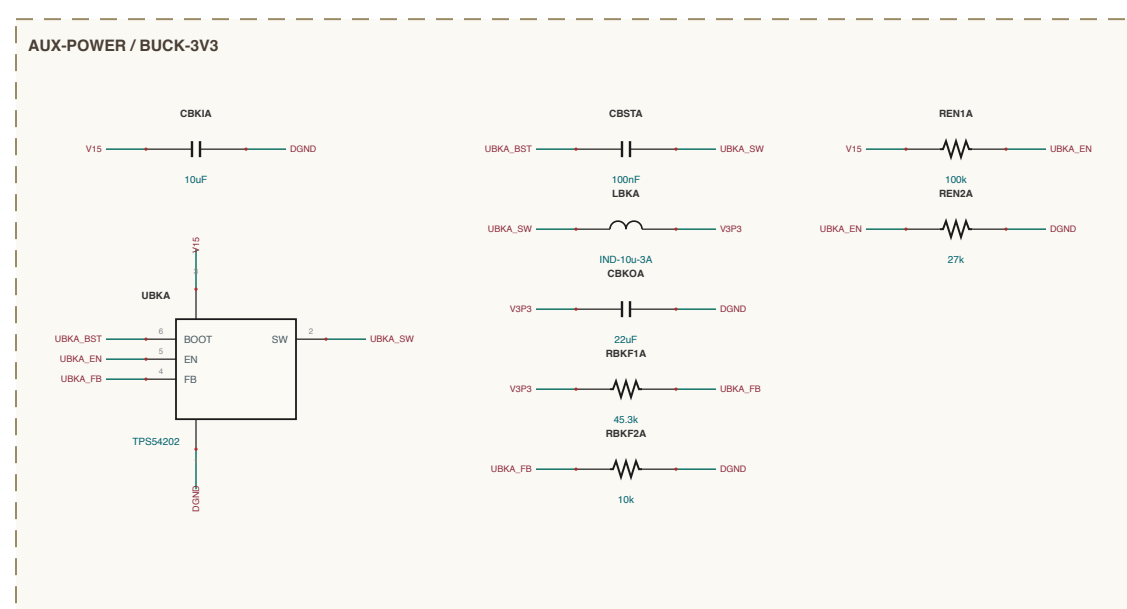
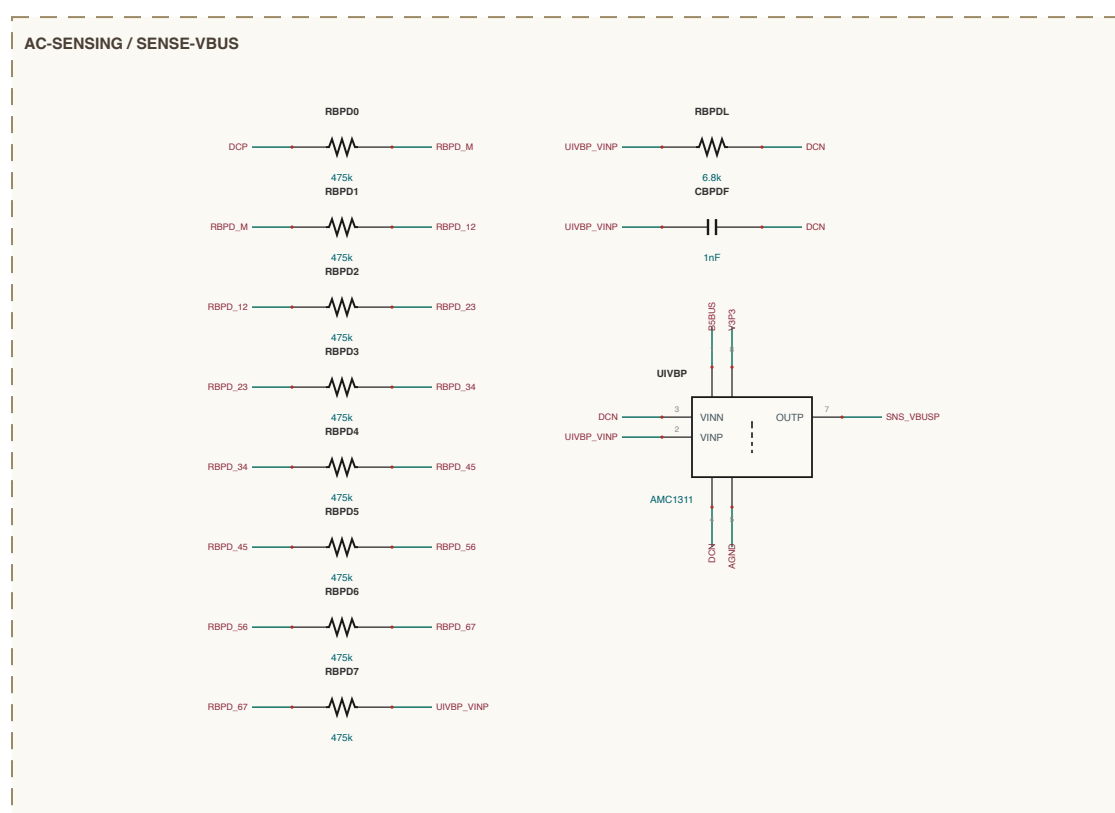
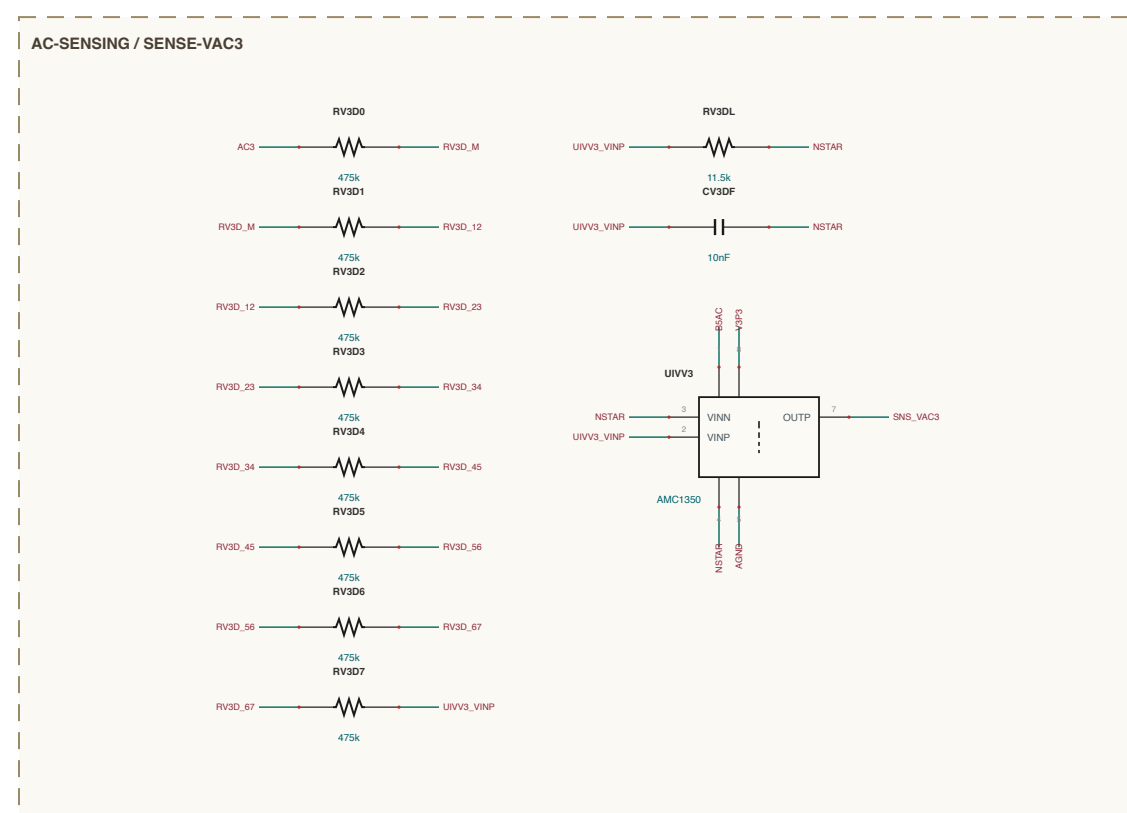
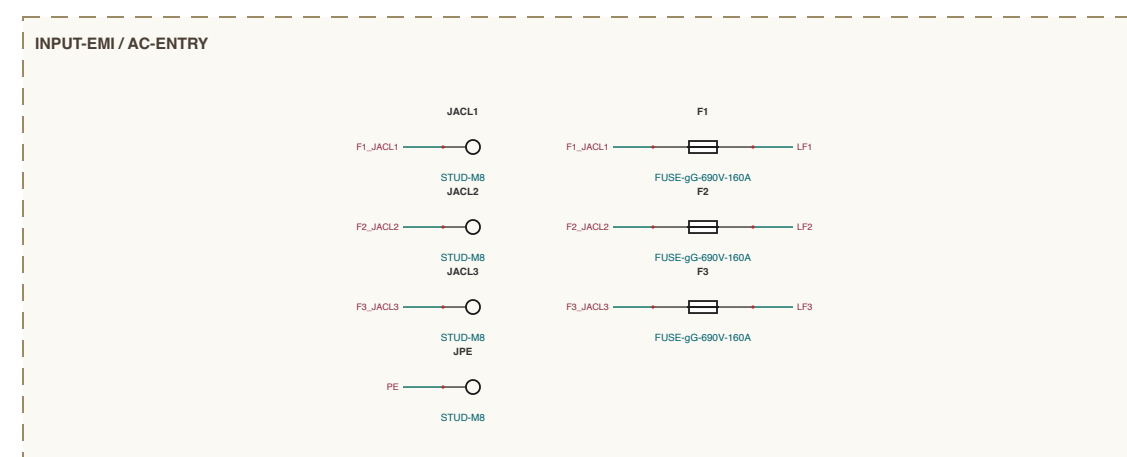
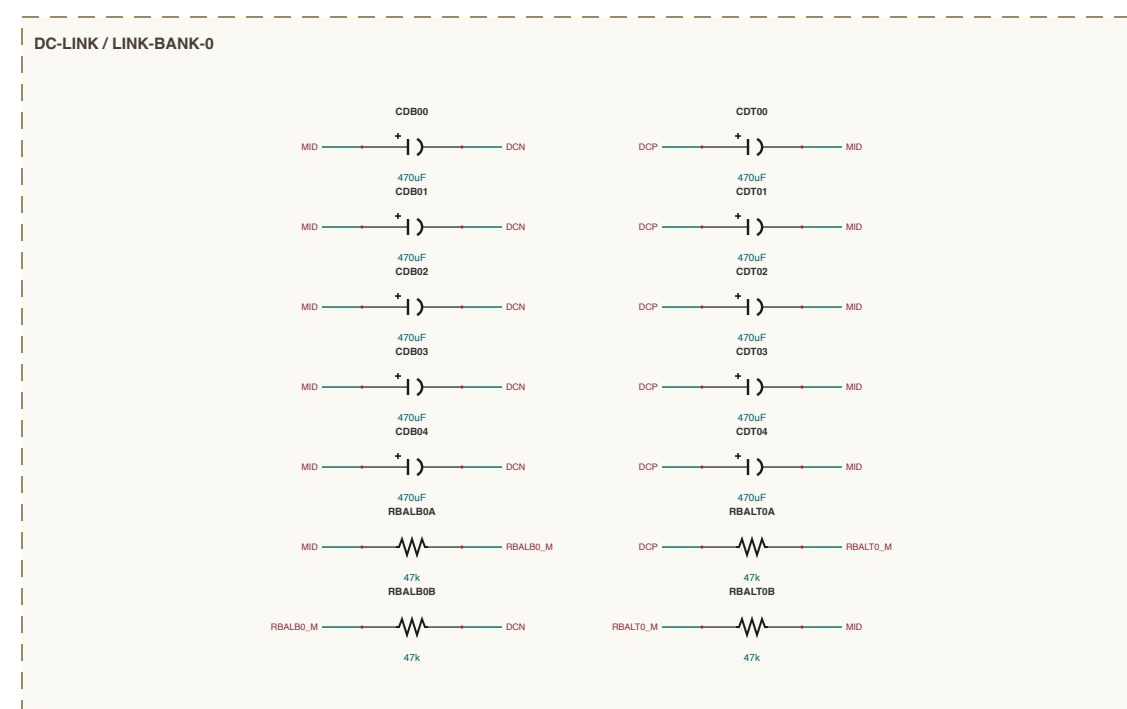
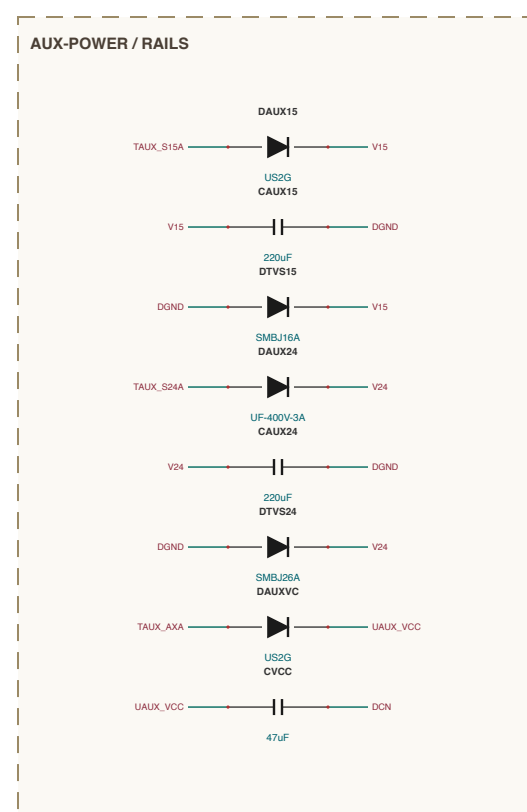
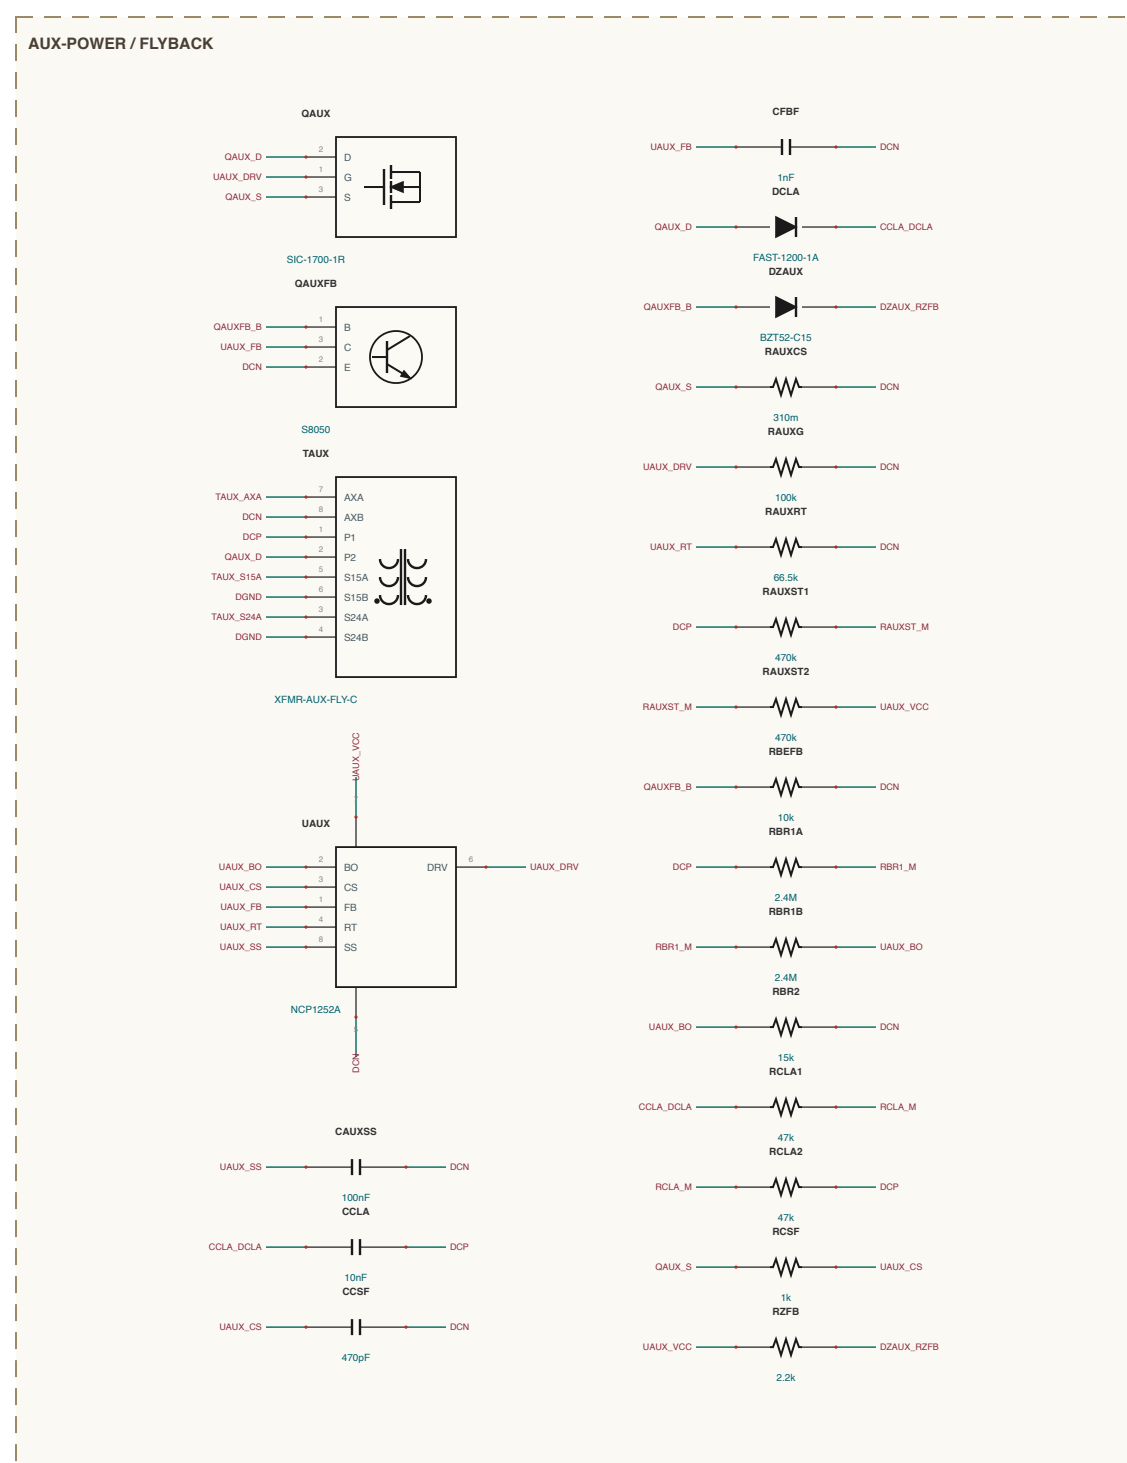
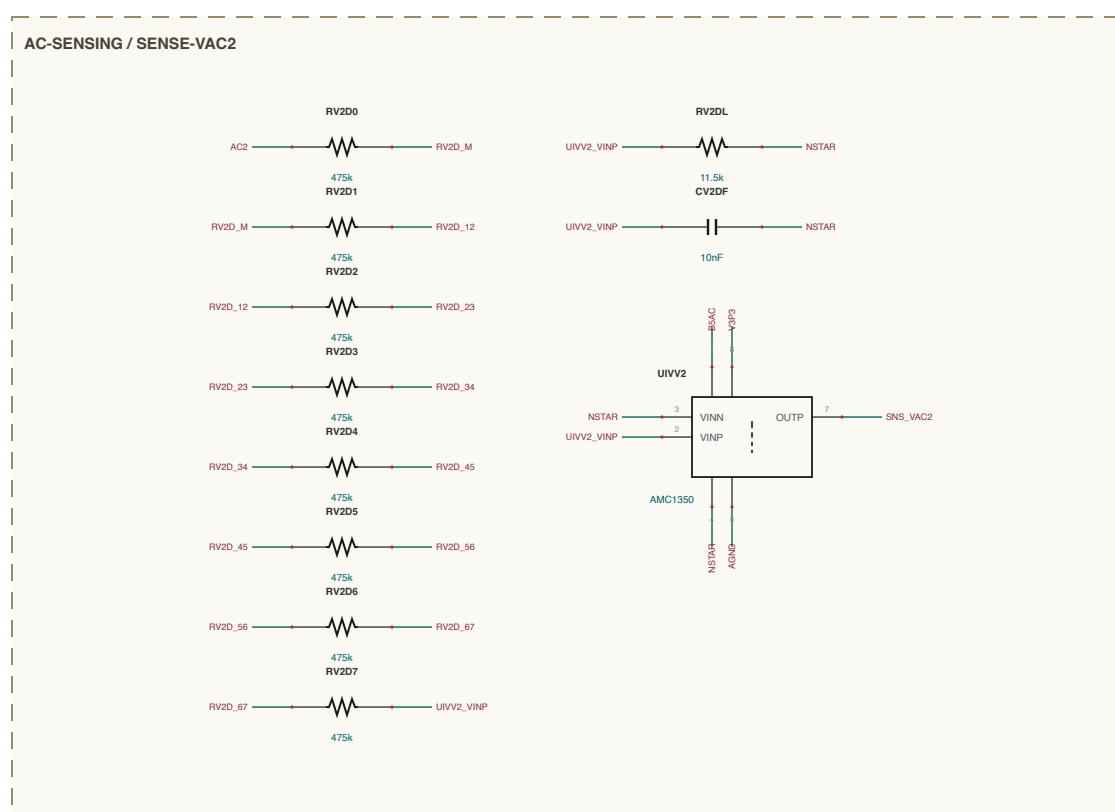


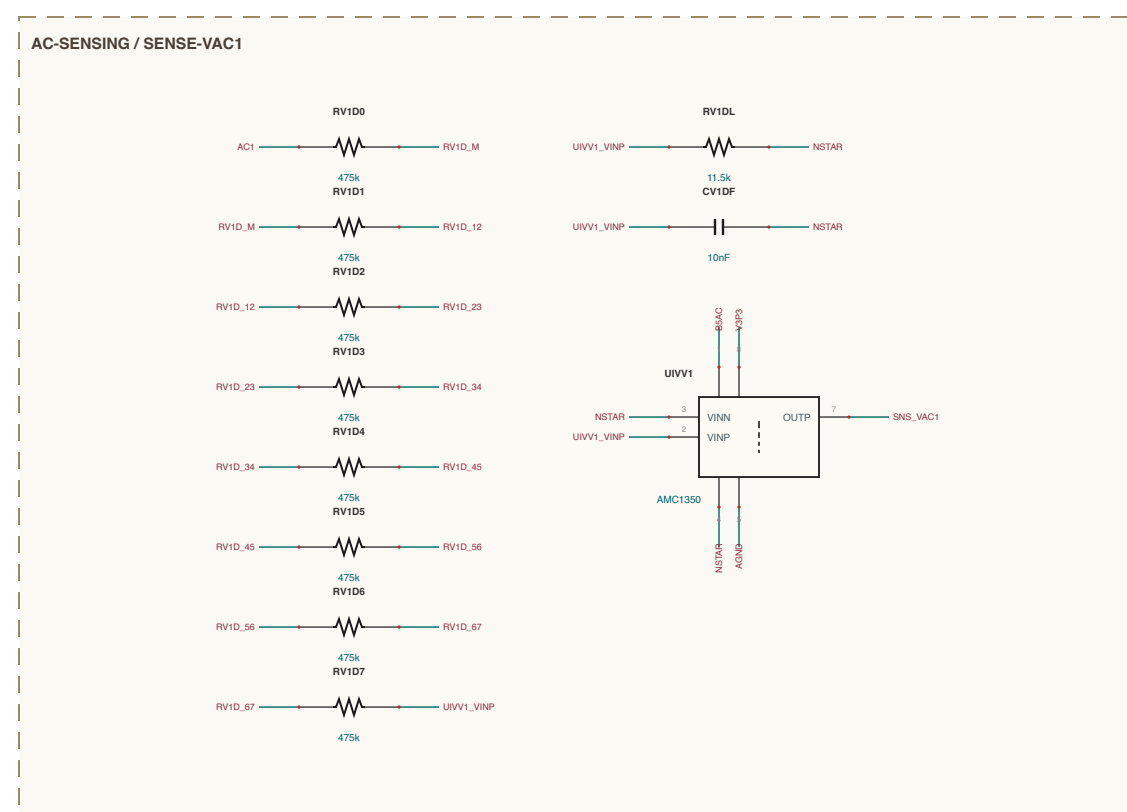

SHEET INDEX

56 kW ? - 1 of 2

AC-SENSING - 9 sections

AUX POWER : 5 sections

CONTROL - 4 sections

DC/Link - 8 sections

IPS-0-000 : 0 sections

rev 0.3 - 29 sections - 308 components

NET NAMING

Internal junctions are named for what they

Use a `<Pin>` node at that IC pin e.g. U10D

Acidno_M midpoint of a series pair e.g. 9

Acetate_<onto> tag between Acetate_vin &

| all others are explicit design net