
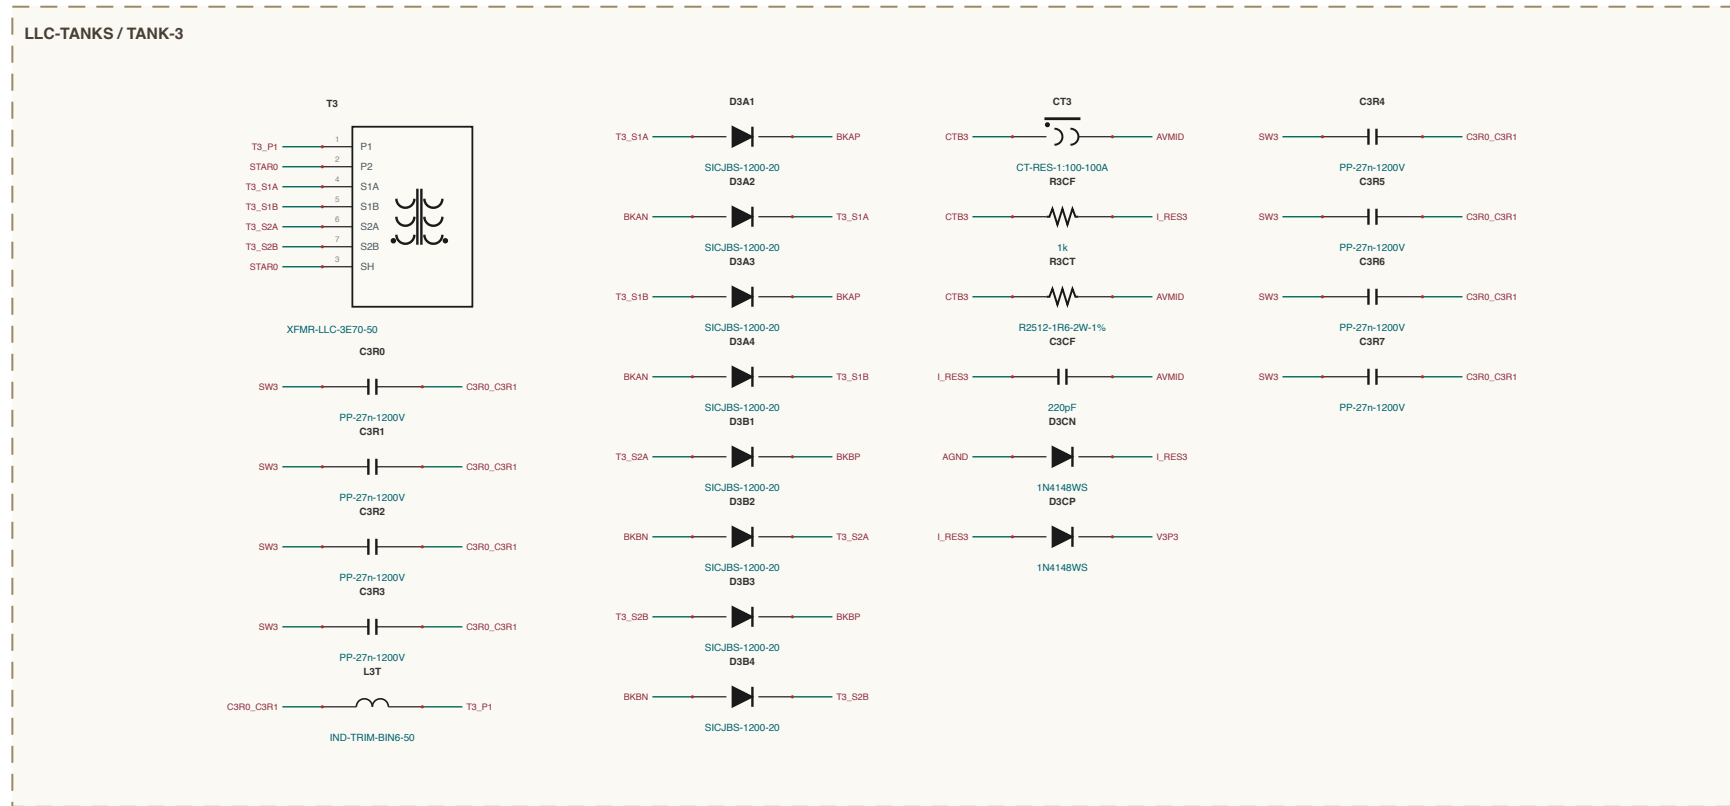
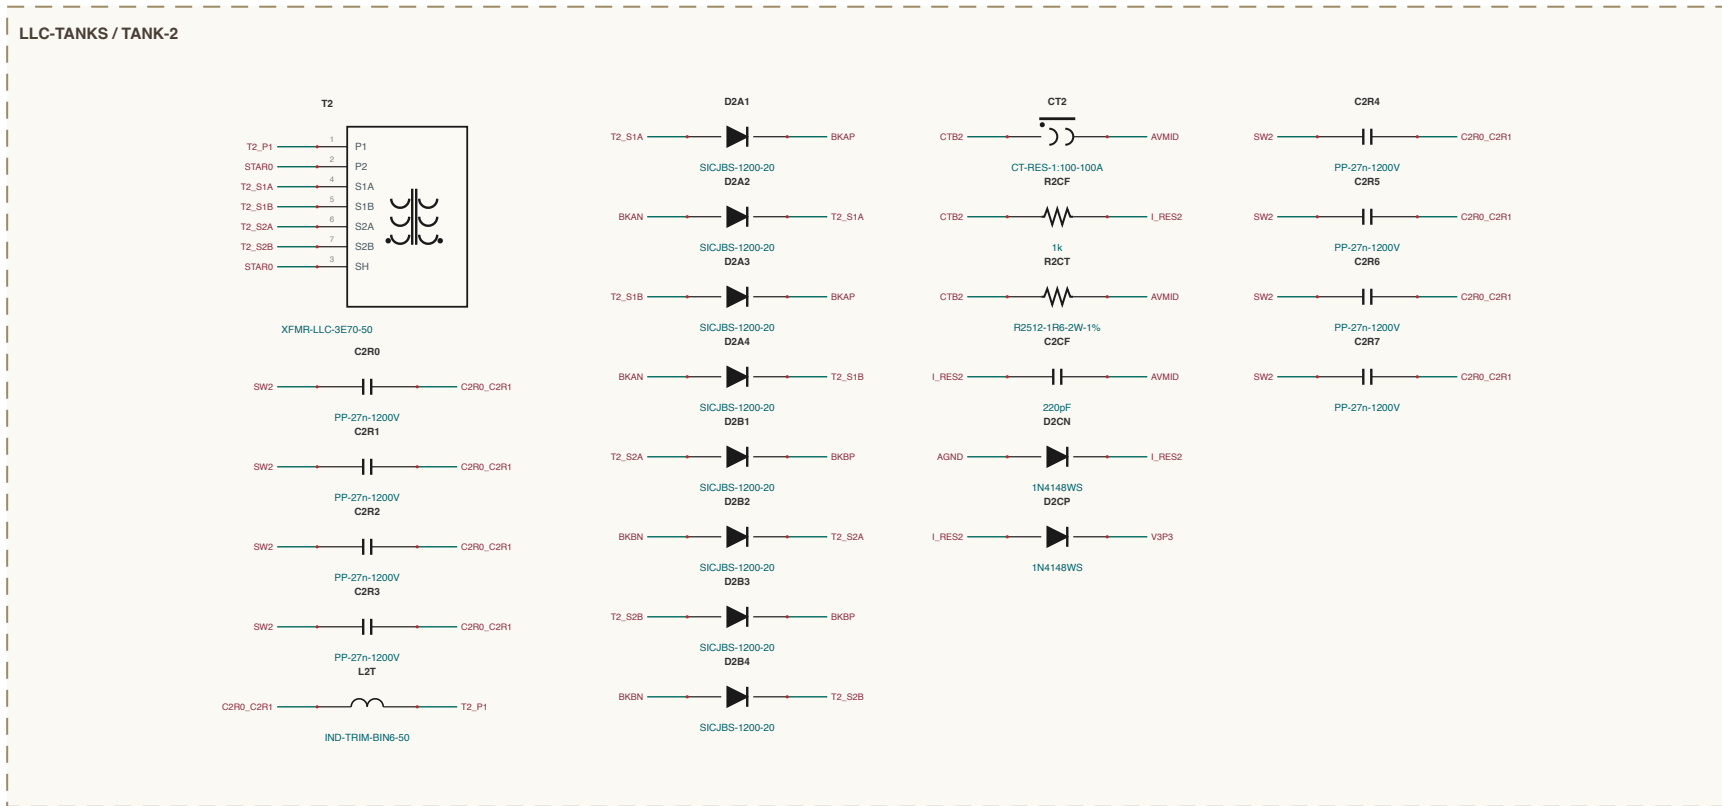
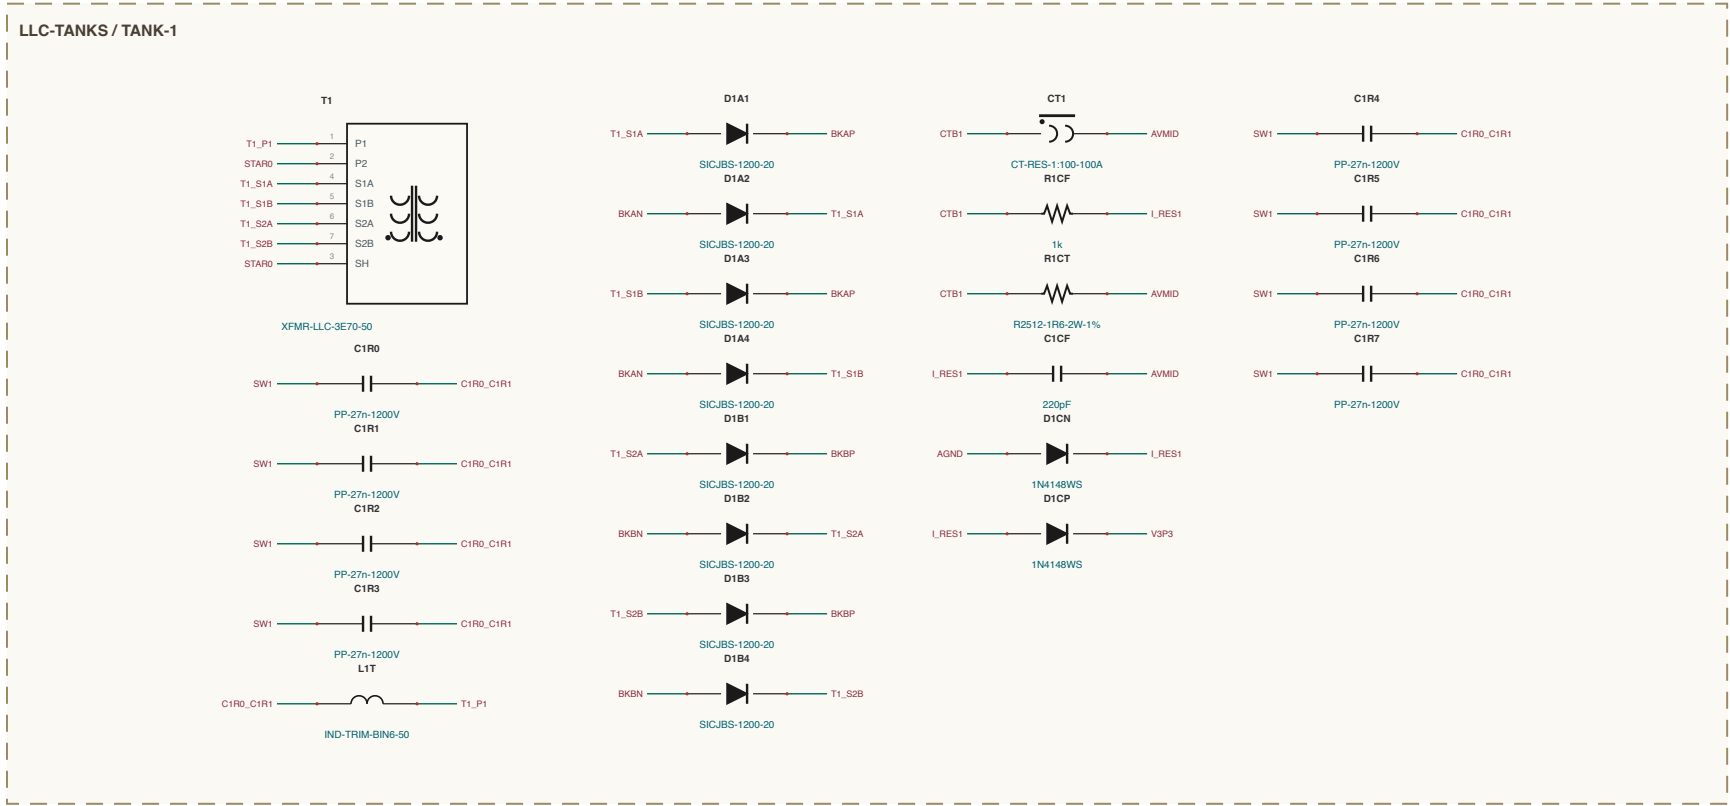
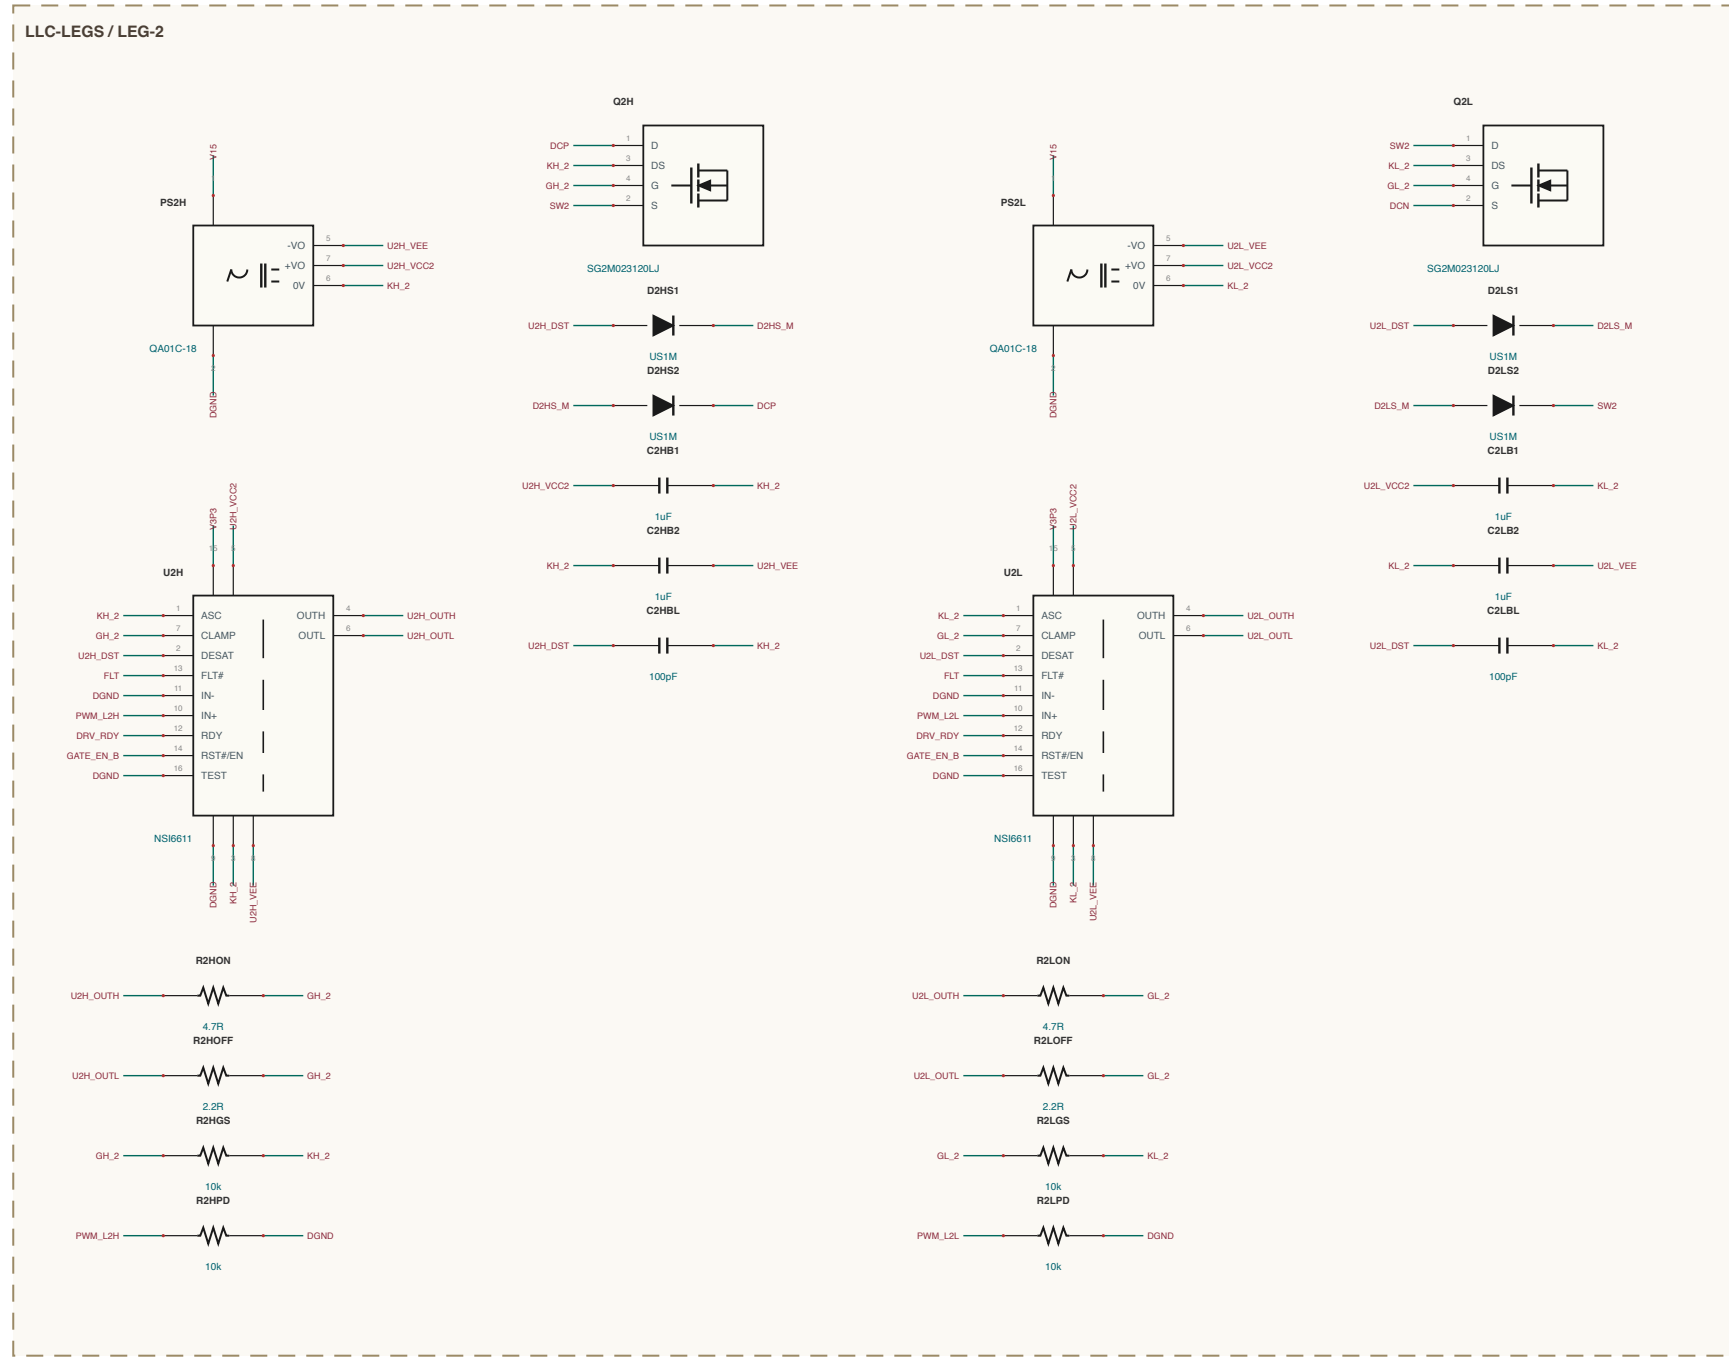
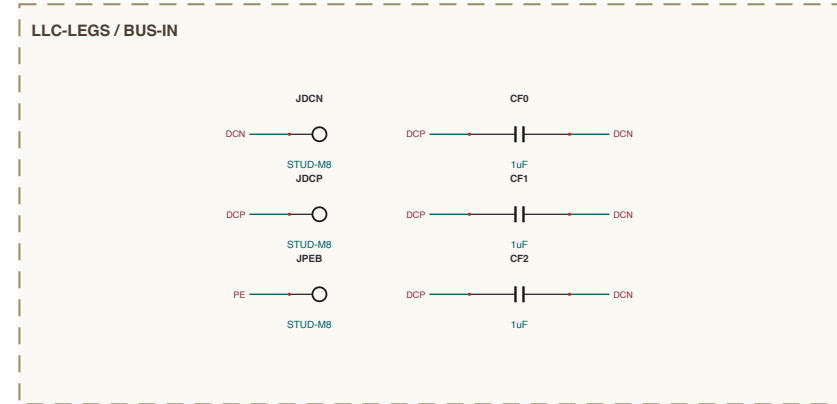
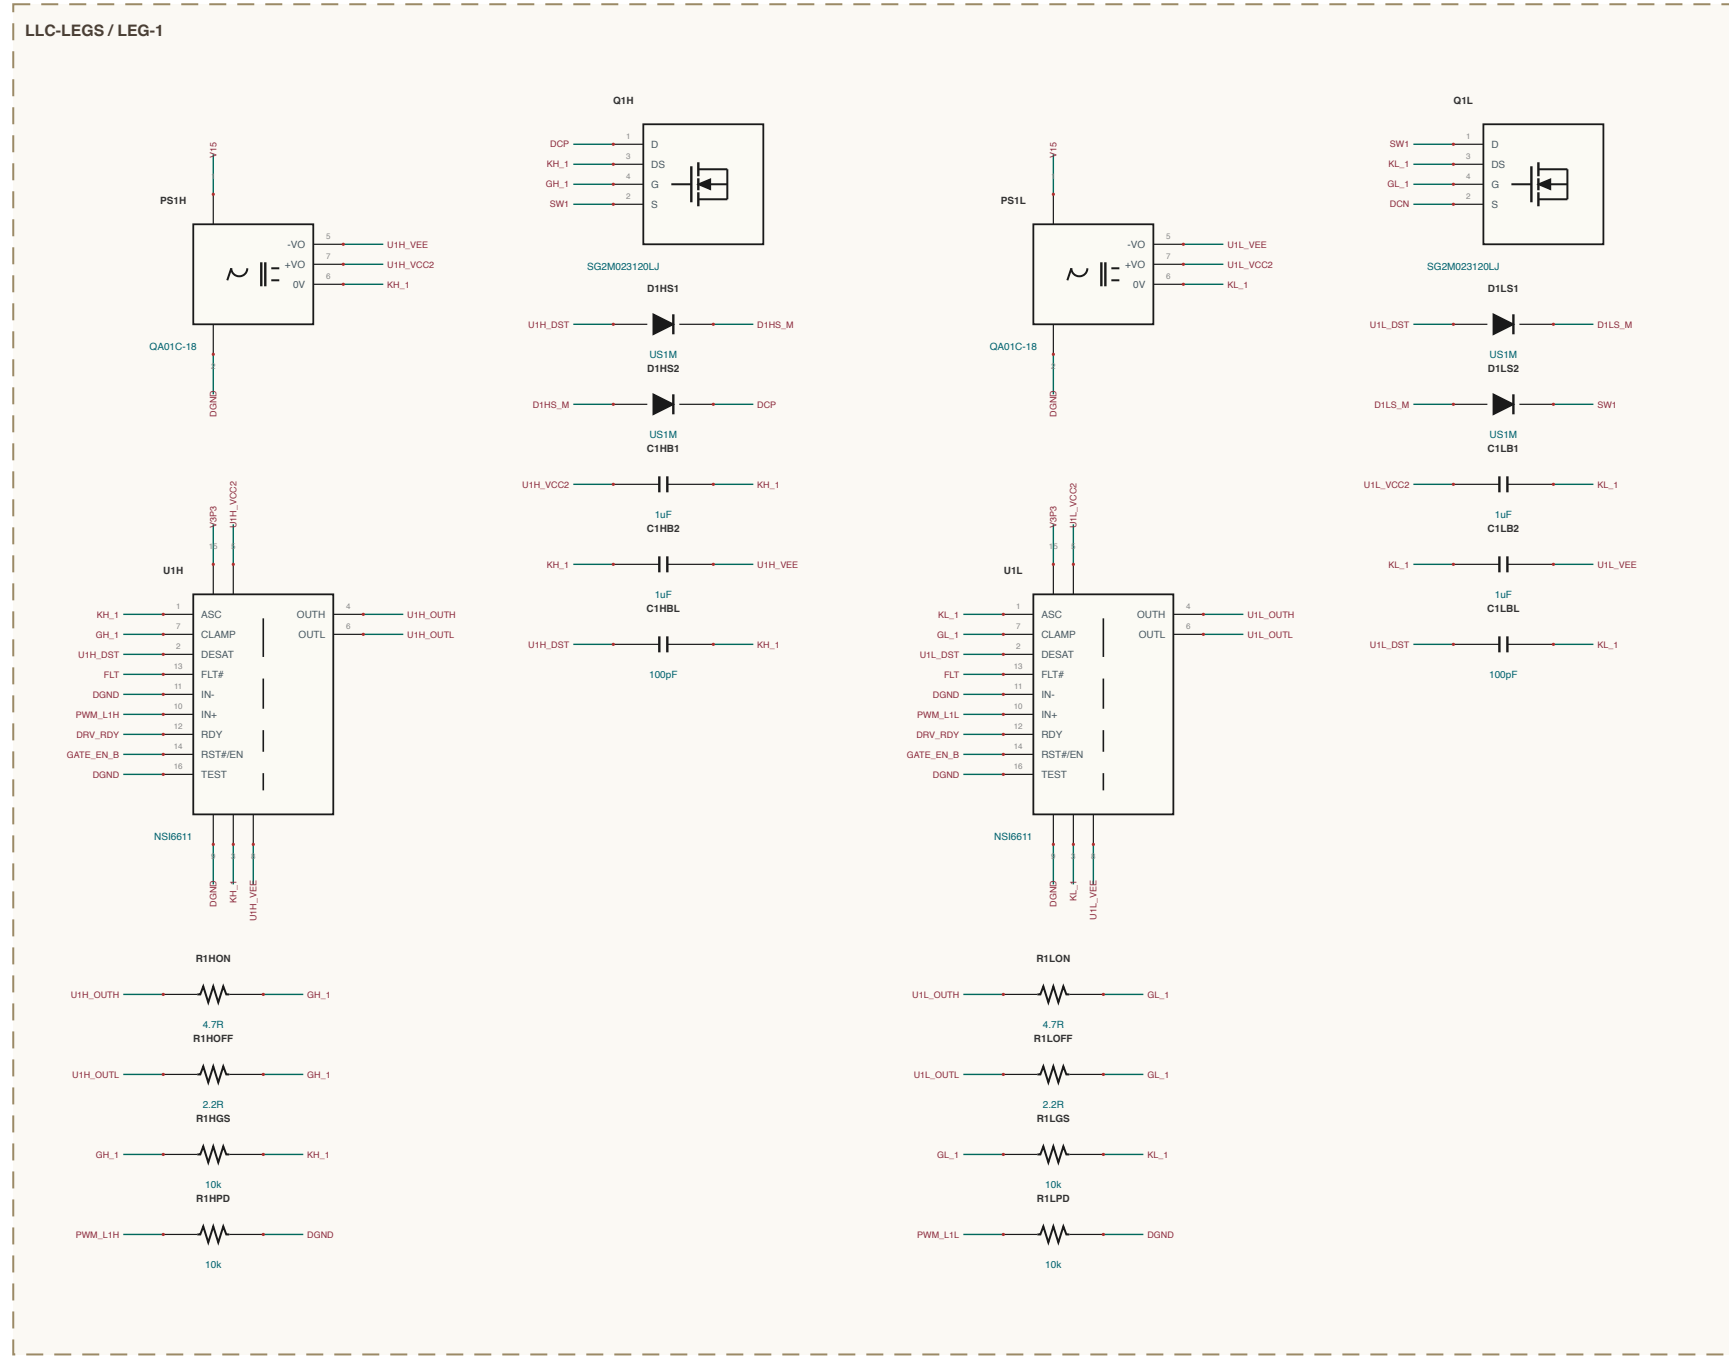
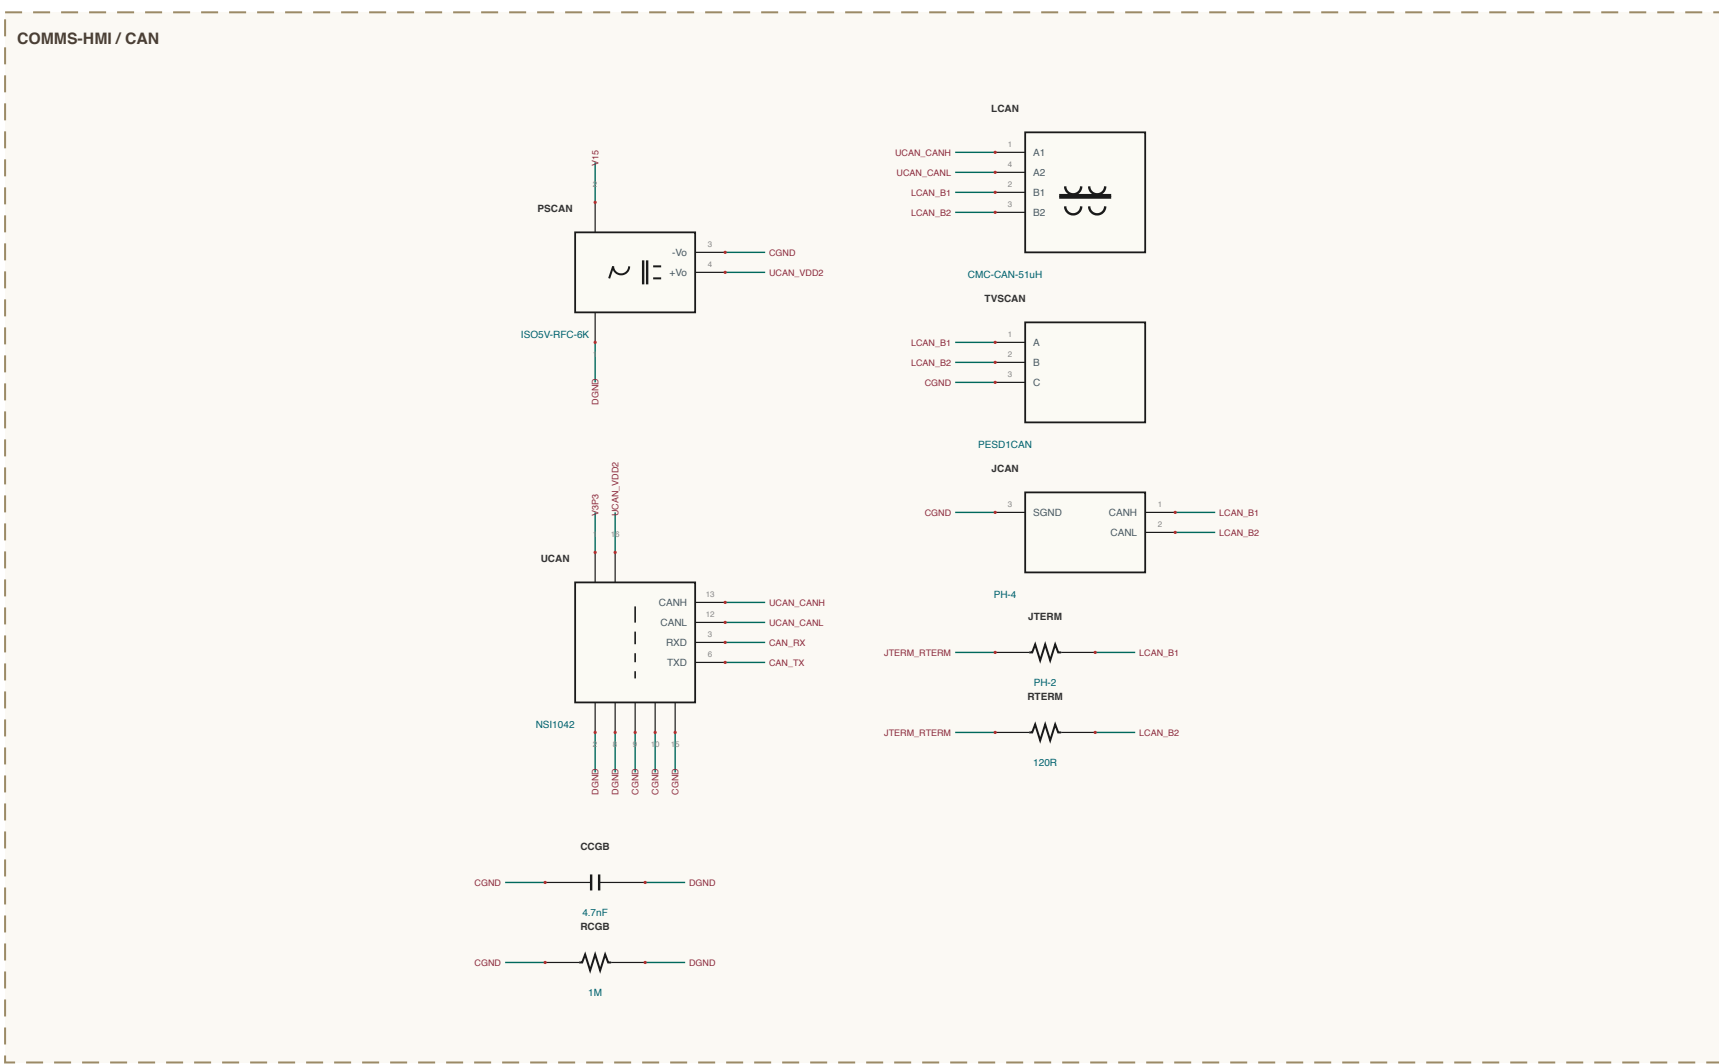
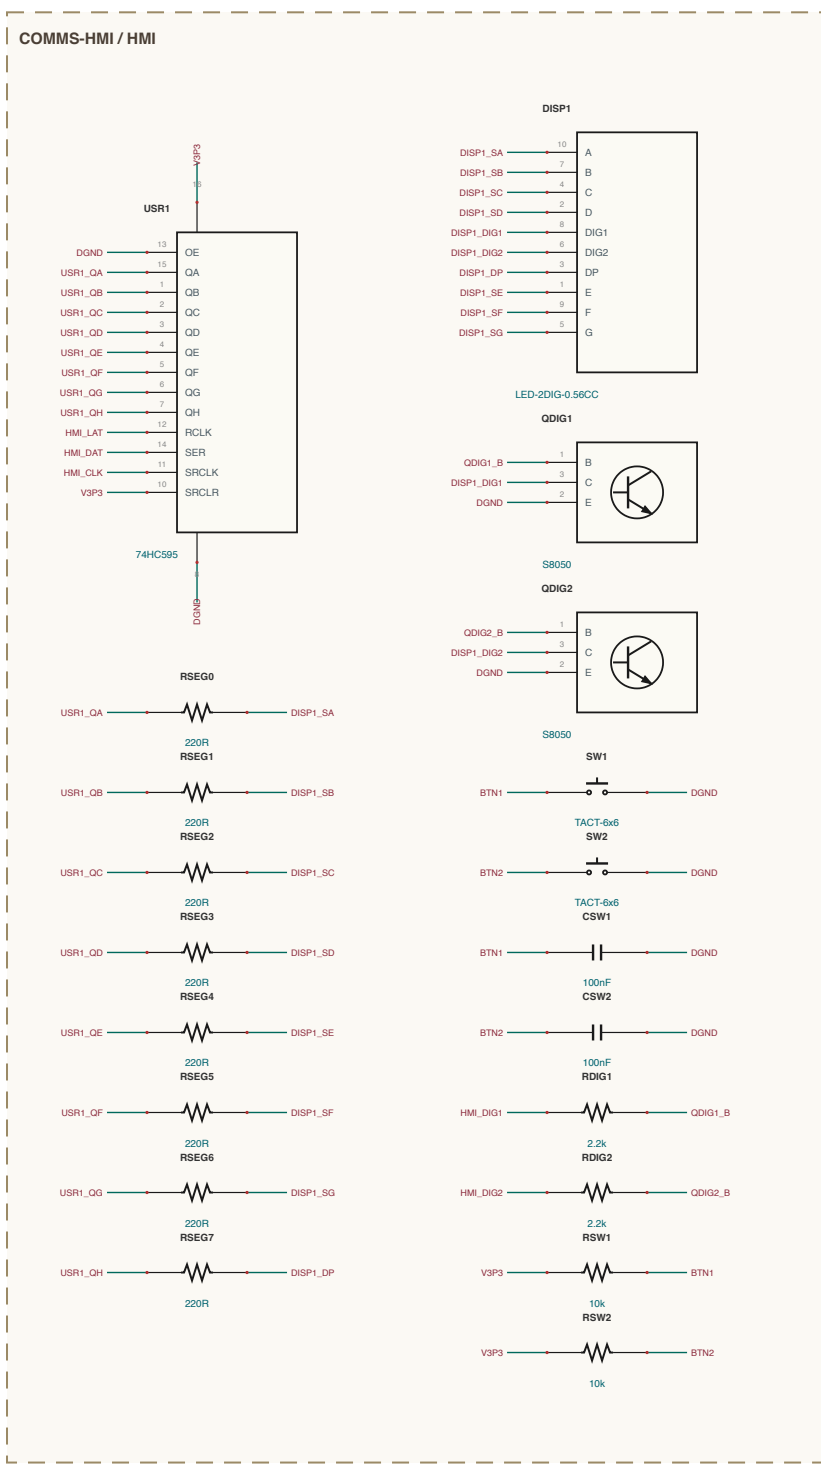
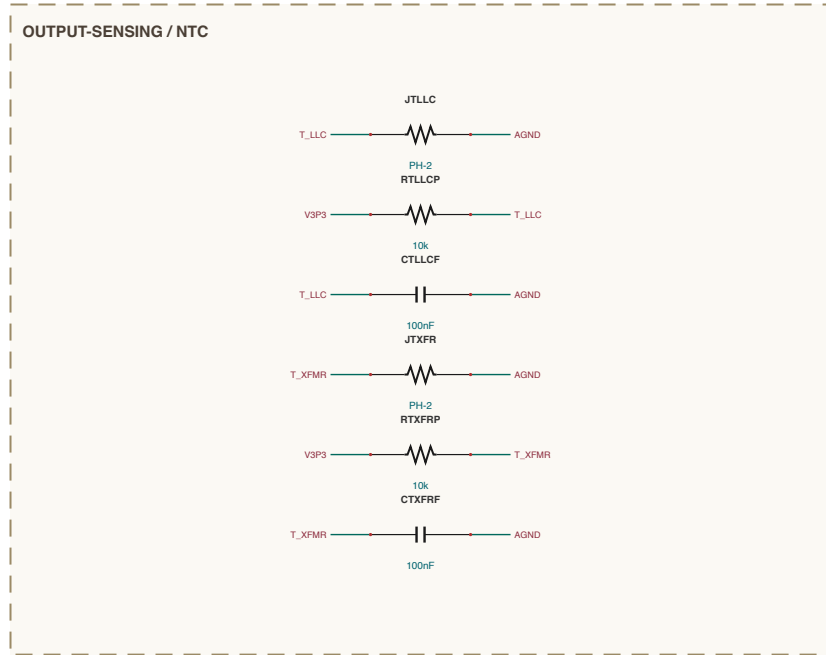
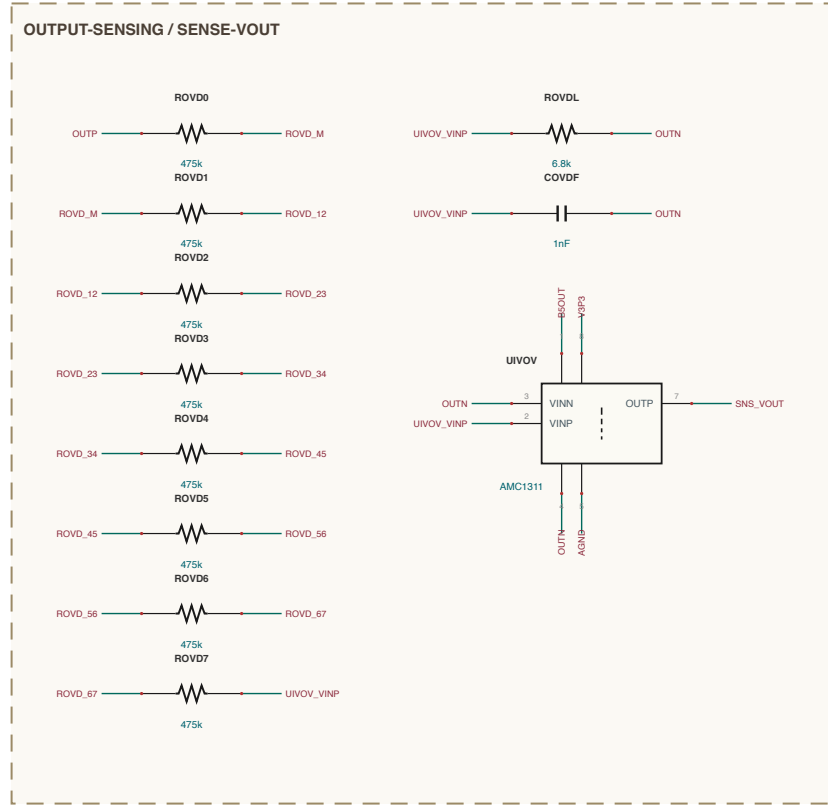
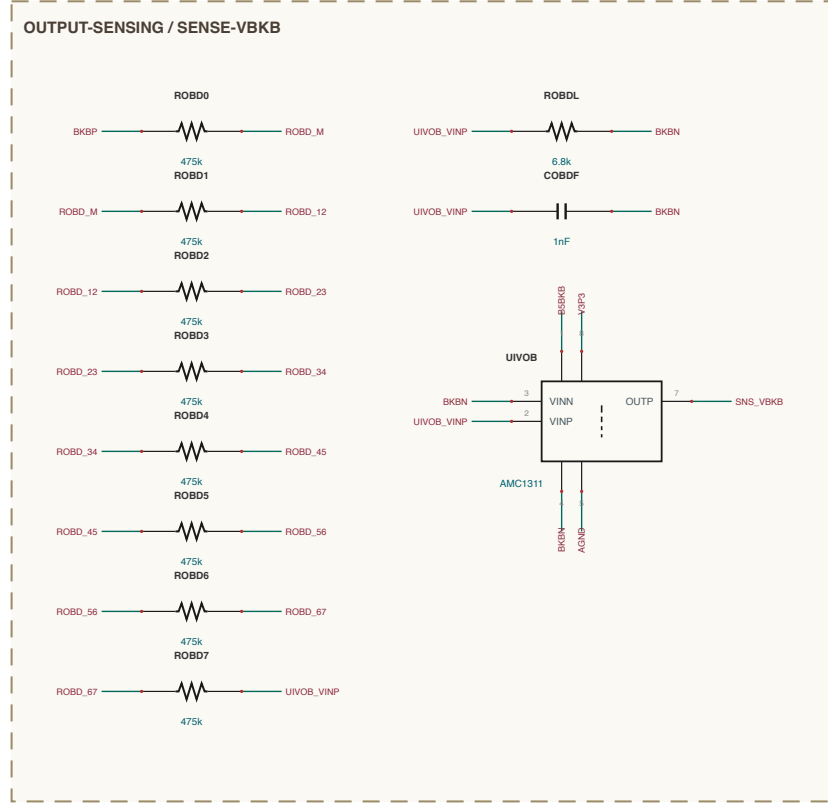
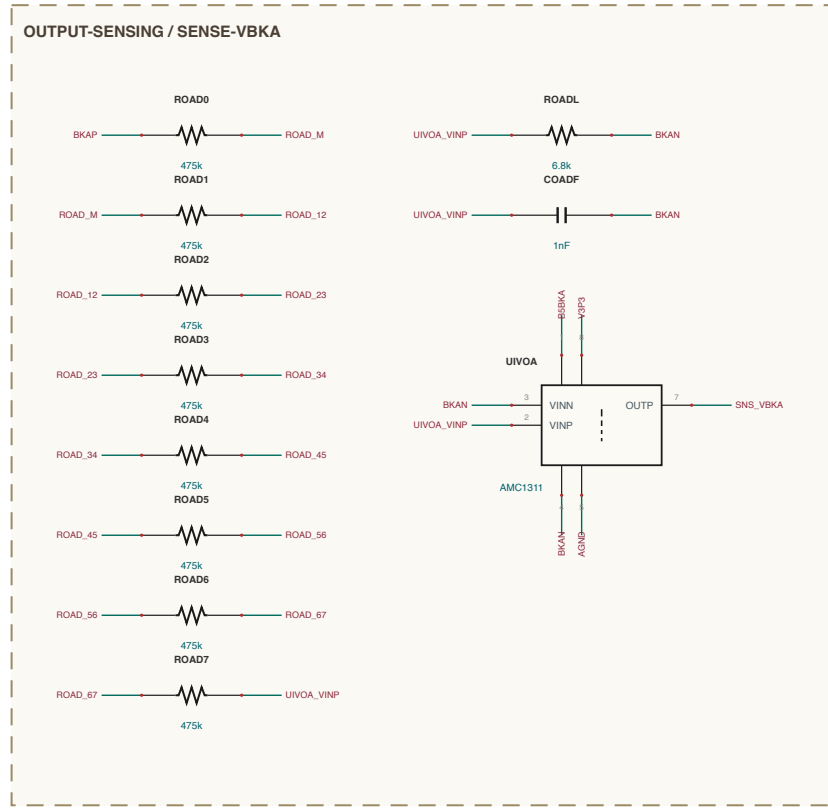
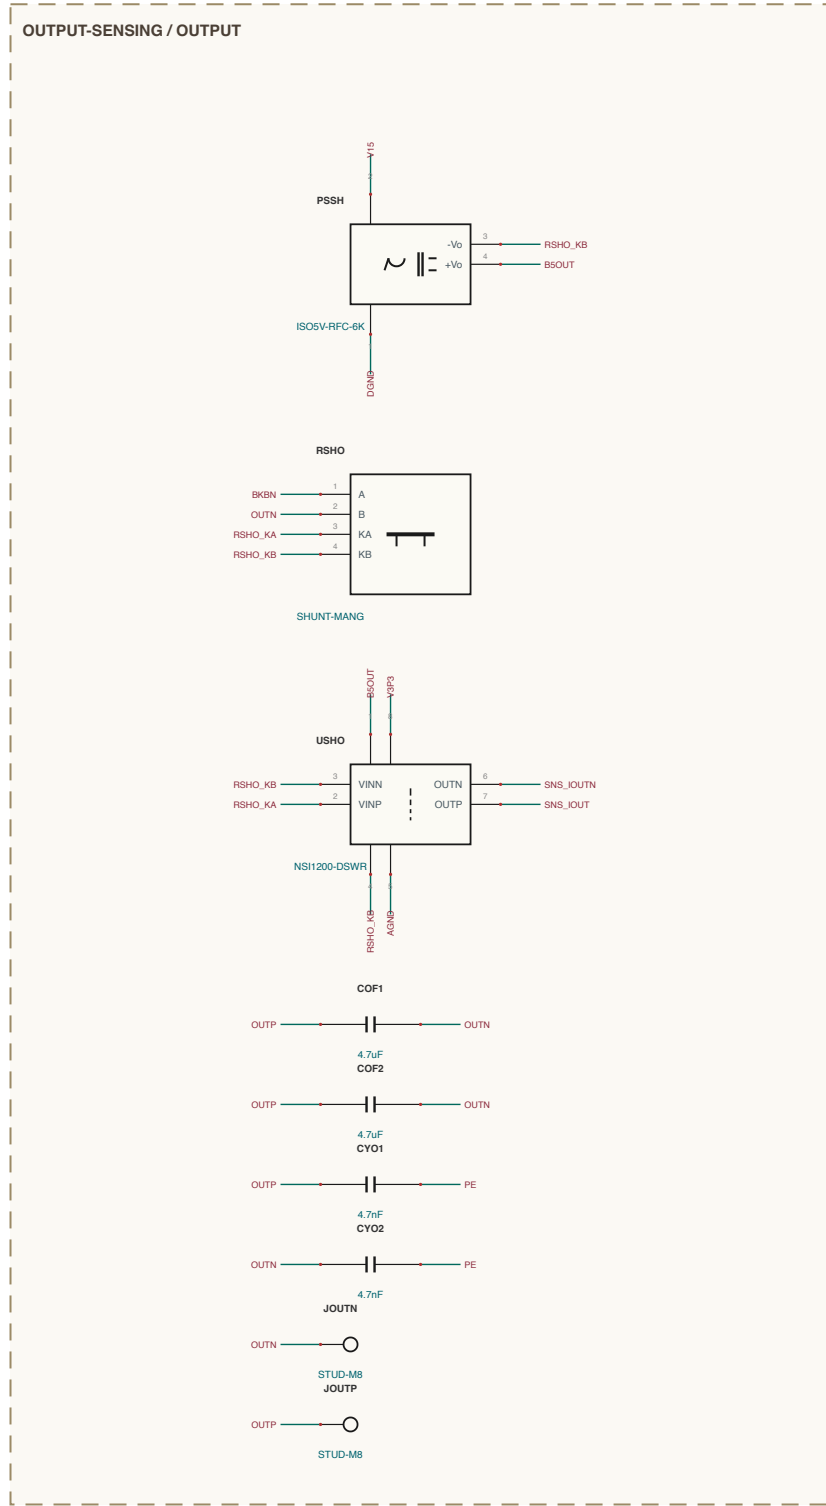
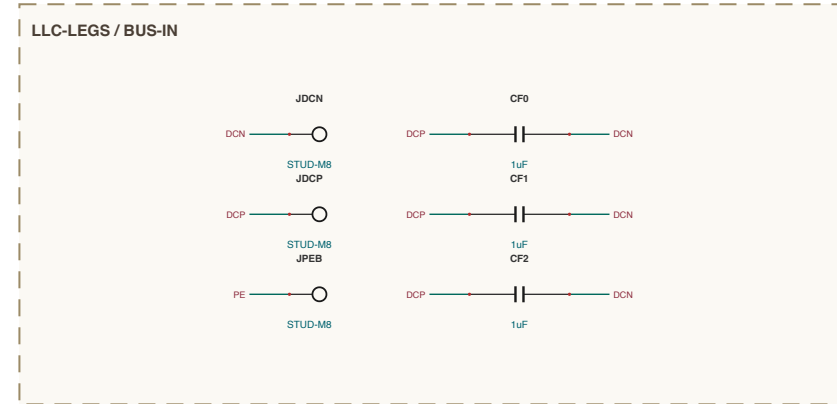
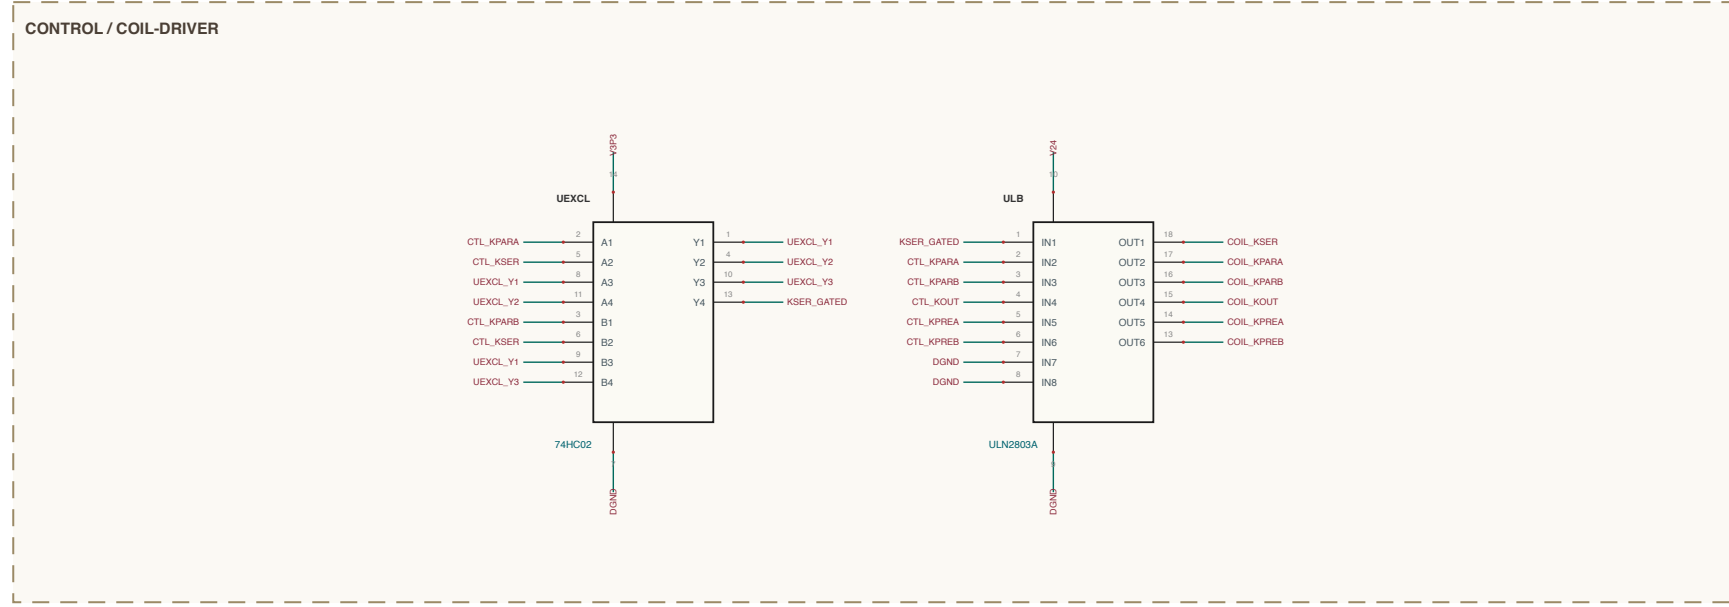
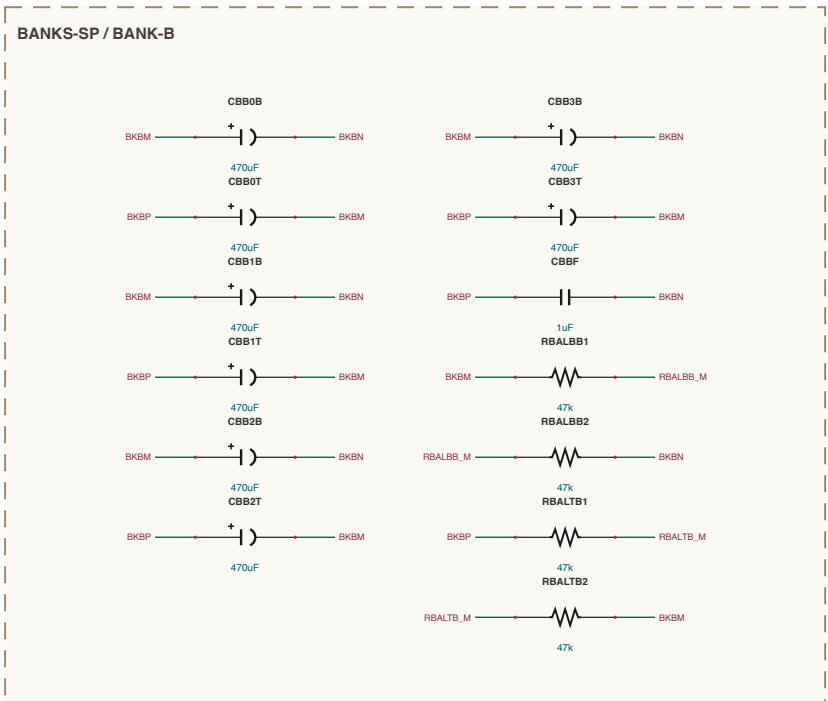
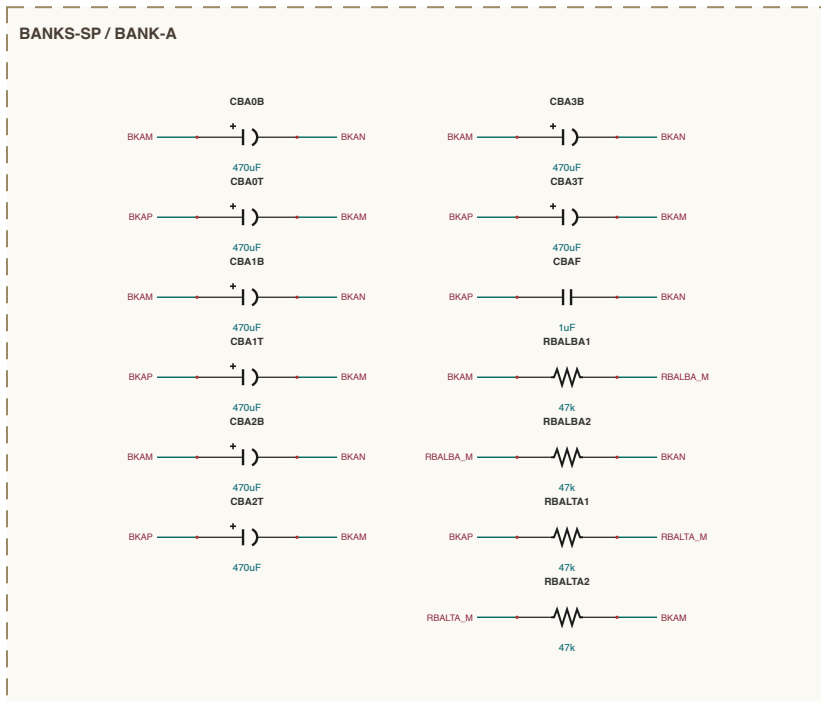
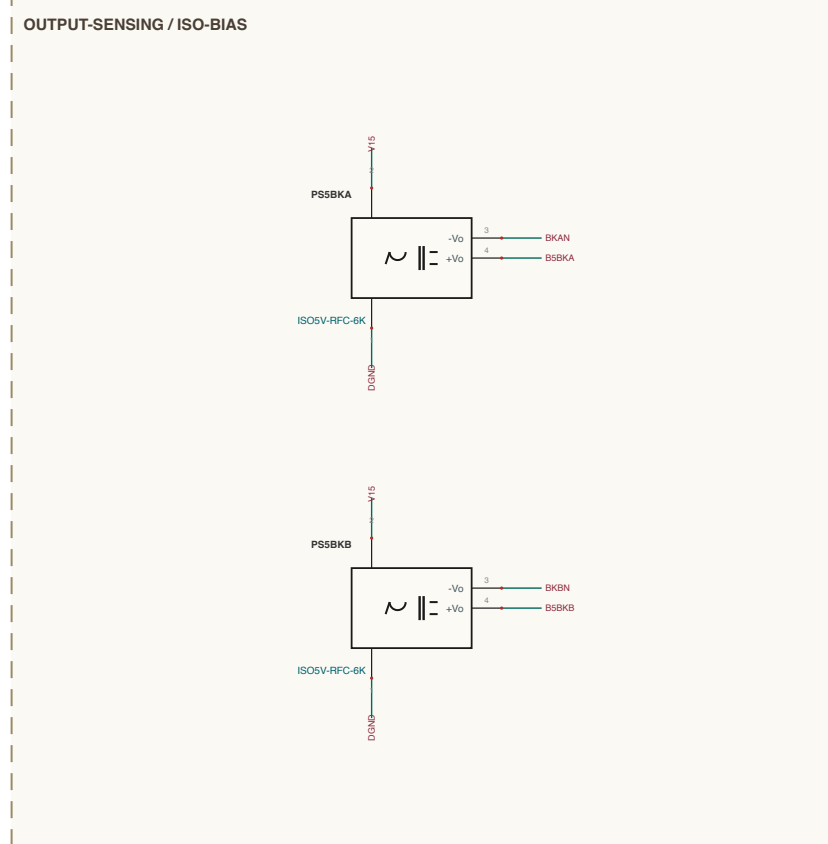
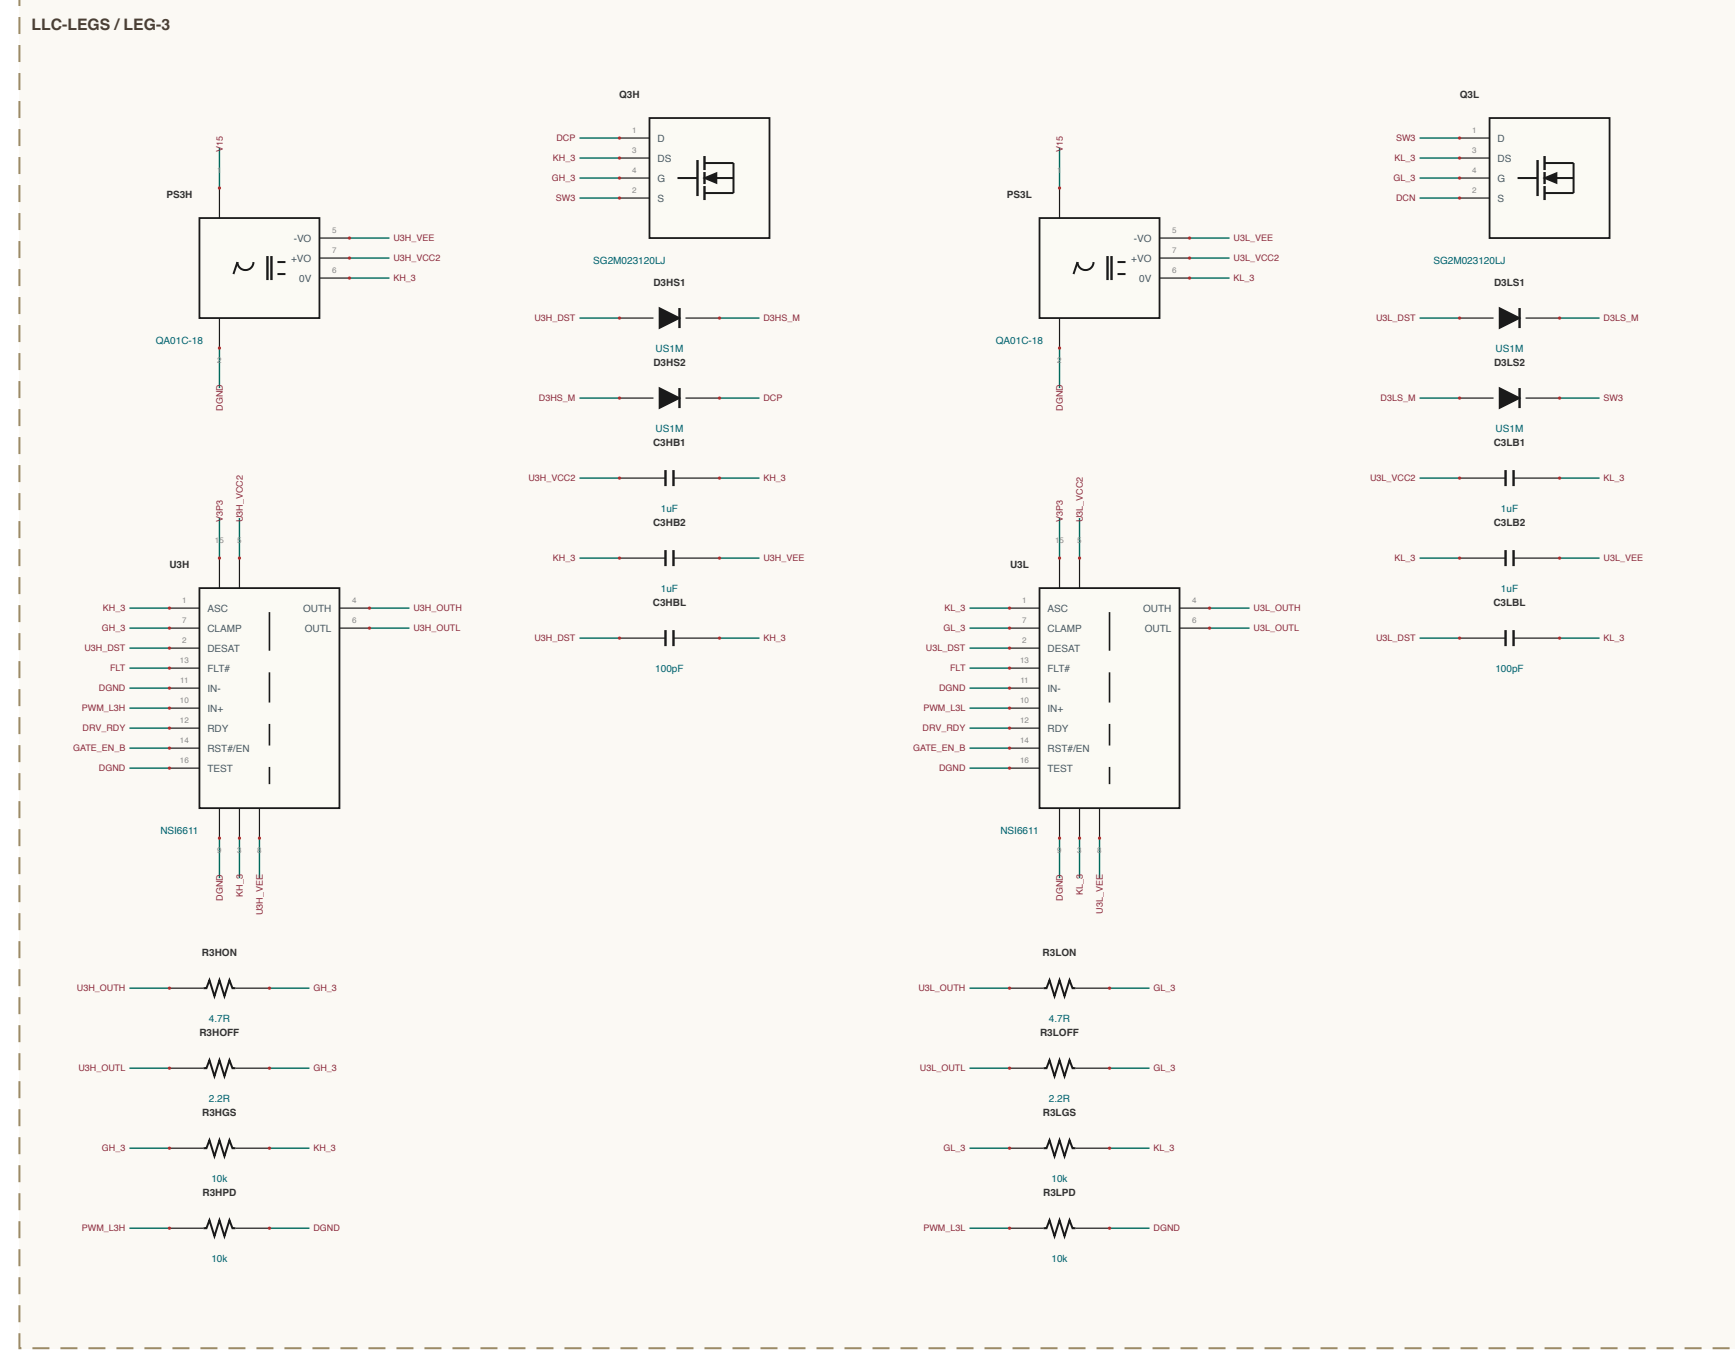
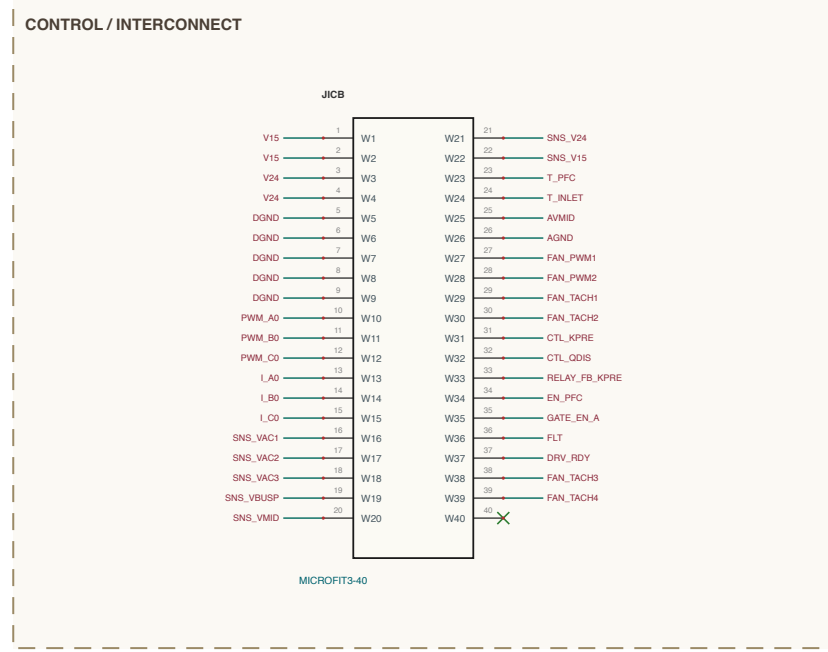
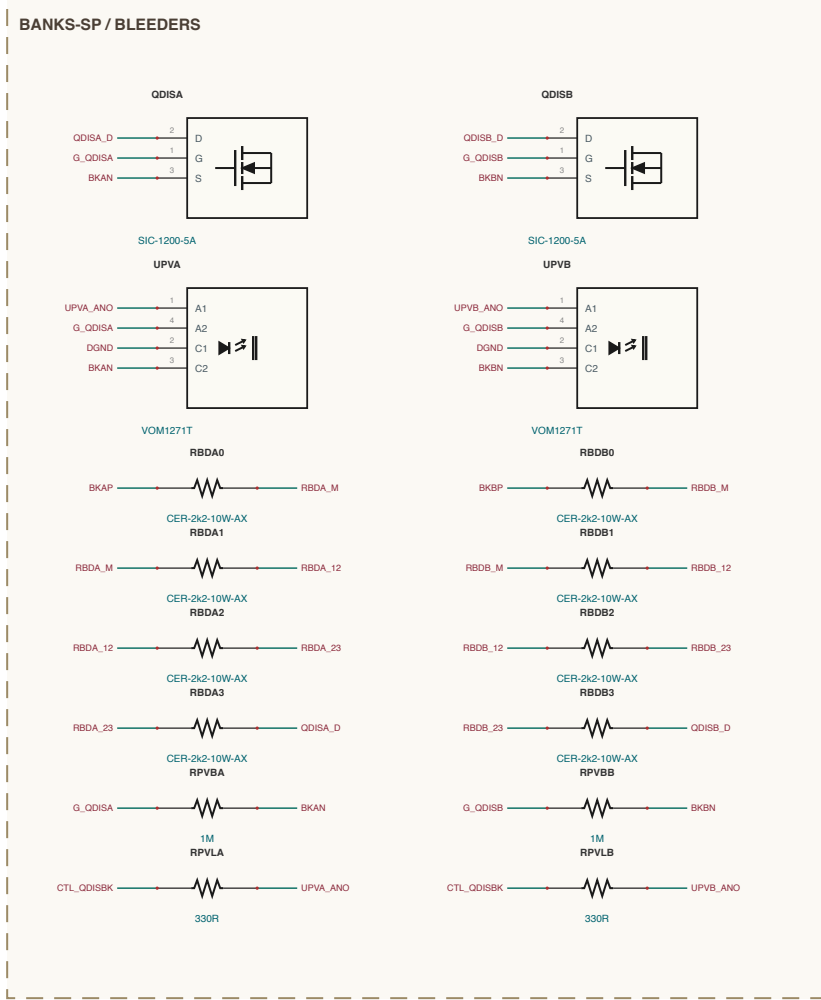


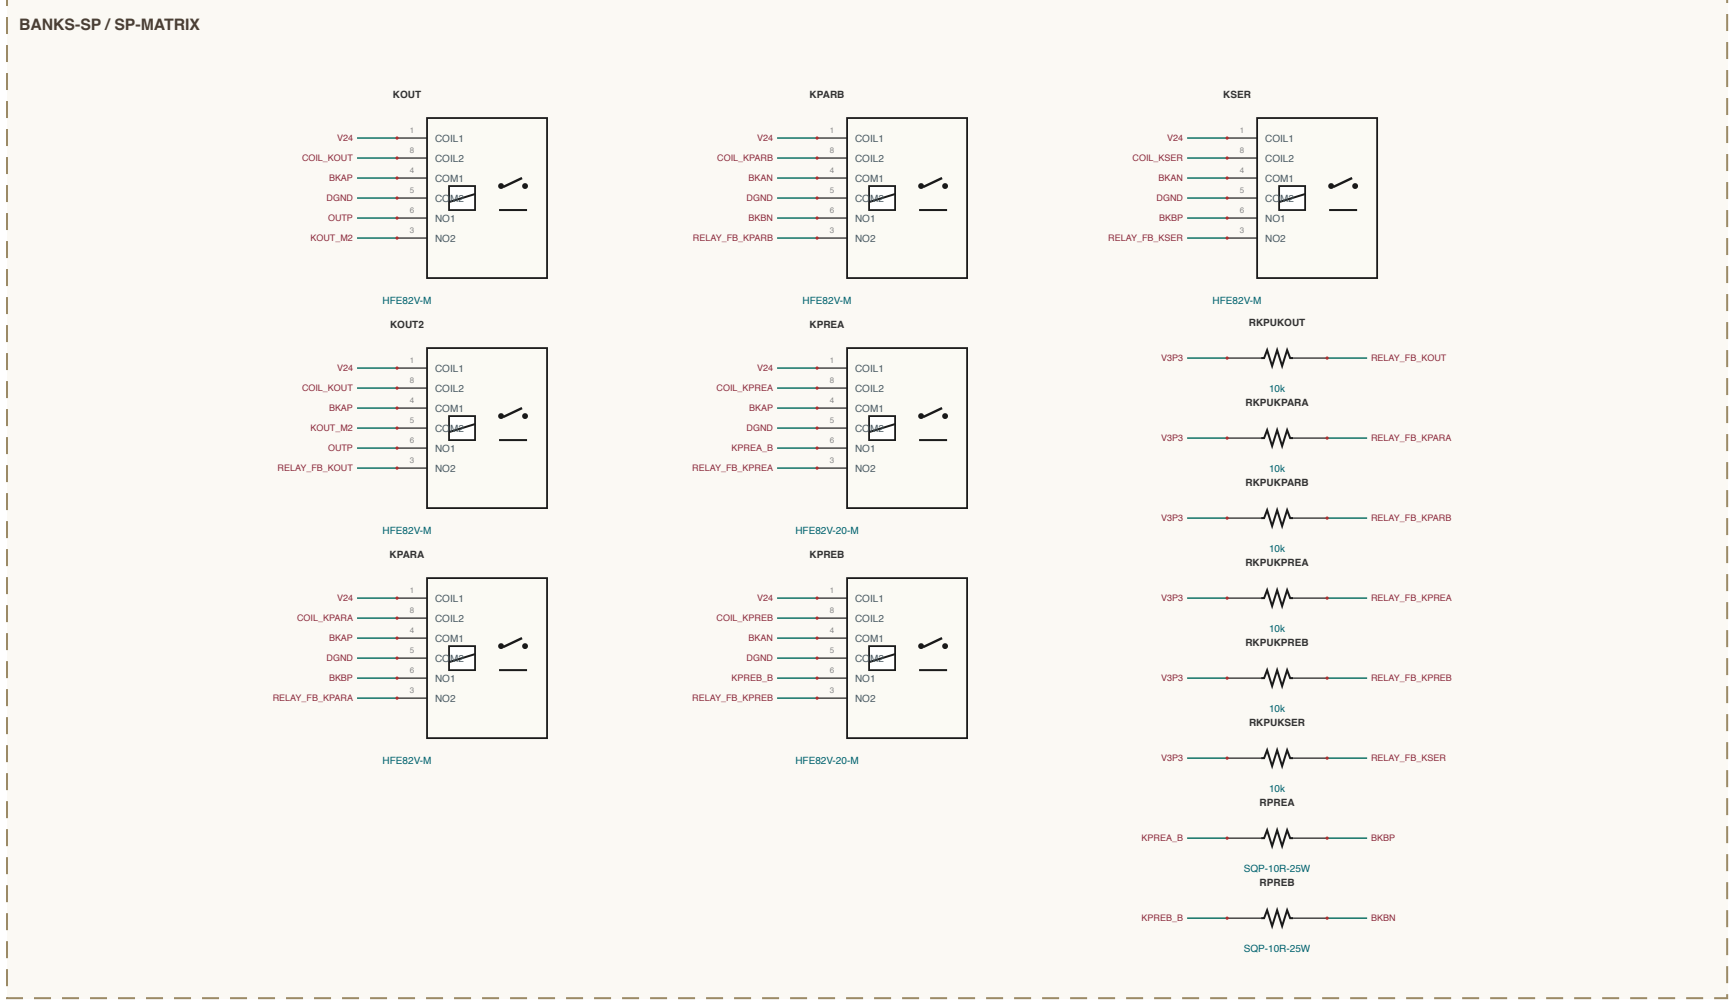

SHEET INDEX	
50 kW - 7 of 2	
OUTPUT-SENSING - 8 sections	
BANKS-SP - 4 sections	
LLC-LEGS - 4 sections	
CONTROL - 3 sections	
LLC-TANKS - 3 sections	
COMMS-HUB - 2 sections	
rev 0.1 - 22 sections - 200 components	

NET NAMING

Internal positions are named for what they join.

Switches - 4Pin mode at that I2 pin e.g. SP1A, SP1B.

Resistors - M midpoint of a series pair e.g. R1A1A, R1A1B.

Inductors - center tap between Inductor e.g. R1A1A, R1A1B.

all others are explicit design nets