
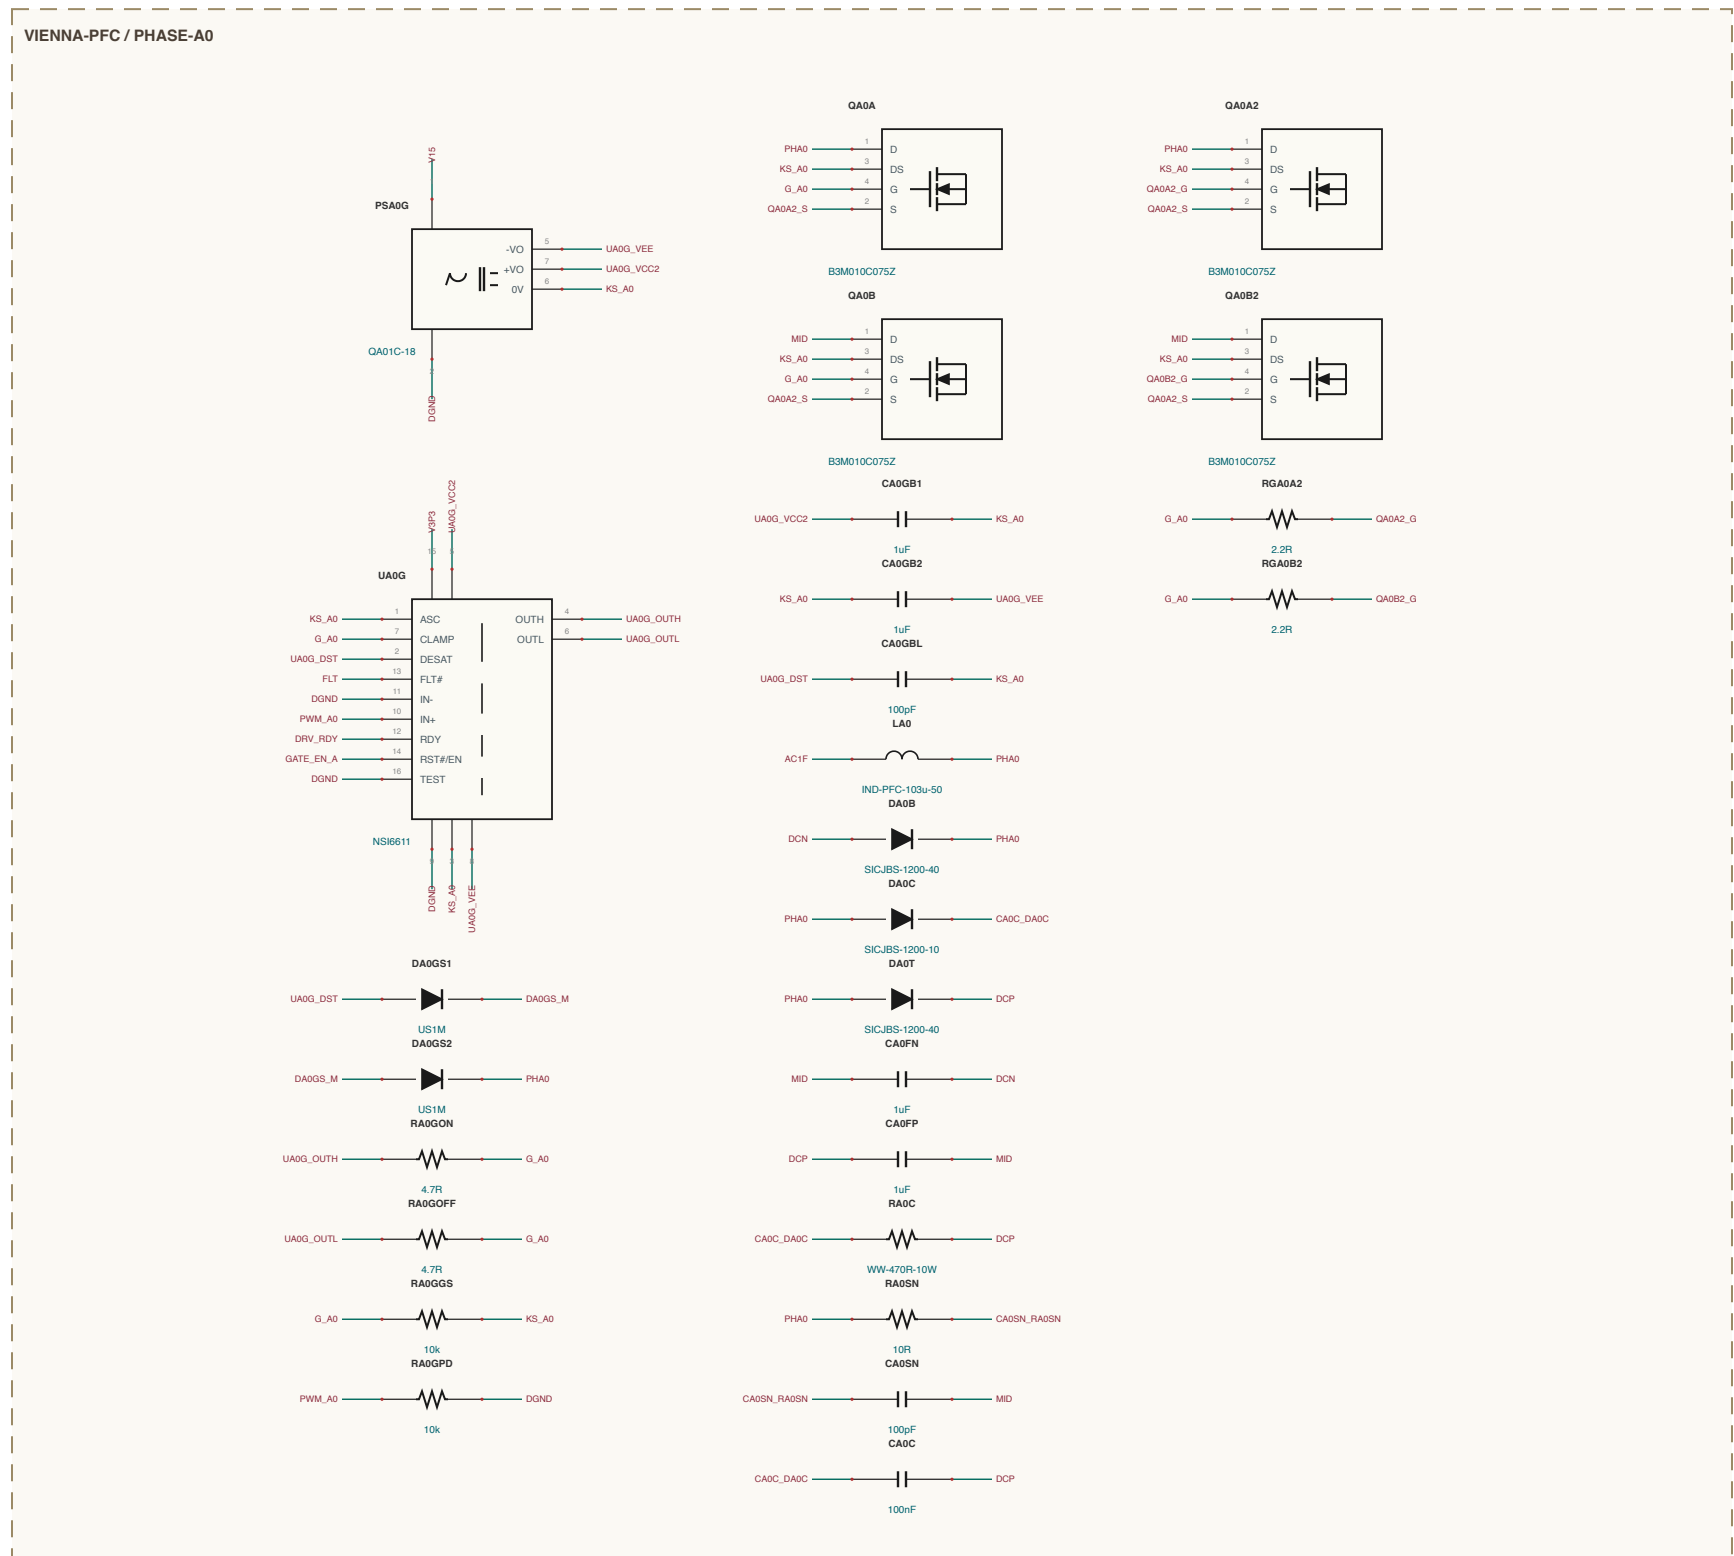
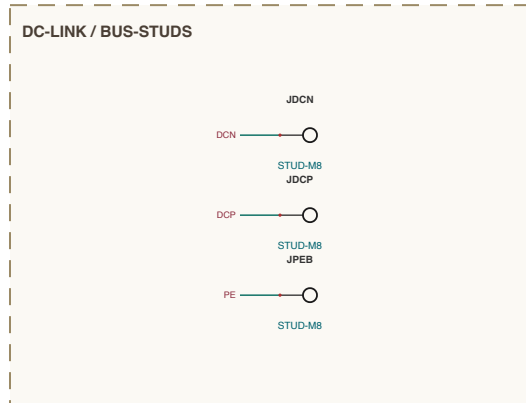
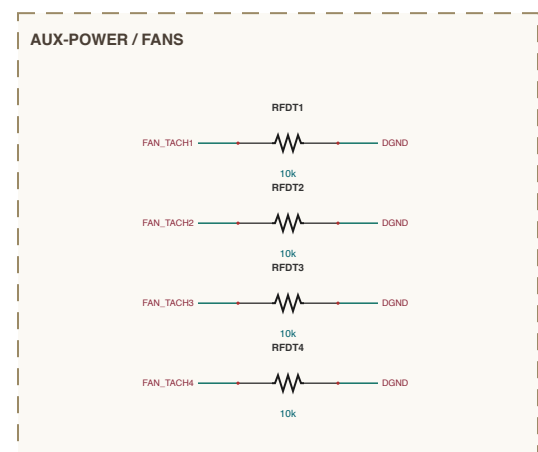
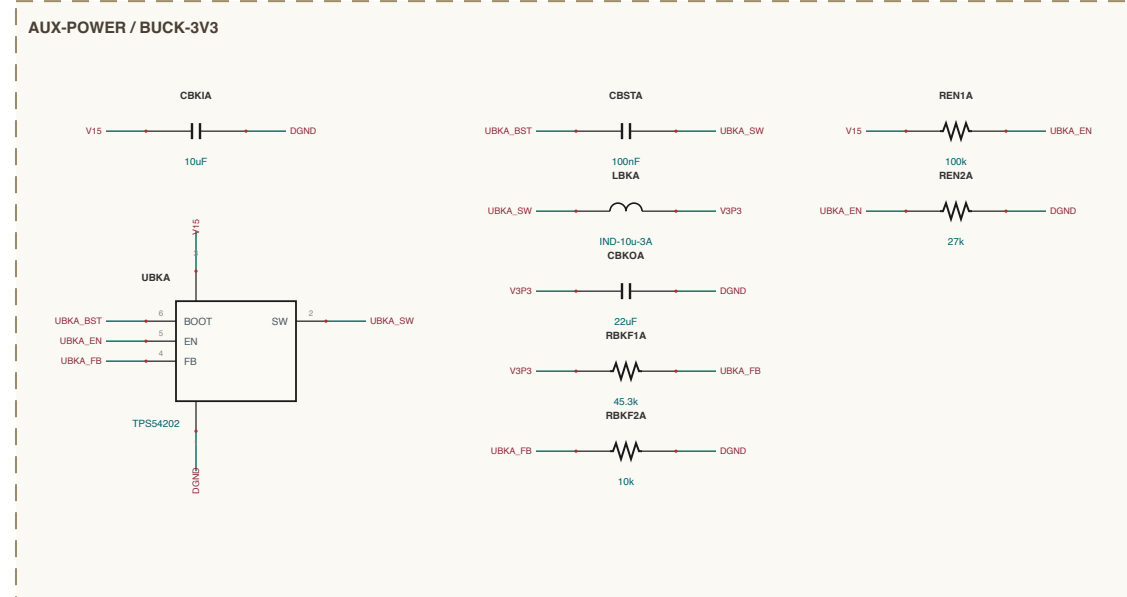
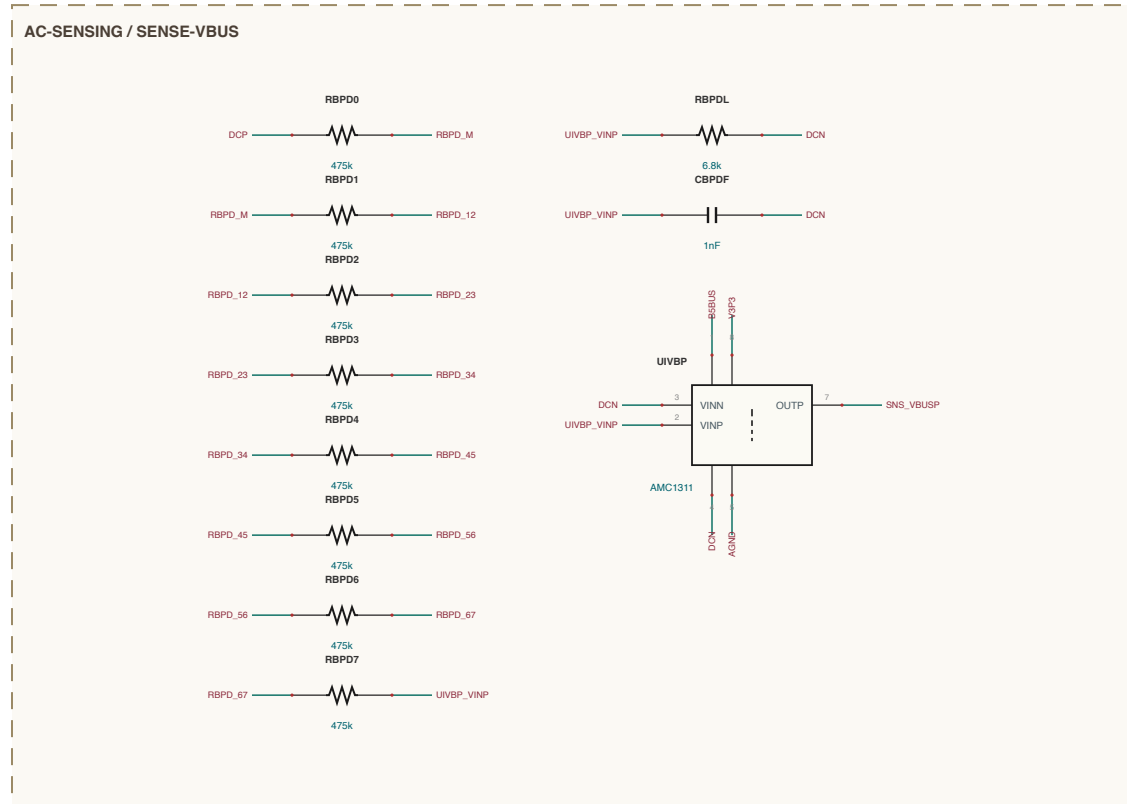
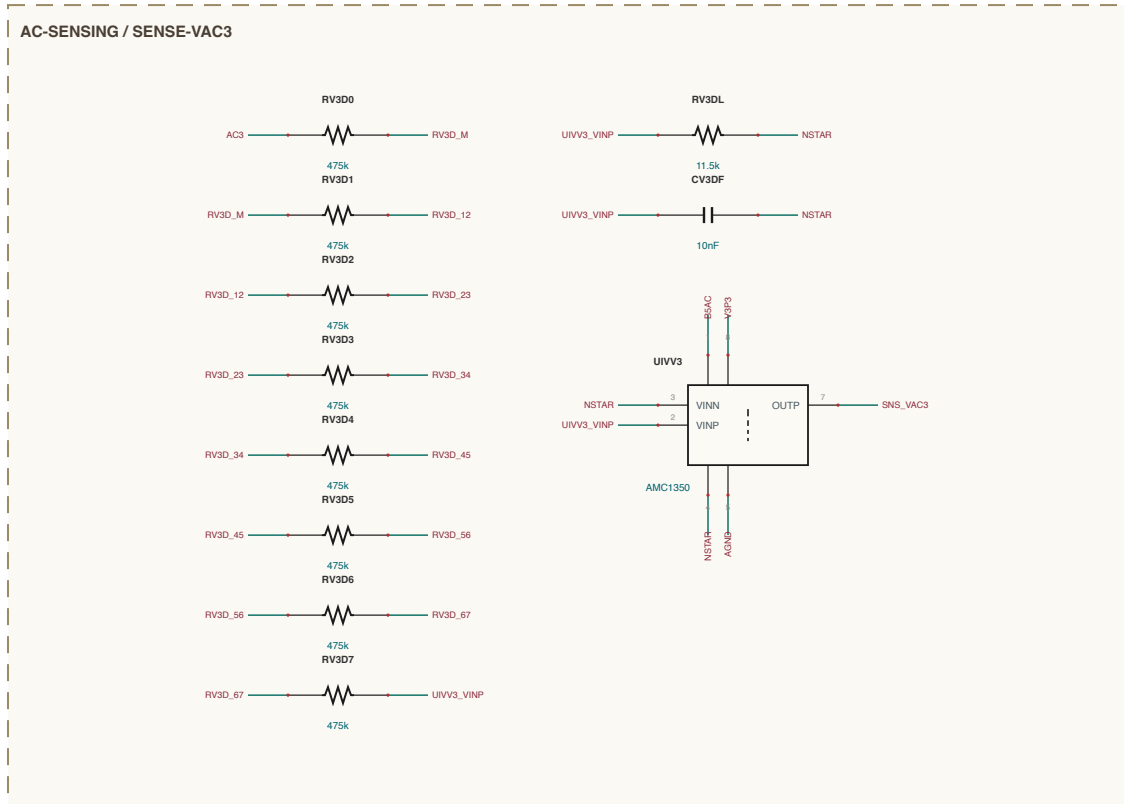
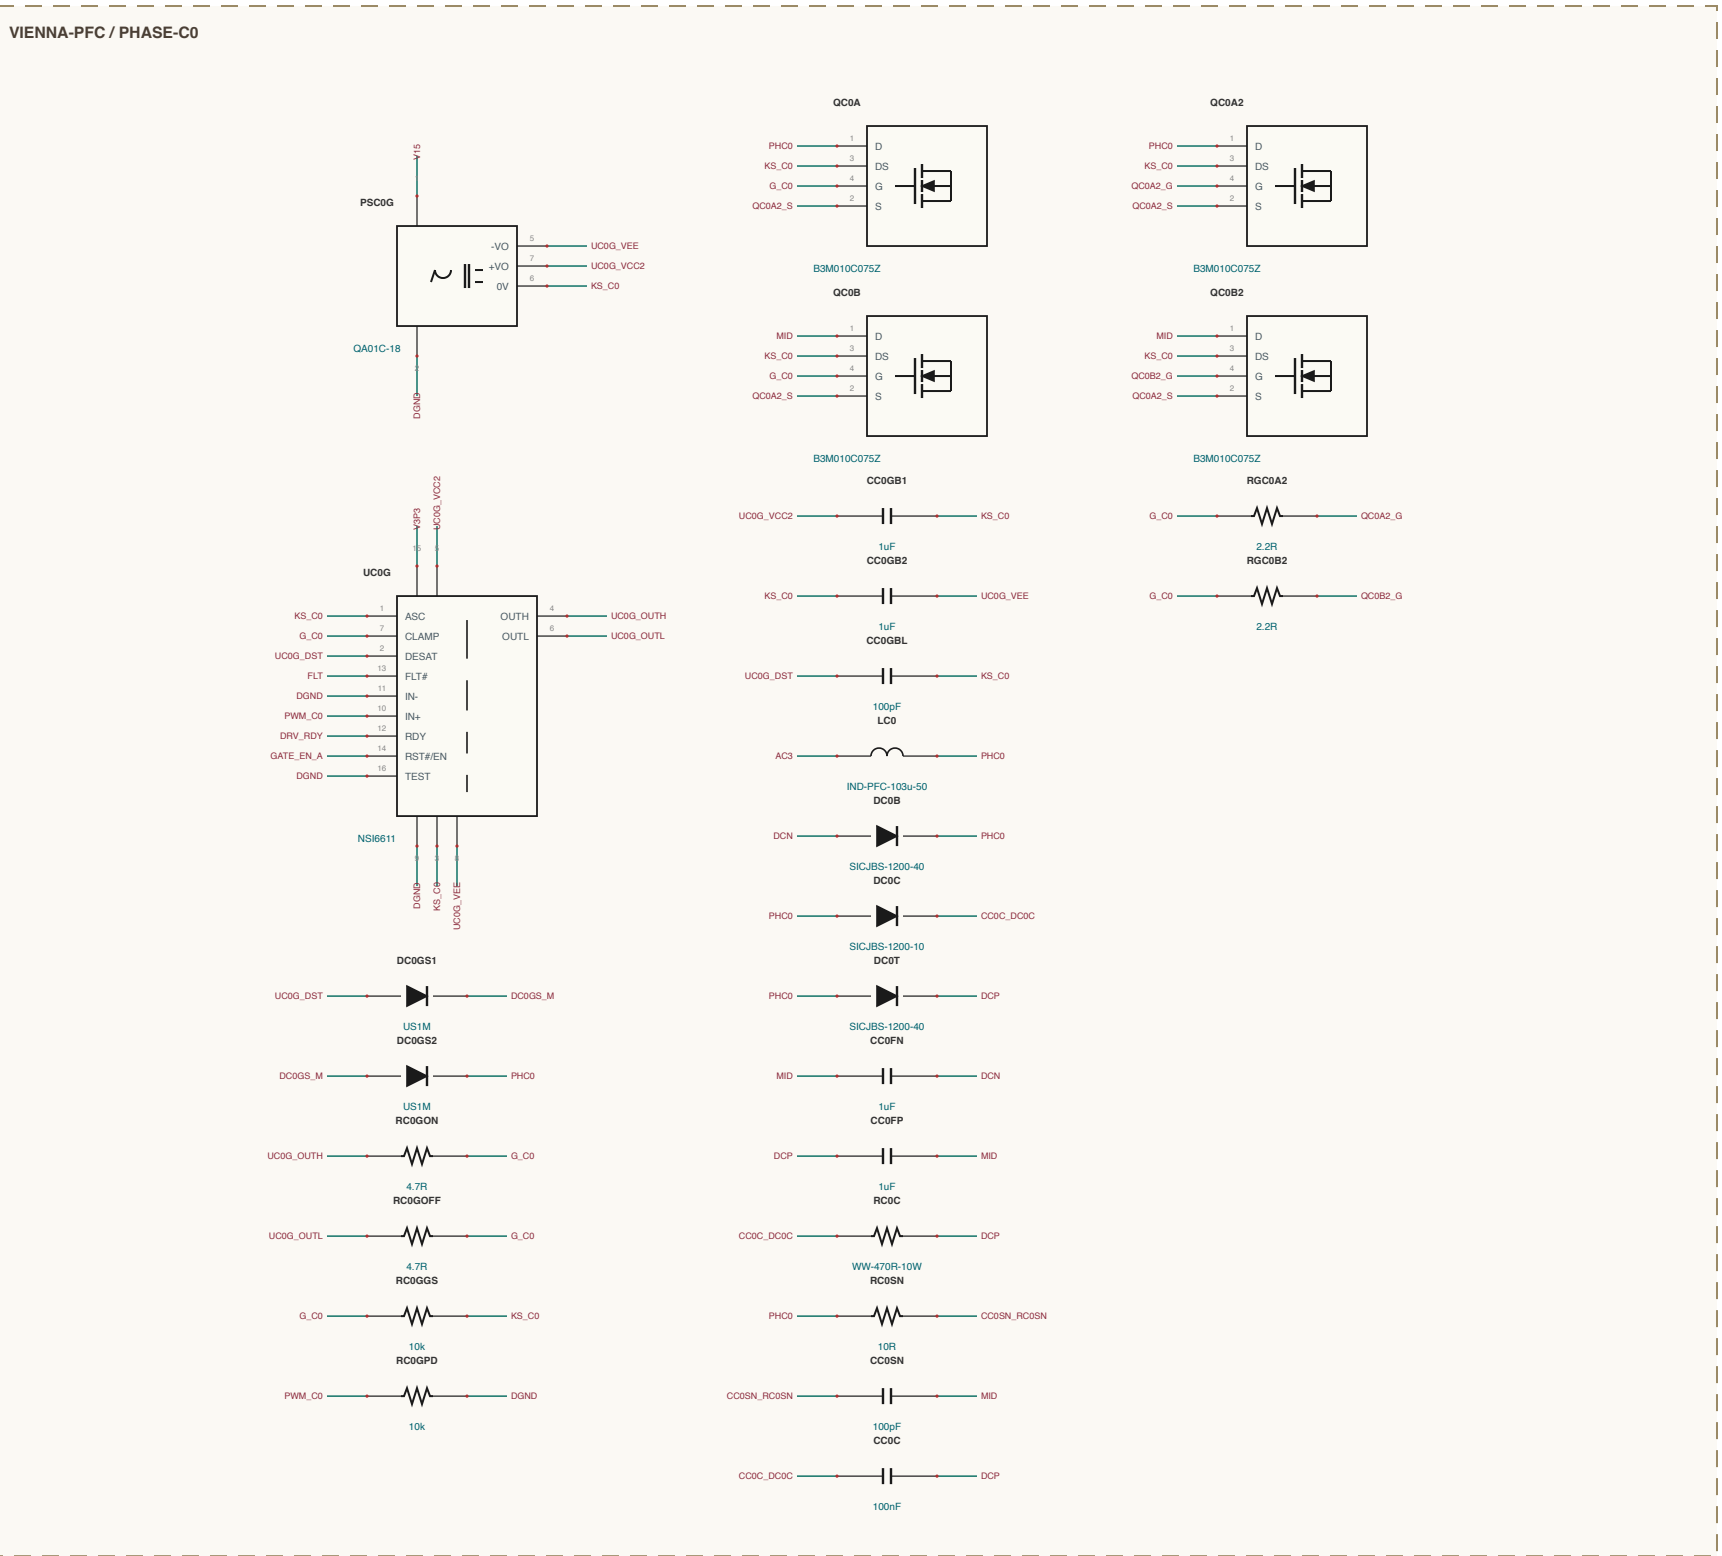
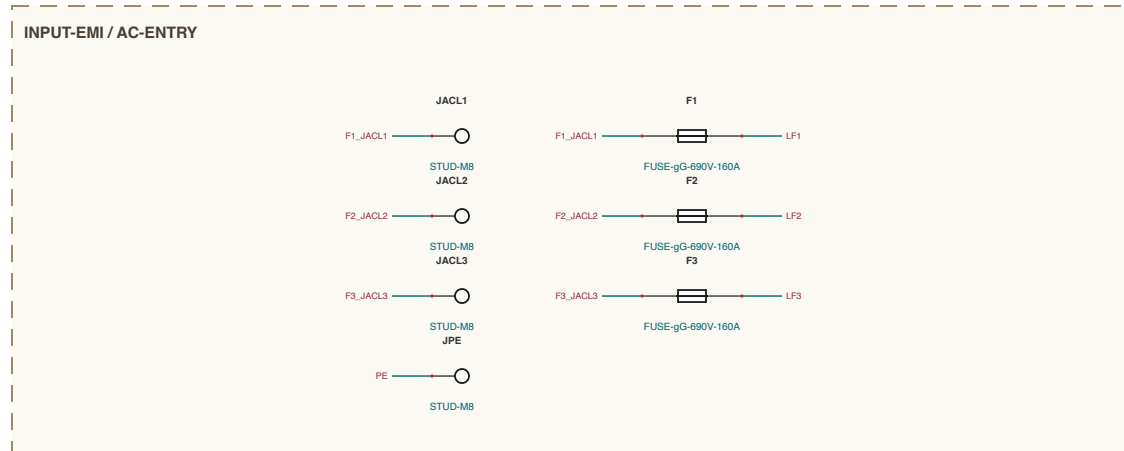
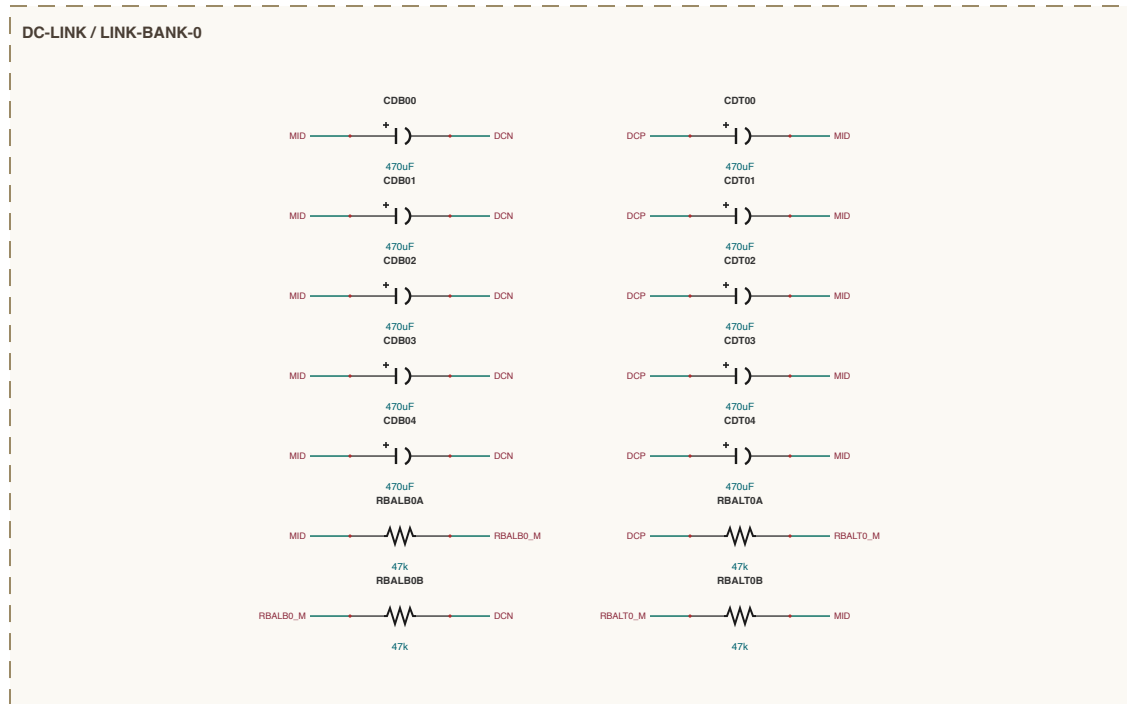
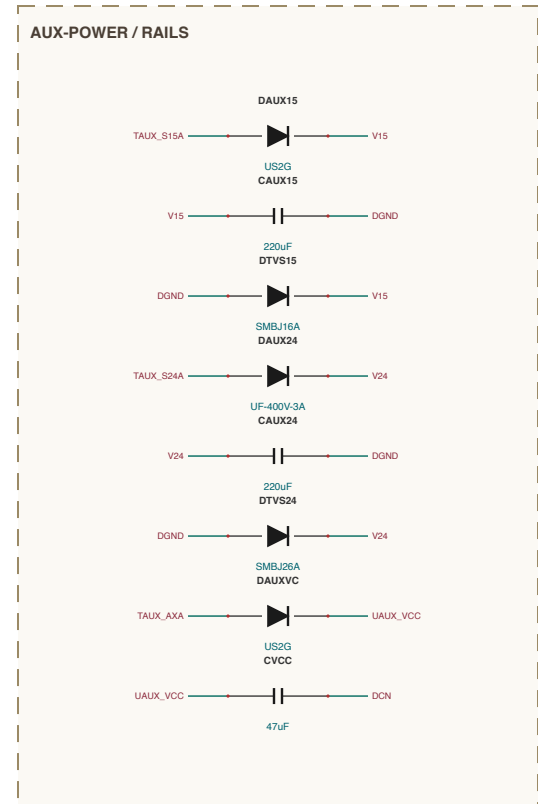
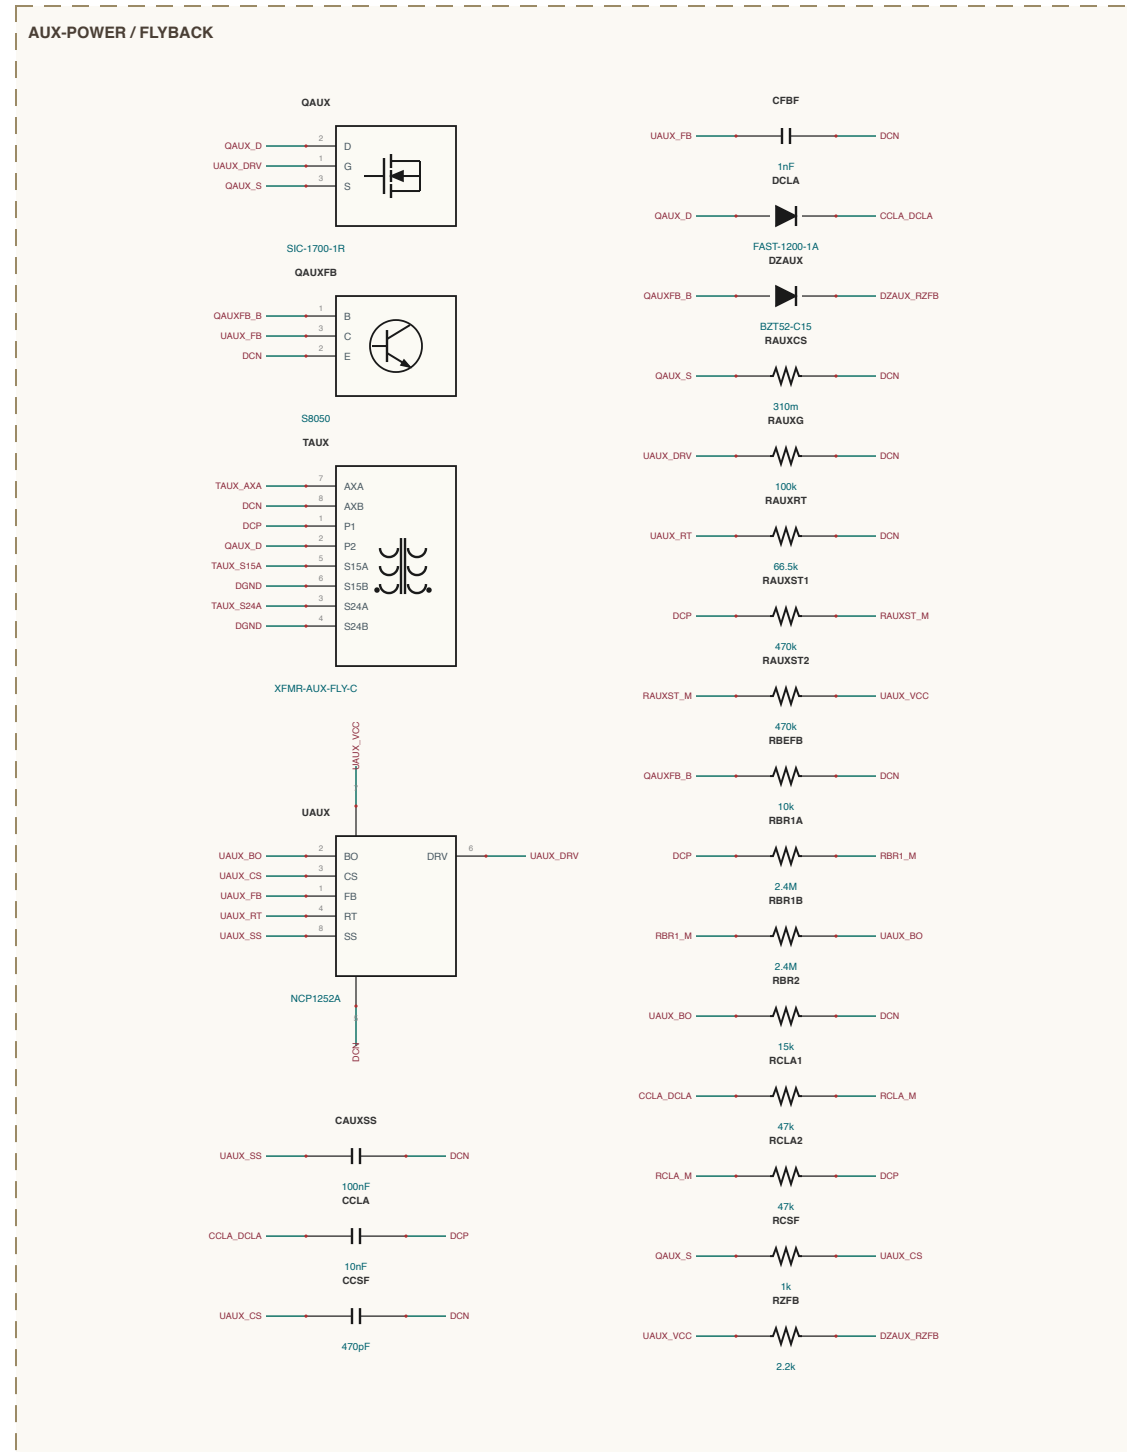
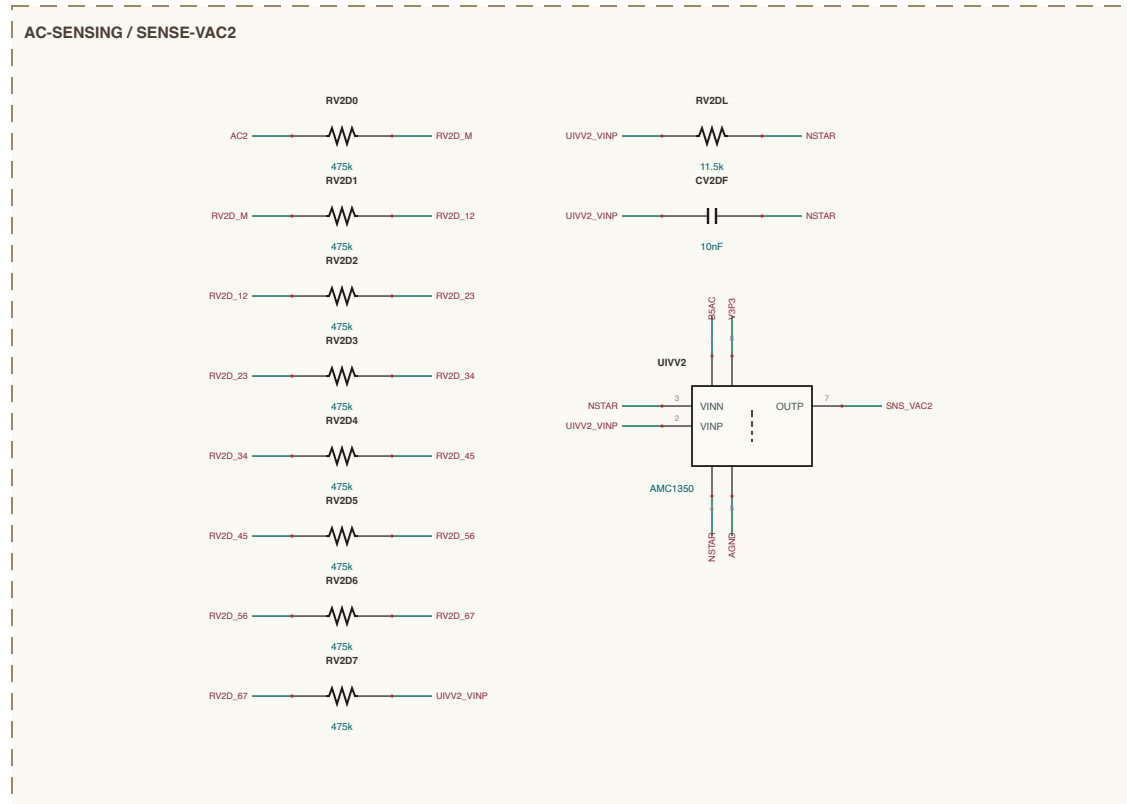







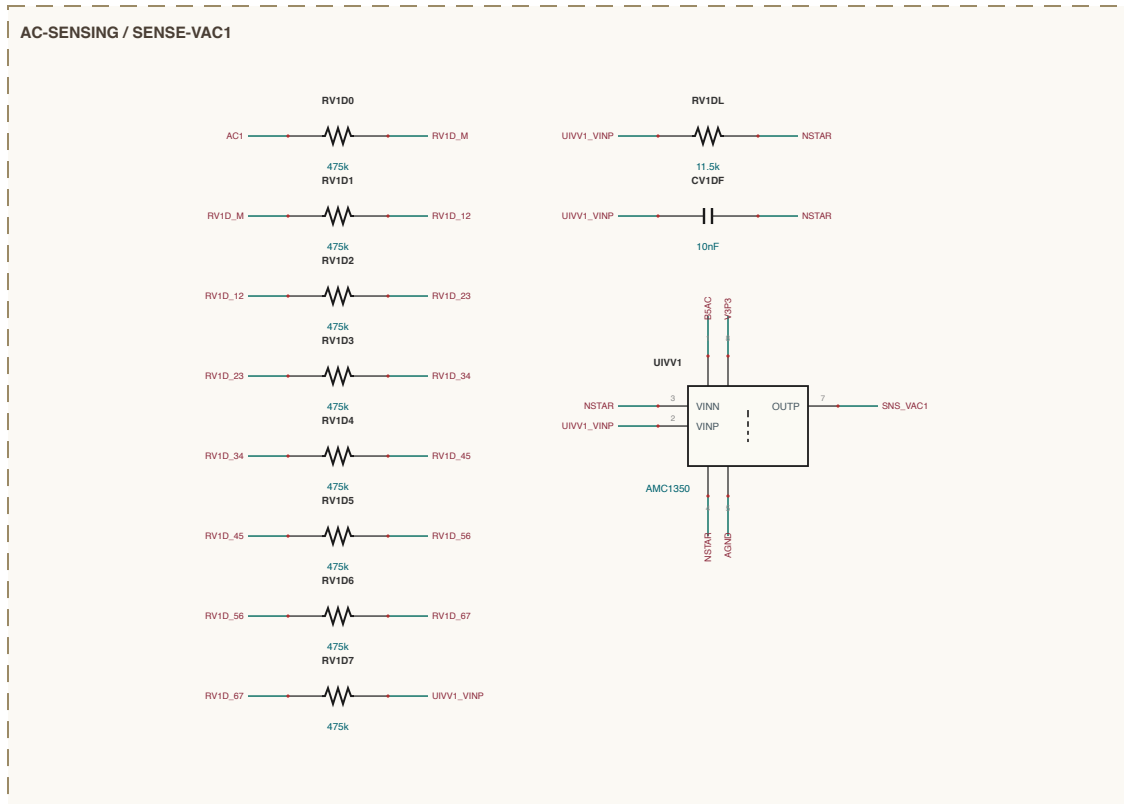






















SHEET INDEX

Sheet 1-1 of 2
AC-SENSING: 9 sections
AUX-POWER: 9 sections
CONTROL: 1 section
DC-LINK: 4 sections
INPUT-EM: 4 sections
VIENNA-PFC: 3 sections
Ver 0.1 - 20 sections - 388 components

NET NAMING

General guidelines are needed for what they put
Source - OFFN mode at full IC pin e.g. V100A, V100P
Destination - W component of 1 section part e.g. V100A, W
Destination - when gap between Destination e.g. V100A, W
all others are explicit design note

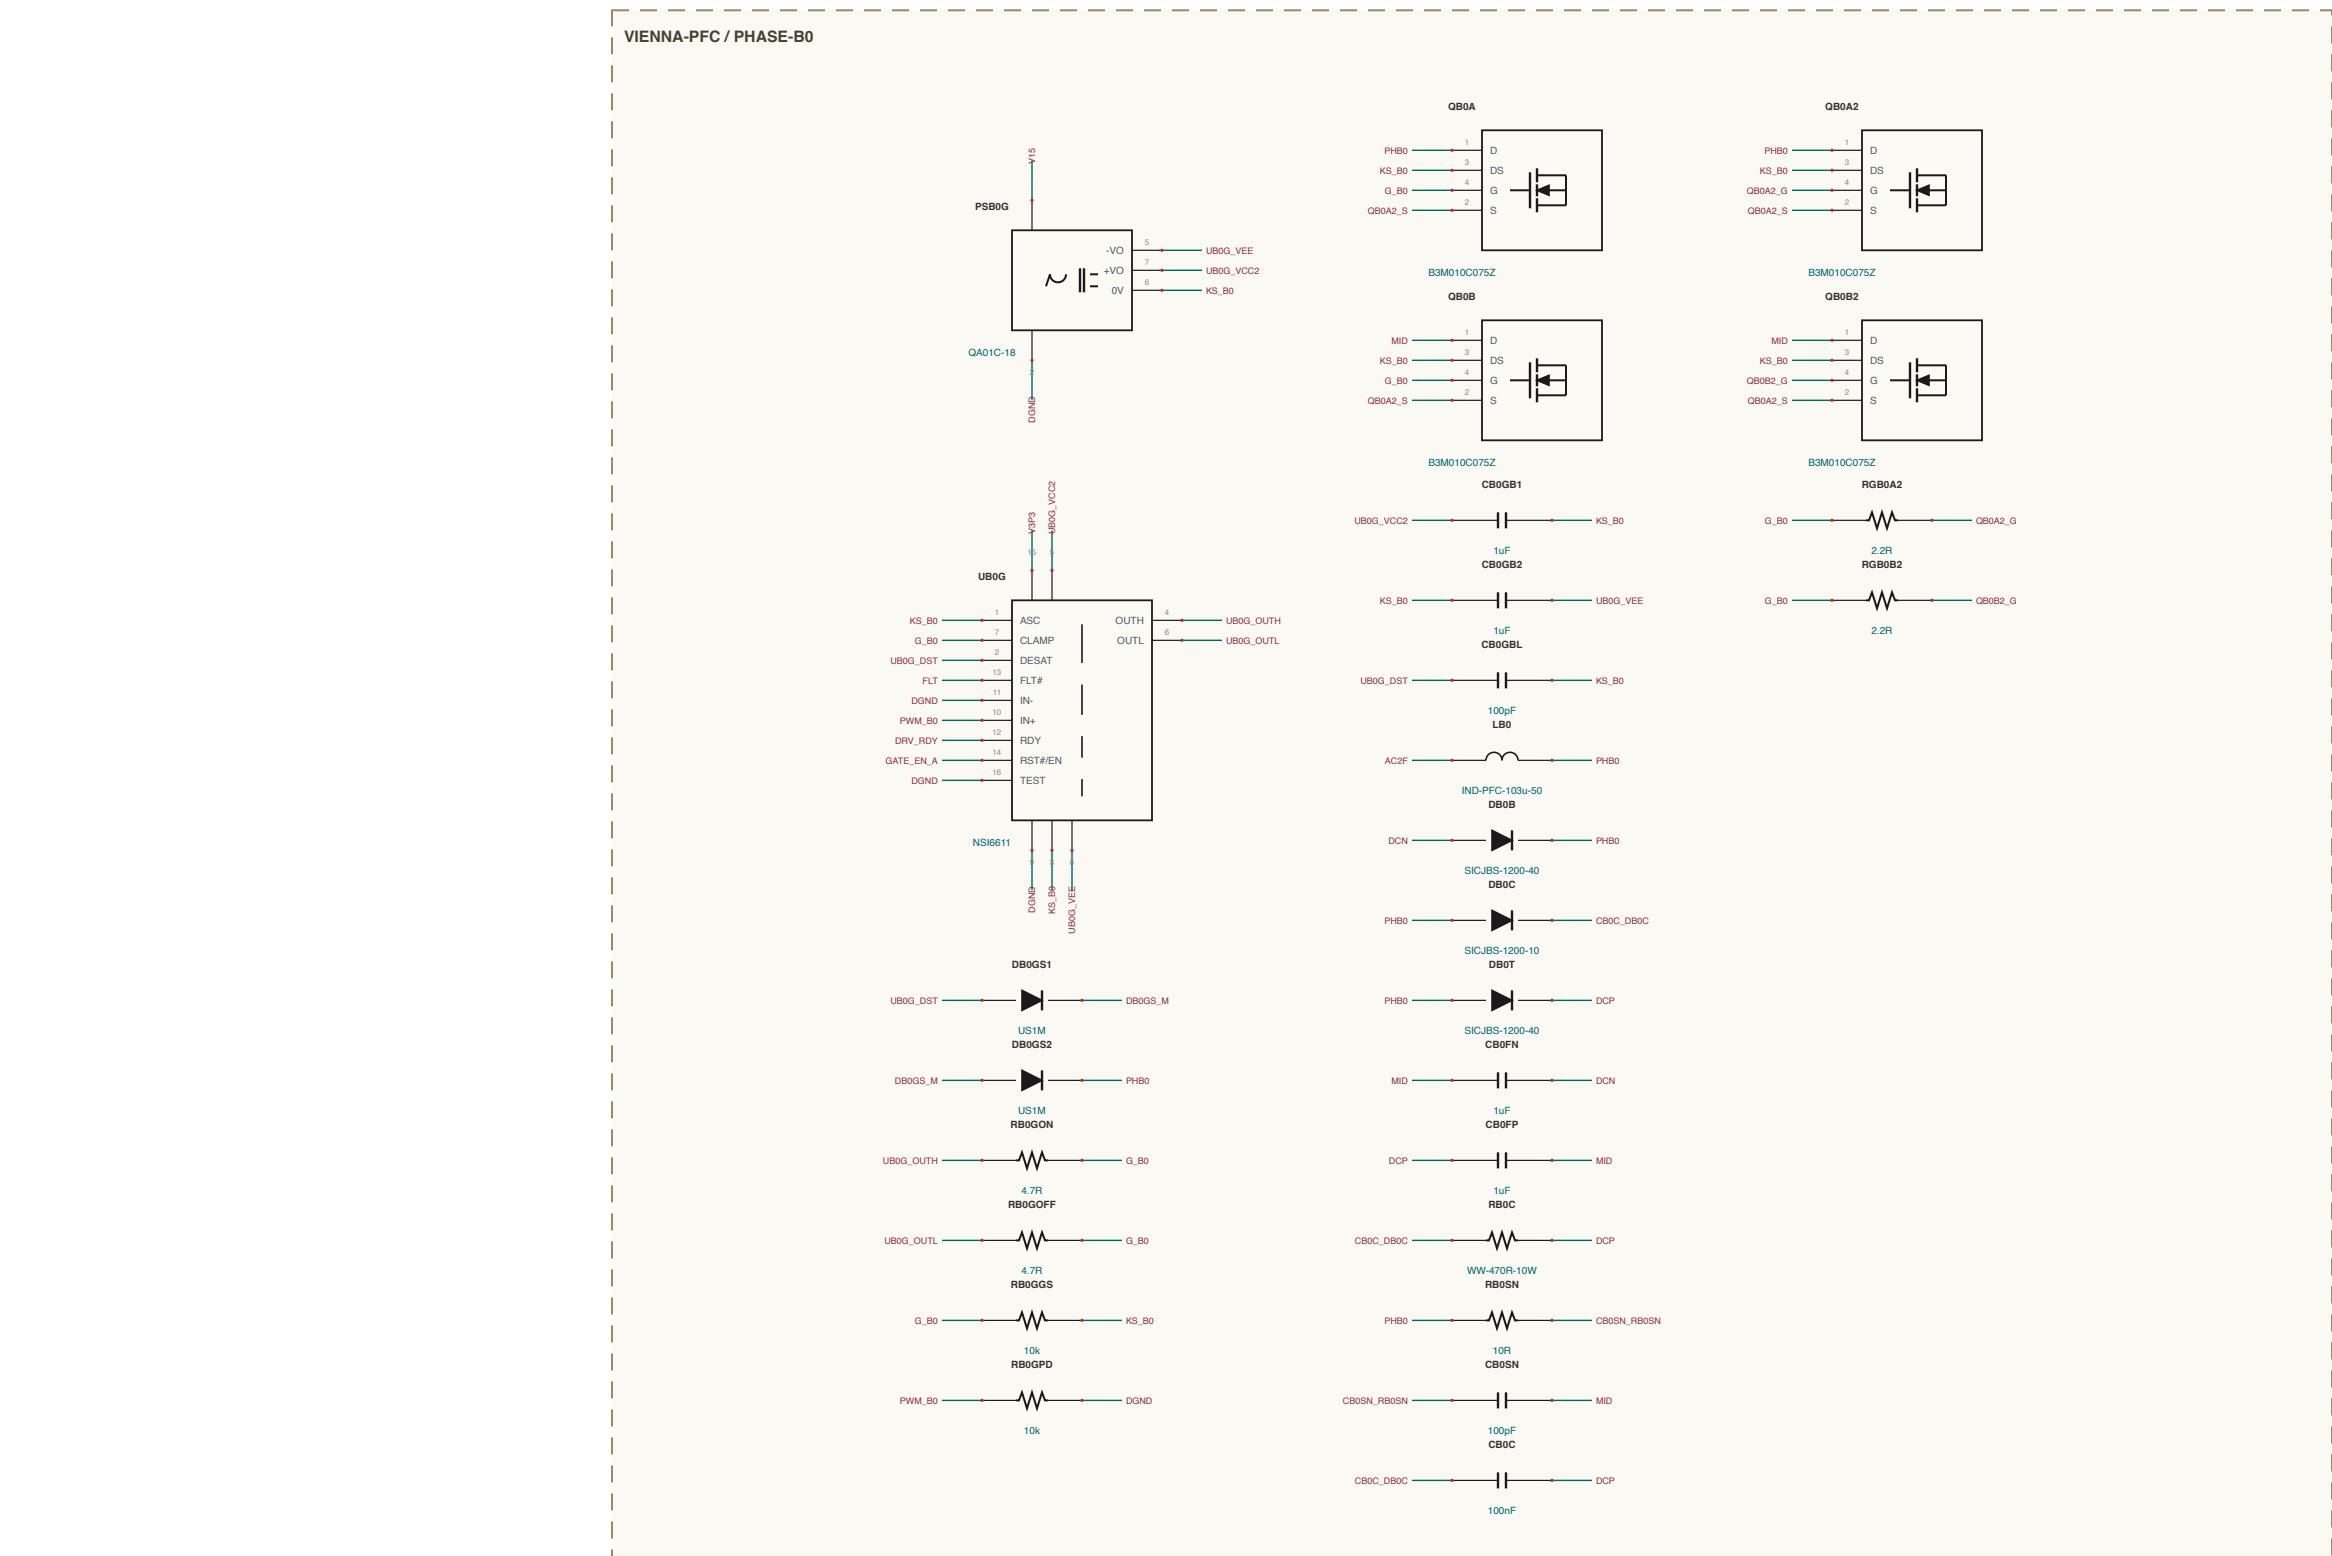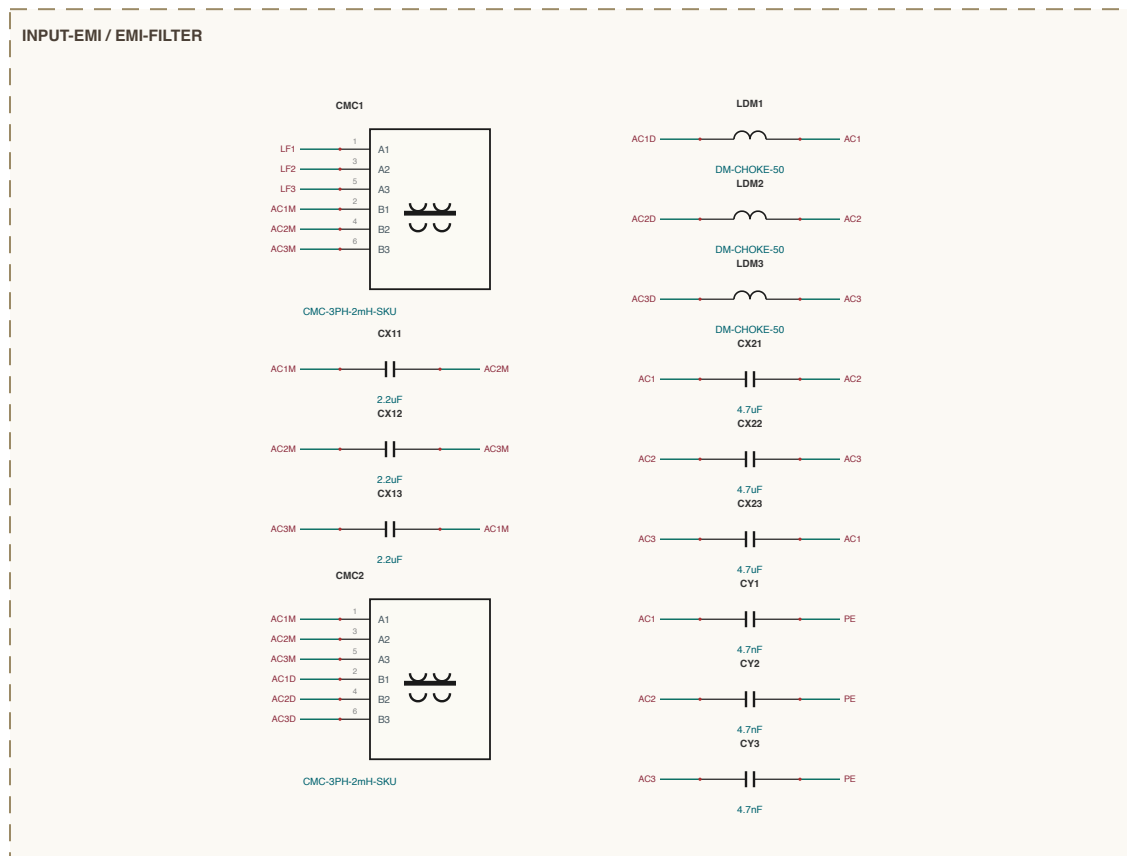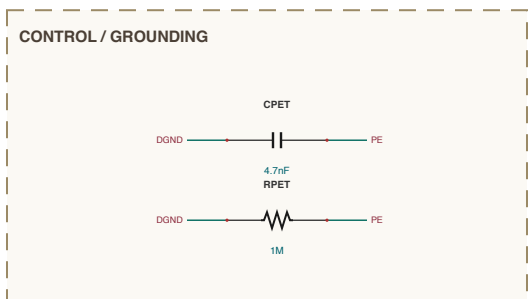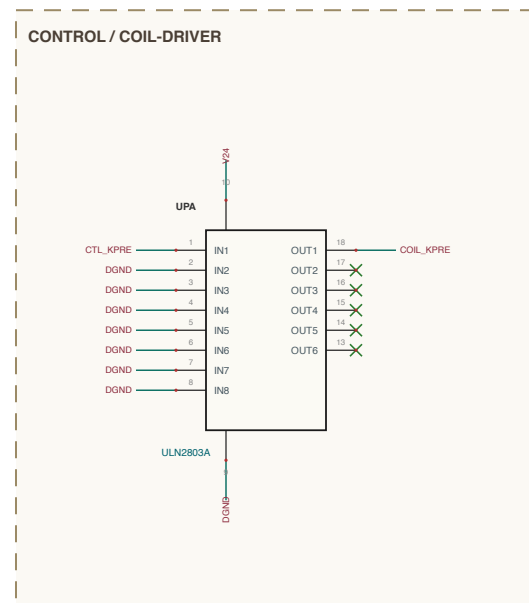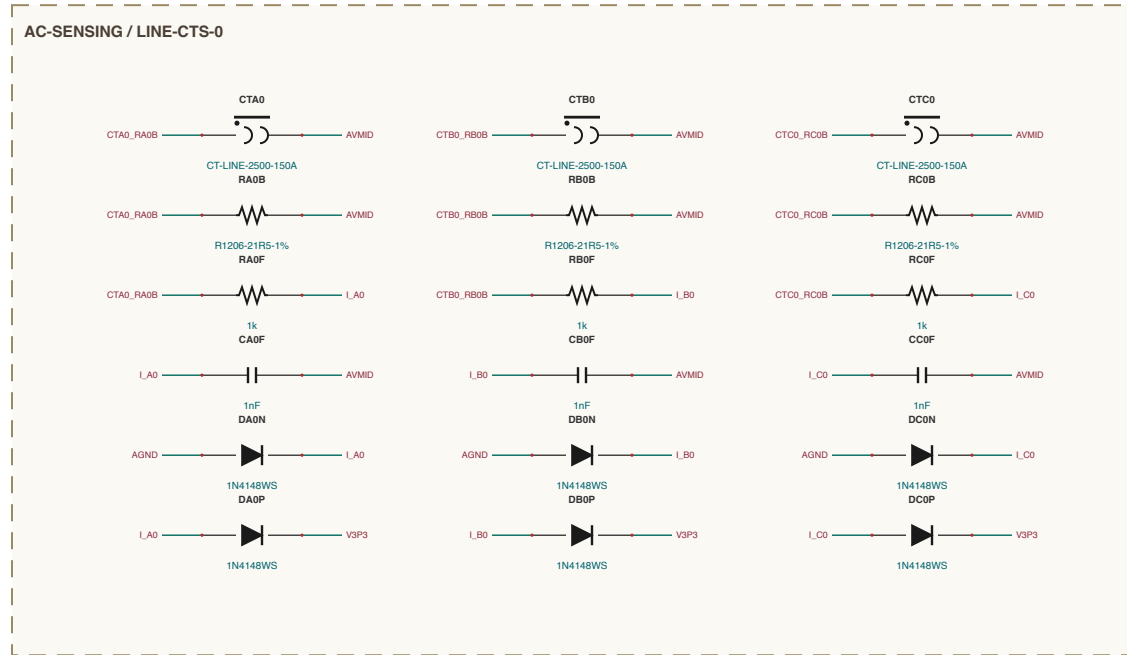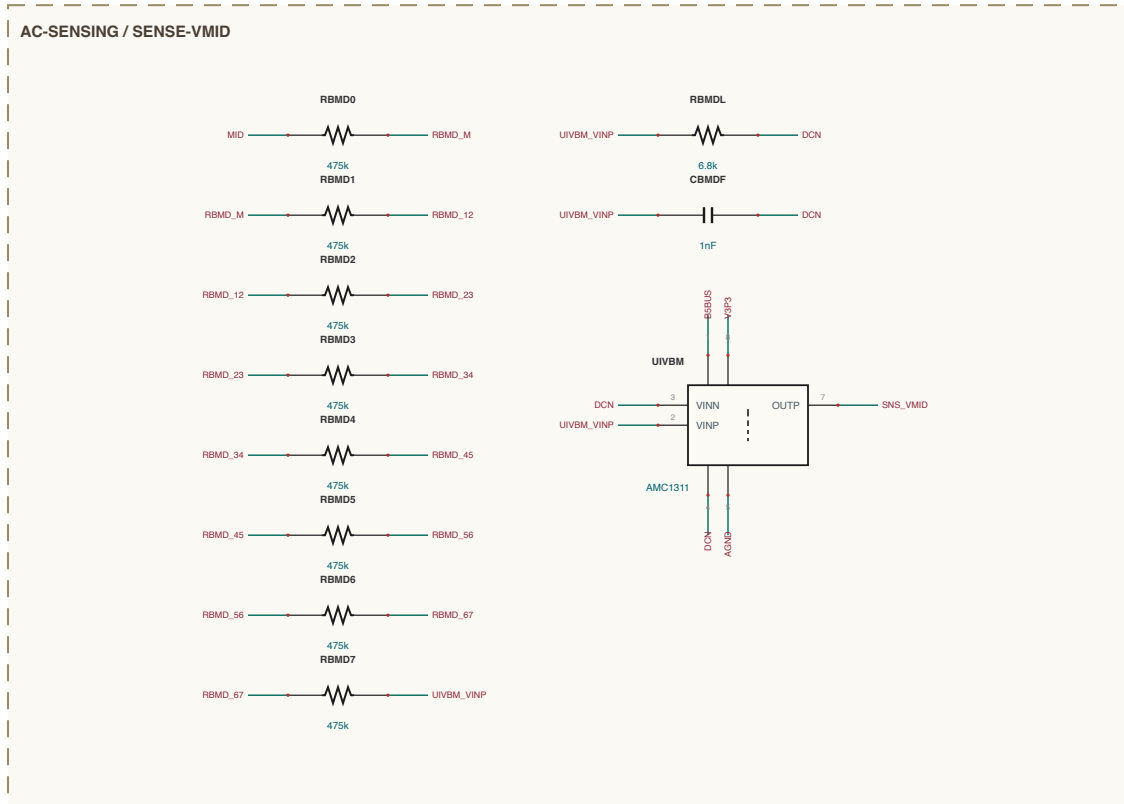

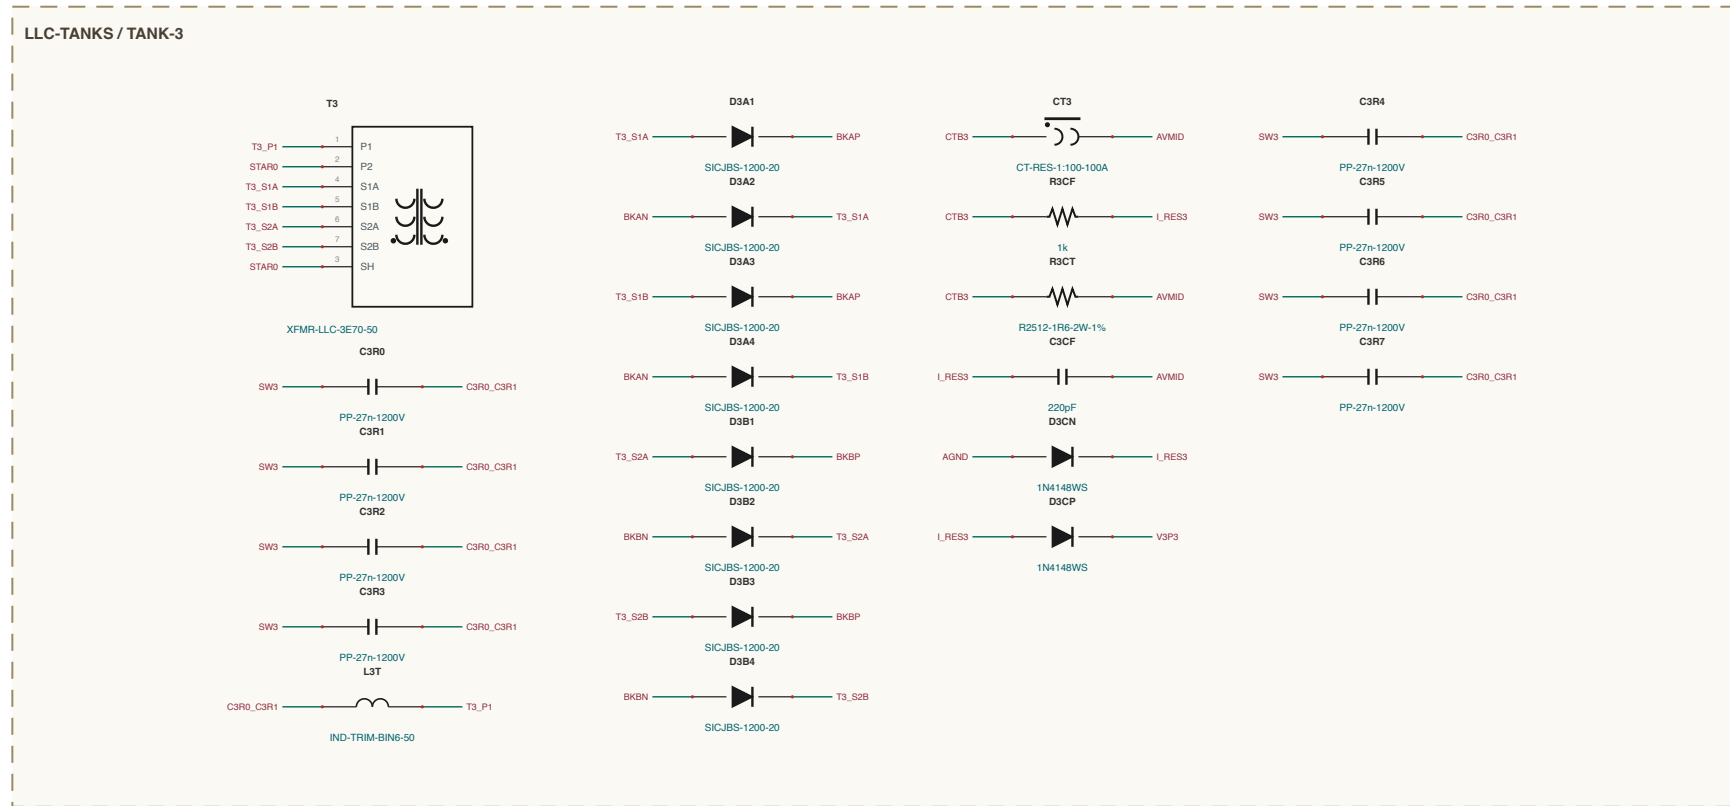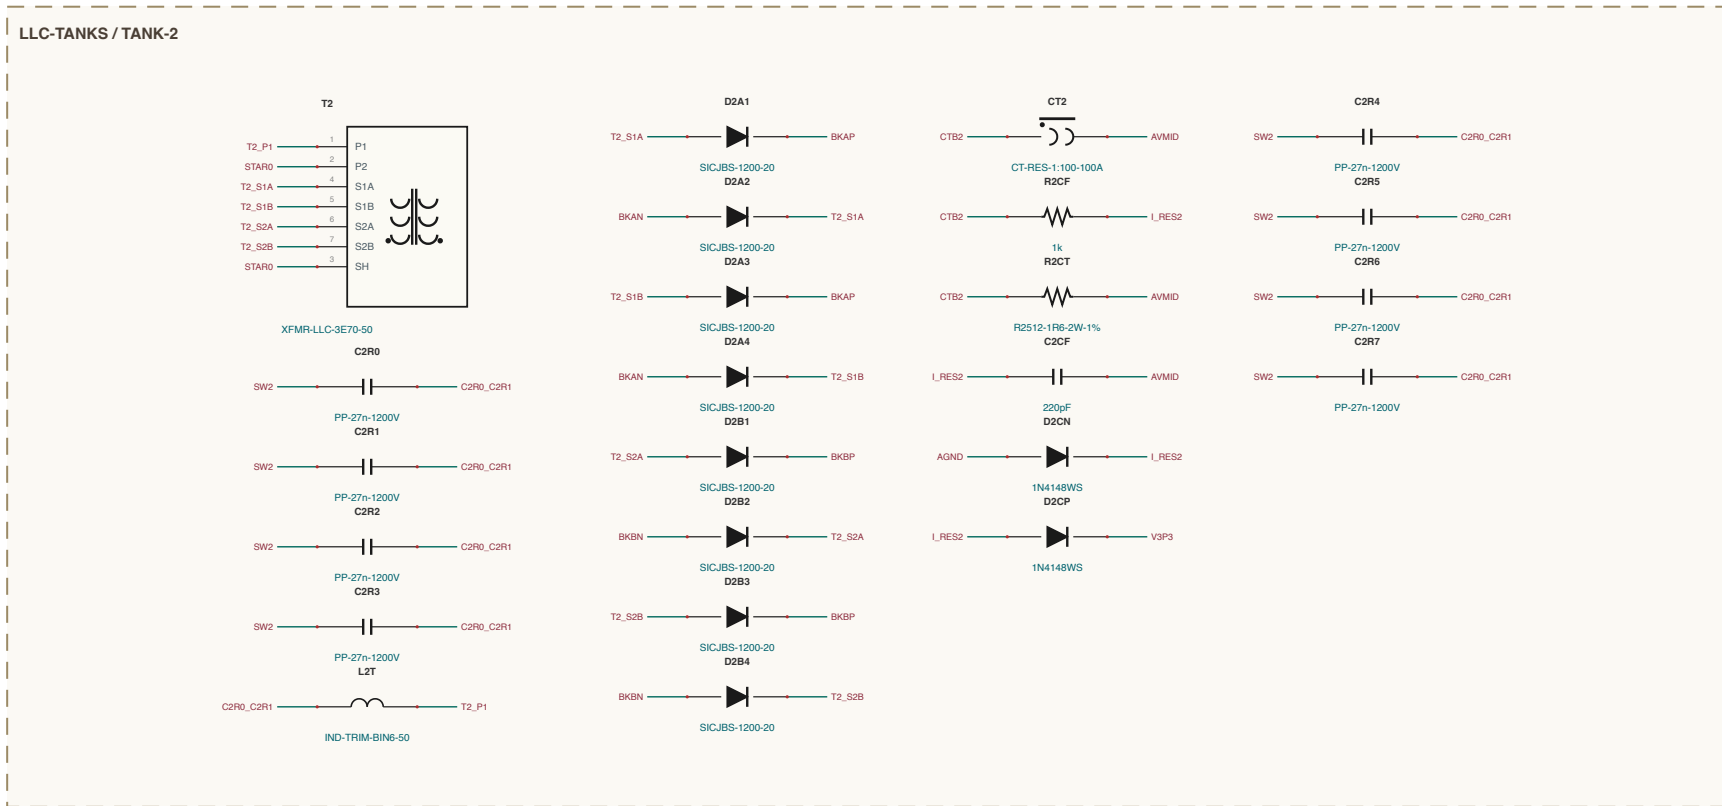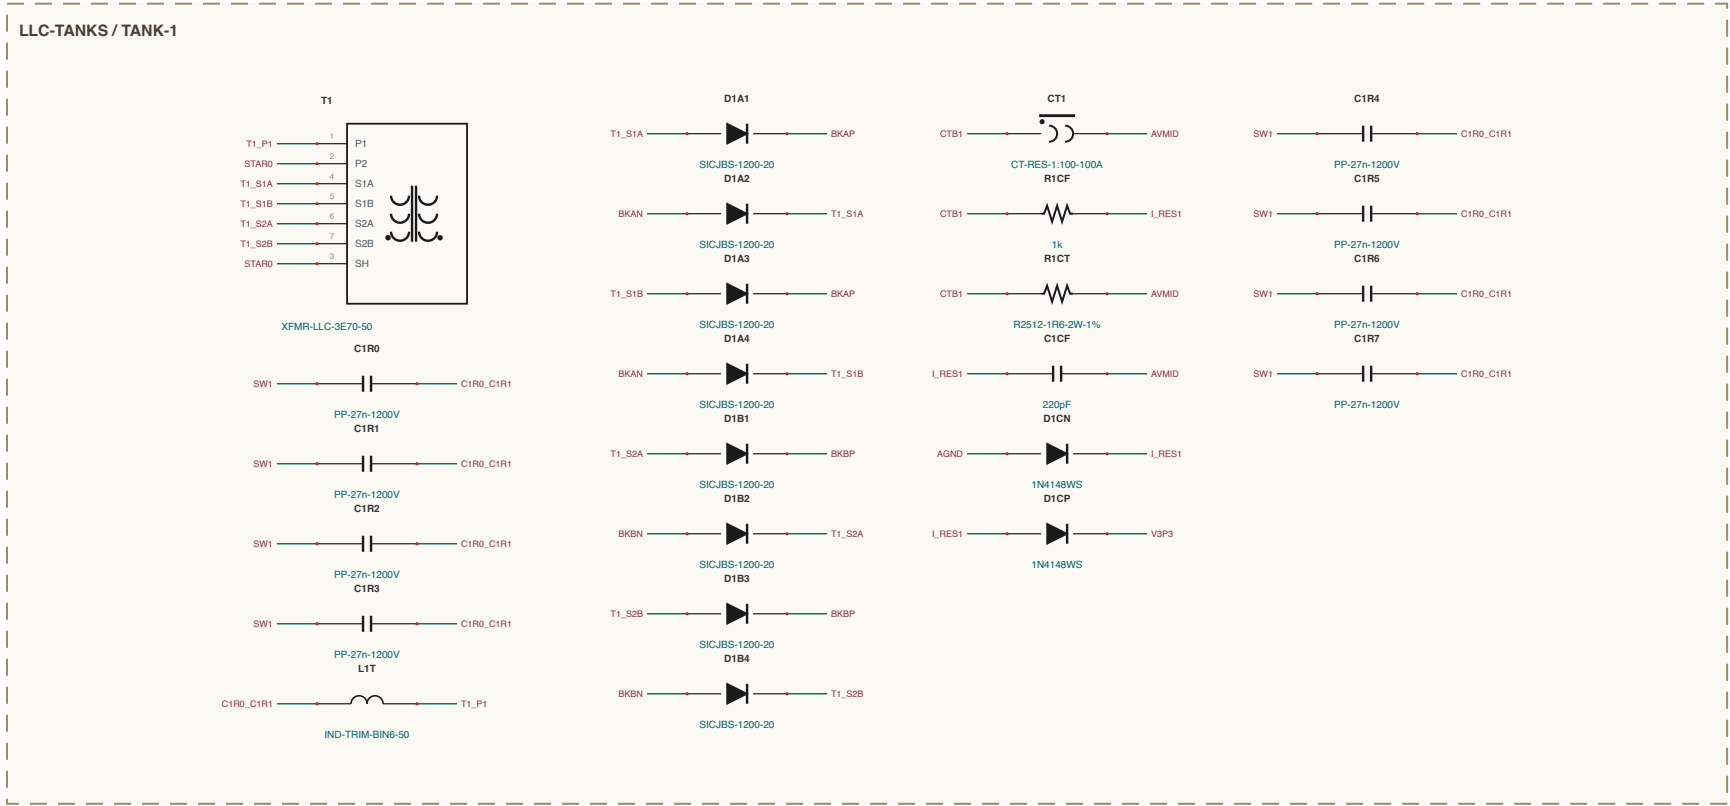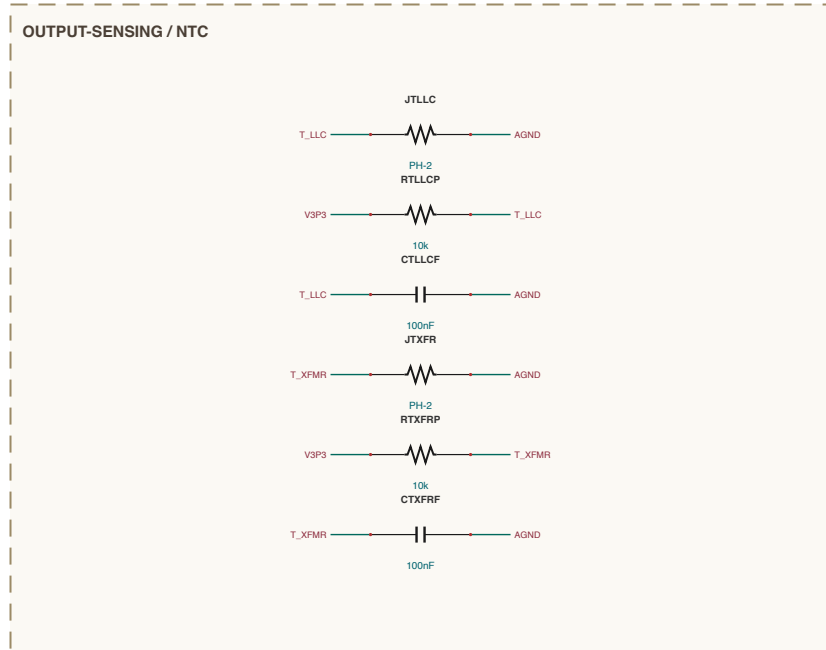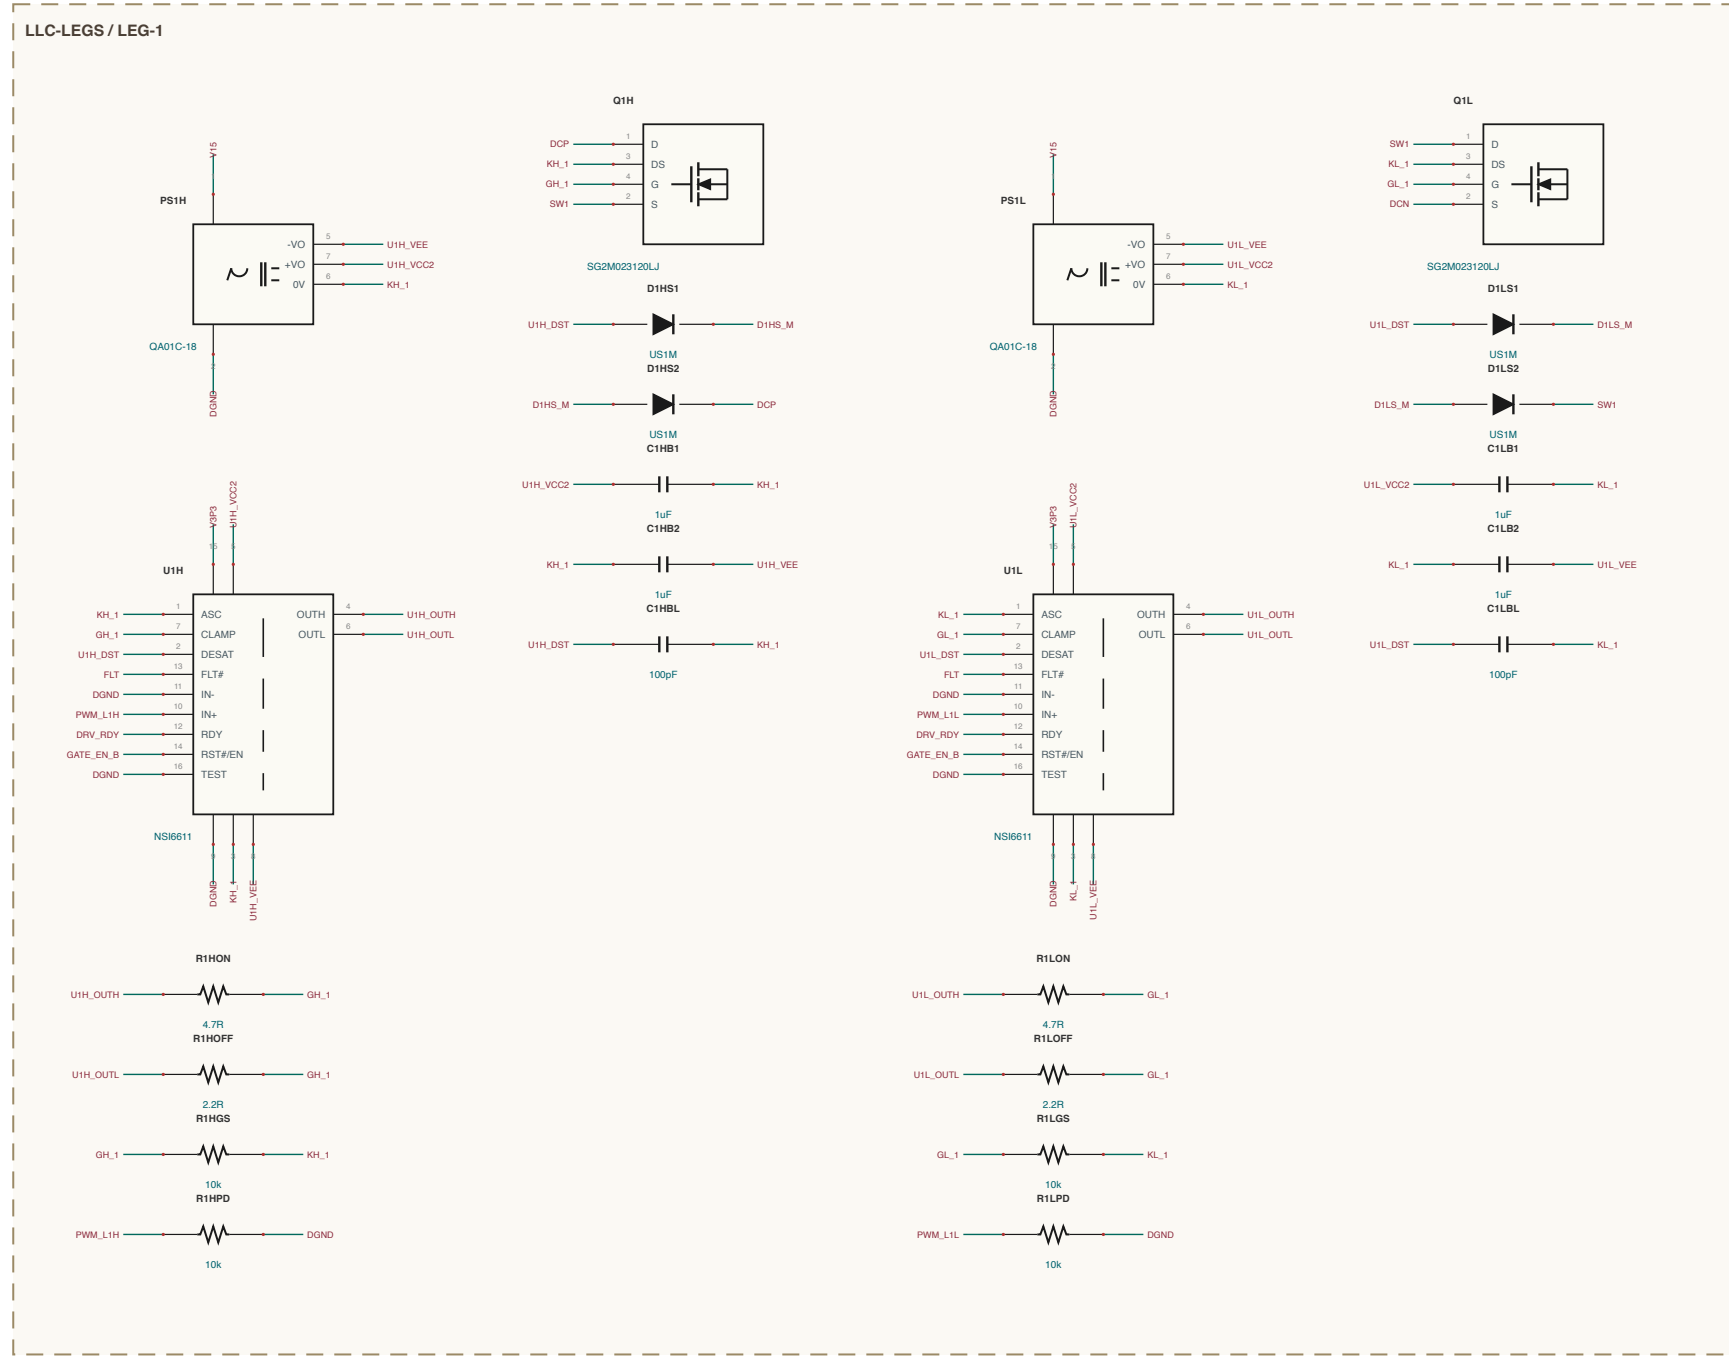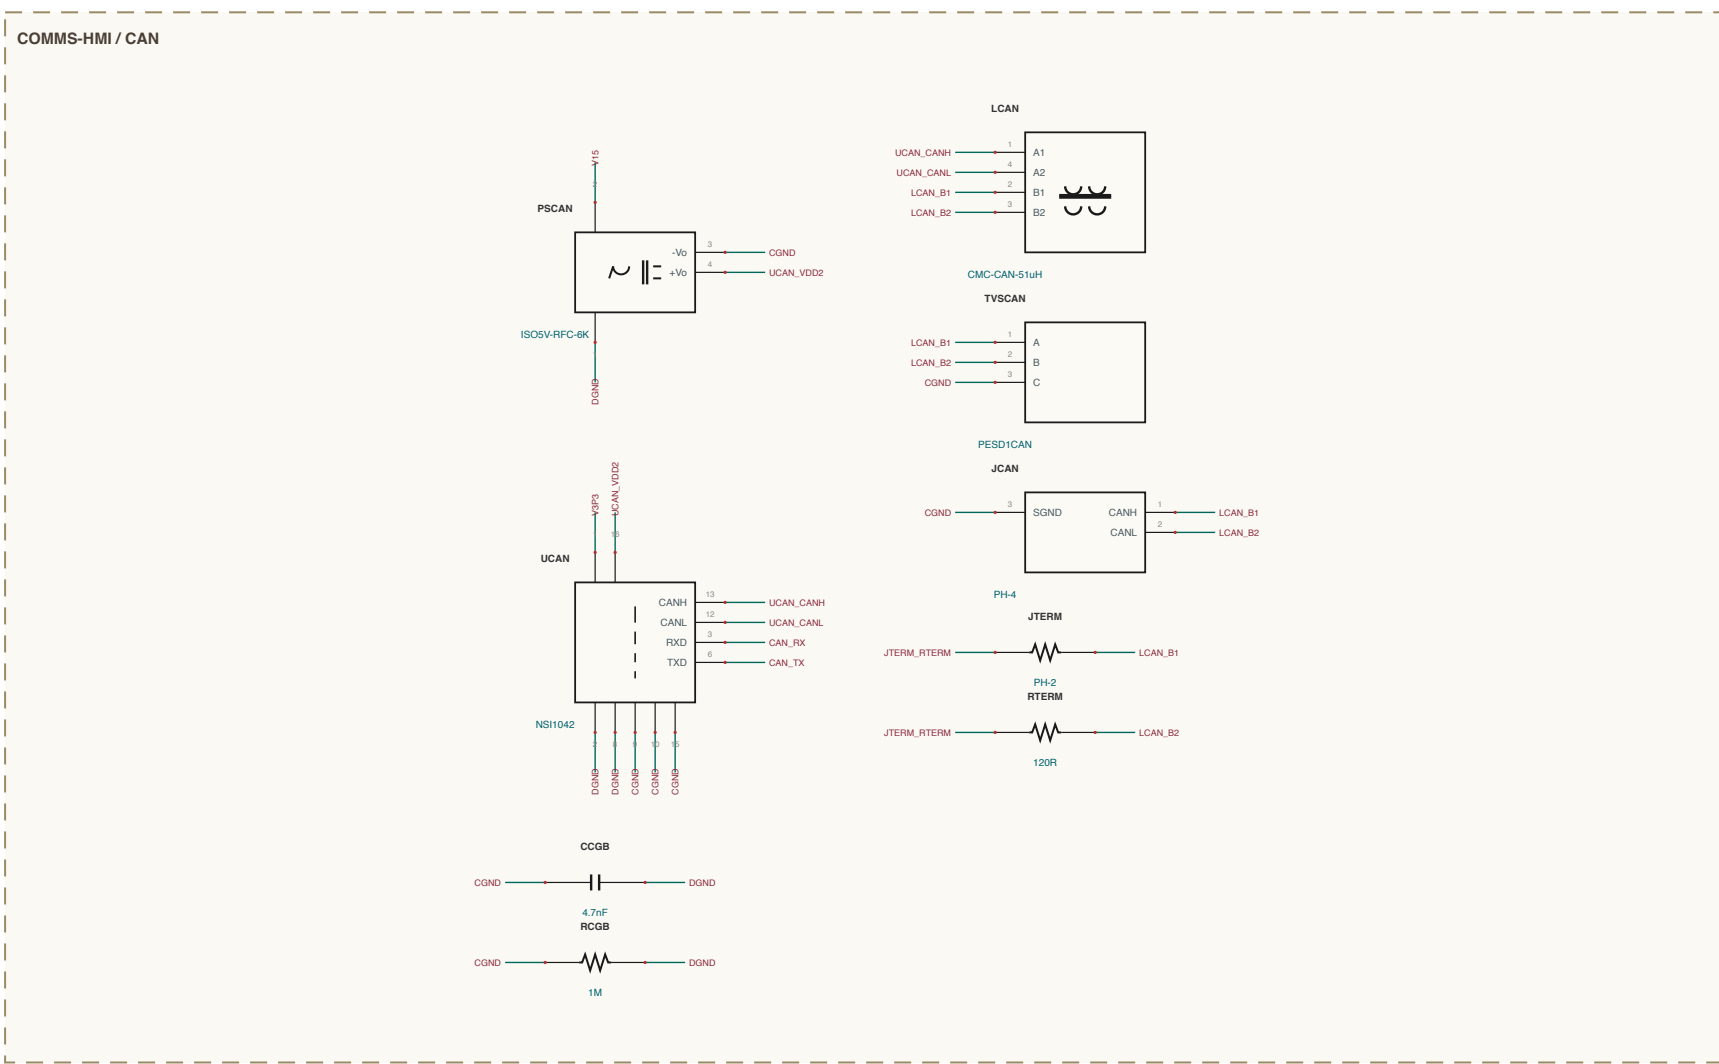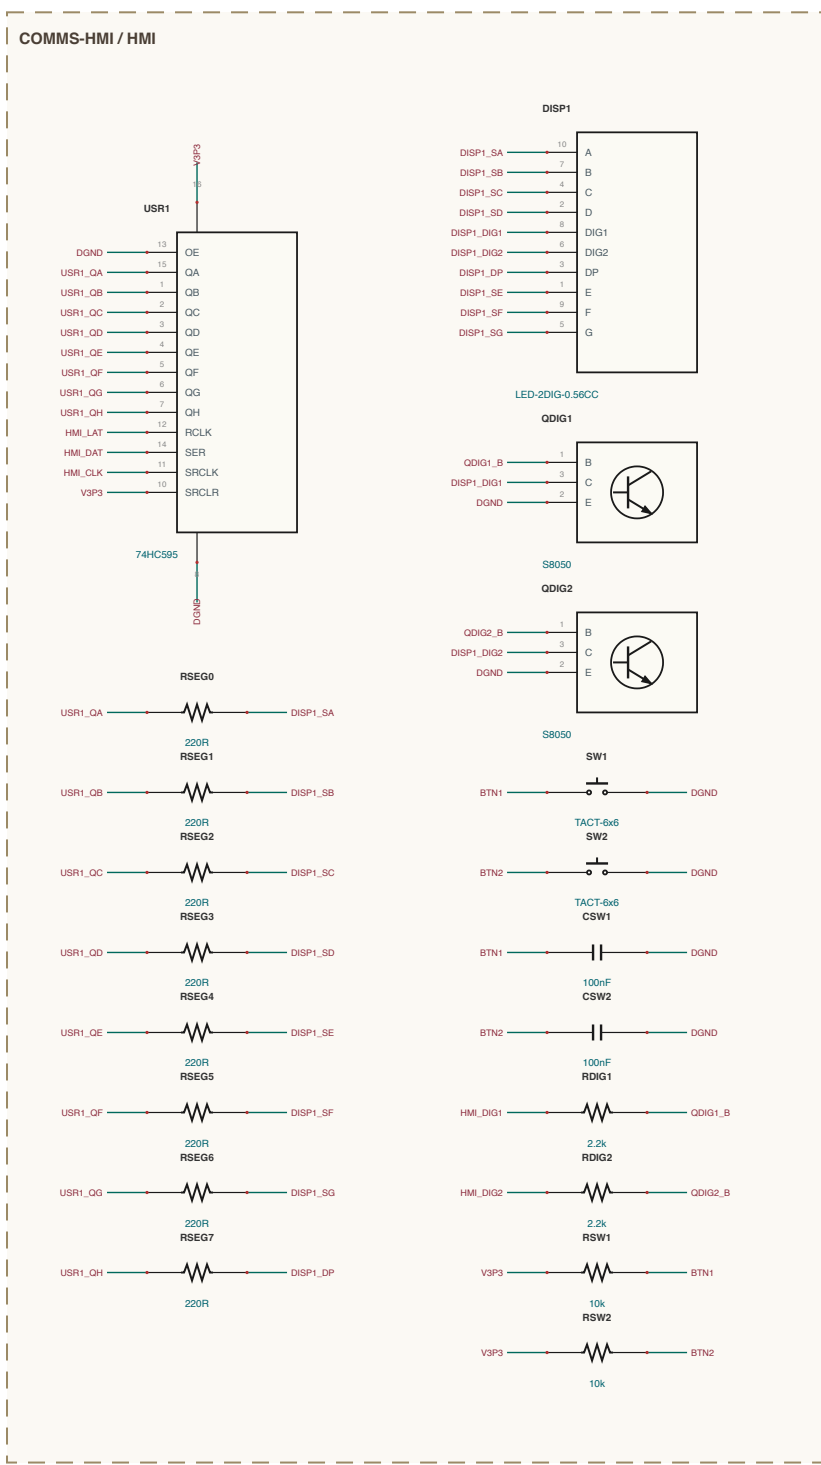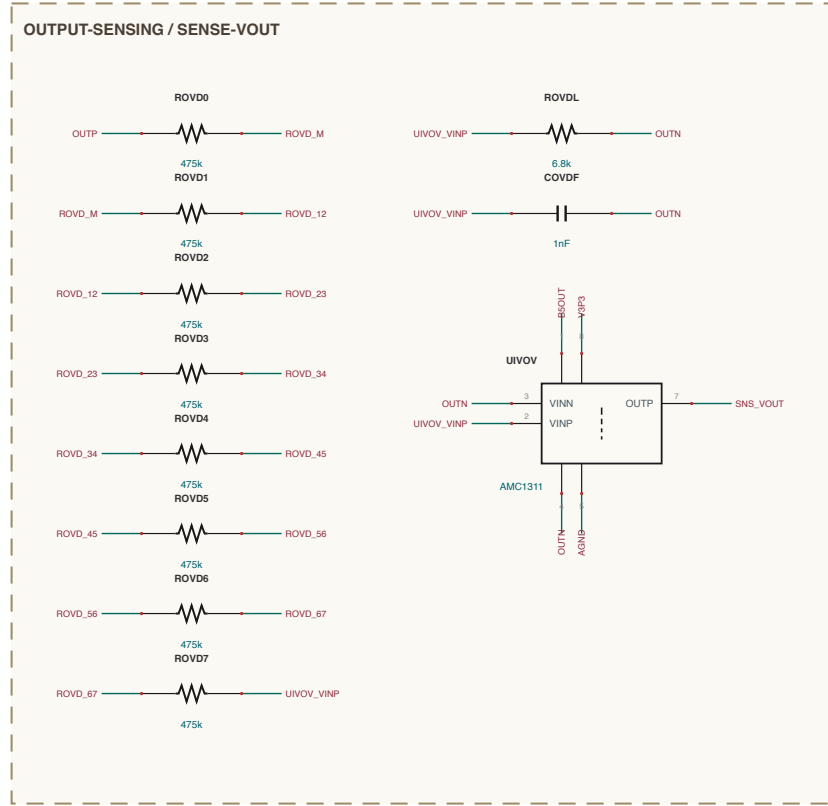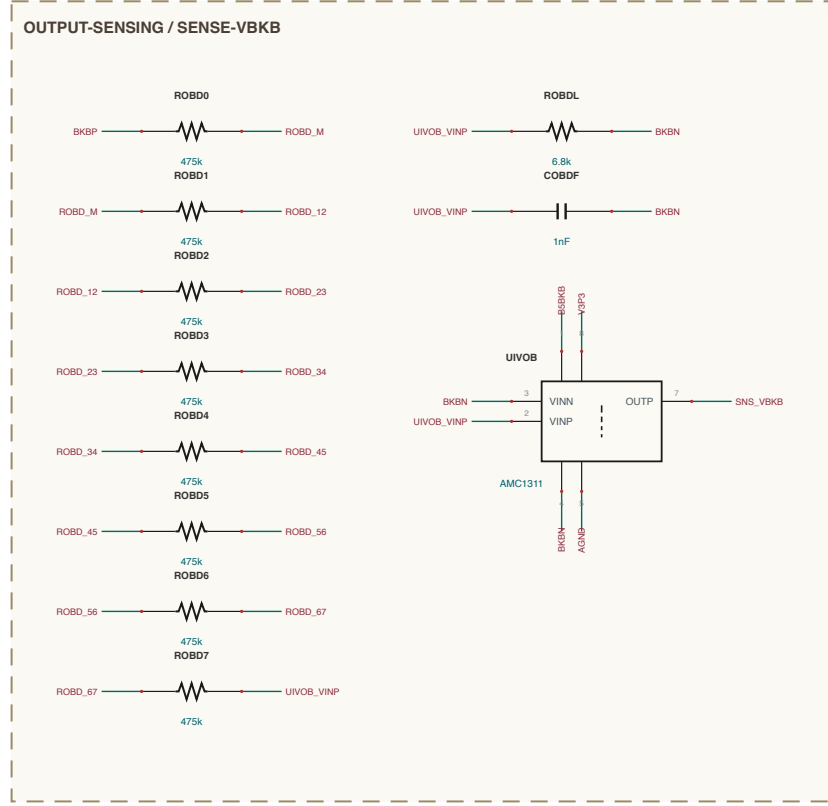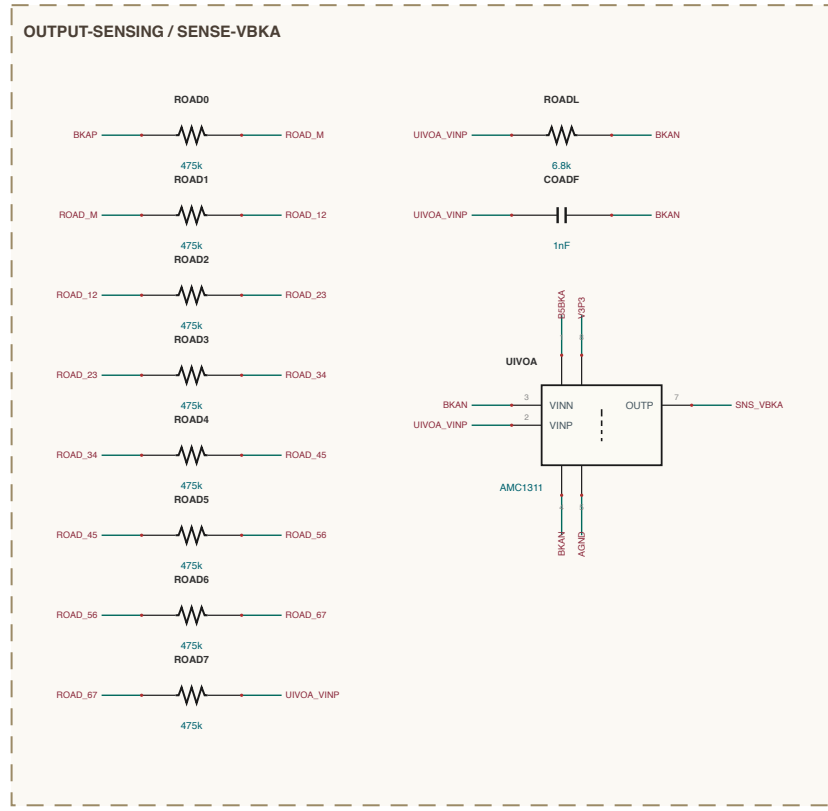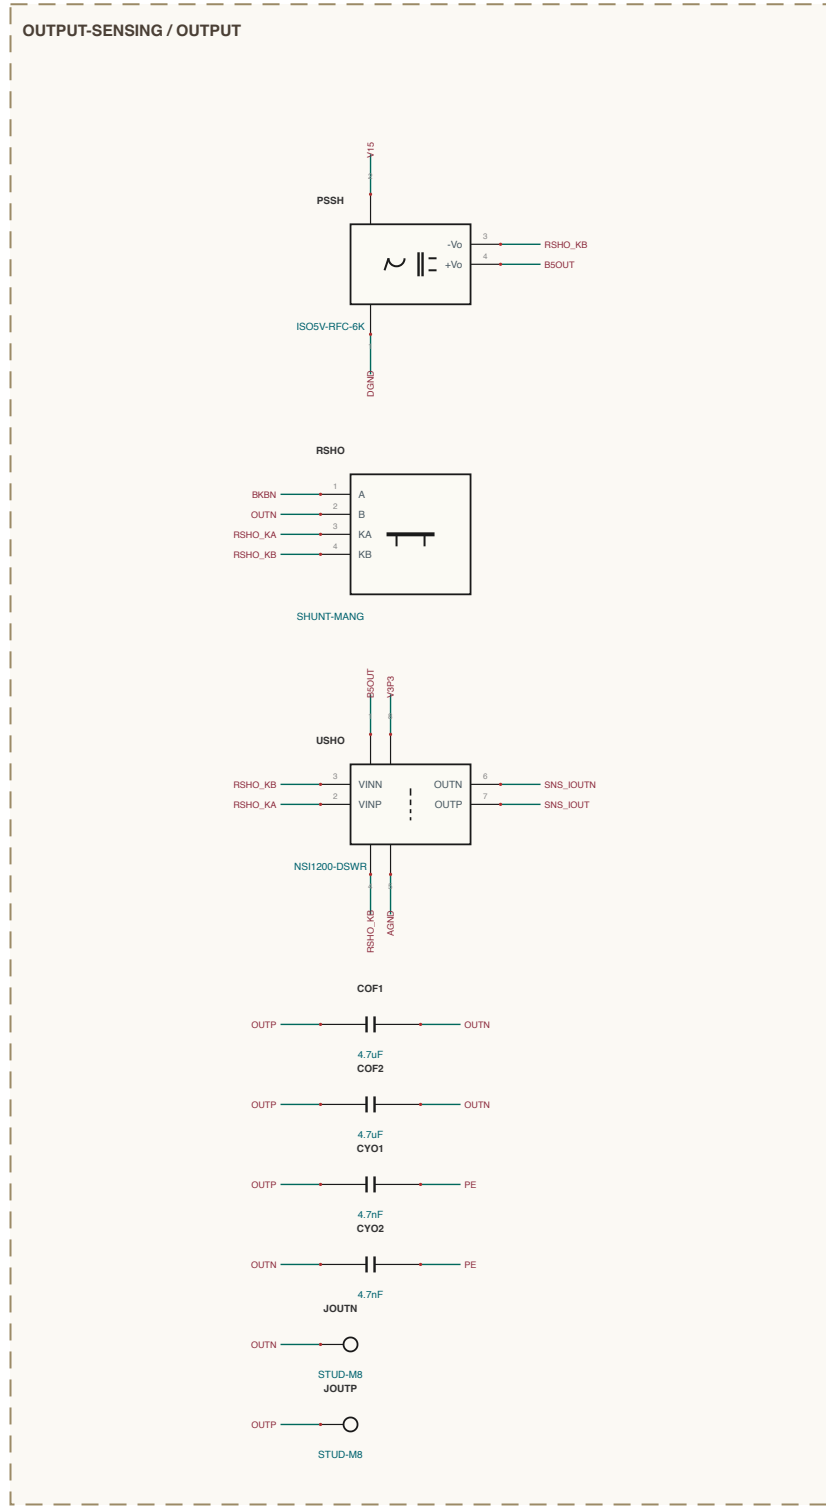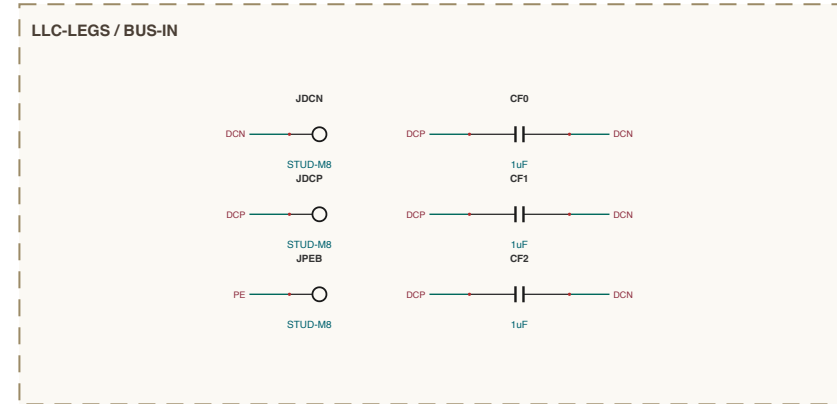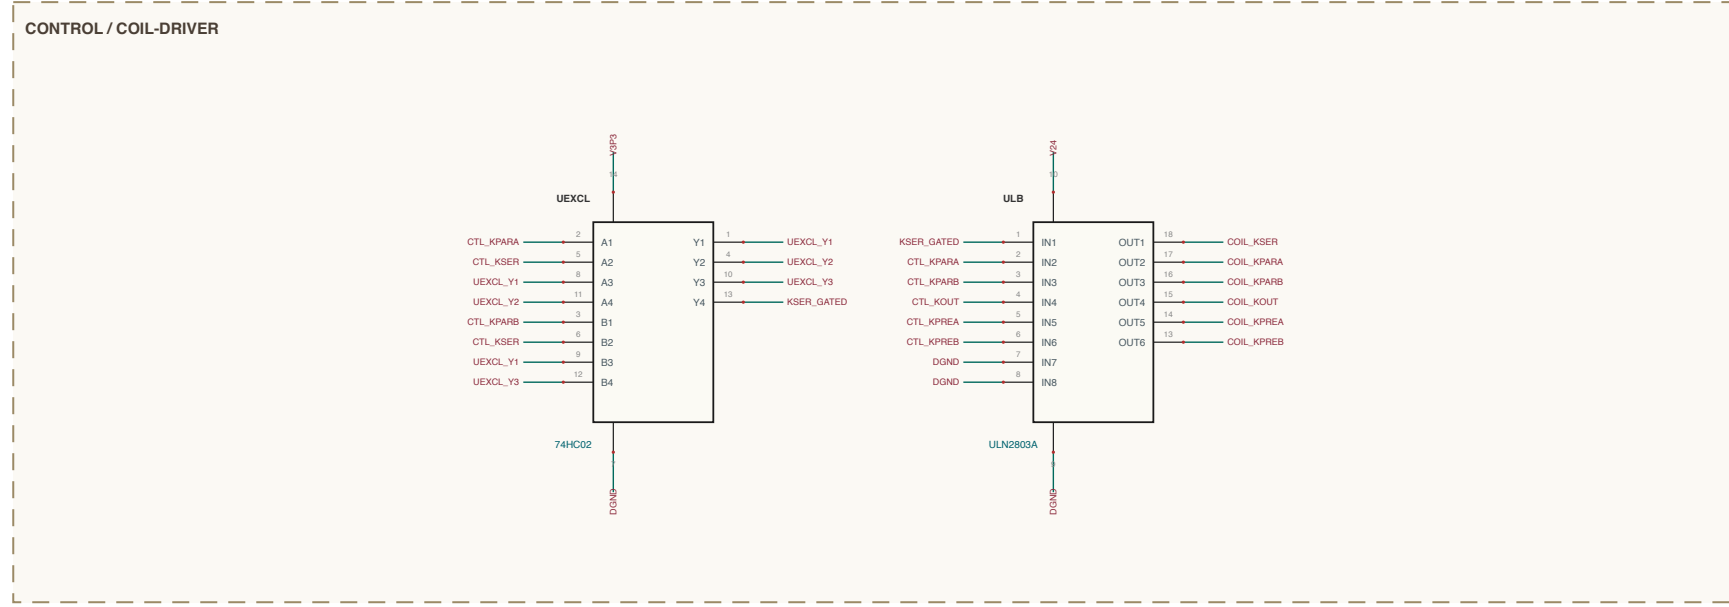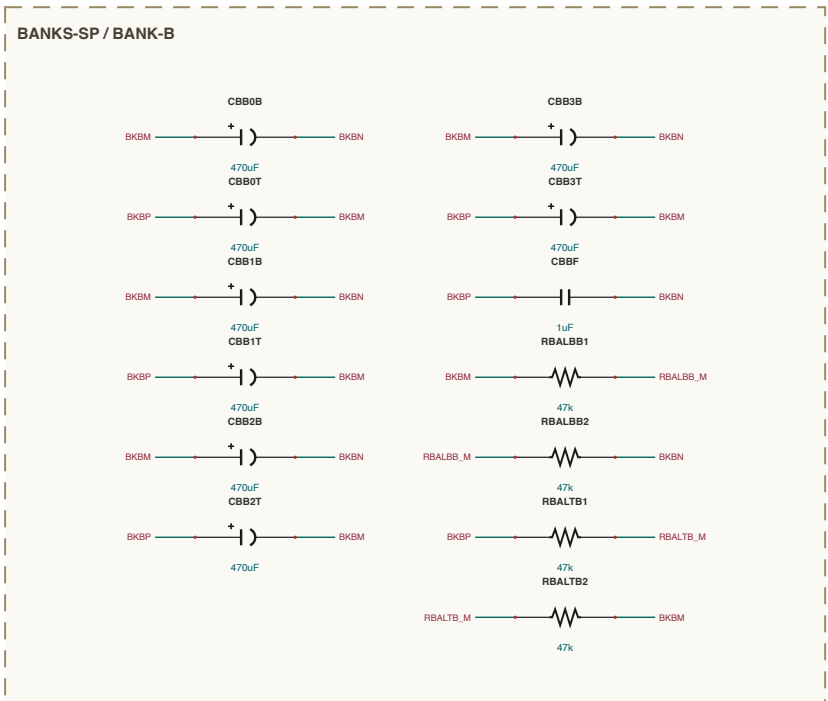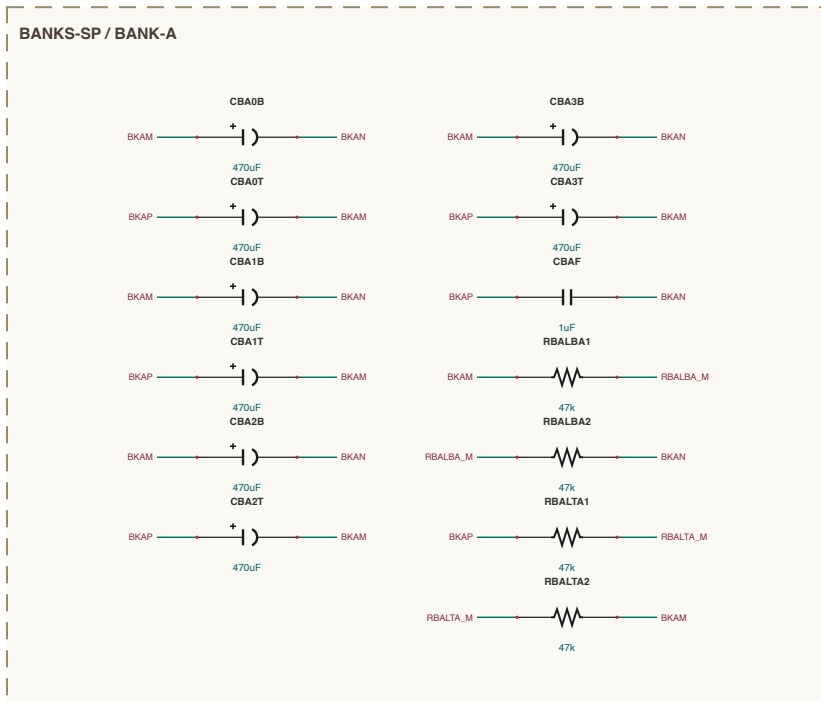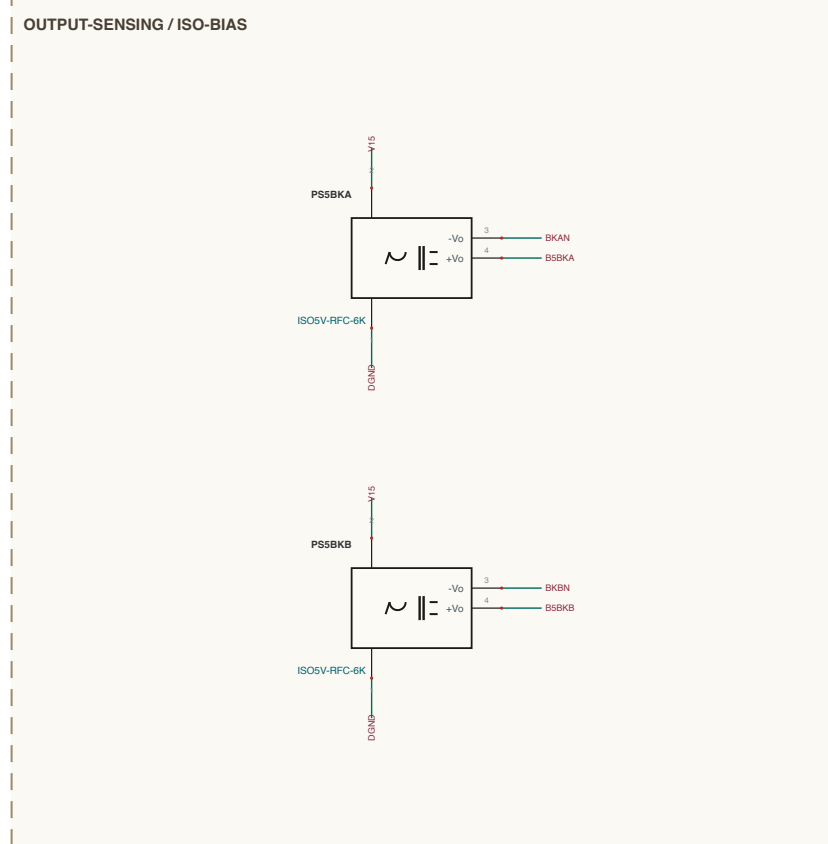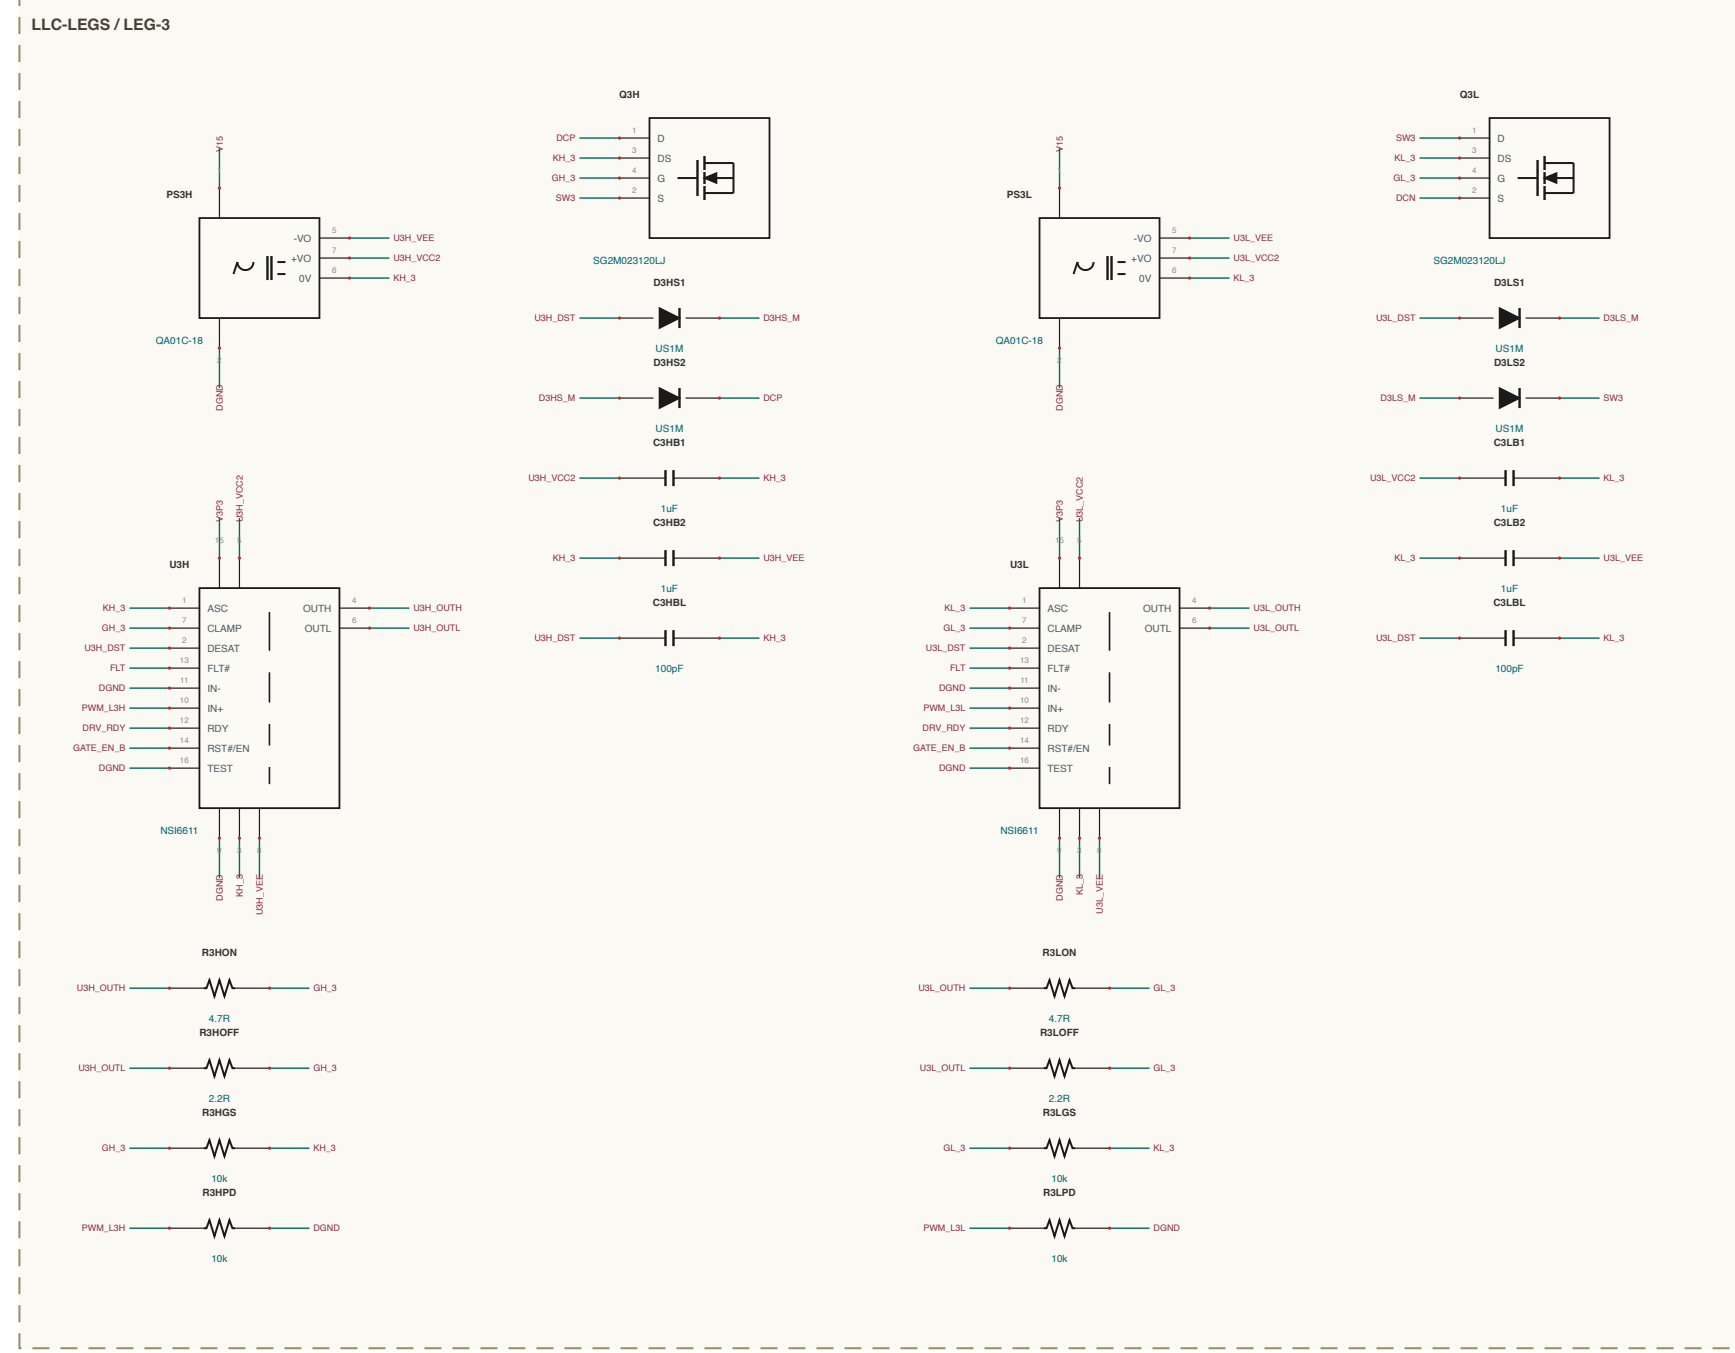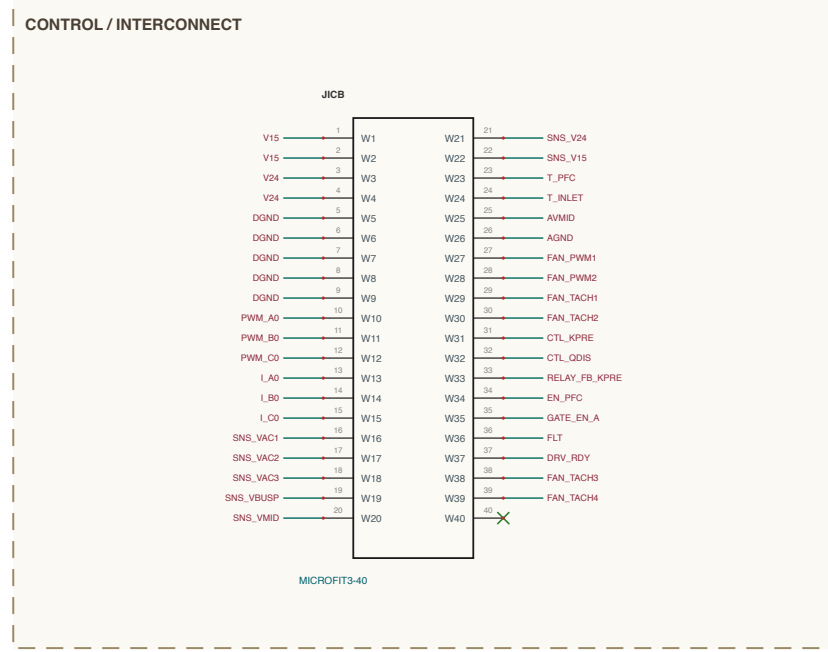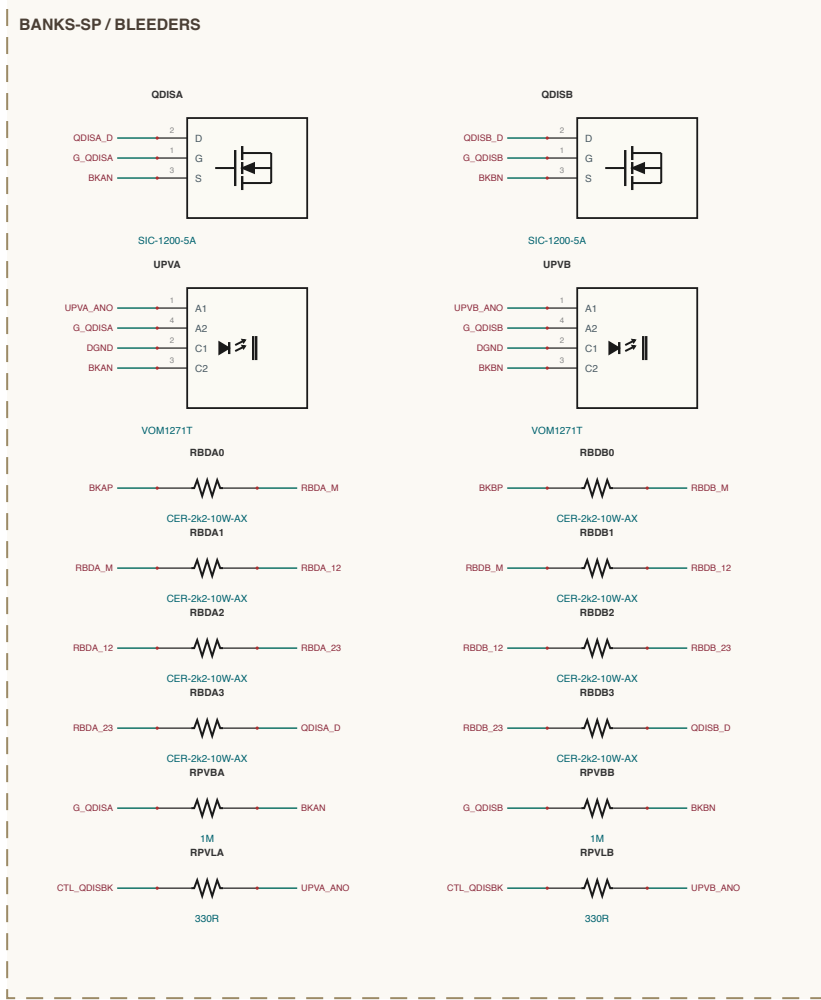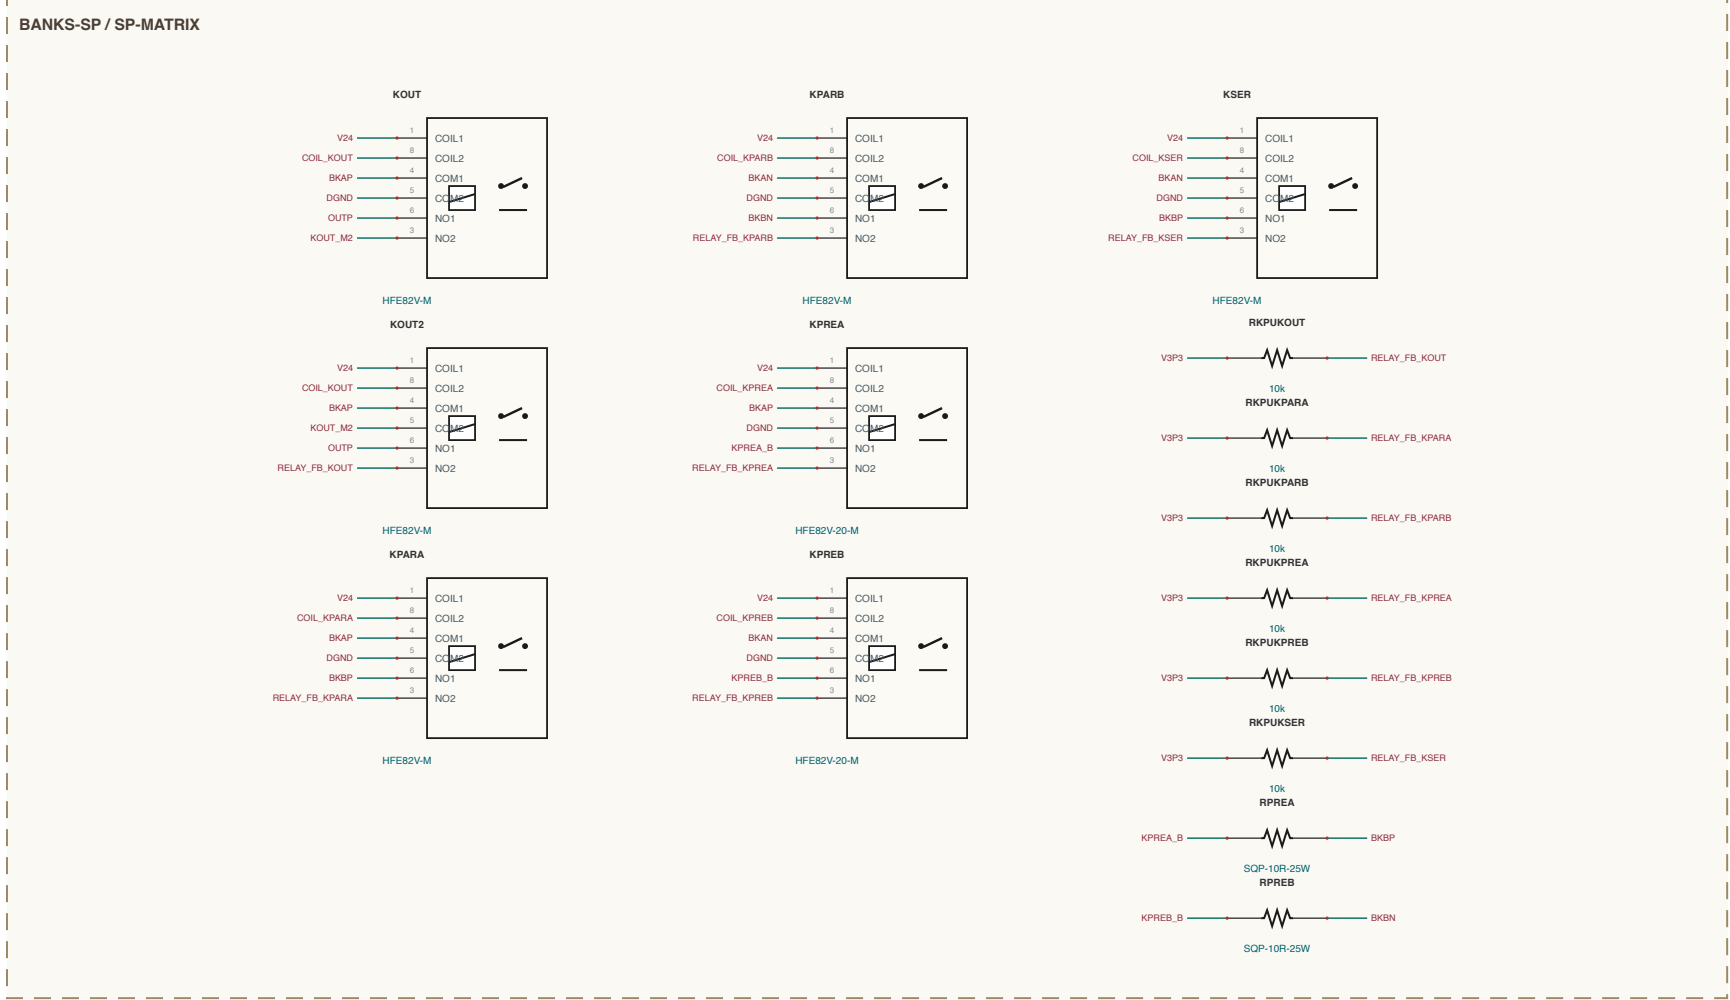

SHEET INDEX	
50 kW - 7 of 2	
OUTPUT-SENSING - 8 sections	
BANKS-SP - 4 sections	
LLC-LEGS - 4 sections	
CONTROL - 3 sections	
LLC-TANKS - 3 sections	
COMMS-HB - 3 sections	
rev 0.1 - 22 sections - 300 components	

NET NAMING

Internal positions are named for what they join


Switches - 4Pin mode at 0V 12 pin e.g. SP1A, SP1B

Resistors - M midpoint of a series pair e.g. R1A1A, R1


Inductors - center tap between Inductor e.g. R1A1A, R1

all others are explicit design nets


CONTROL / SAFETY

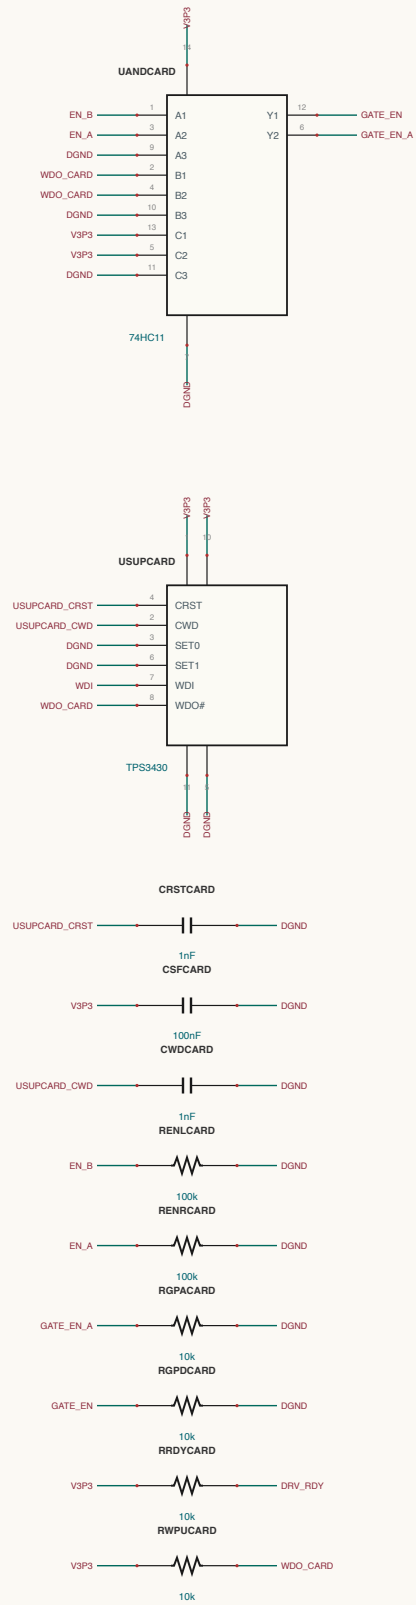


CONTROL / MCU

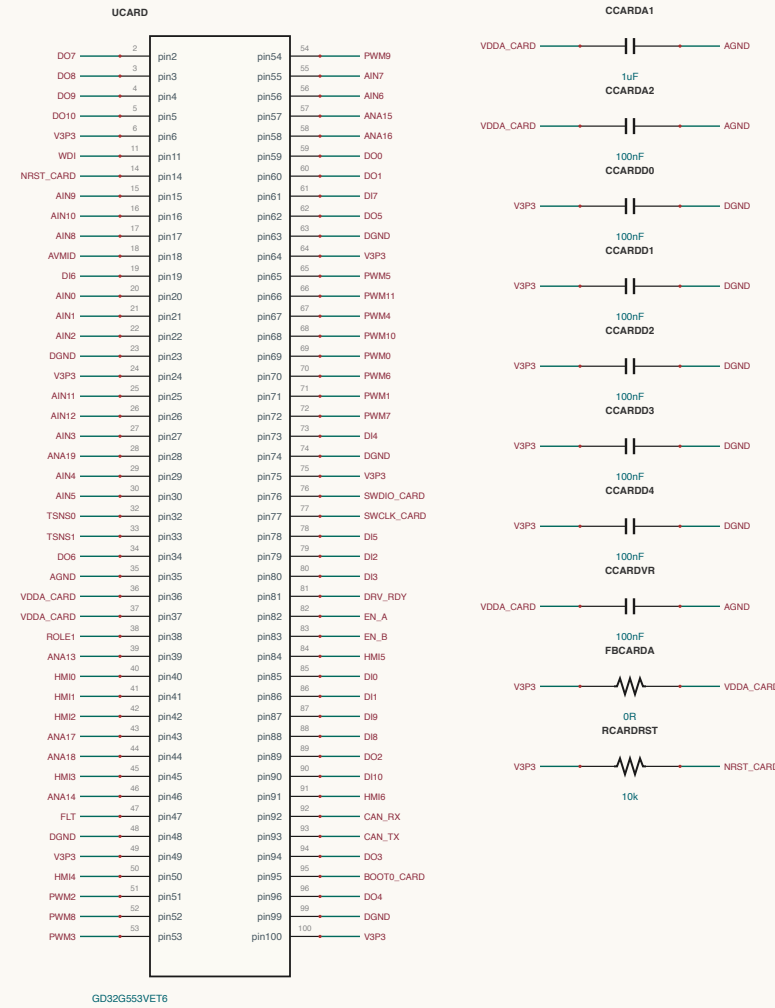


CONTROL / CARD-IF

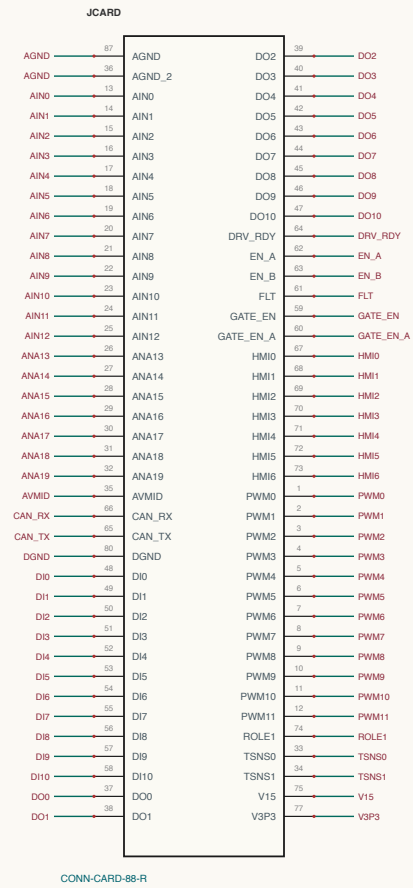


CONTROL / BUCK-3V3

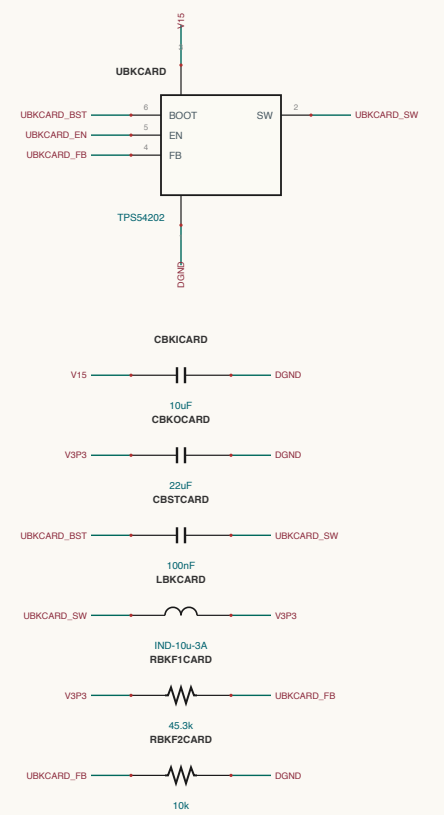


CONTROL / ANALOG-MID

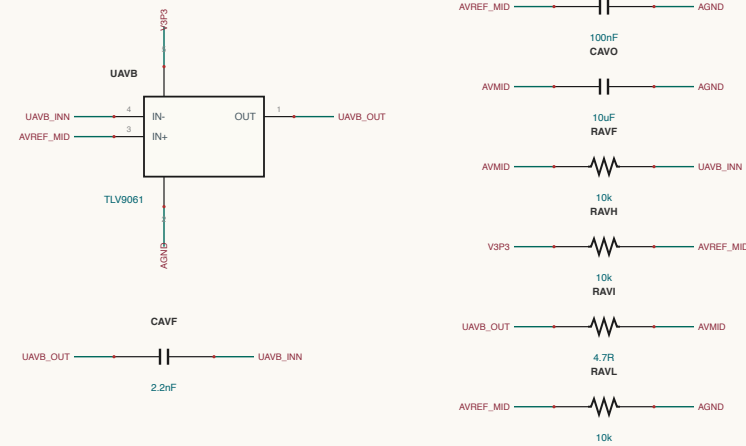

CONTROL / FLT-GROUND



CONTROL / ROLE



CONTROL / SWD-BOOT

