
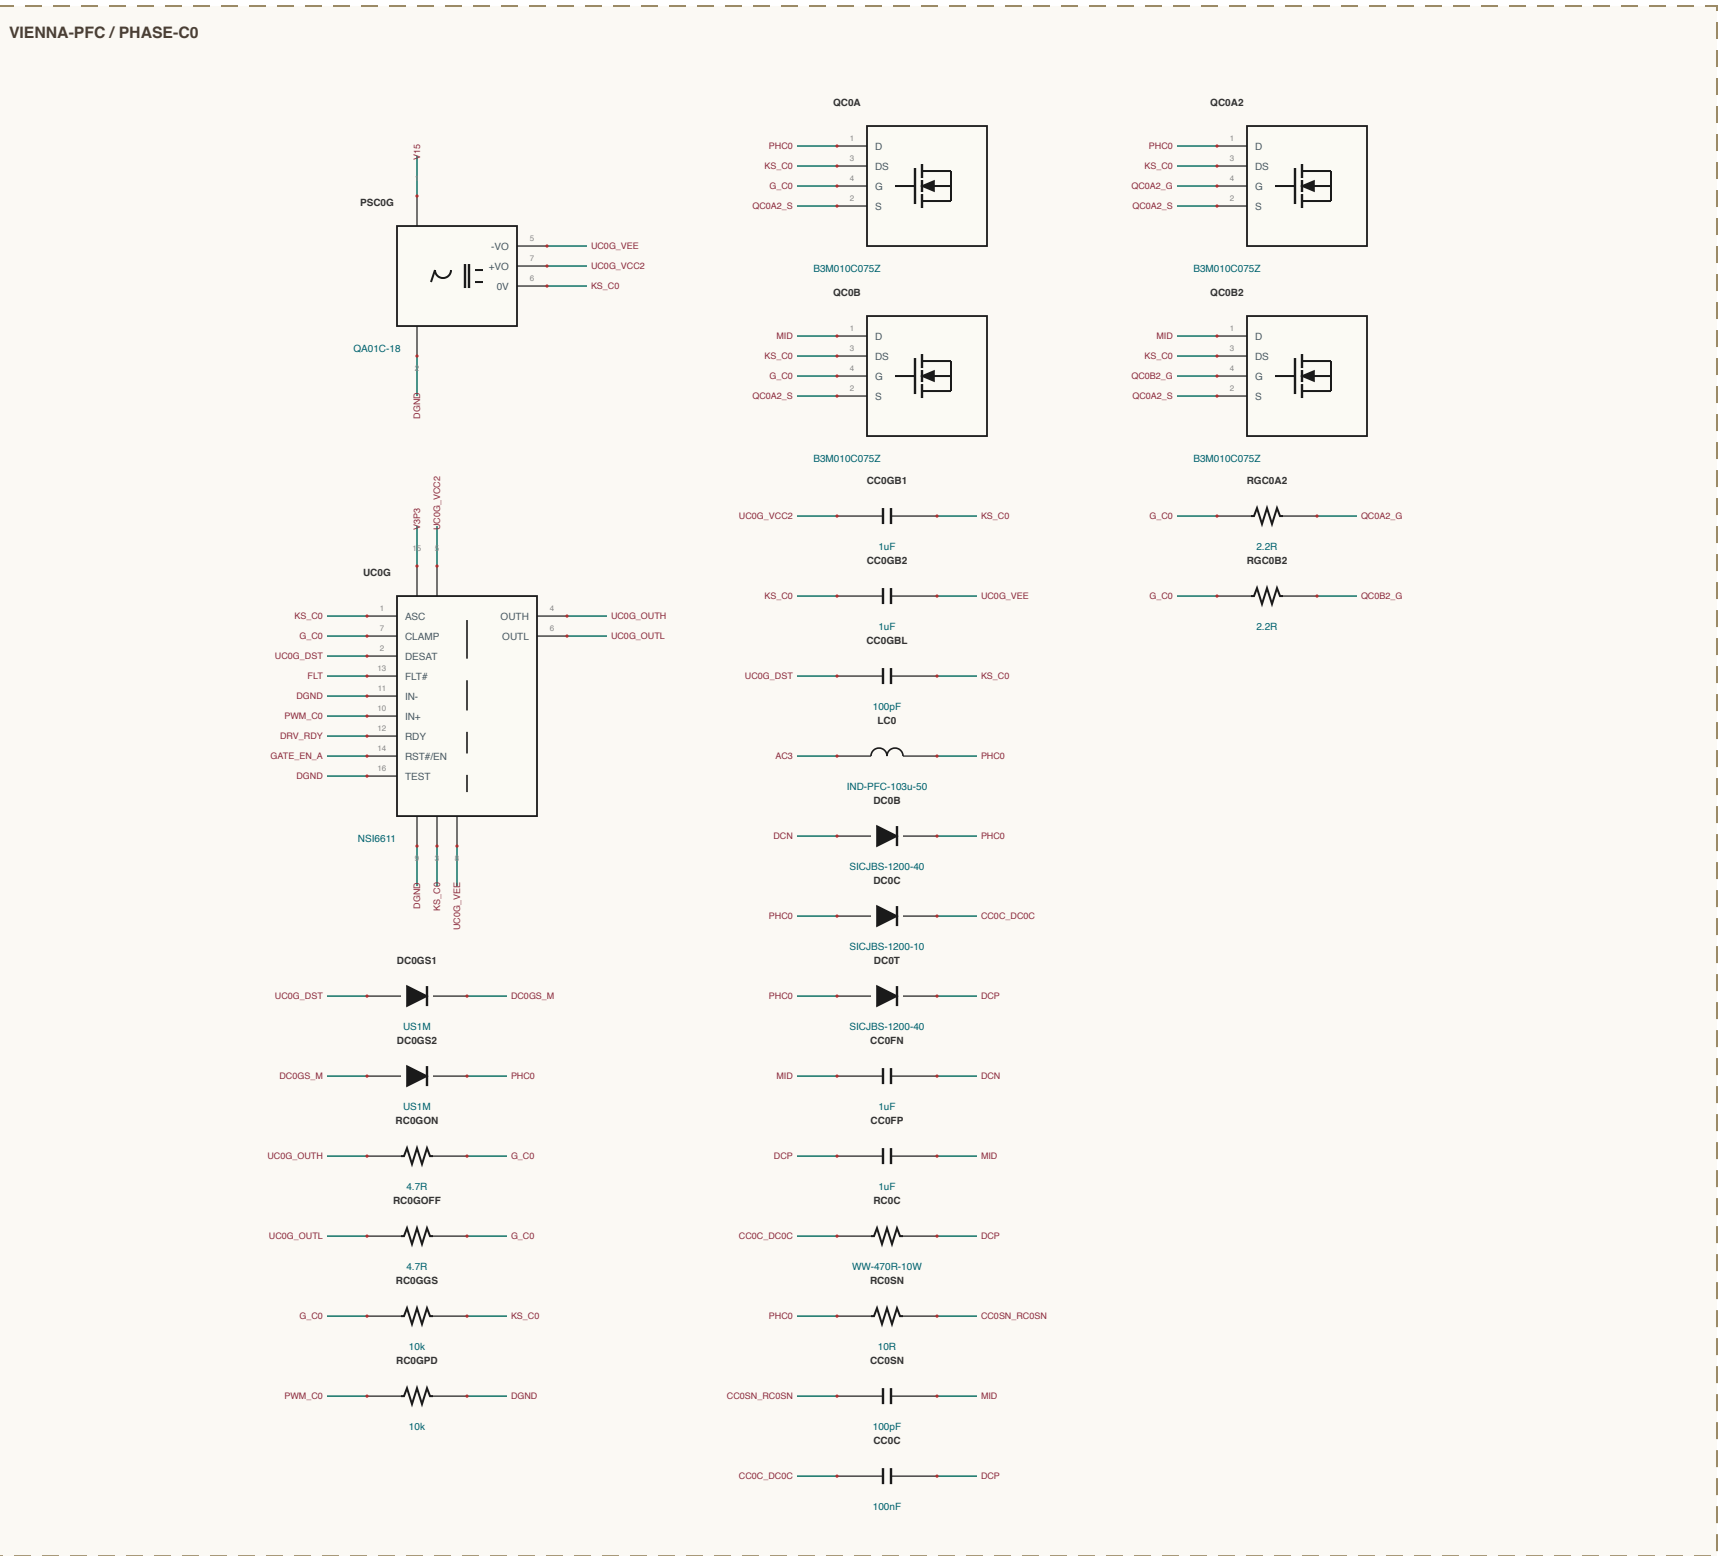
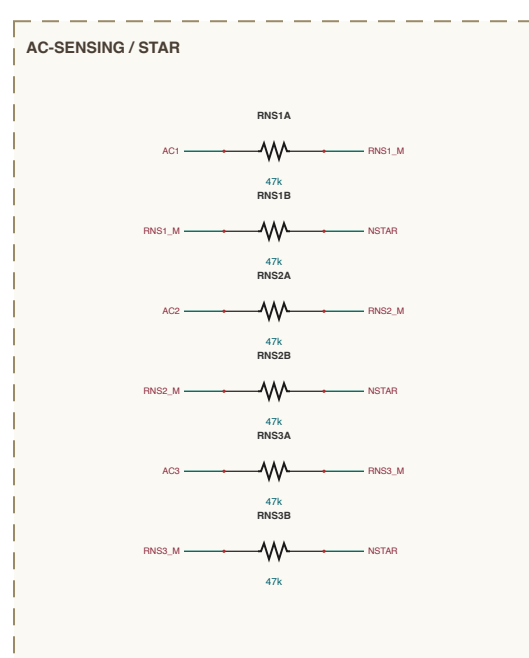
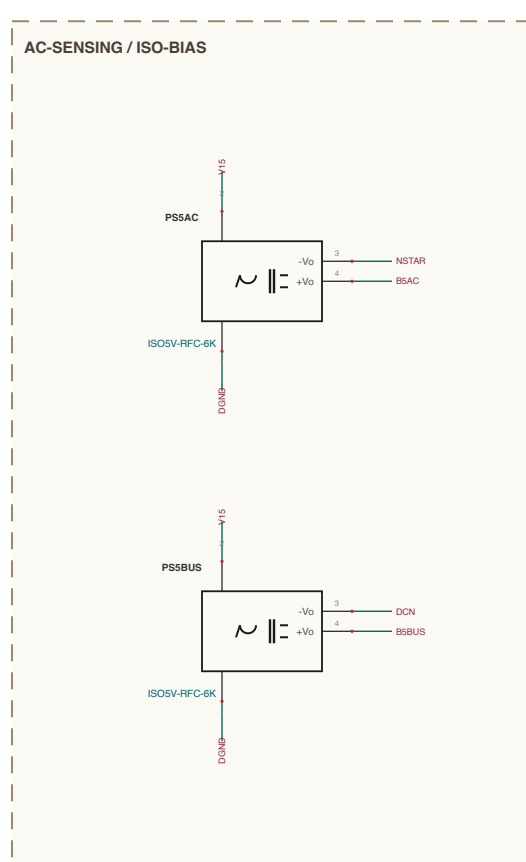
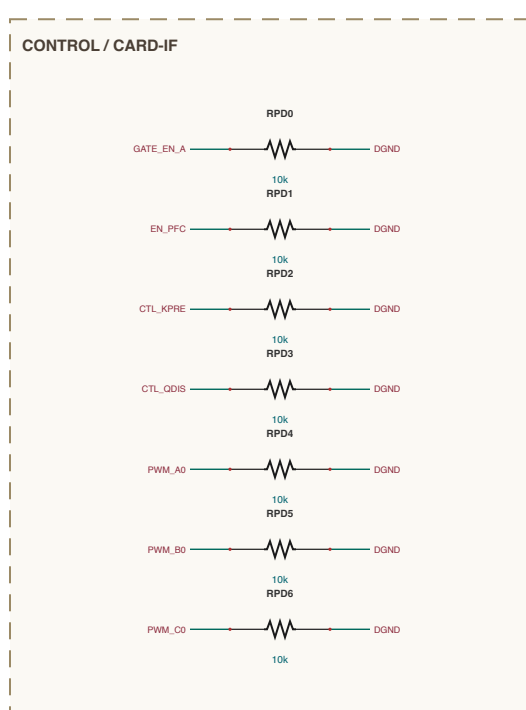
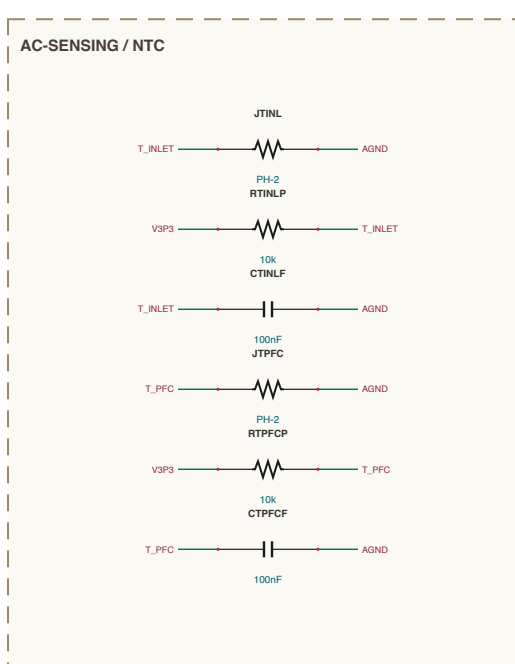
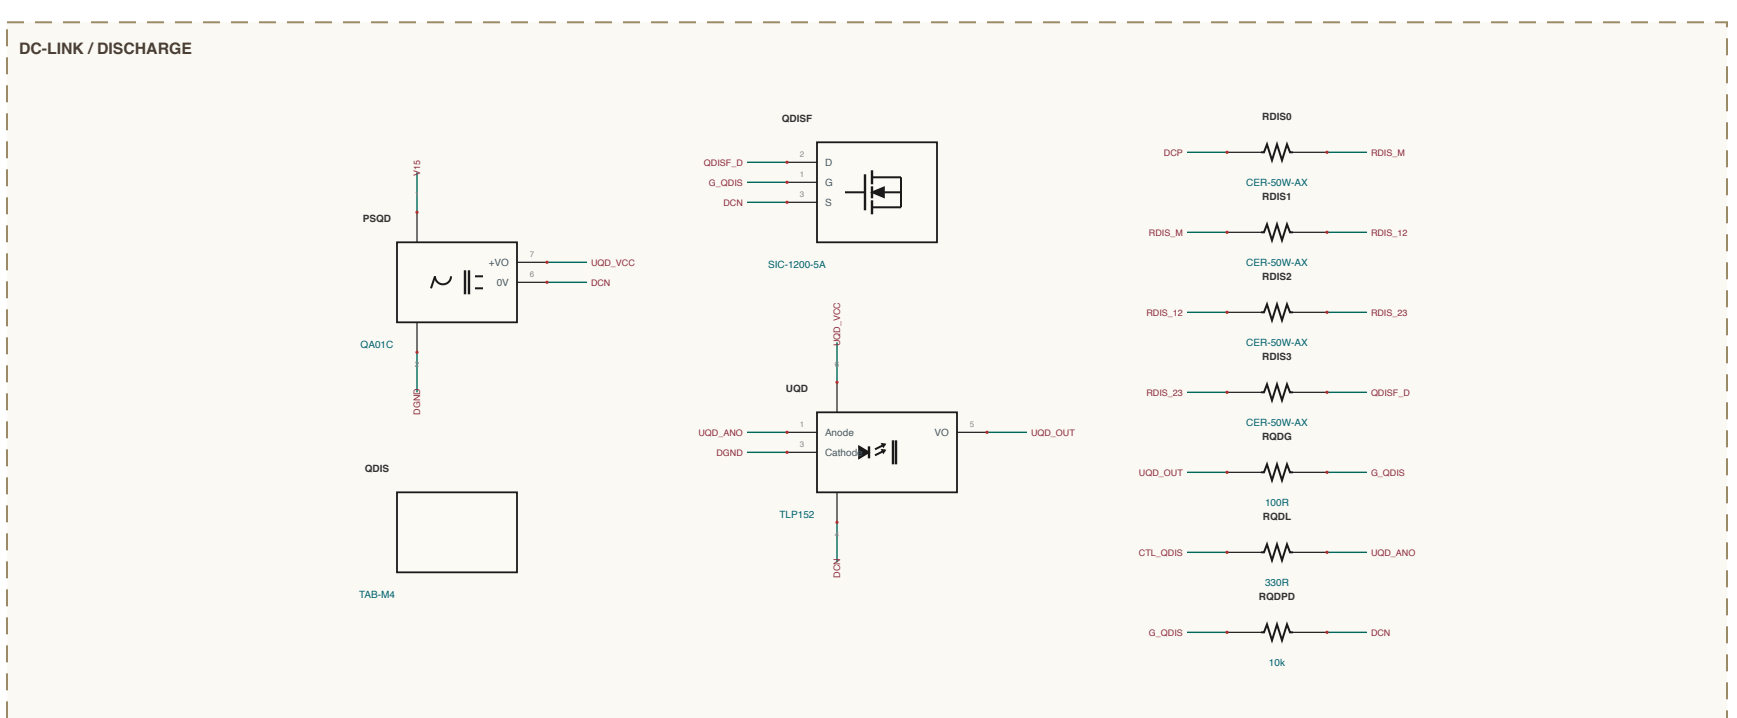
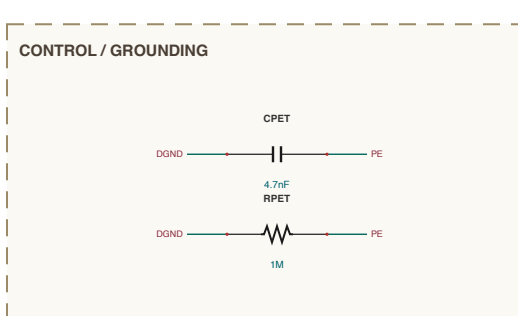
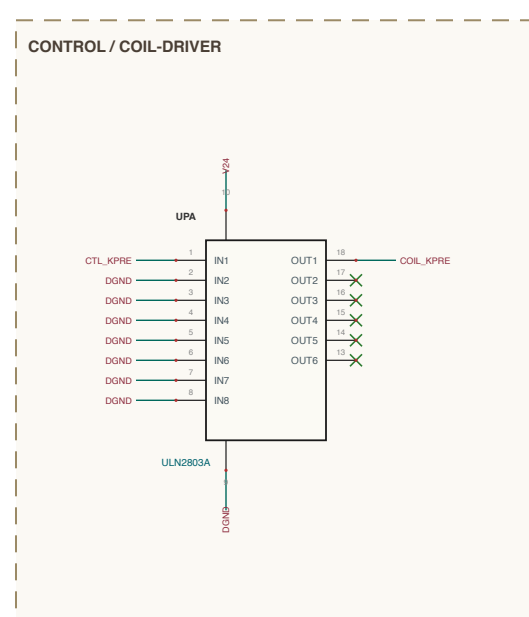
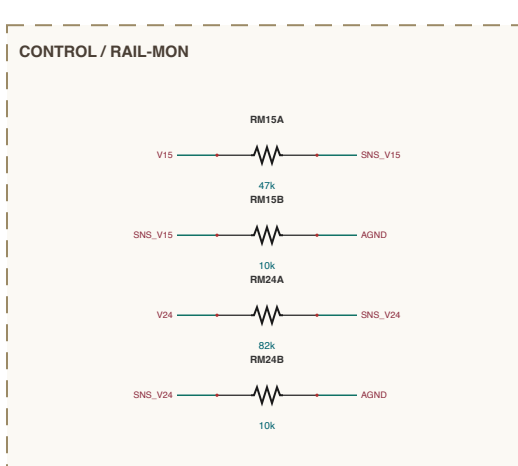
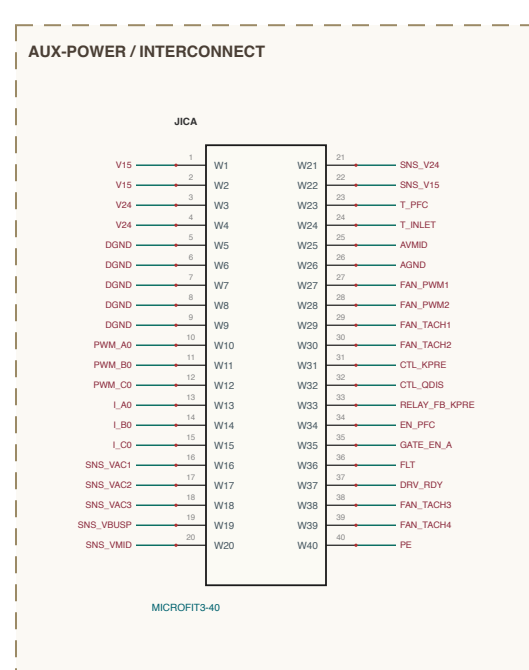
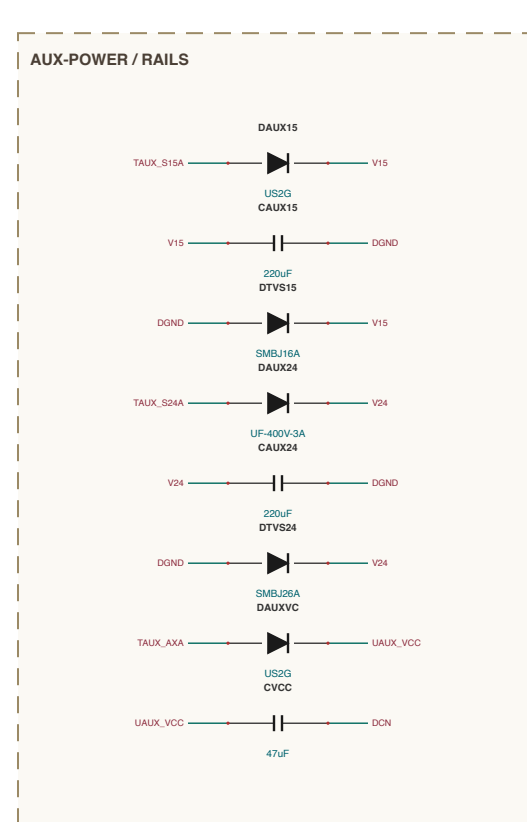
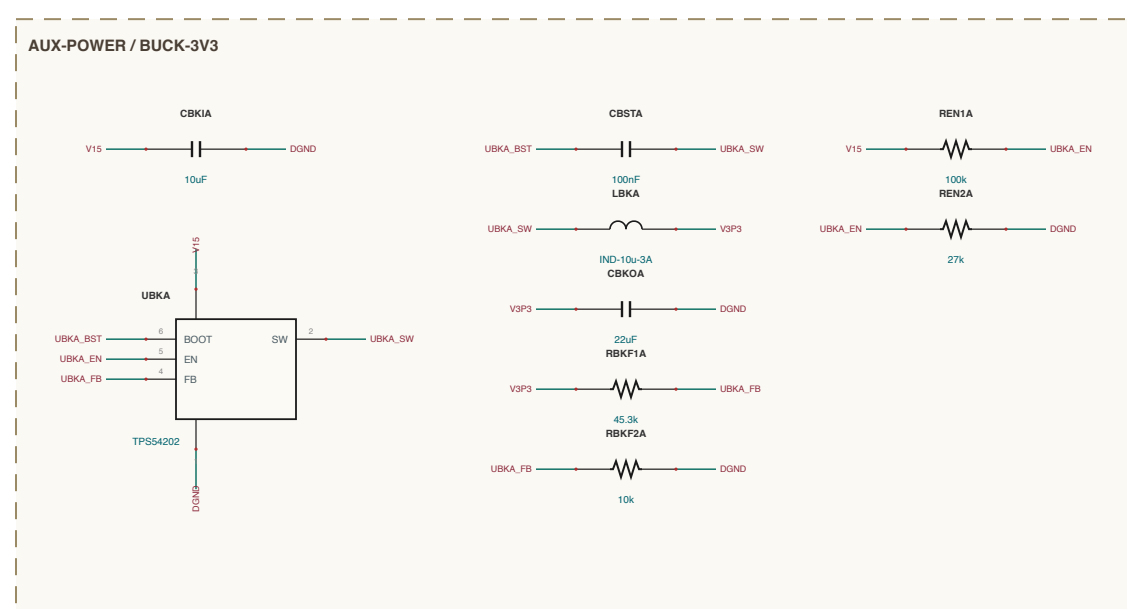
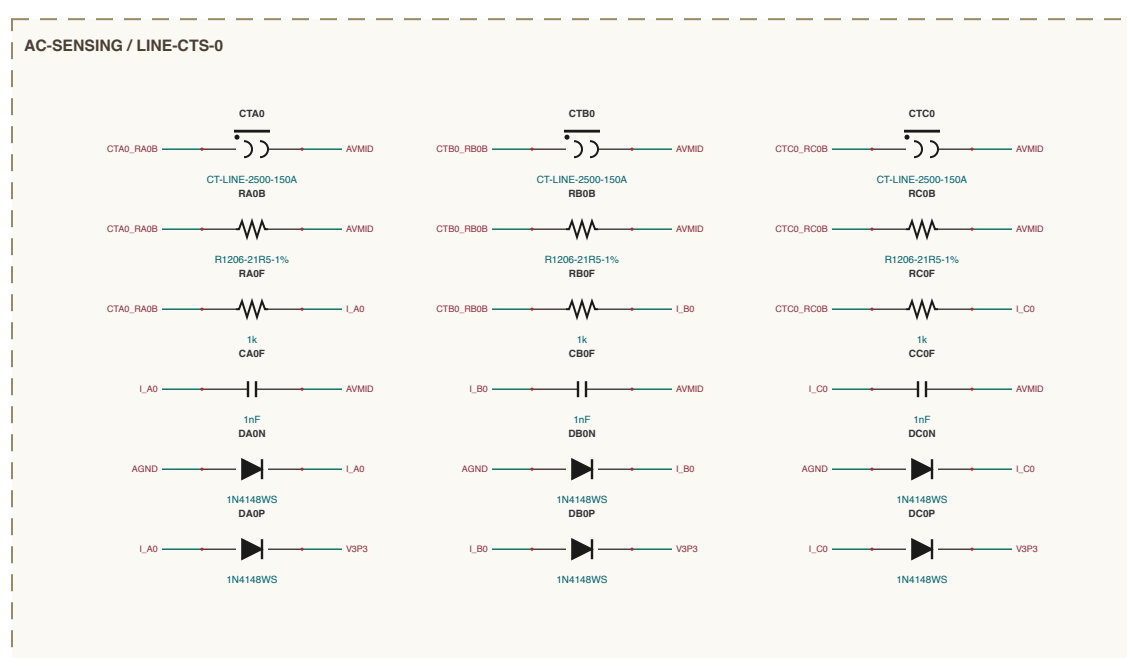
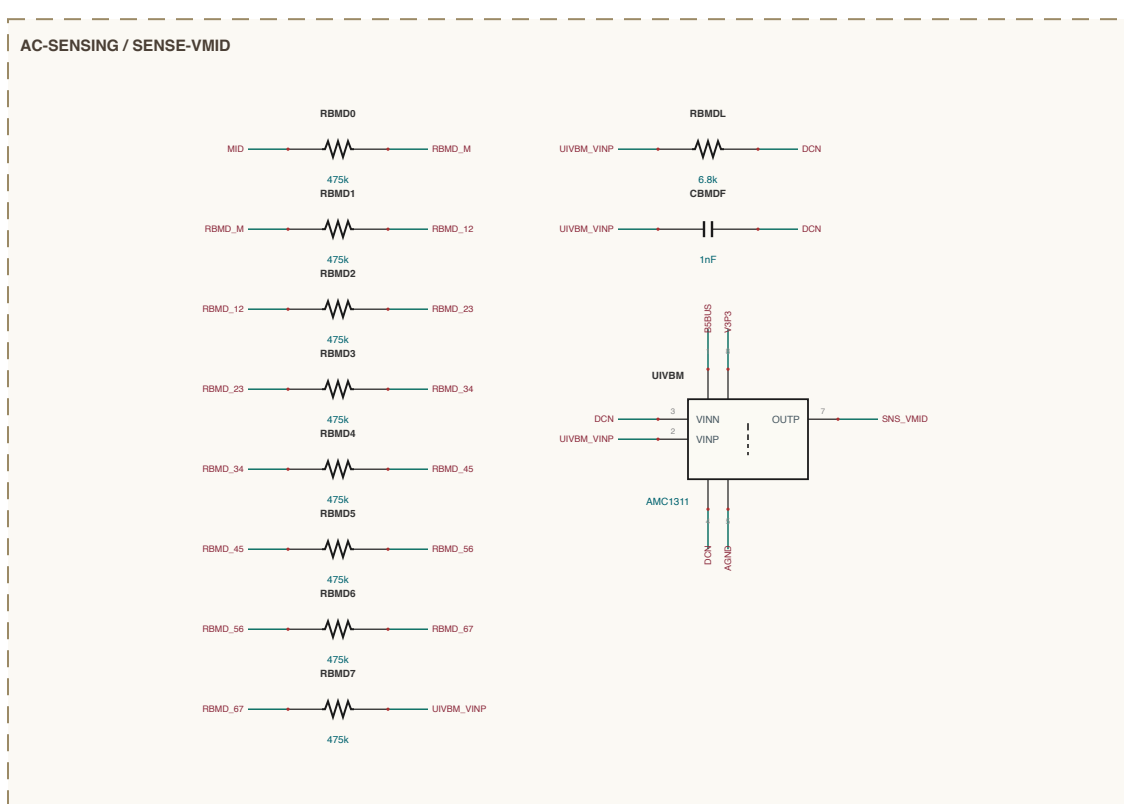
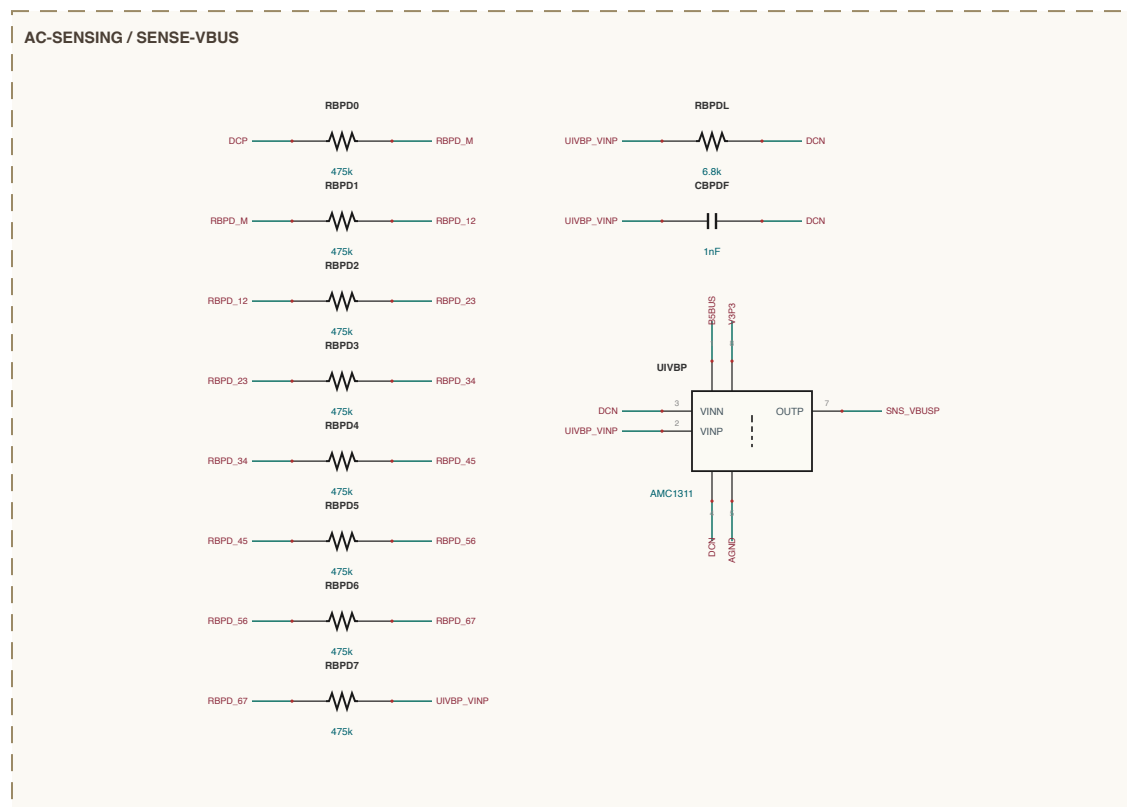
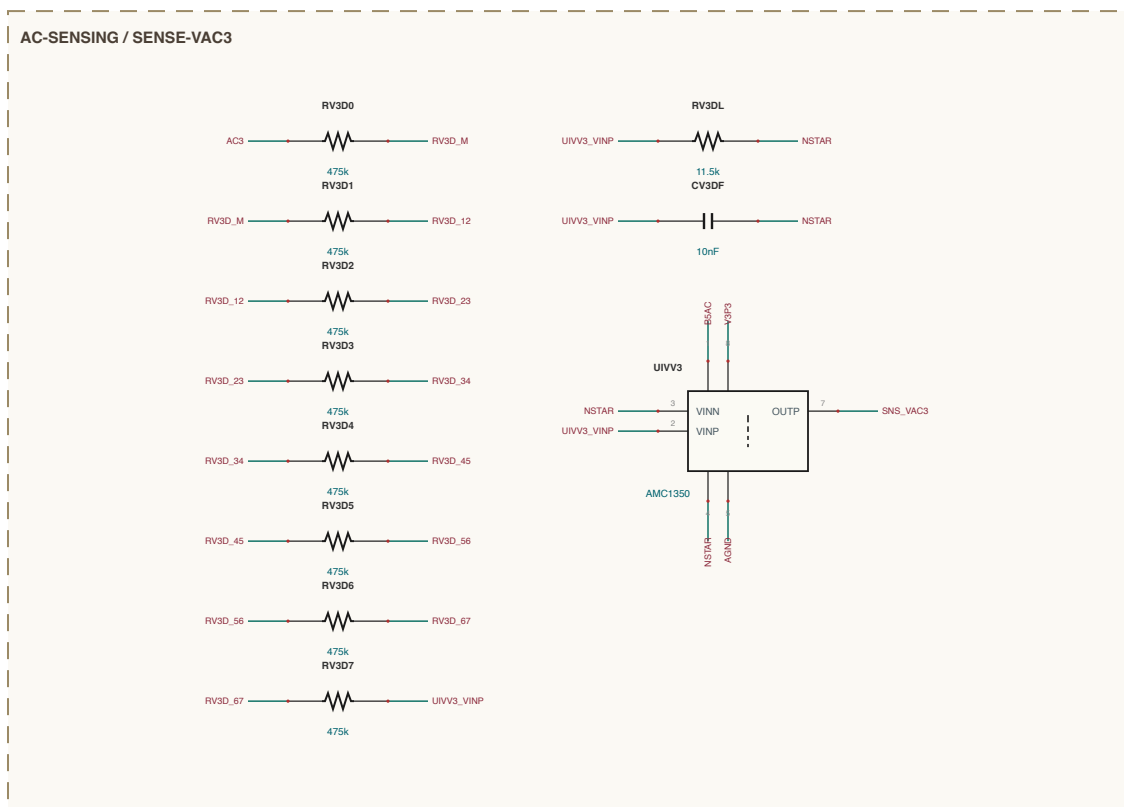
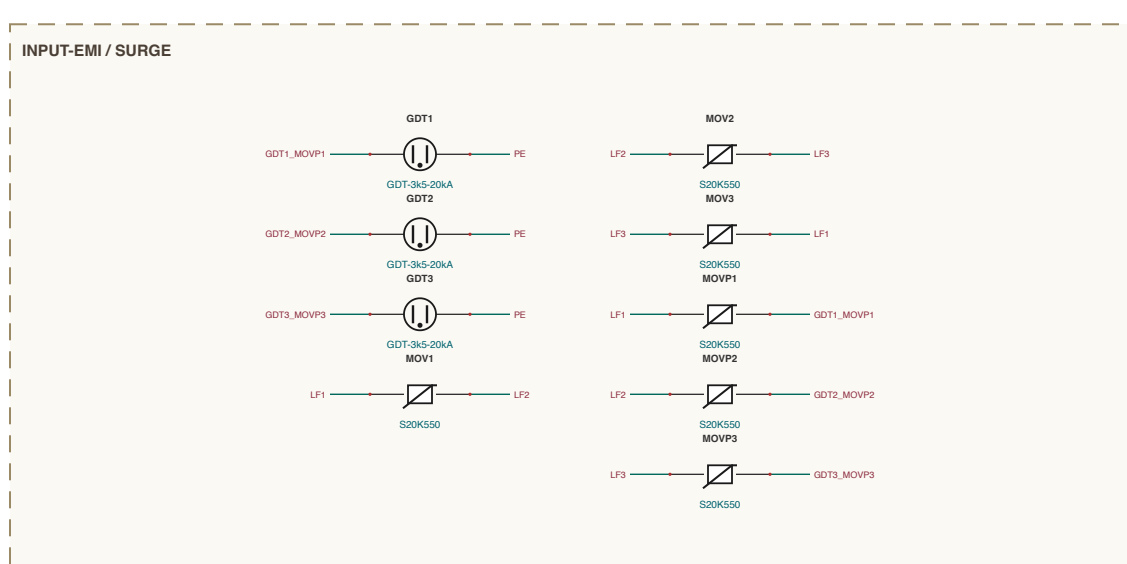
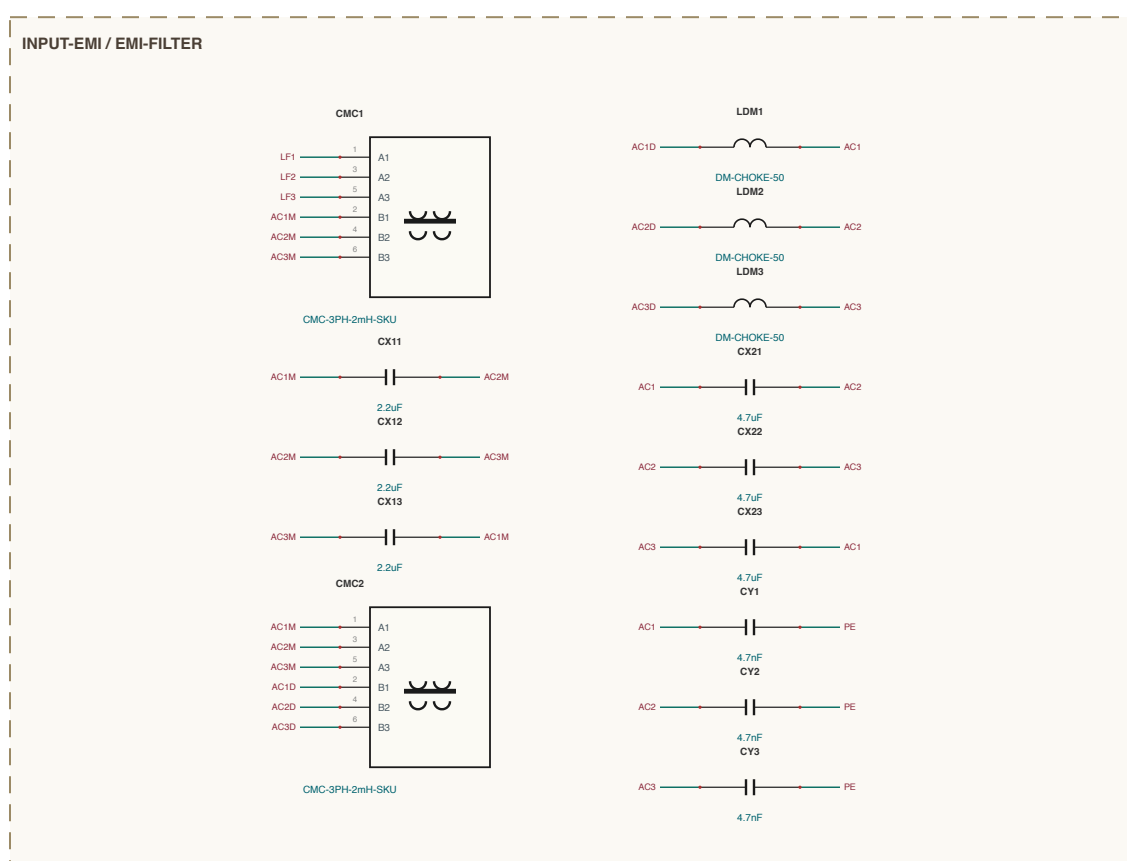
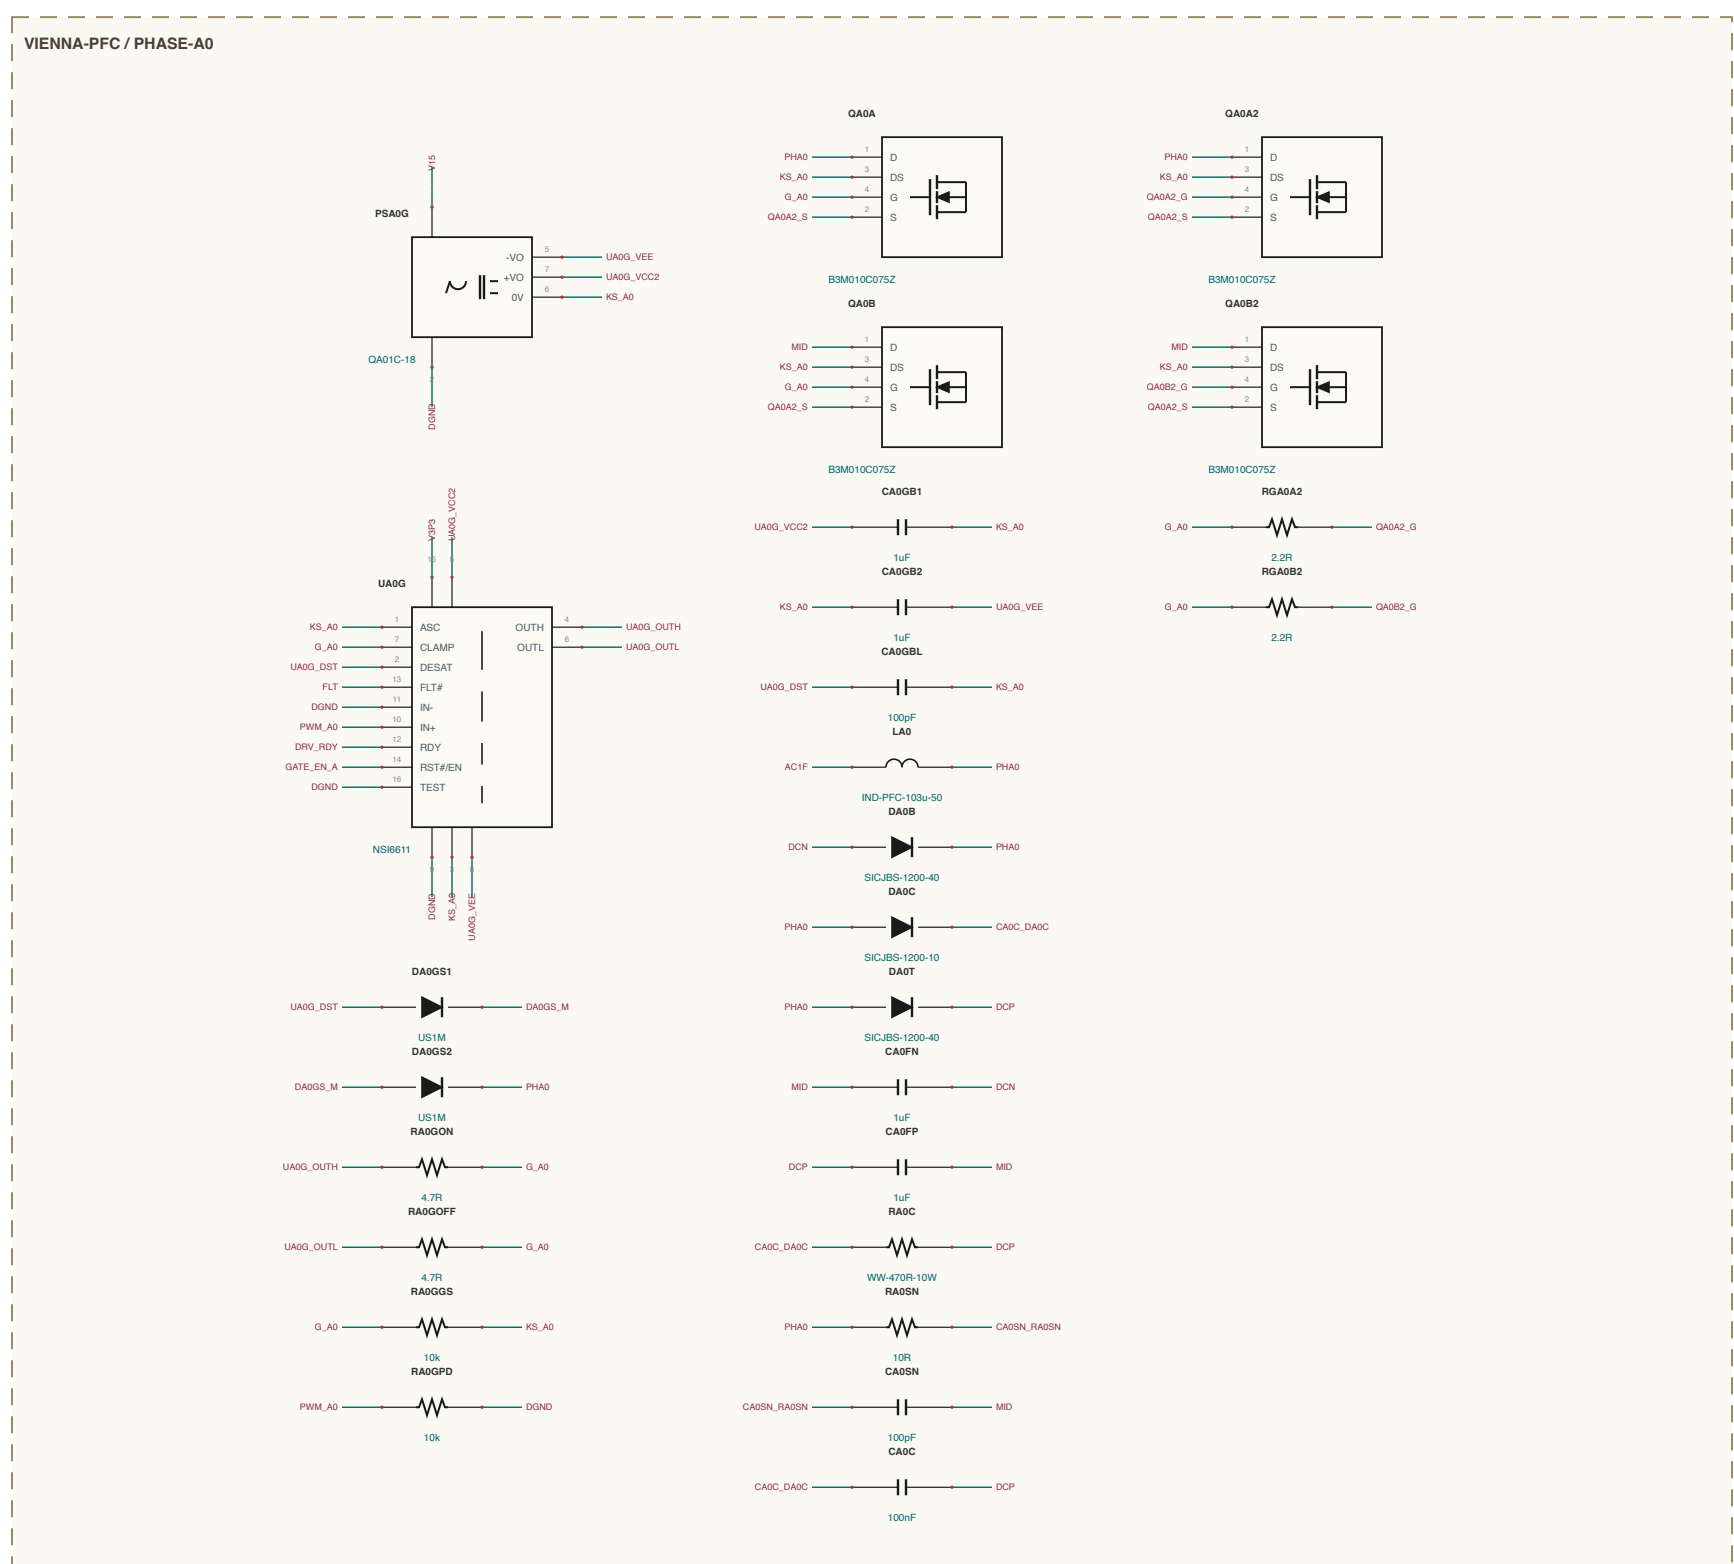
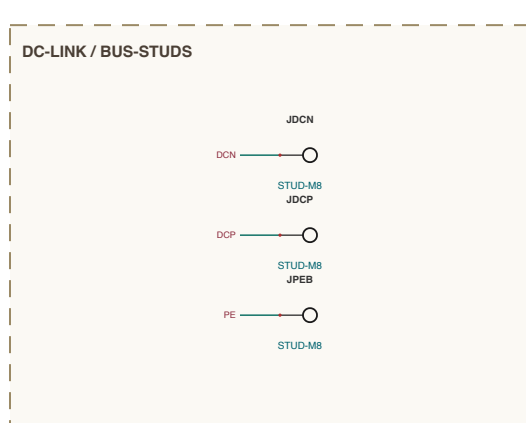
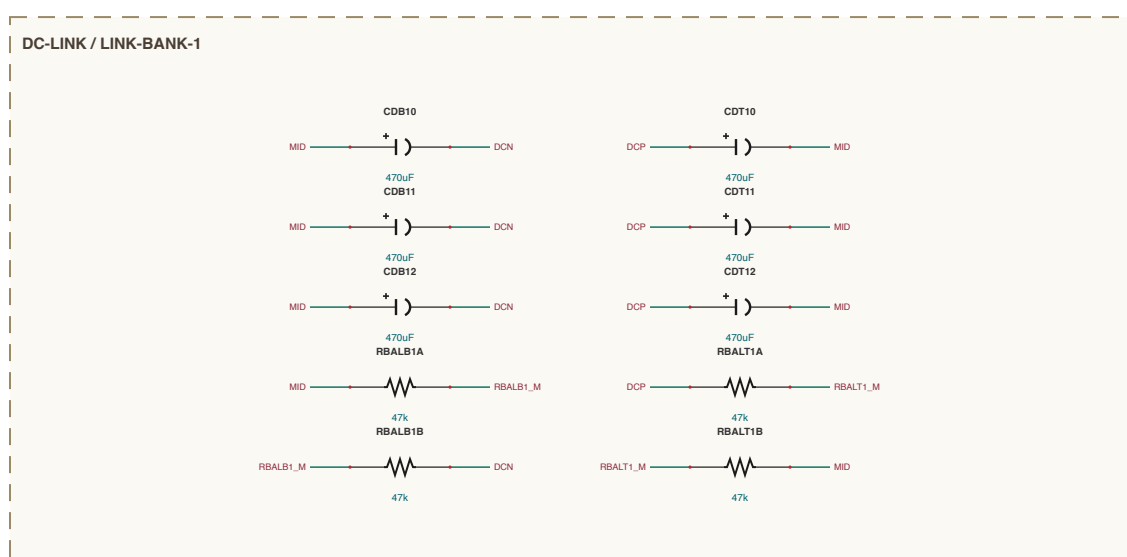
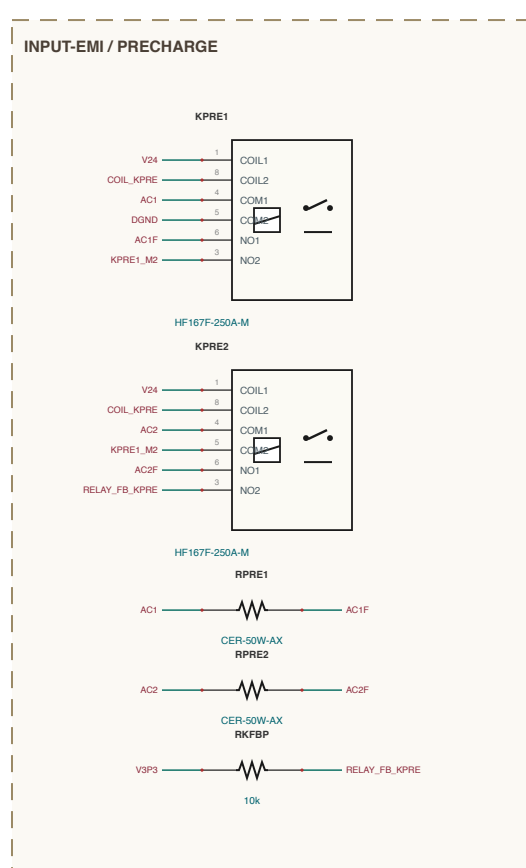
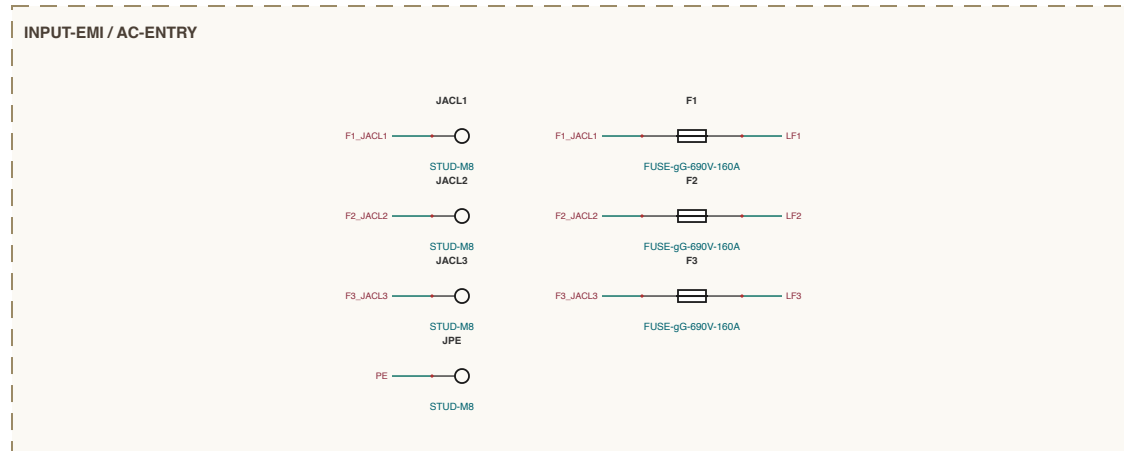
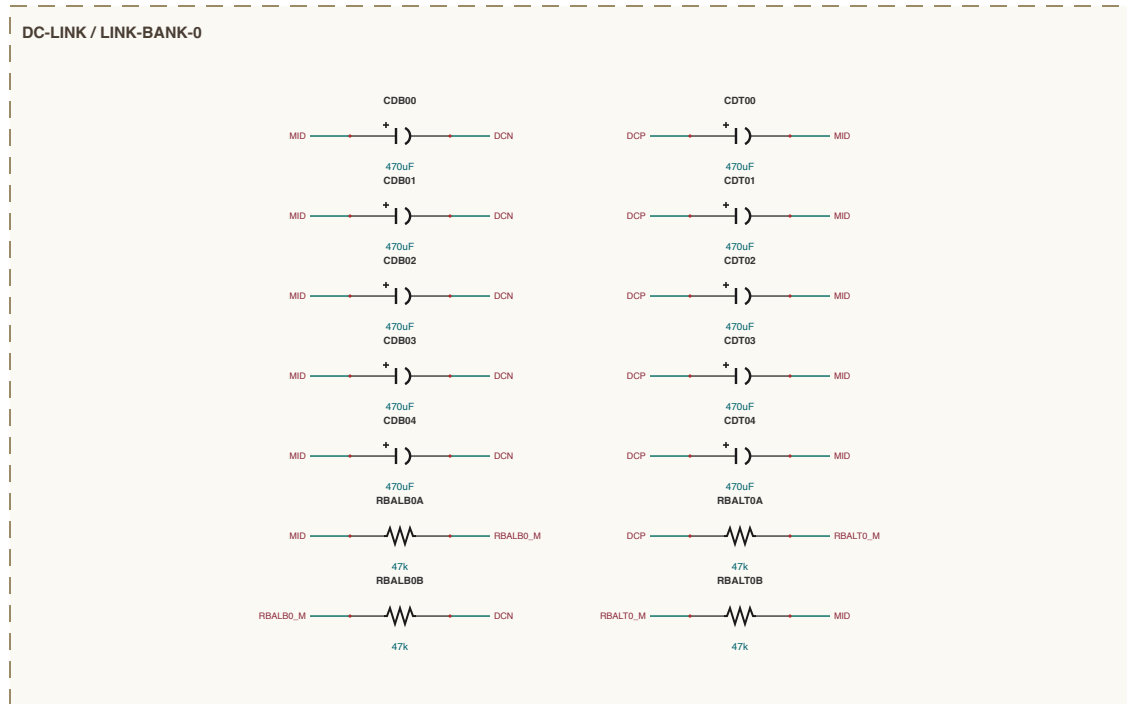
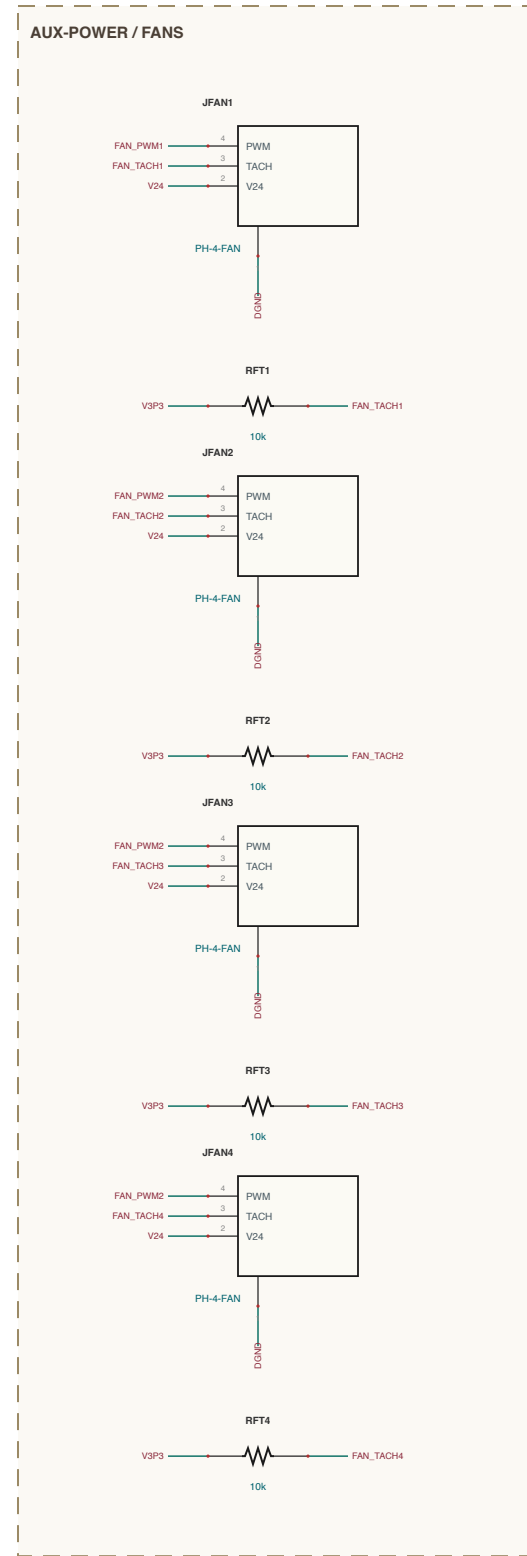
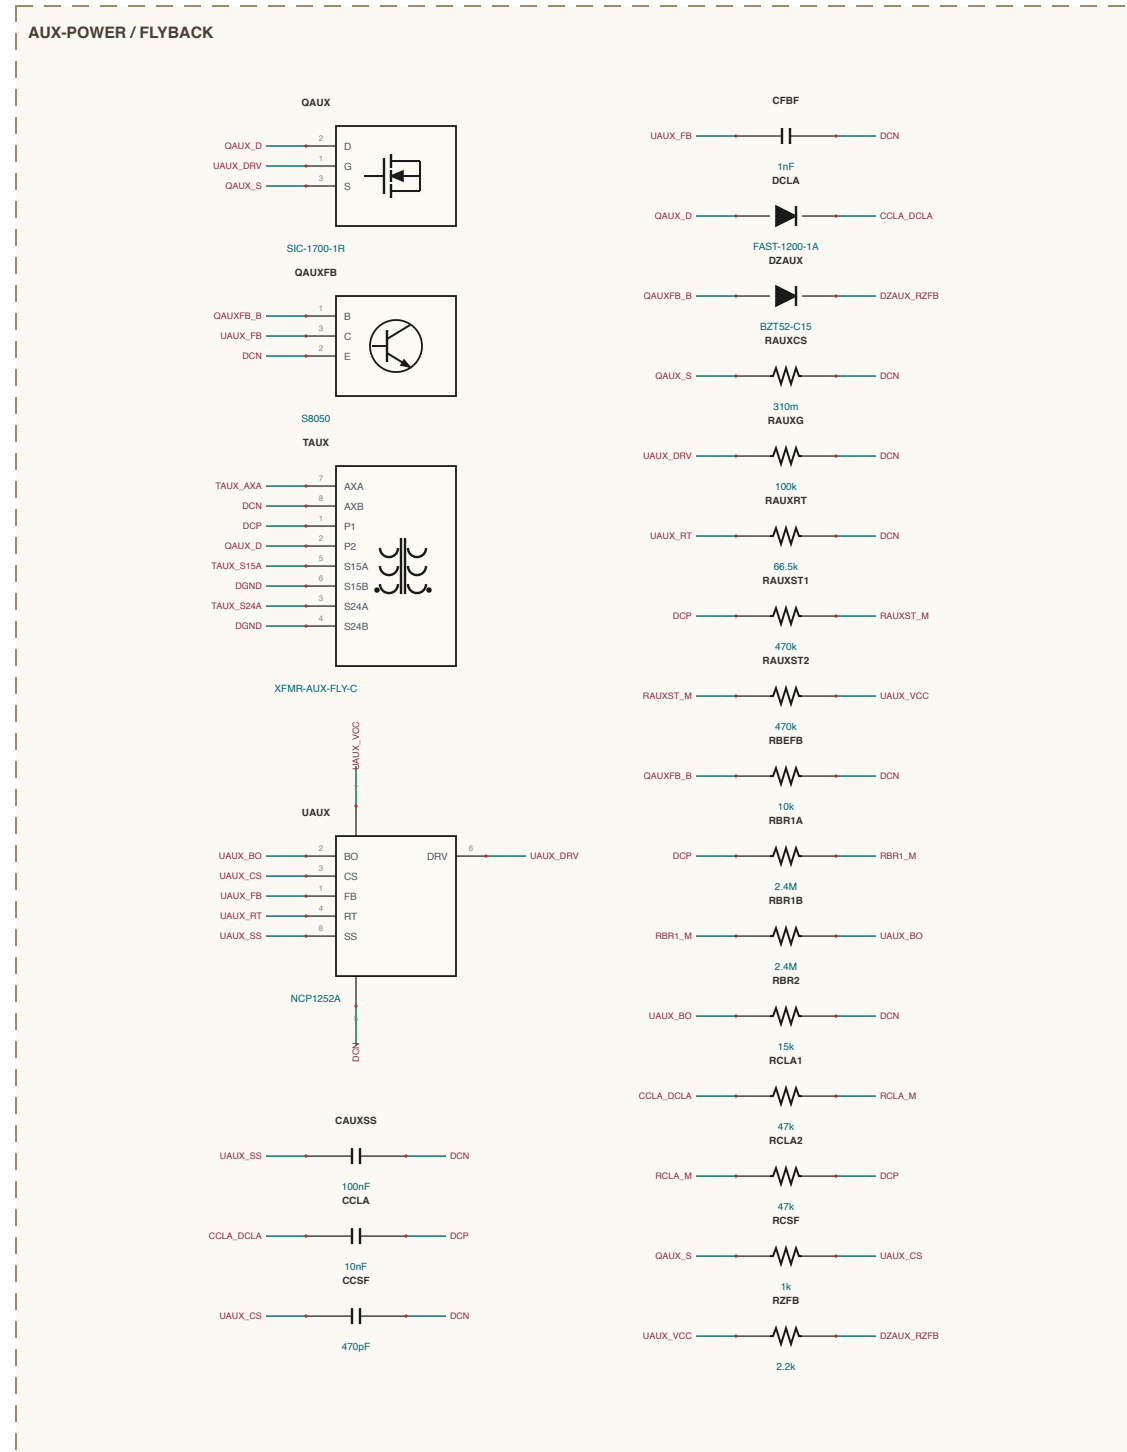
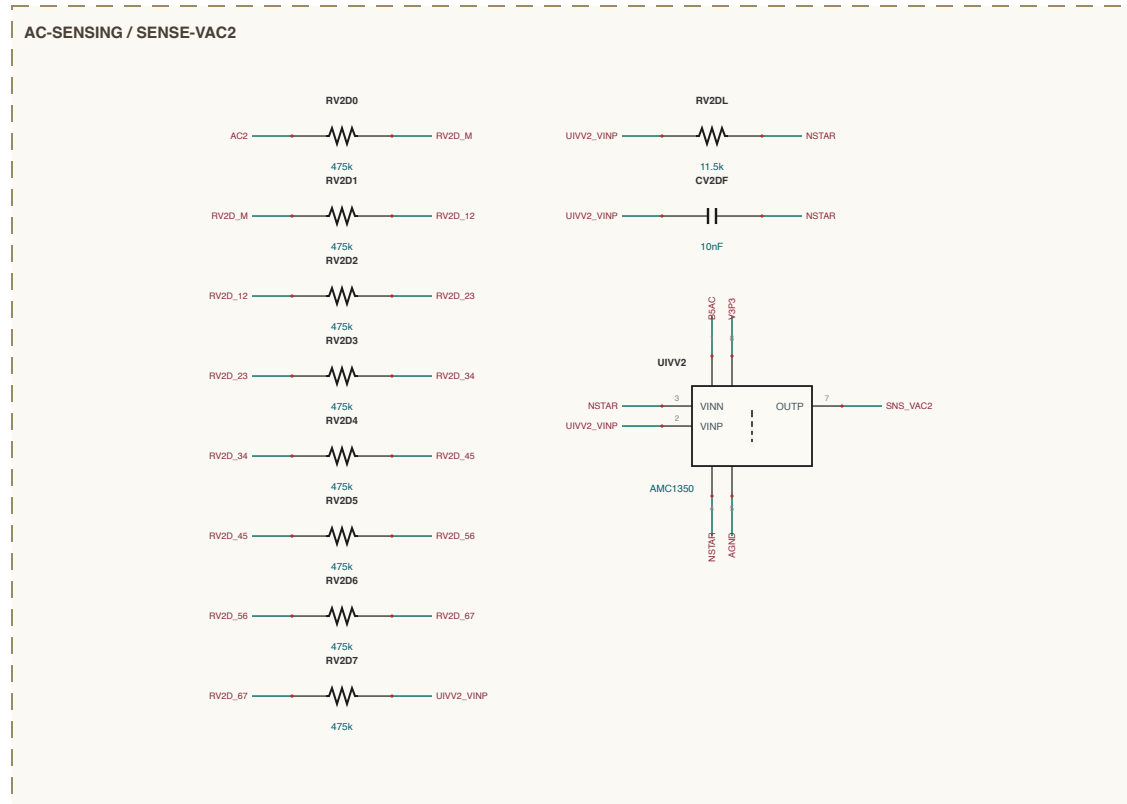


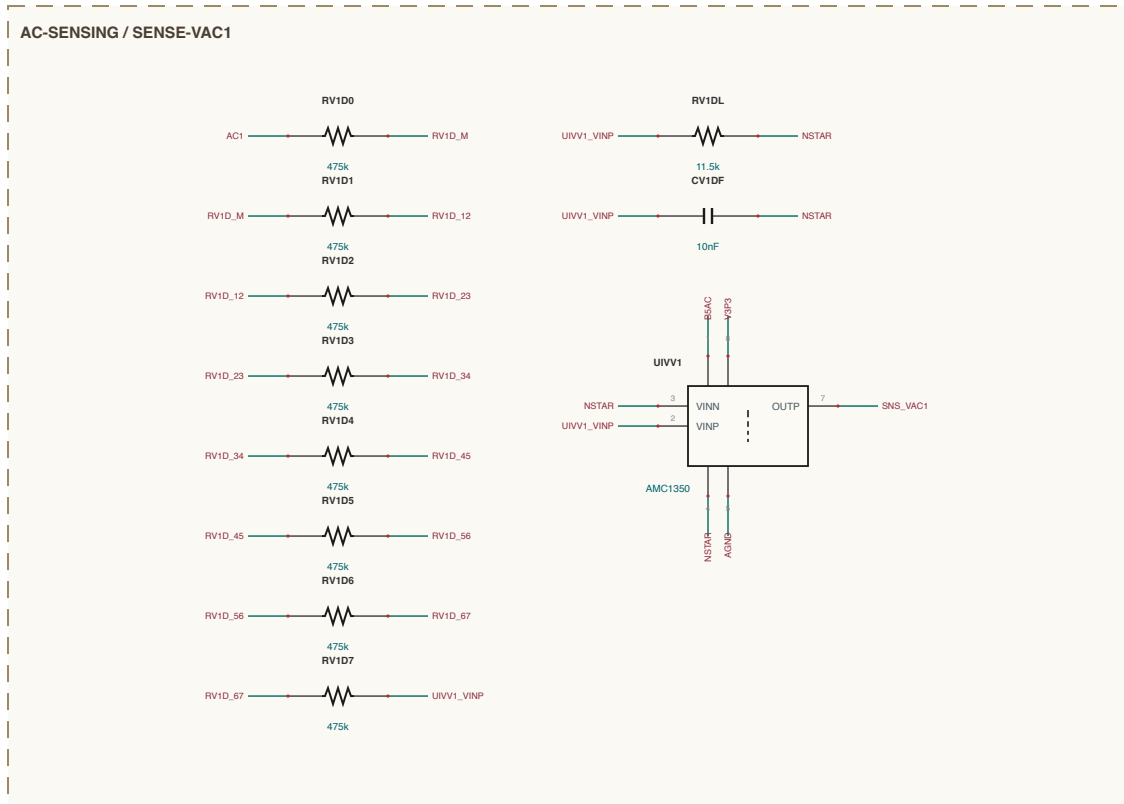

SHEET INDEX

Sheet 1-1 of 2
AC-SENSING: 9 sections
AUX-POWER: 9 sections
CONTROL: 1 section
DC-LINK: 4 sections
INPUT-EM: 4 sections
VIENNA-PFC: 2 sections
Ver 0.1 - 20 sections - 300 components

NET NAMING

Internal junctions are named for what they join

Source - OFF: node at fault if pin e.g. VSPDA, VSPDA, VSPDA

Reference - W: midpoint of 2 series pair e.g. R5A1A, R5

Reference - series: top between 2 components e.g. R5C1, R5

All others are explicit design notes

