




BANKS-SP / SP-MATRIX

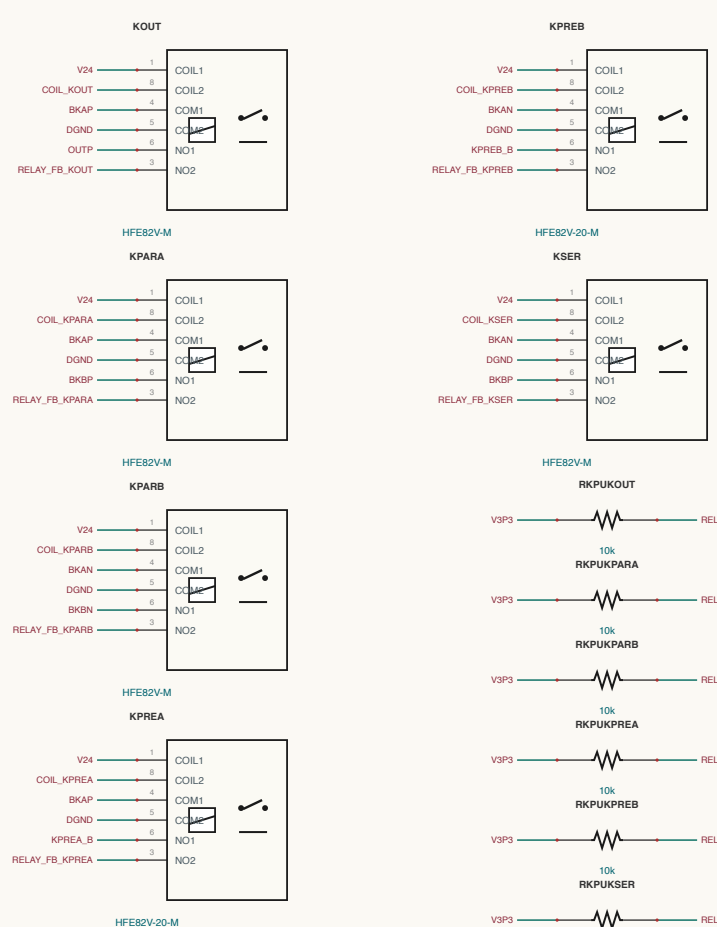


BANKS-SP / BLEEDERS

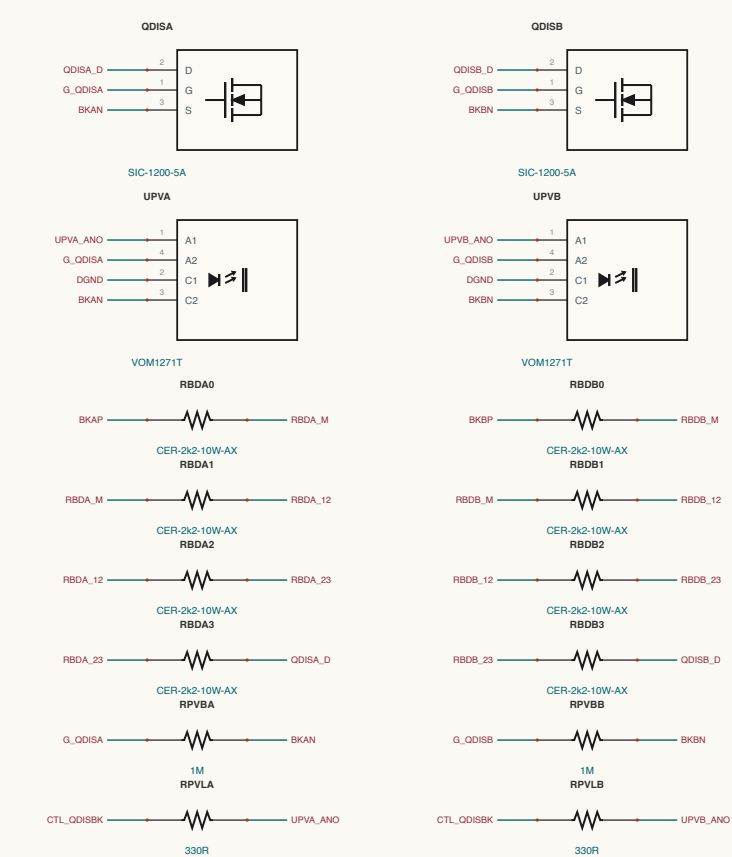


CONTROL / COL-DRIVER

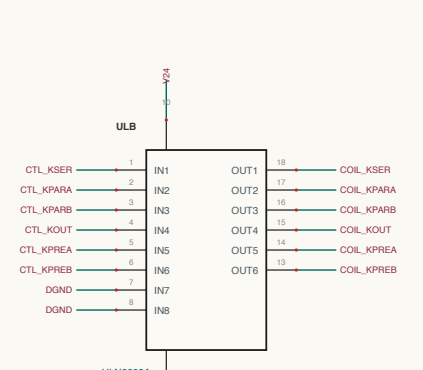


LLC-LEG8 / LEG-3

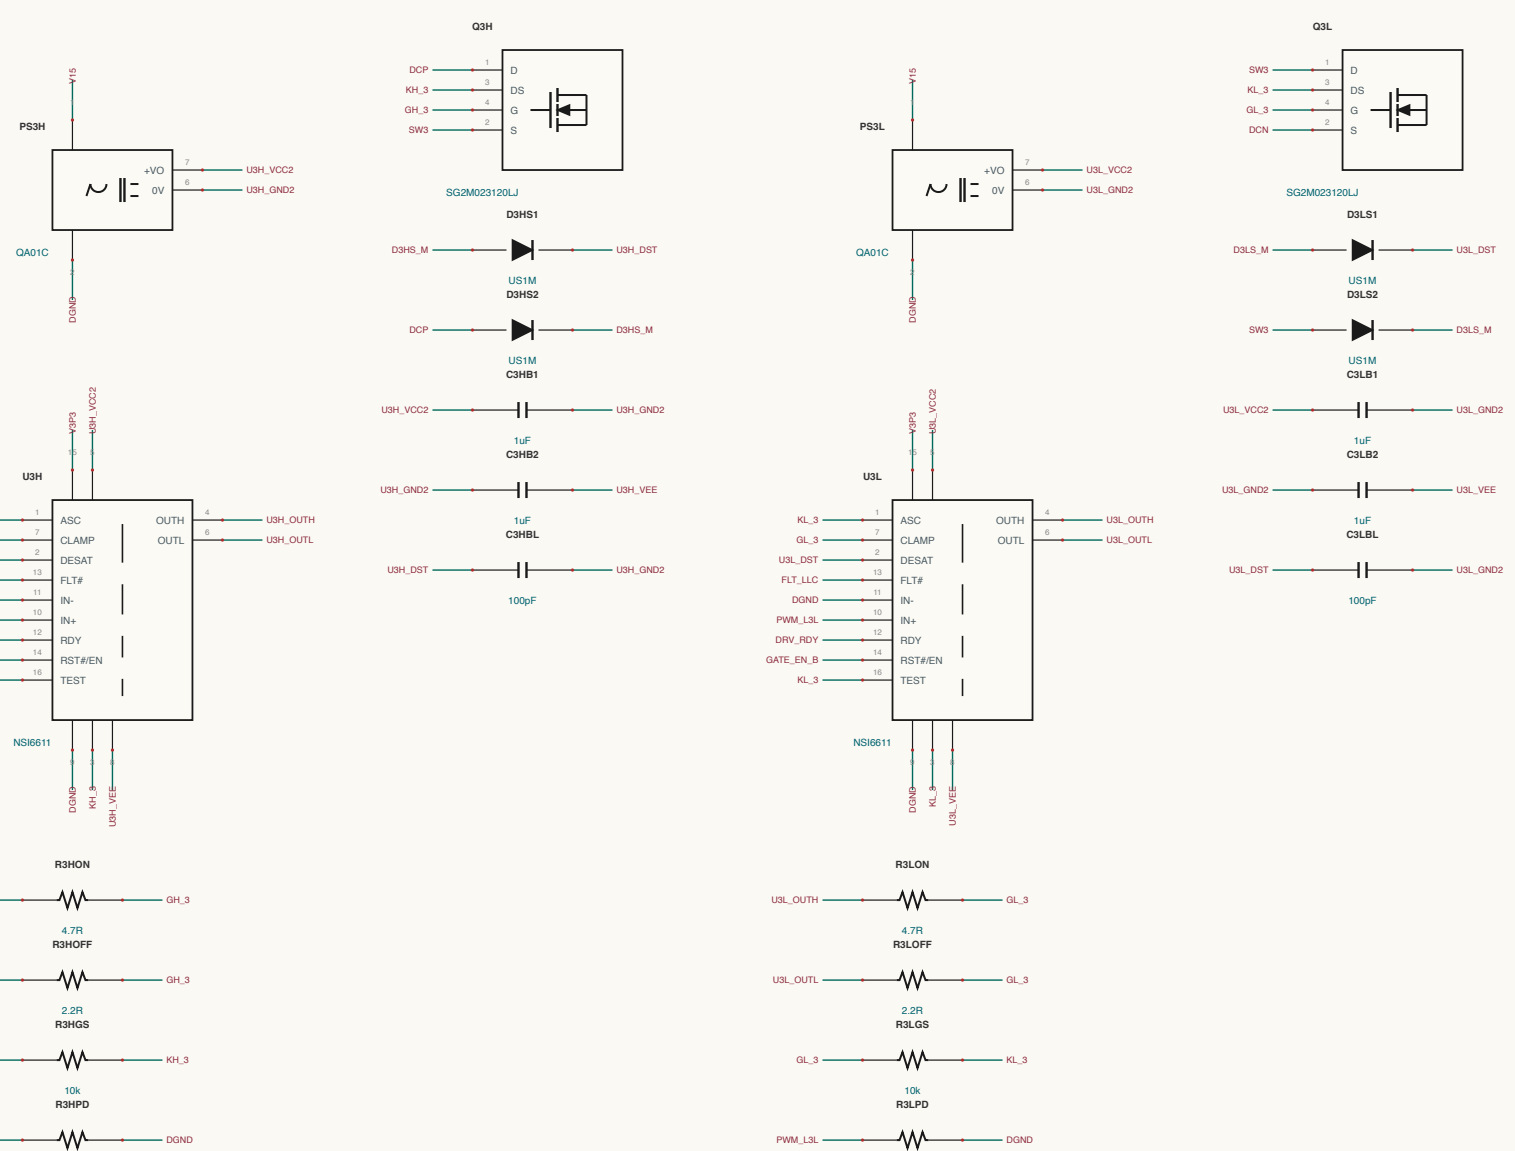


OUTPUT-SENSING / SO-BIAS

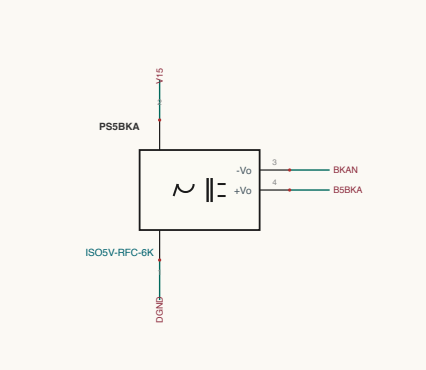


BANKS-SP / BANK-B

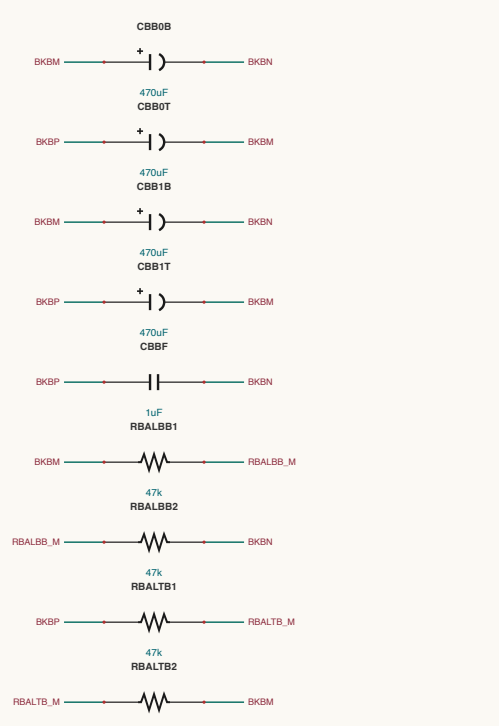


BANKS-SP / BANK-A

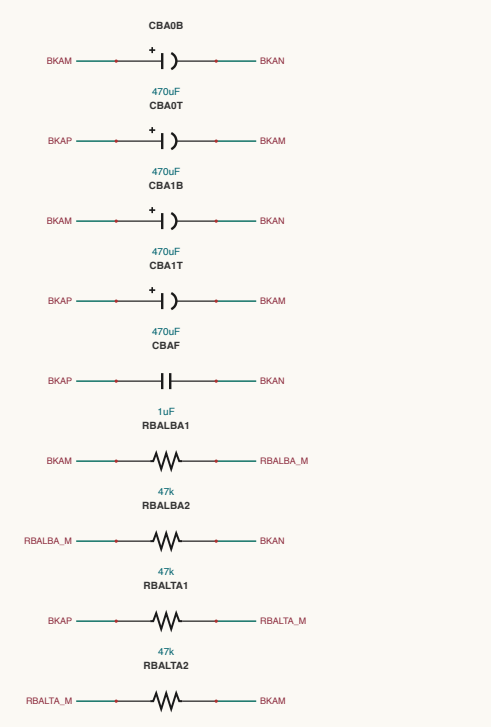


LLC-LEG5 / LEG-1

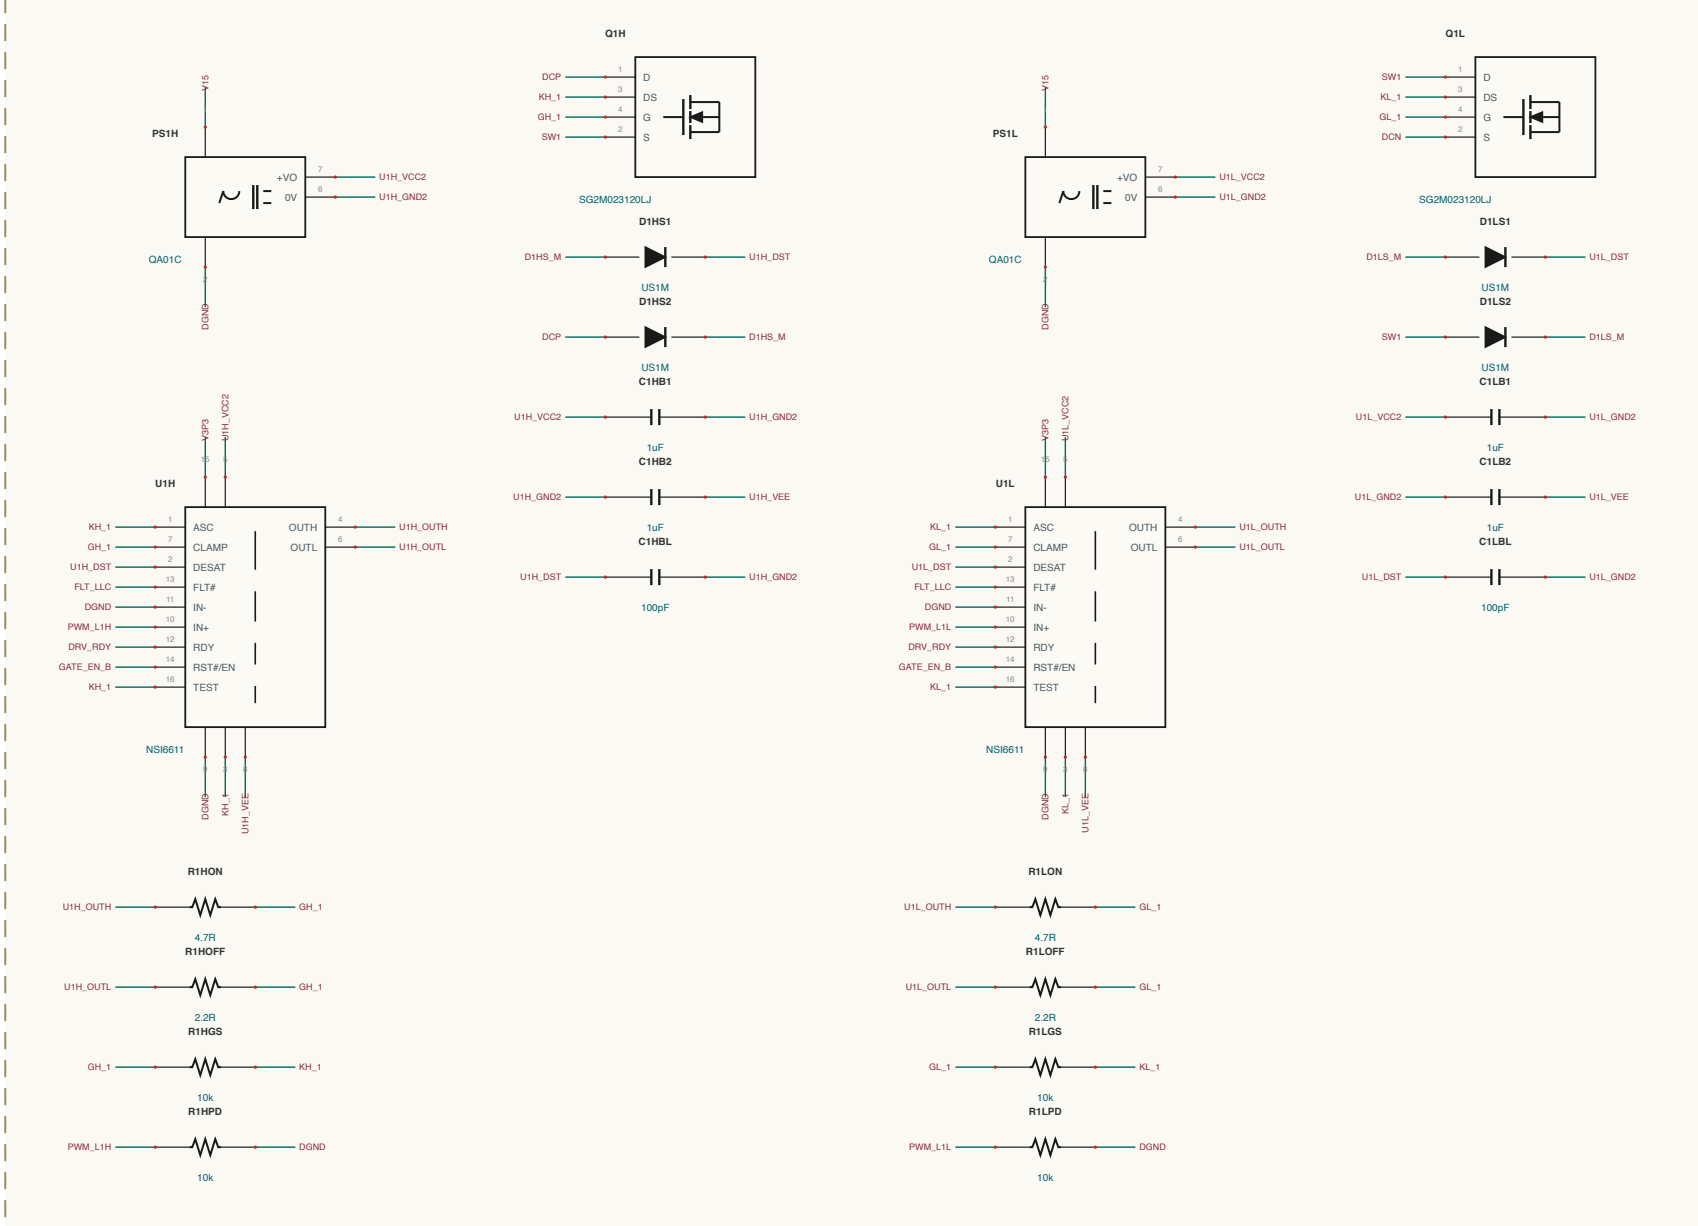


LLC-LEG5 / BUS-IN

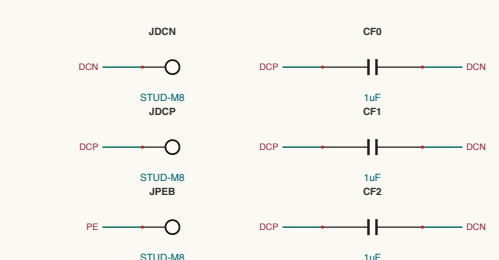


OUTPUT-SENSING / OUTPUT

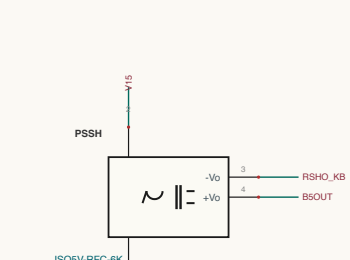


OUTPUT-SENSING / SENSE-VBKA

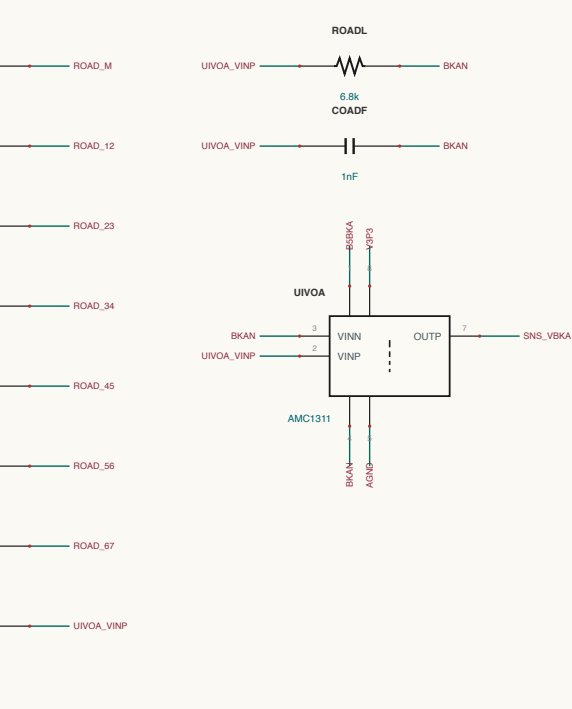


COMMS-HMI / CAN

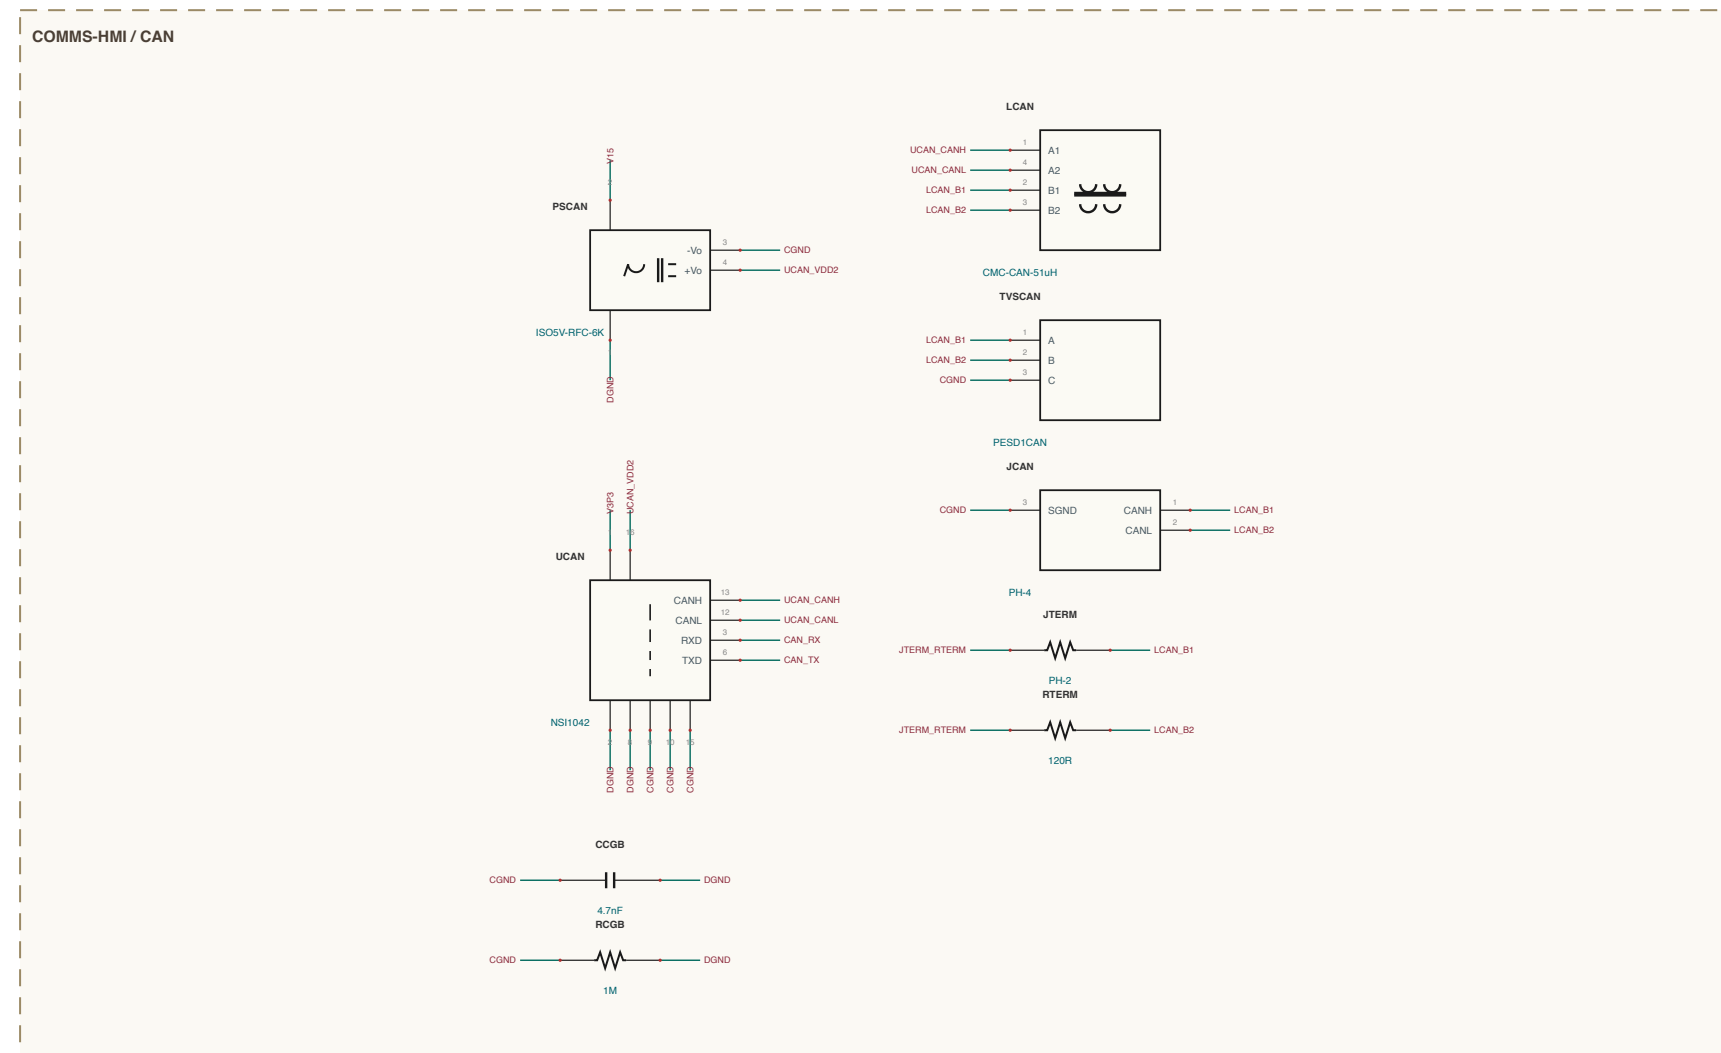

LLC-LEG5 / LEG-2

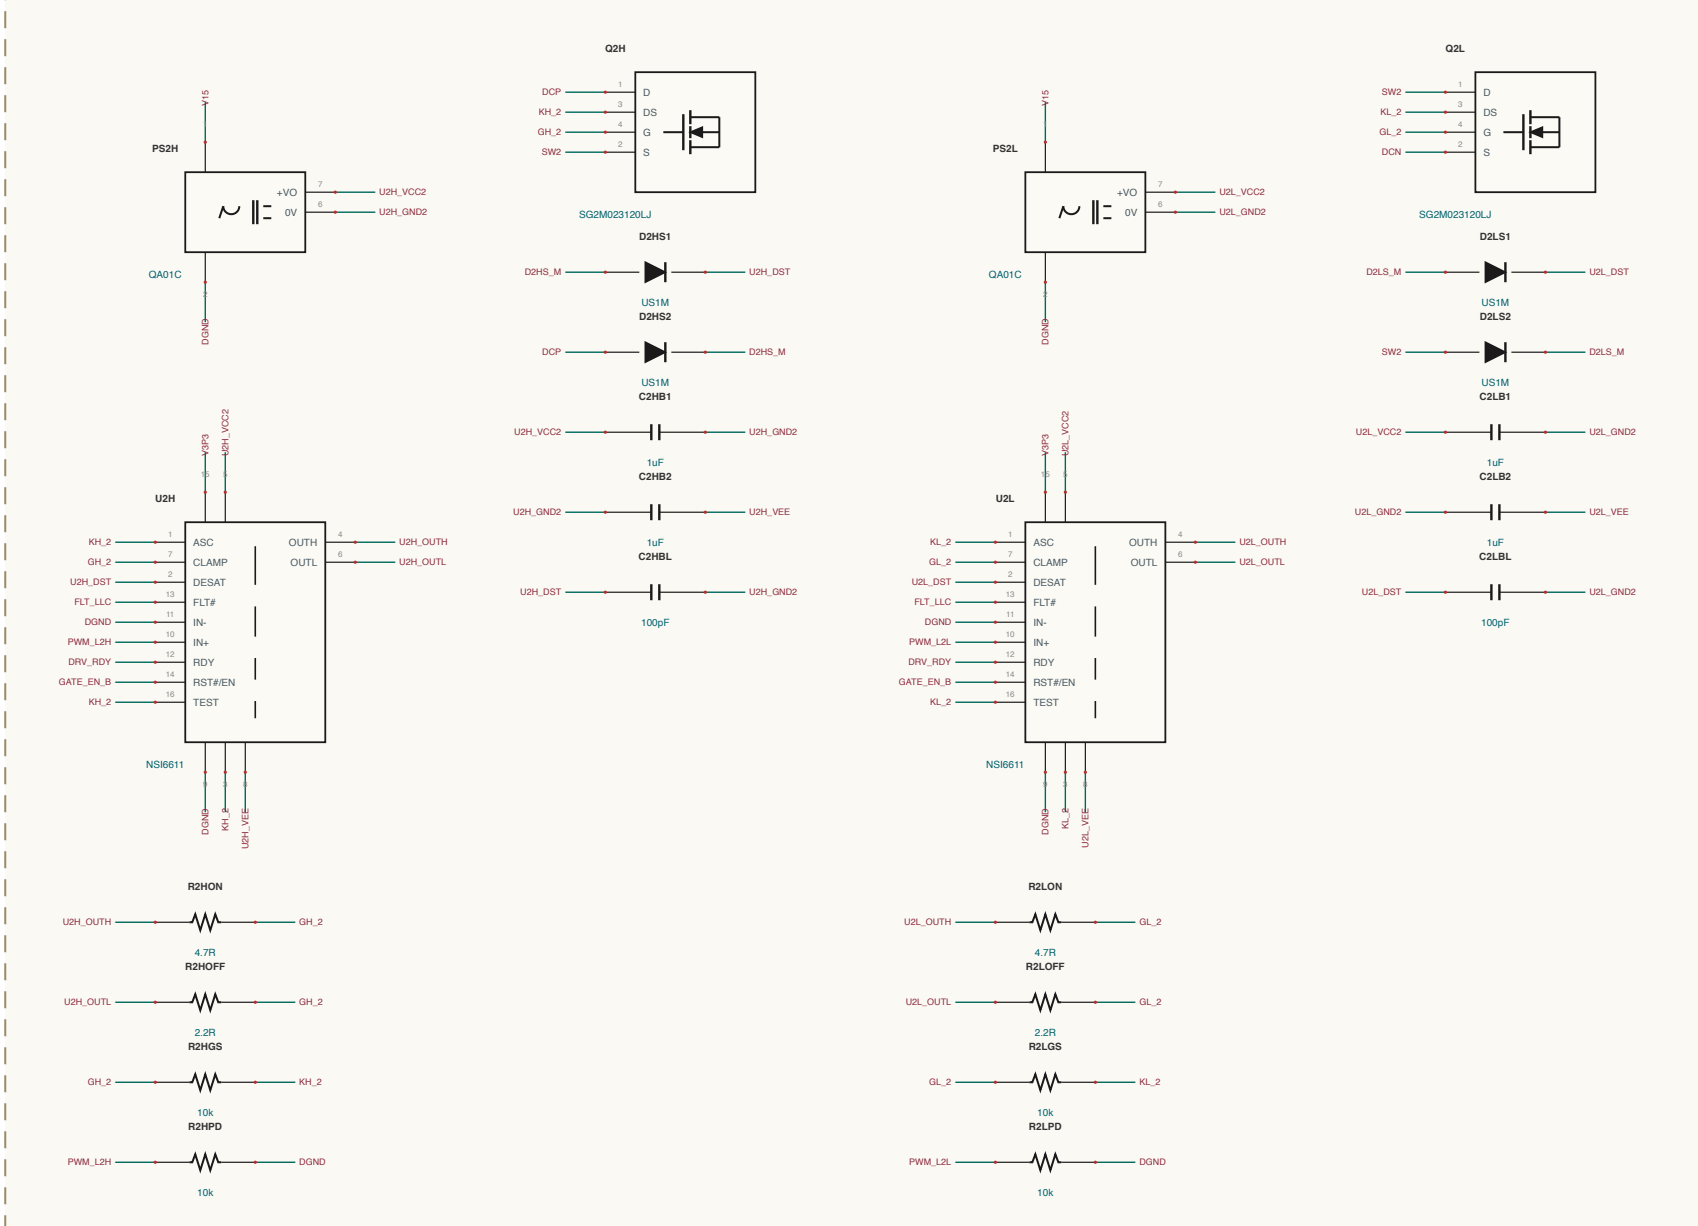

LLC-TANKS / TANK-3

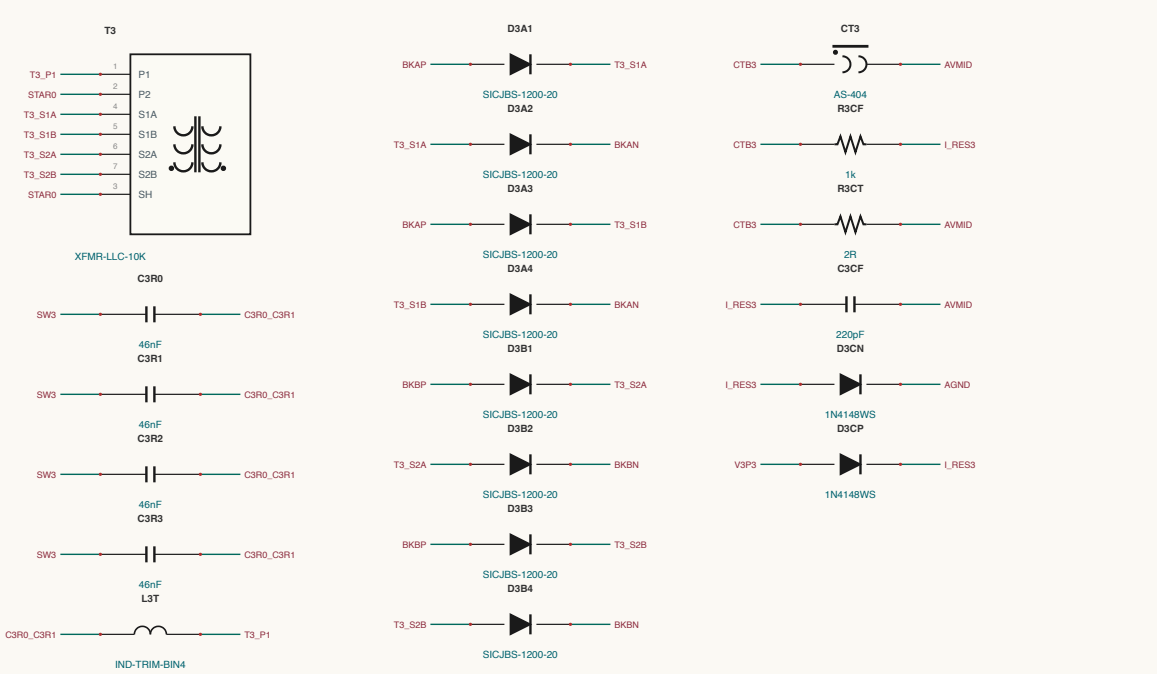

NET NAMING

Internal junctions are named for what they join


Unions: 0Vbus nodes at that IC pin e.g. 0VDCA_0VSP

Resistor: M endpoint of a series pair e.g. RESATA_M


Resistor: series tap between ResistorName e.g. RY102_01

all others are explicit design nets


OUTPUT-SENSING / SENSE-VBKB

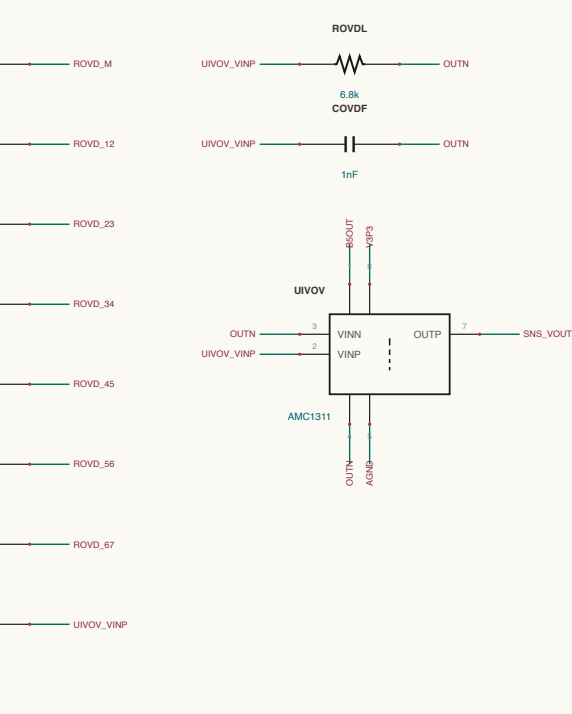


COMMS-HMI / HMI

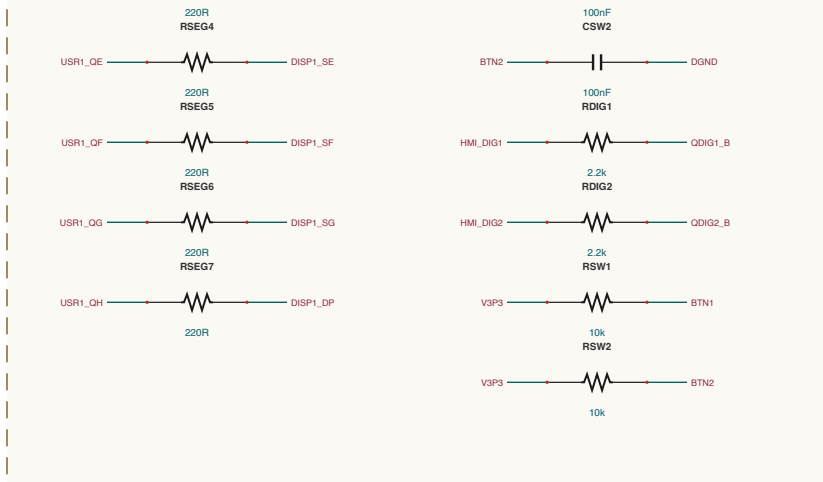


CONTROL / CARD-IF

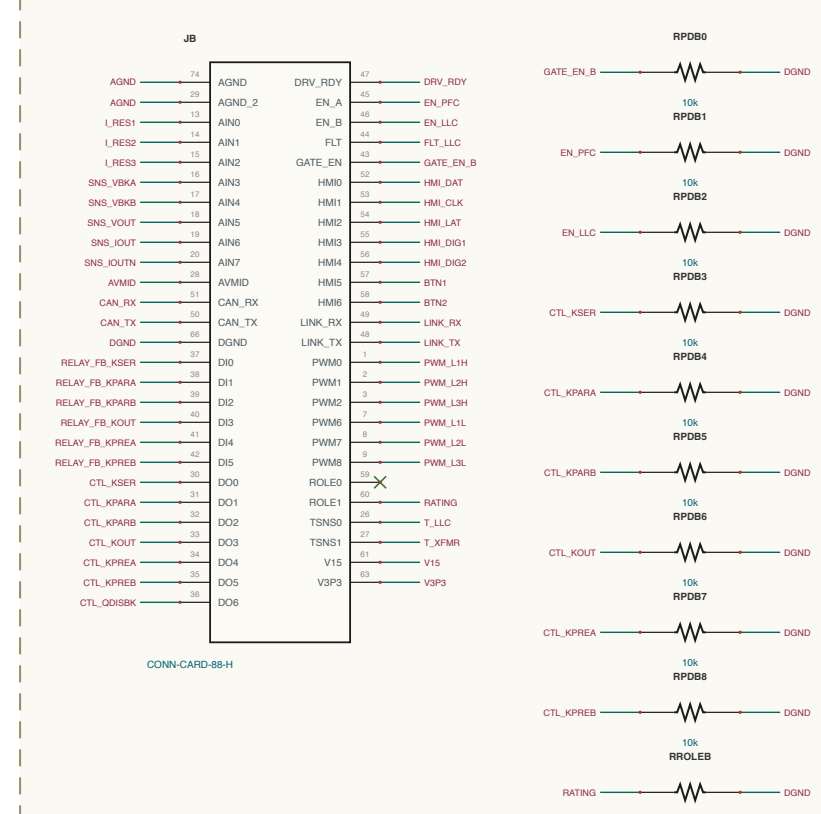

CONTROL / INTERCONNECT

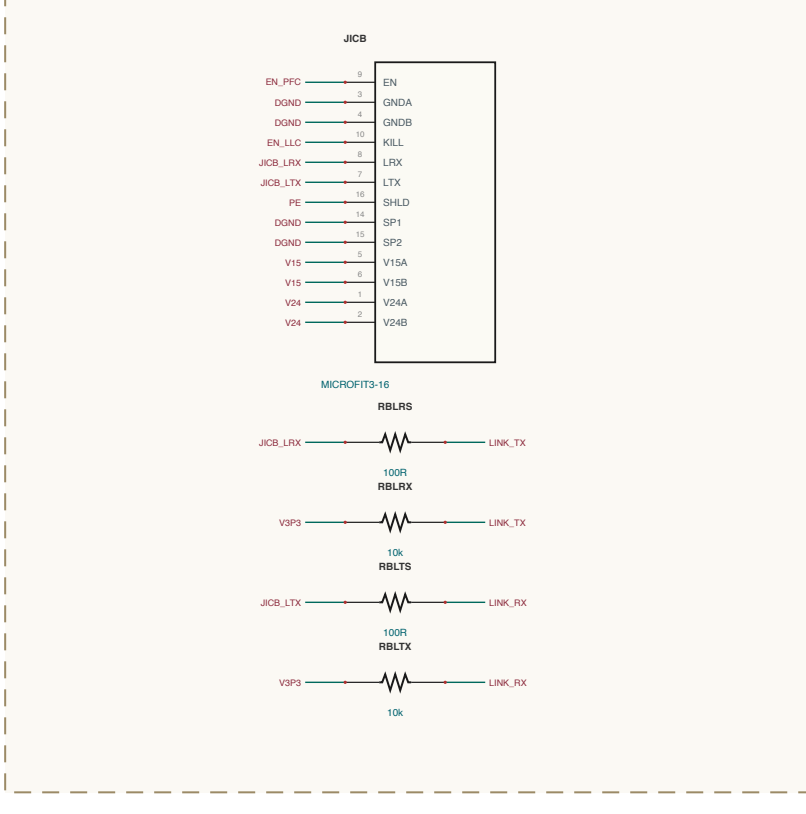

LLC-TANKS / TANK-2

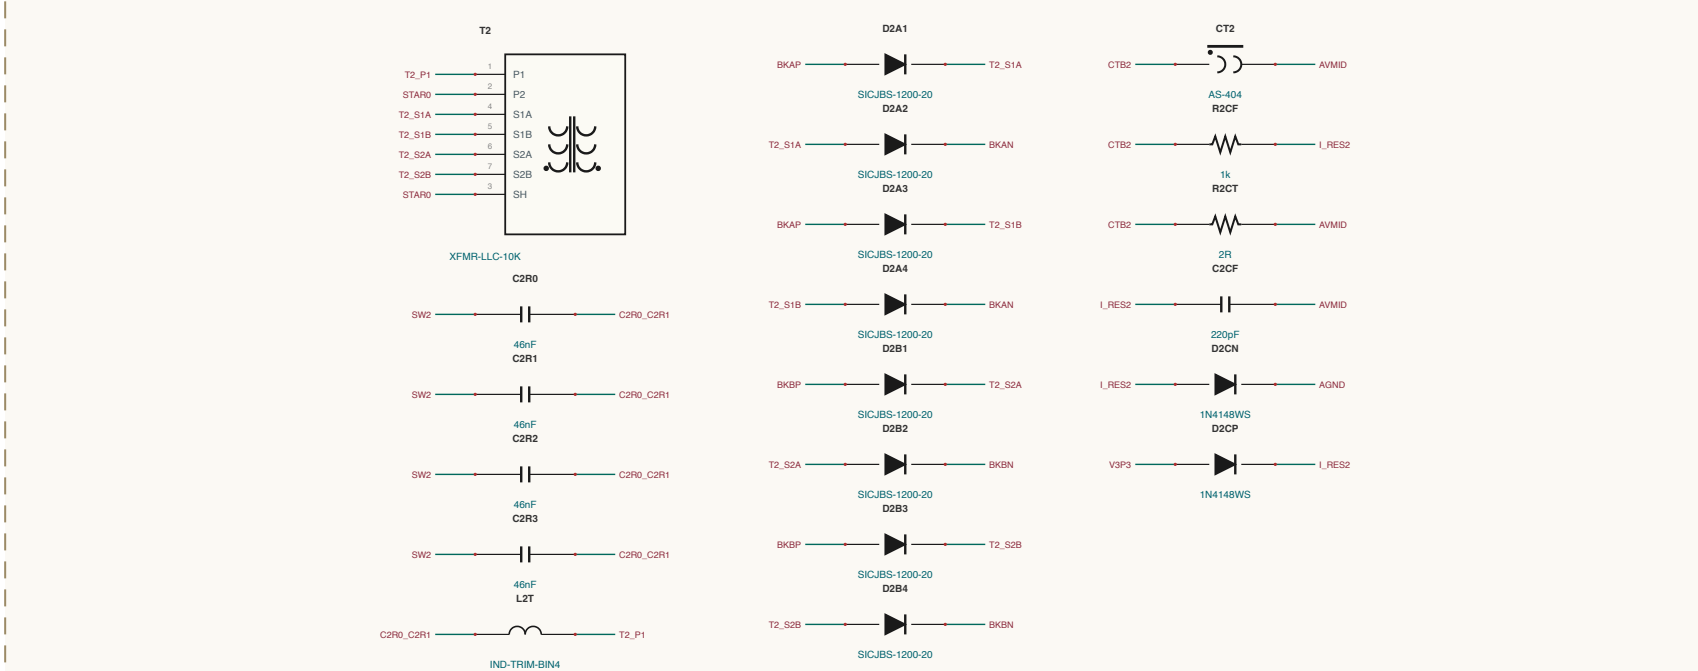

SHEET INDEX

30 kW DC-DC board (3-phase LLC)

OUTPUT-SENSING: 6 sections

BANKS-SP: 4 sections

LLC-LEG5: 4 sections

CONTROL: 3 sections

LLC-TANKS: 3 sections

COMMS-HMI: 2 sections

See D-3: 82 sections: 182 components