
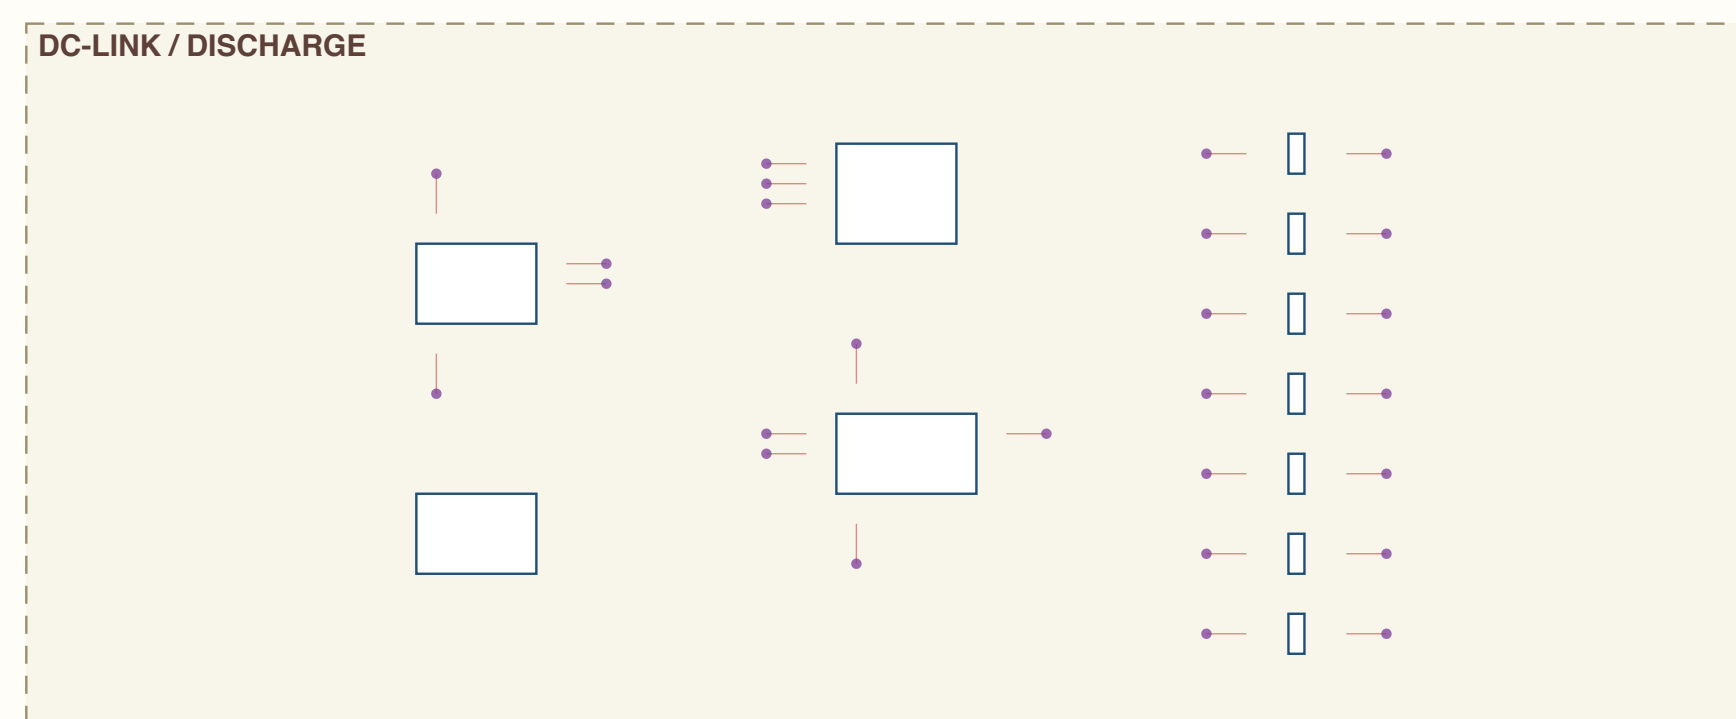
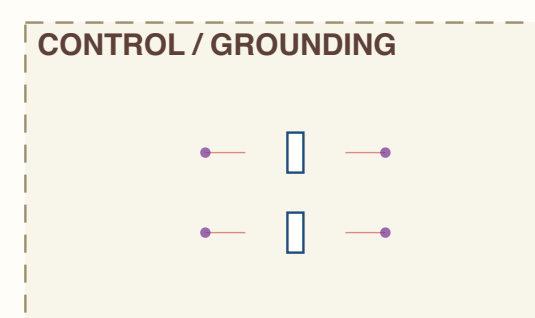
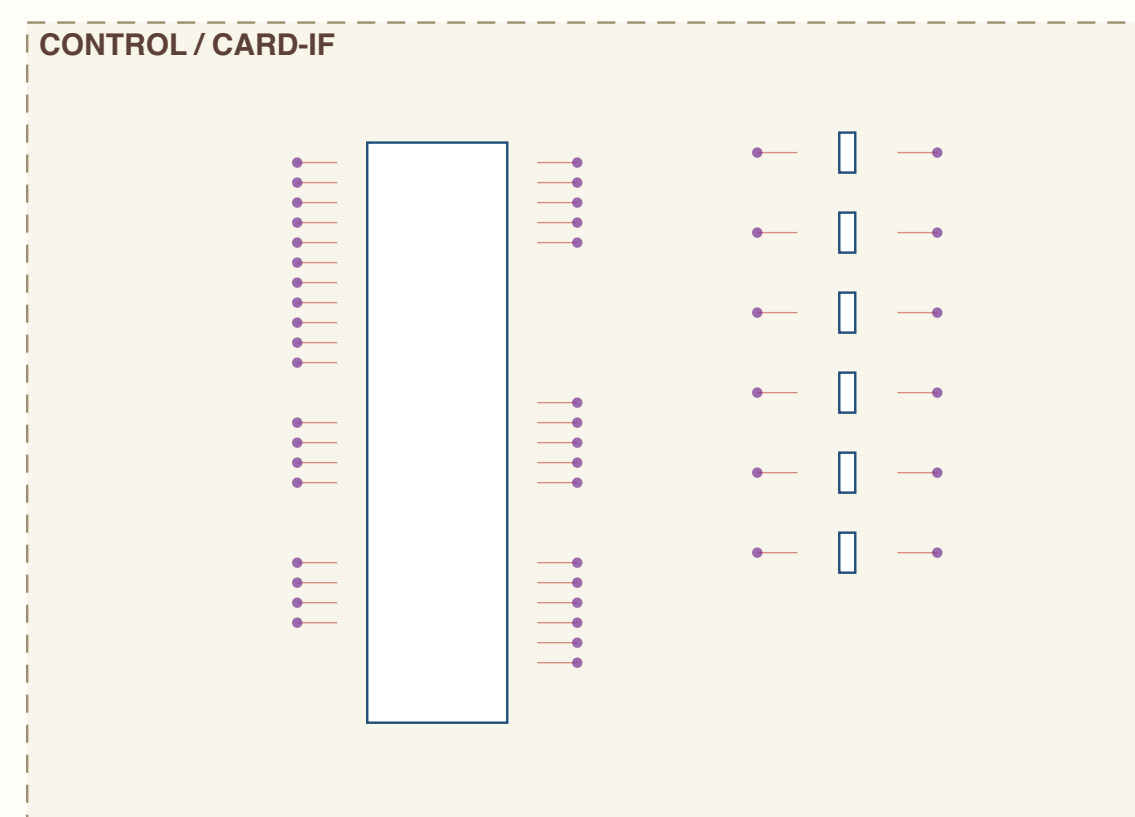
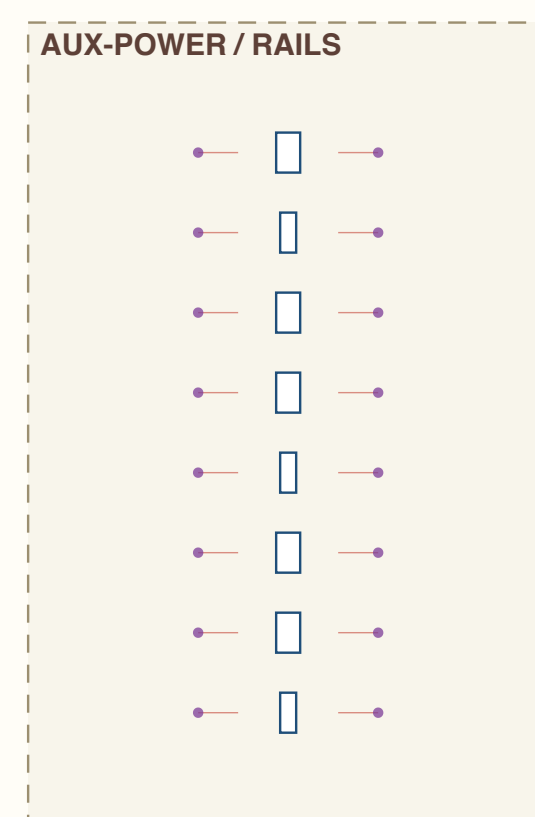
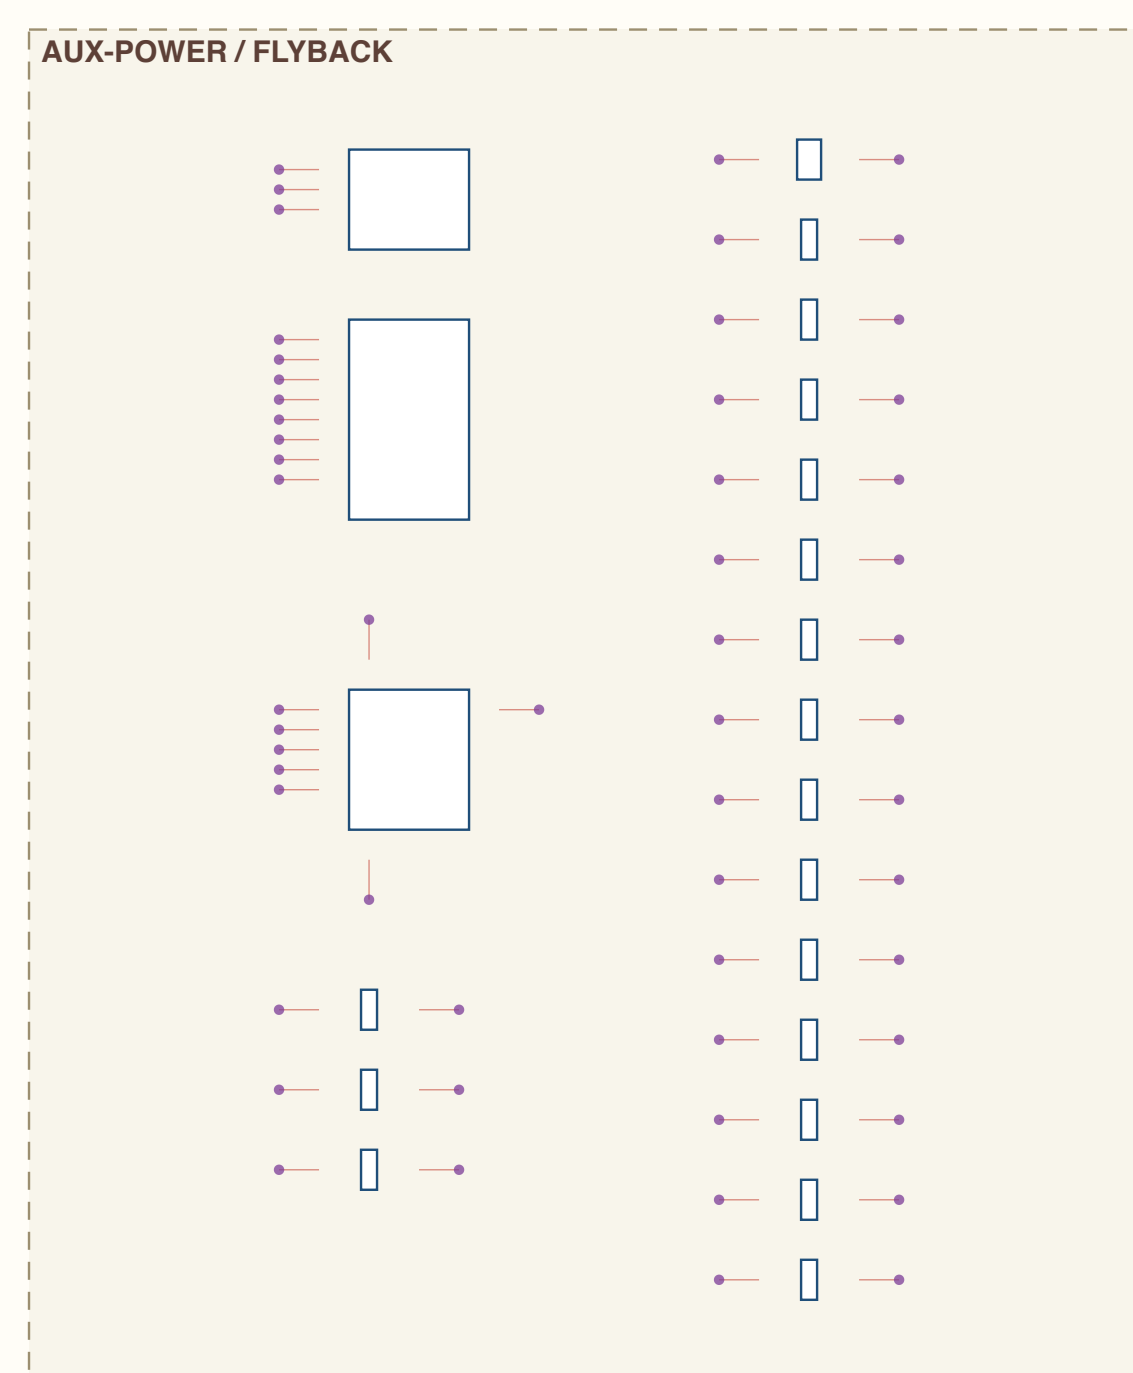
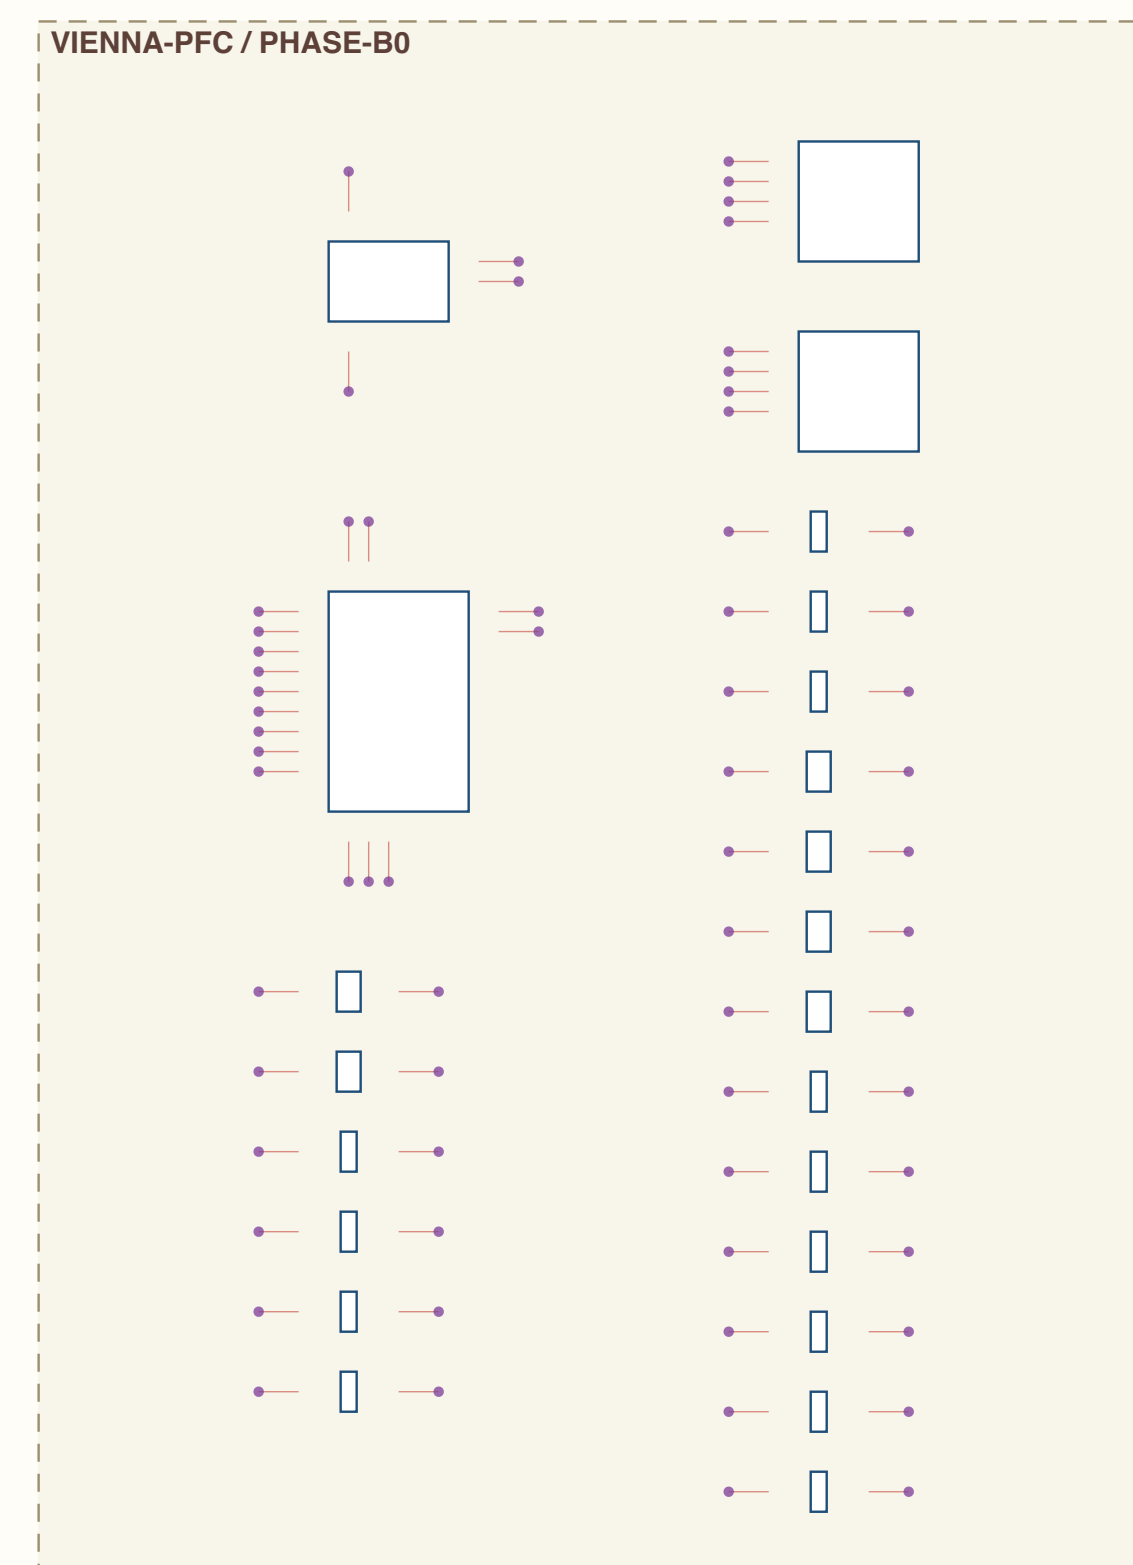
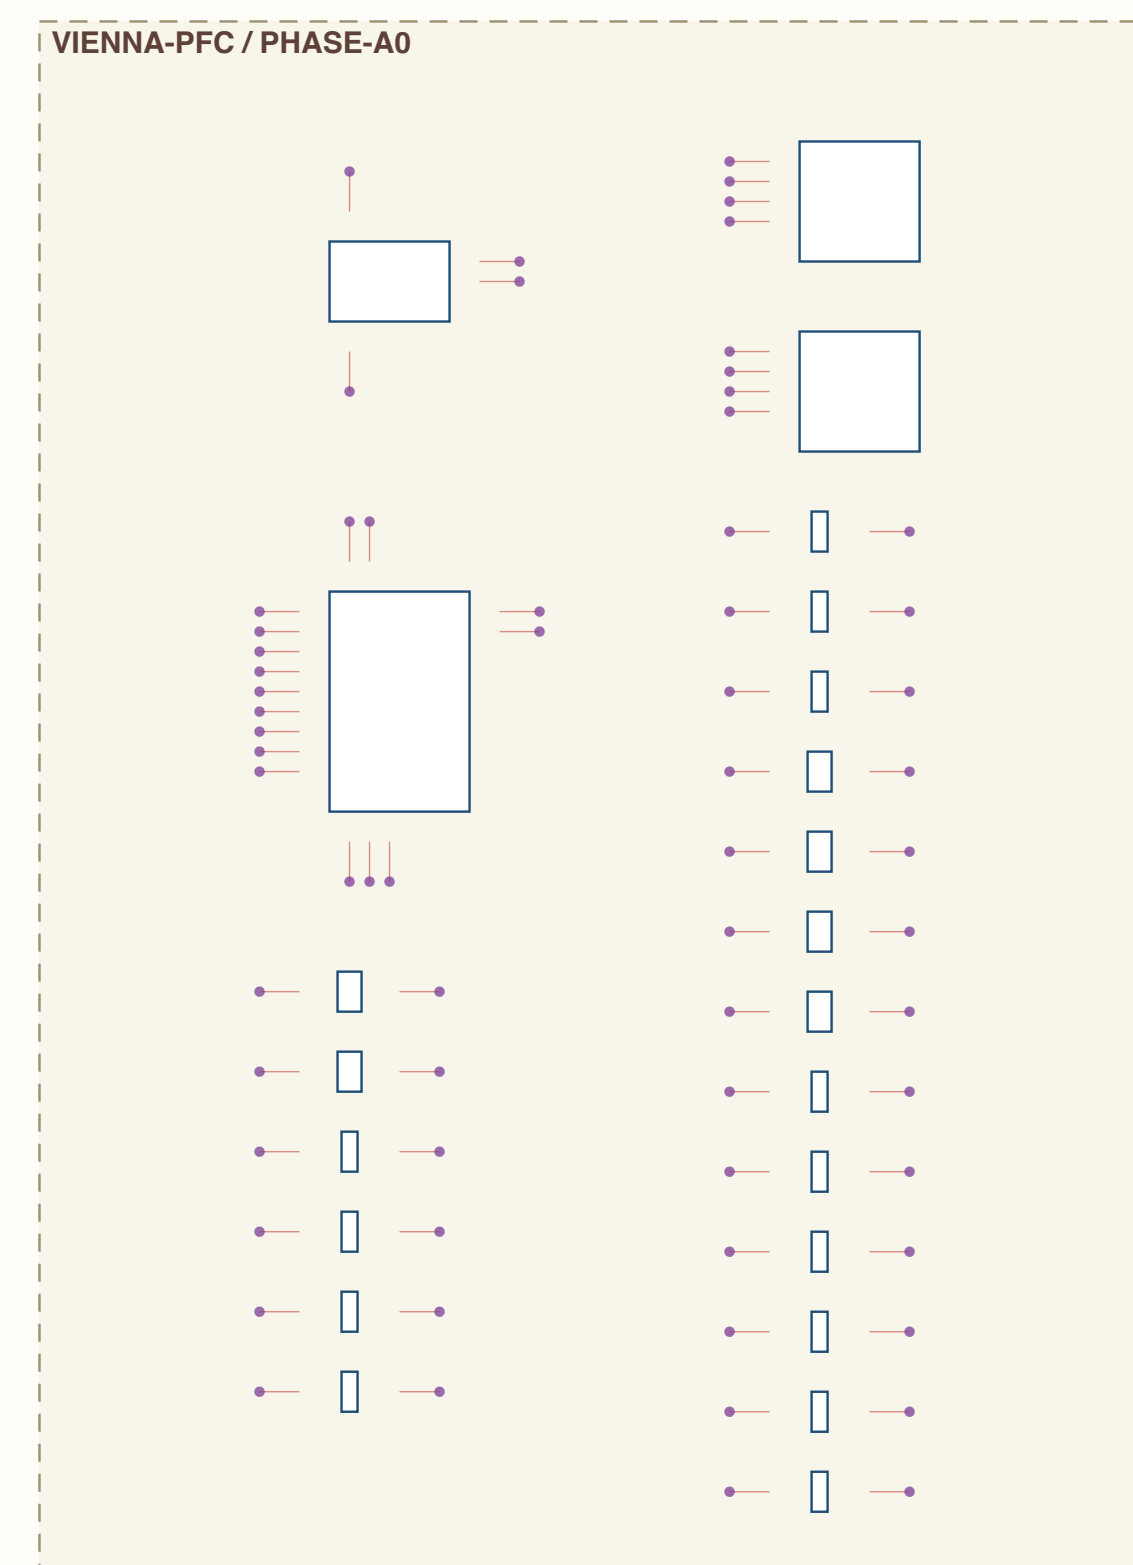
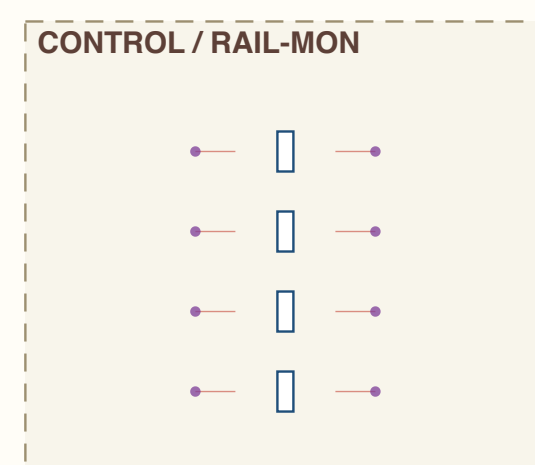
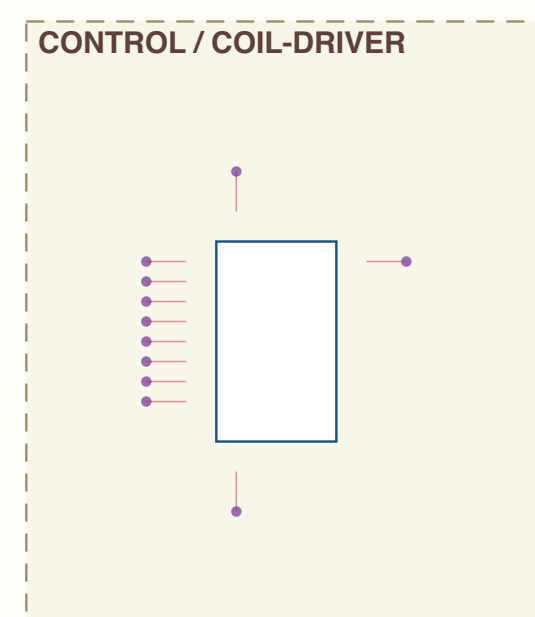
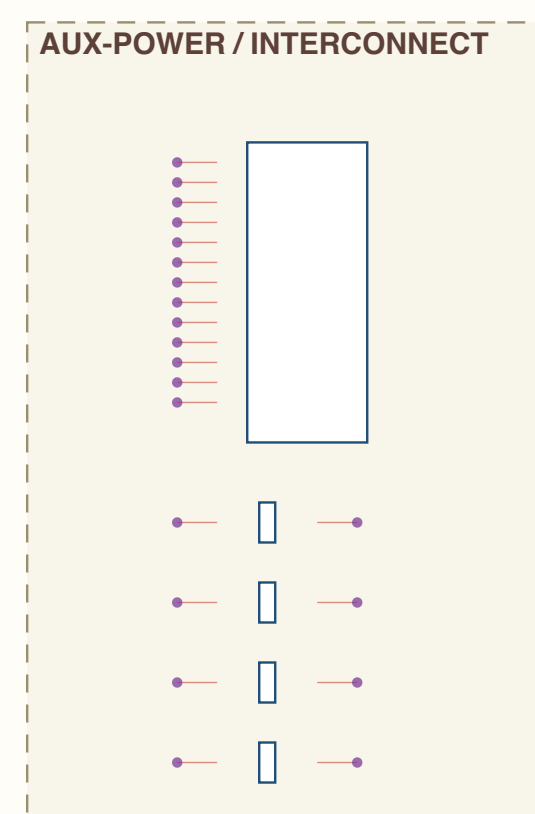
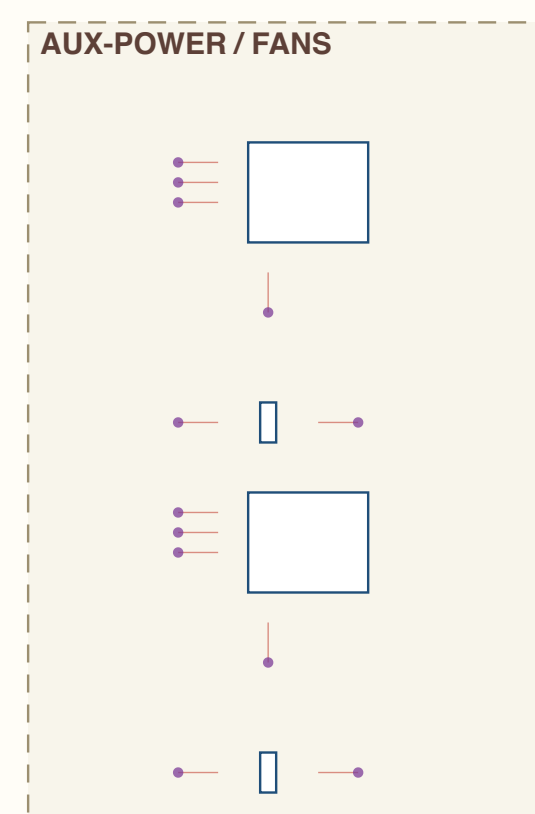
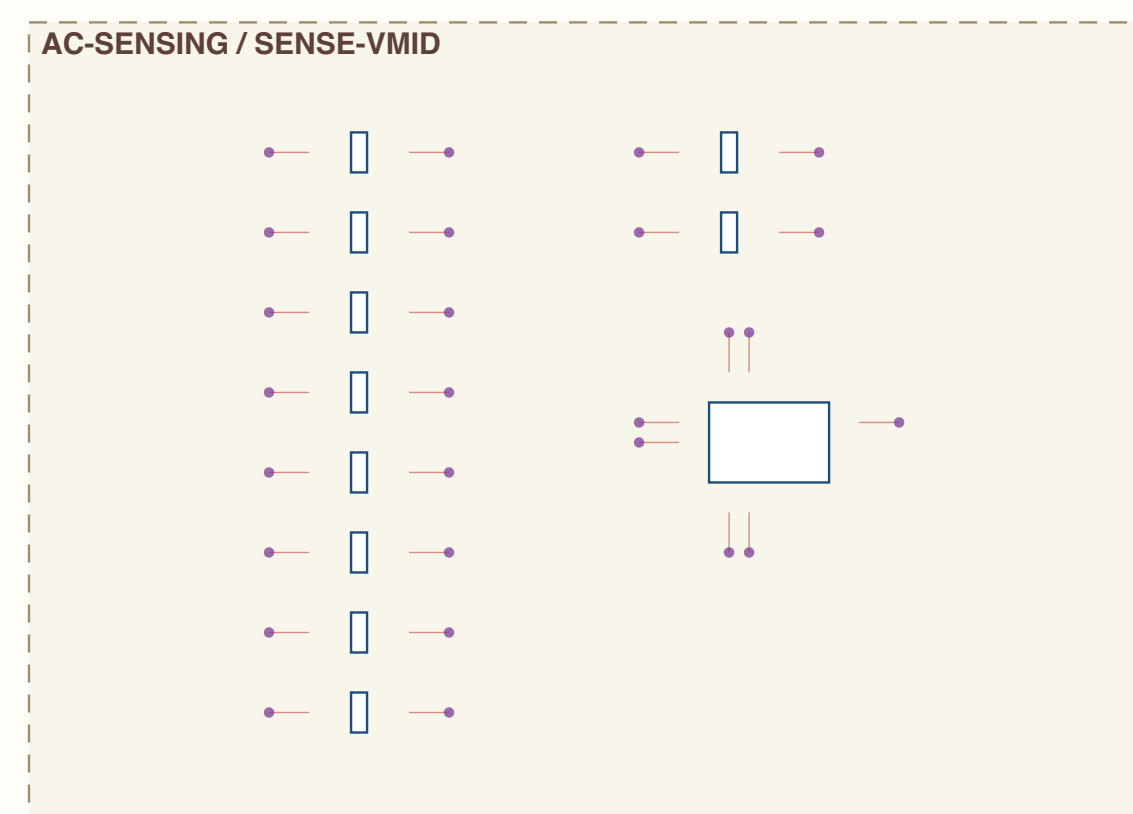
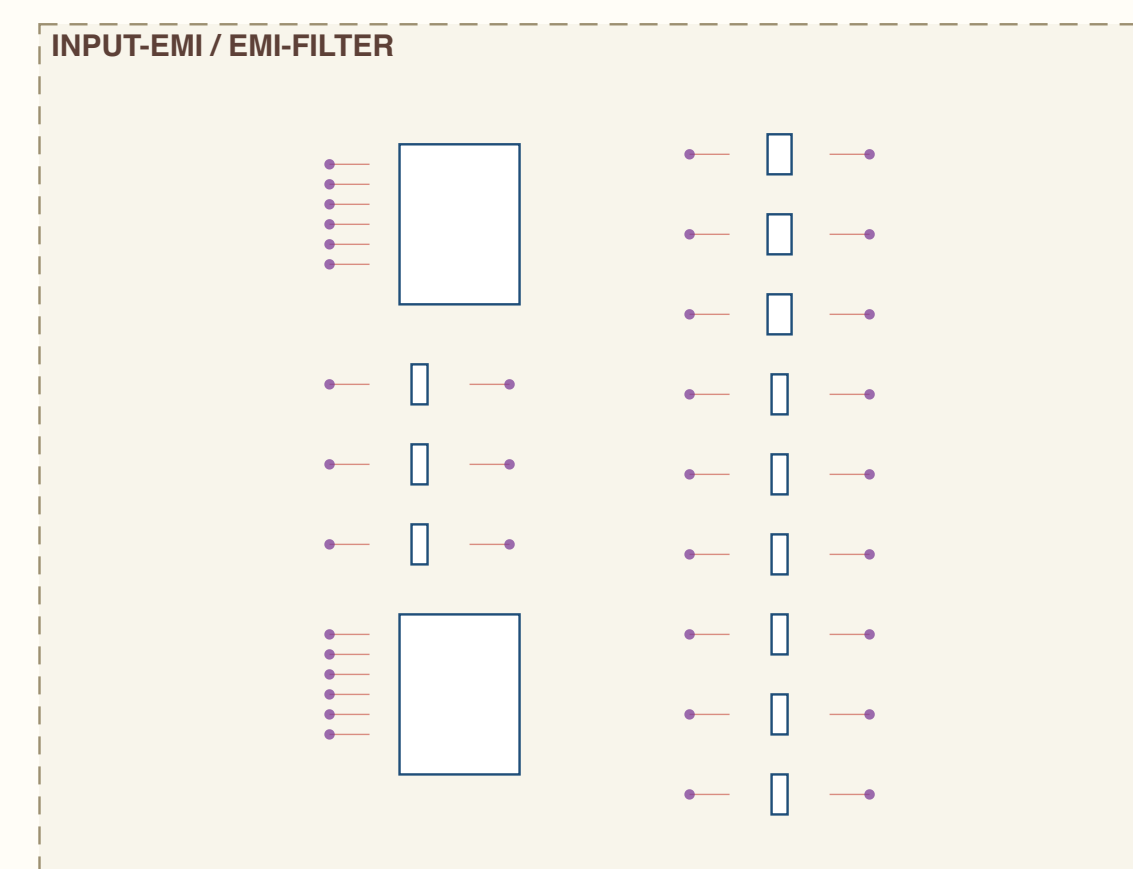
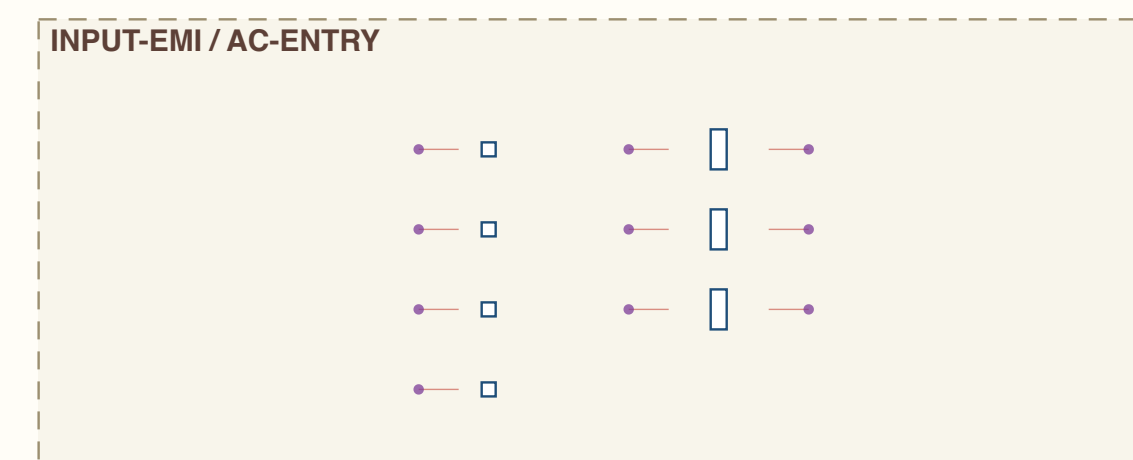
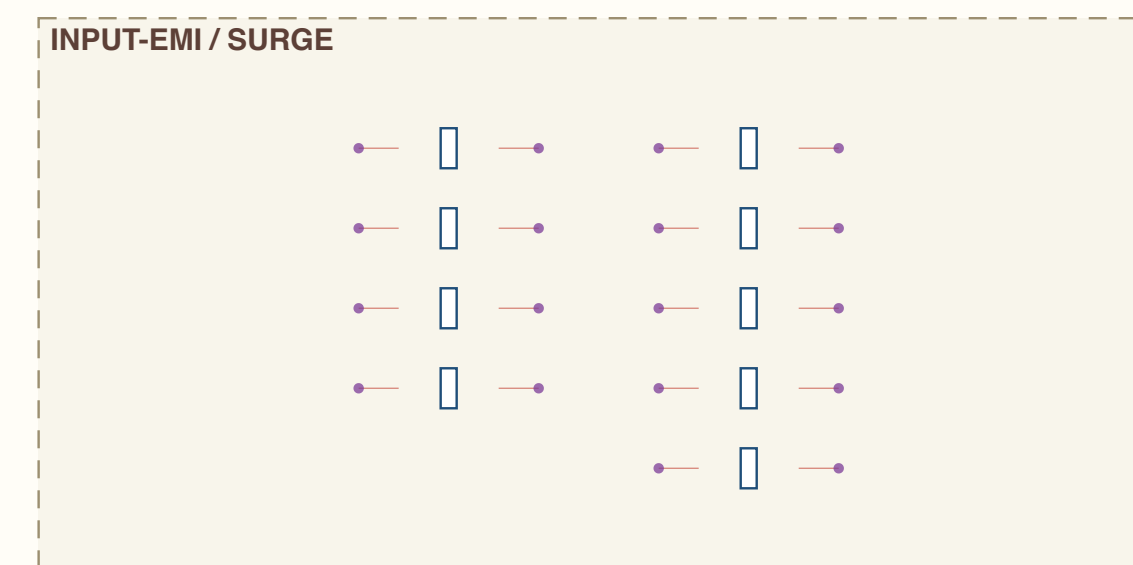
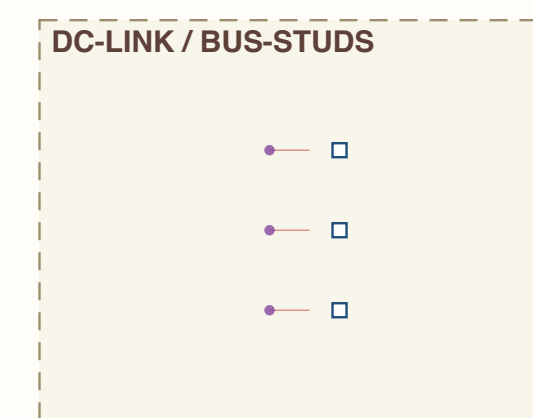
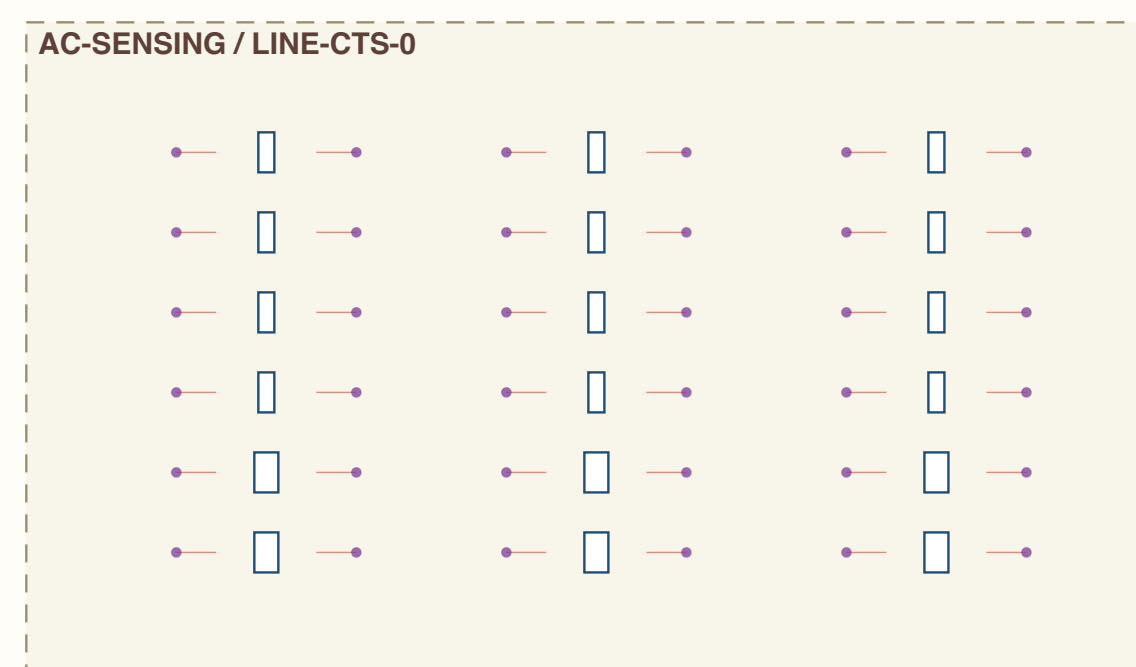
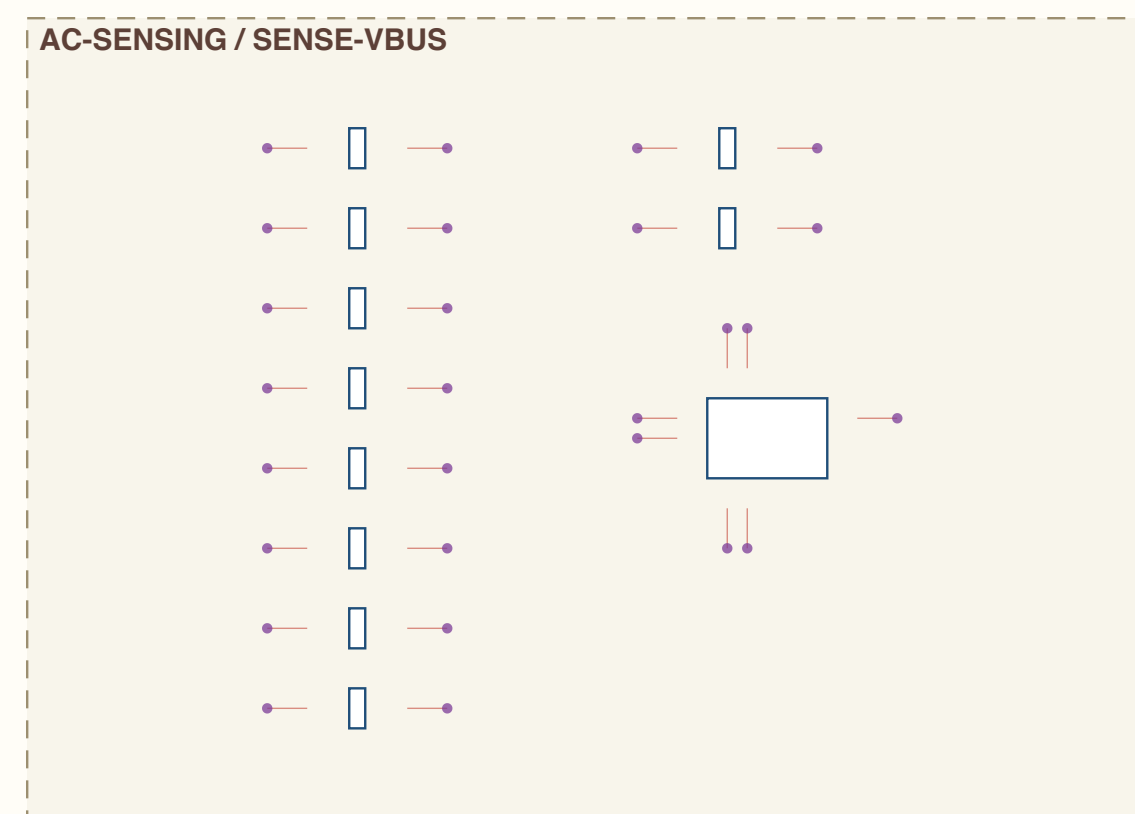
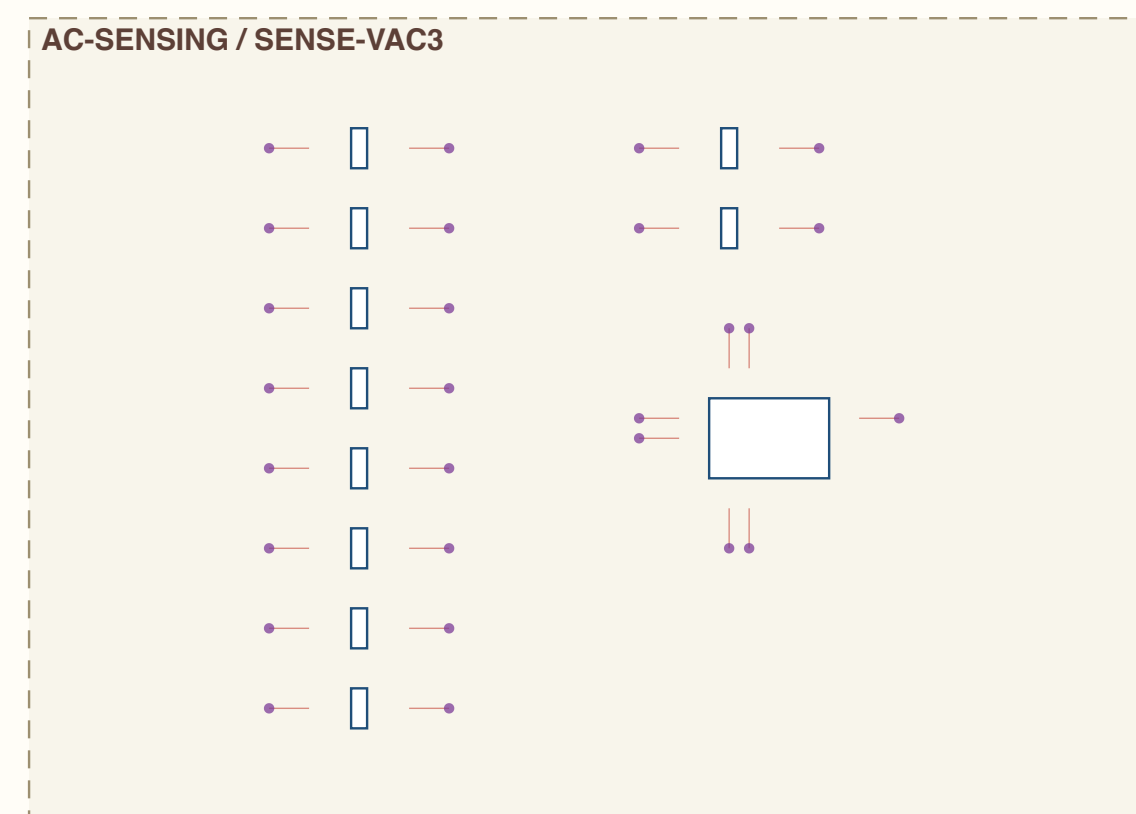
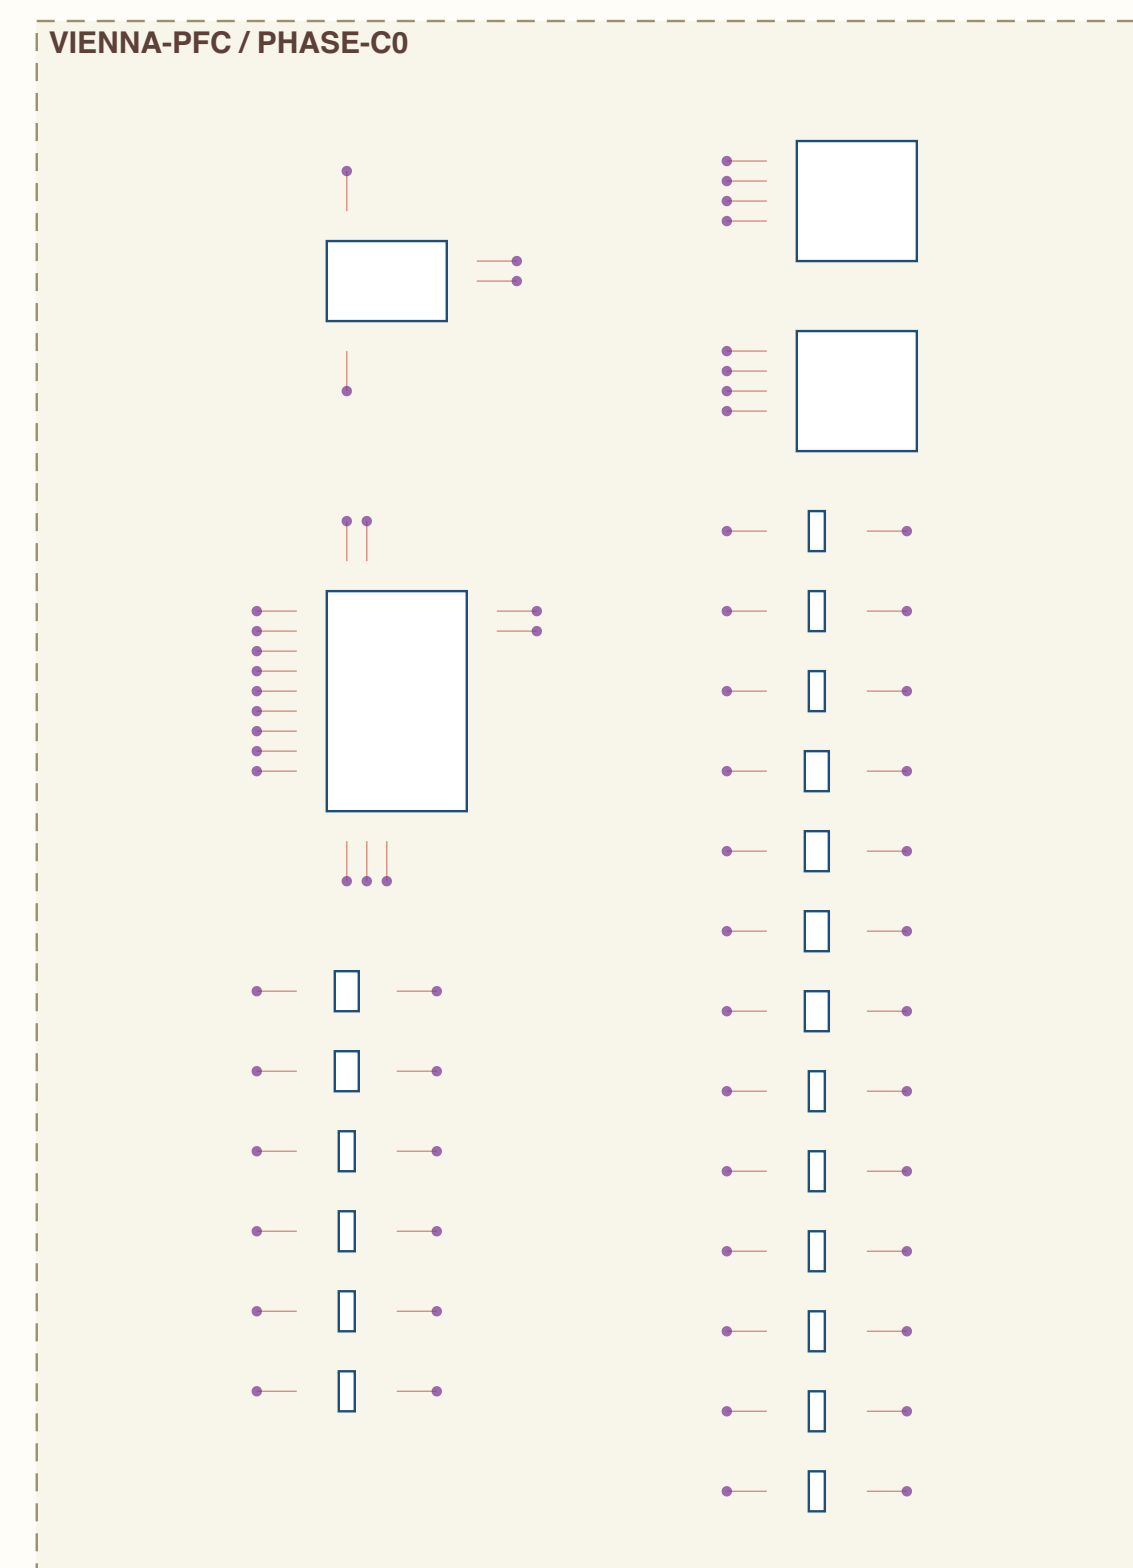
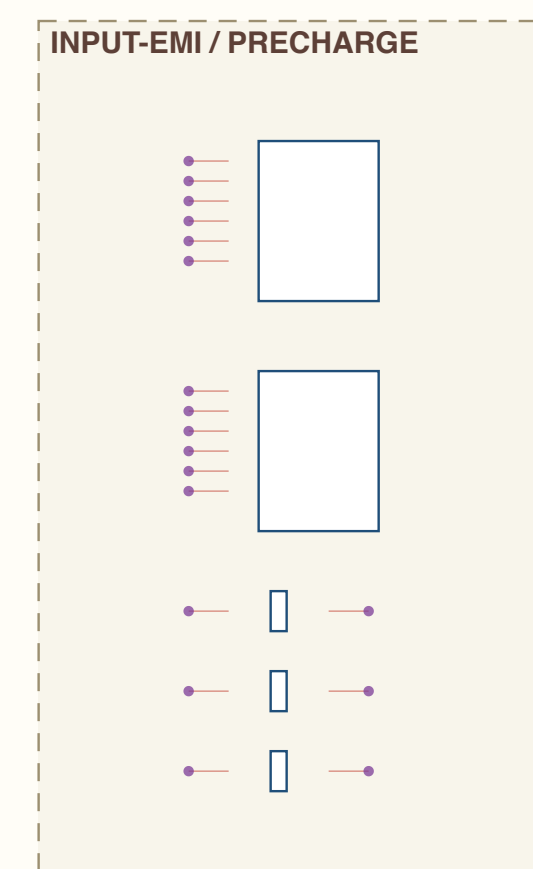
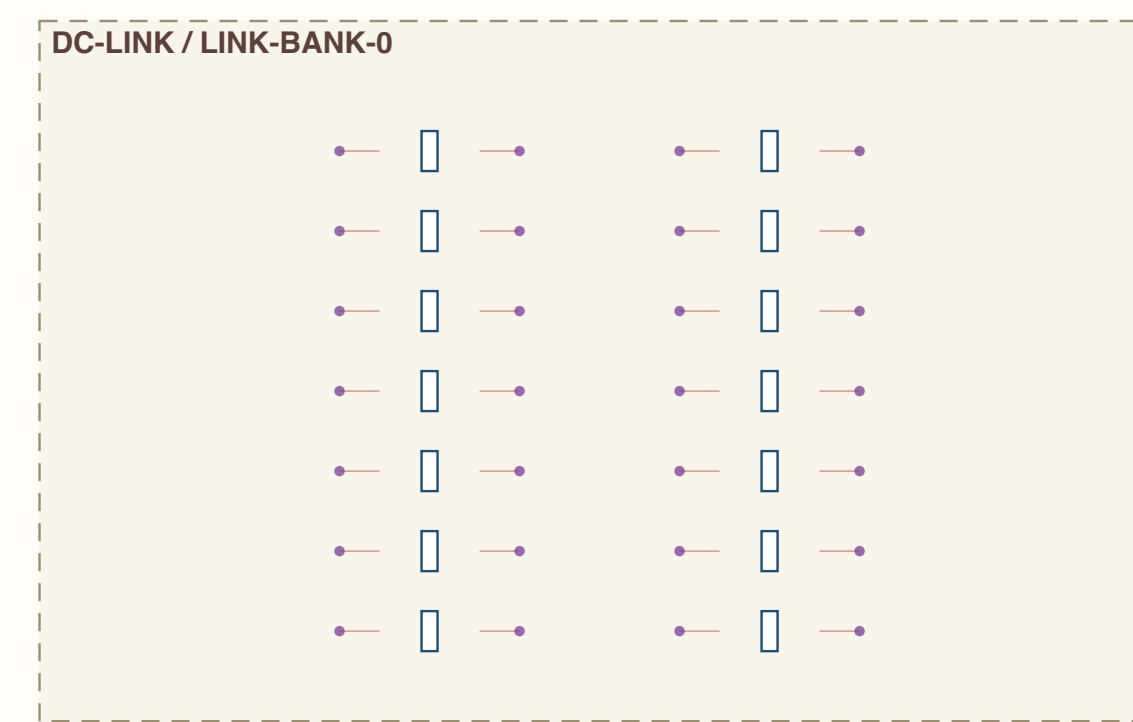
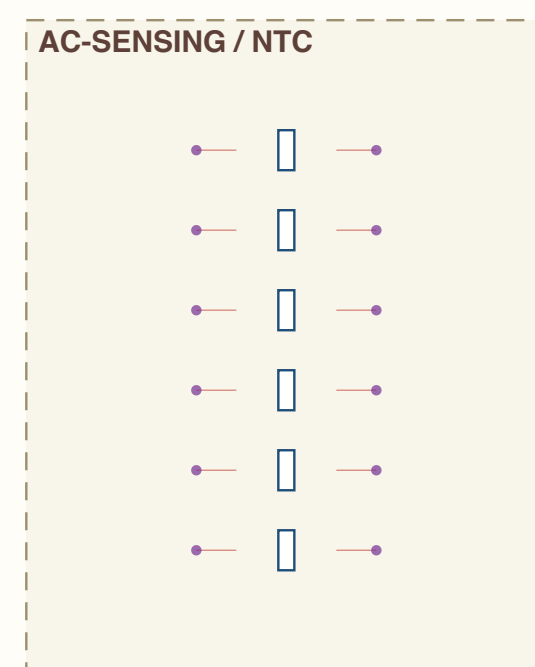
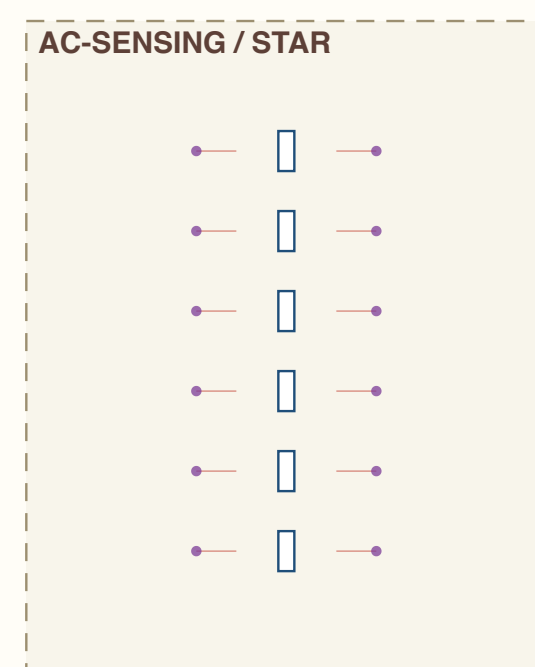
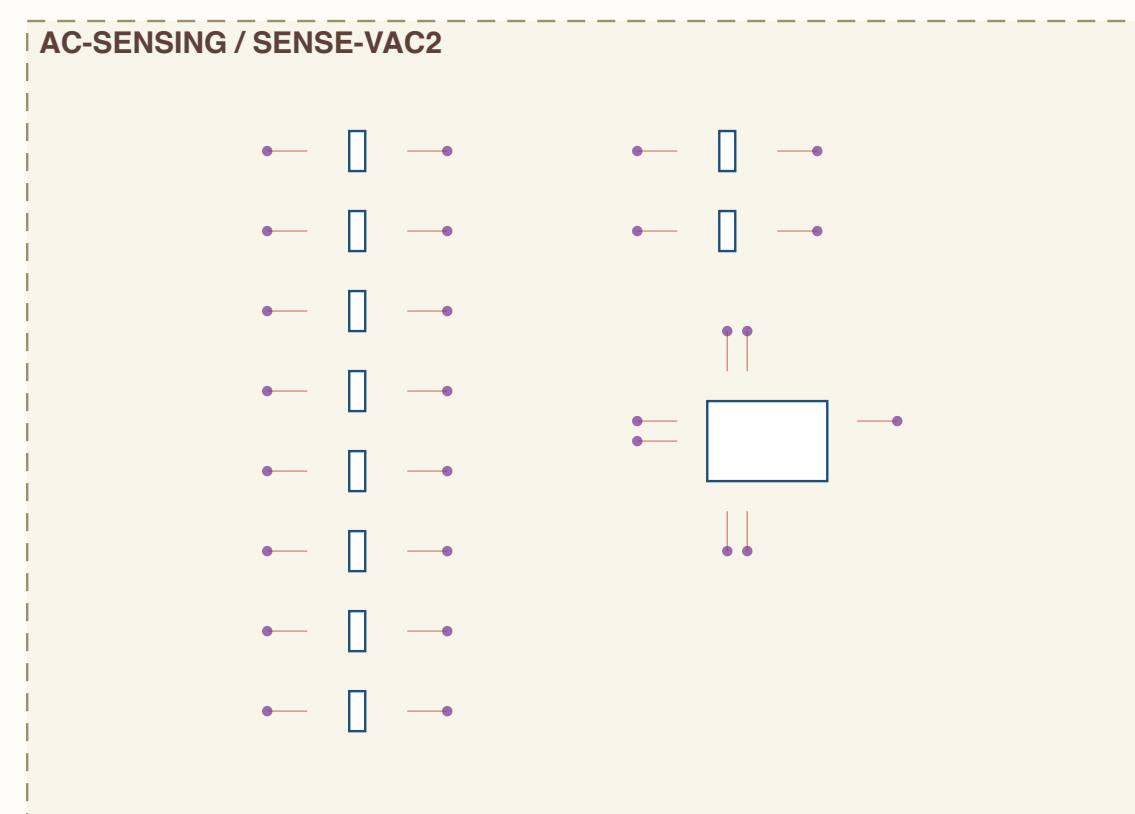
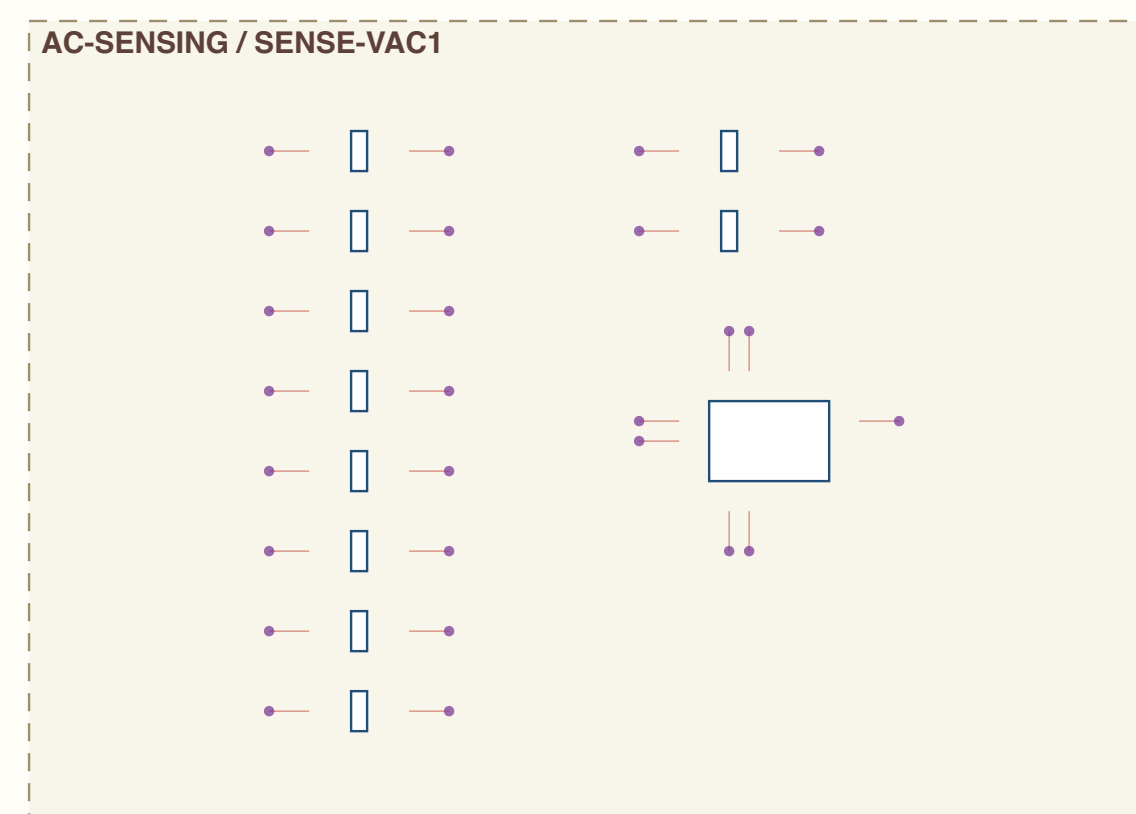


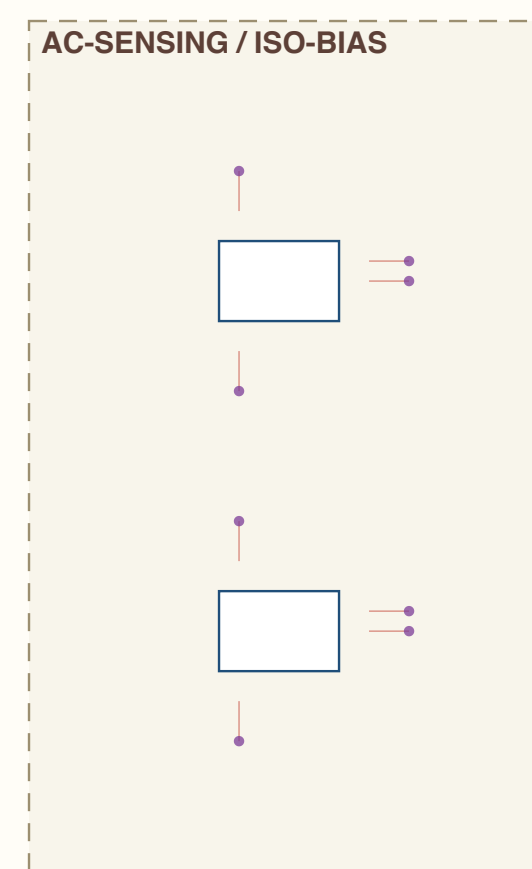

**SHEET INDEX**

30 kW AC-DC (lower) - 1 of 3

AC-SENSING - 9 sections

AUX-POWER - 4 sections

CONTROL - 4 sections

INPUT-EMI - 4 sections

DC-LINK - 3 sections

VIENNA-PFC - 3 sections

rev D.3 - 27 sections - 271 components

## NET NAMING

internal junctions are named for what they join

U<ref>\_<PIN> node at that IC pin e.g. UIVOA\_VINP

R<stem>\_M midpoint of a series pair e.g. RBALTA\_M

R<stem>\_<nm> tap between R<stem>/n/m e.g. RV1D\_01

all others are explicit design nets