


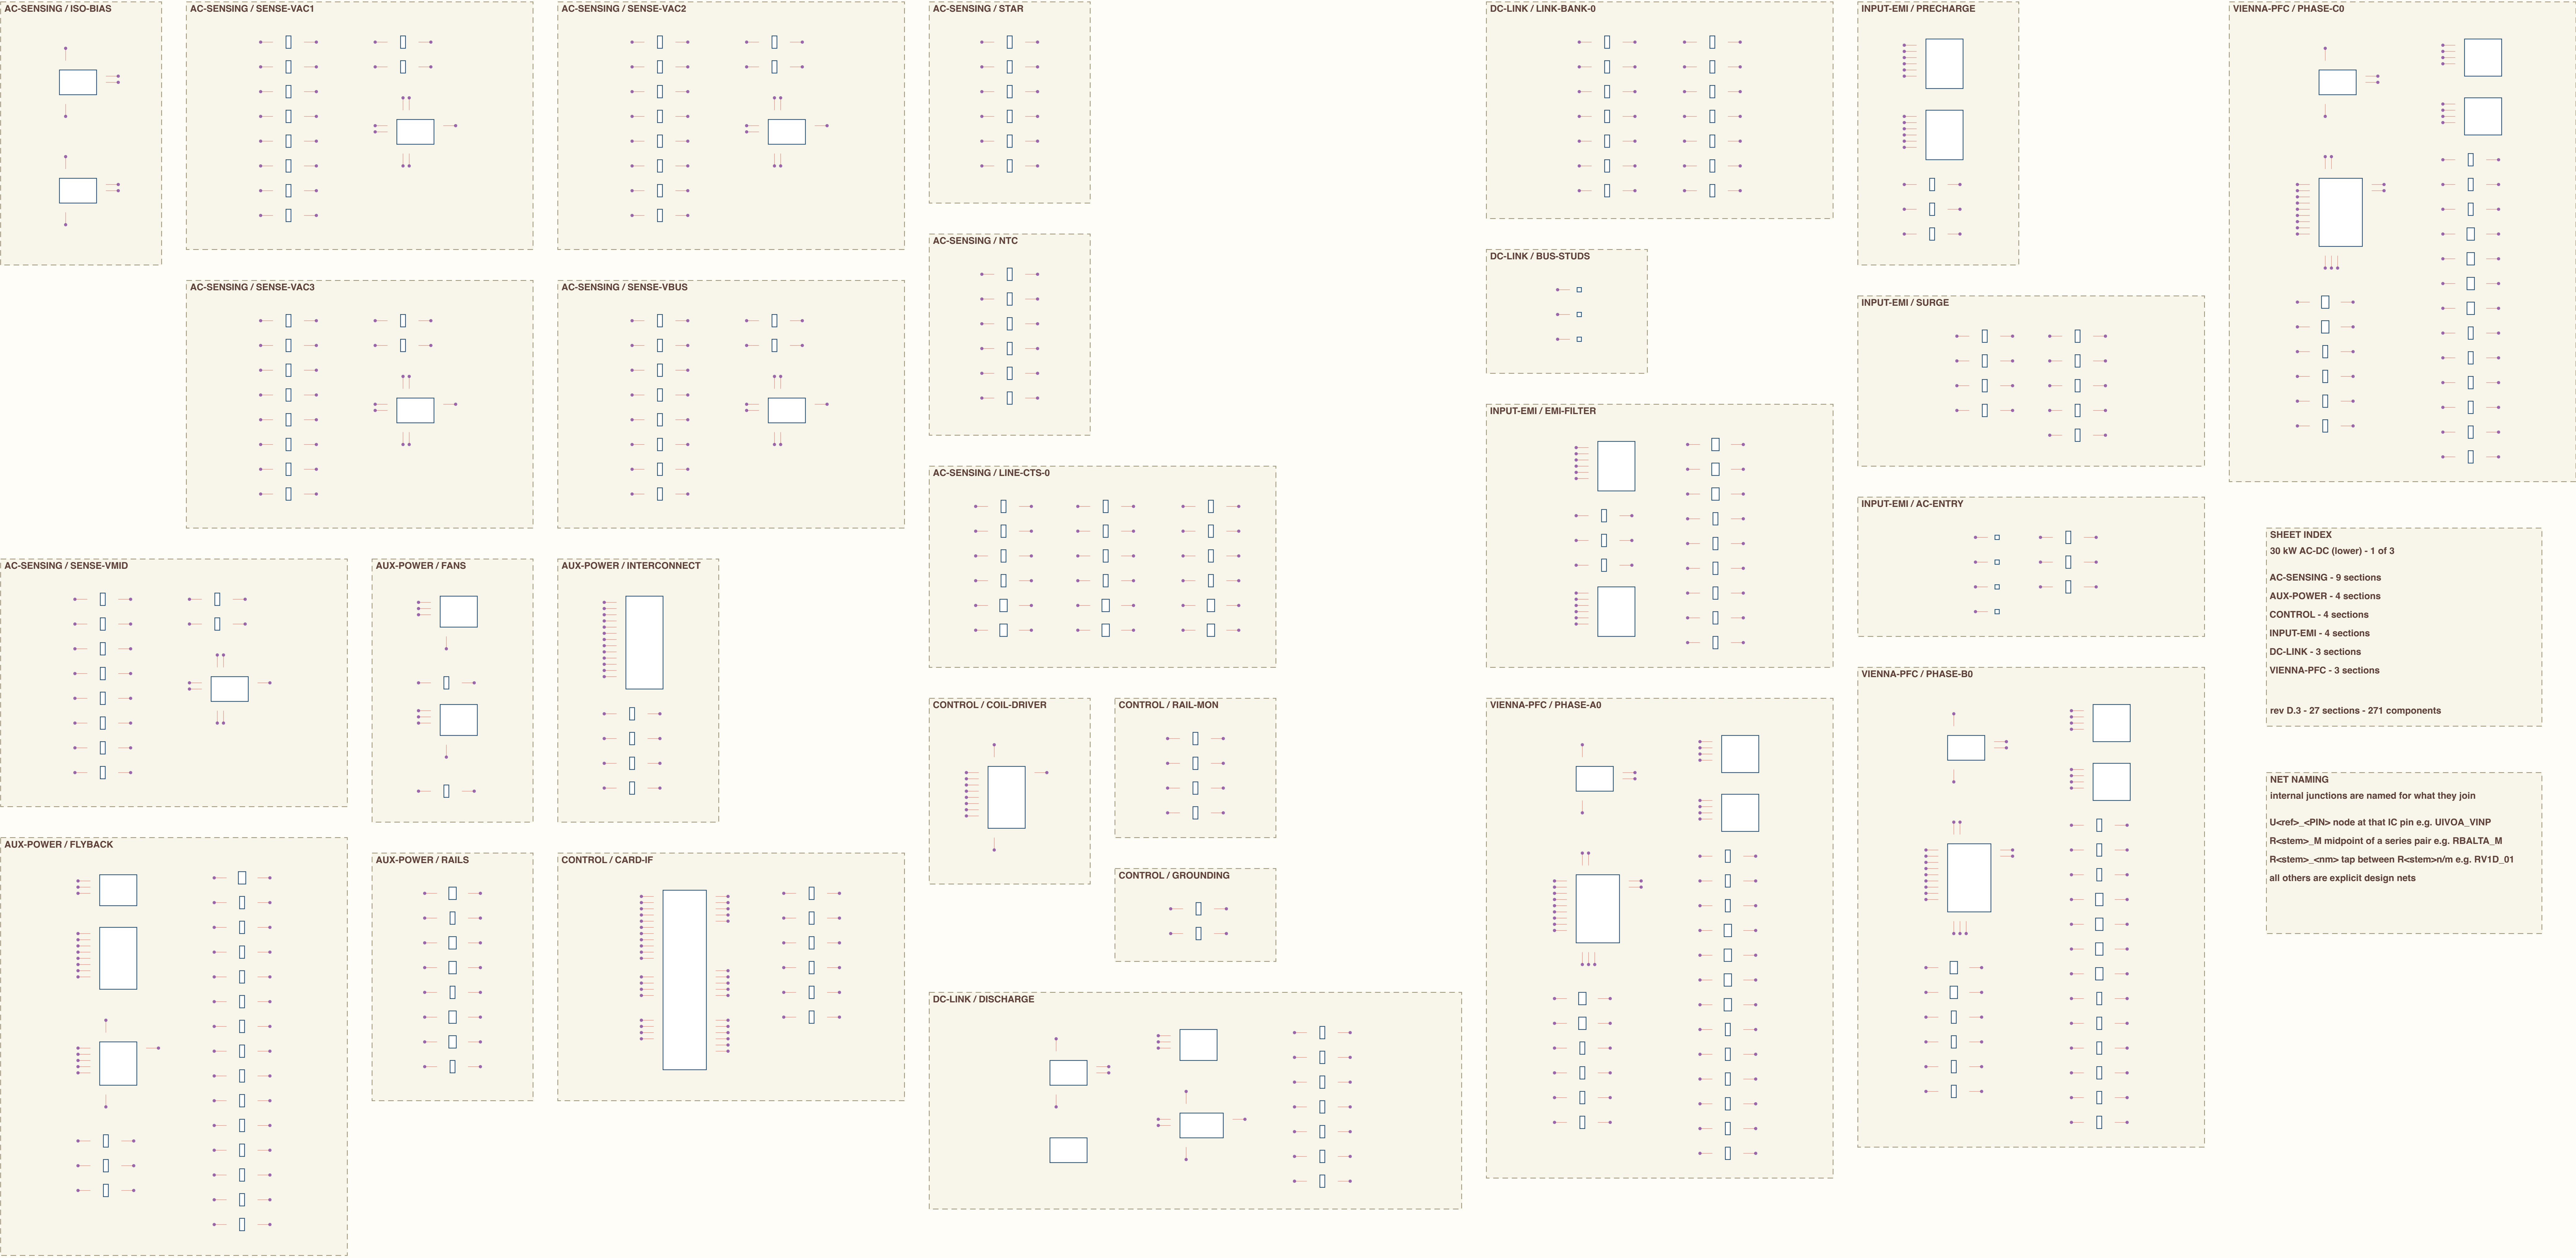
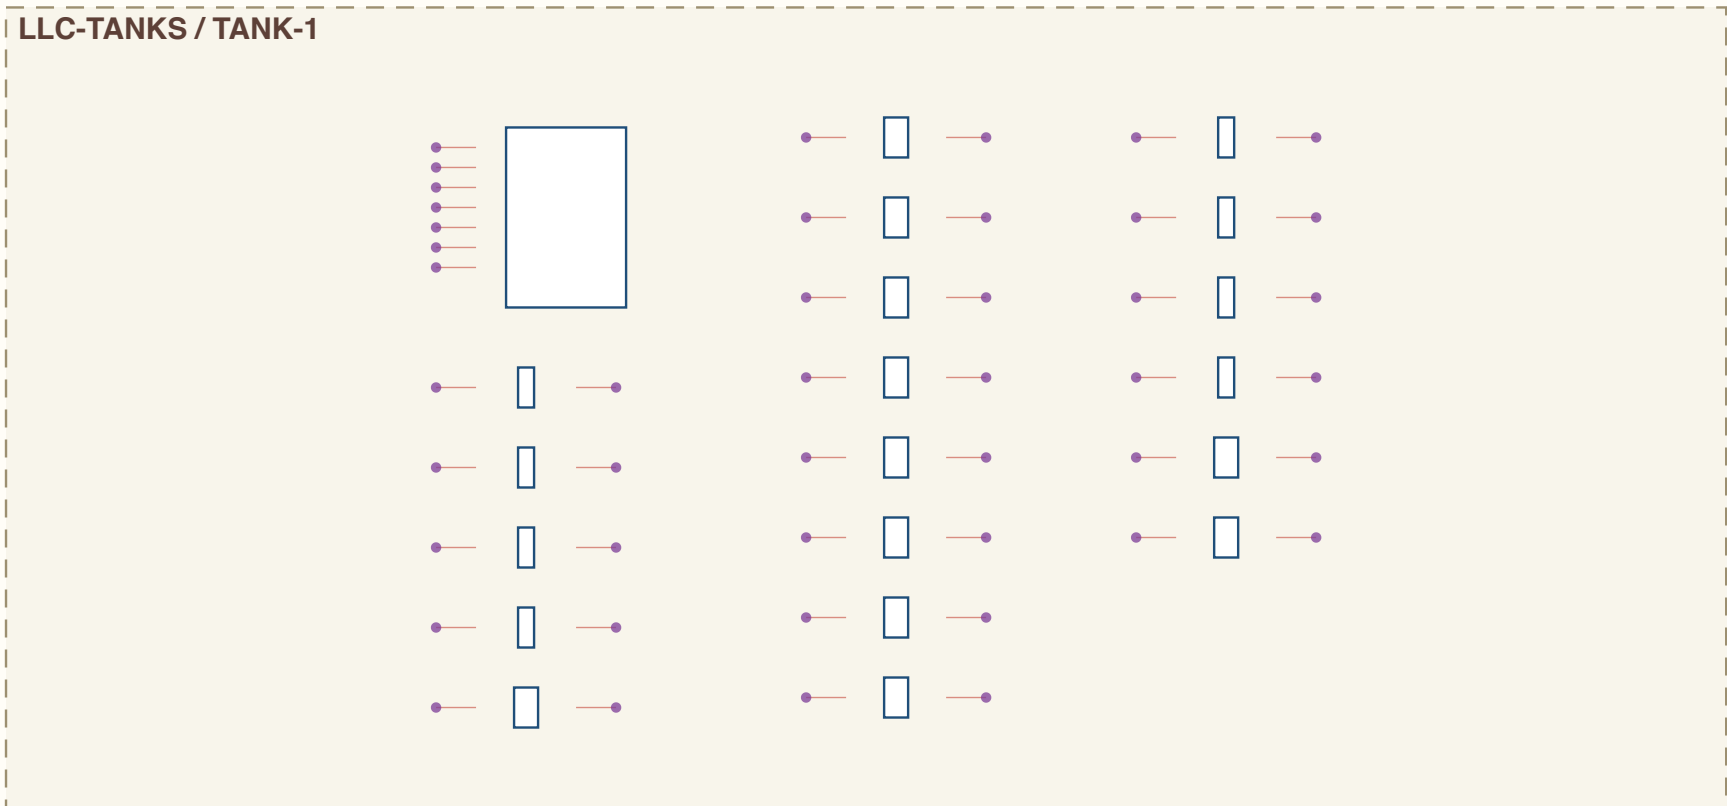
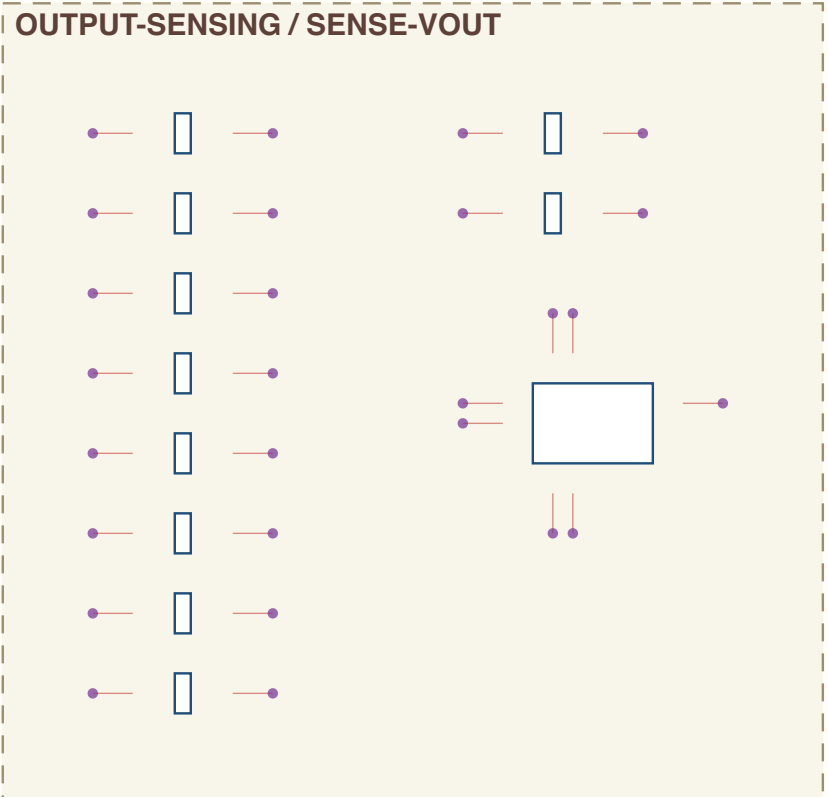
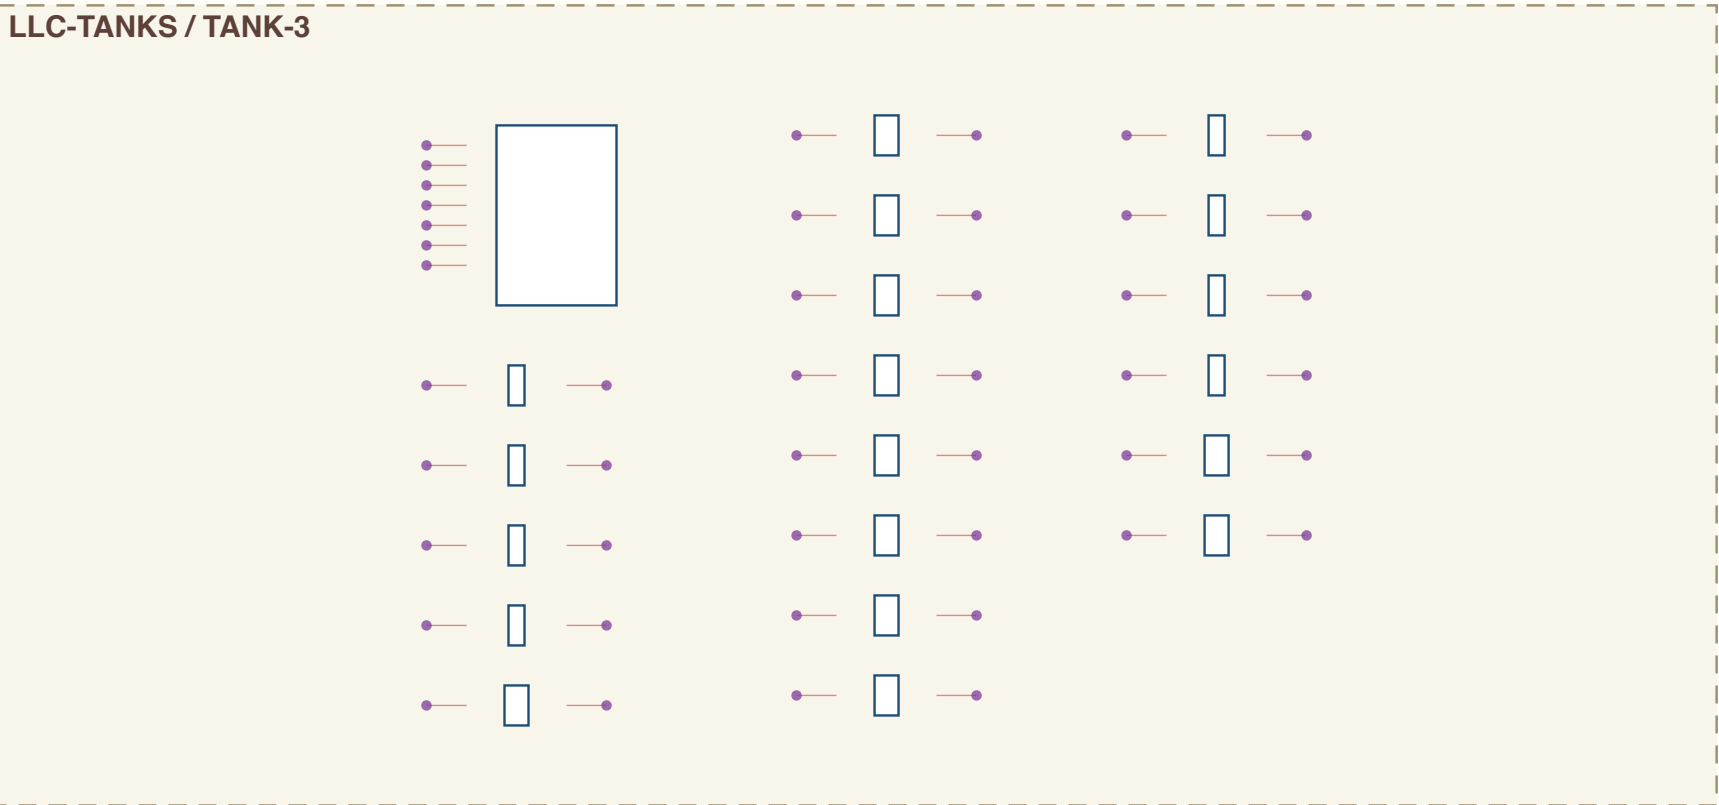
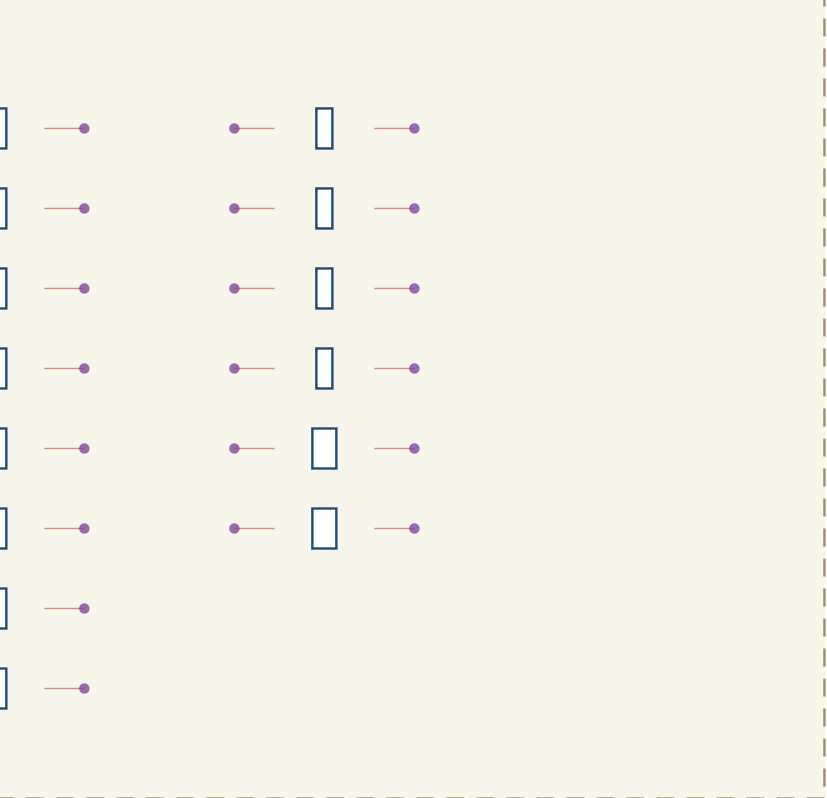
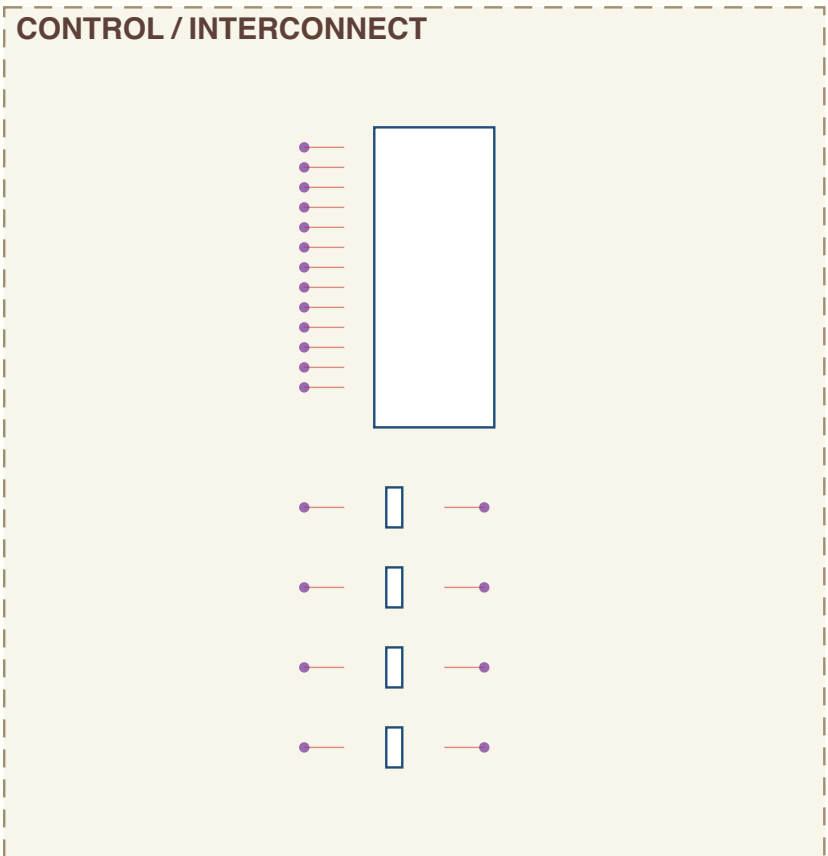
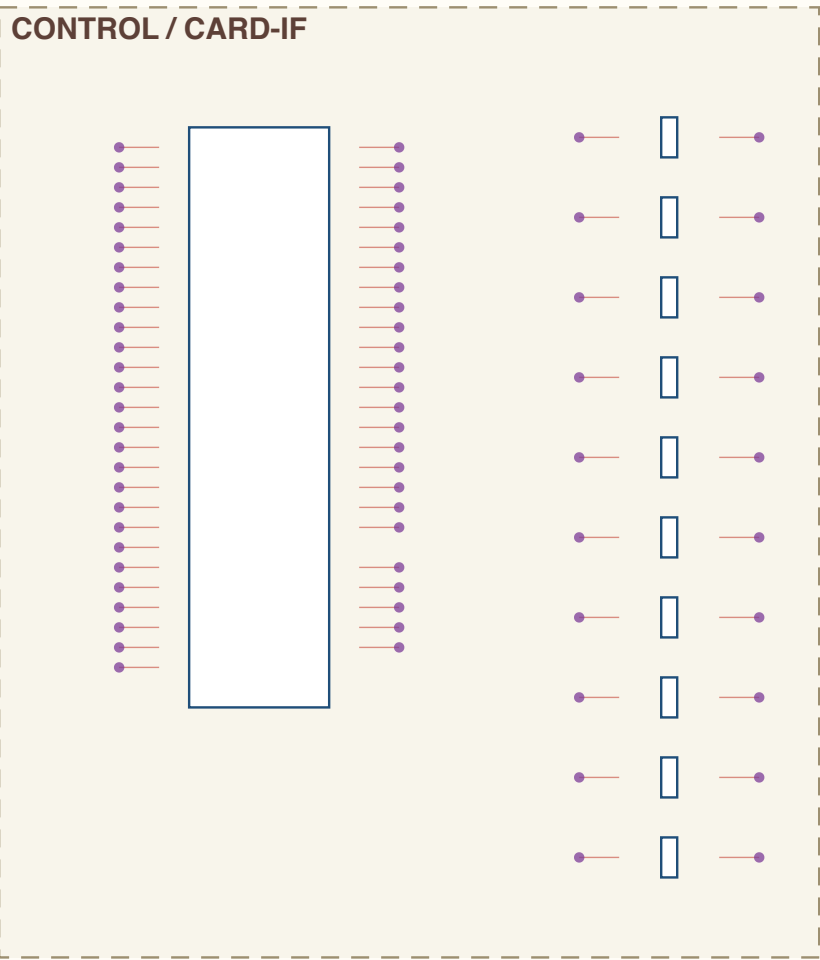
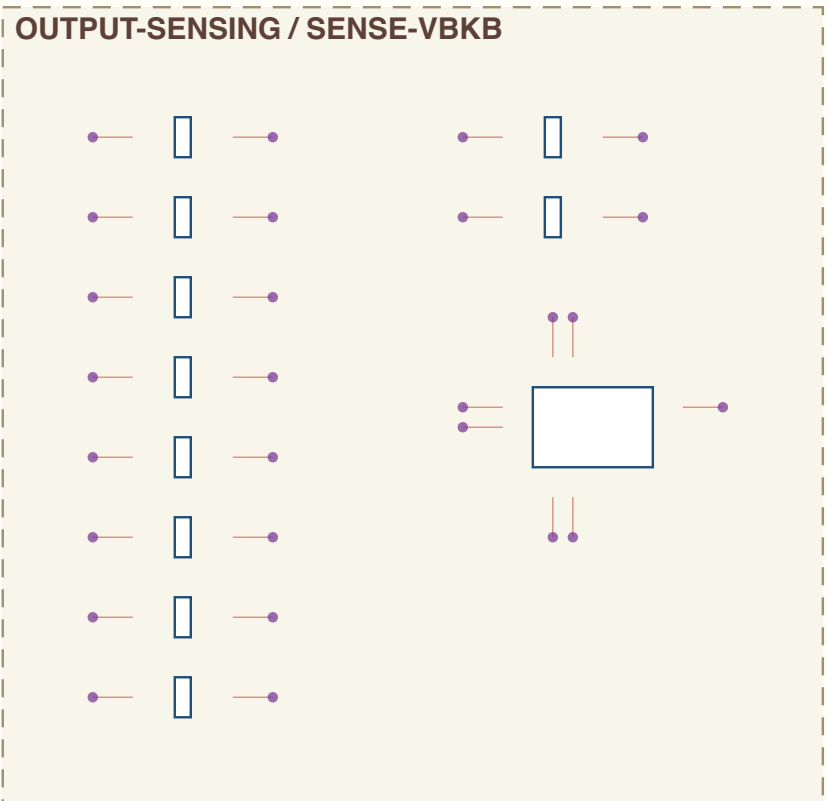
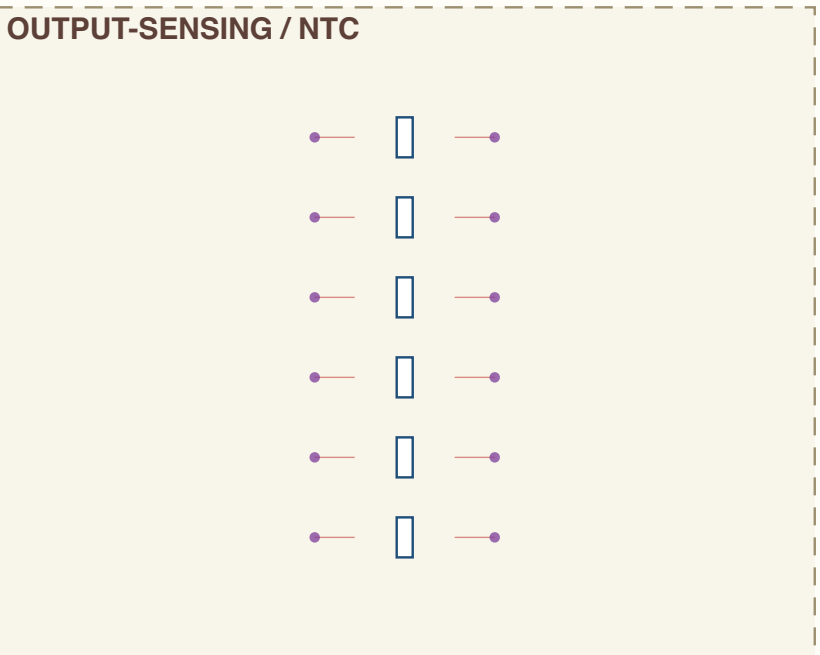
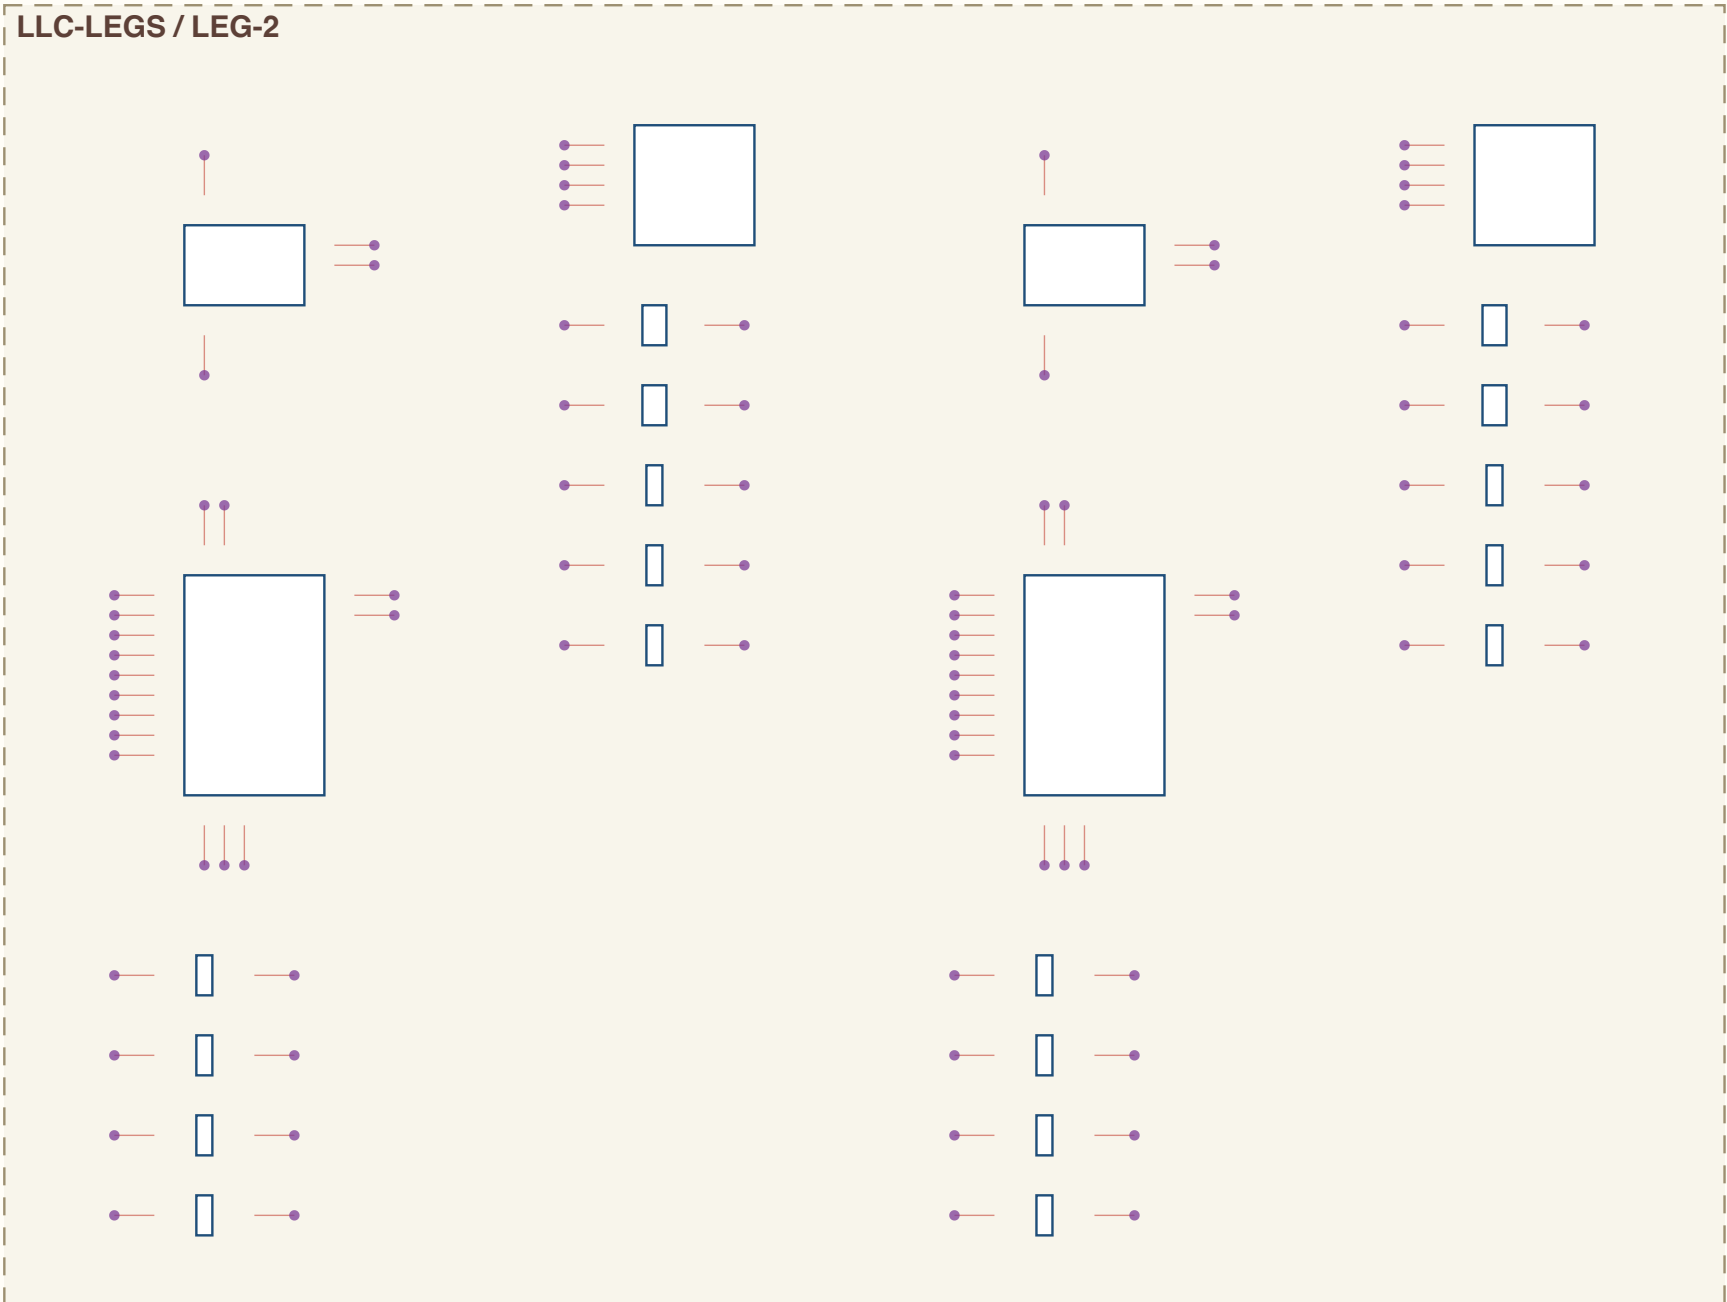
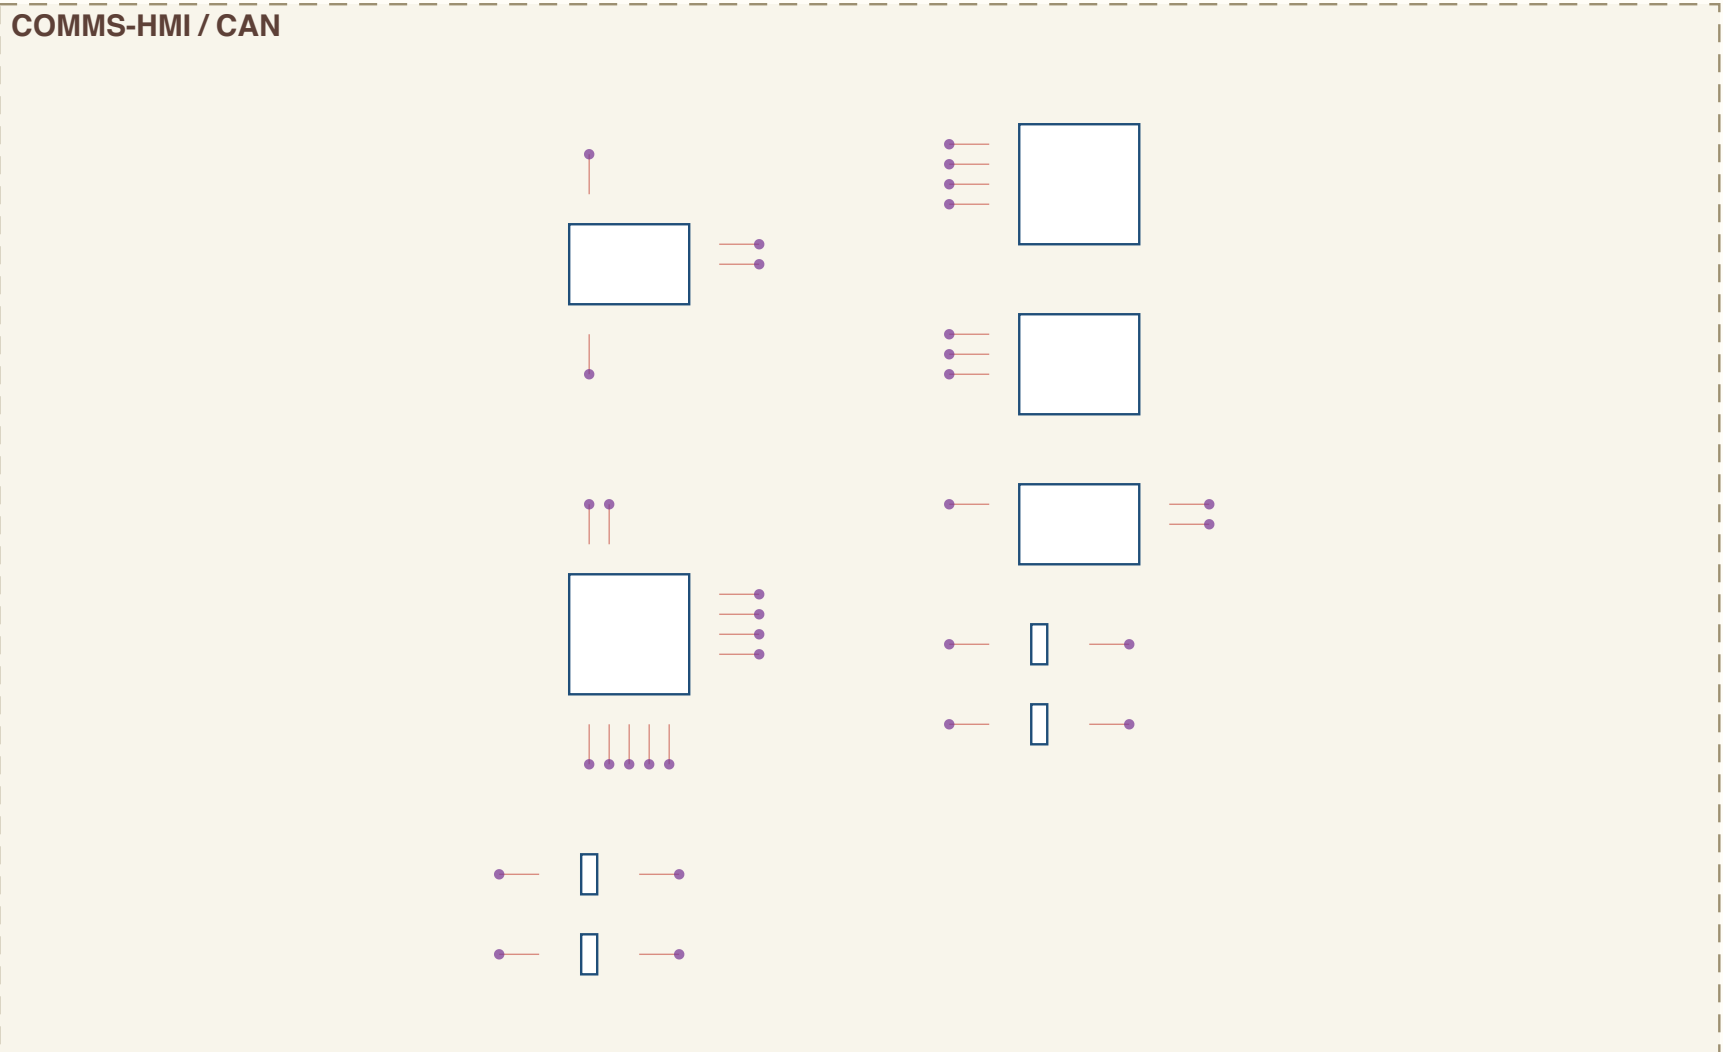
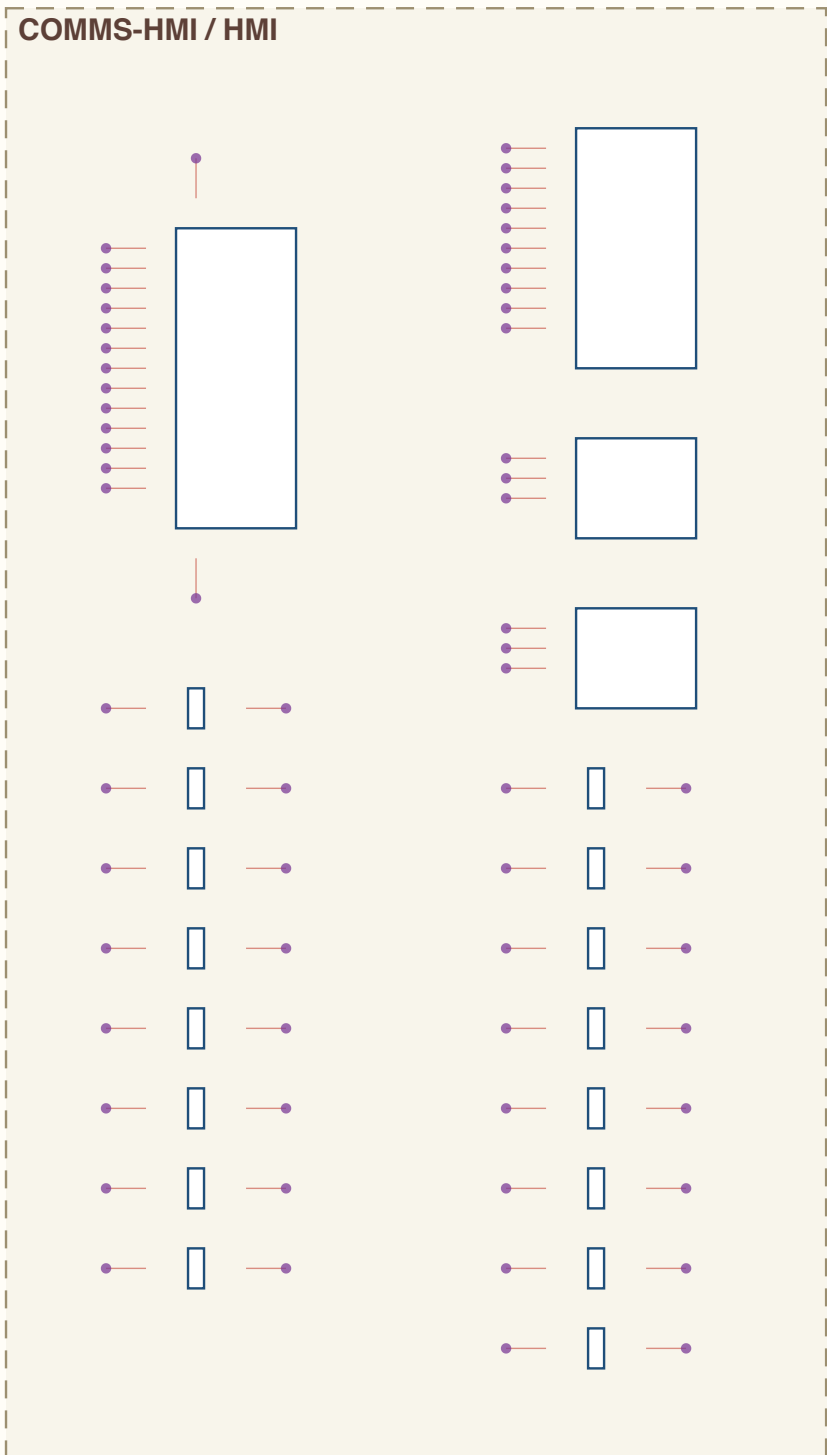
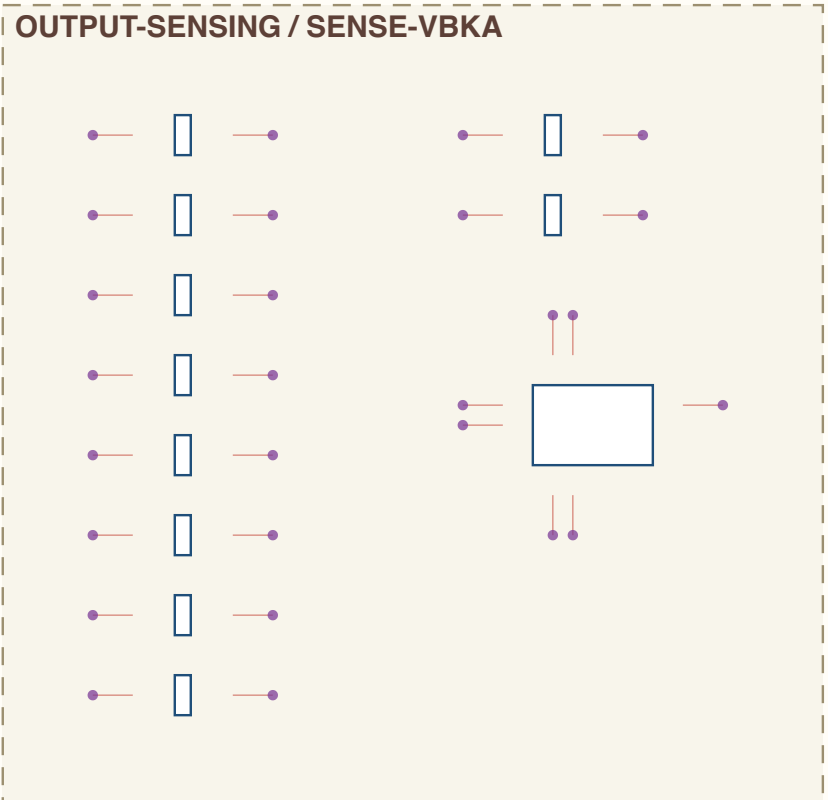
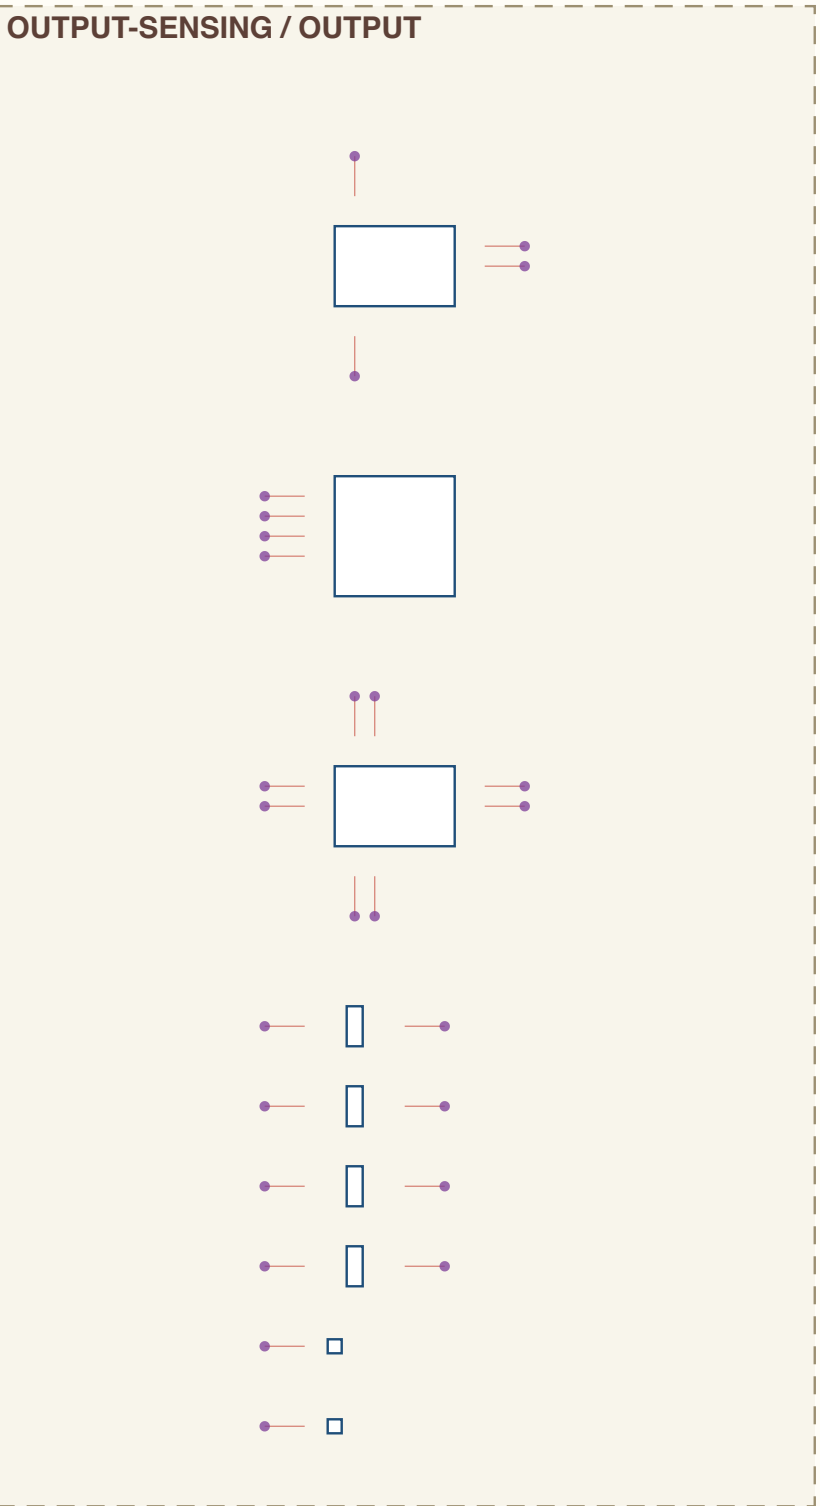
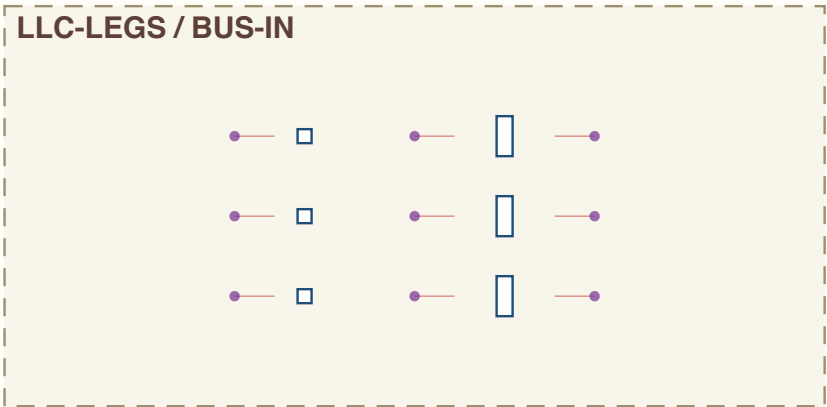
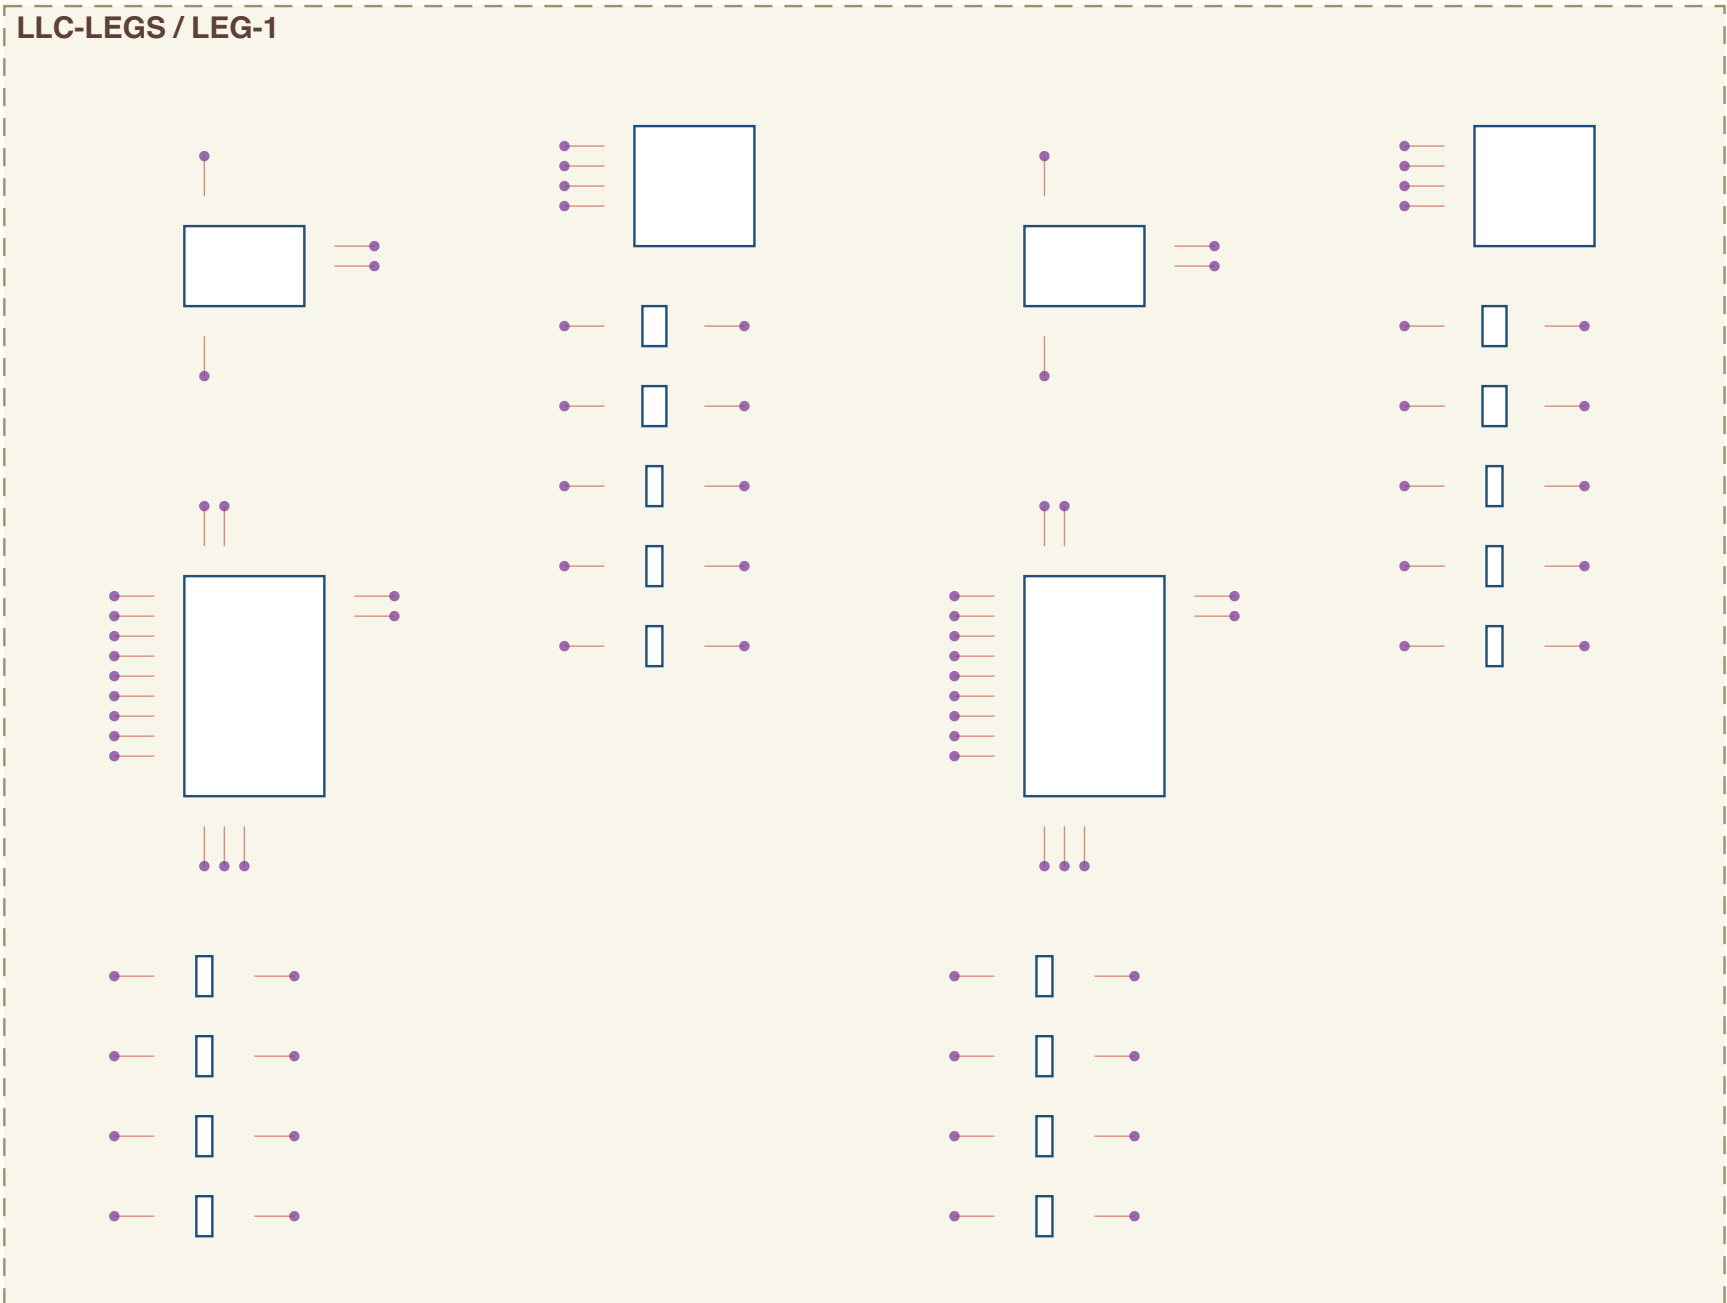
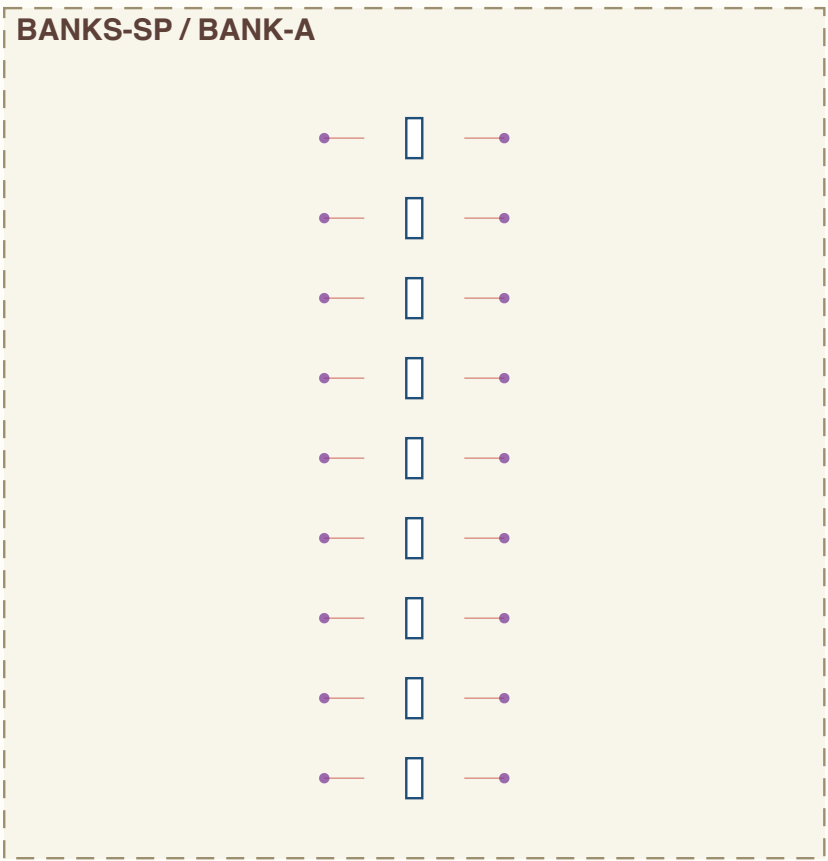
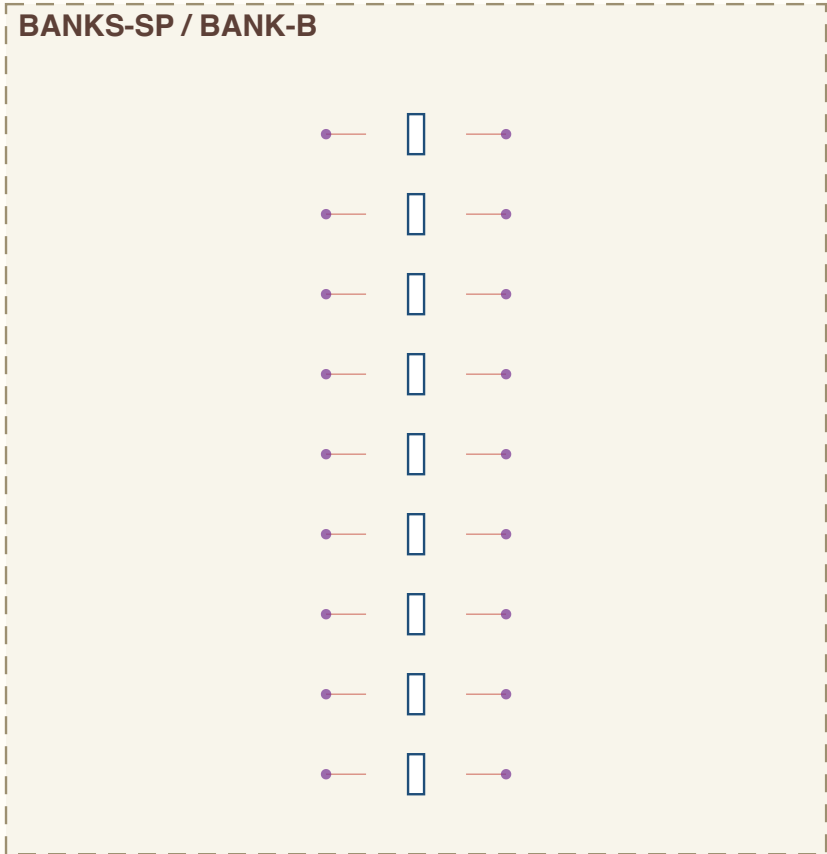
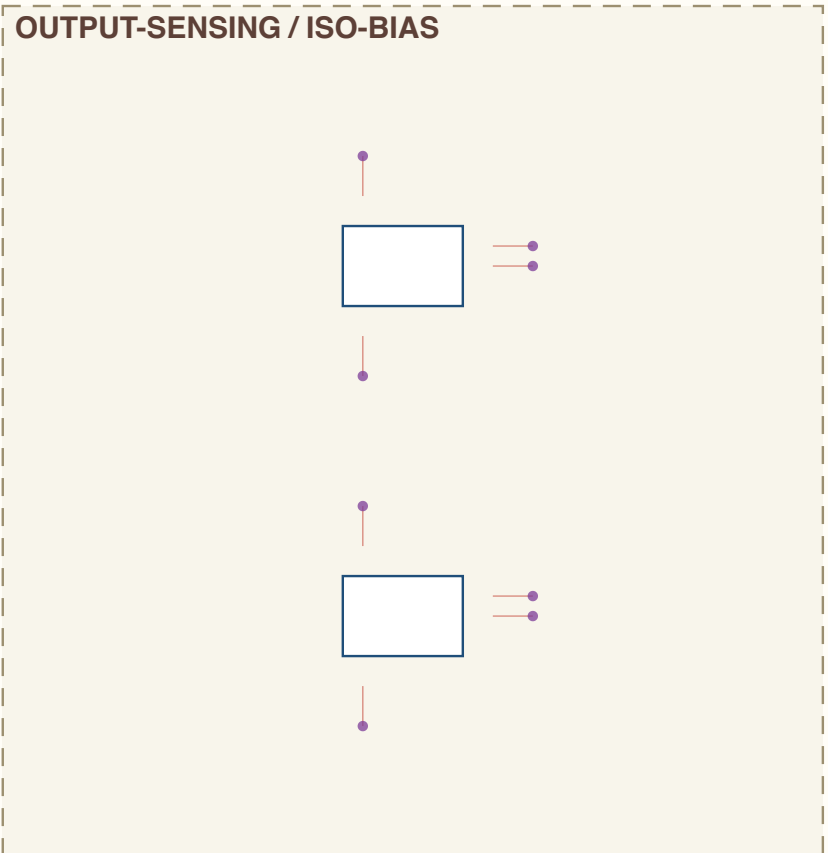
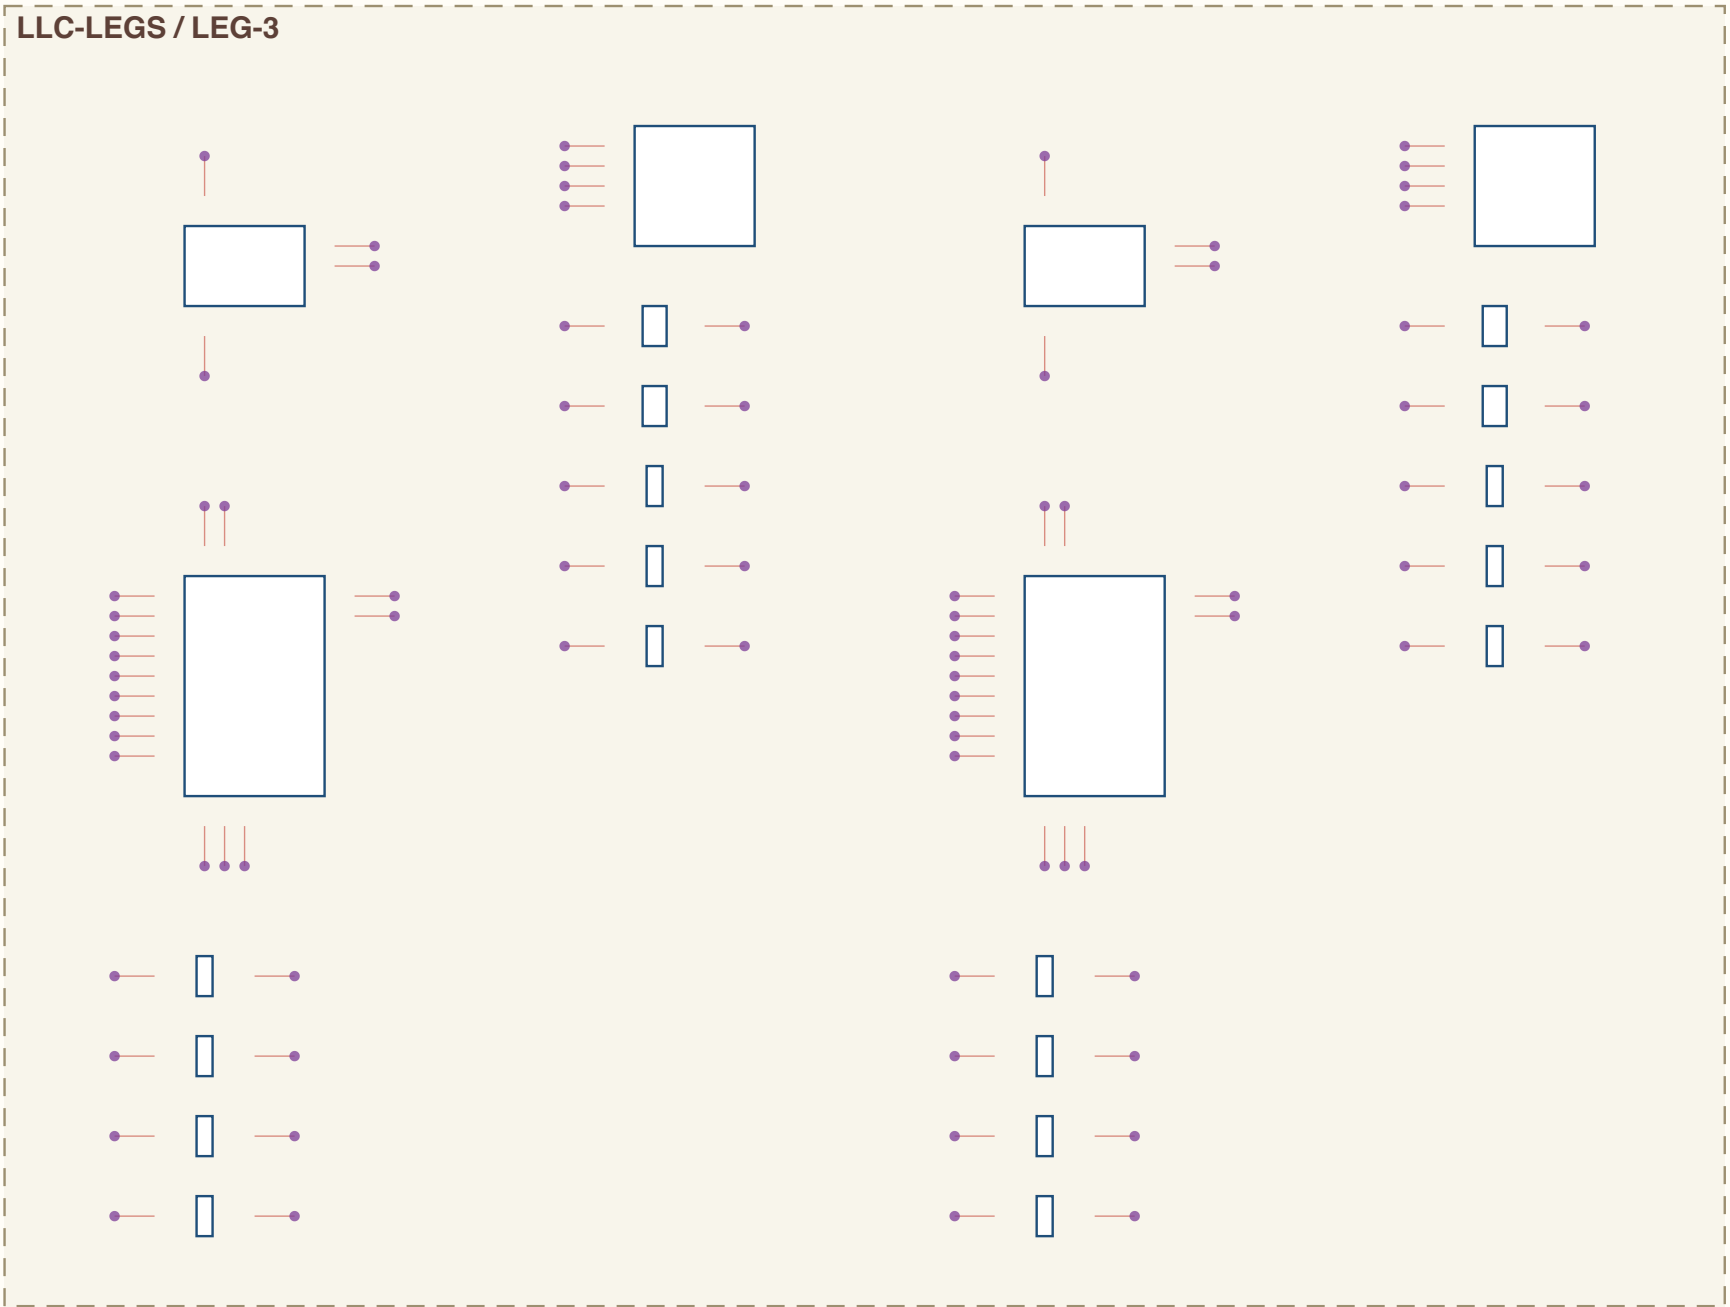


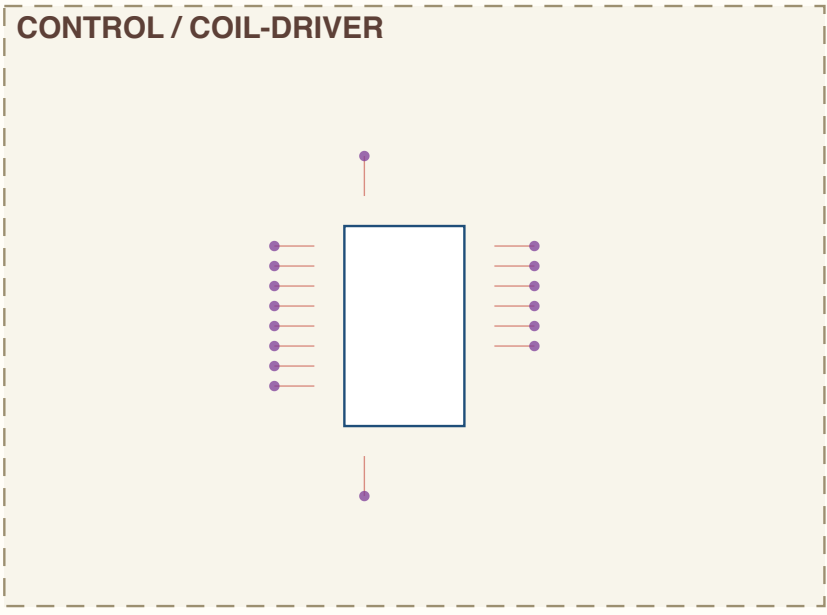

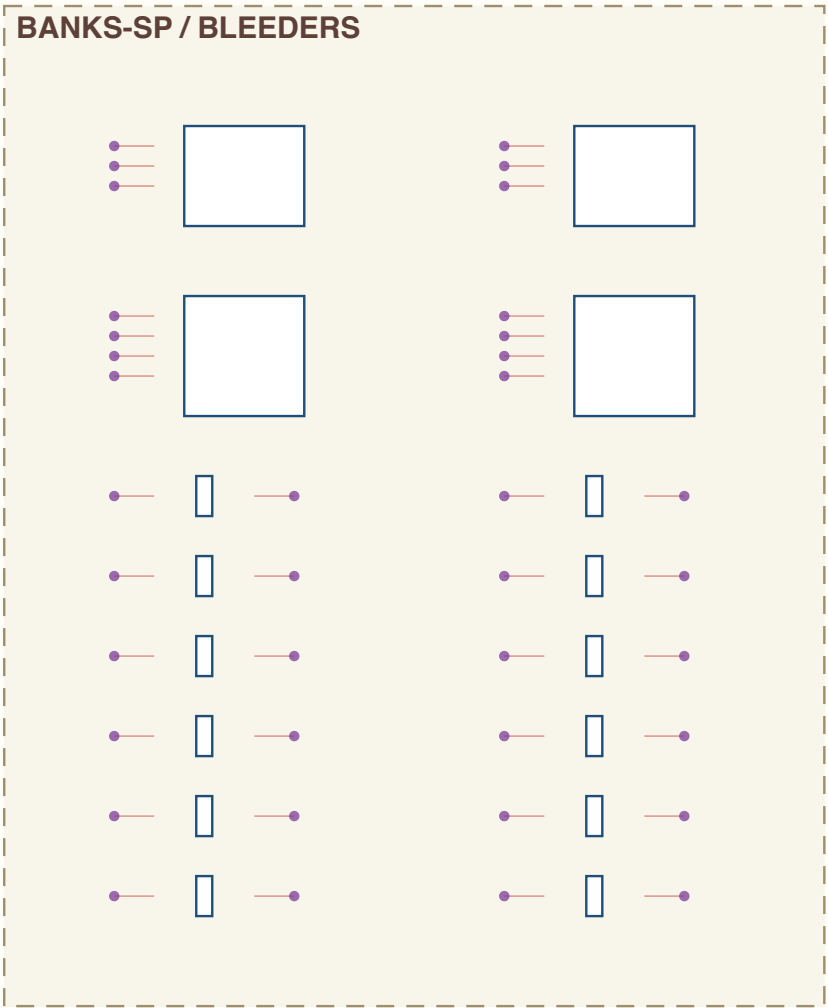

SHEET INDEX
30 kW DC-DC (upper) - 2 of 3
OUTPUT-SENSING - 6 sections
BANKS-SP - 4 sections
LLC-LEGS - 4 sections
CONTROL - 3 sections
LLC-TANKS - 3 sections
COMMS-HMI - 2 sections
rev D.3 - 22 sections - 282 components

NET NAMING
internal junctions are named for what they join
U<ref>_<PIN> node at that IC pin e.g. UIVOA_VINP
R<stem>_M midpoint of a series pair e.g. RBALTA_M
R<stem>_<nm> tap between R<stem>n/m e.g. RV1D_01
all others are explicit design nets

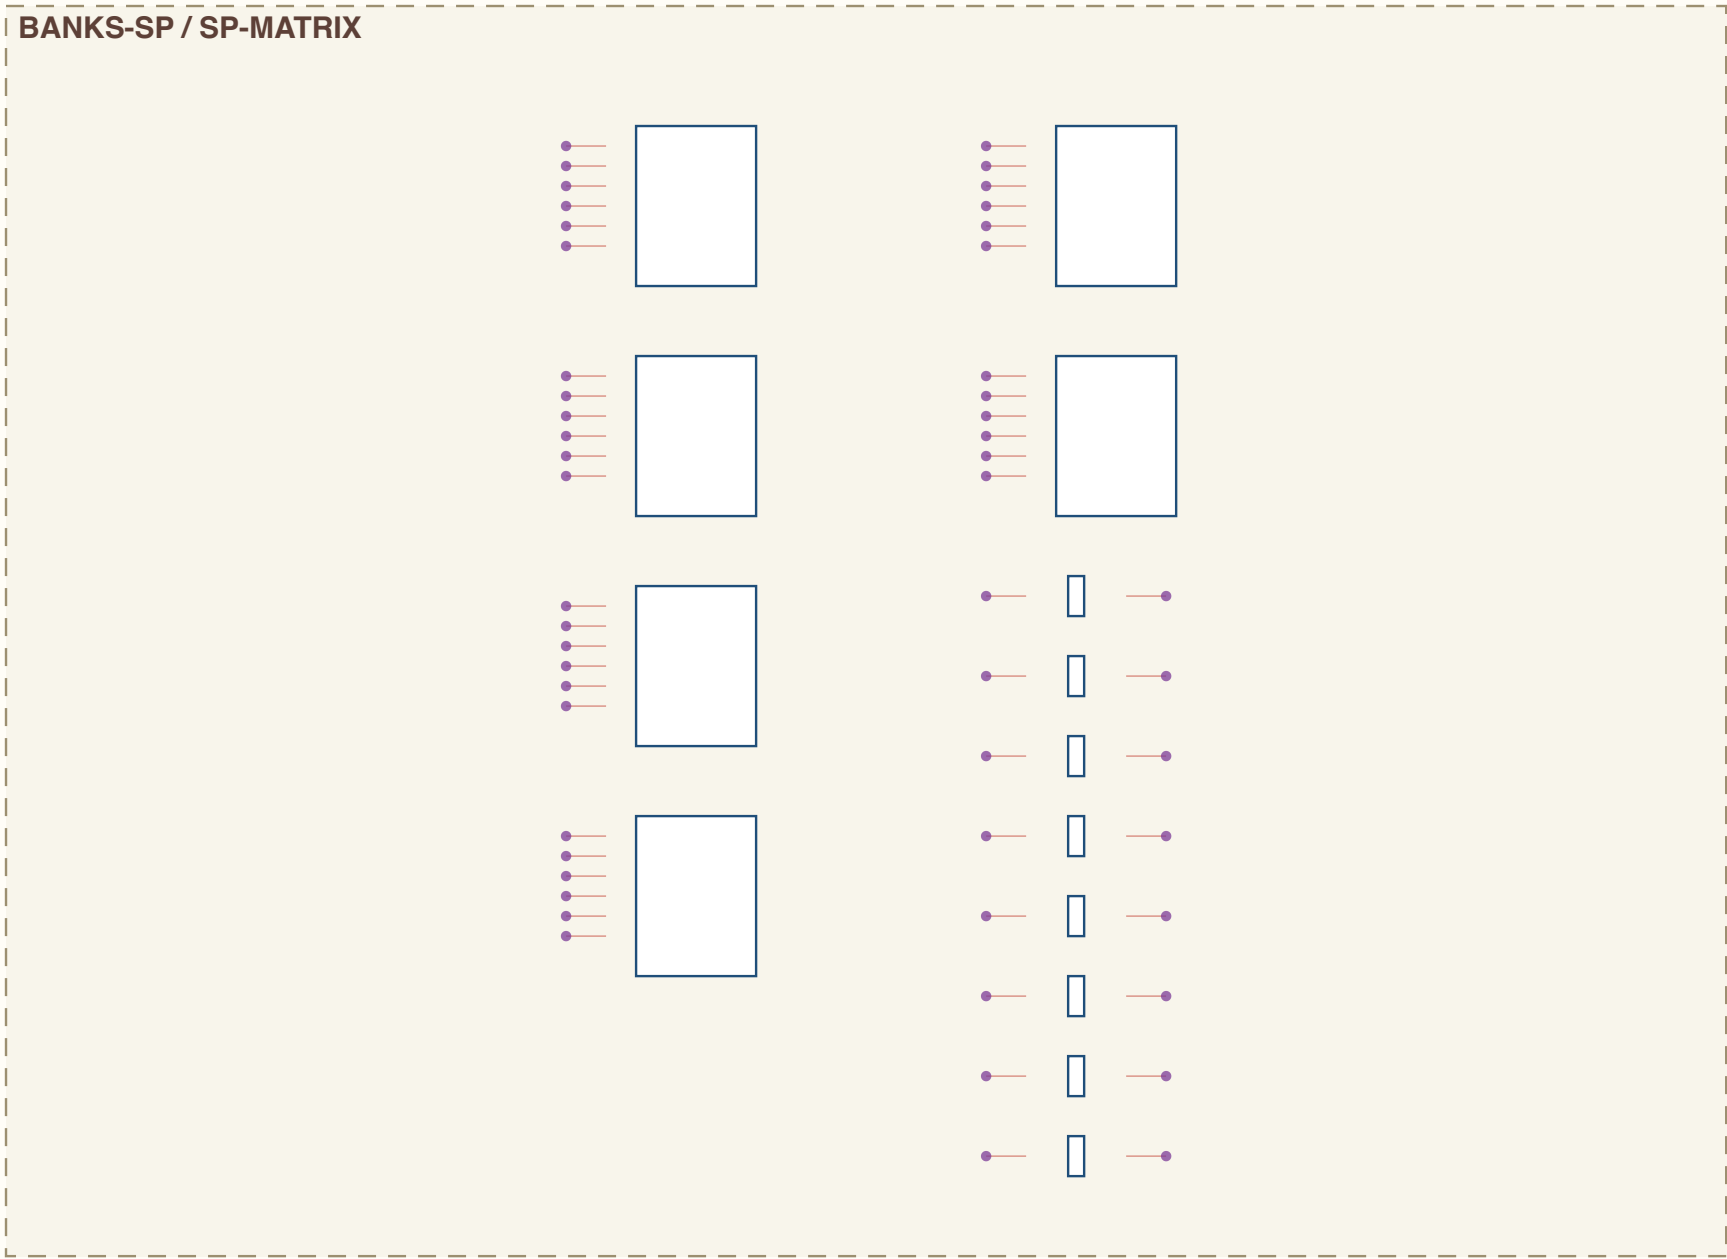