
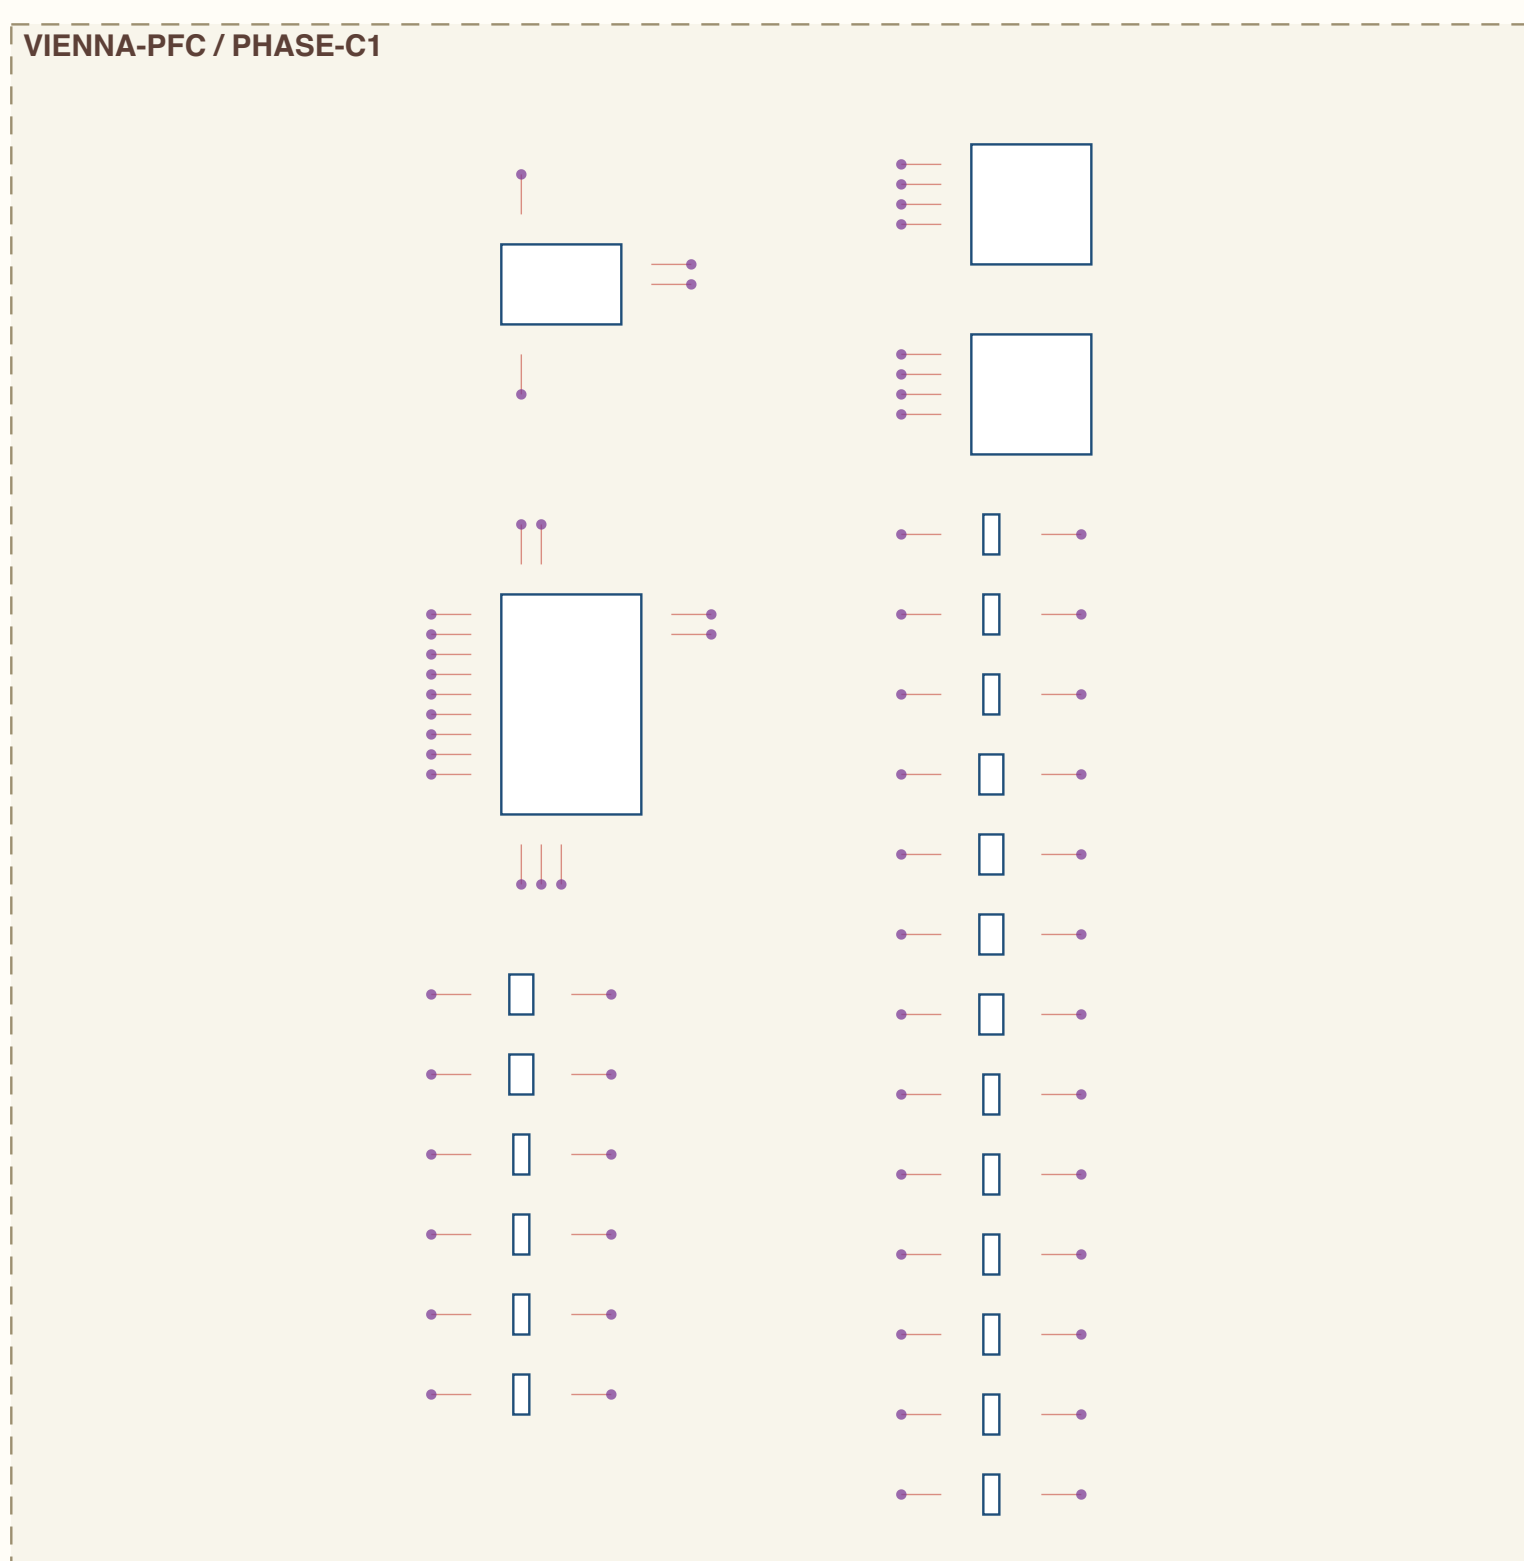
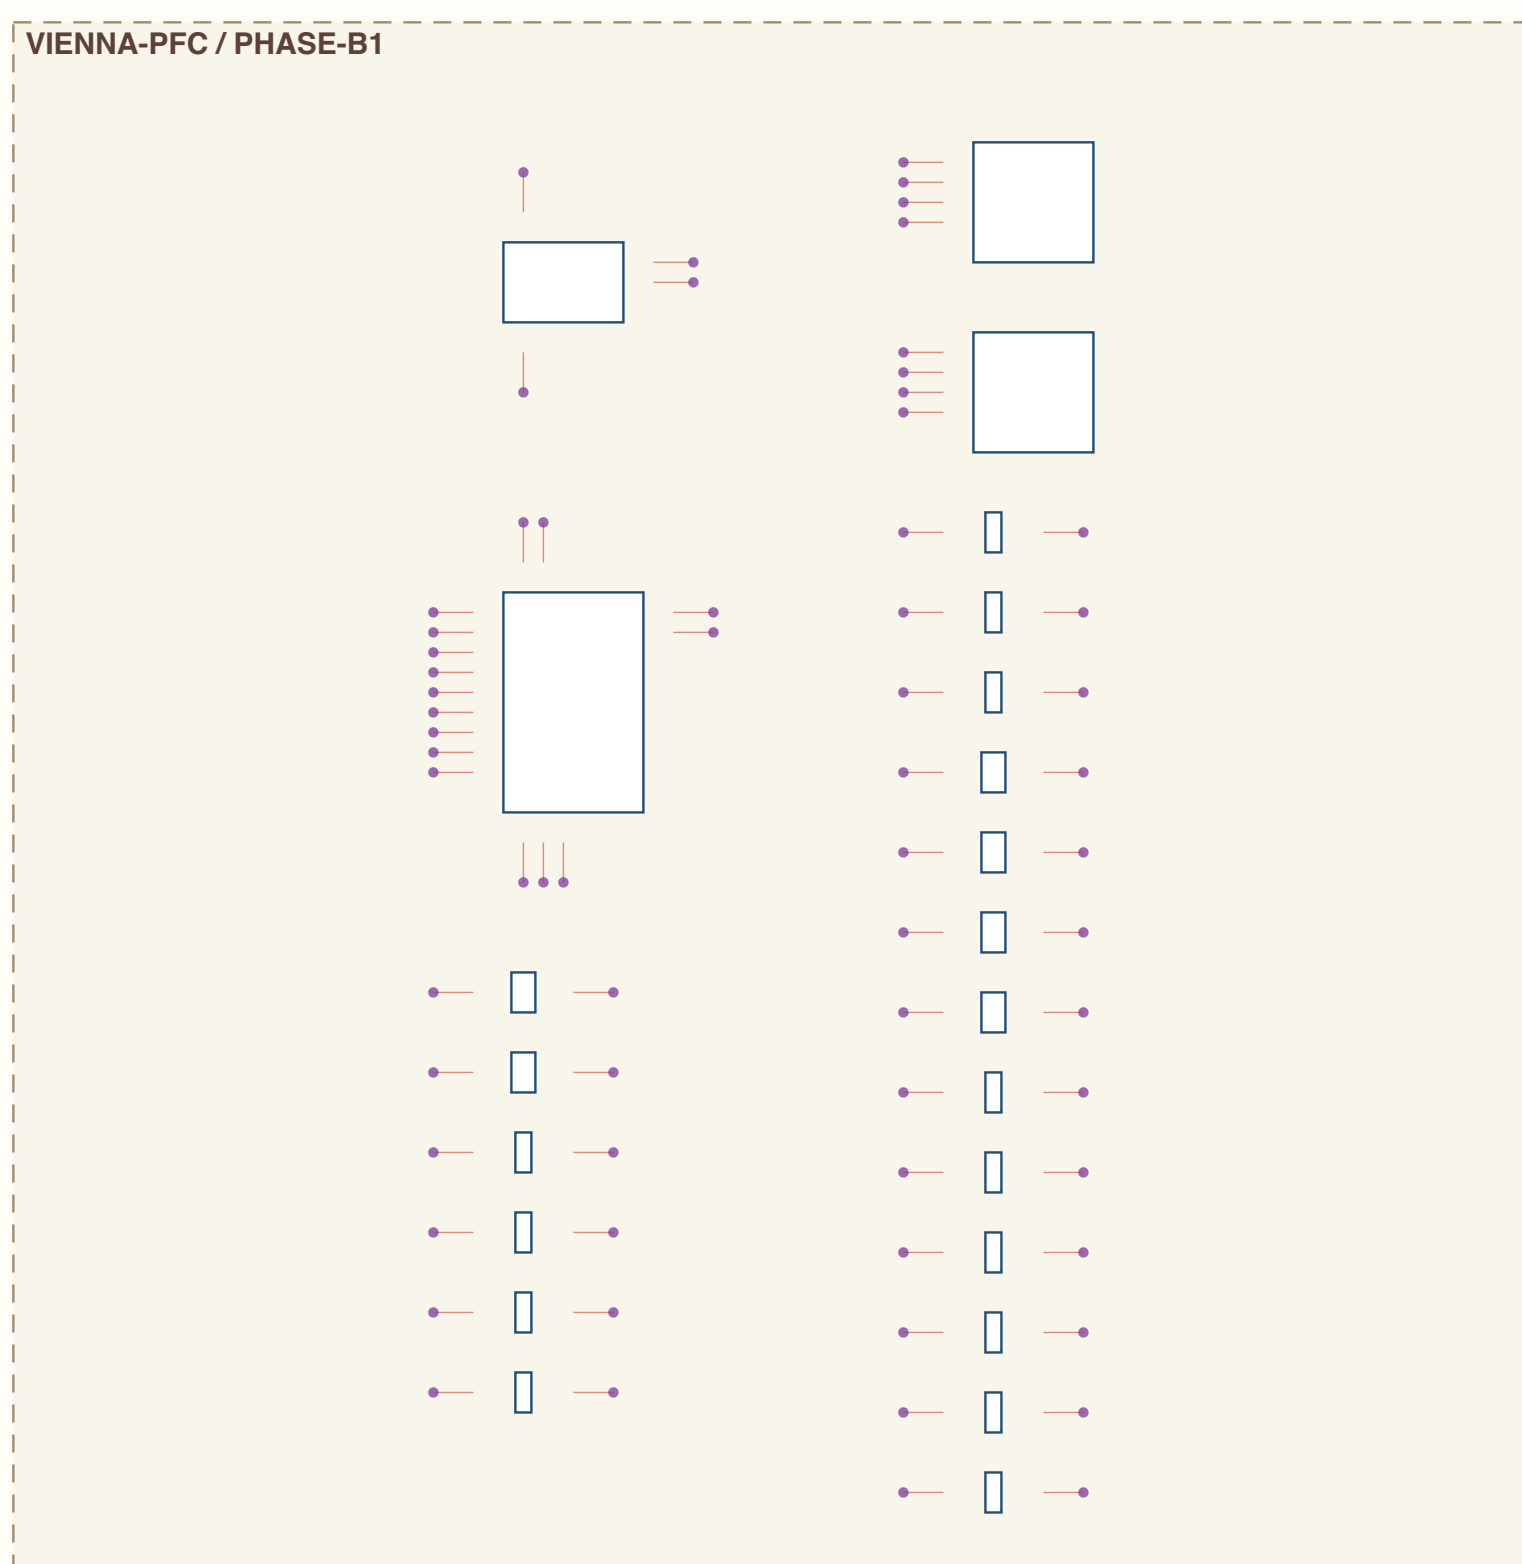
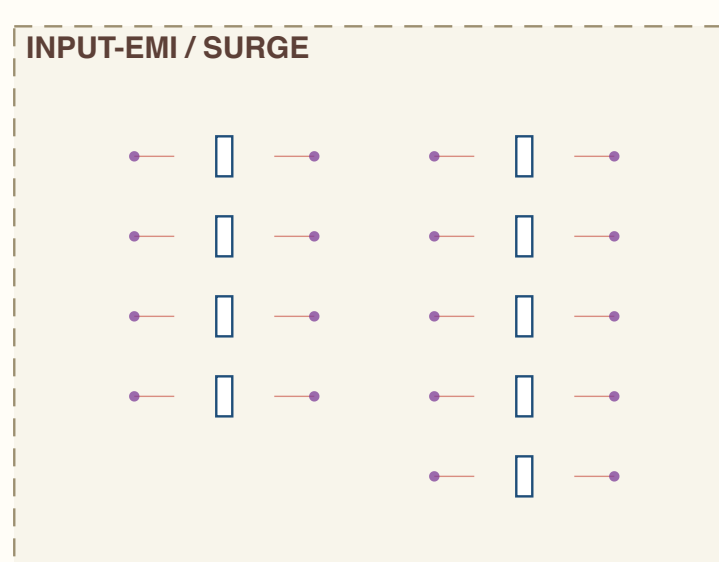
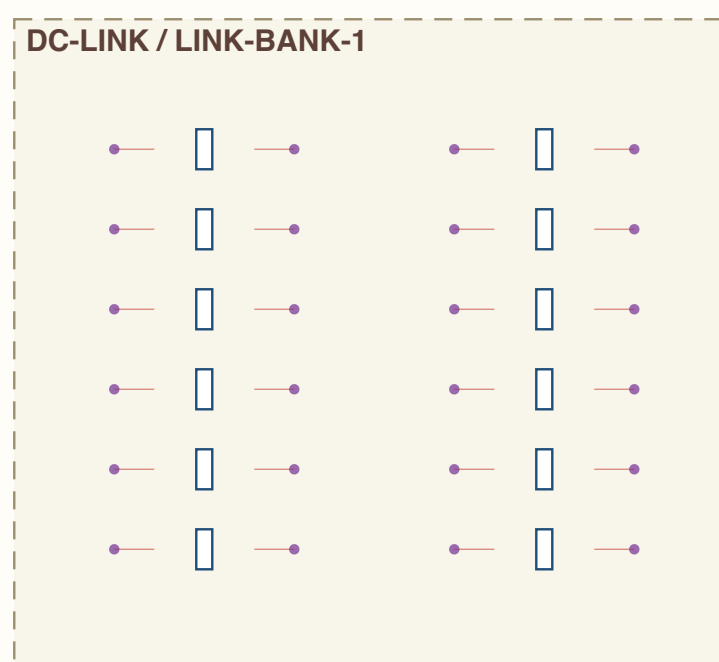
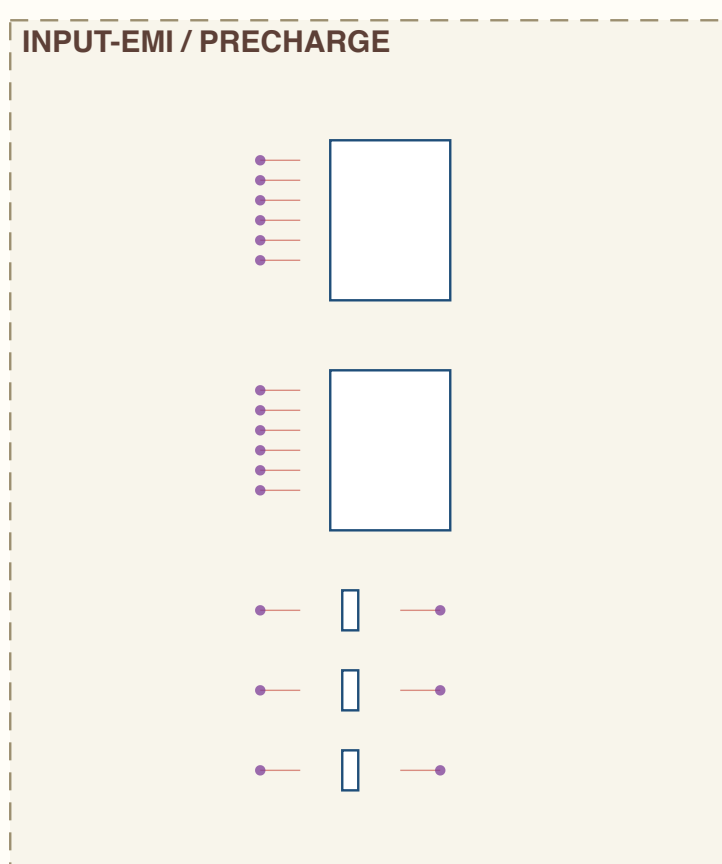
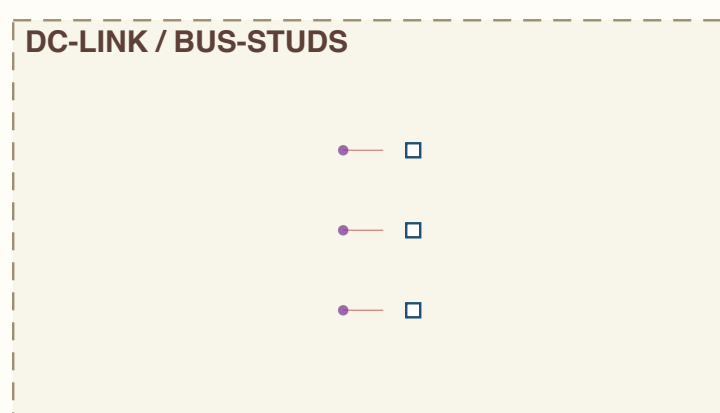
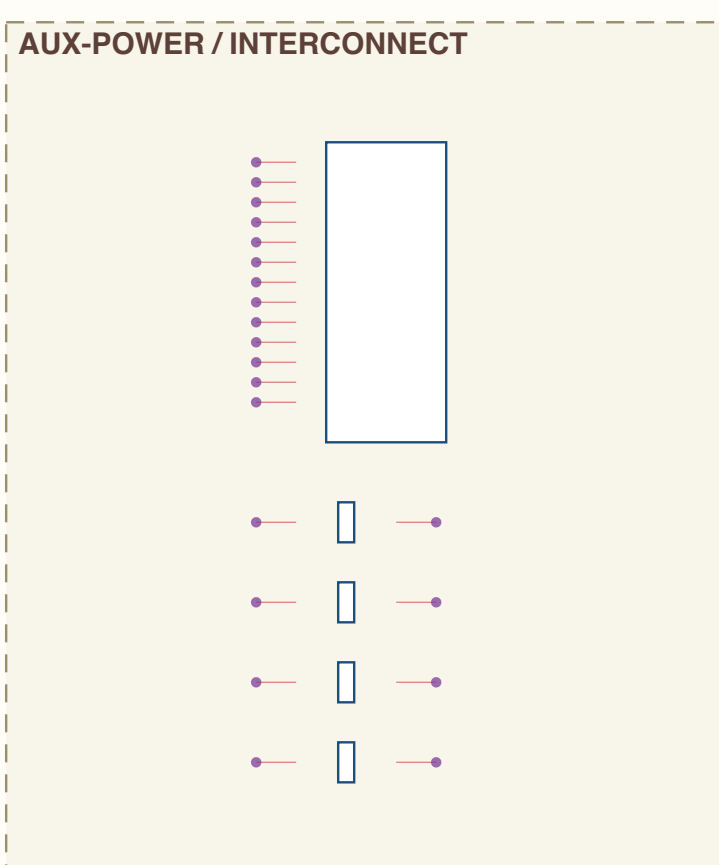
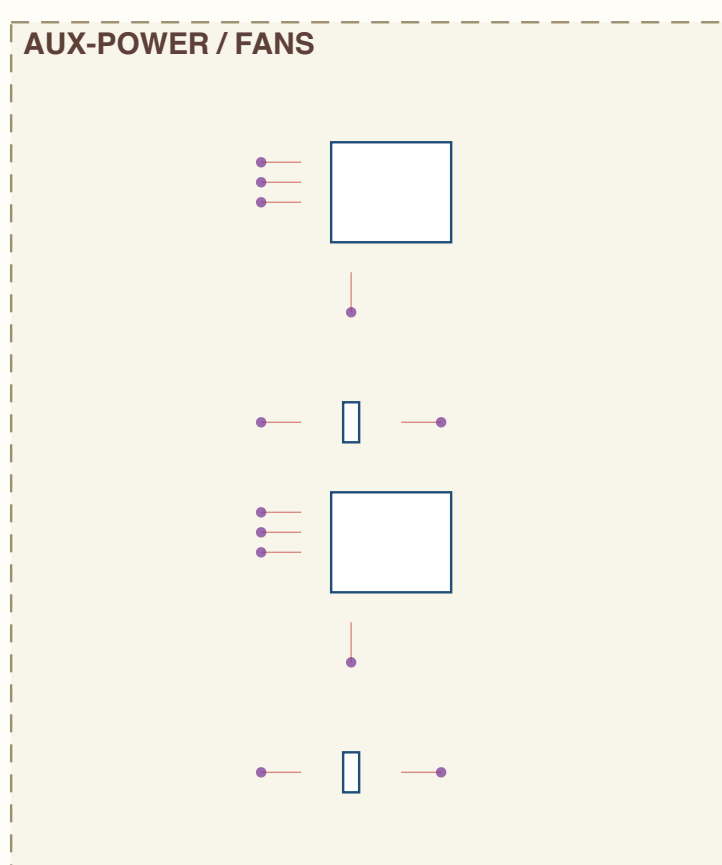
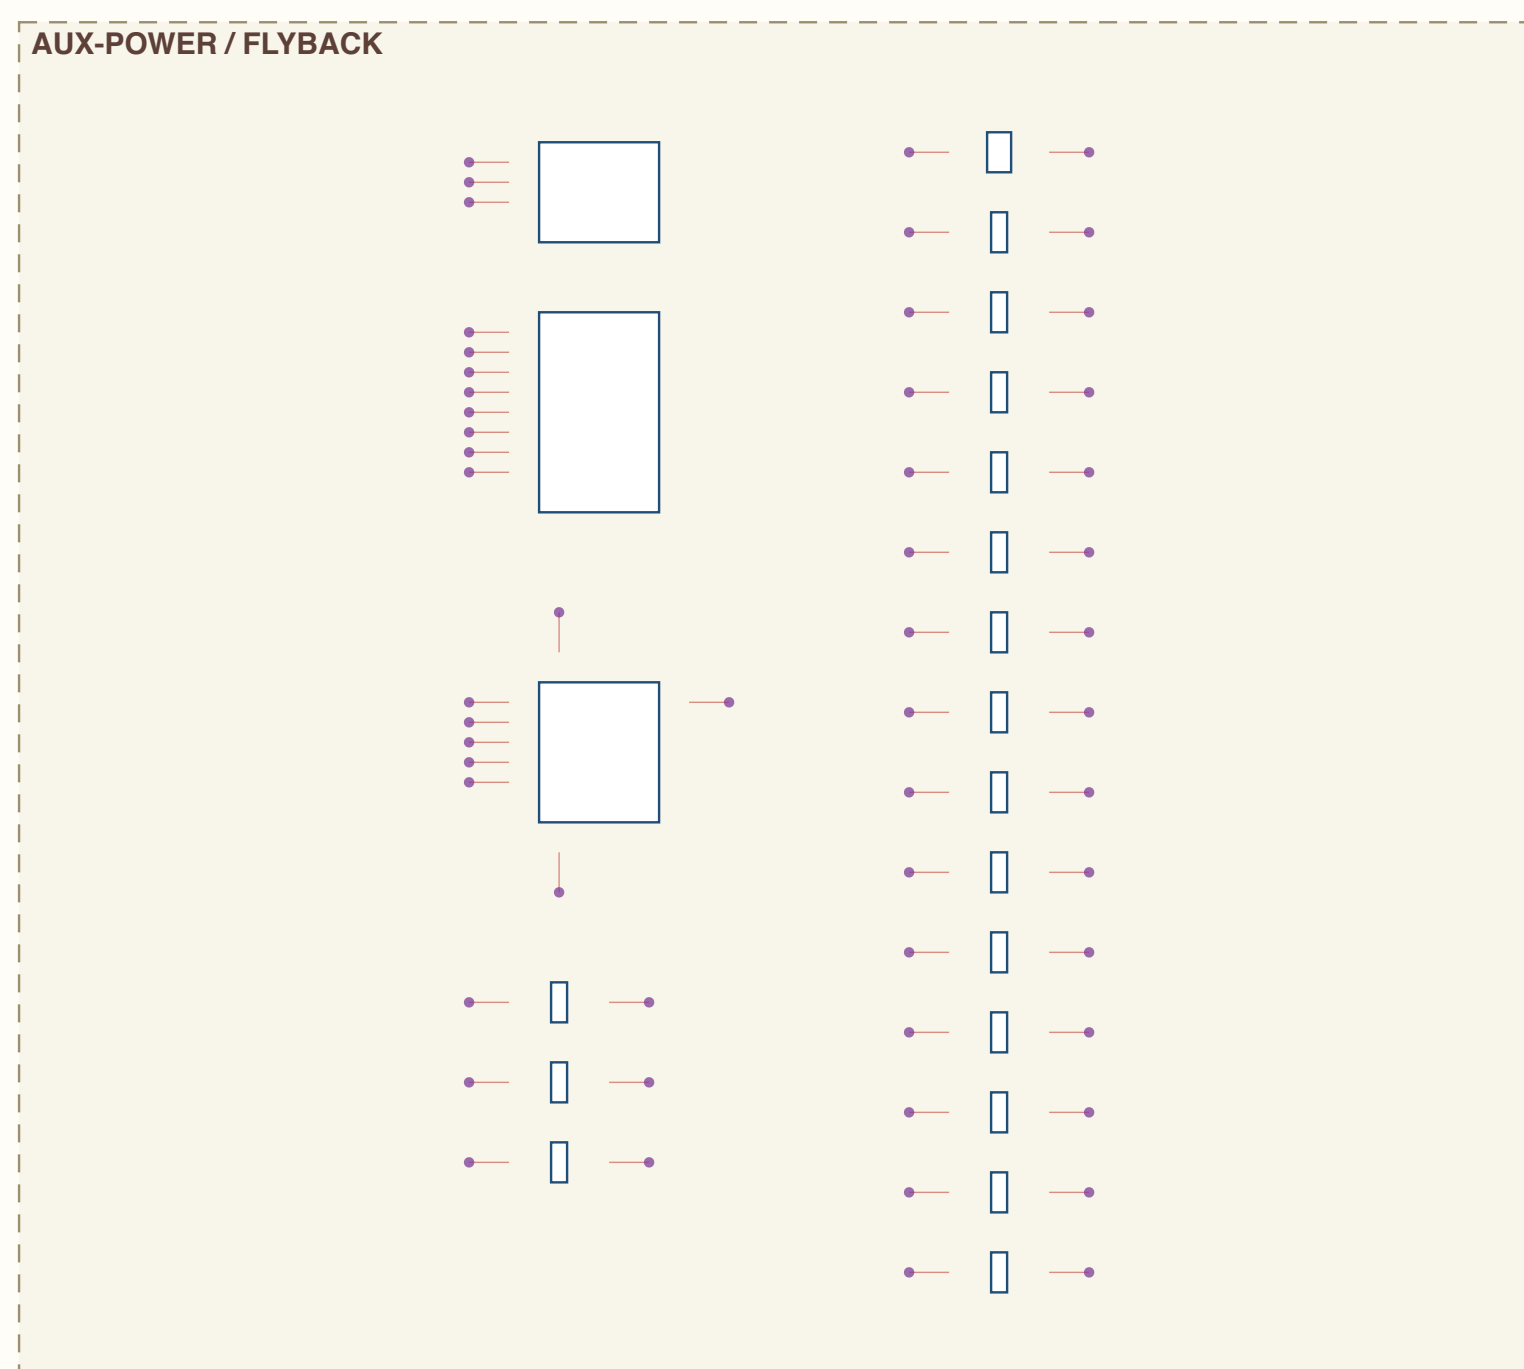
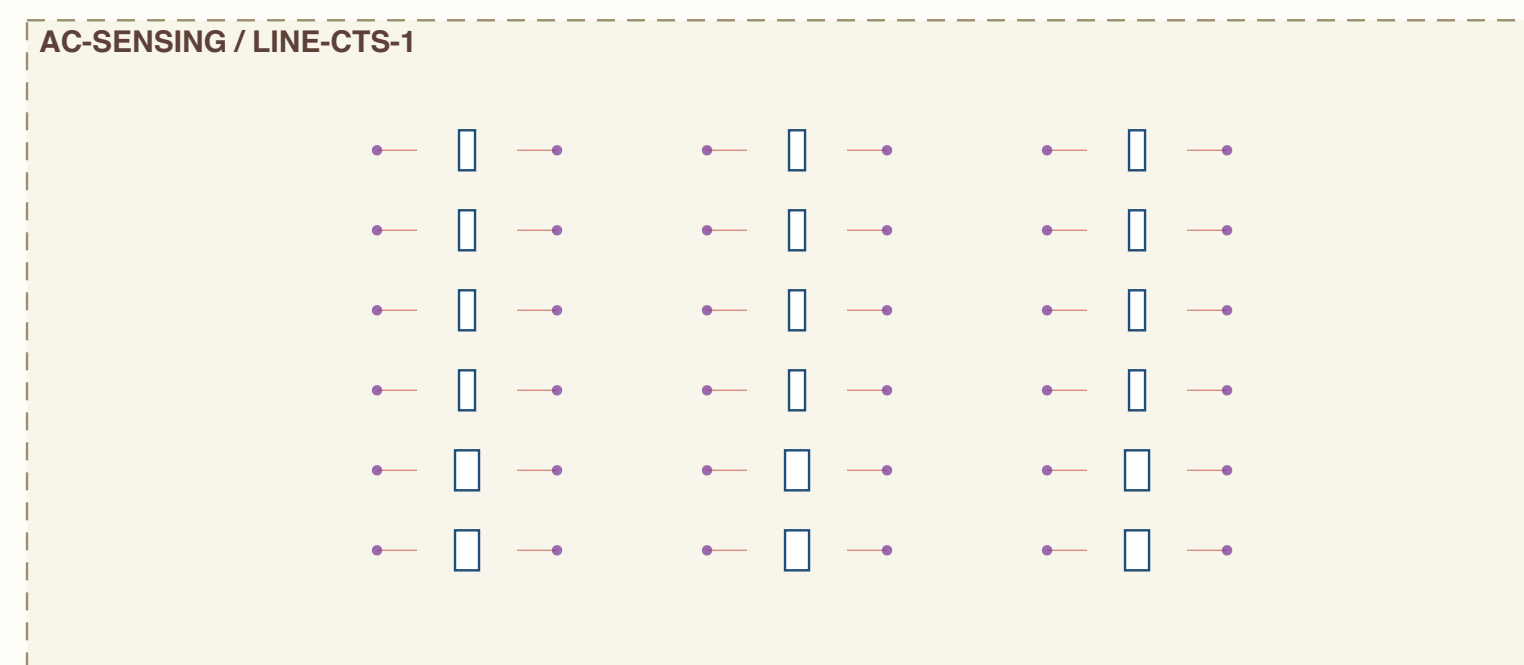
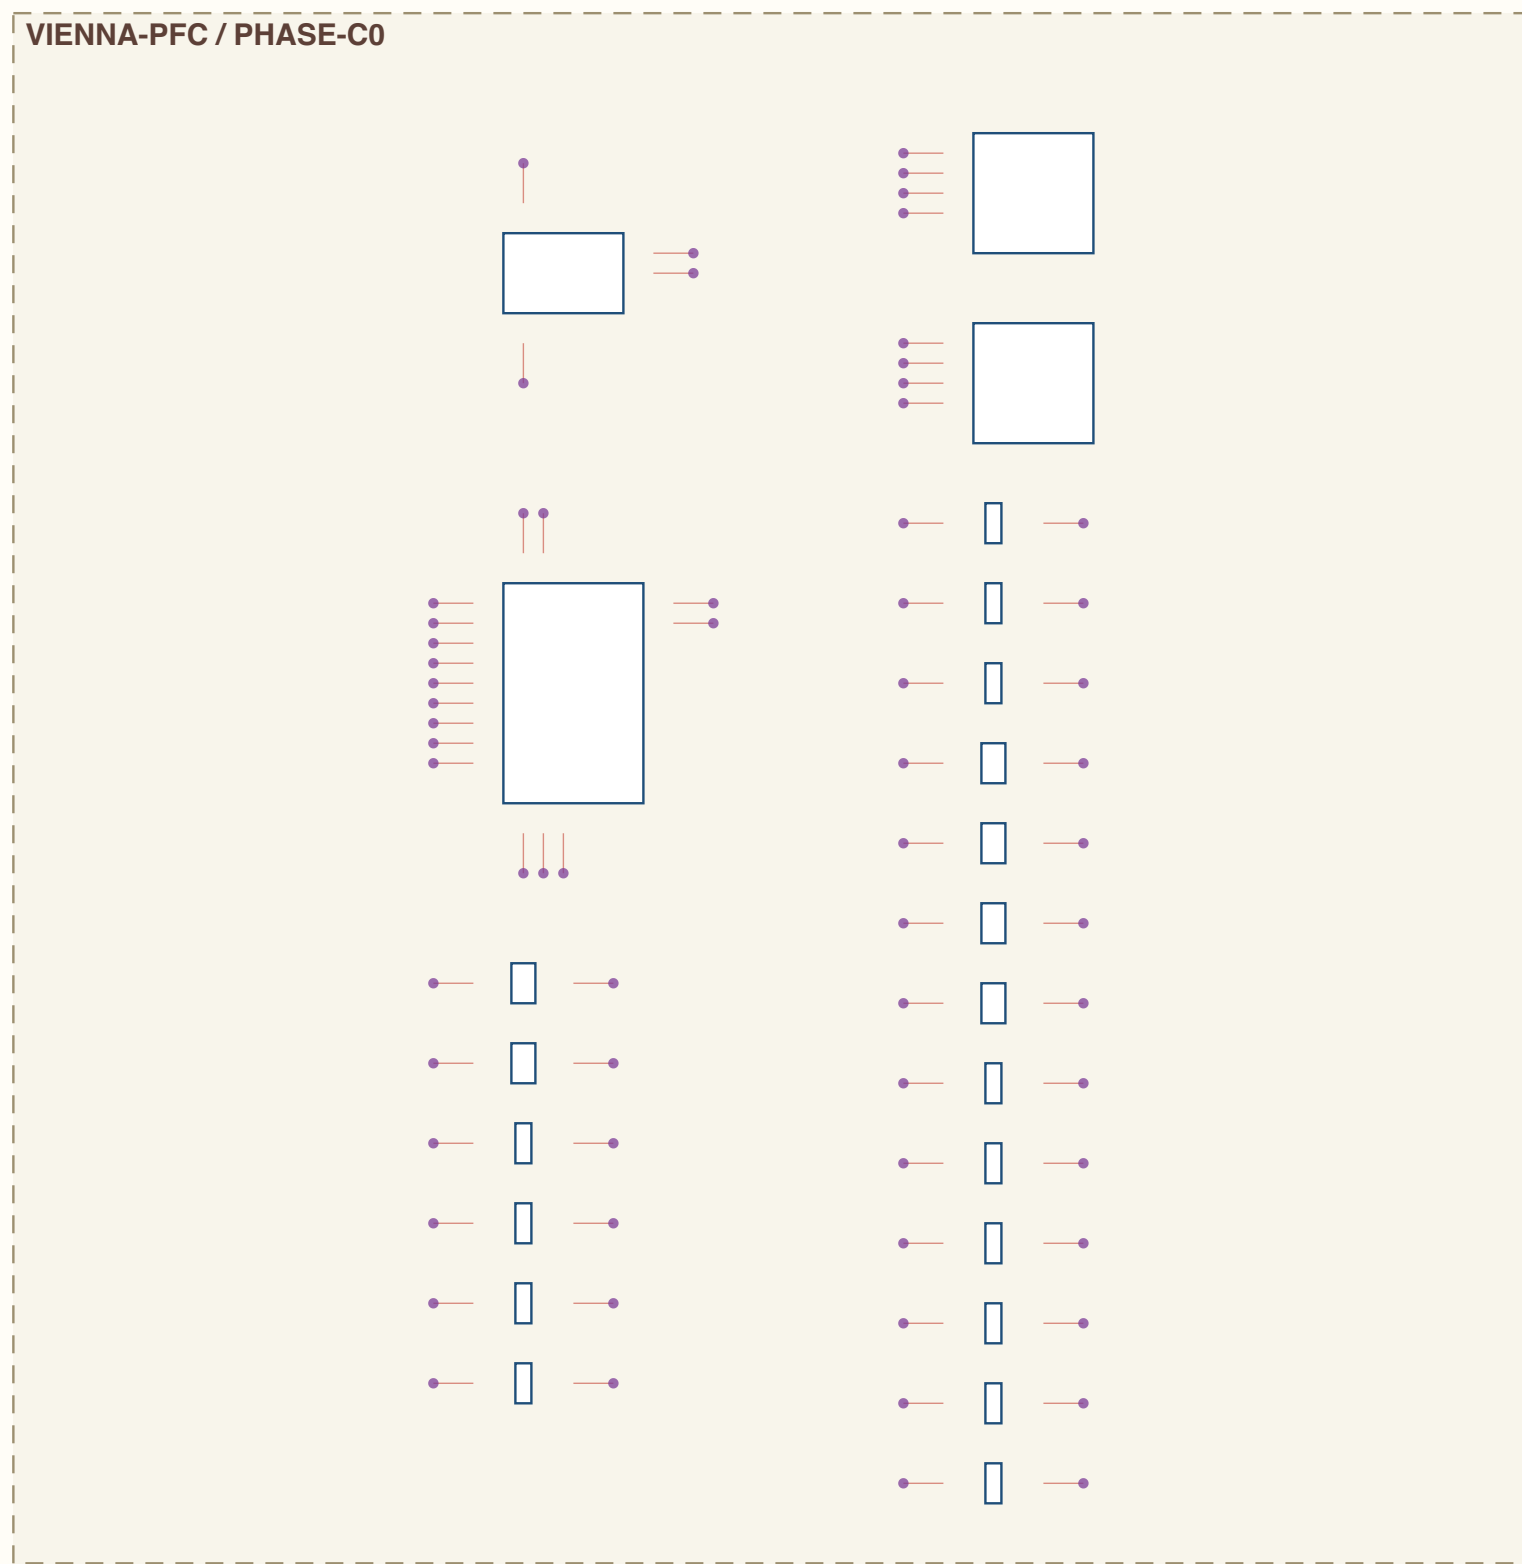
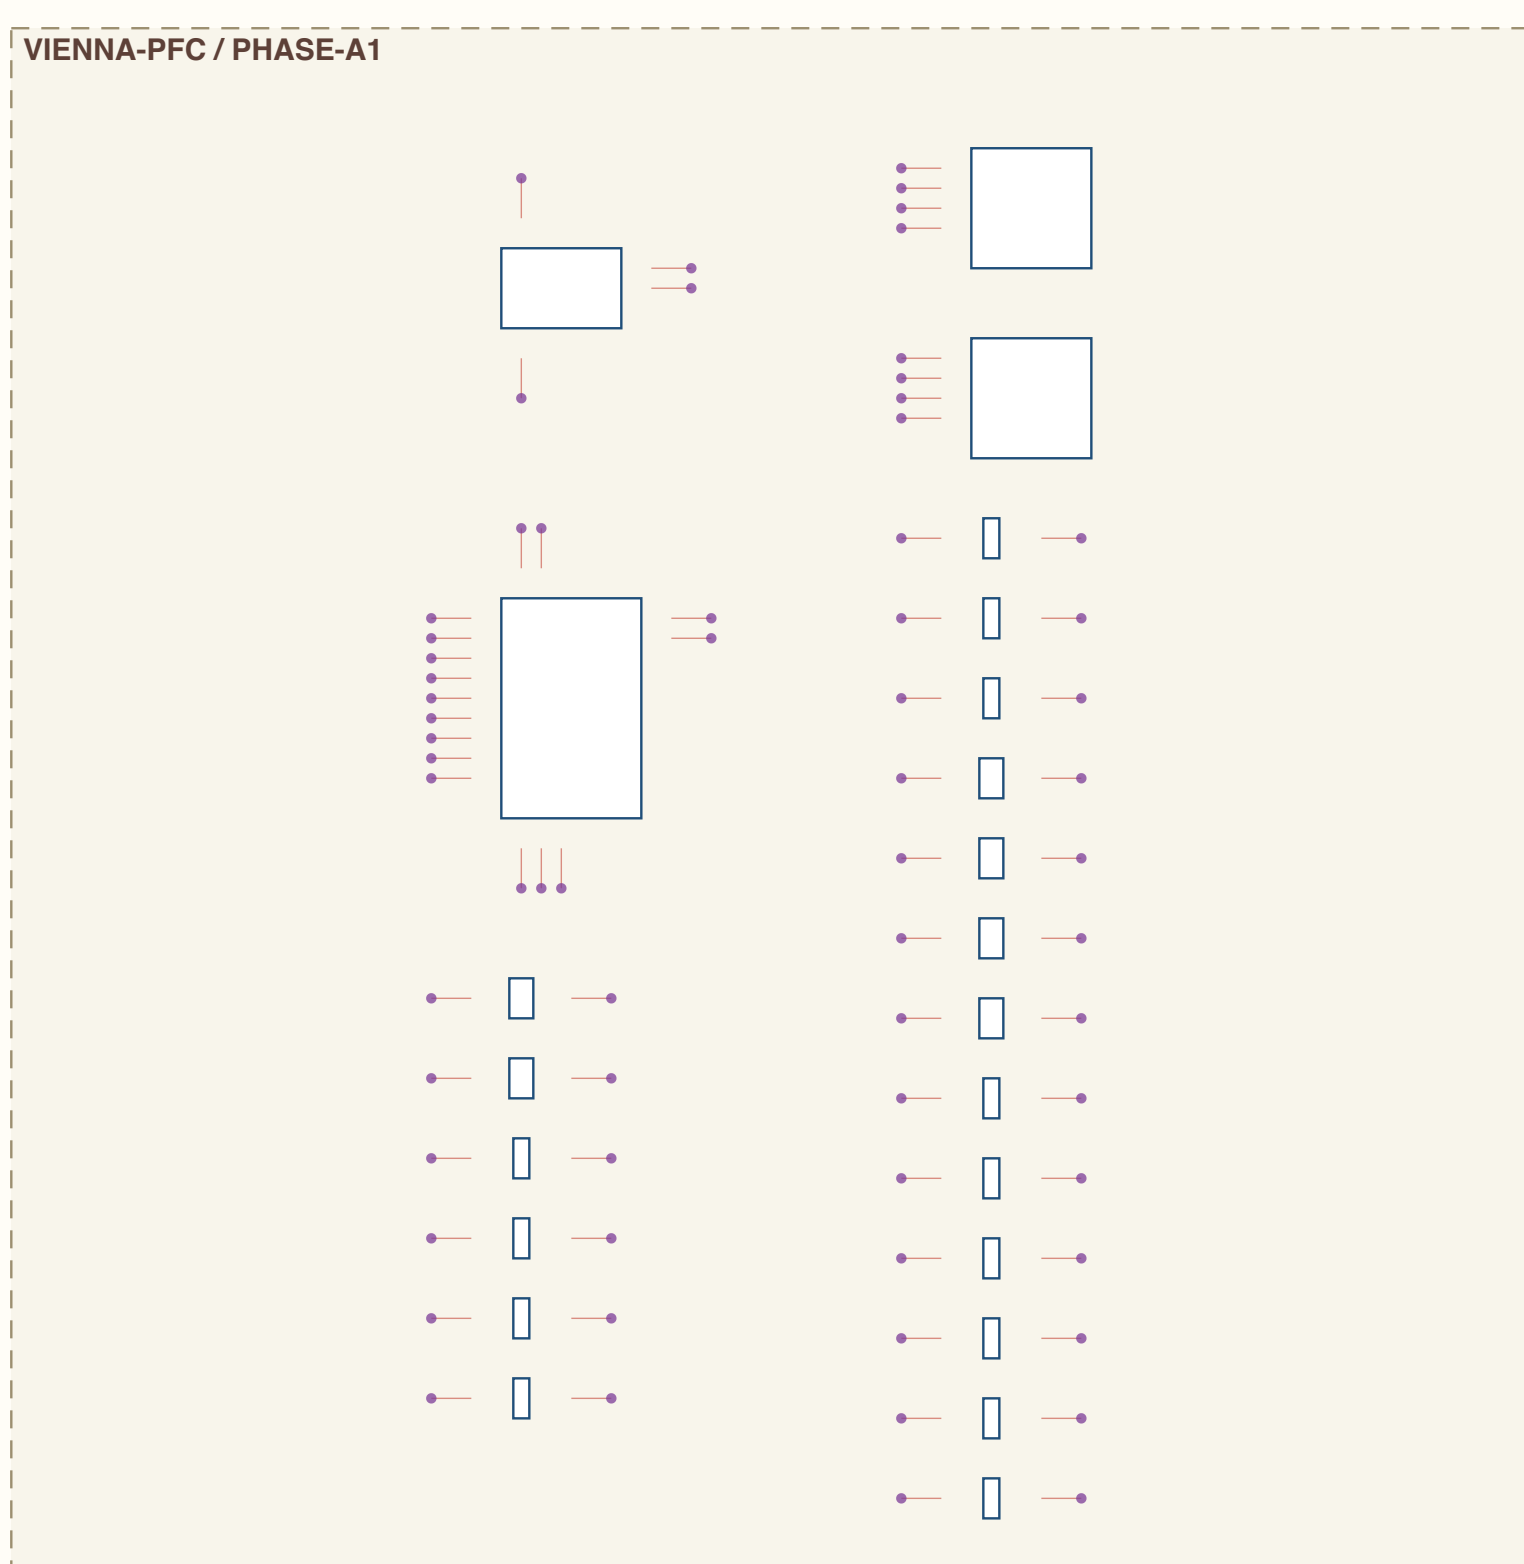
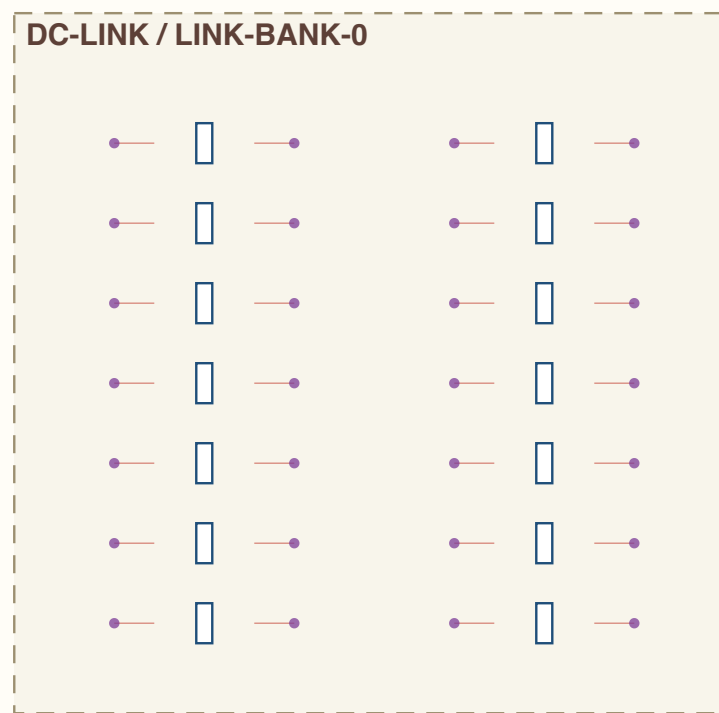
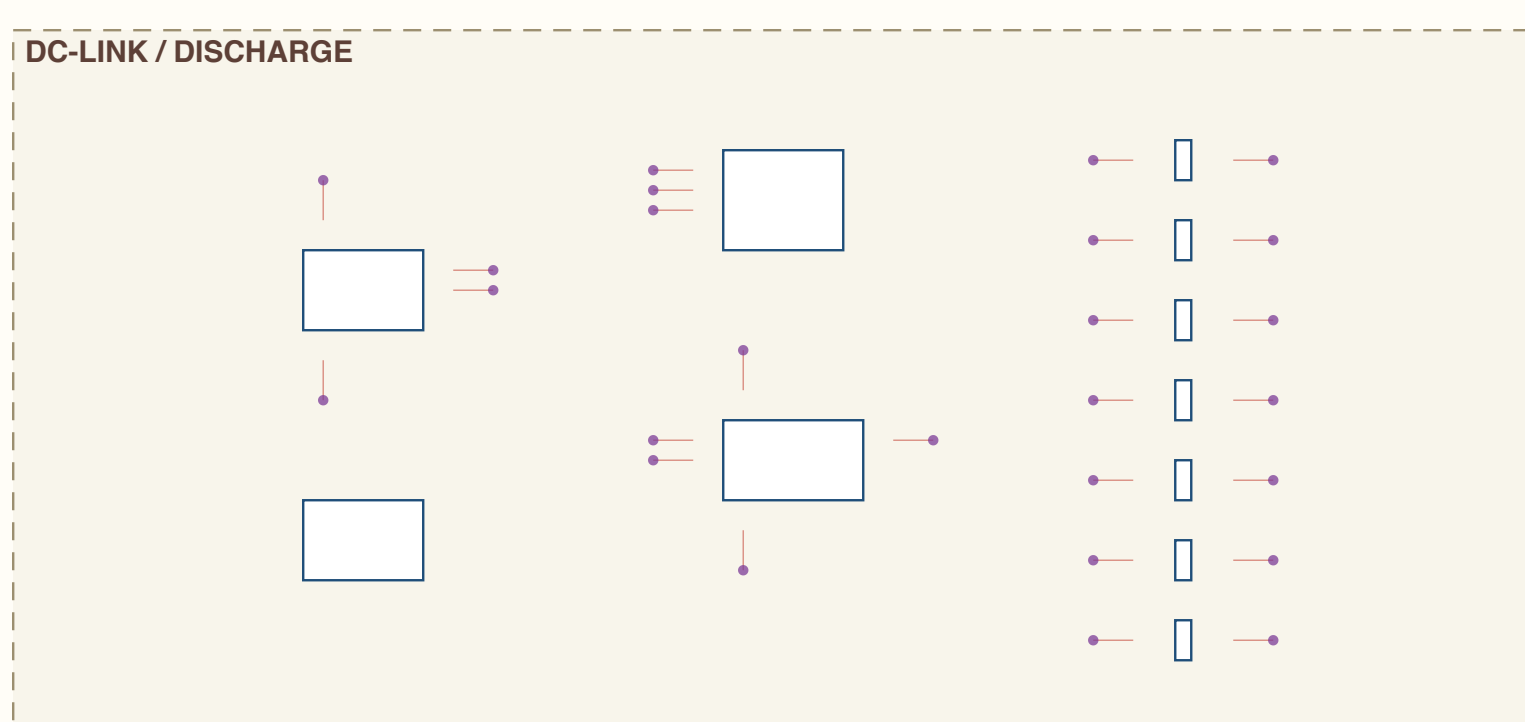
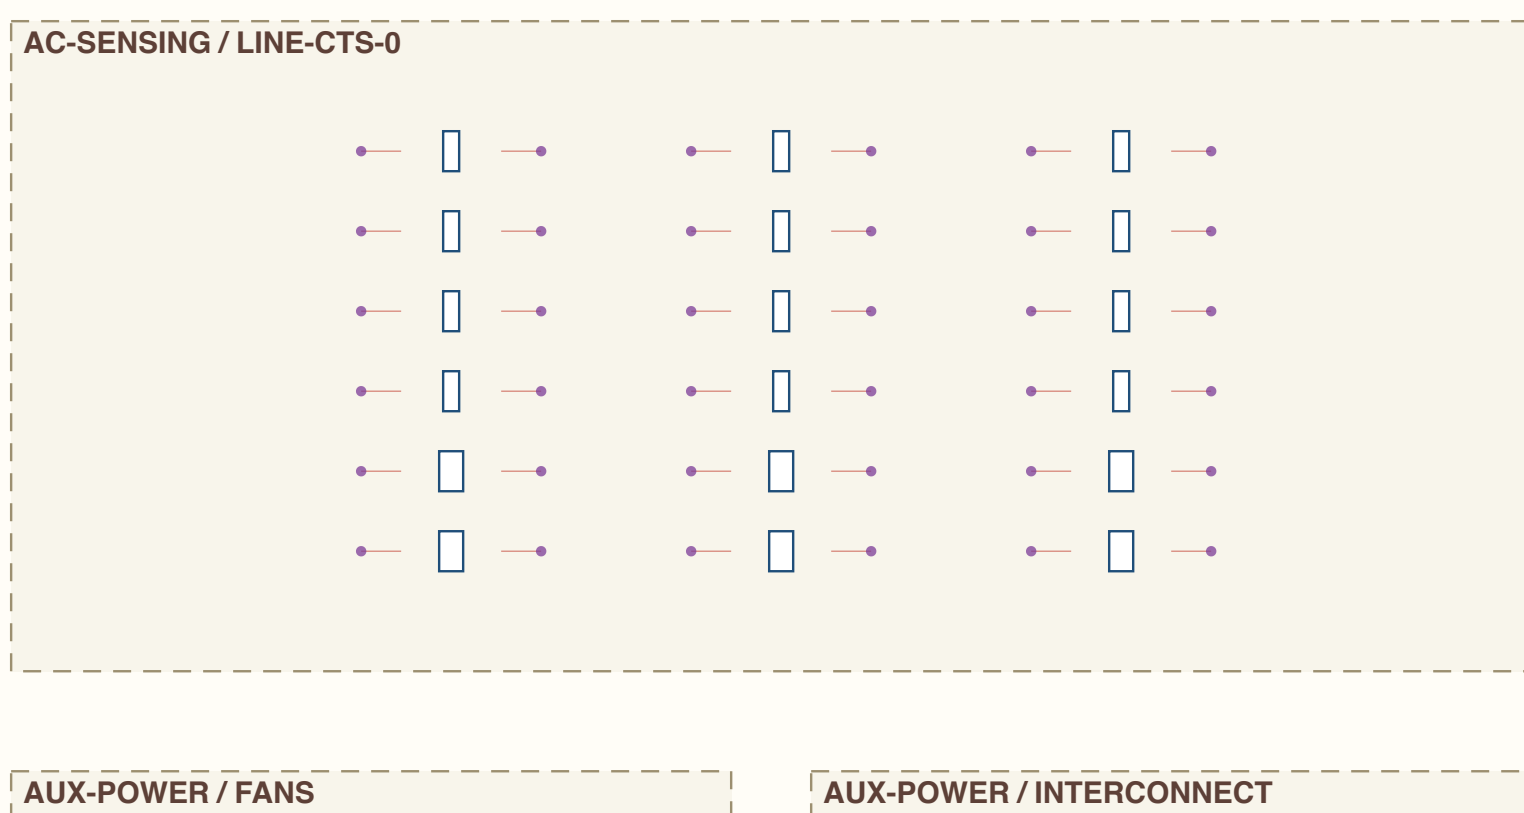
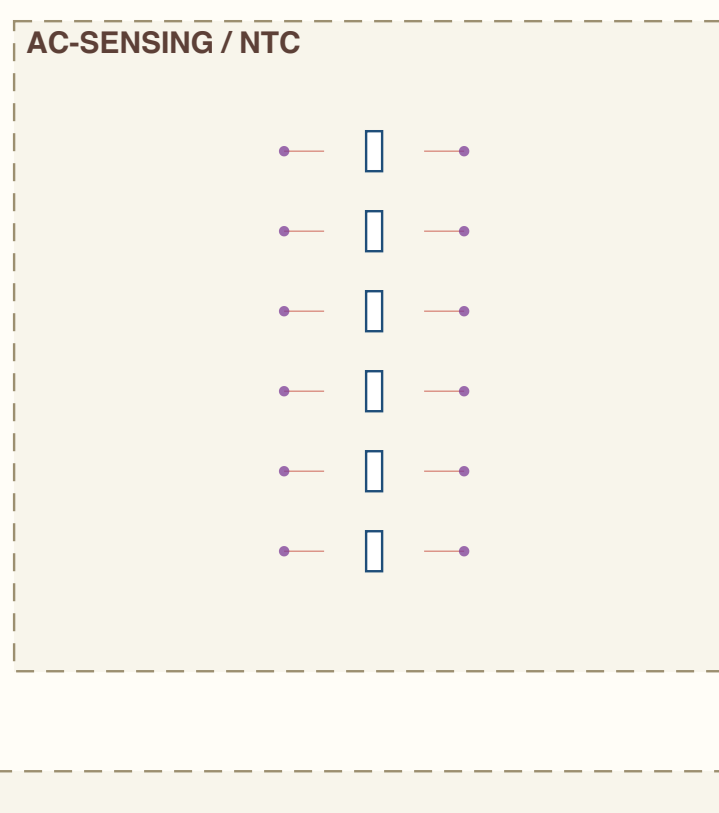
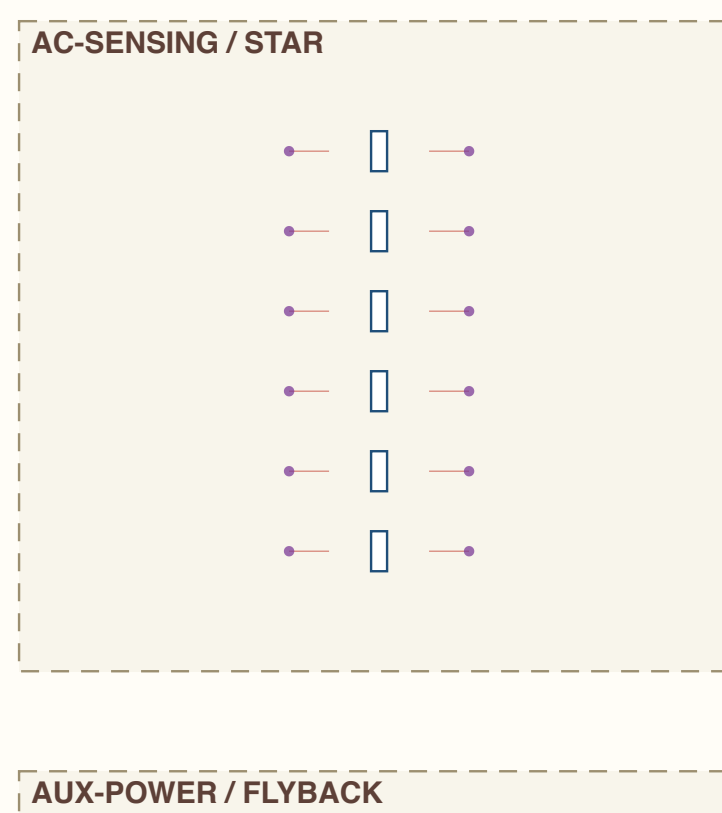
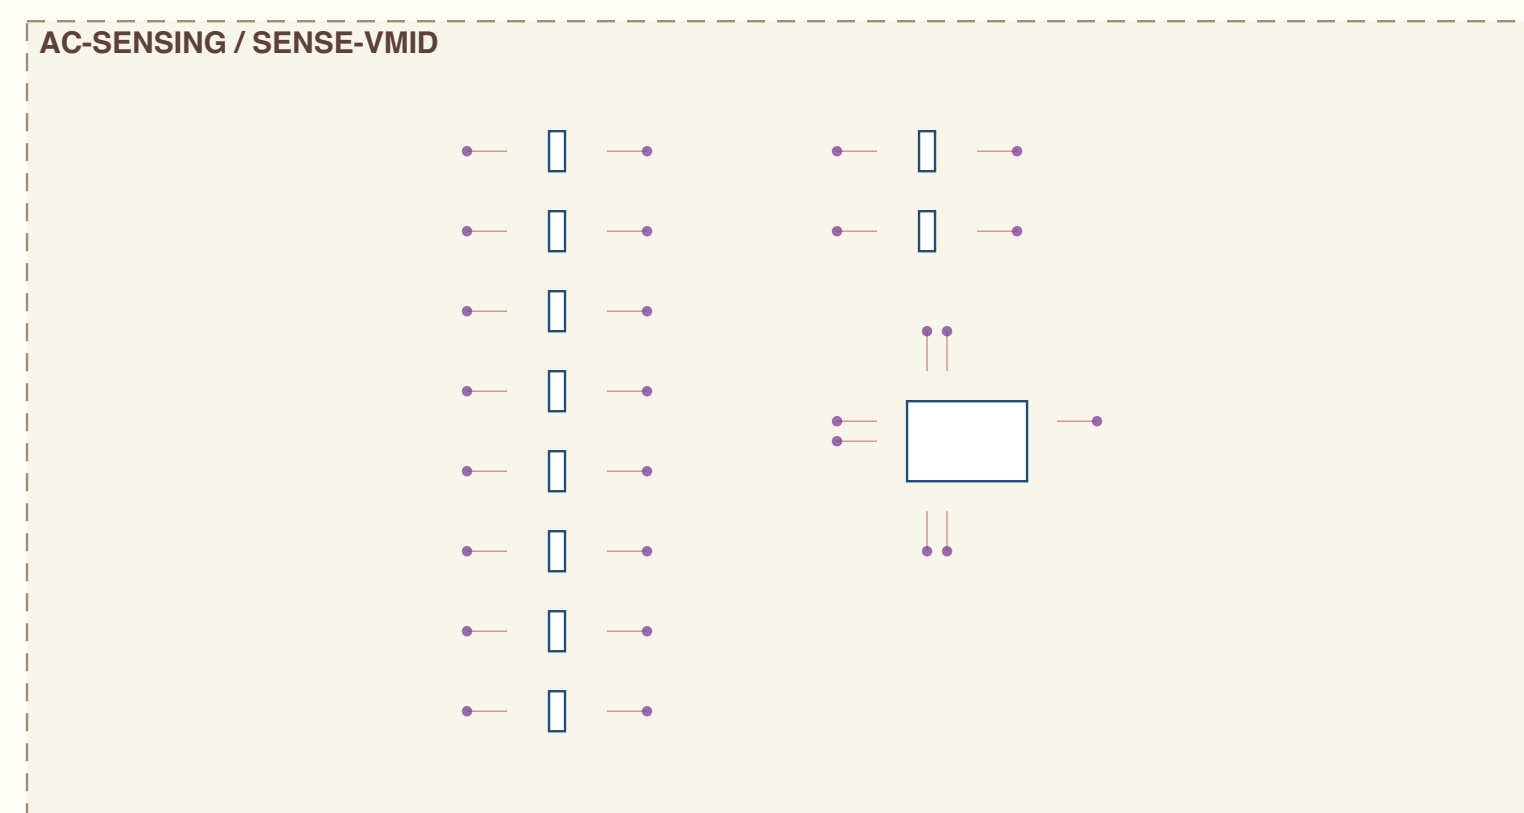
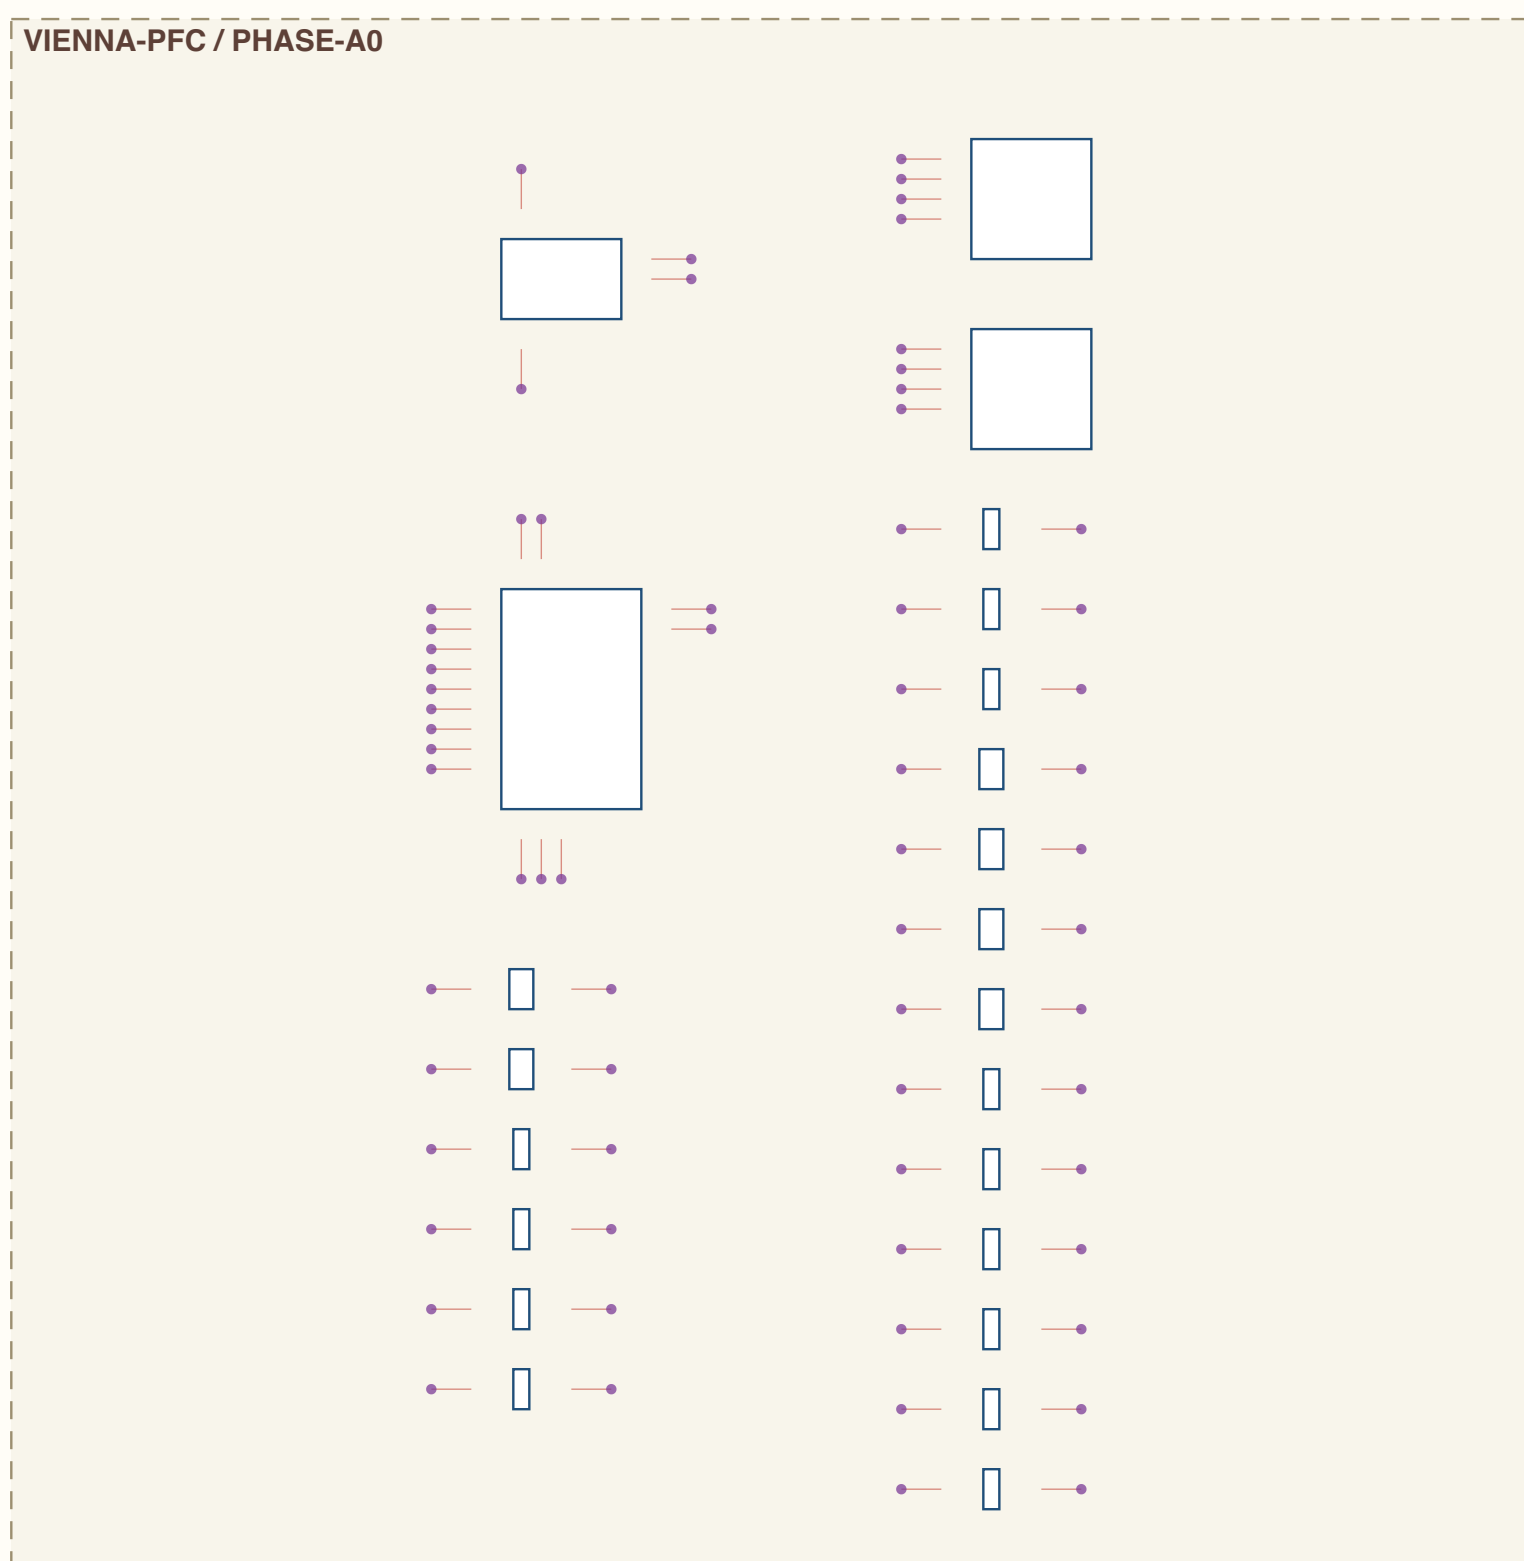
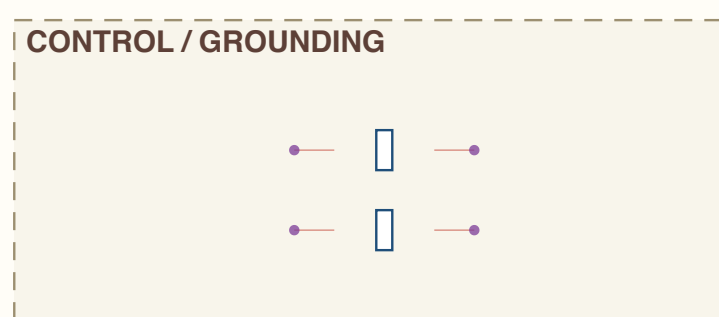
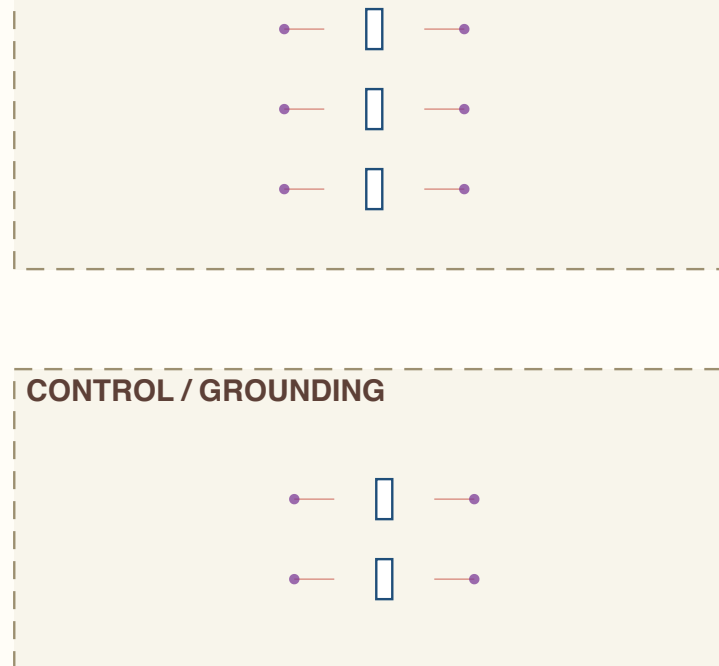
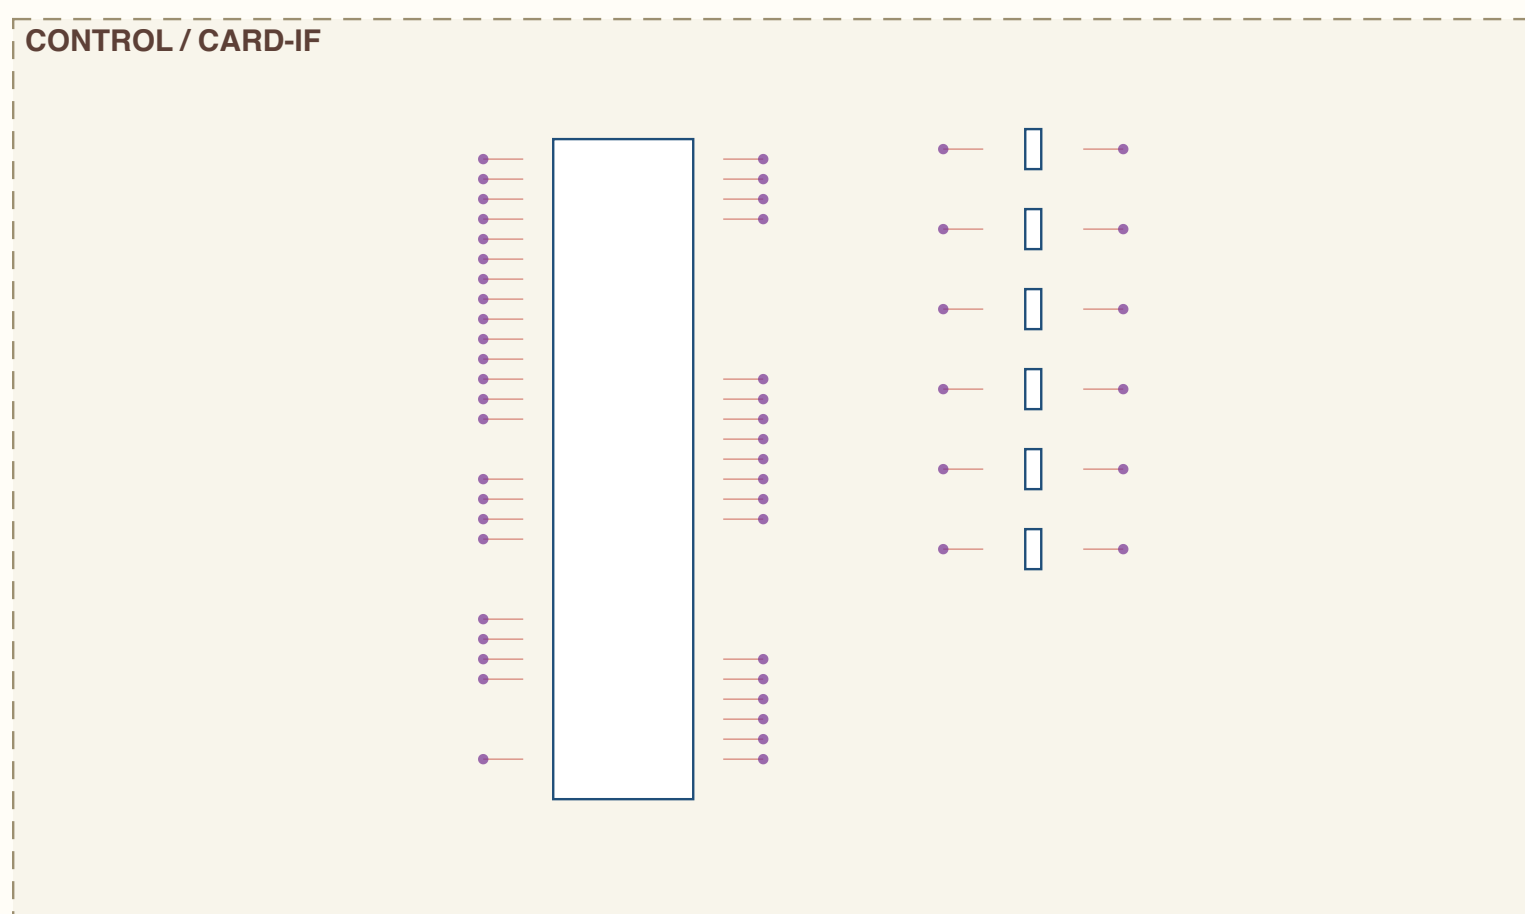
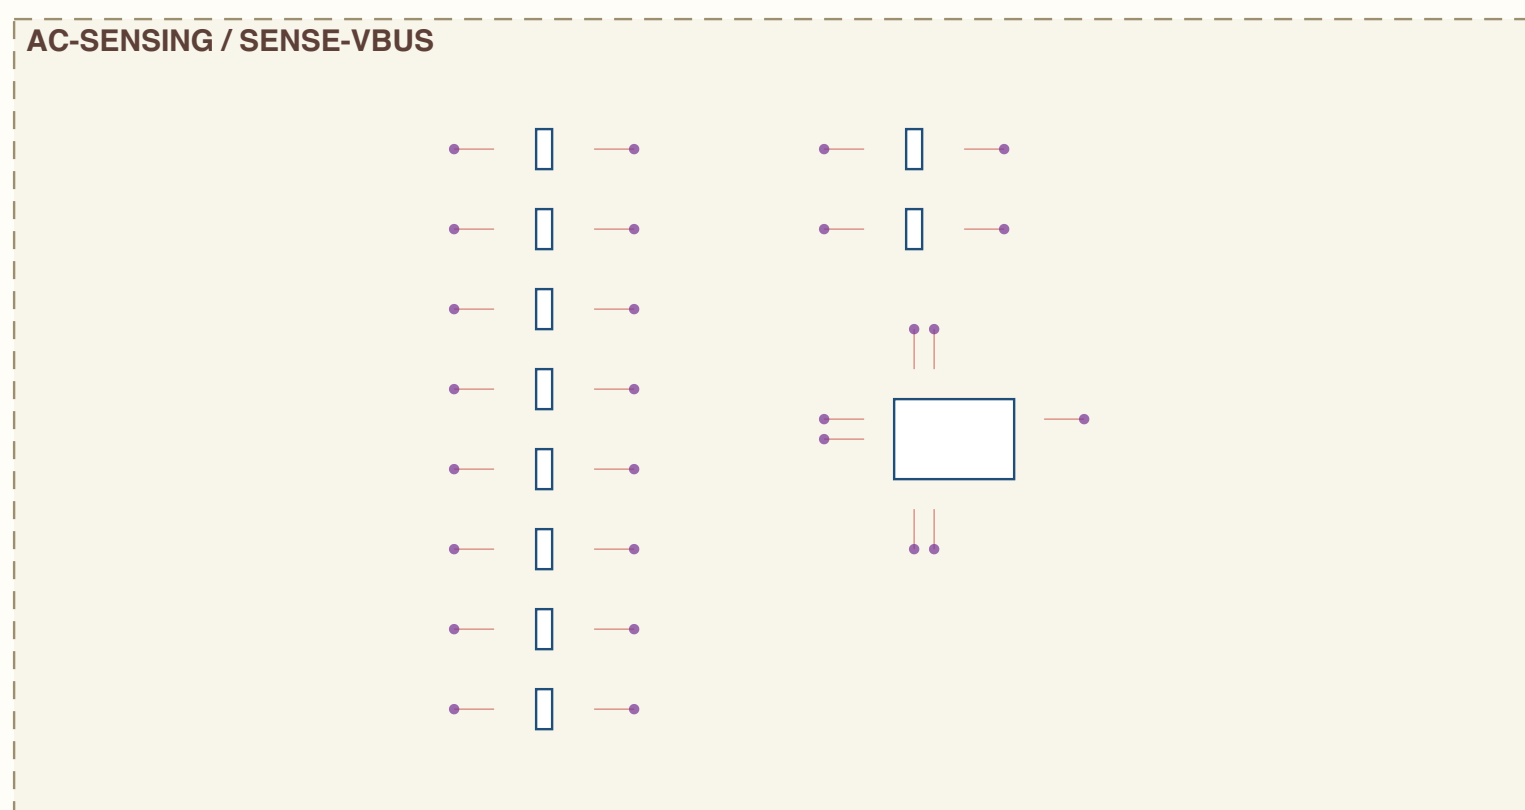
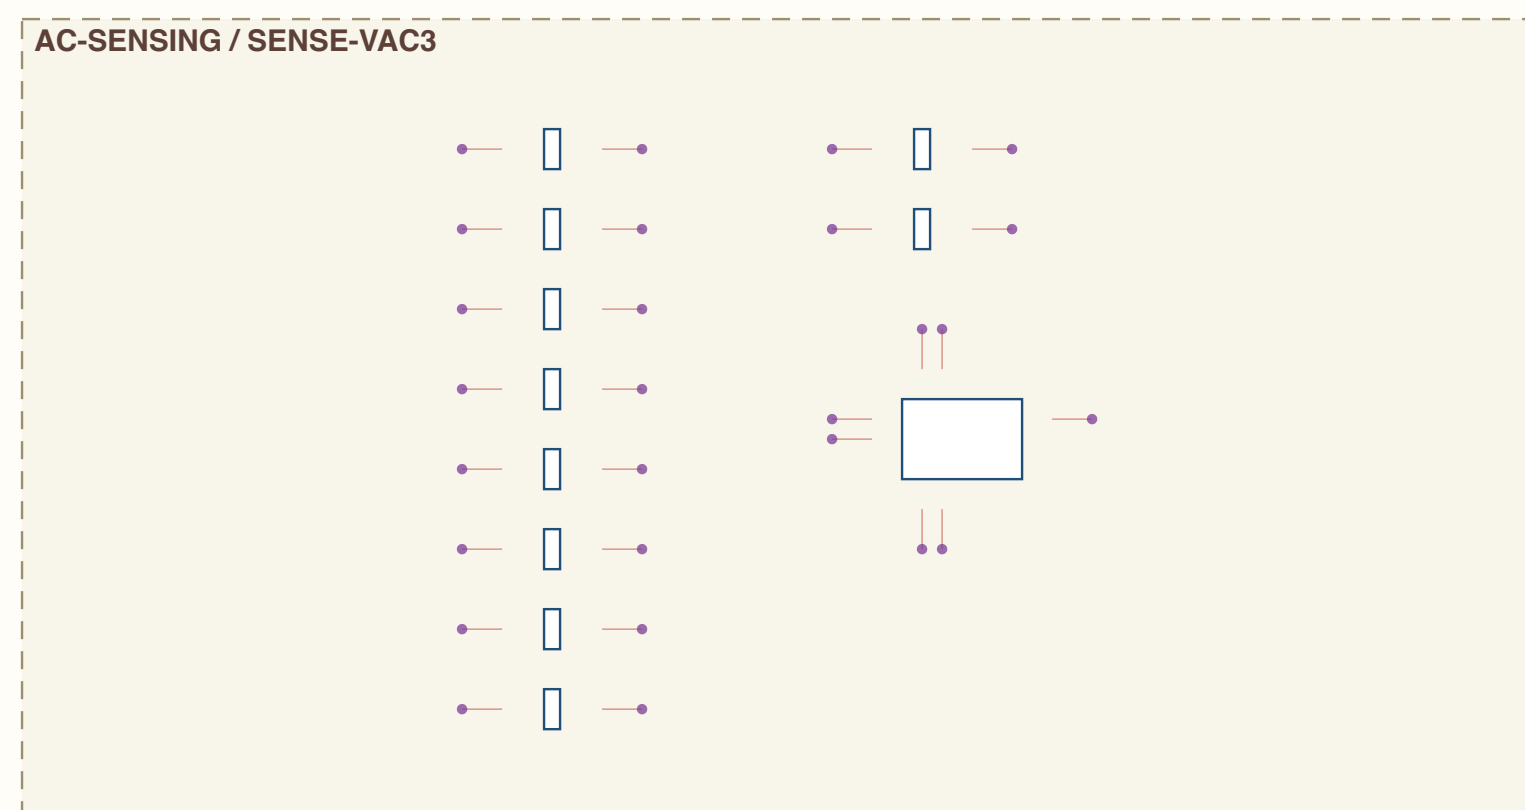
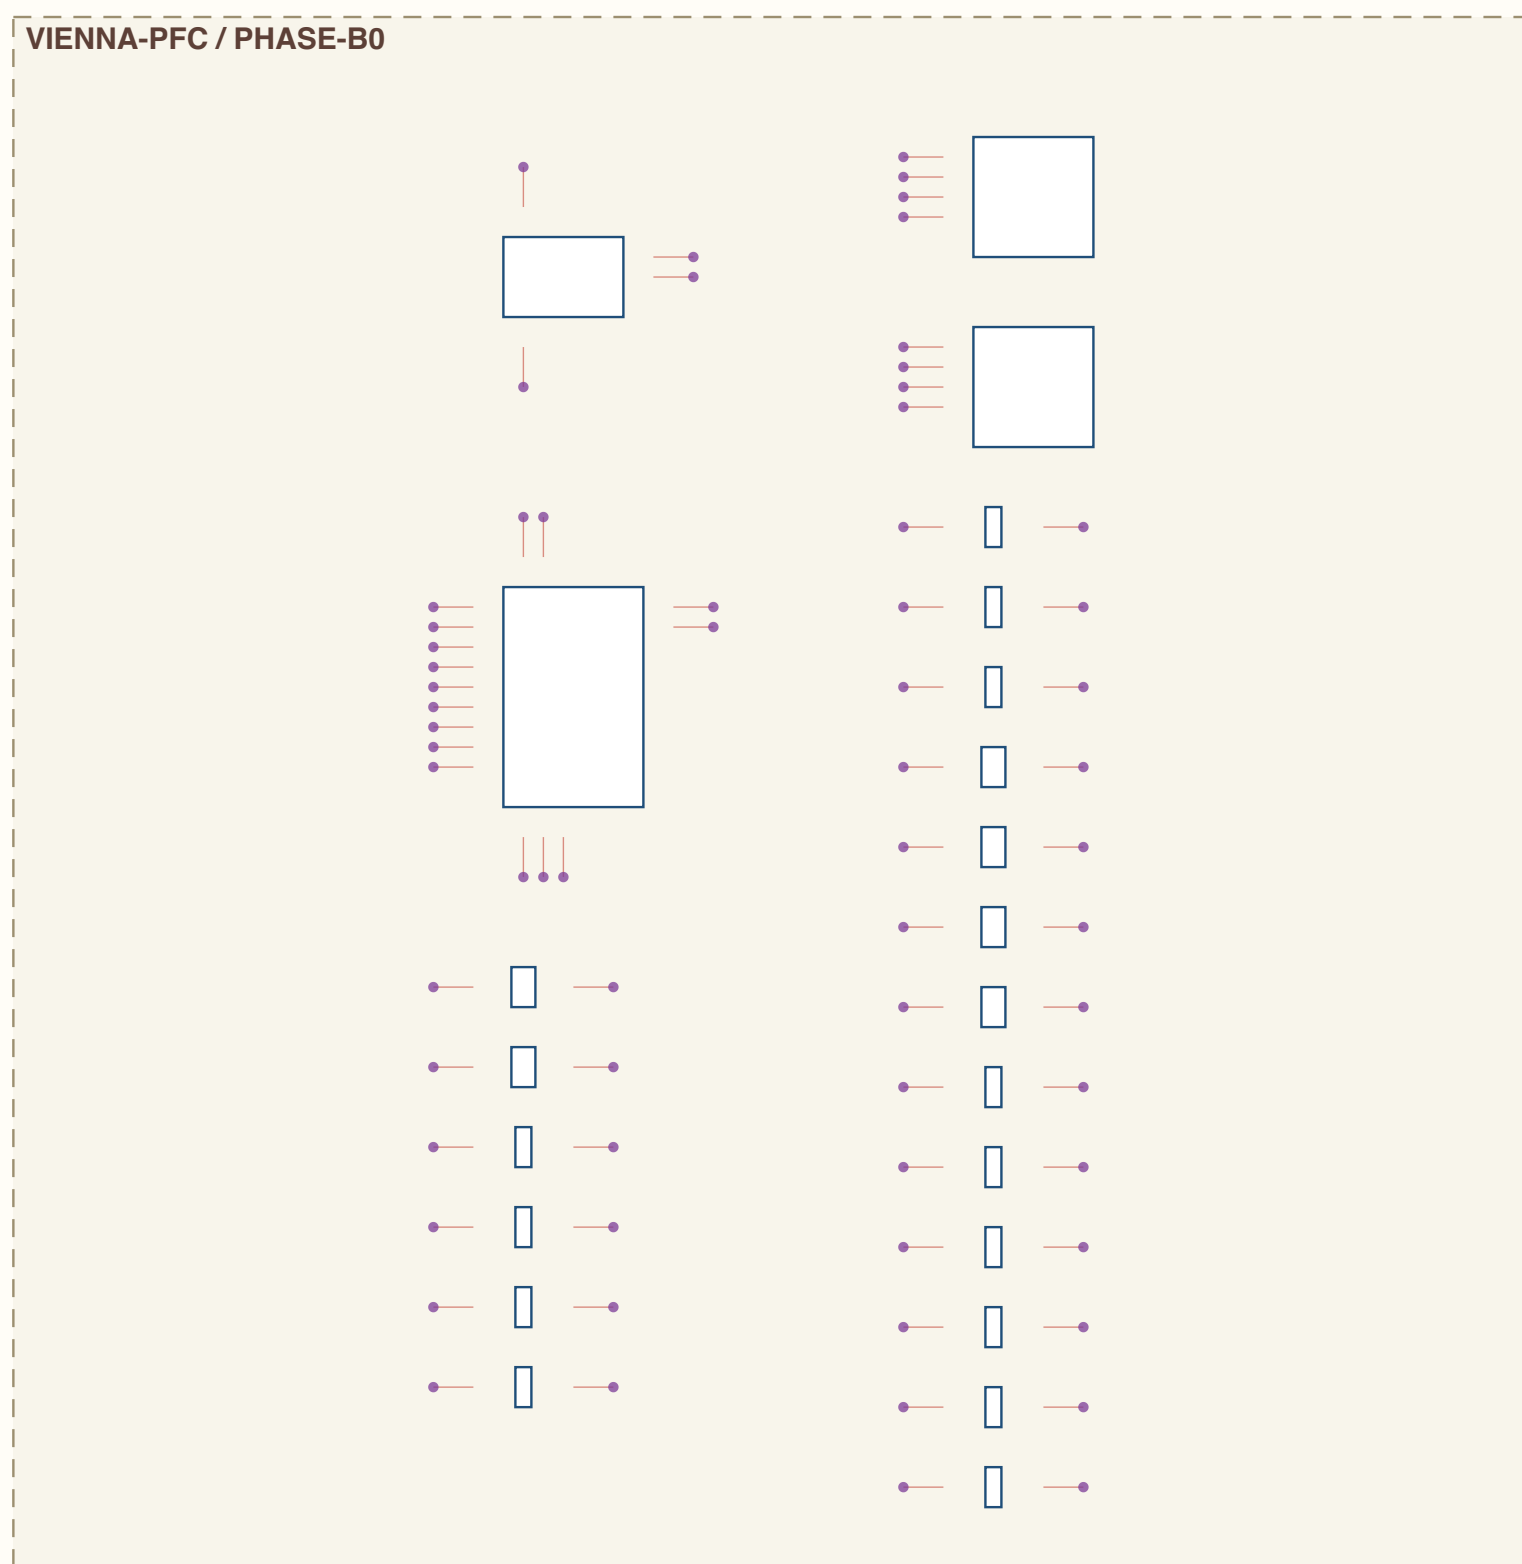
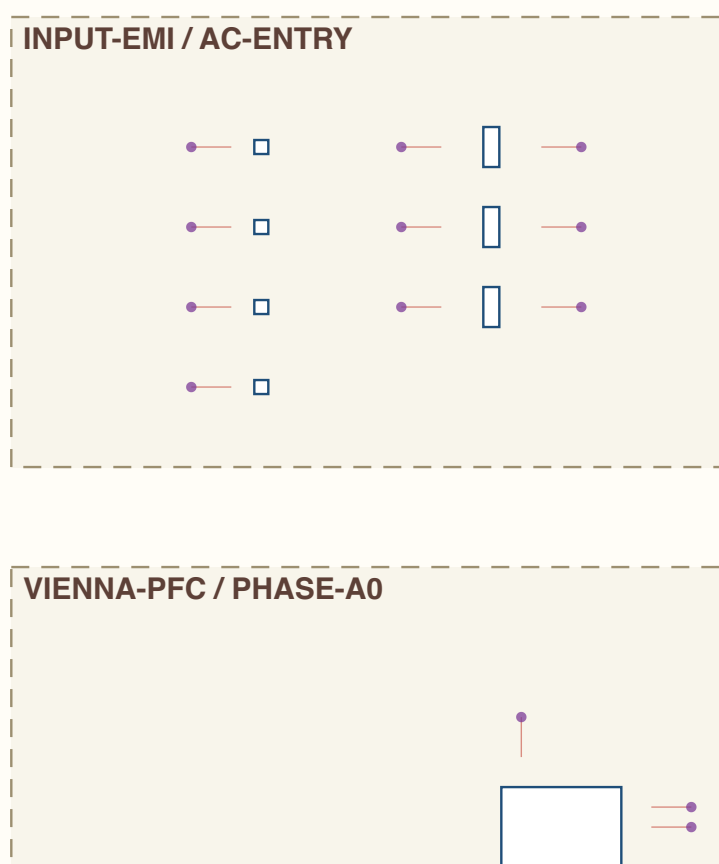
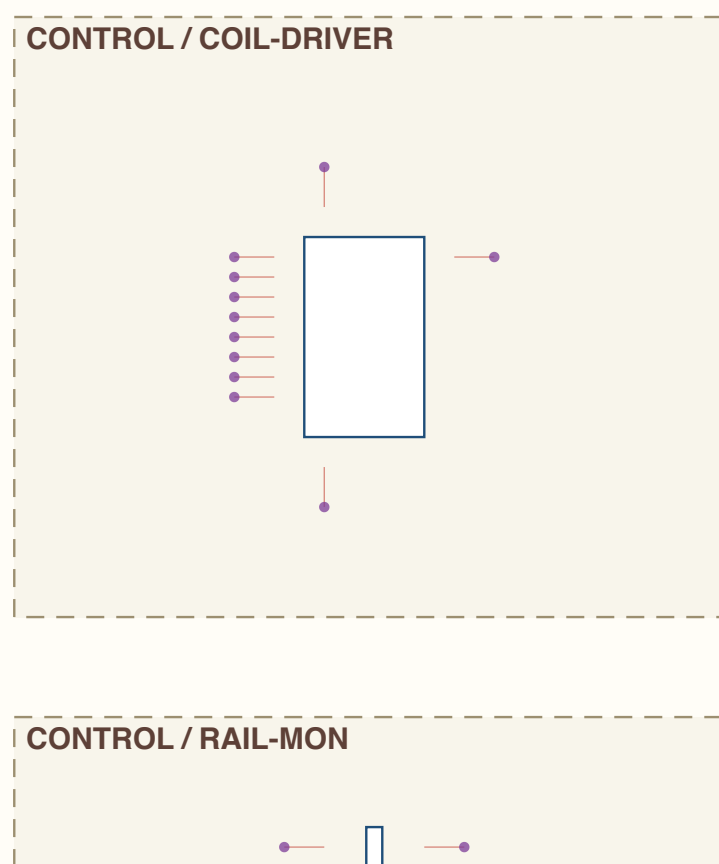
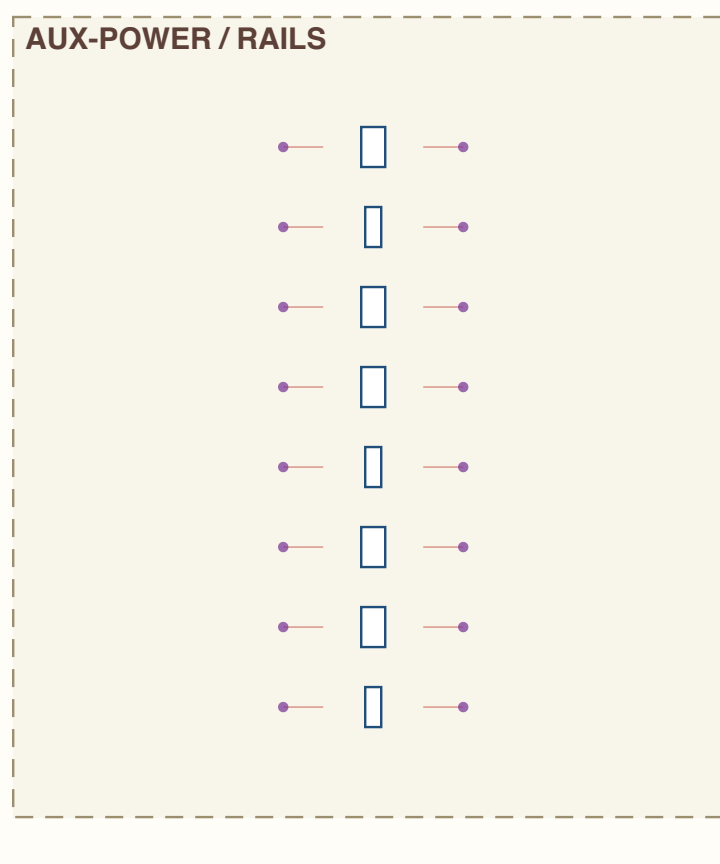
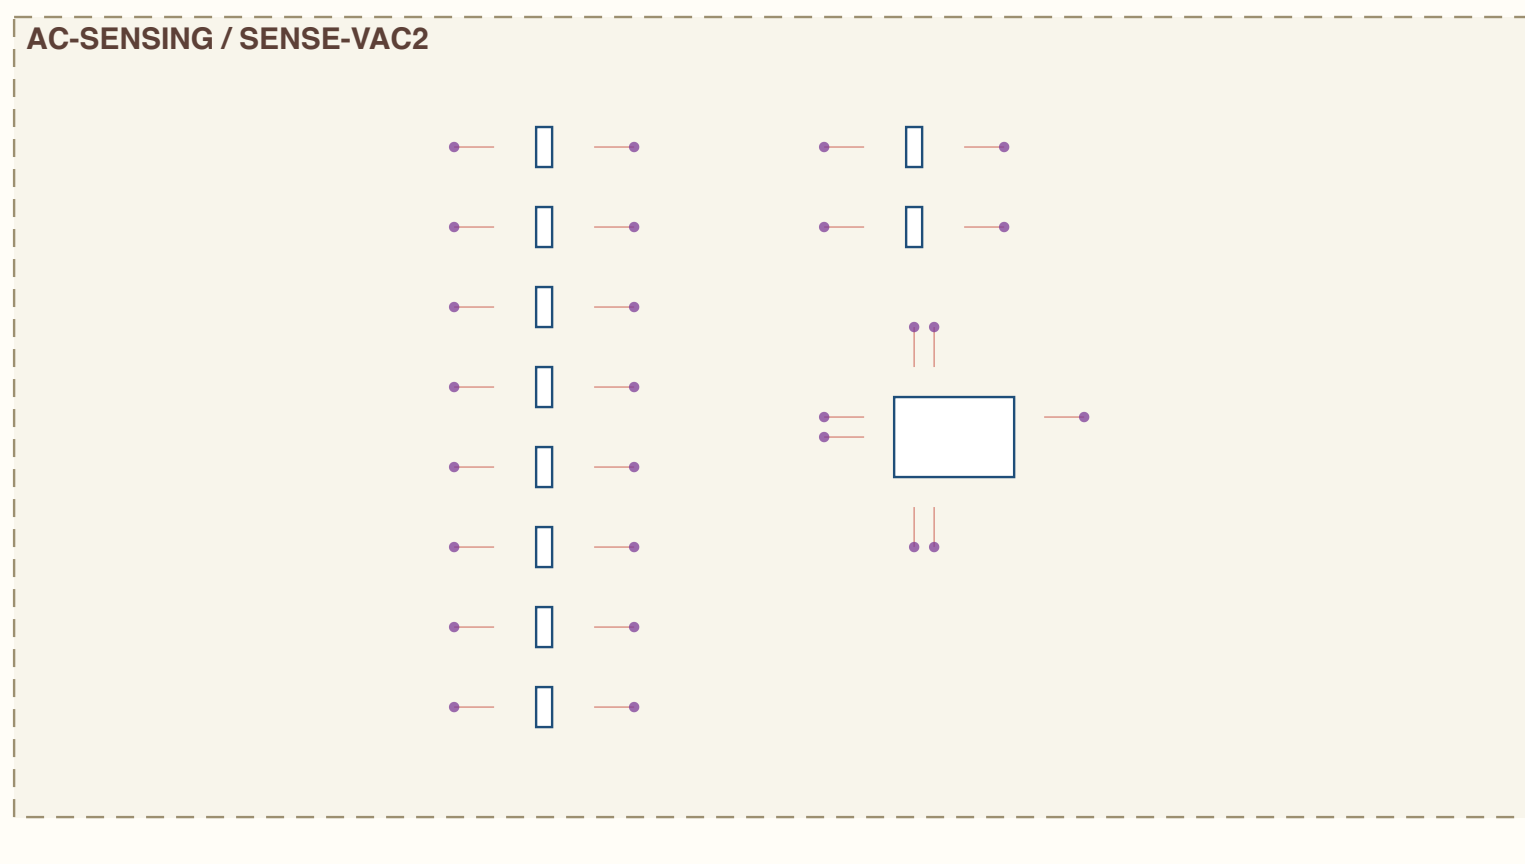
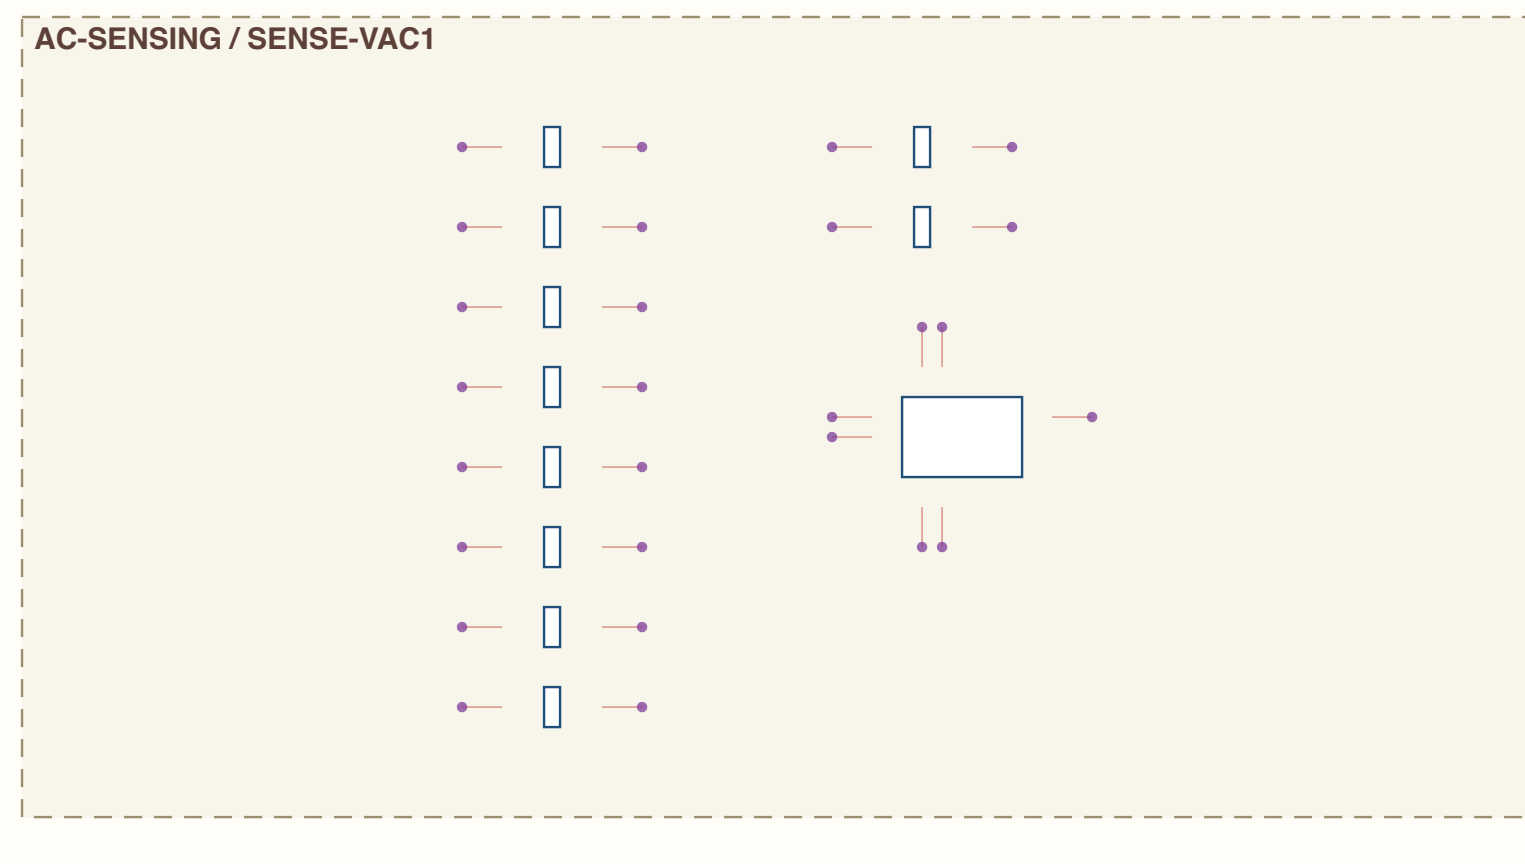


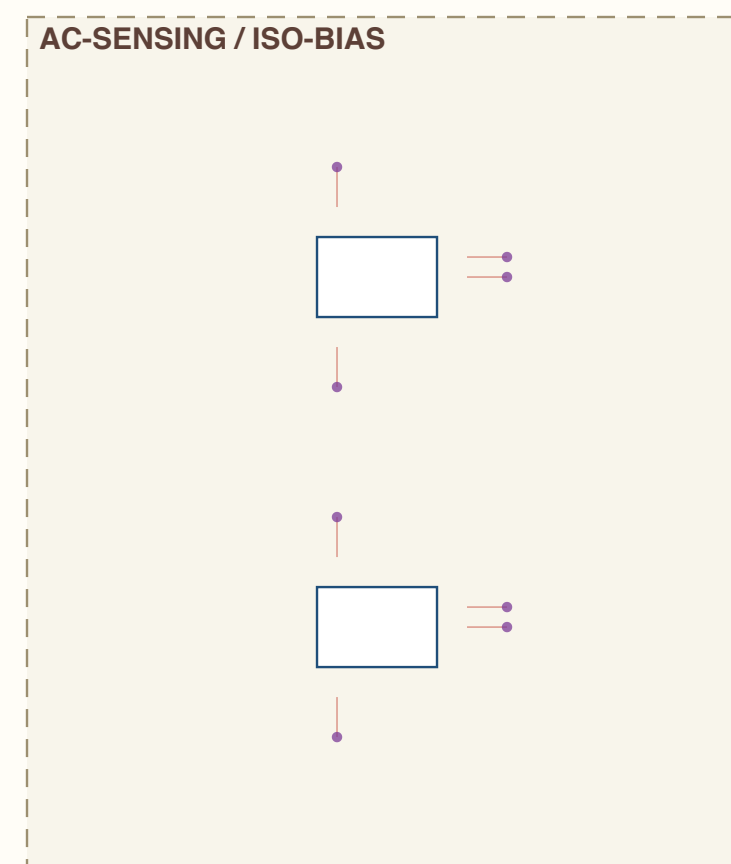

SHEET INDEX

60 kW AC-DC (lower) - 1 of 3

AC-SENSING - 10 sections

VIENNA-PFC - 6 sections

AUX-POWER - 4 sections

CONTROL - 4 sections

DC-LINK - 4 sections

INPUT-EMI - 4 sections

rev D.3 - 32 sections - 370 components

NET NAMING

internal junctions are named for what they join

U<ref> <PIN> node at that IC pin e.g. UIVOA VINP

R<stem> M midpoint of a series pair e.g. RBALTA M

R<stem> <nm> tap between R<stem>n/m e.g. RV1D 01

- all others are explicit design nets