
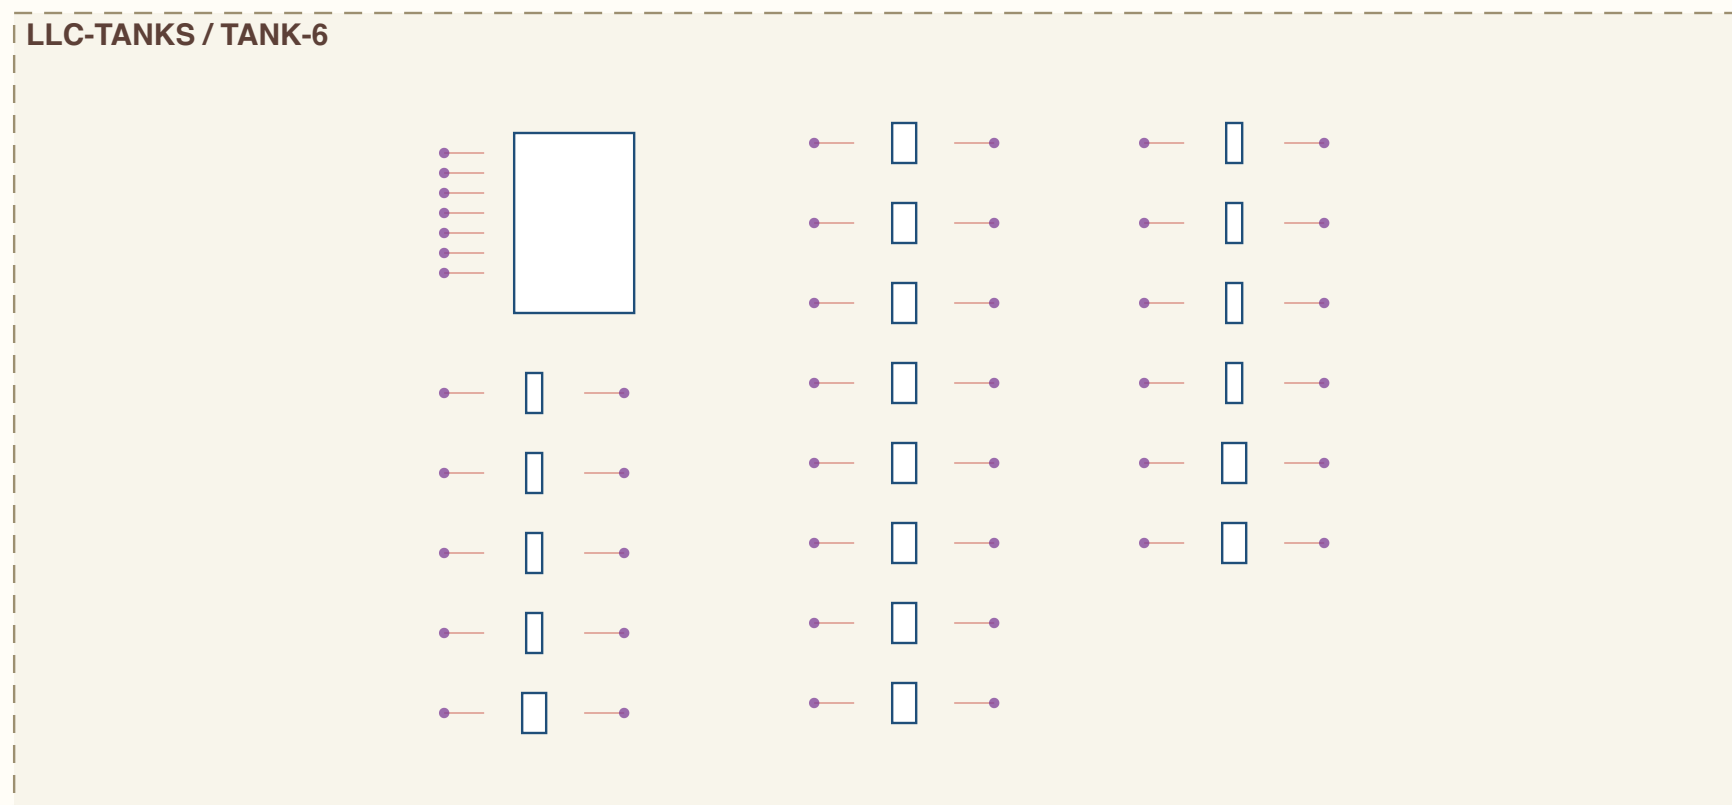
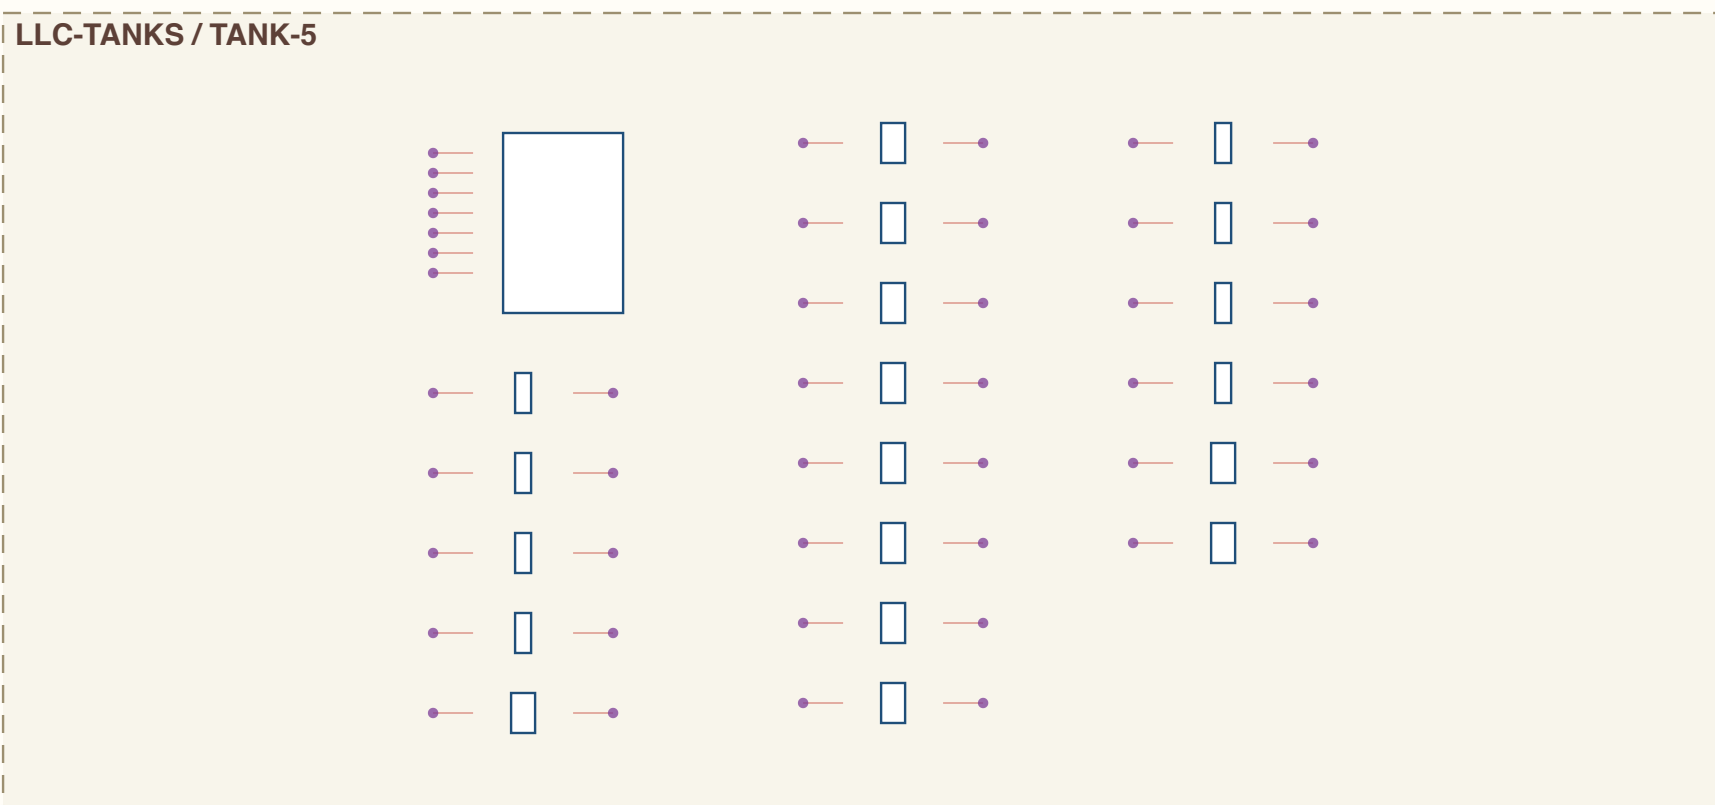
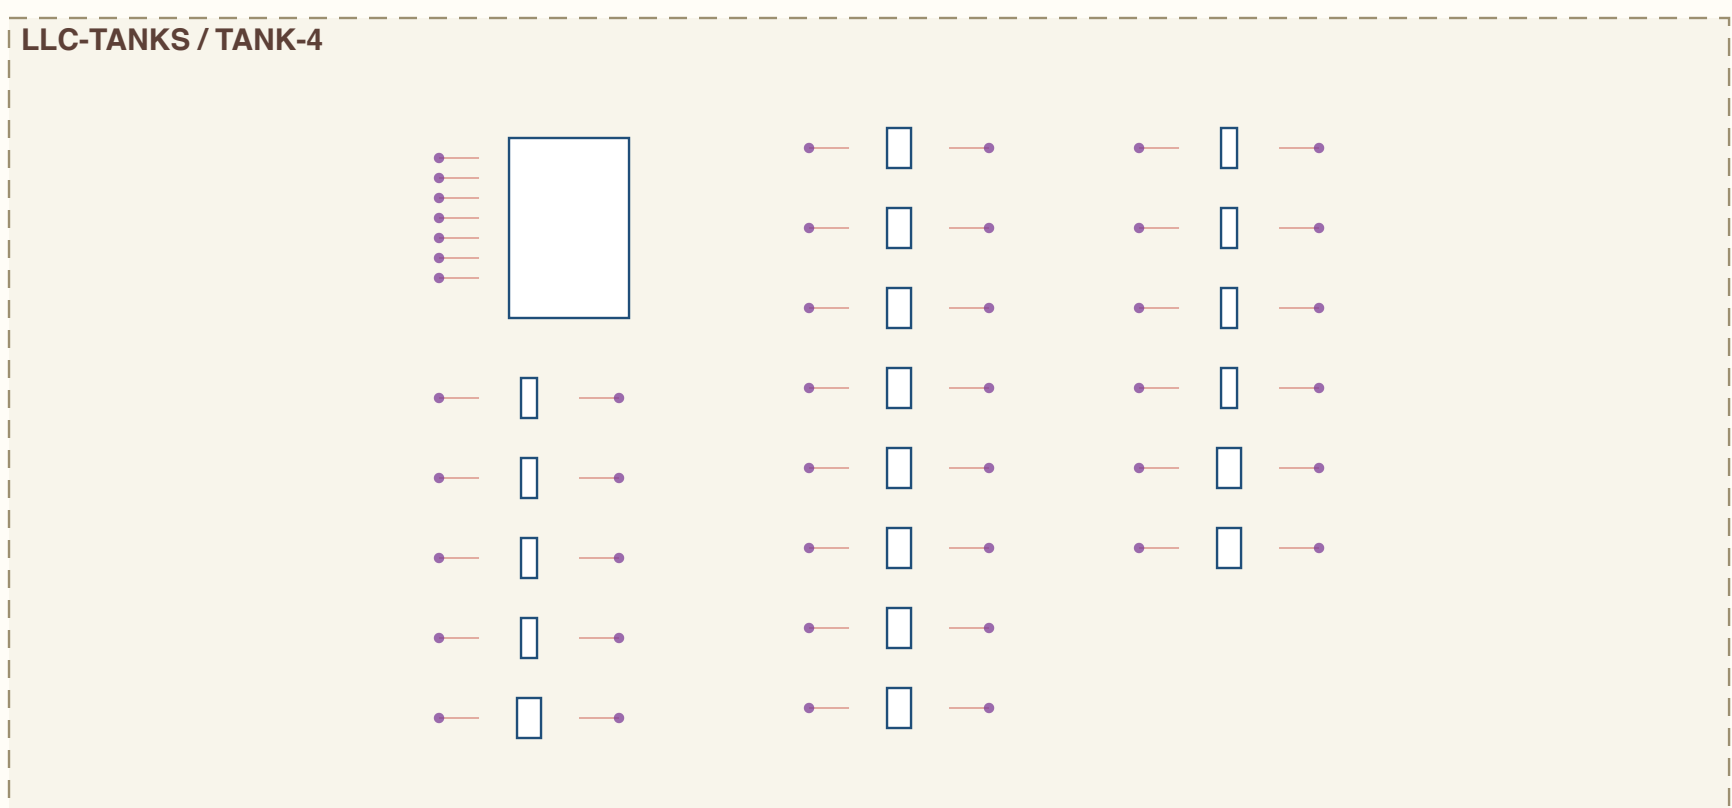
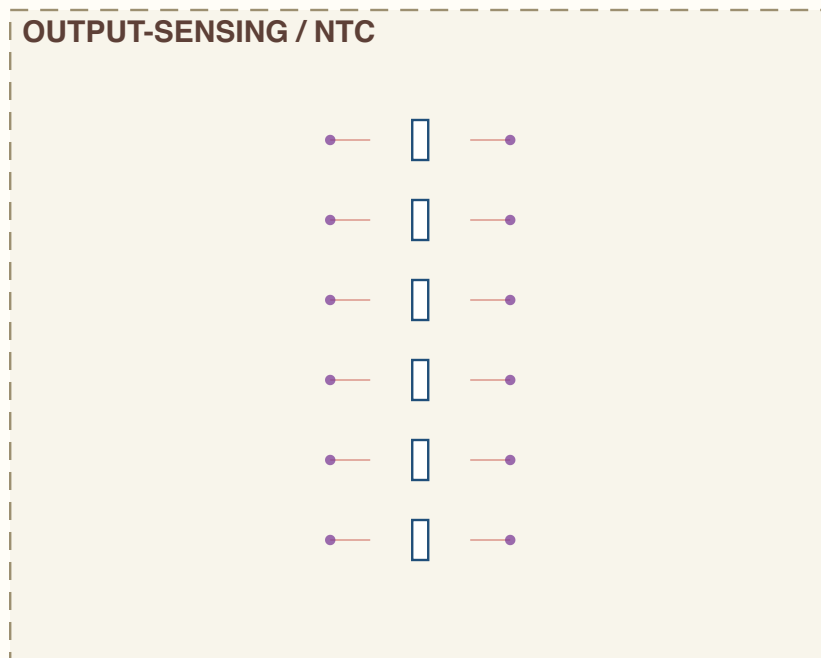
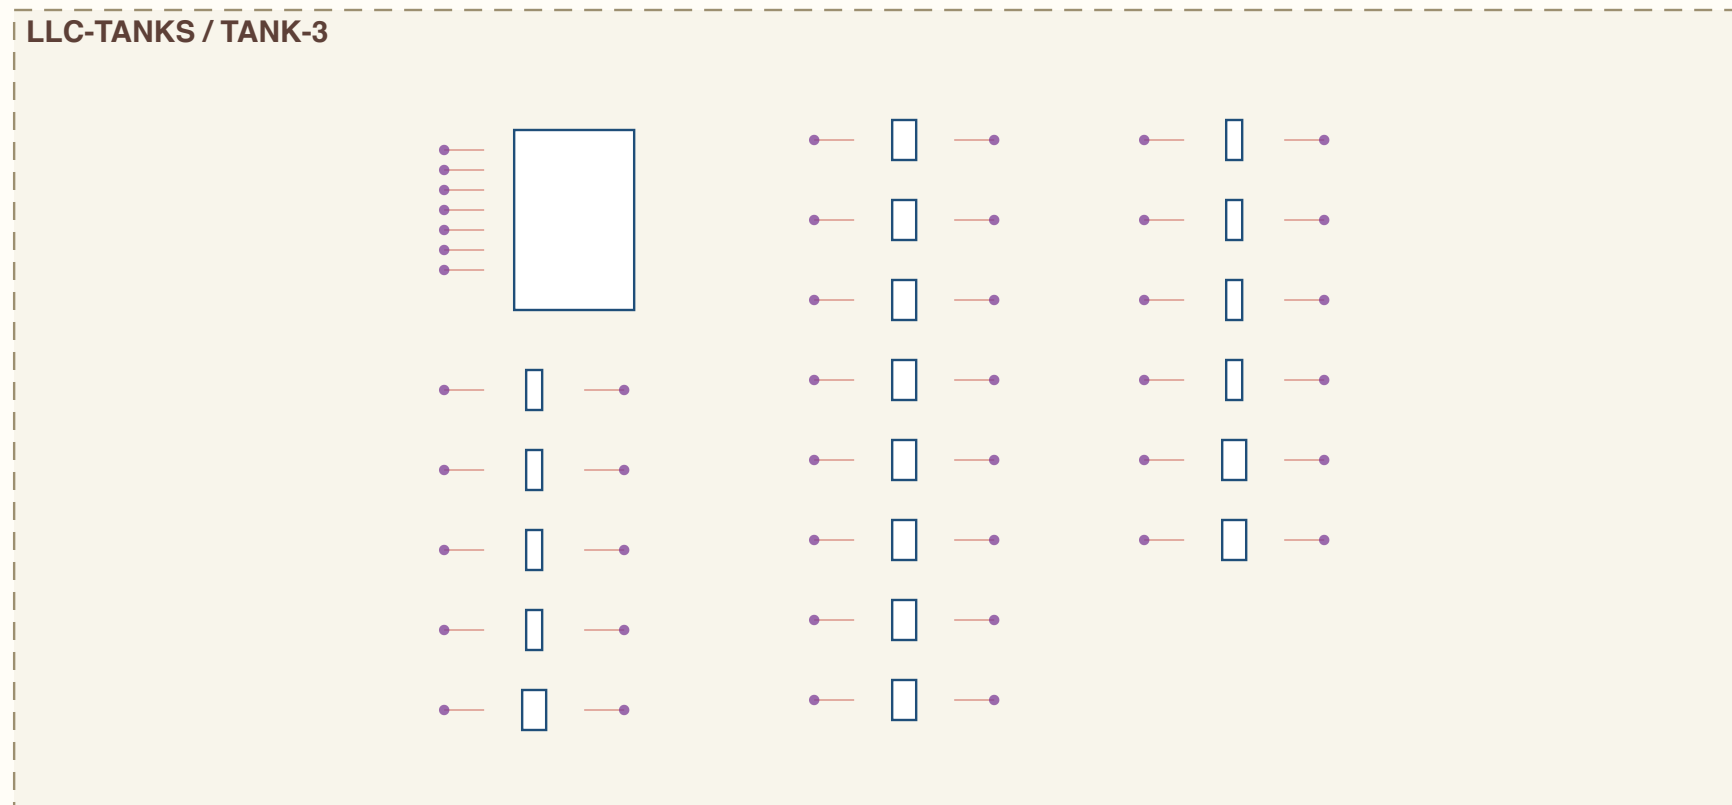
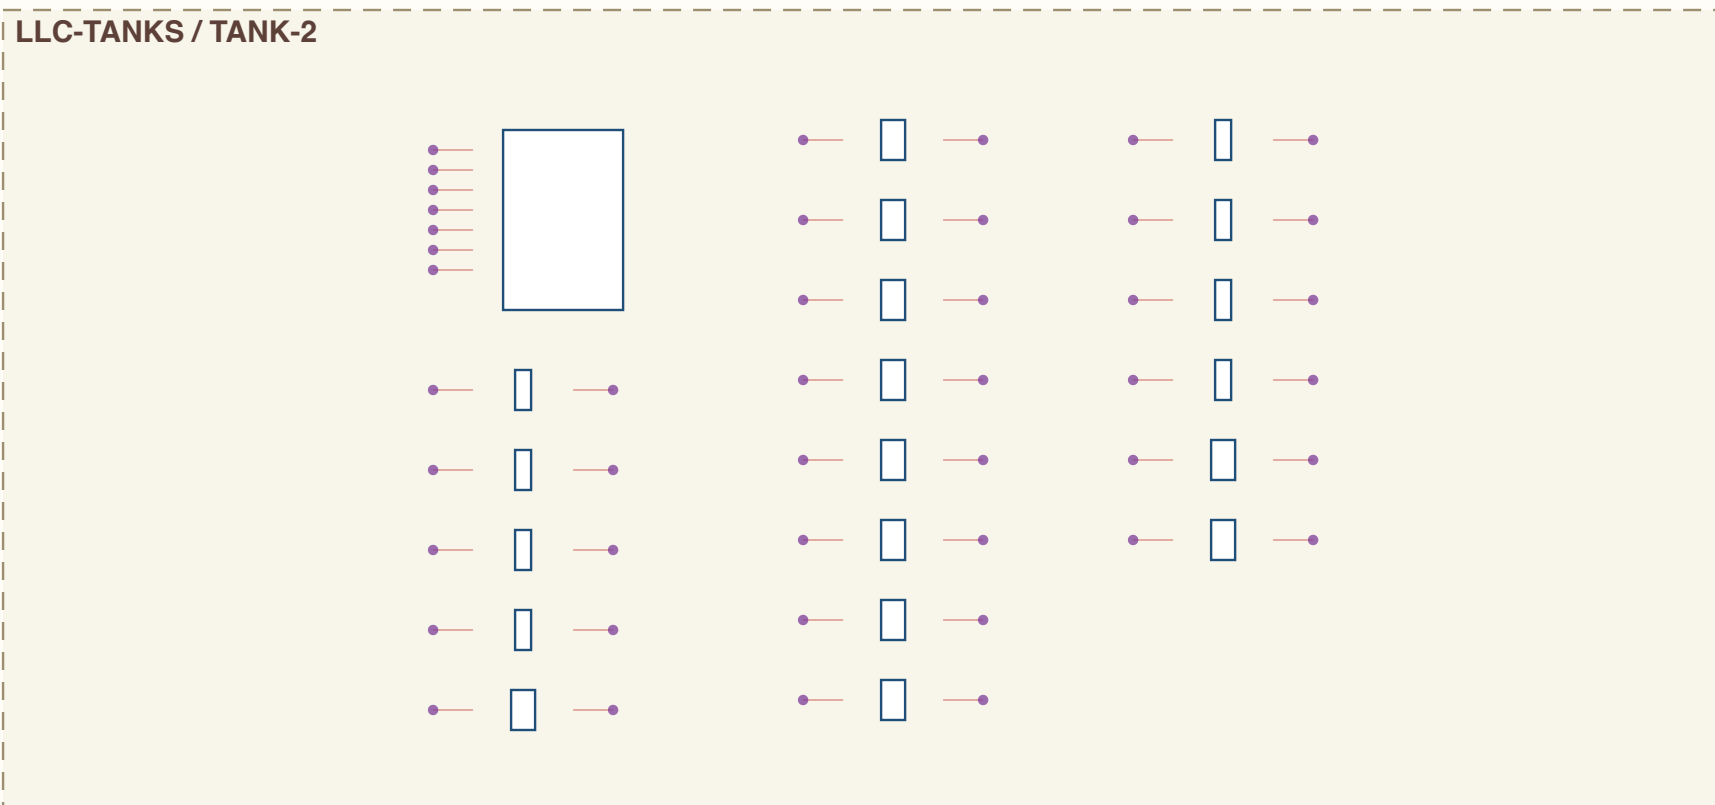
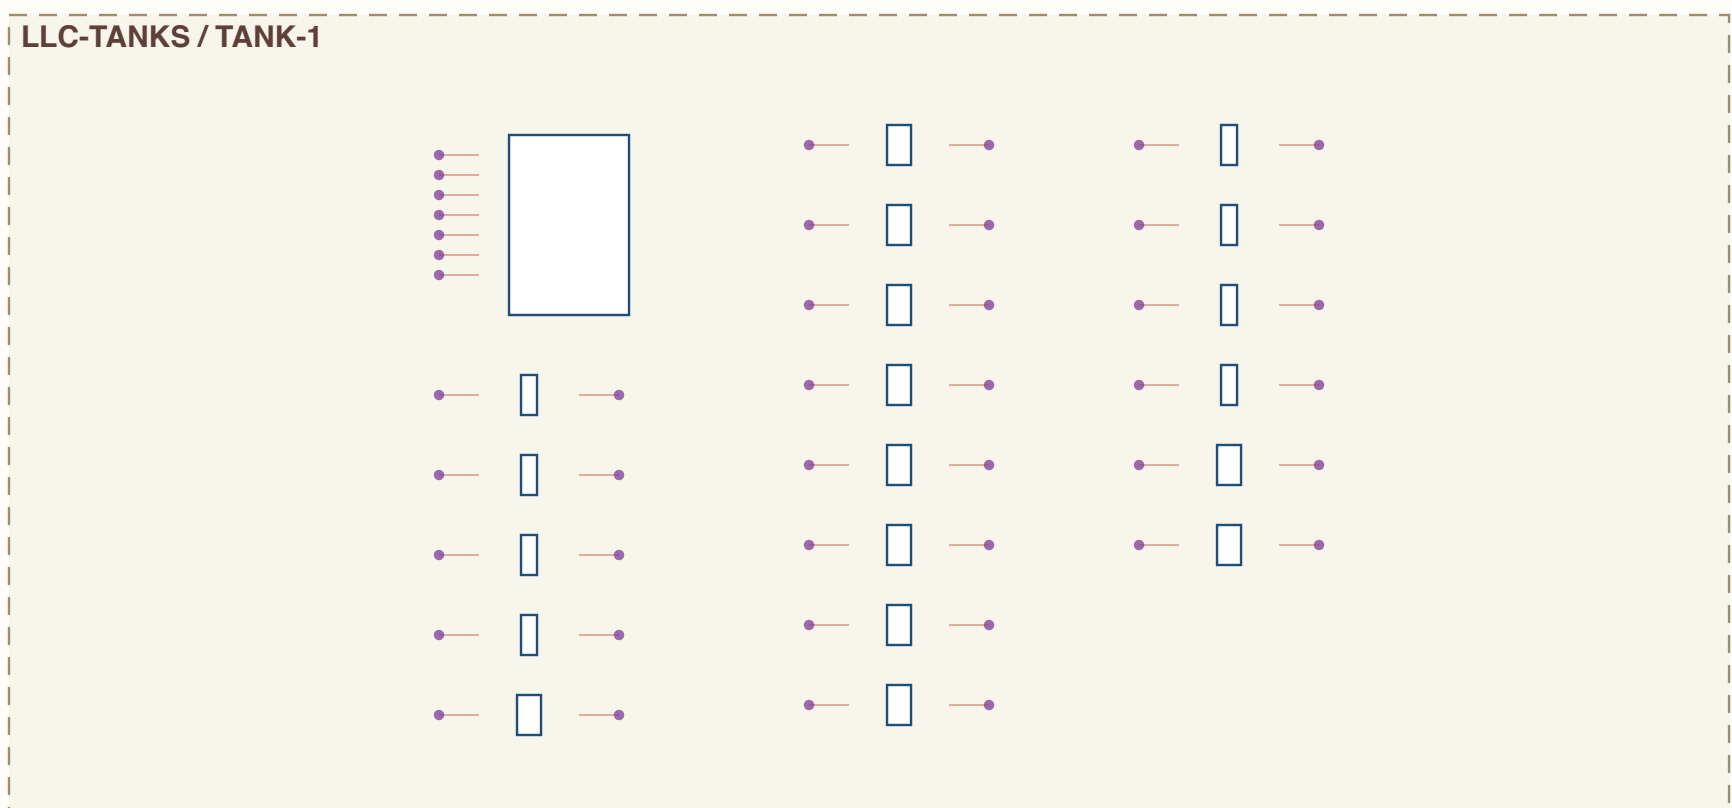
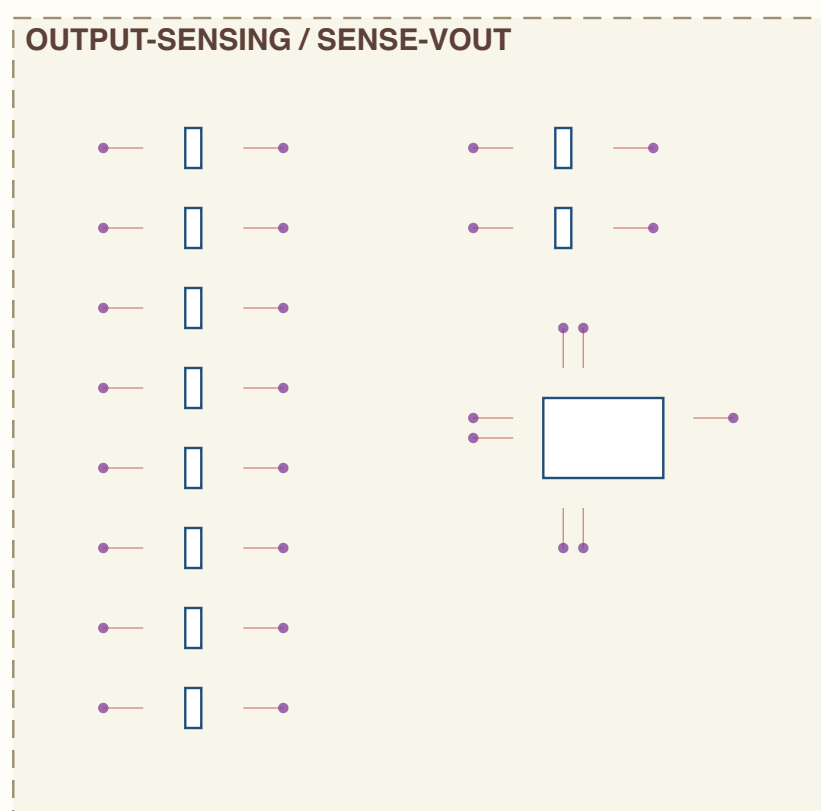
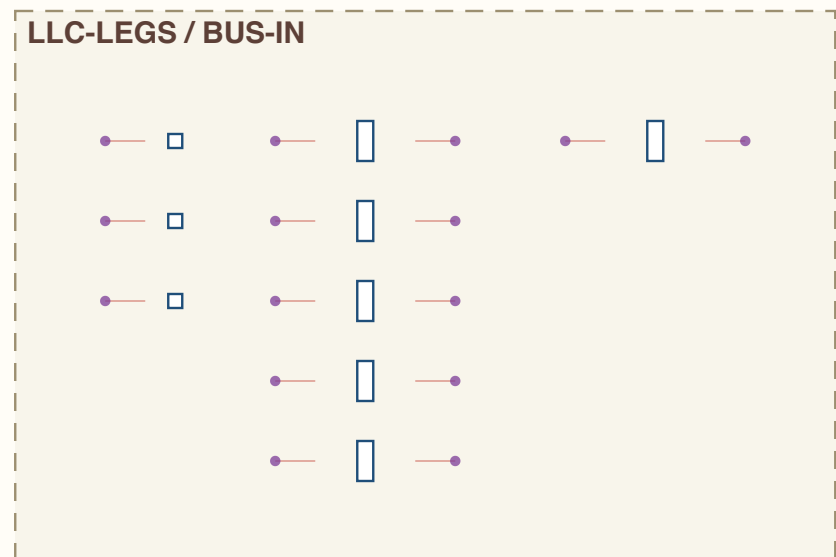
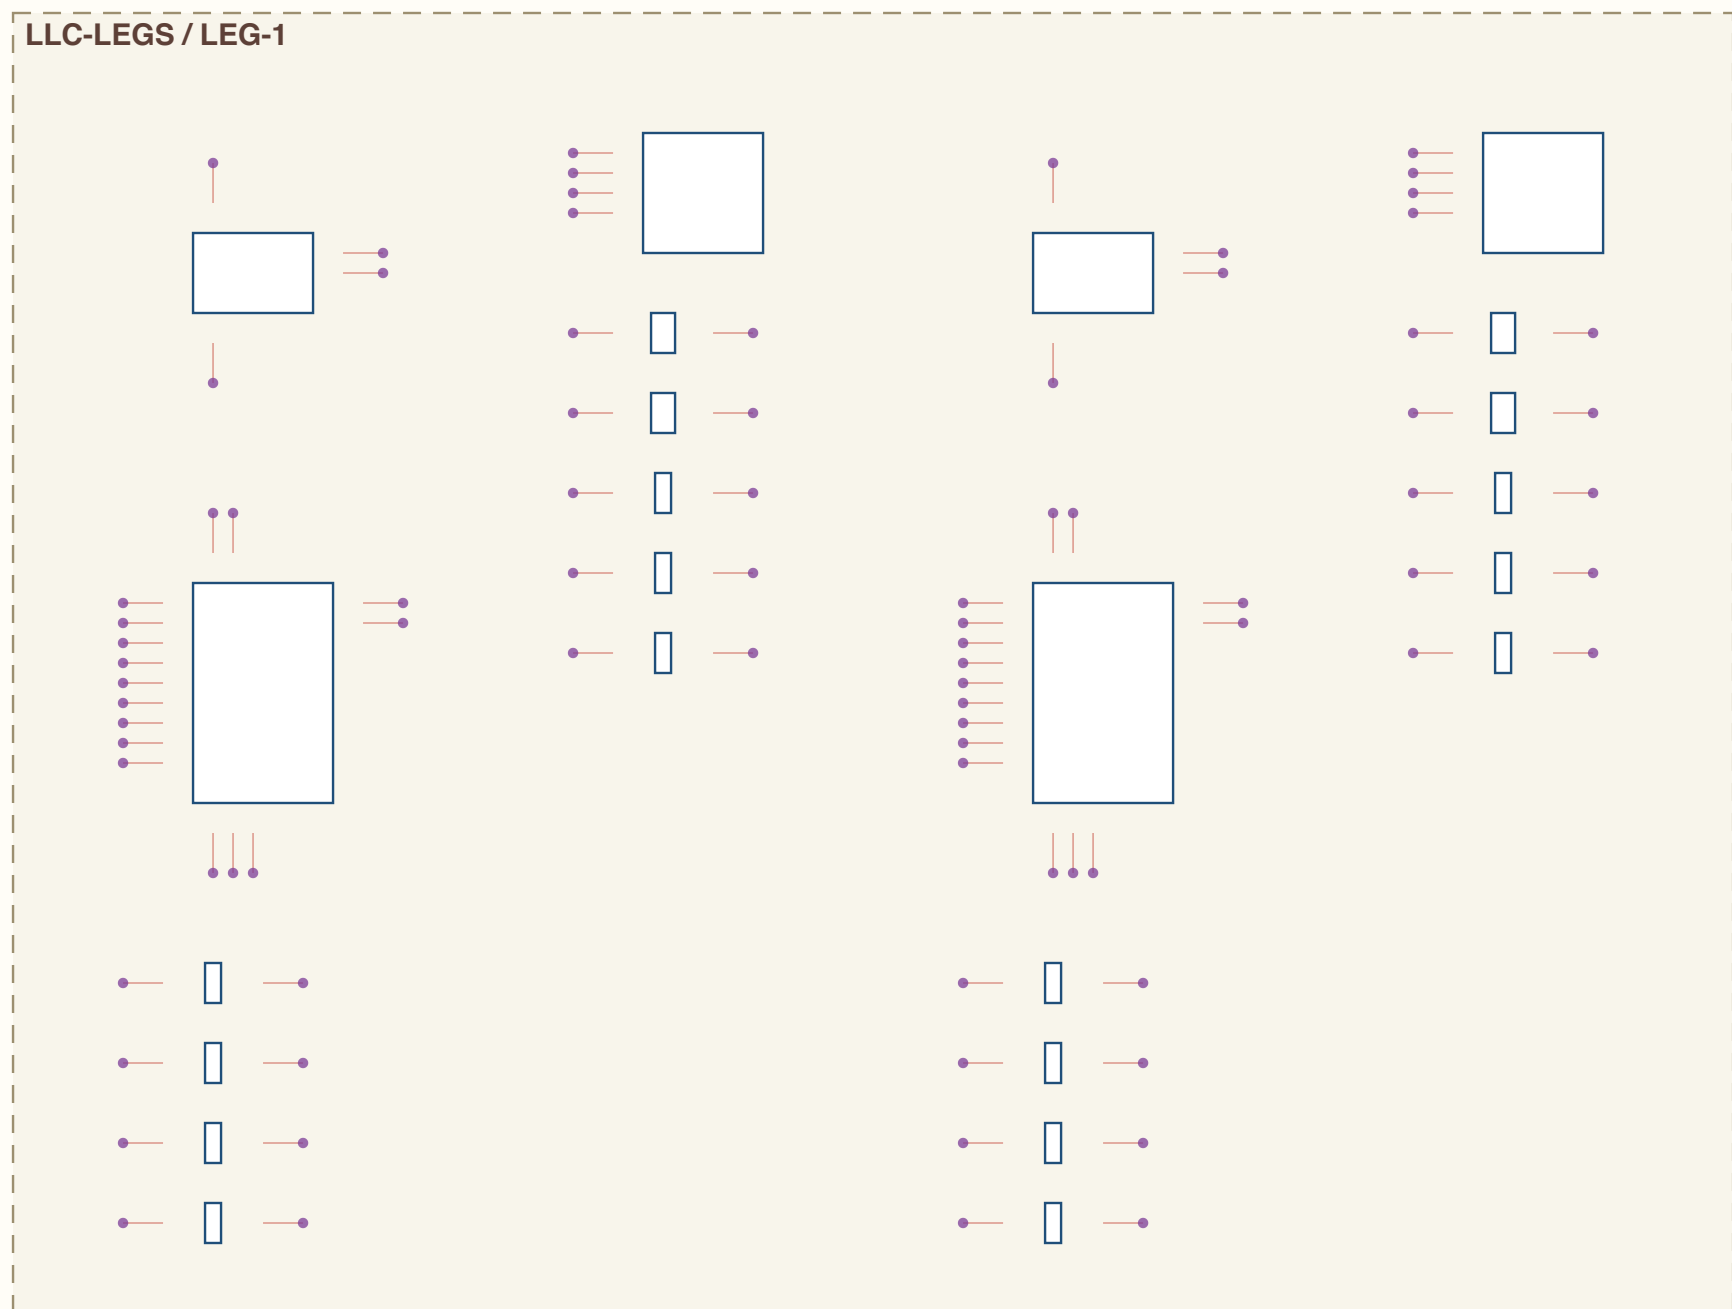
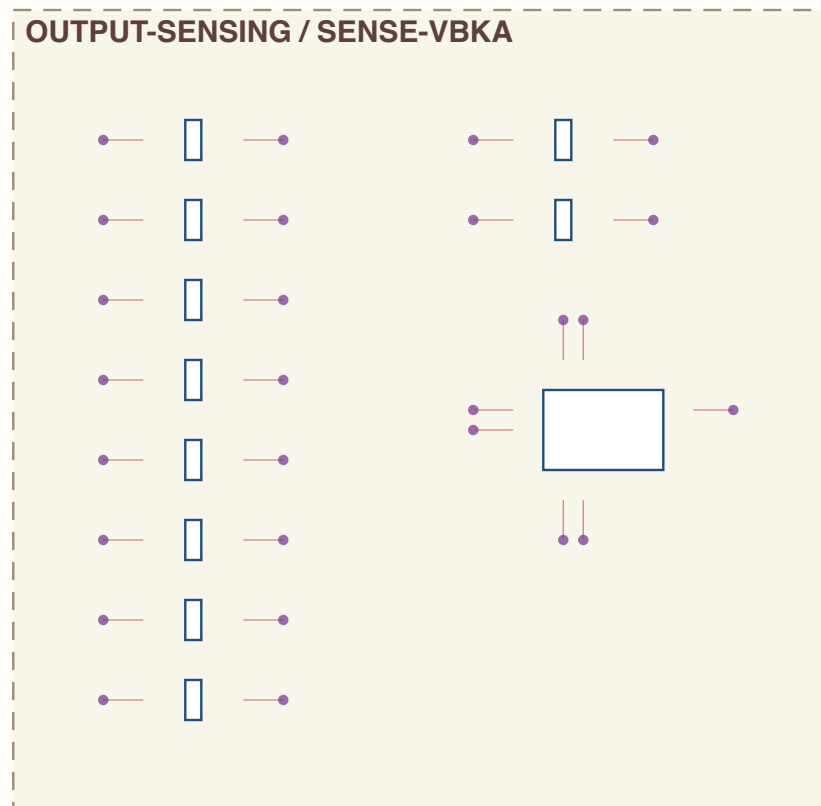
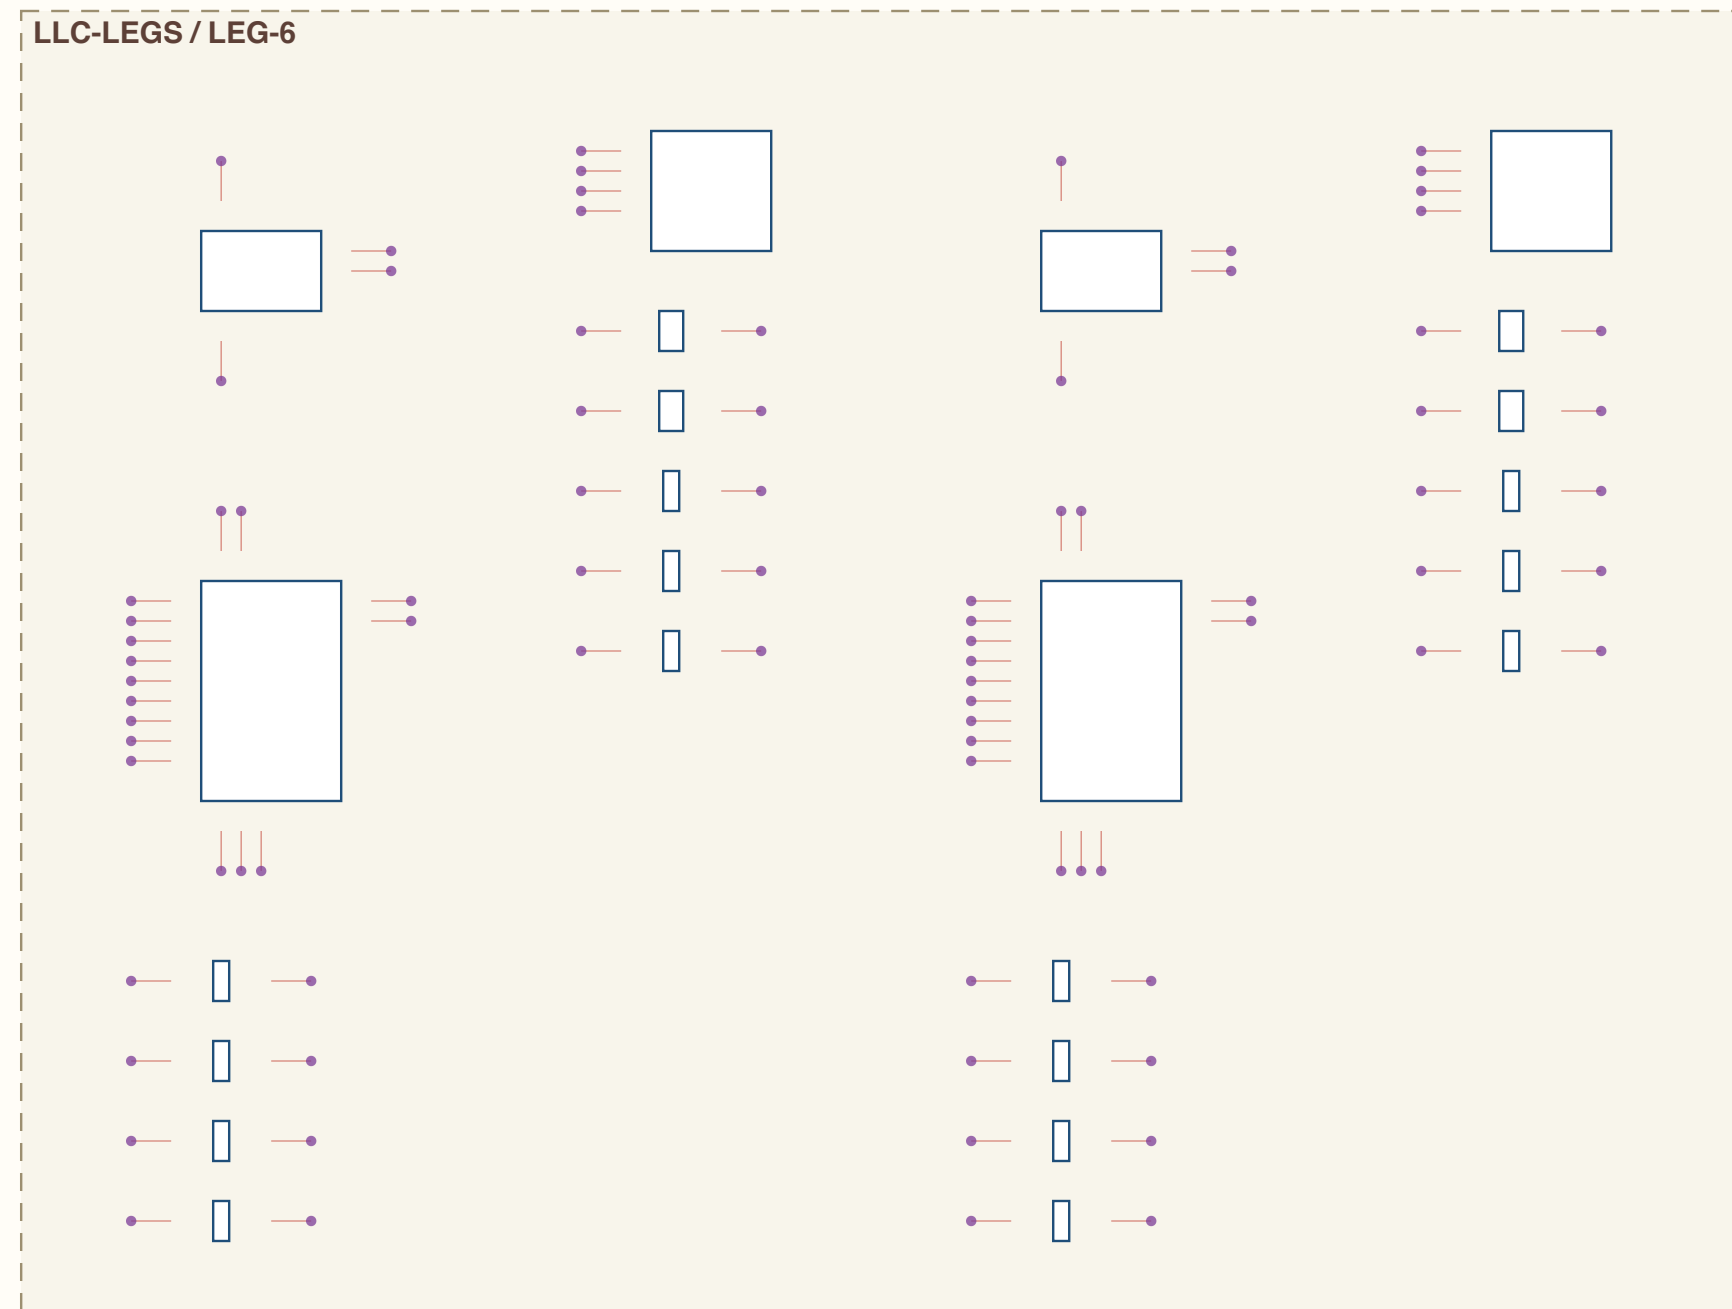
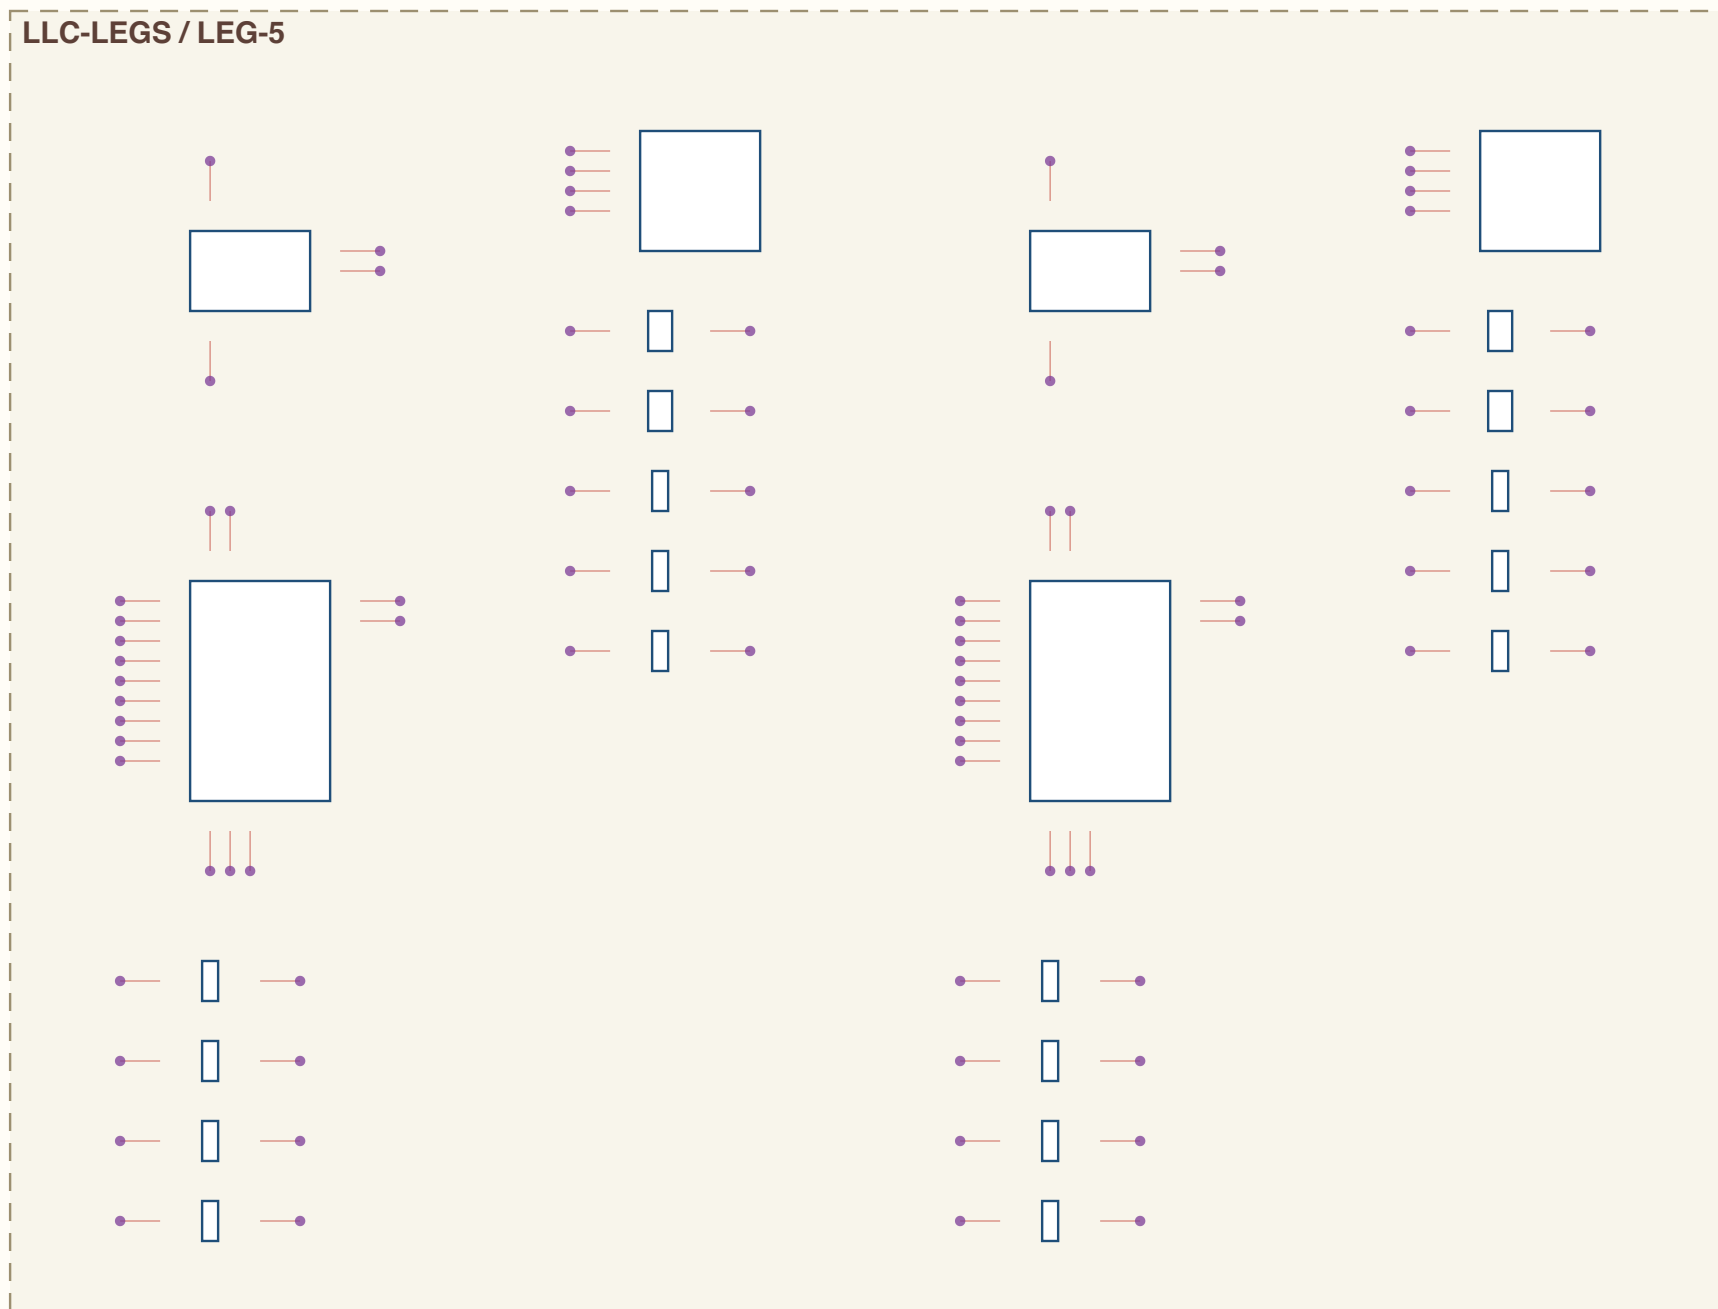
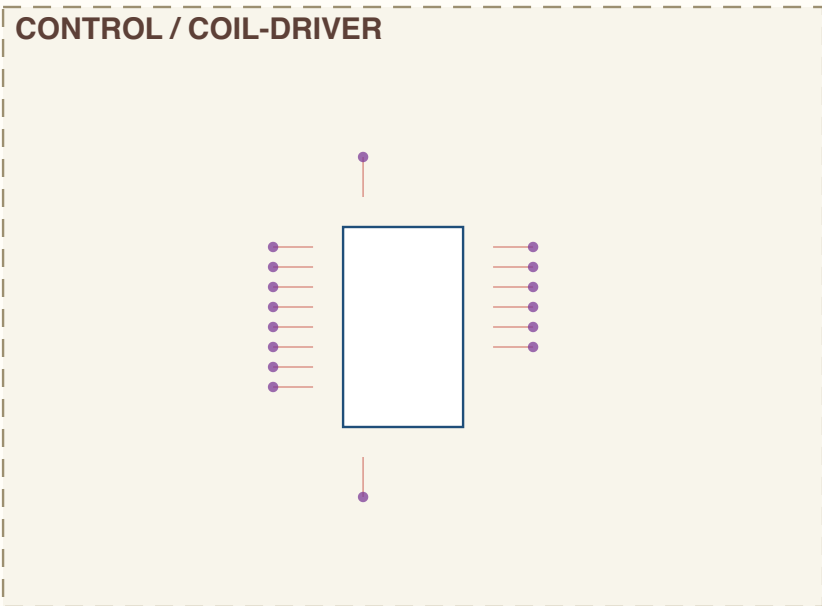
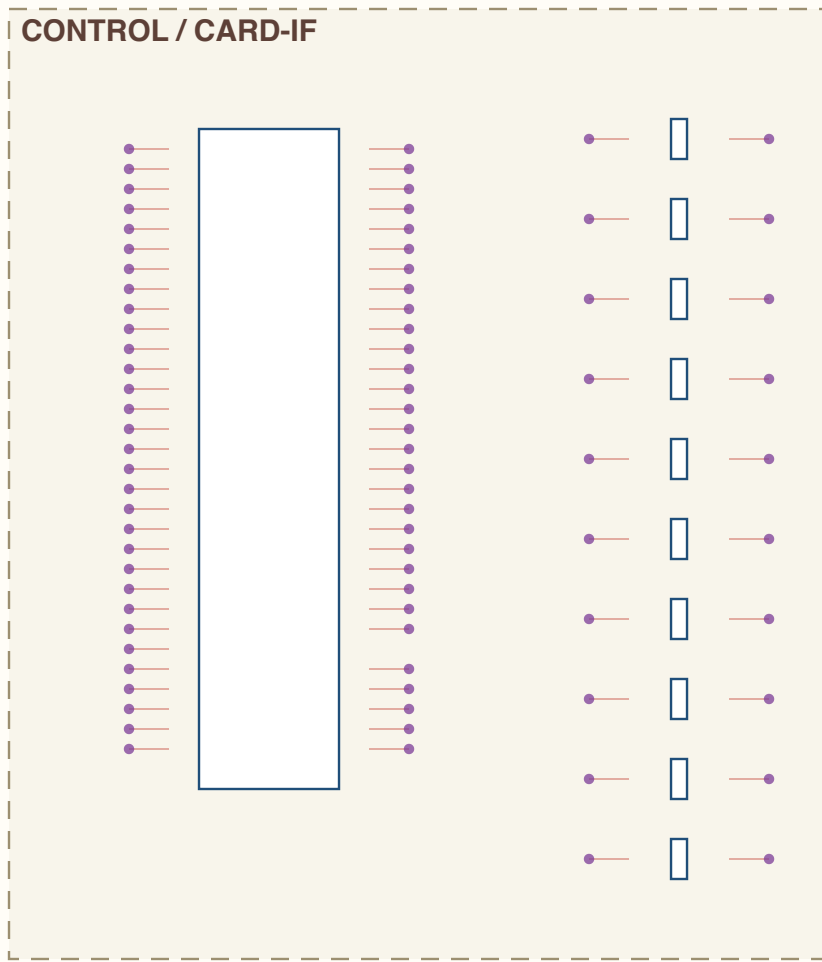
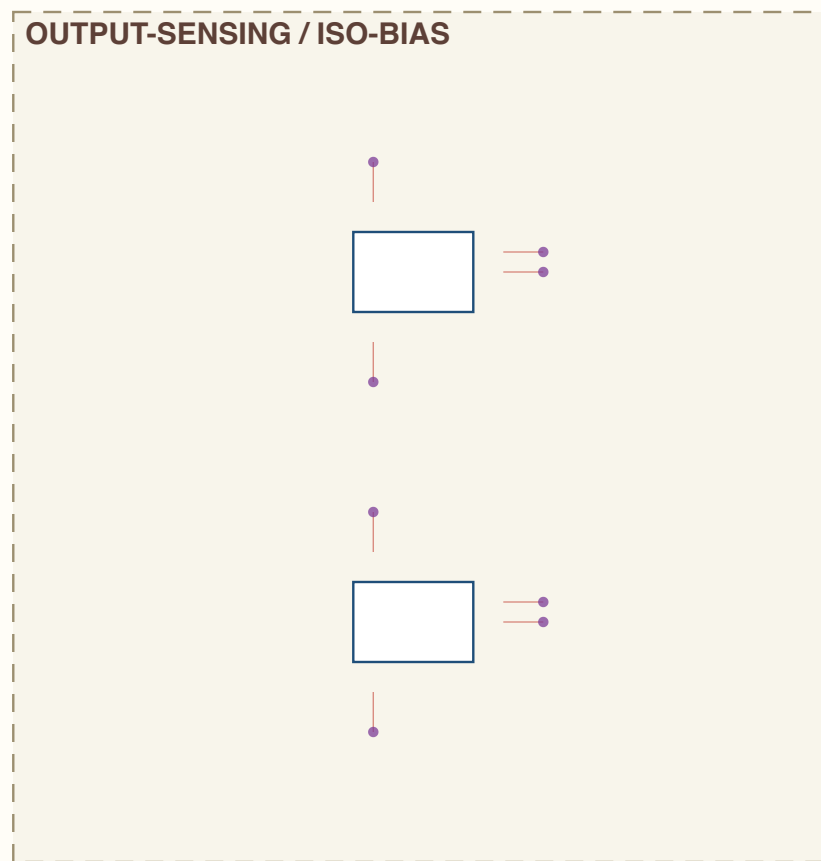
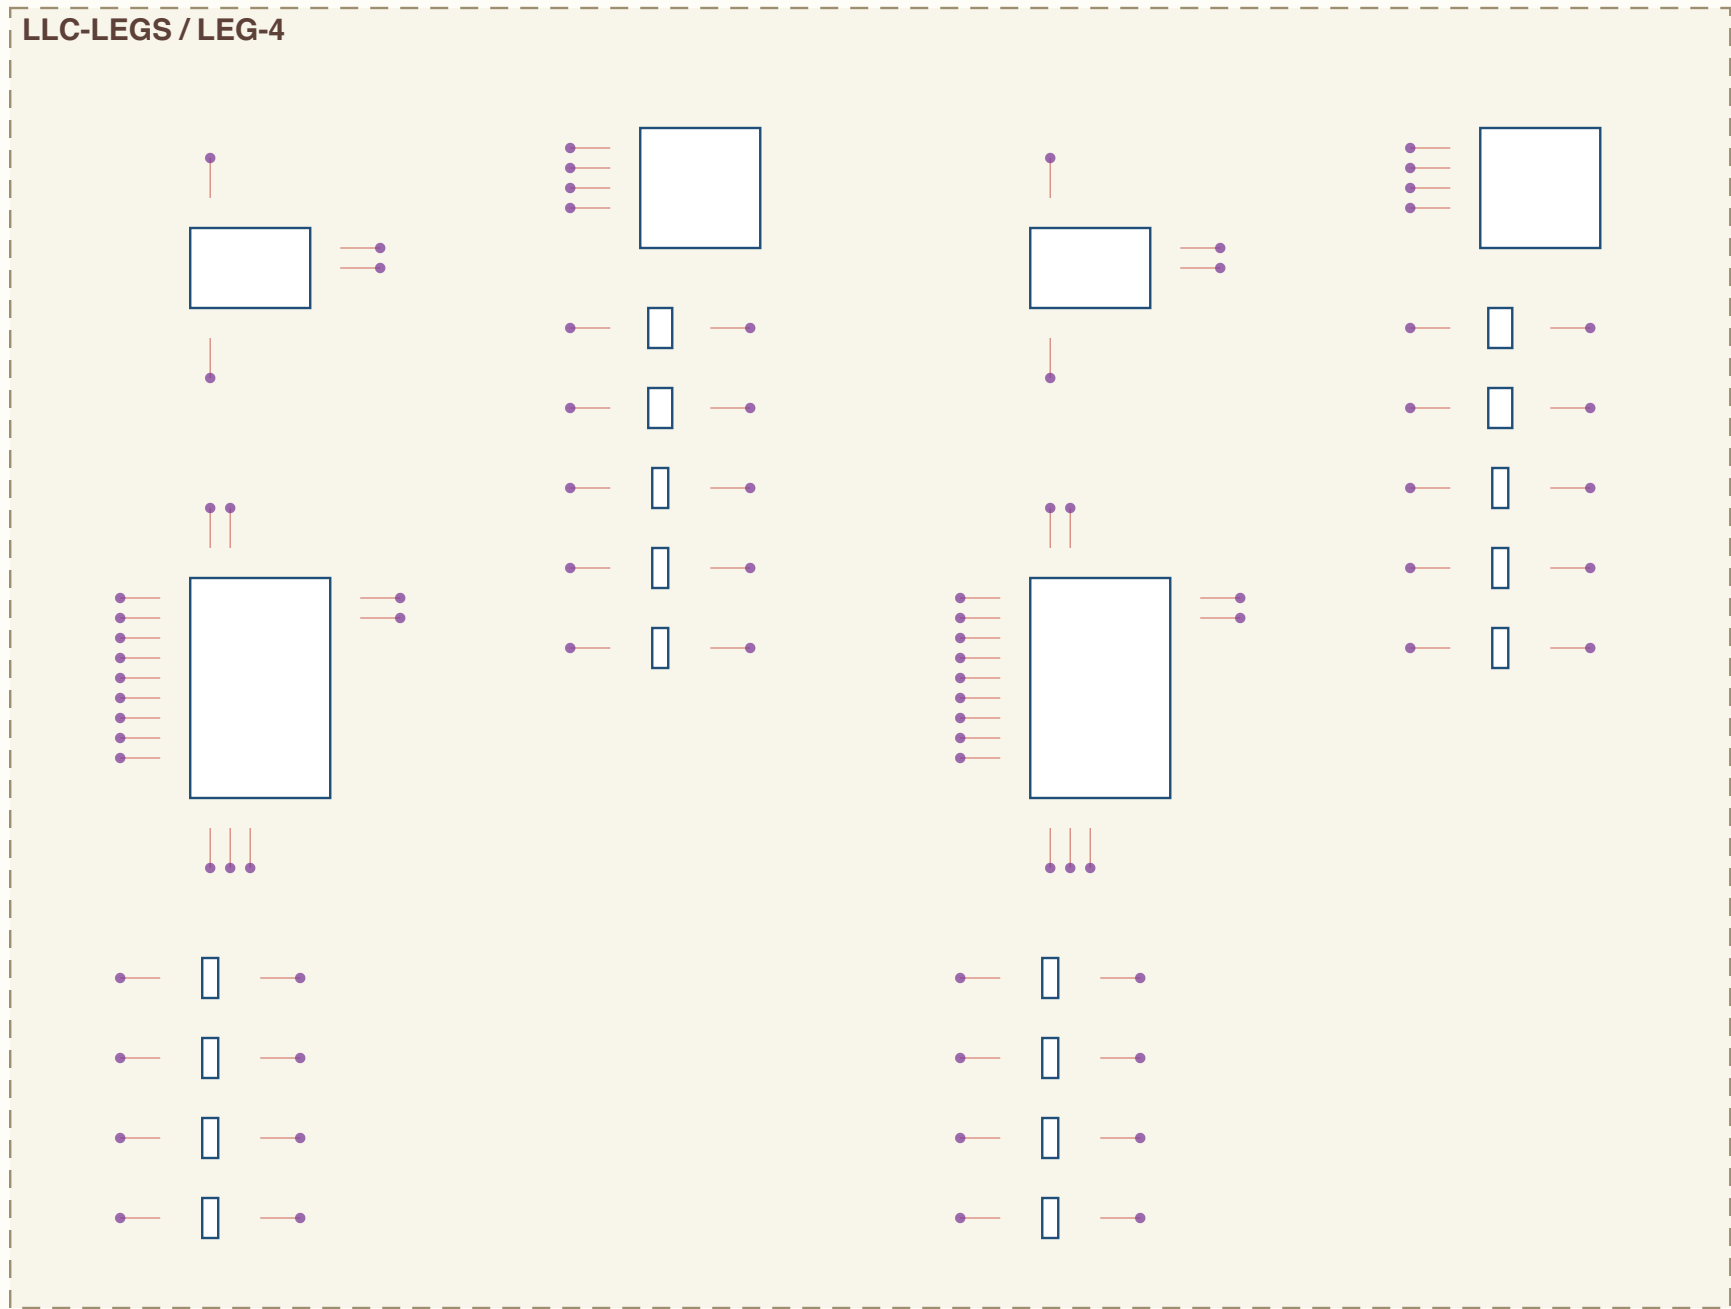
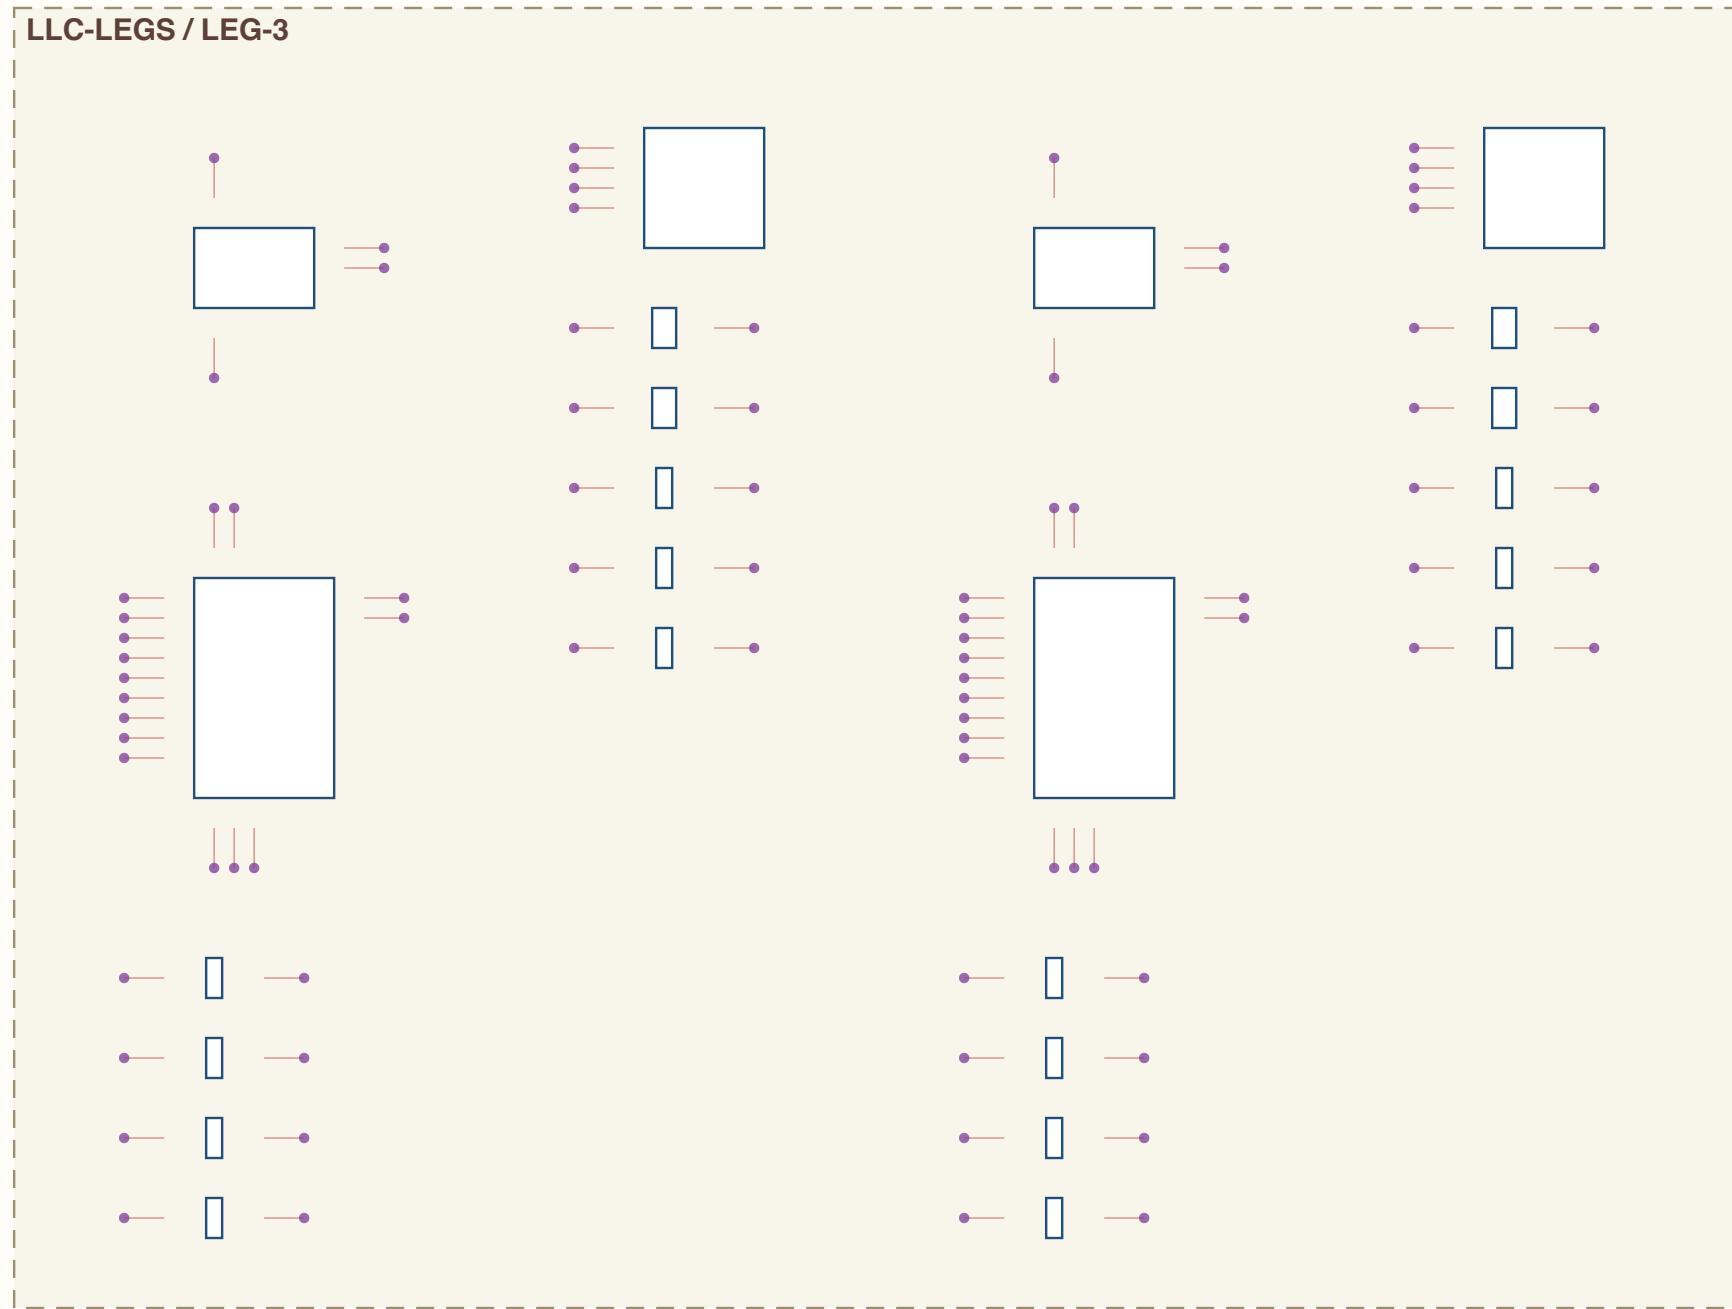
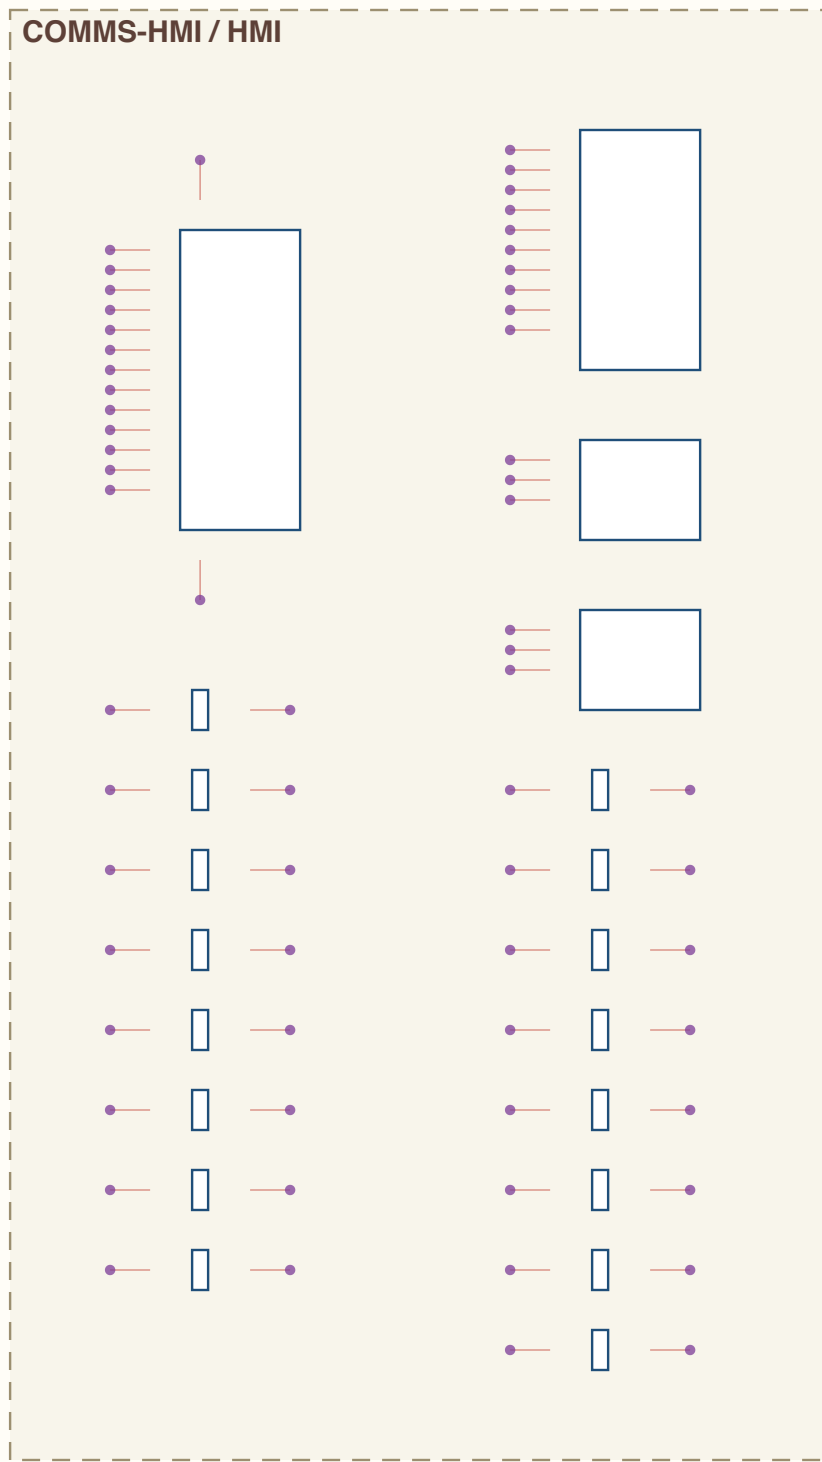
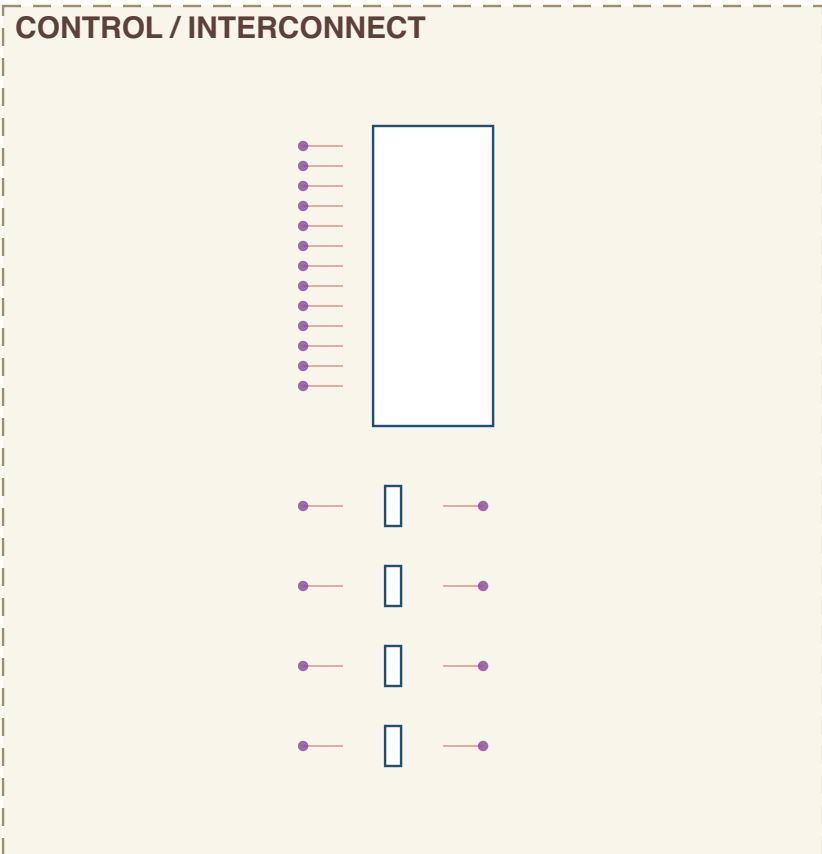
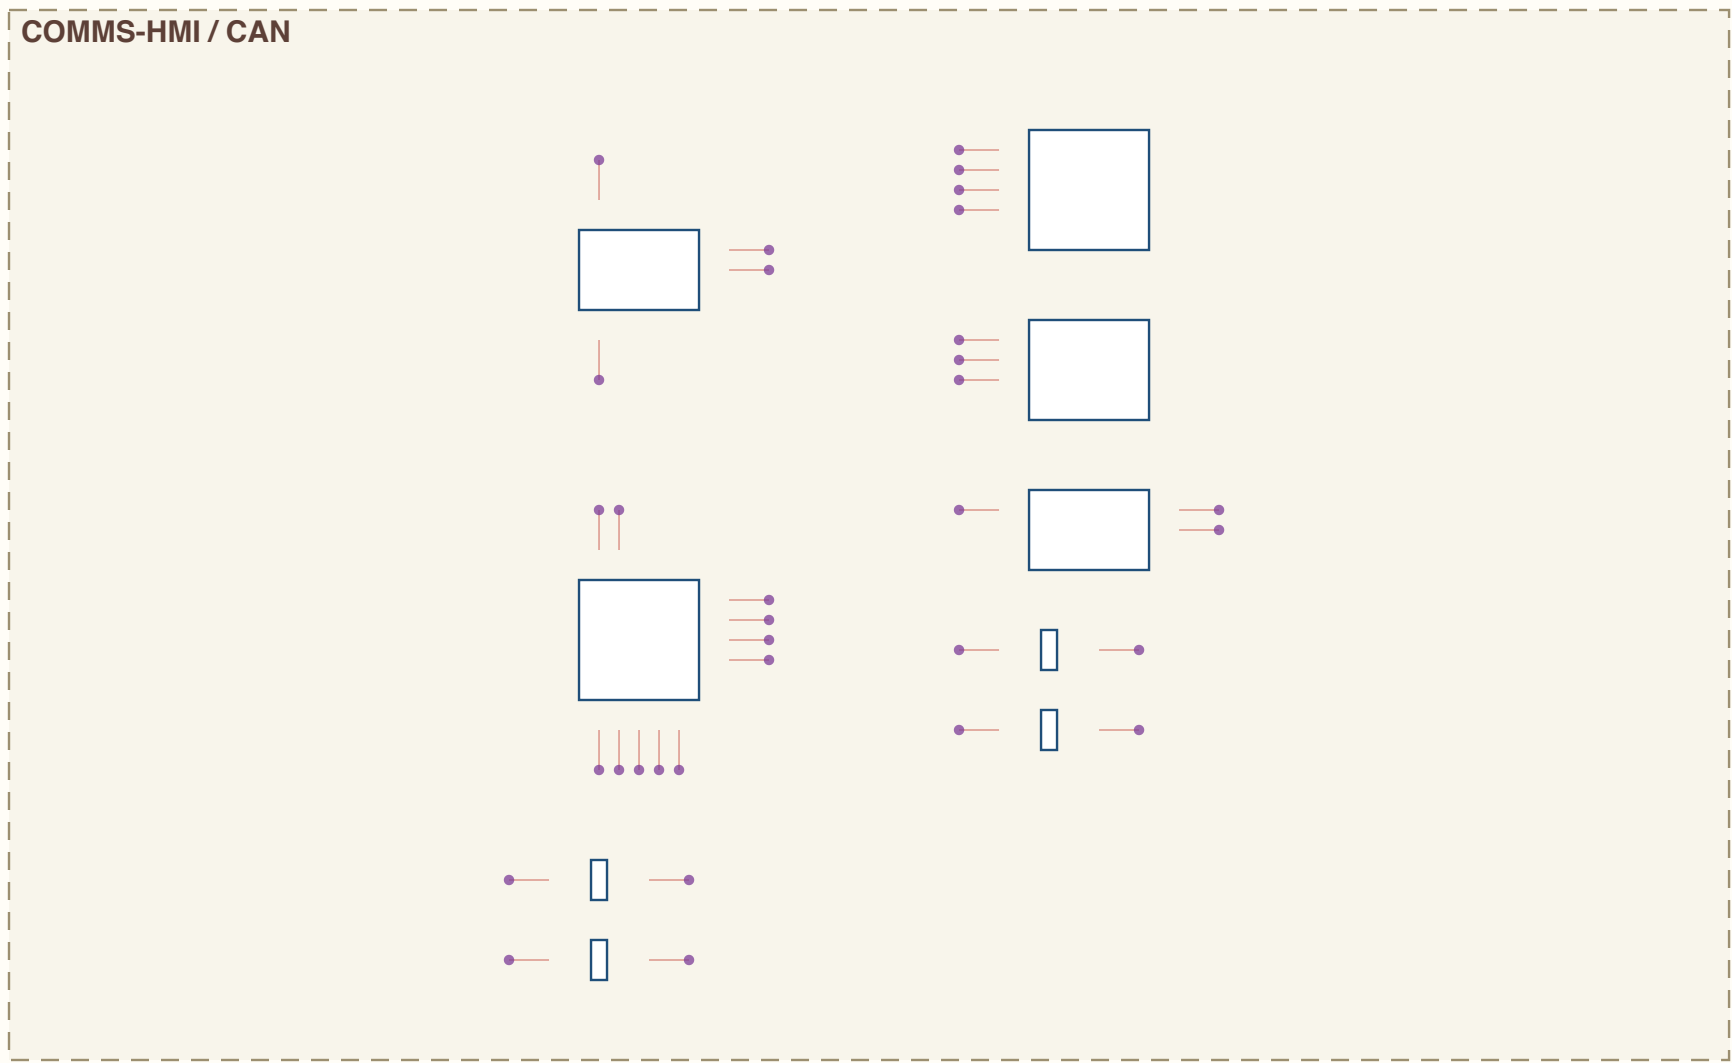
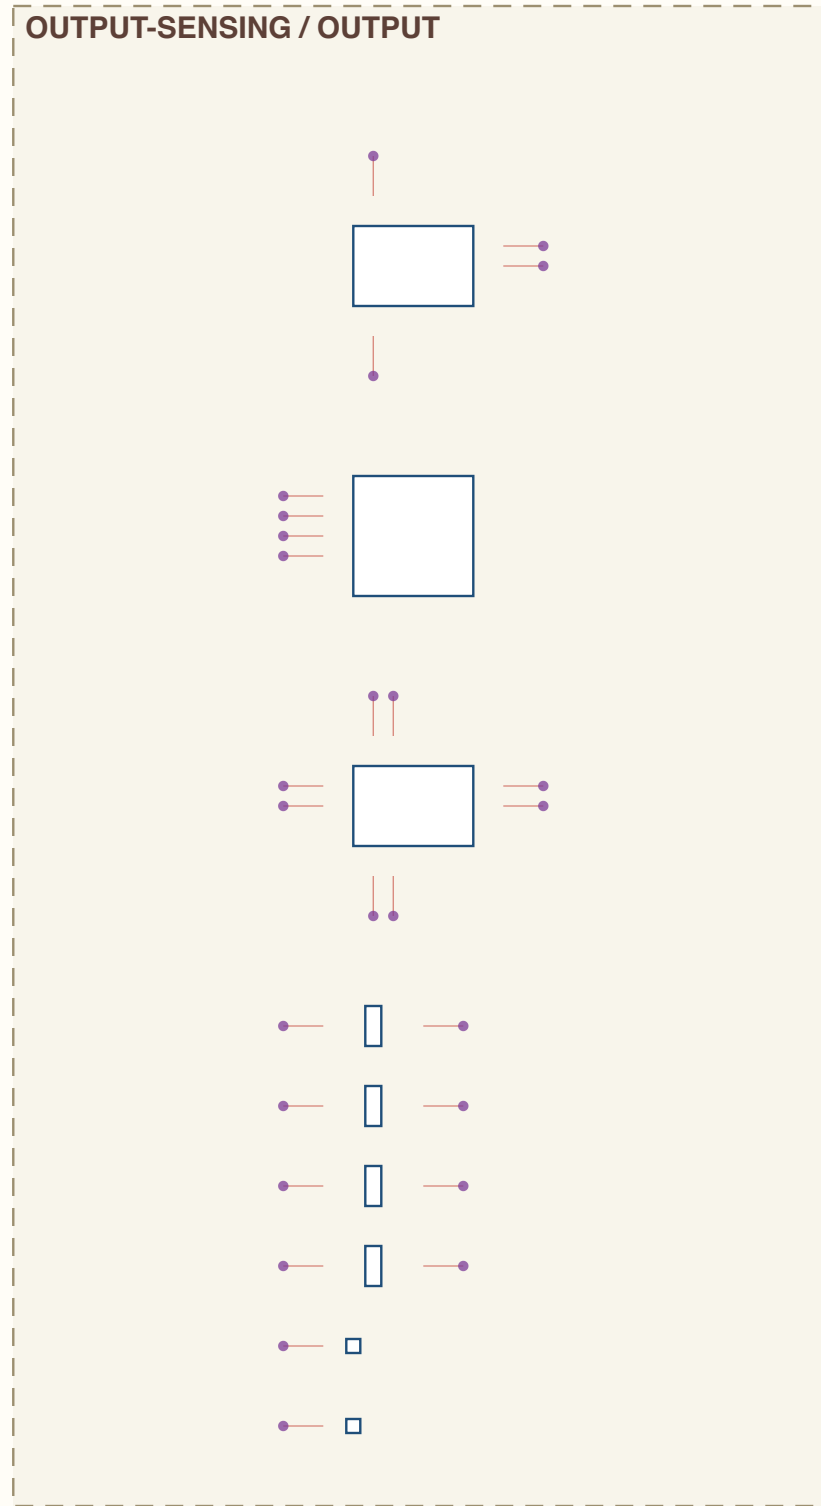
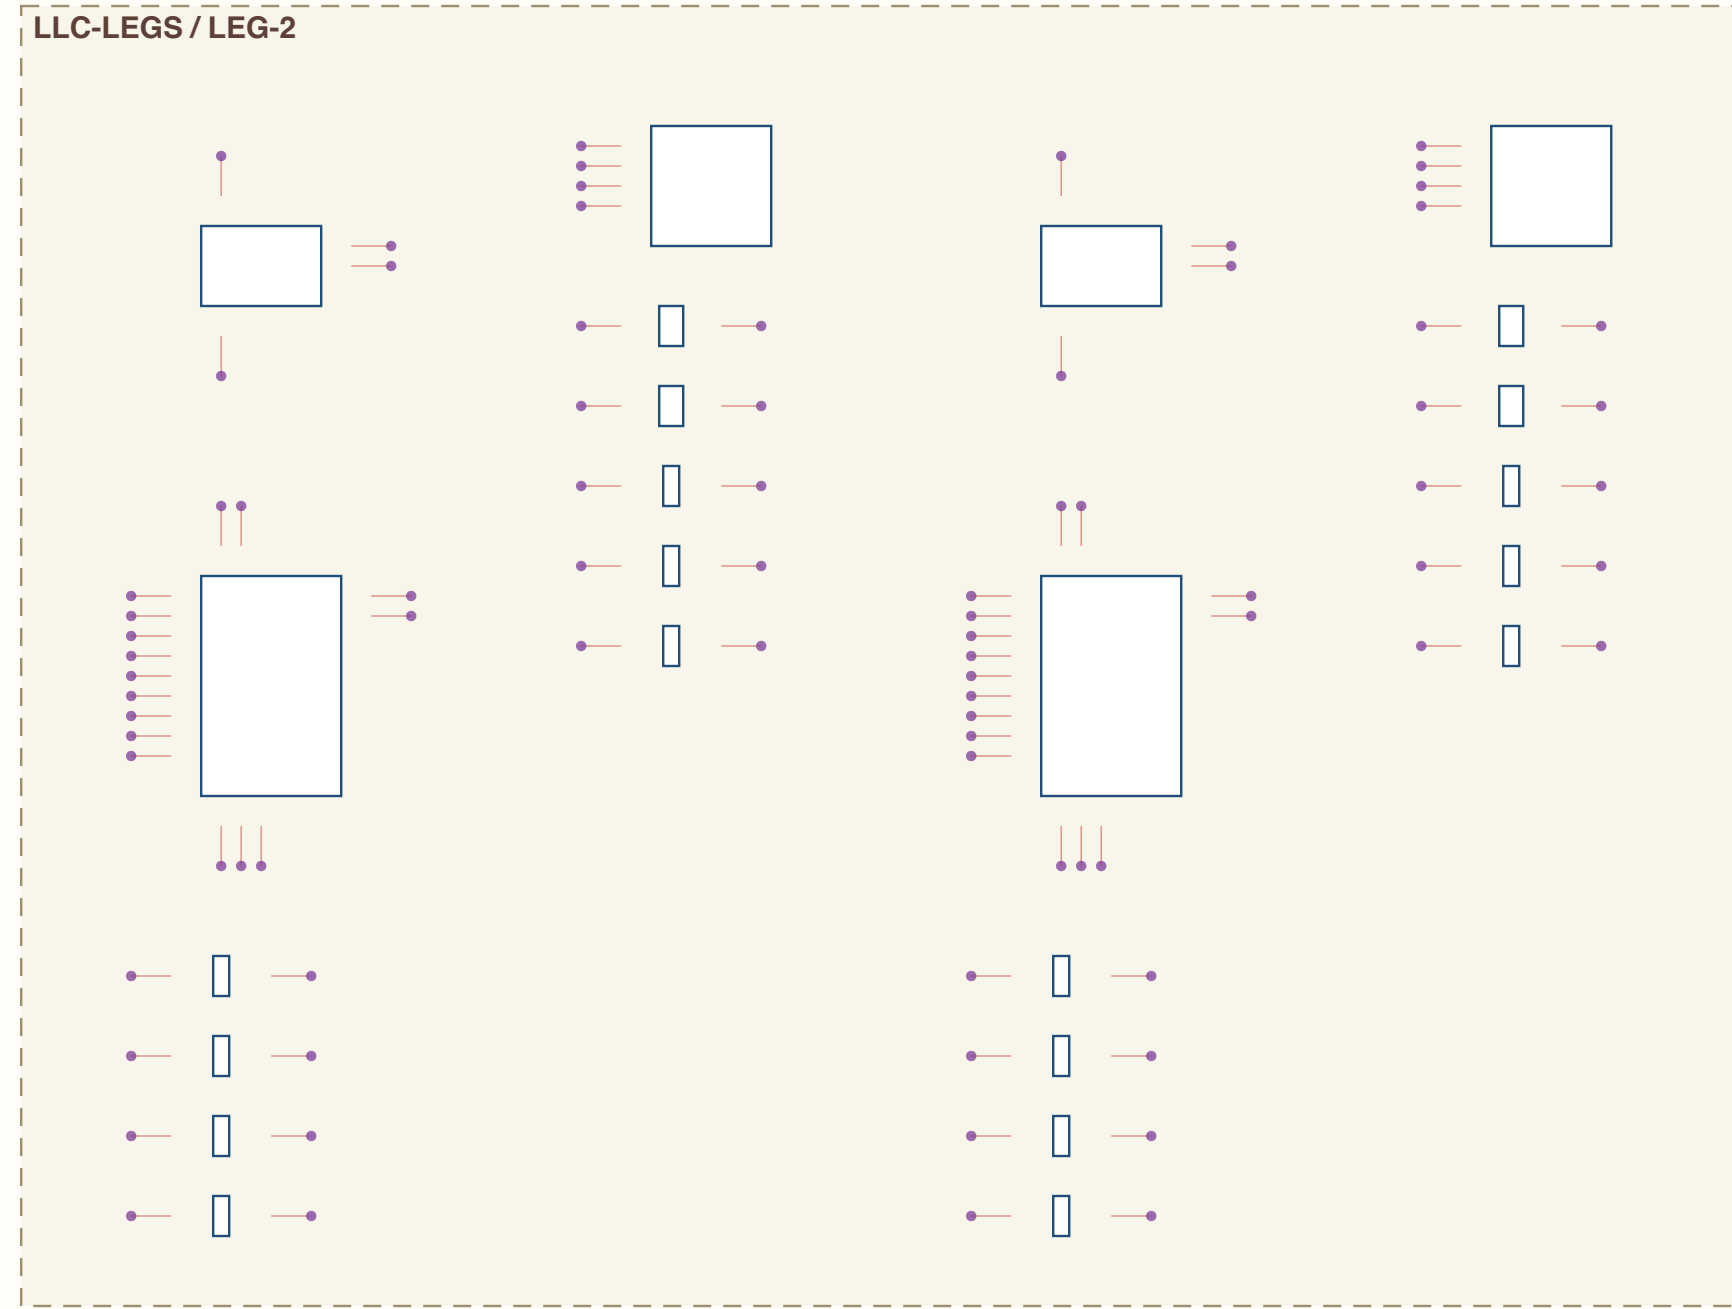
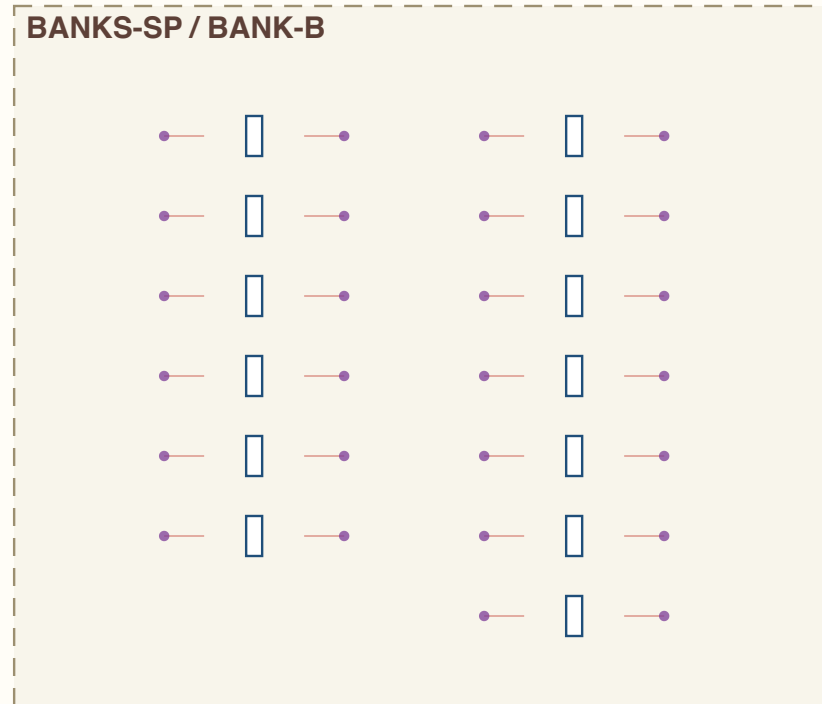
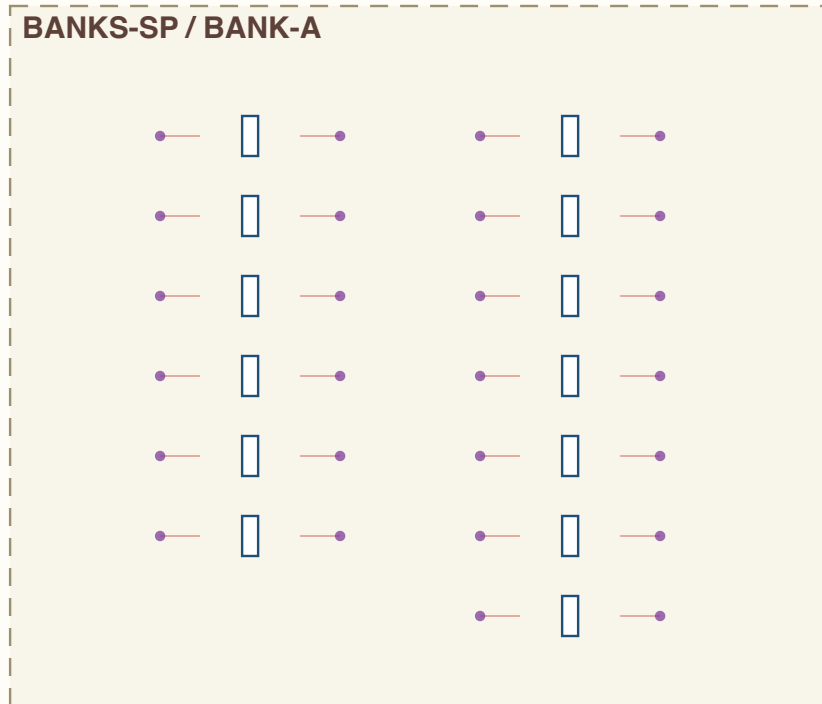
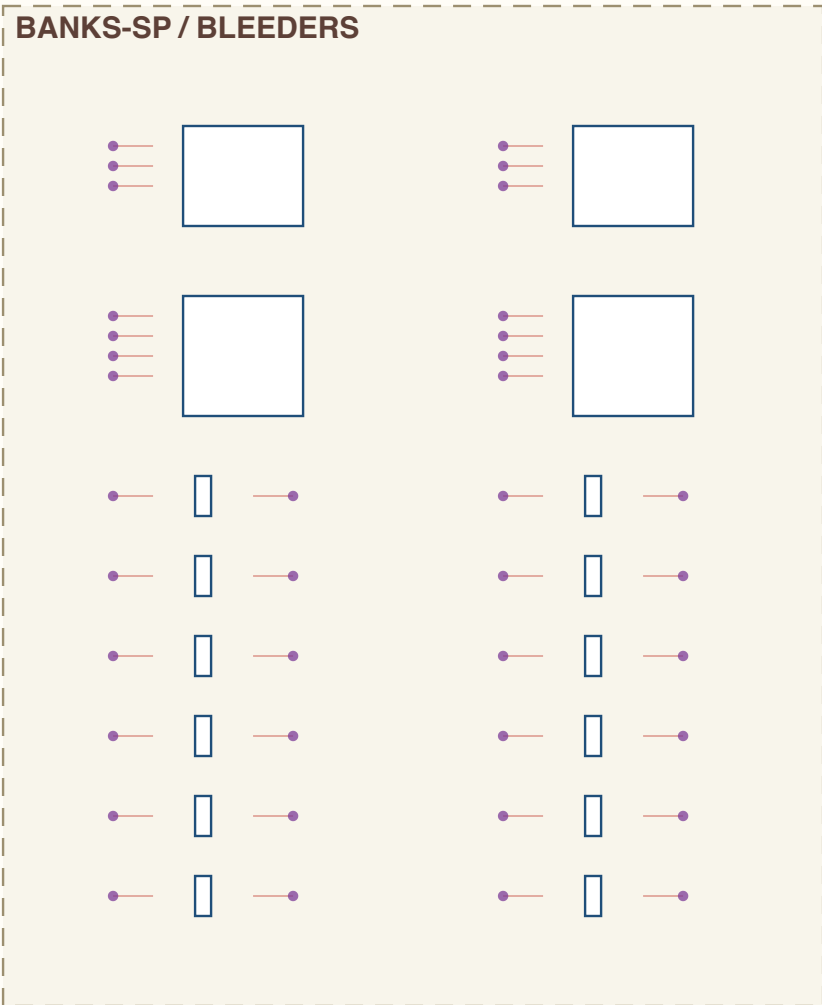


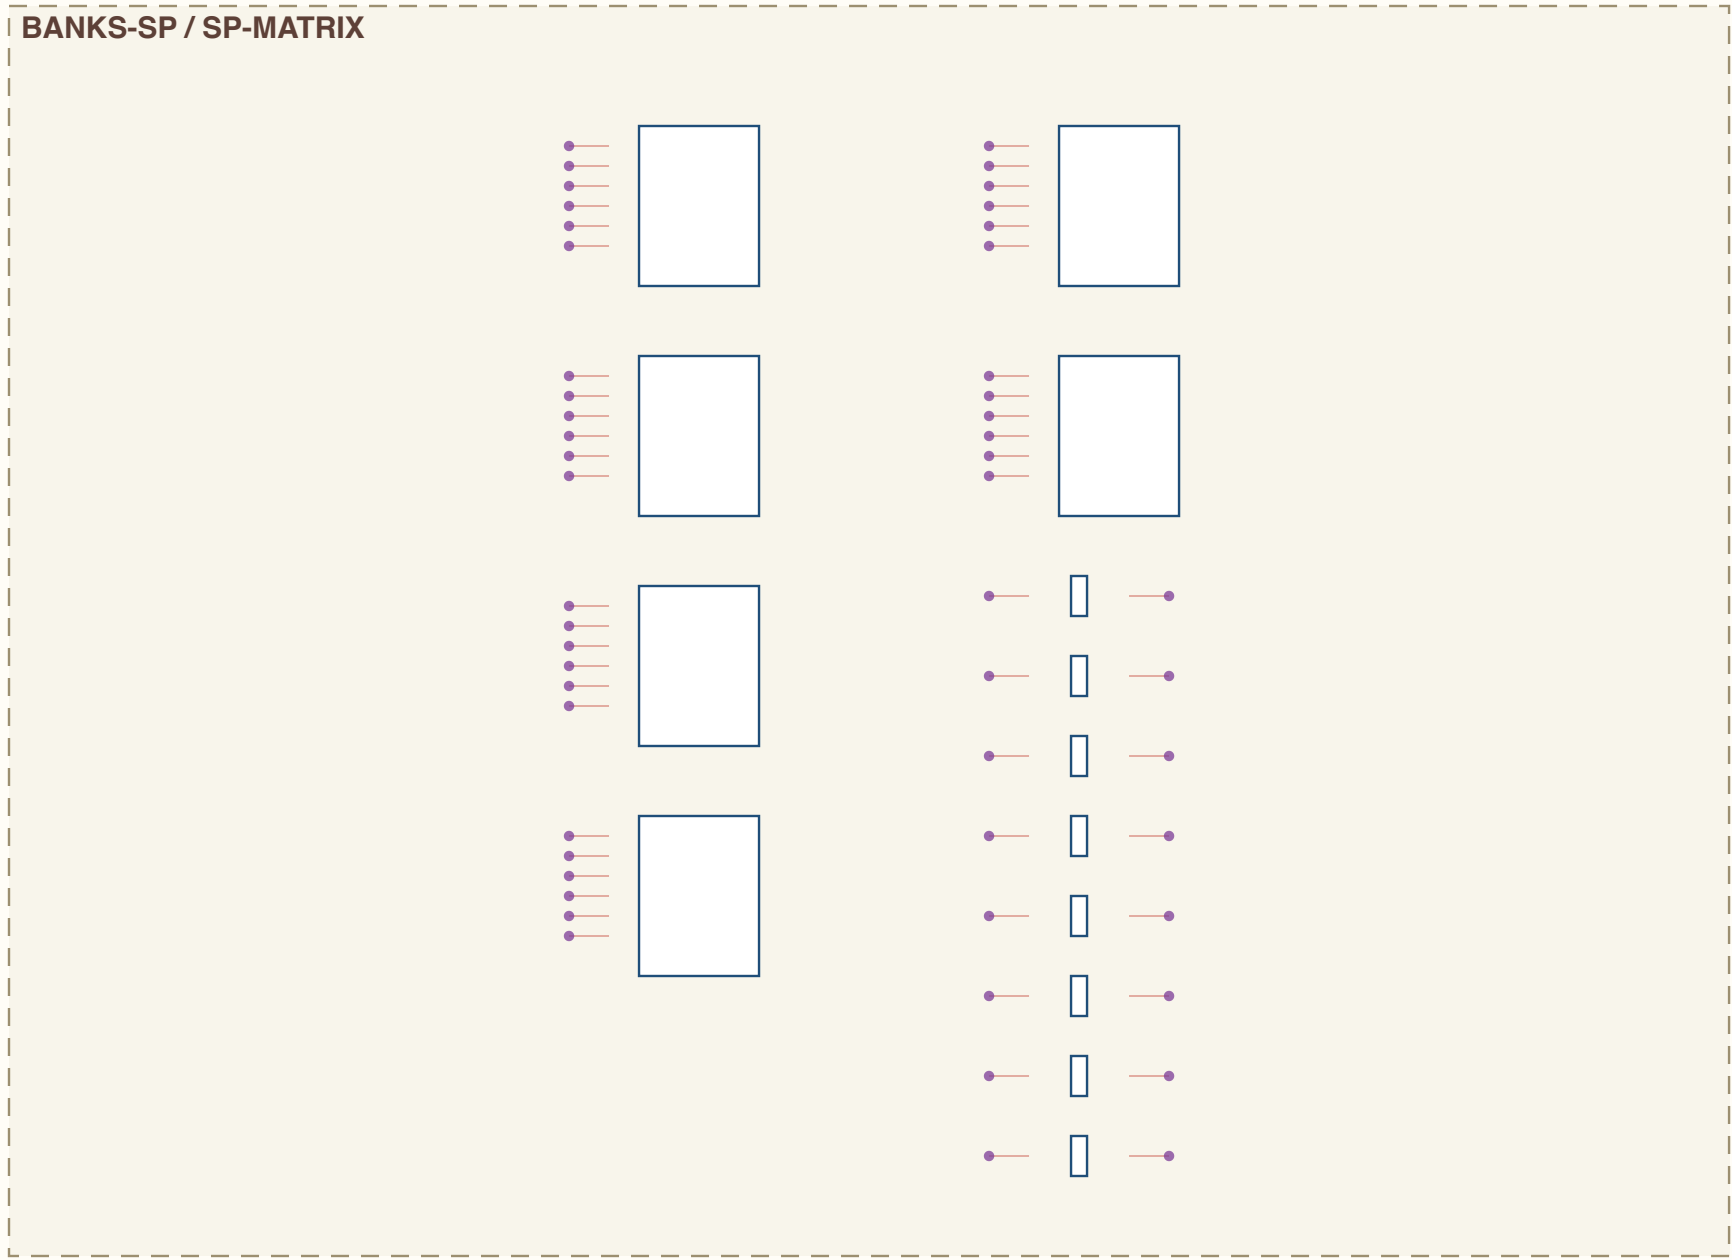

NET NAMING
internal junctions are named for what they join
U<ref>_<PIN> node at that IC pin e.g. UIVOA_VINP
R<stem>_M midpoint of a series pair e.g. RBALTA_M
R<stem>_<nm> tap between R<stem>+n/m e.g. RV1D_01
all others are explicit design nets

SHEET INDEX
60 kW DC-DC (upper) - 2 of 3
LLC-LEGS - 7 sections
LLC-TANKS - 6 sections
OUTPUT-SENSING - 6 sections
BANKS-SP - 4 sections
CONTROL - 3 sections
COMMS-HMI - 2 sections
rev D.3 - 28 sections - 425 components