




cab-CABINET / CSU-CARRIER

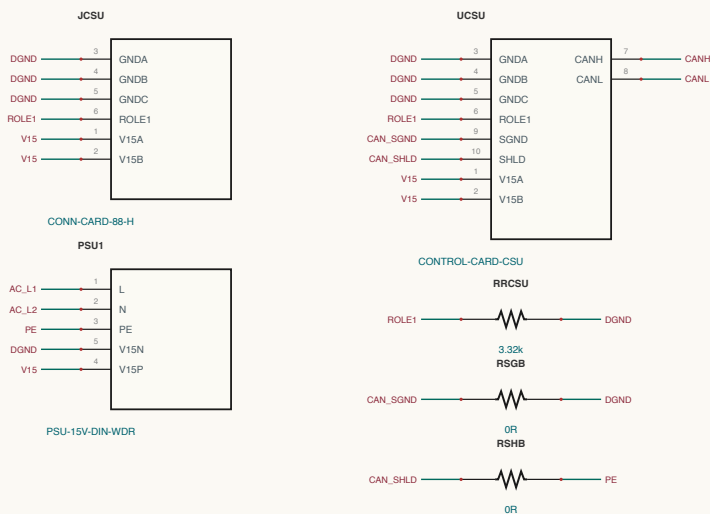


cab-CABINET / MODULES

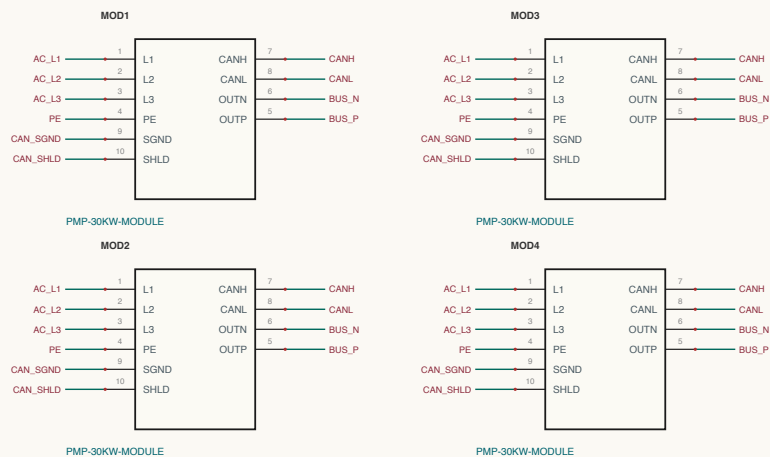


cab-CABINET / CAN-CHAIN



cab-CABINET / AC-ENTRY



cab-CABINET / DC-BUS





























120 kW Cab

NET NAMING:

120 kW Cabinet - 4x 30 kW modules + CSU (same card, third strap role) (E39)

DC-Modules 120 kW - board Cabinet interconnect, sheet 1 of 1

2026-09-06 · rev D.4

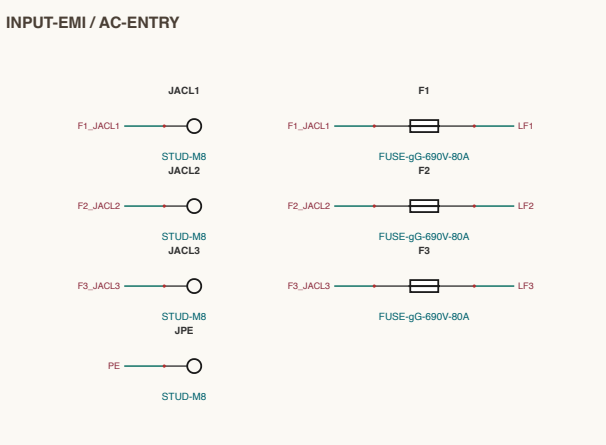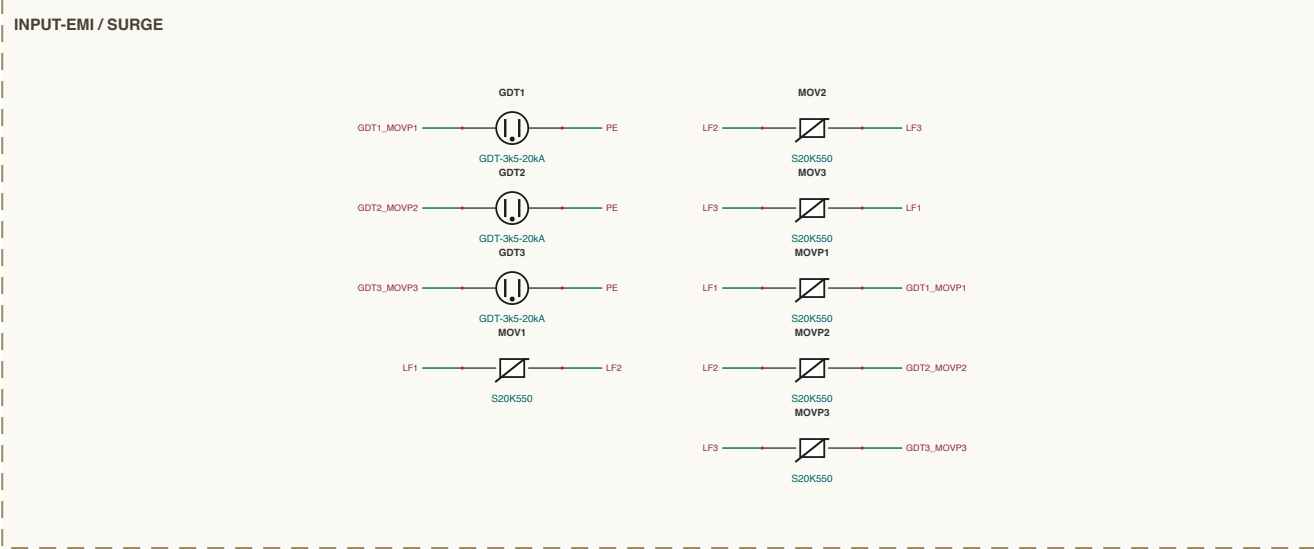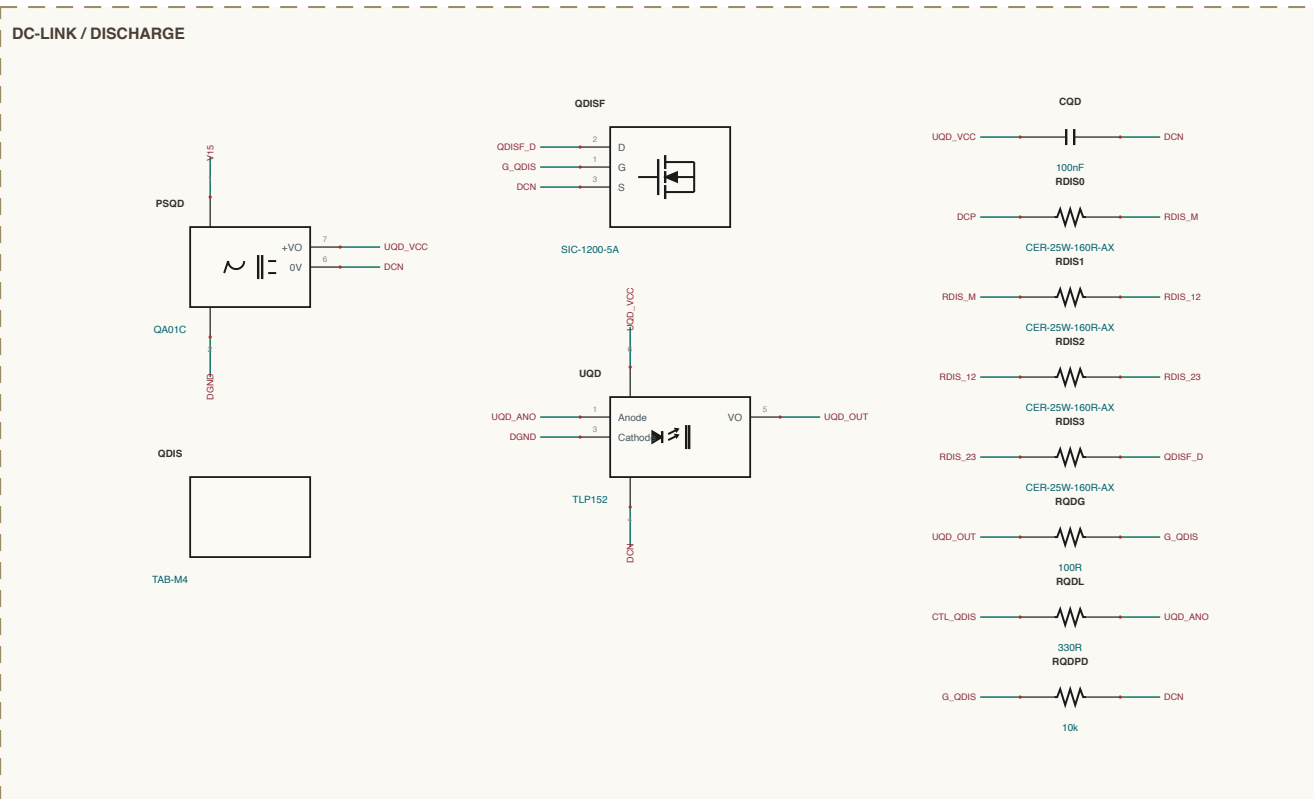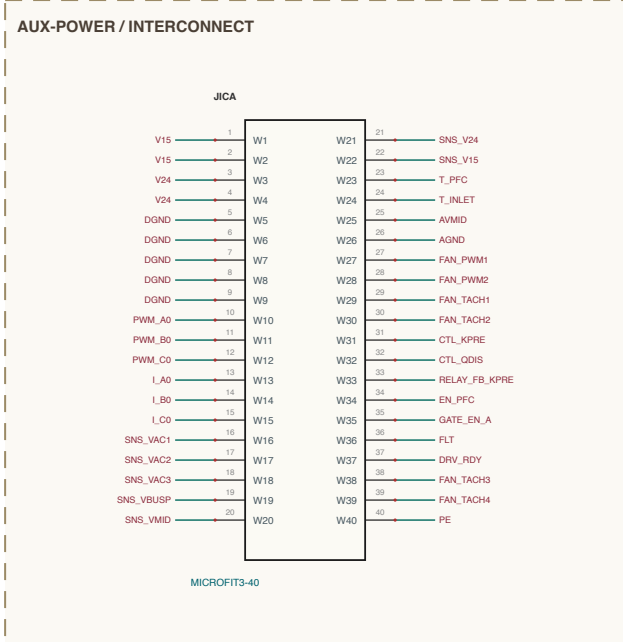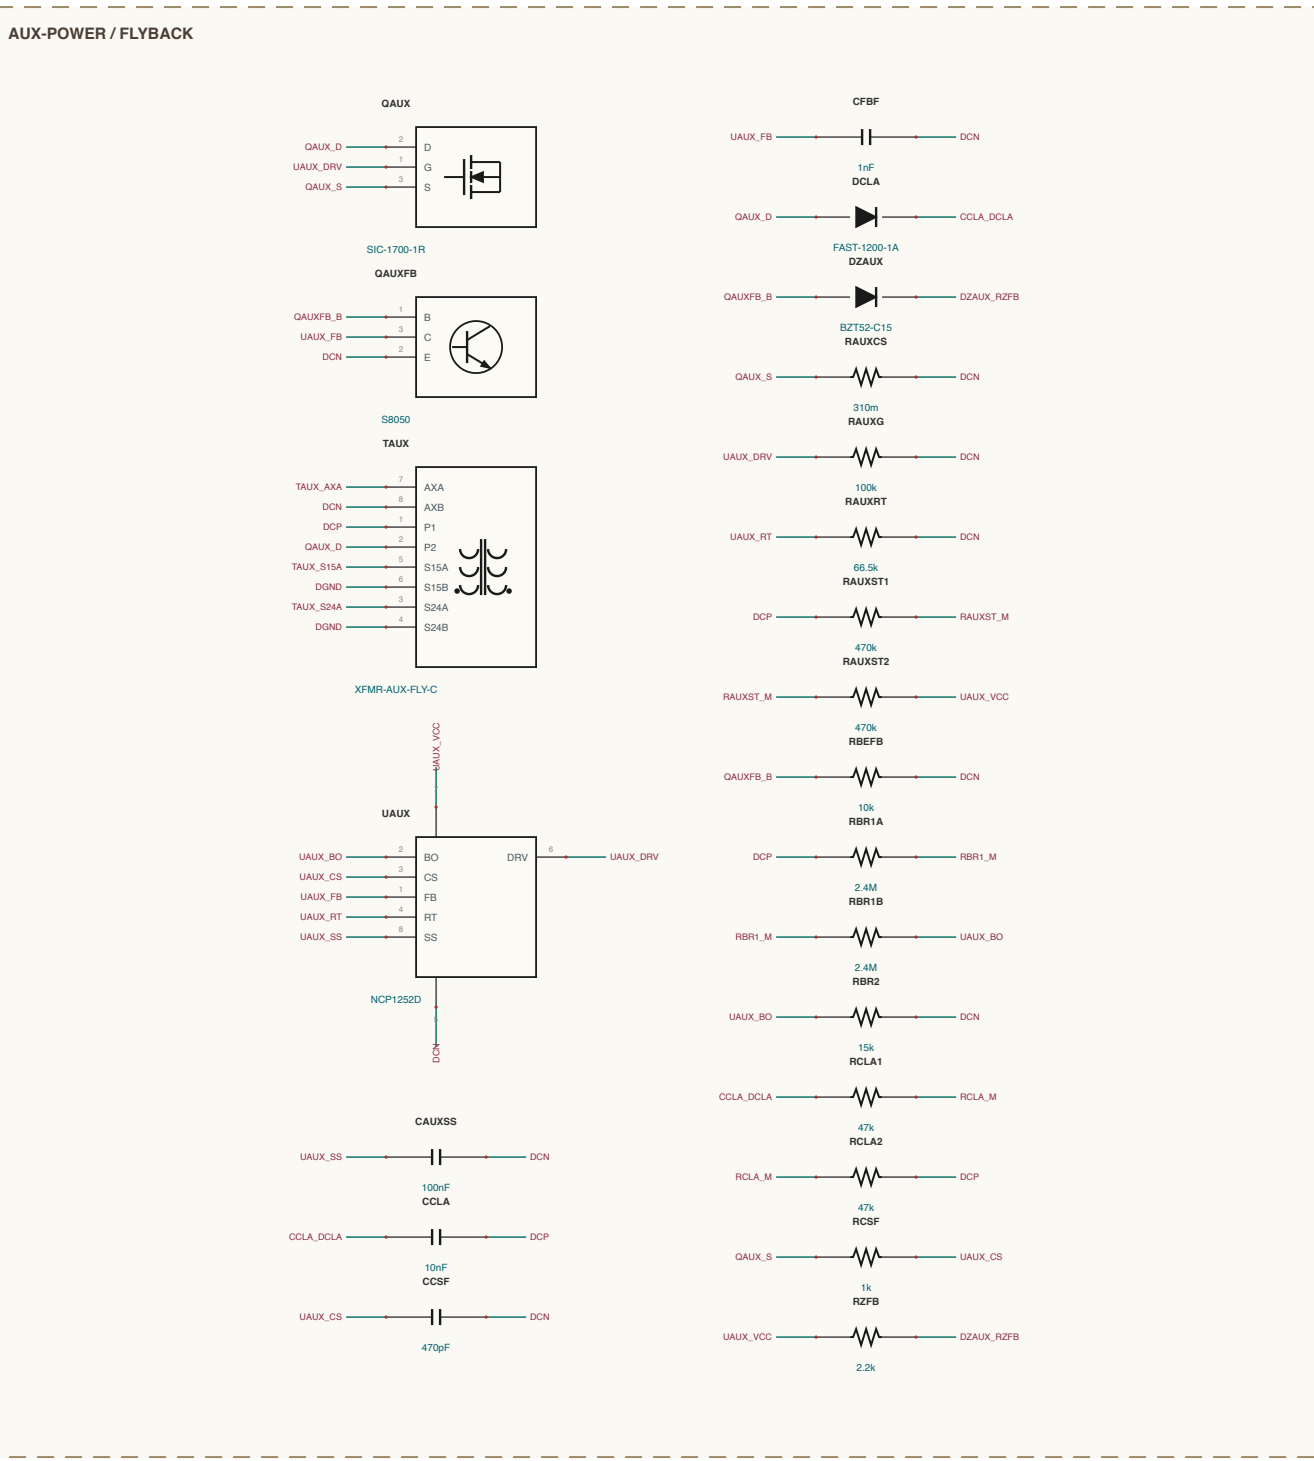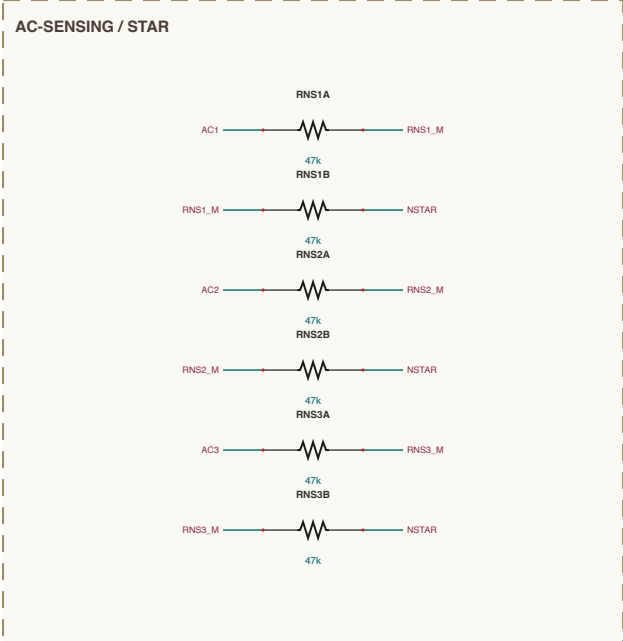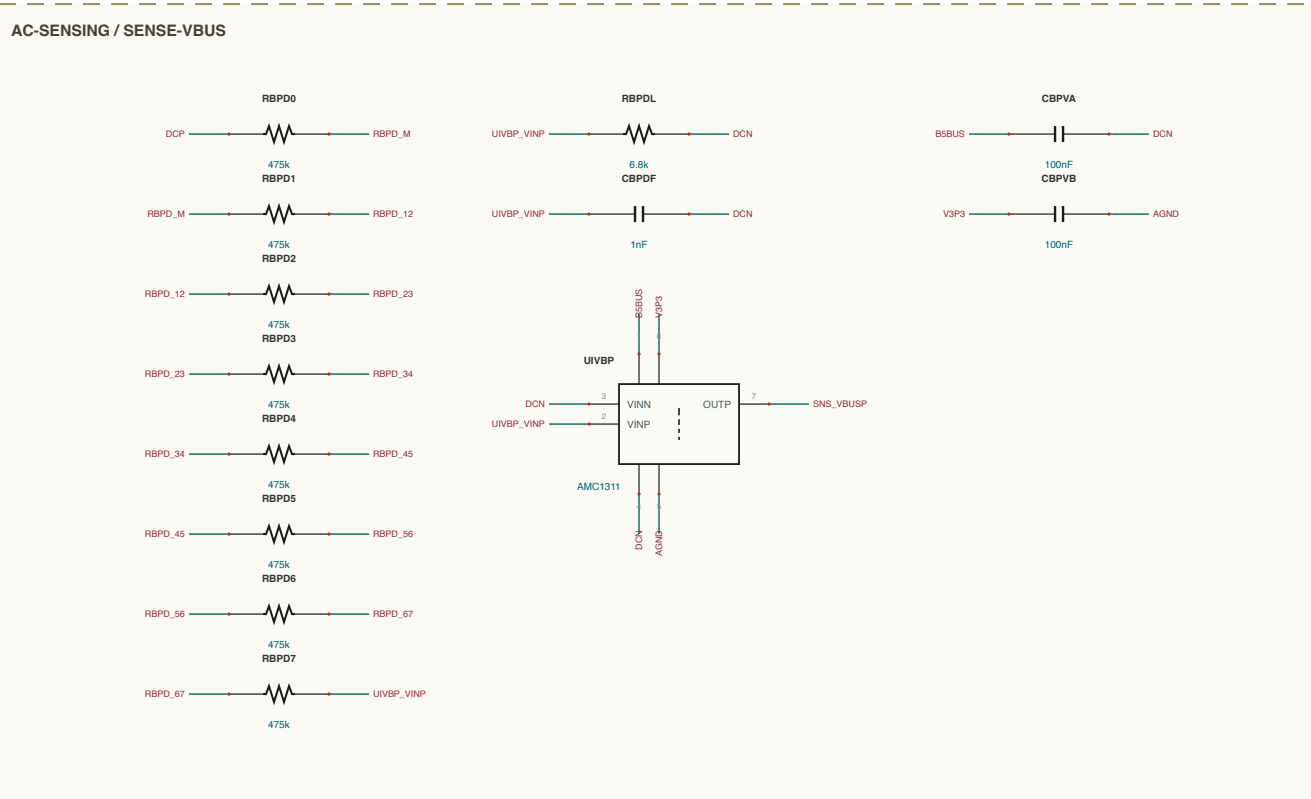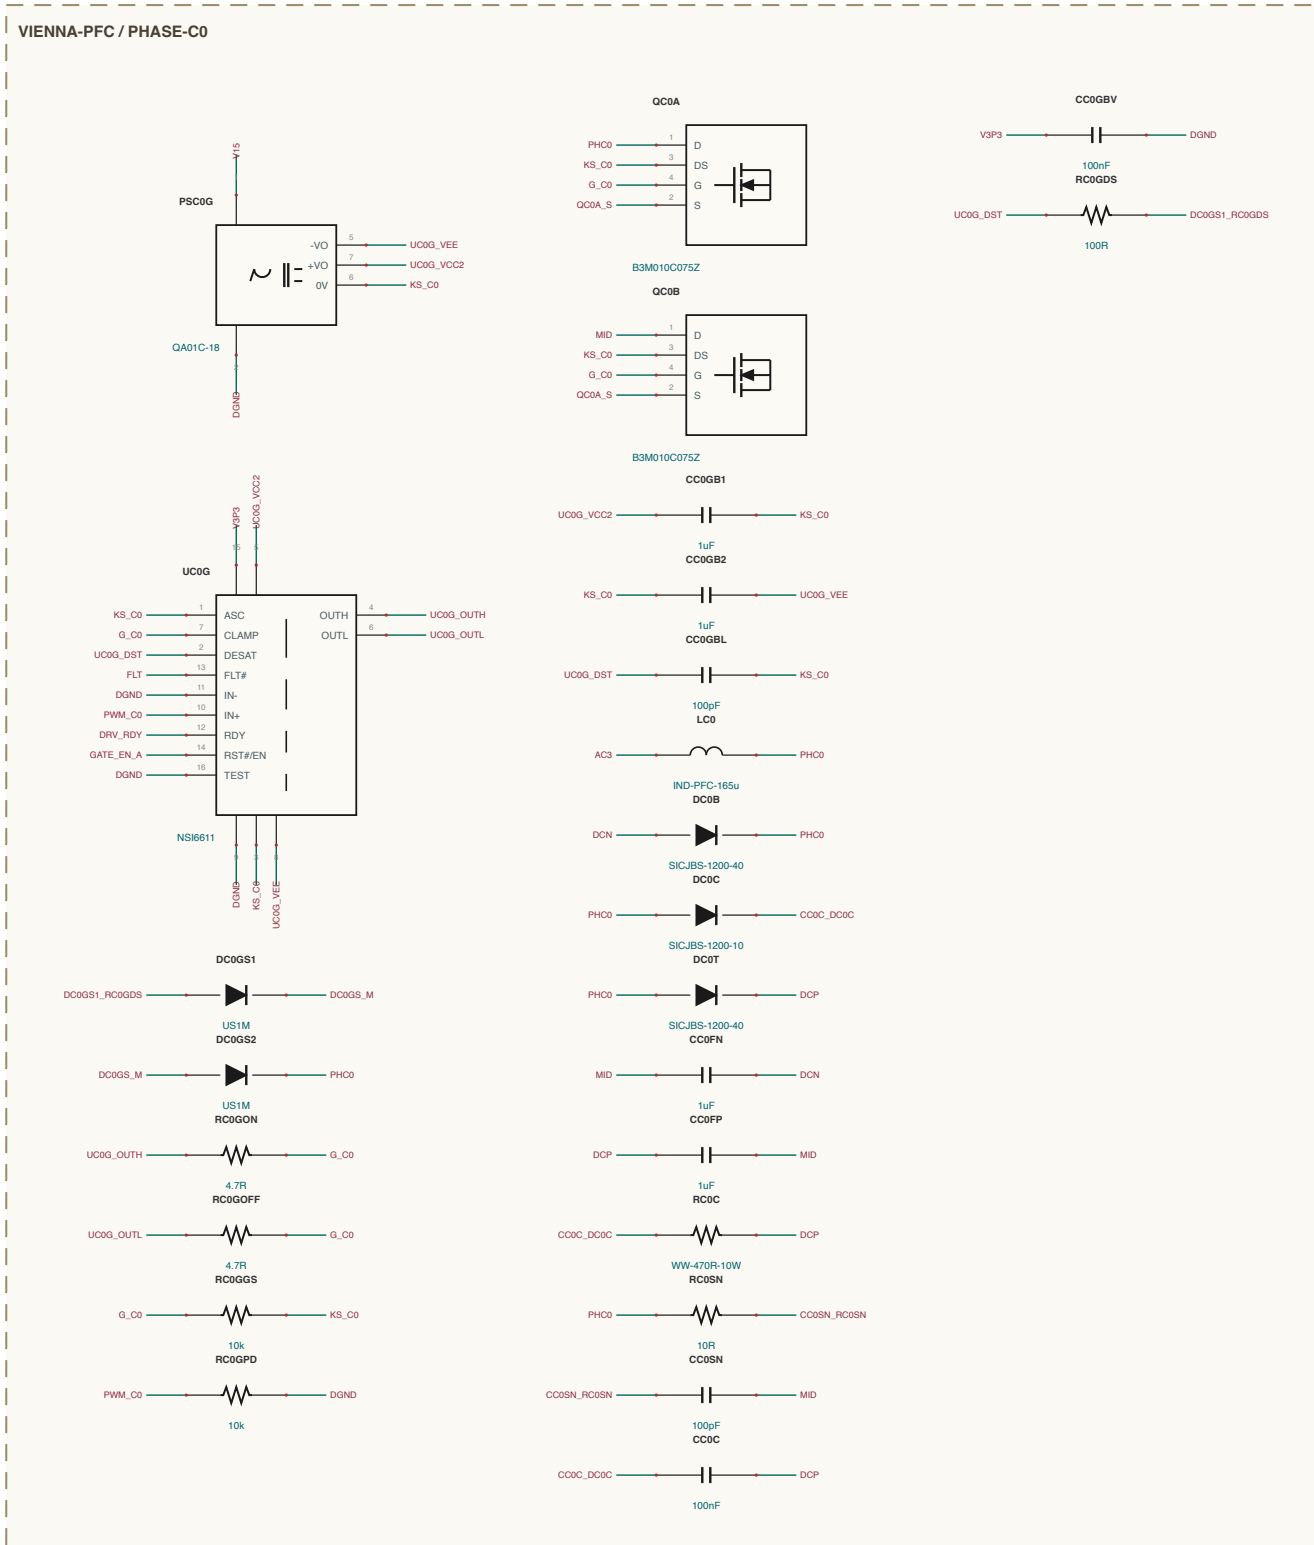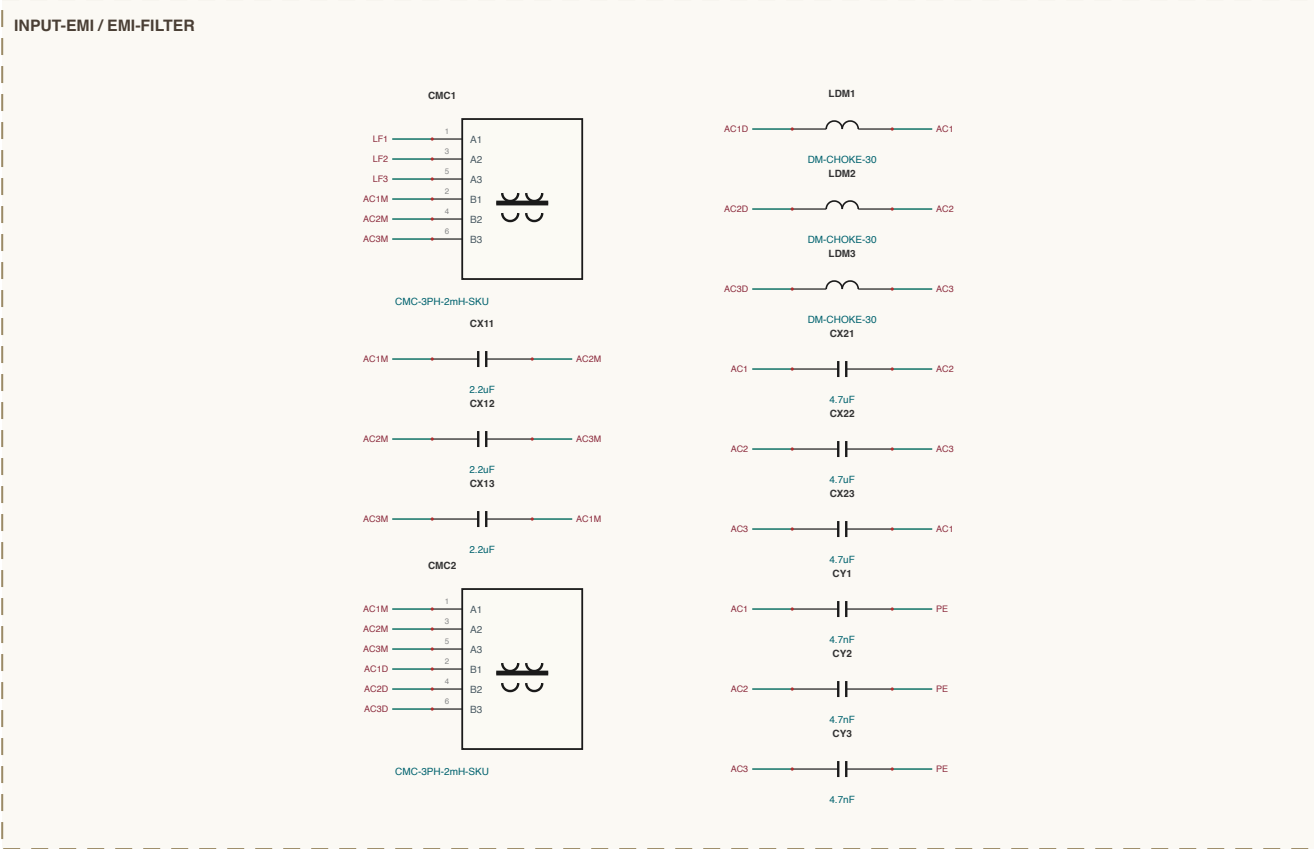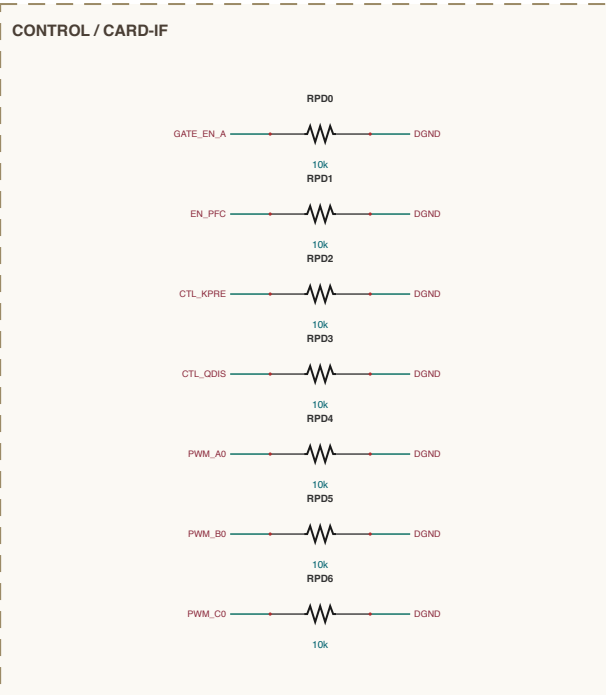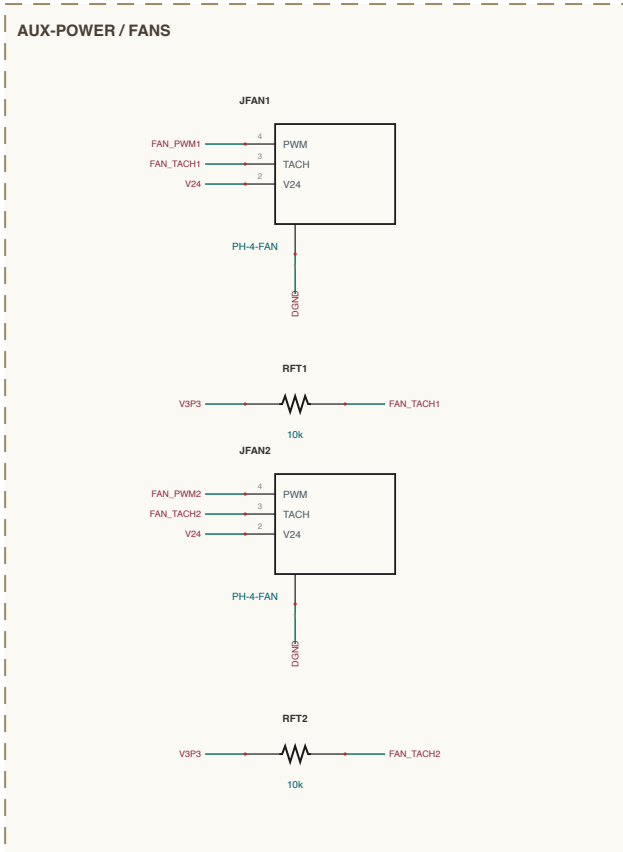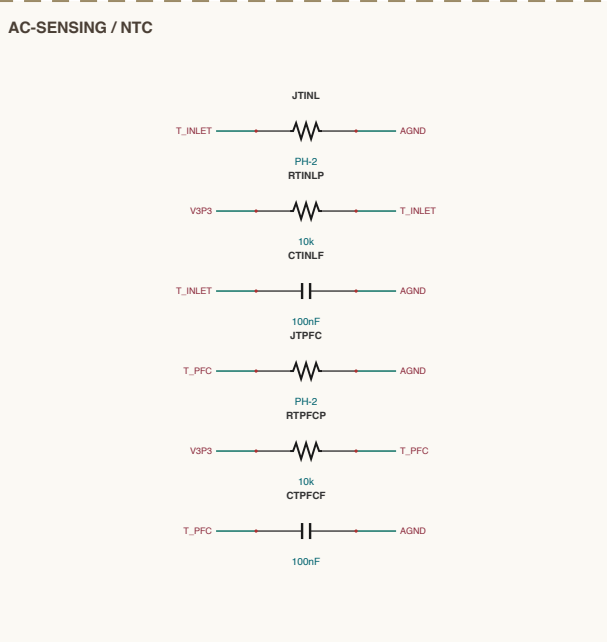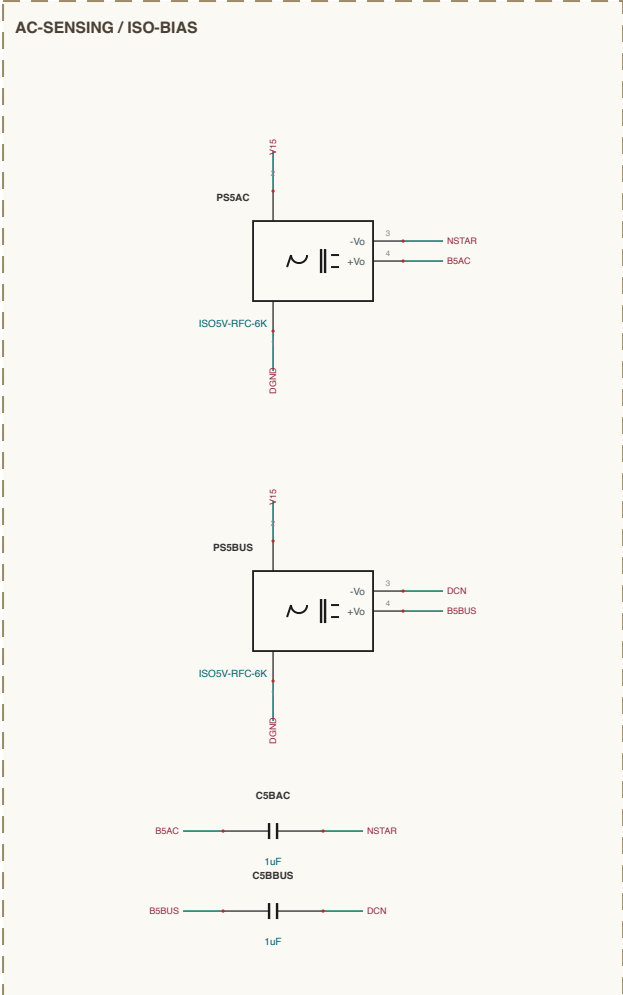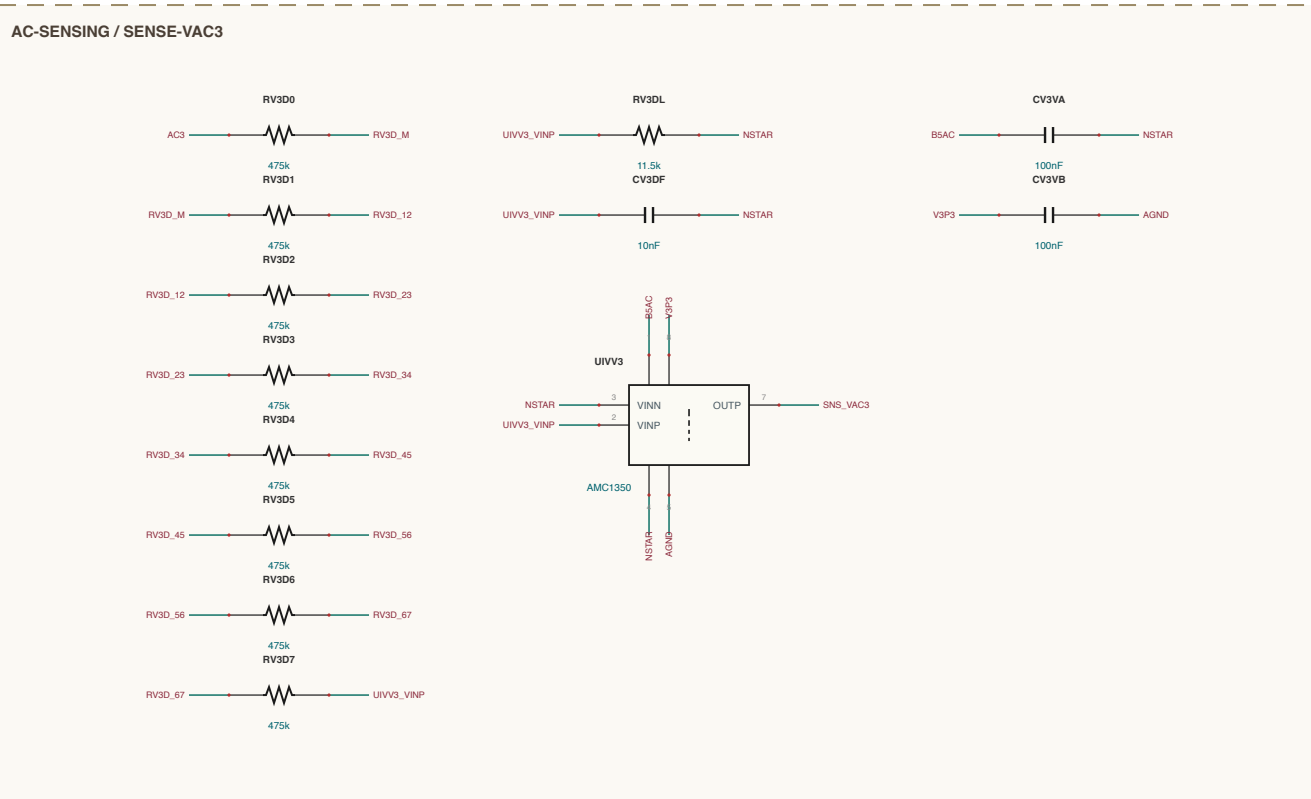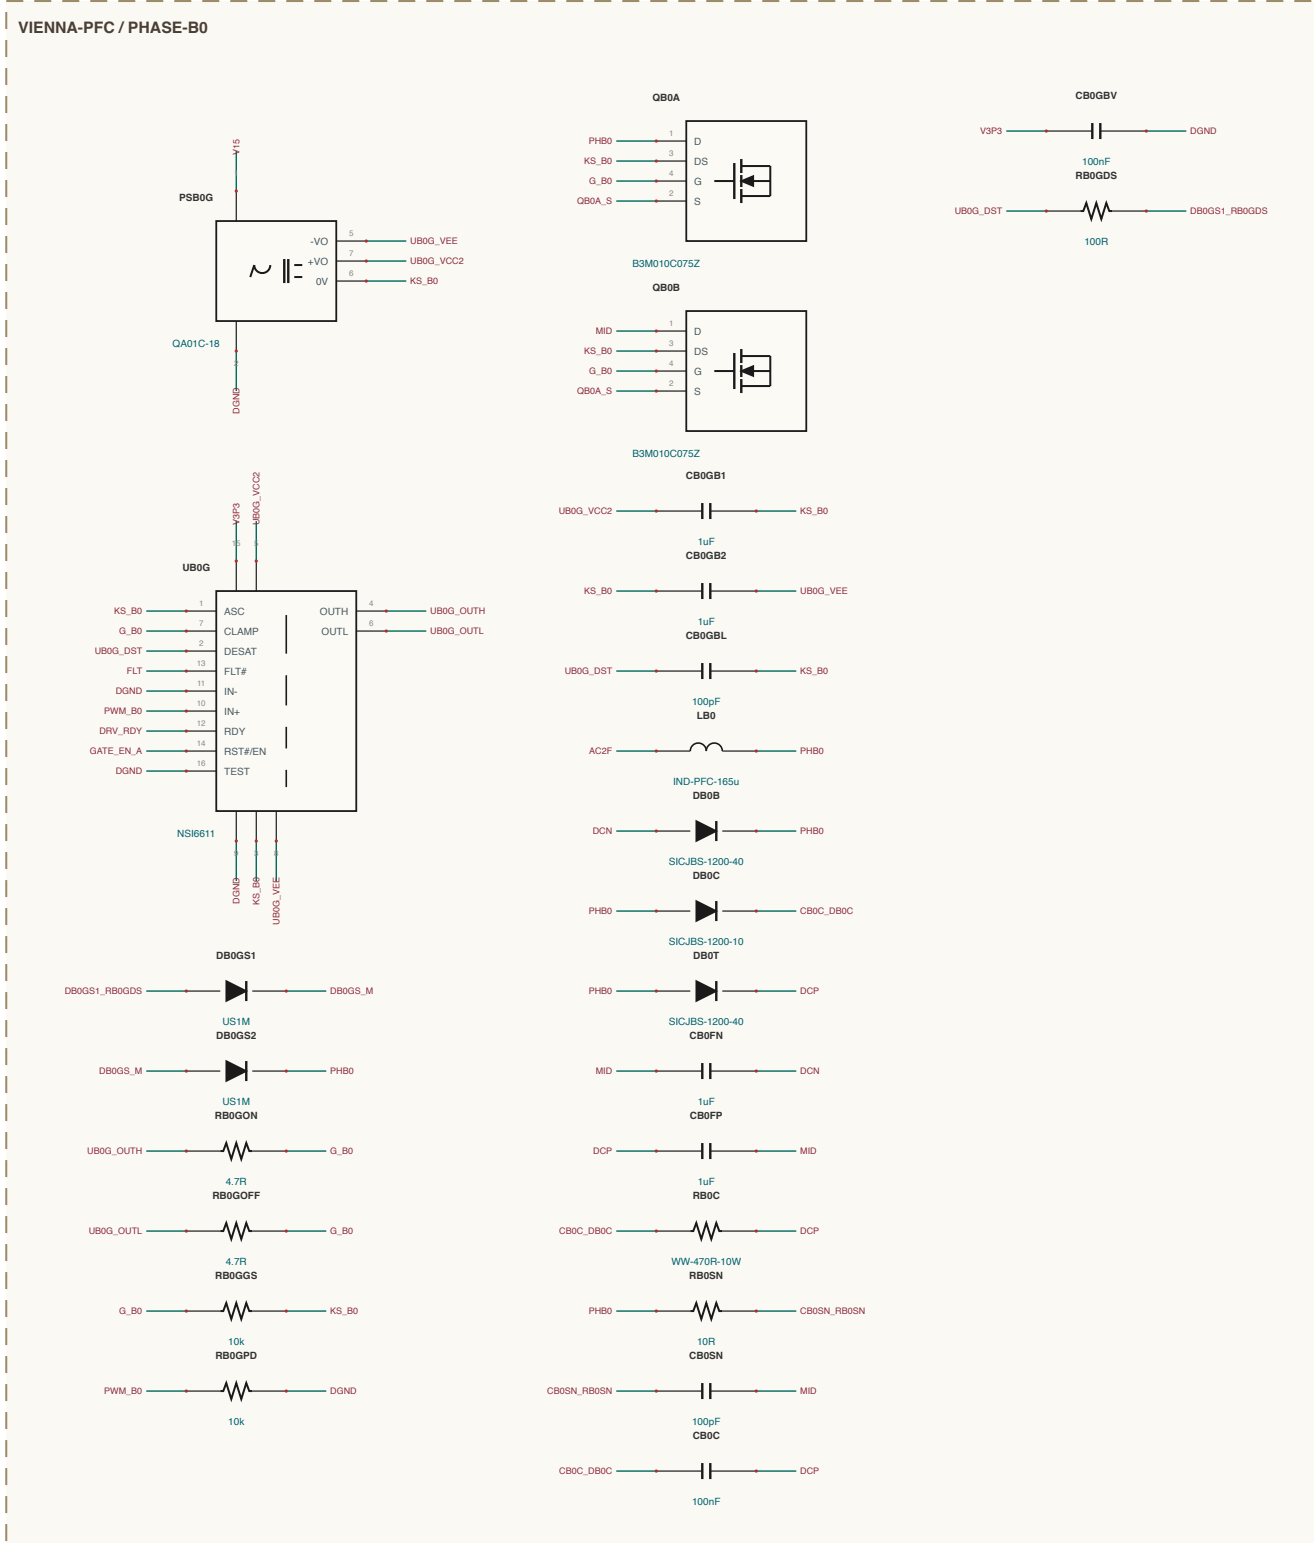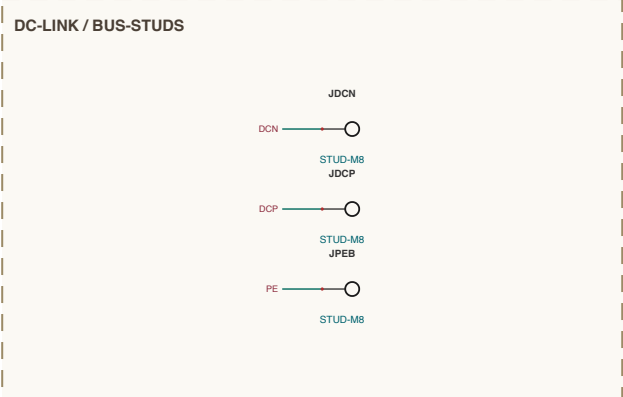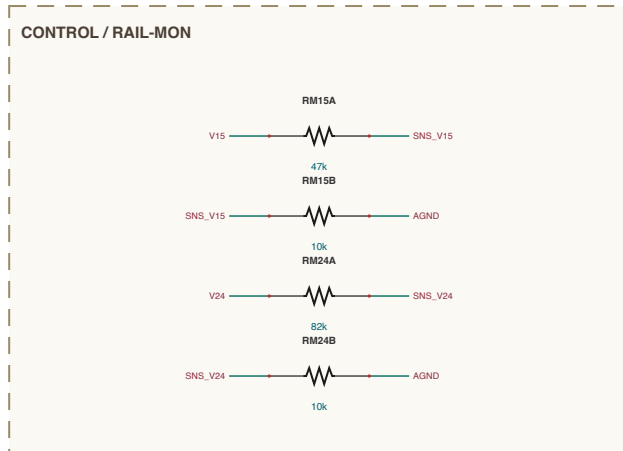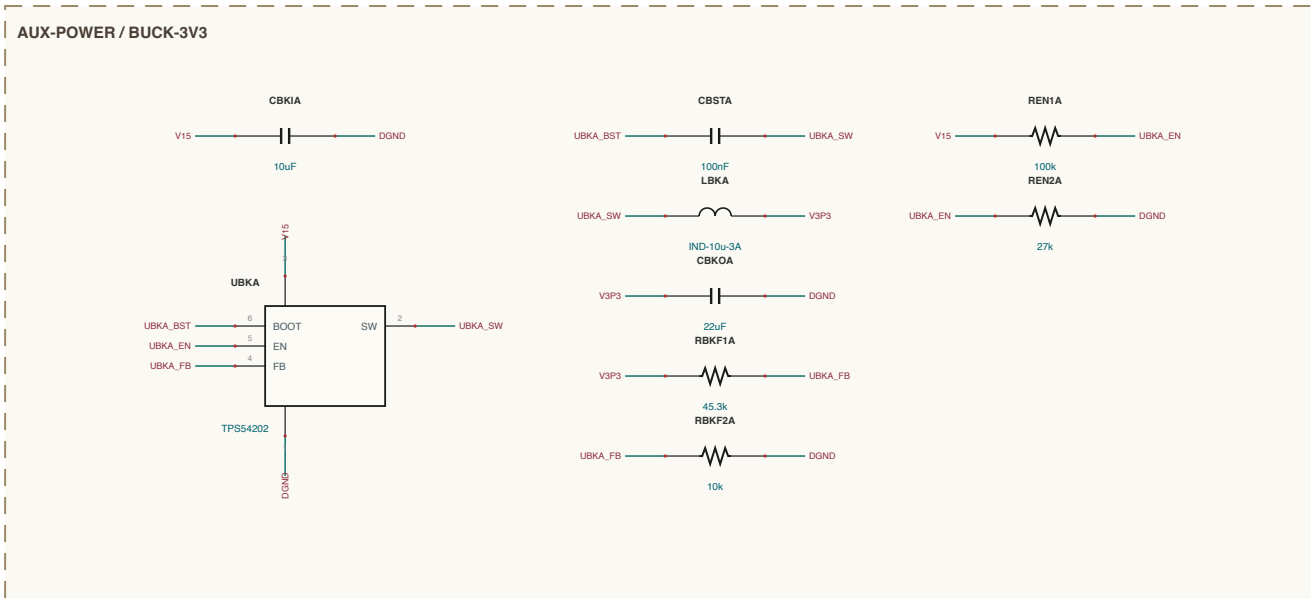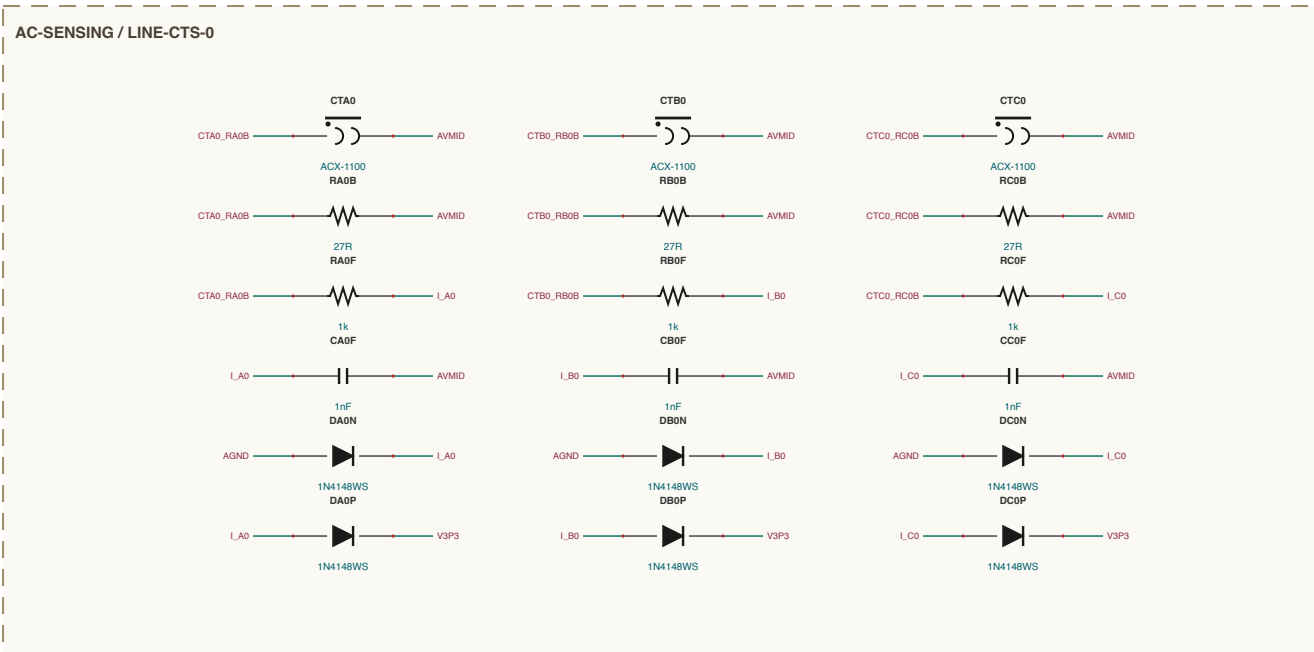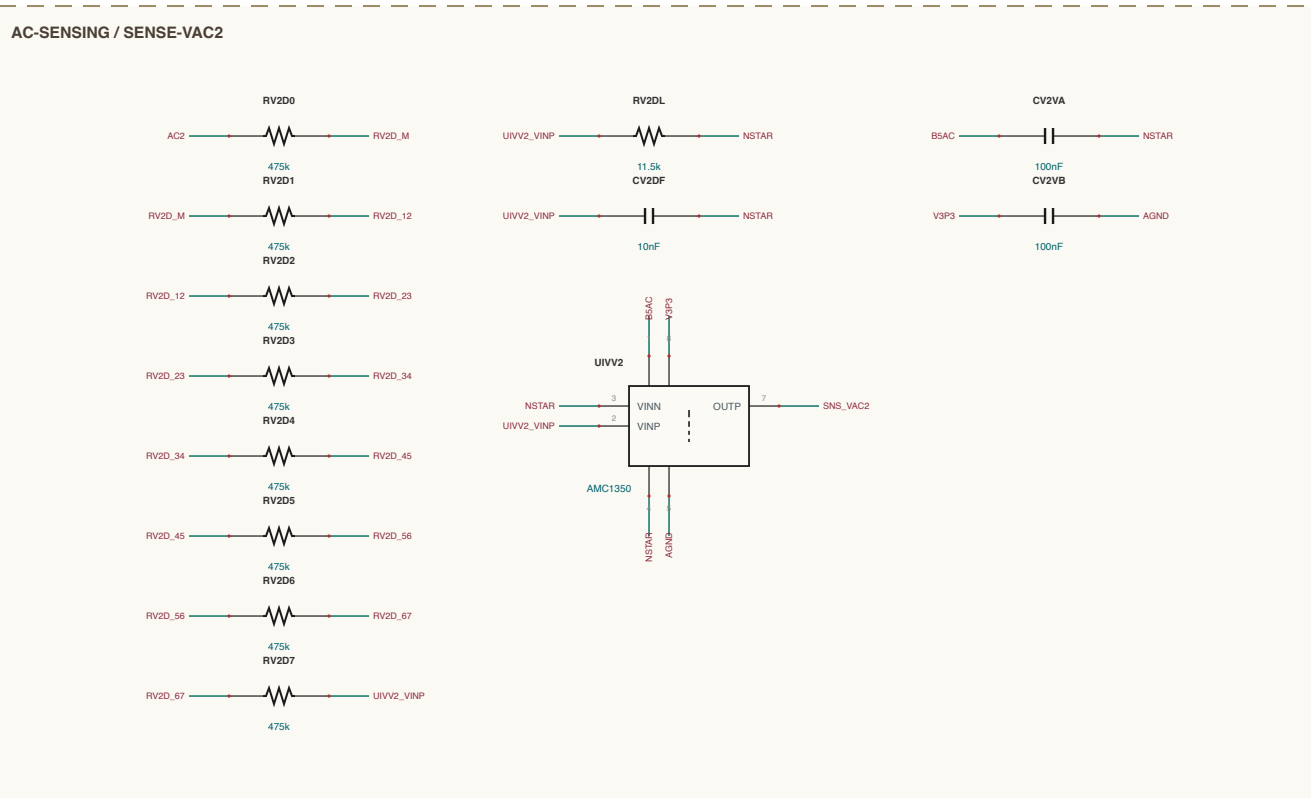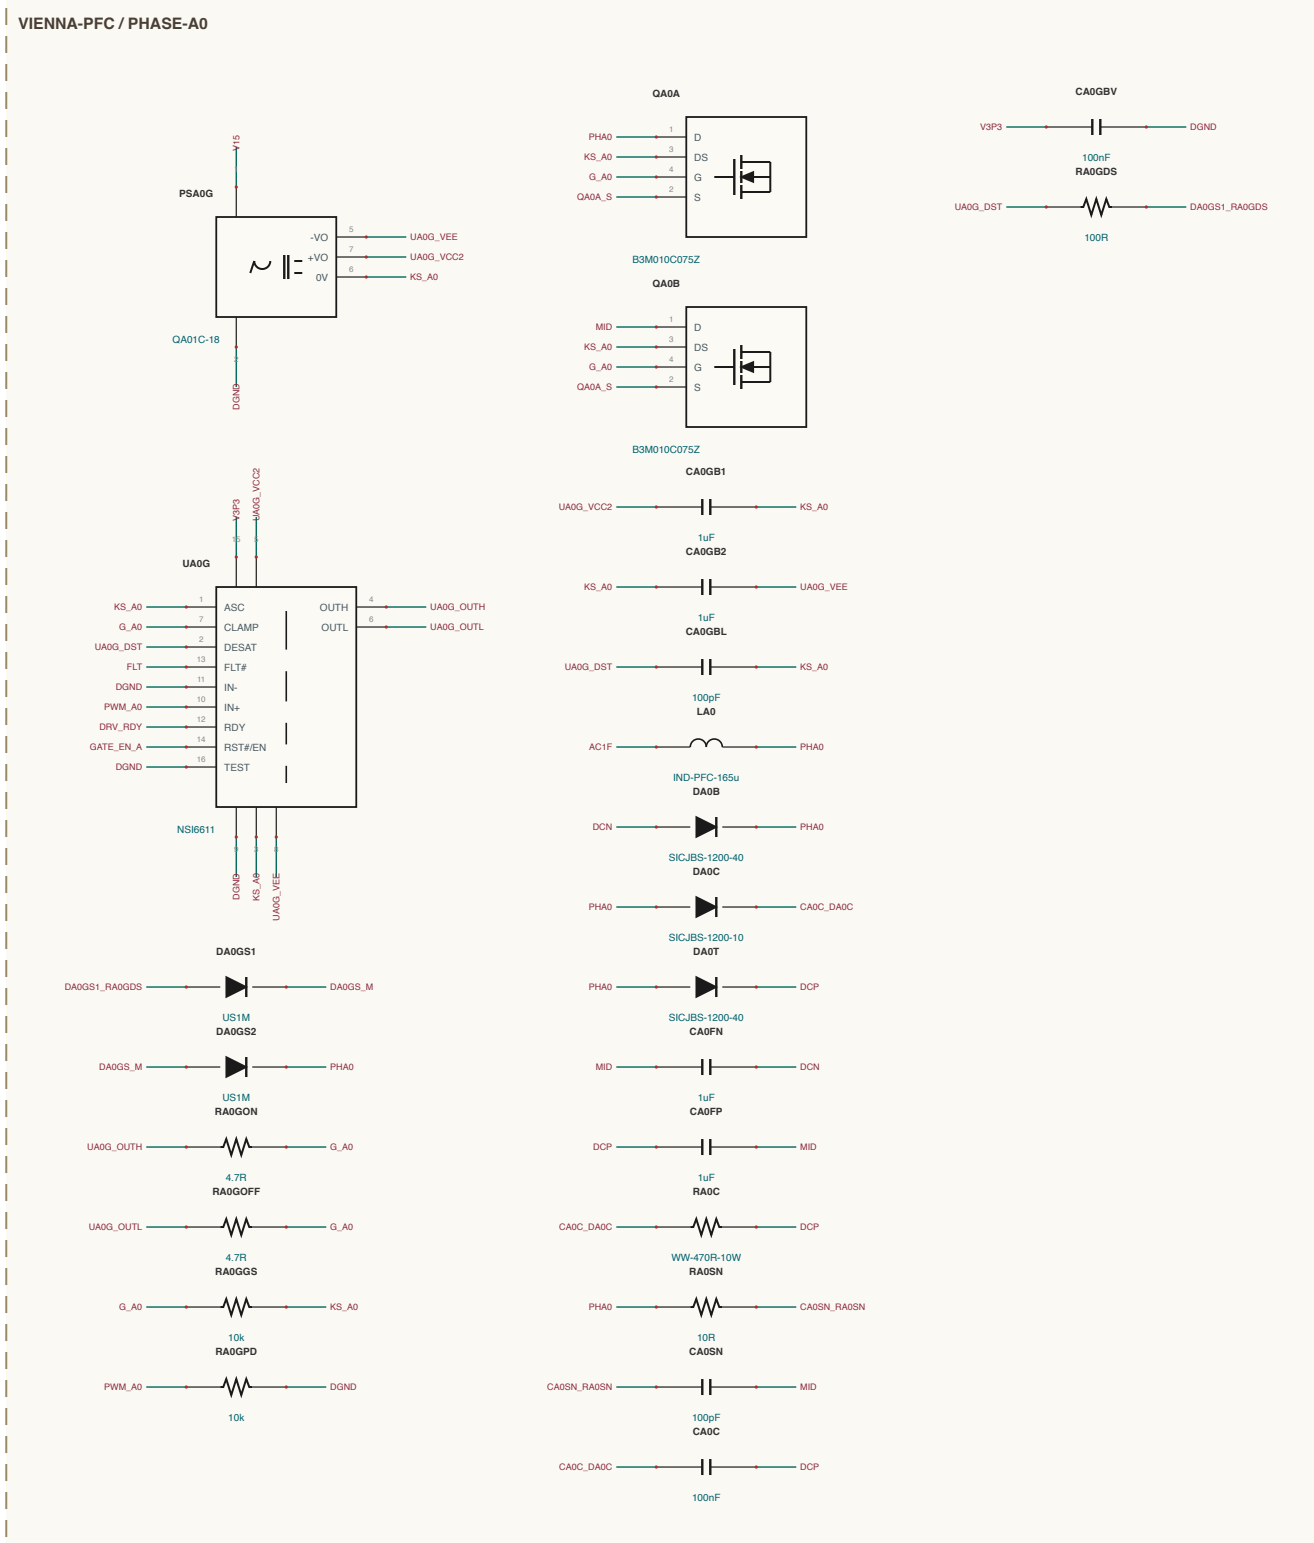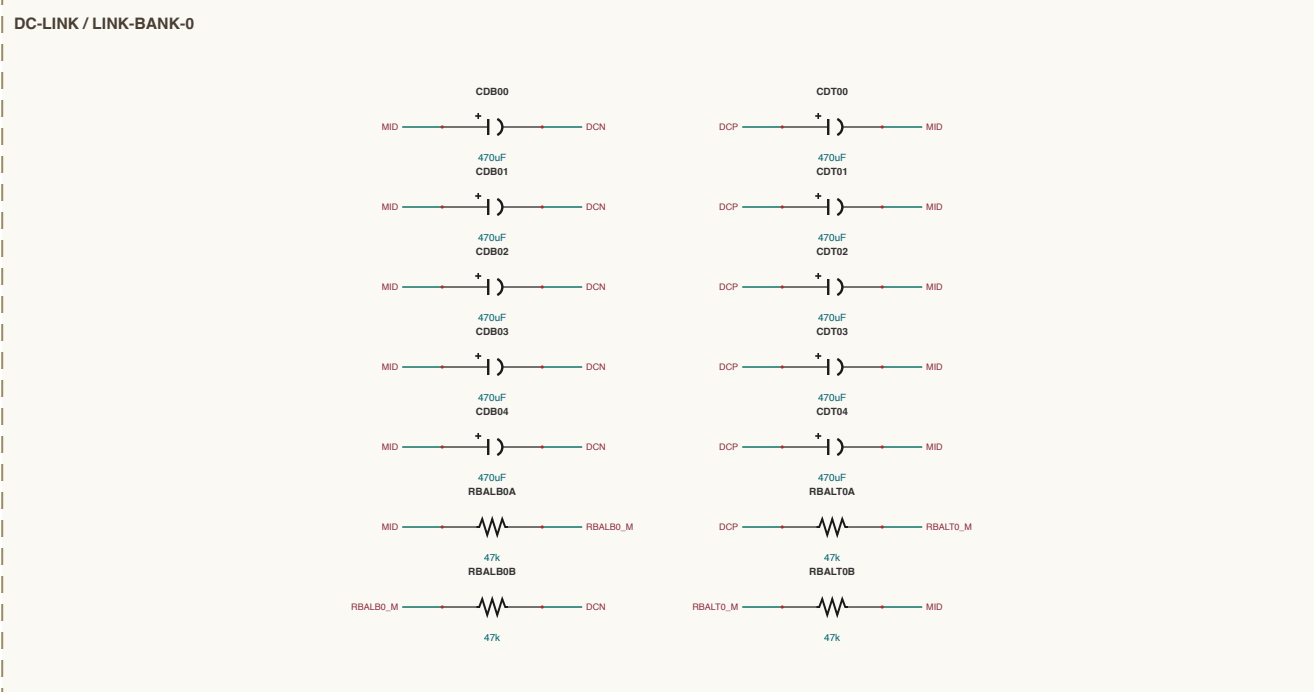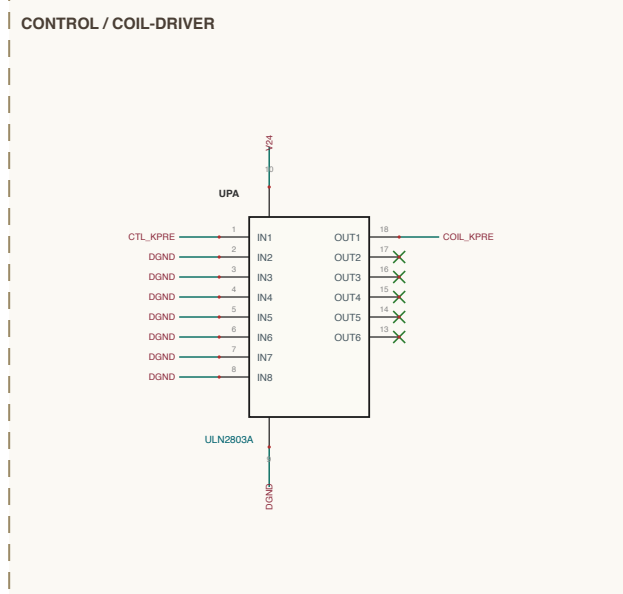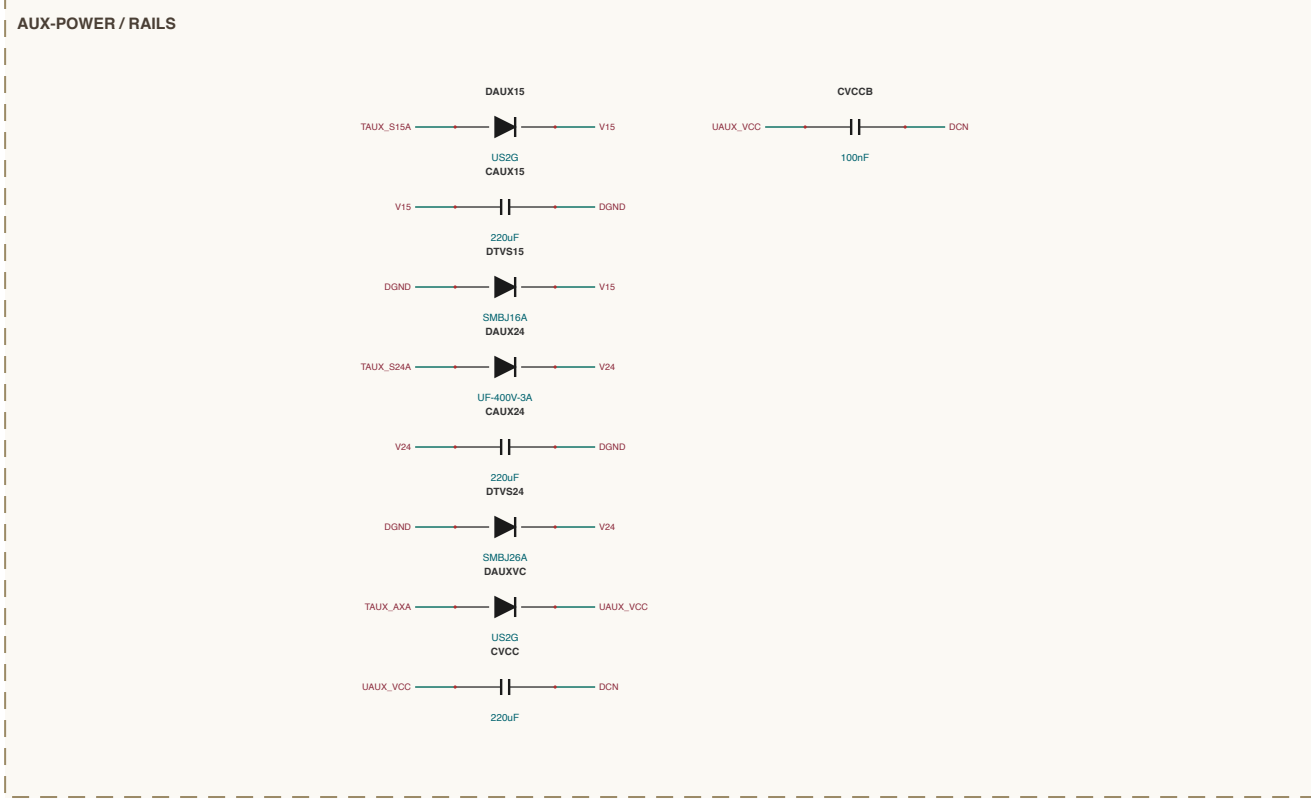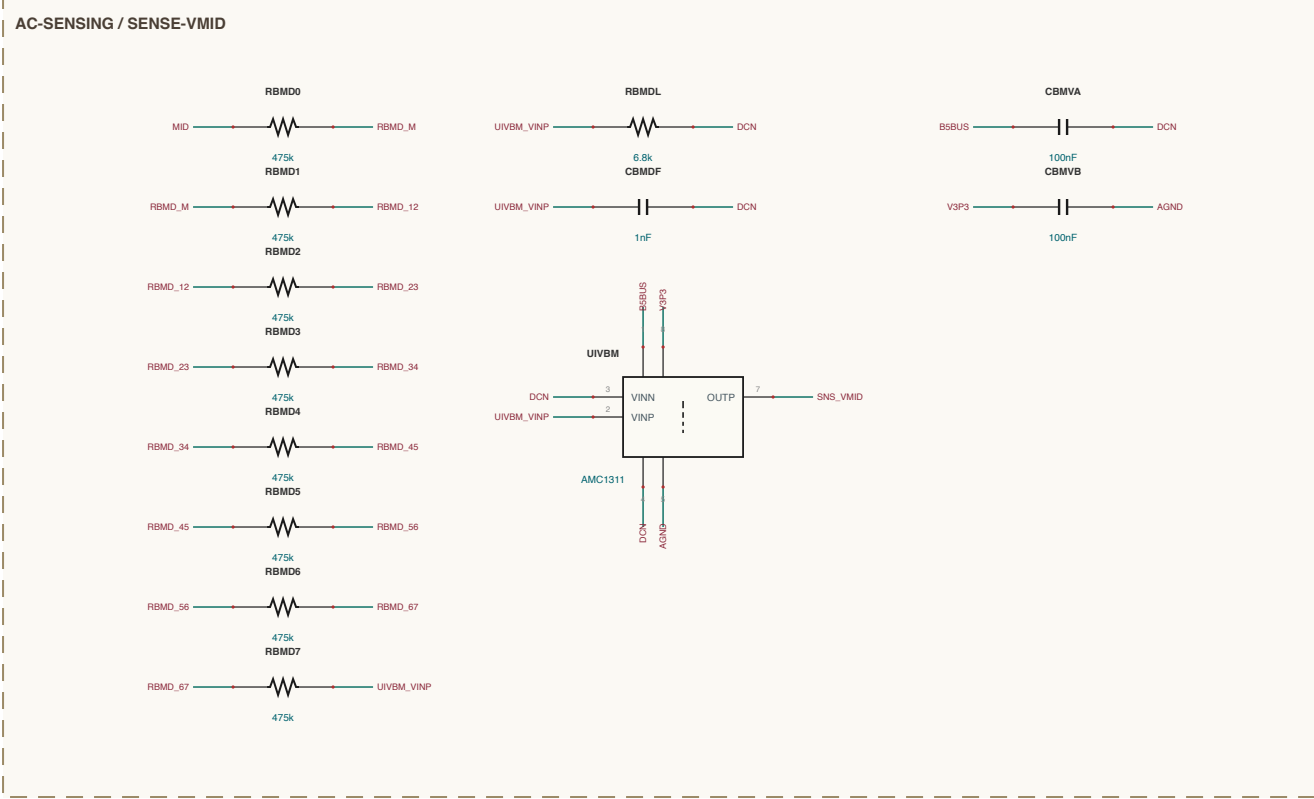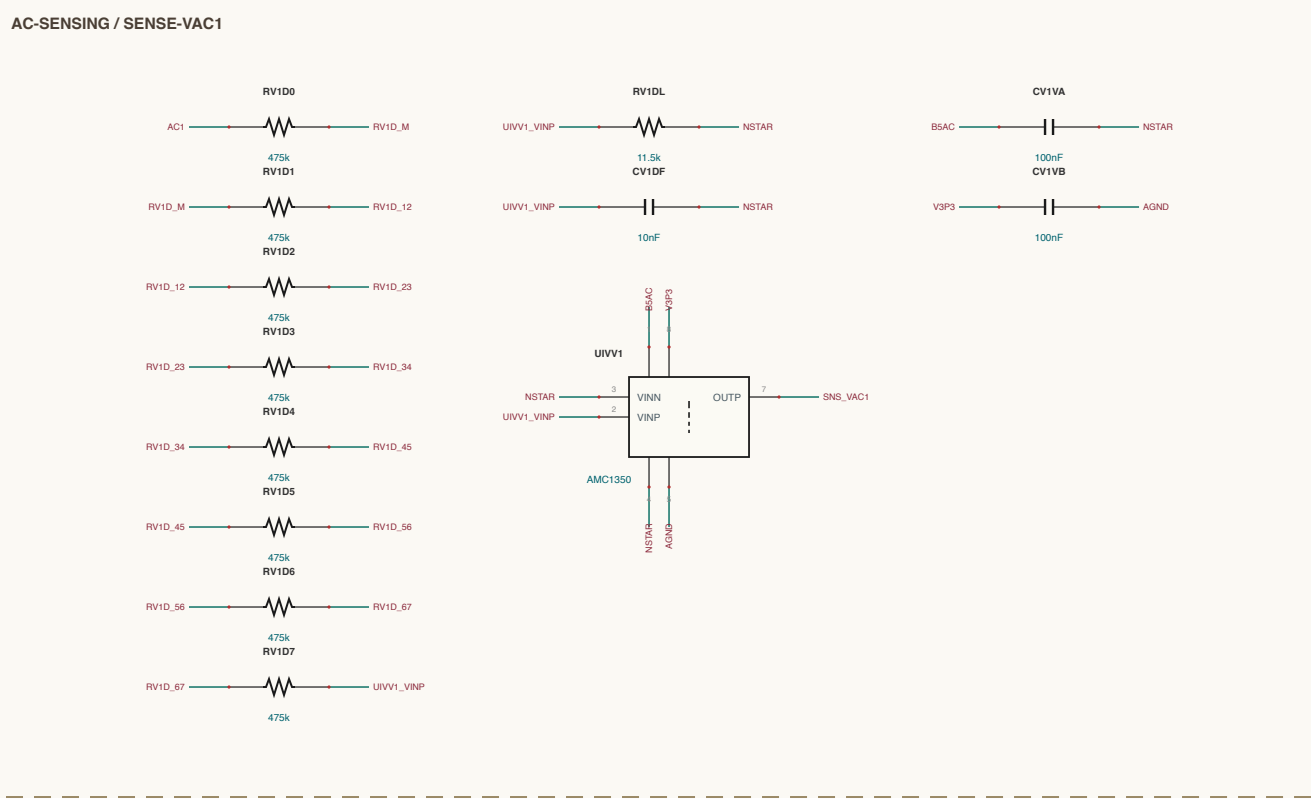

SHEET INDEX

30 kW AC-DC (lower) 1 of 3
AC-SENSING: 3 sections
AUX-POWER: 5 sections
CONTROL: 4 sections
INPUT-EMI: 4 sections
DC-LINK: 3 sections
VIENNA-PFC: 3 sections
rev 0.1: 28 sections - 288 components


NET NAMING

Internal junctions are named for what they join
Unearth, while made at that I-pin e.g. UNV0A, UNBP
Resistor, M-resistor of a series pair e.g. RES12A, R1
Resistor, across gap between Resistorsets e.g. RES12, R1
All others are explicit design rules


MAGNETICS CONSTRUCTION

Identify per designmagnetics and design, spec, file, acceptance from line sheet
01 LAG-001: 3x NOTBART 30000, 3000 (1) 1st string, Inductance from sheet
2x LAG-001: 3x 740 000, 1st, 1st string (1) 7.4mH (0.001) 1st string
1x LAG-001: 3x 740 000, 1st, 1st string (1) 7.4mH (0.001) 1st string
1x LAG-001: 3x 740 000, 1st, 1st string (1) 7.4mH (0.001) 1st string


CONTROL / MCU

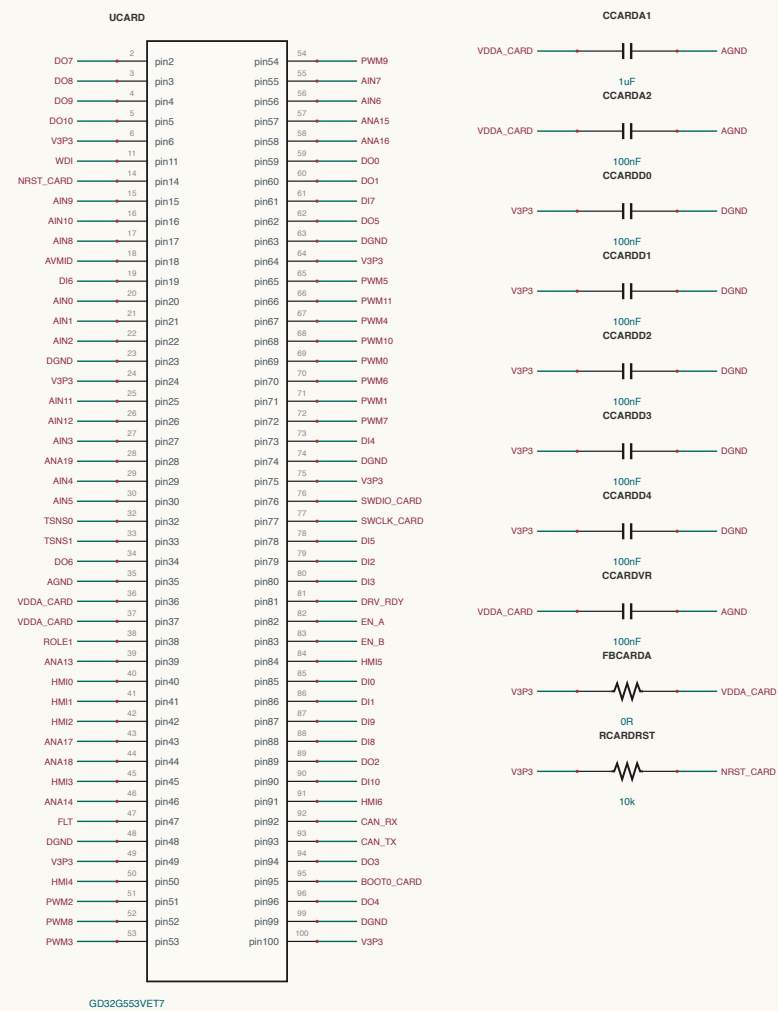


CONTROL / SWD-BOOT

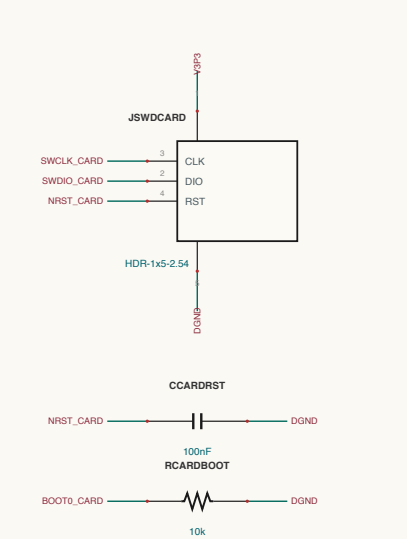


CONTROL / SAFETY

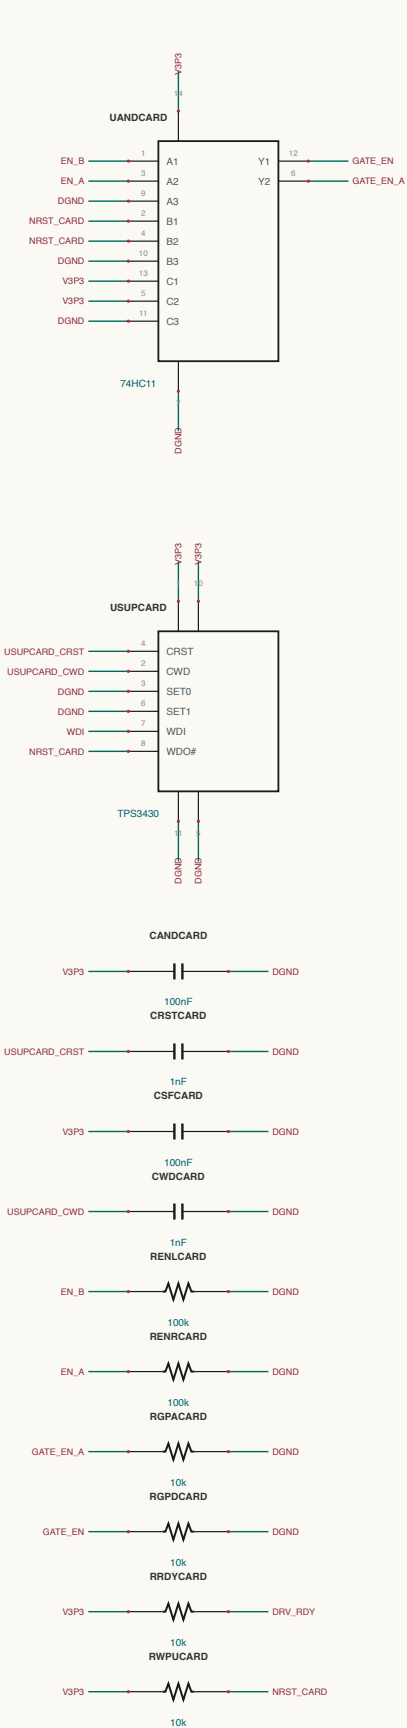


CONTROL / FLT-GROUND




CONTROL / ROLE



CONTROL / BUCK-3V3

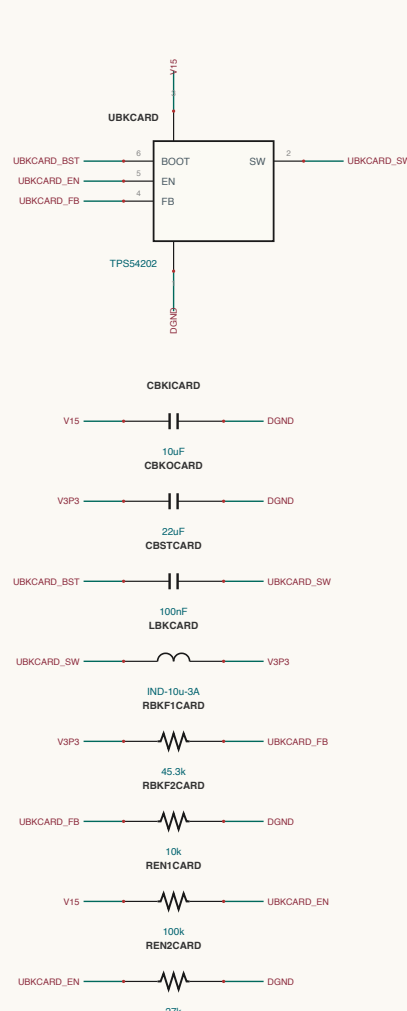

CONTROL / ANALOG-MID

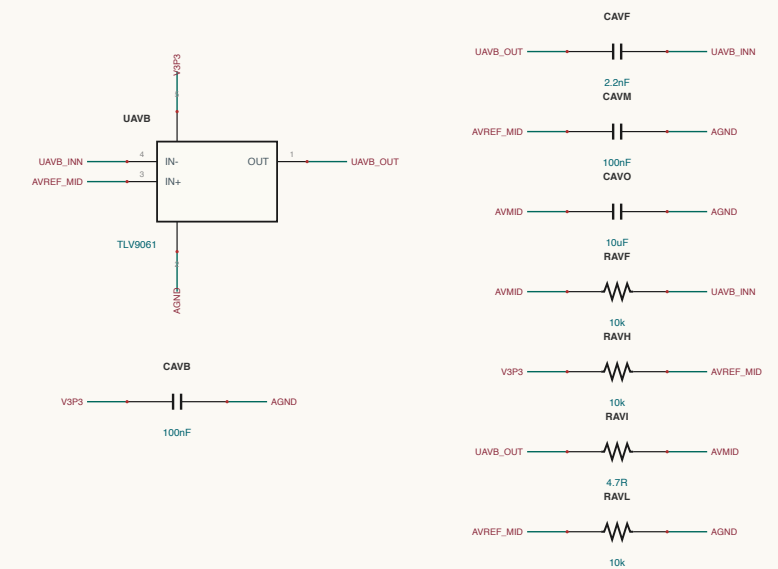

CONTROL / CARD-IF

