




## BANKS-SP / SP-MATRIX

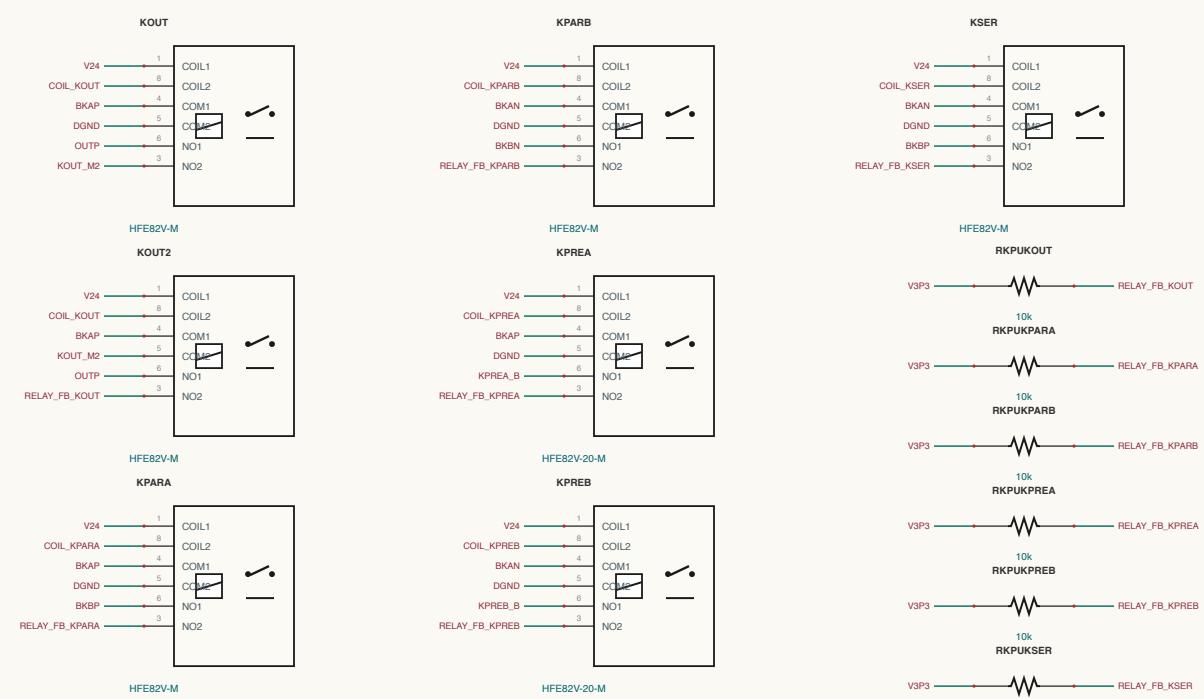


## BANKS-SP / BLEEDERS

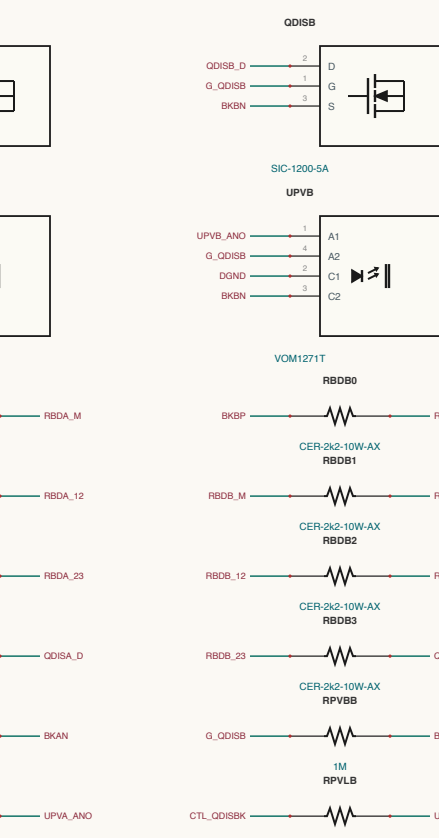

## BANKS-SP / BANK-A

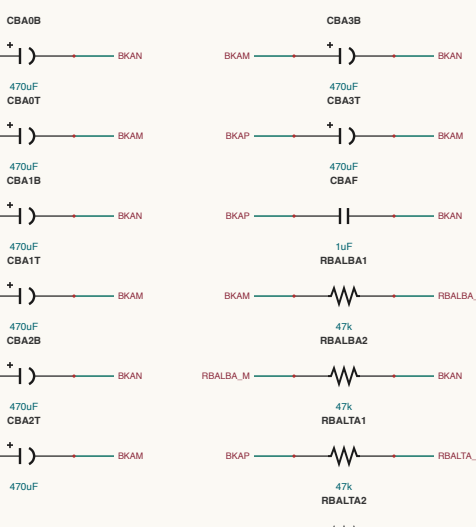

## BANKS-SP / BANK-G

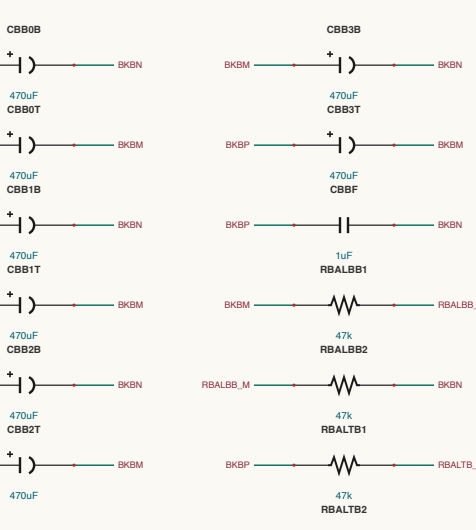

## SHEET INDEX

SHEET 1 of 2

OUTPUT-BANKING: 4 sections

BANKS-SP: 4 sections

LLC-LATCH: 4 sections

CONTROL: 4 sections

LLC-TANKS: 4 sections

COMMS-INT: 2 sections

VIA 2x 12 sections, 120 components

## NET NAMING

Internal positions are named for what they join

Supply - often made of four C pins e.g. SUPPLY, SUPPLY

Resistor - 2x multiplex of a series pair e.g. RESISTOR, RESISTOR

Inductor - often 2x between Inductor/Inductor e.g. INDUCTOR, INDUCTOR

All others are explicit design nets

## MAGNETICS CONSTRUCTION


Identify per manufacturer and during gap, fill, acceptance tests (see flow)

0.17-1.70 (x 0.0000) per section, 0.00 (0.00)


0.17-1.70 (x 0.0000) per section, 0.00 (0.00)

Gap Control (see values printed at the TANK sections)


## COMMS-INT / INT

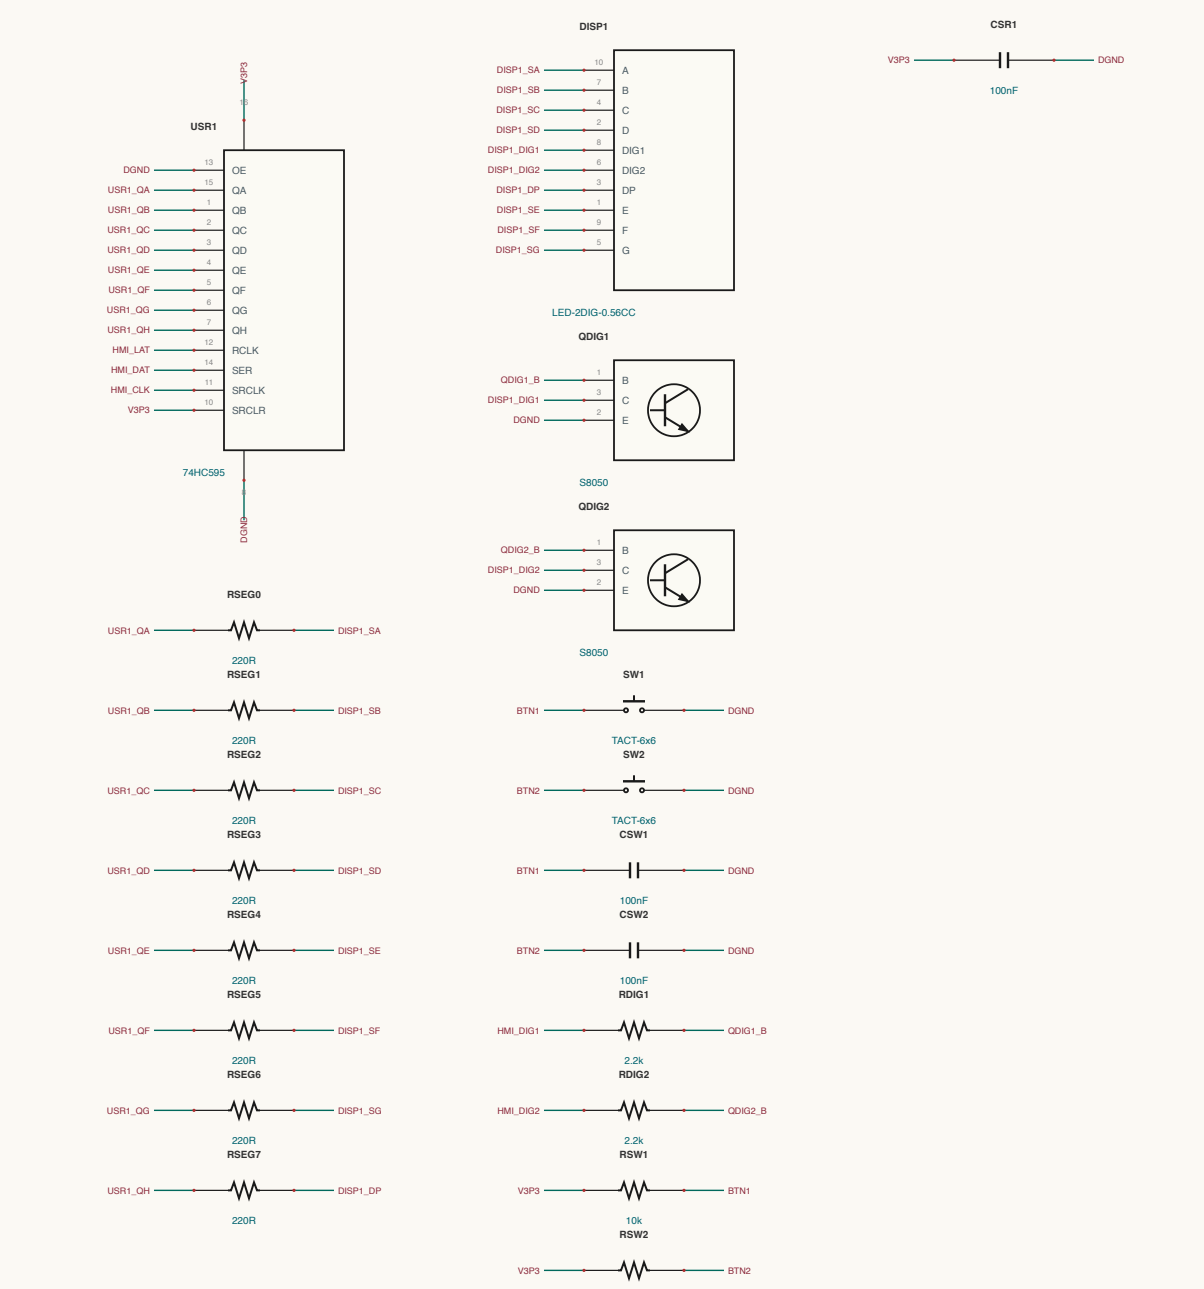


## CONTROL / COL-DRIVER

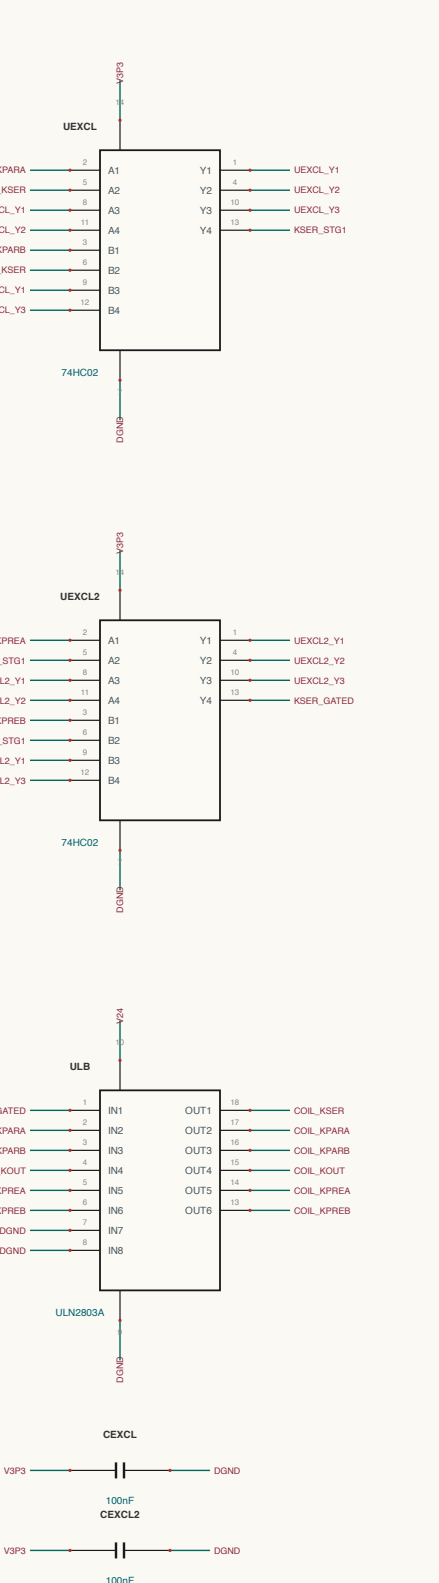


## CONTROL / CAN-B

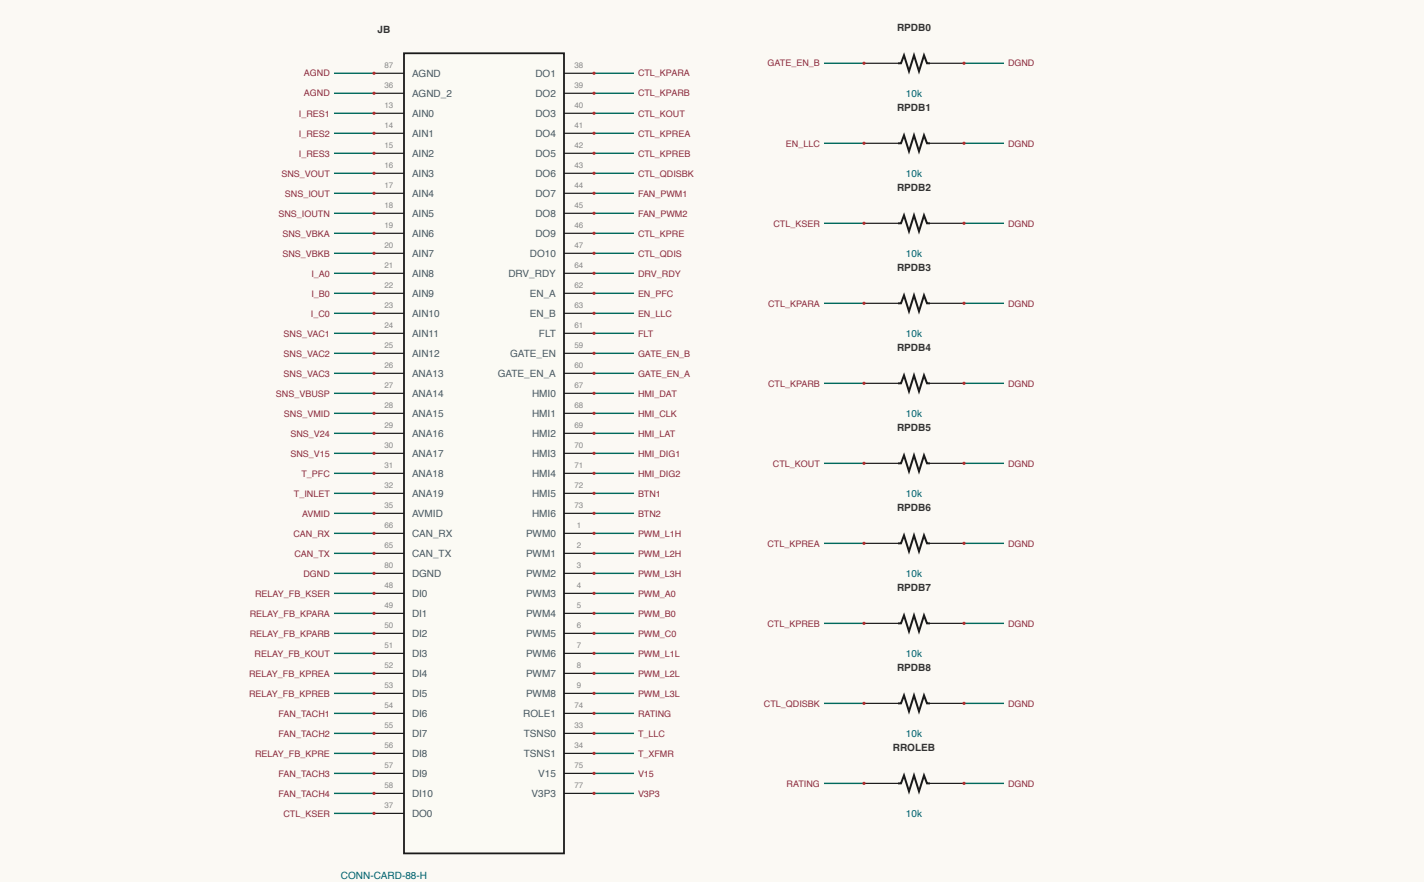


## CONTROL / INTERCONNECT

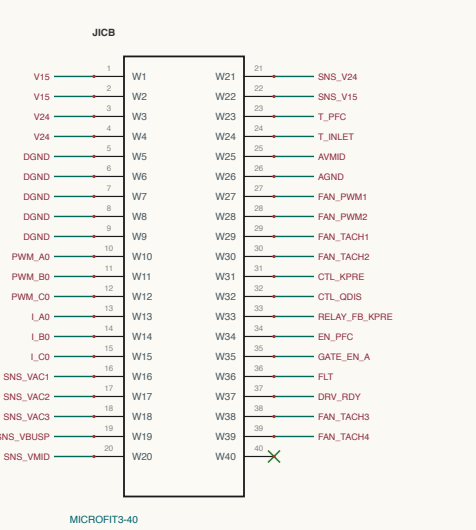


## LLC-LATCH / LATCH-1

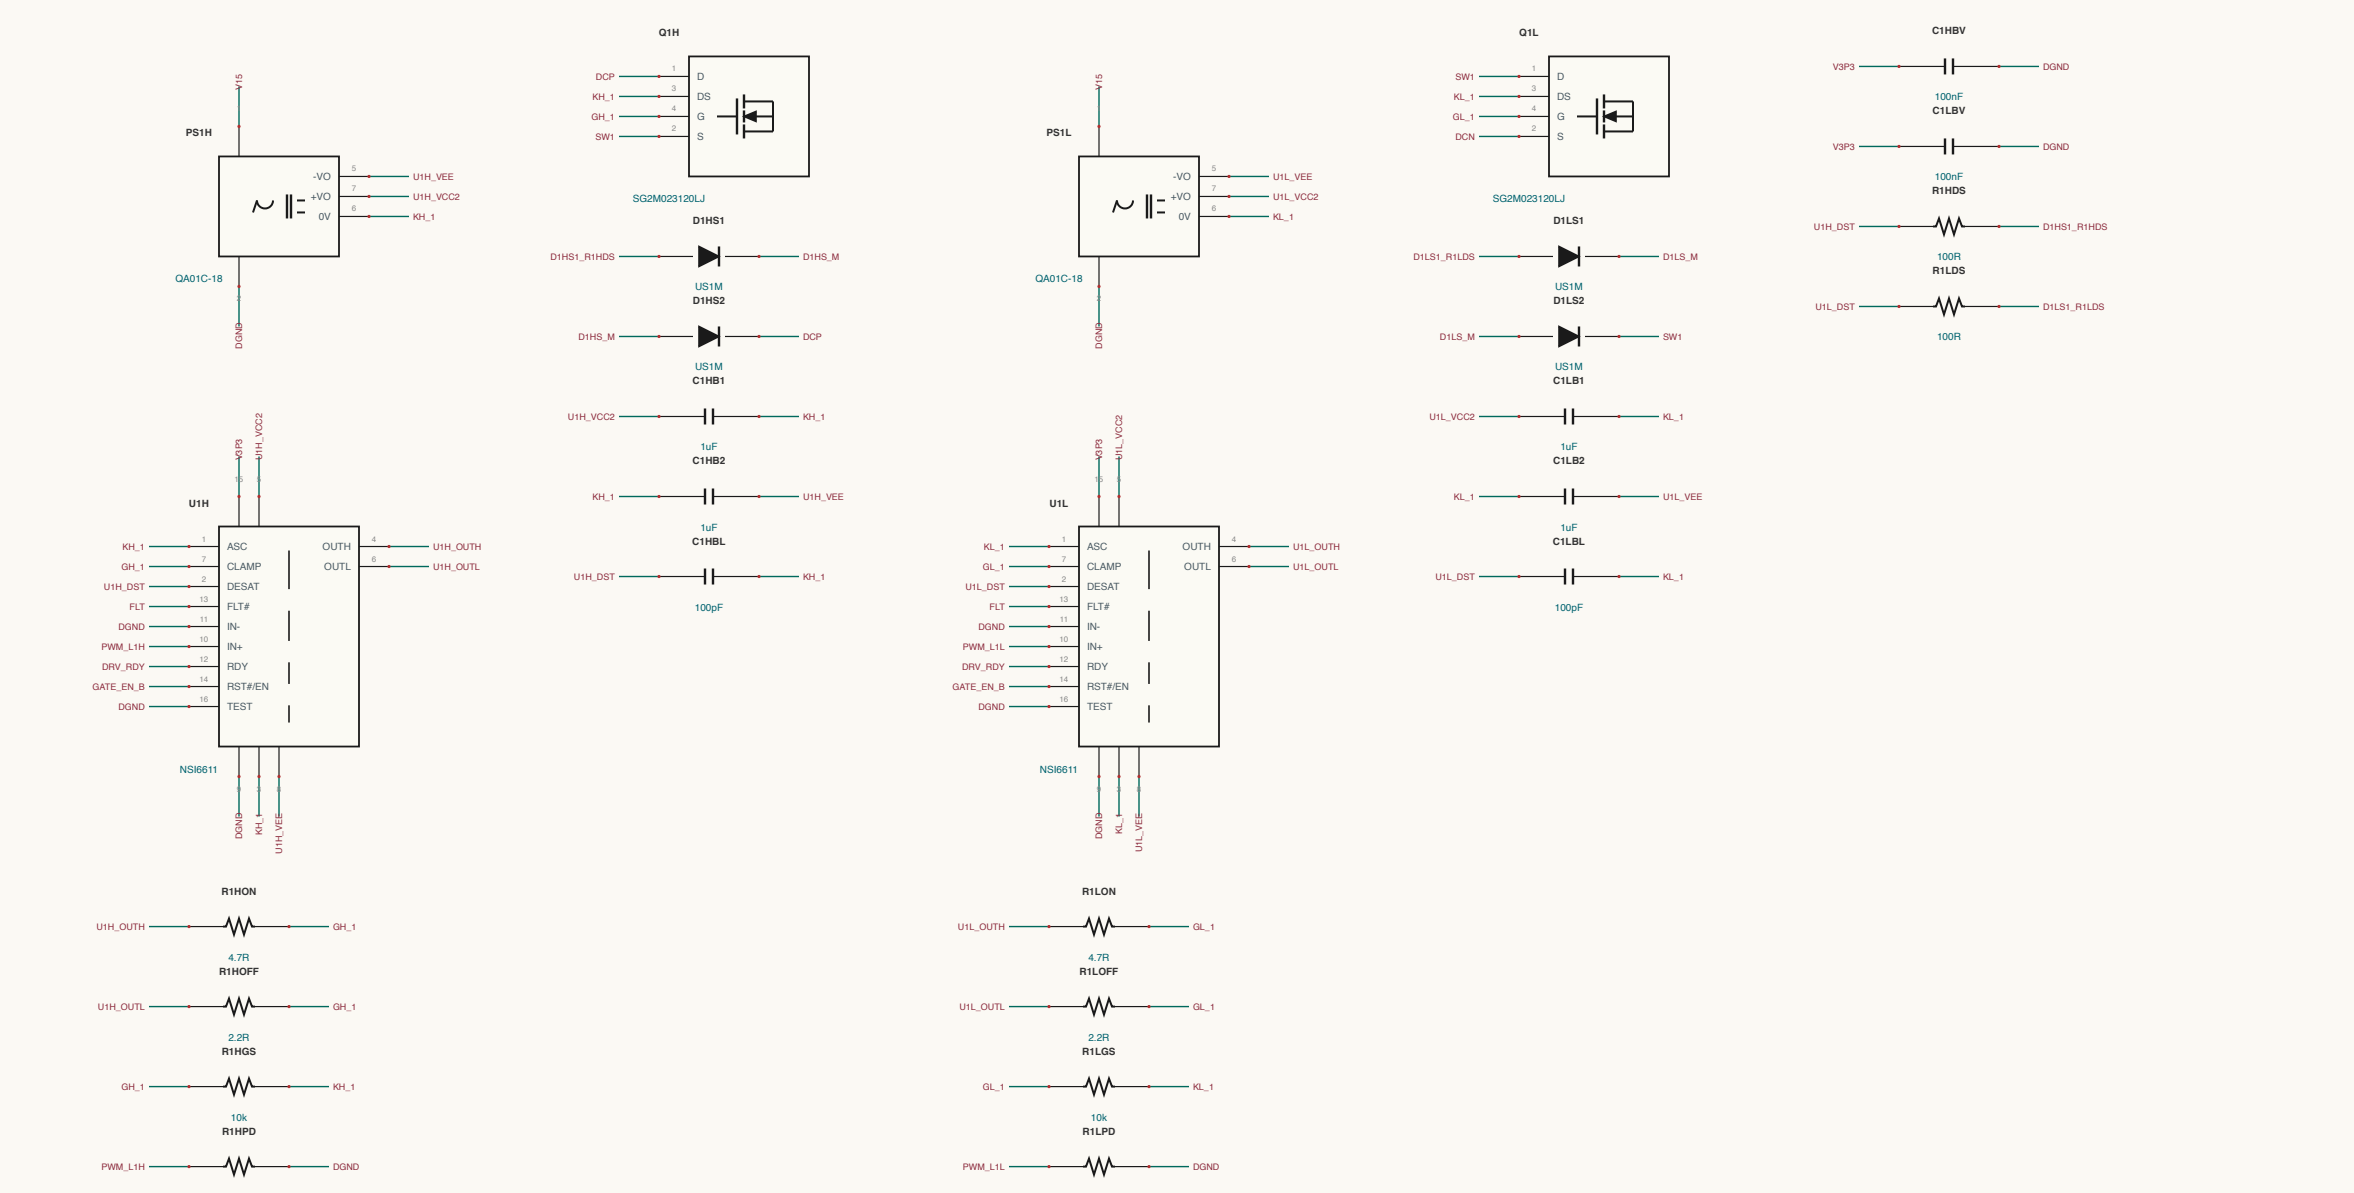


## LLC-LATCH / LATCH-2

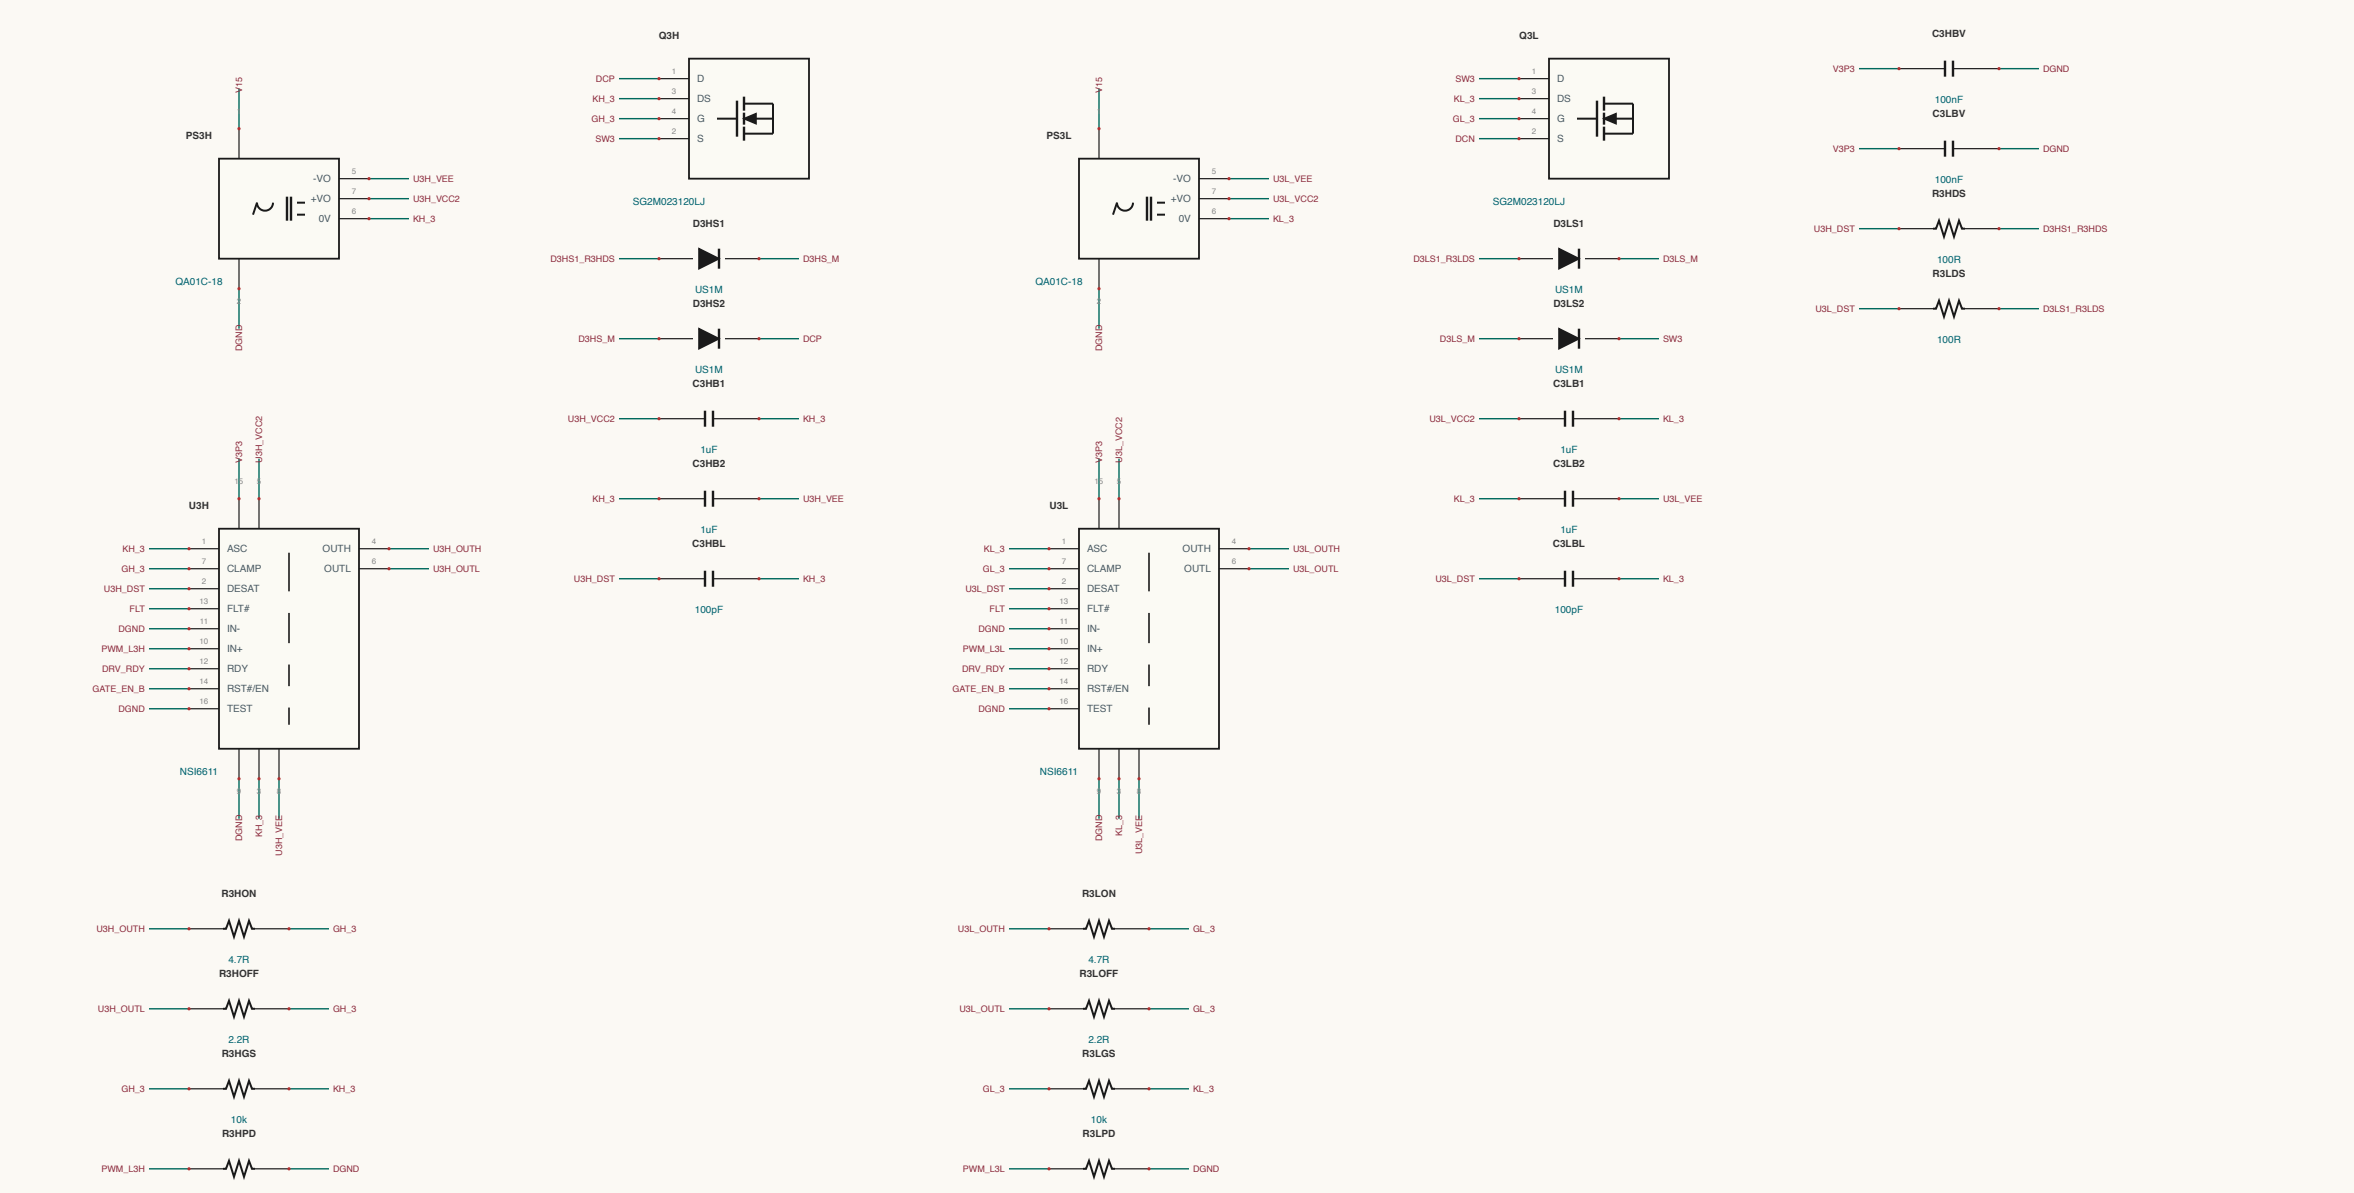


## LLC-LATCH / LATCH-3

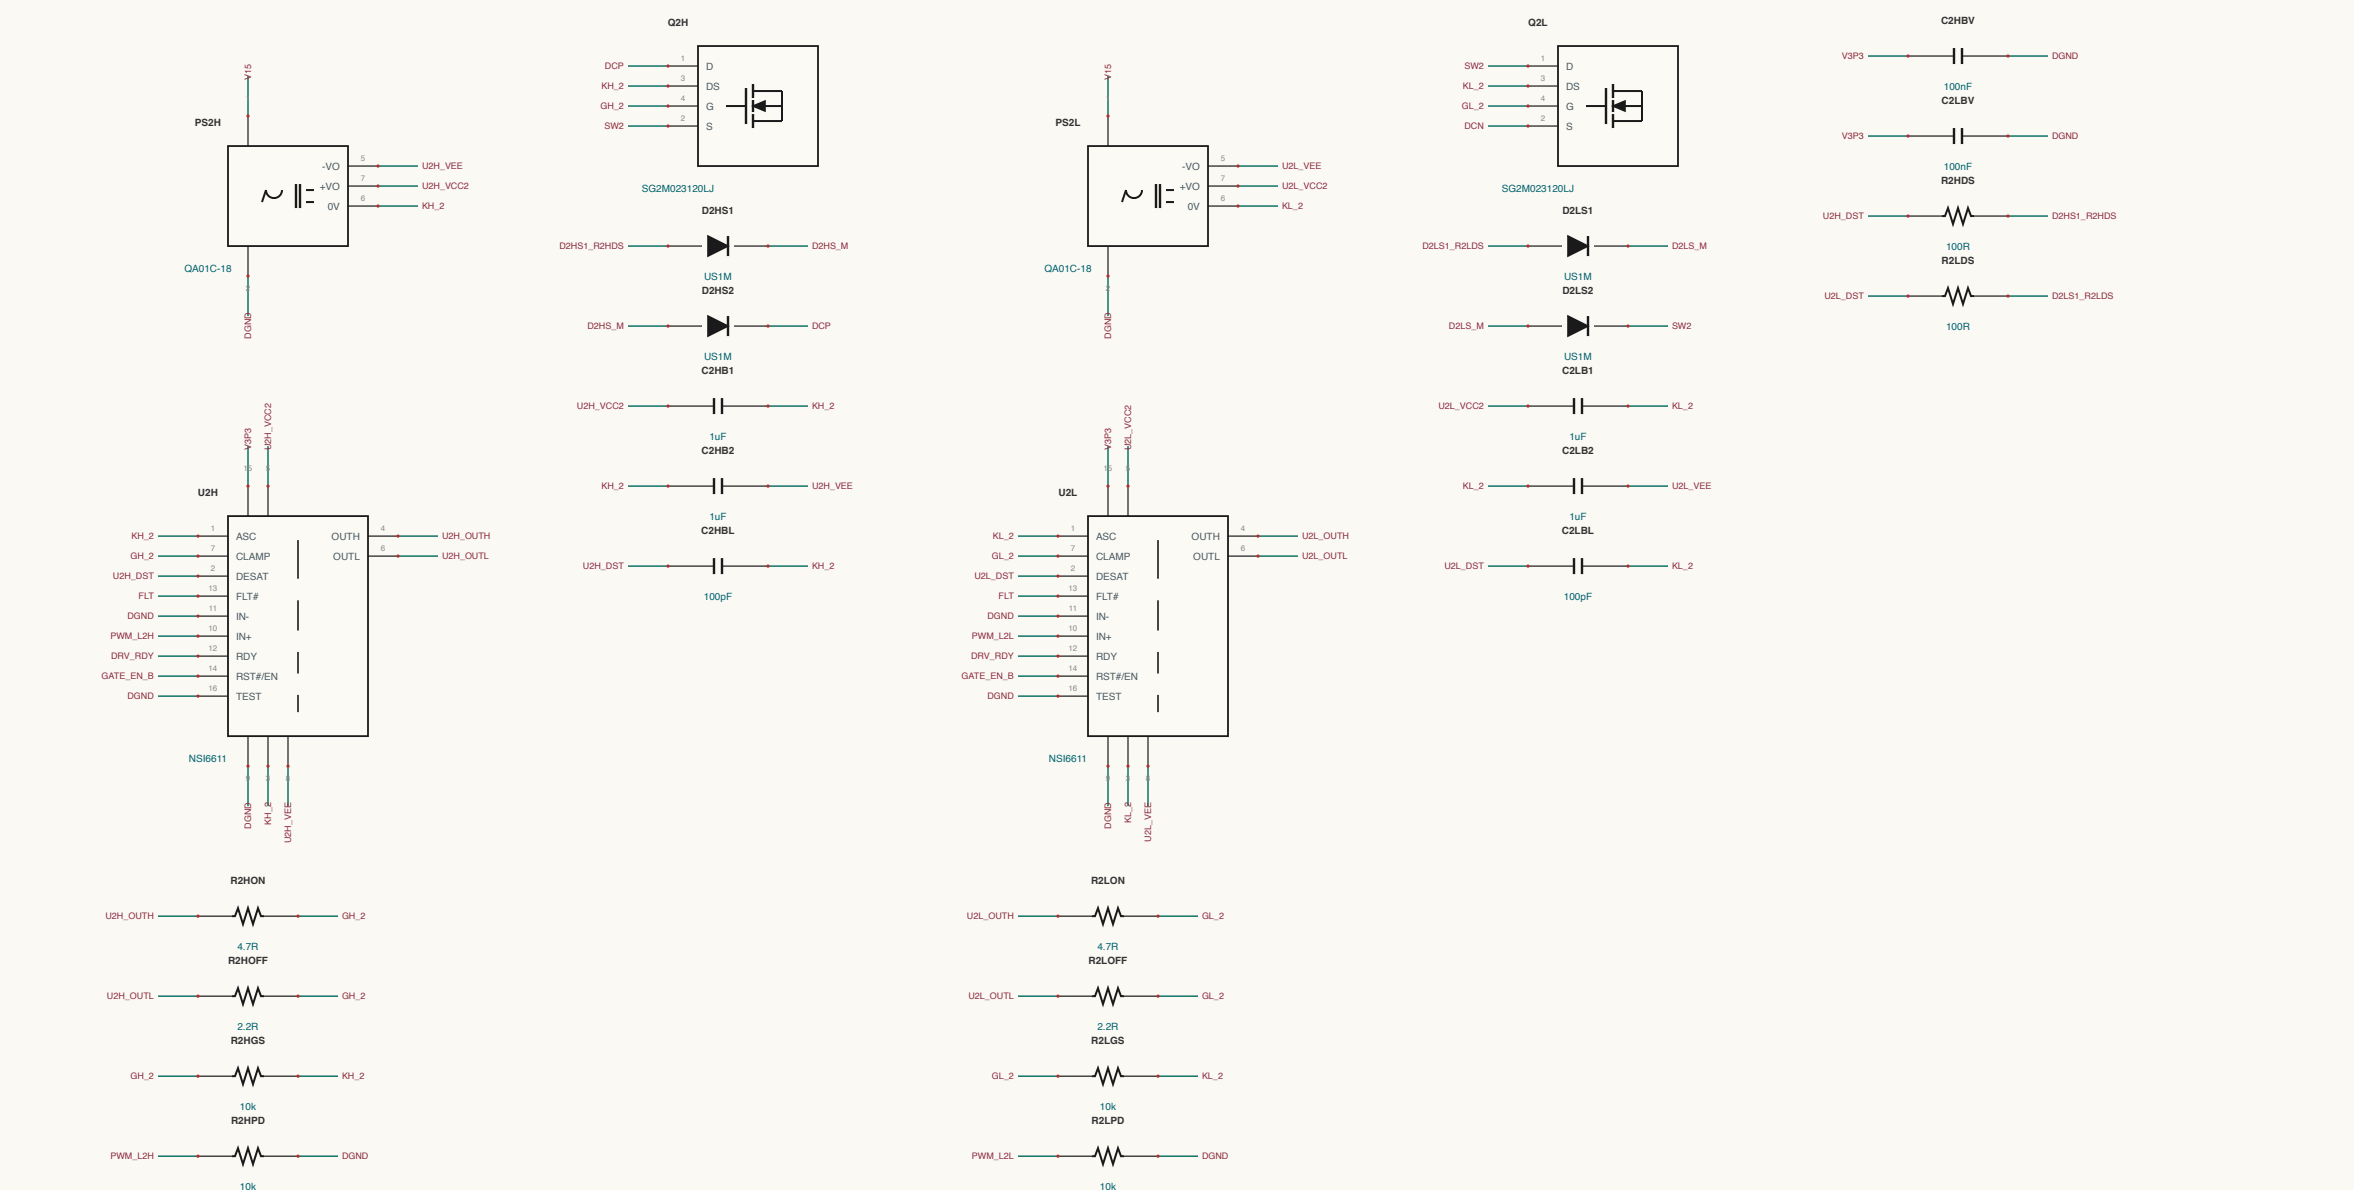


## LLC-LATCH / BUS-IN

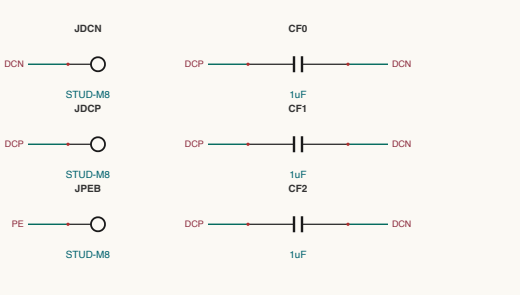


## OUTPUT-SENSING / OUTPUT

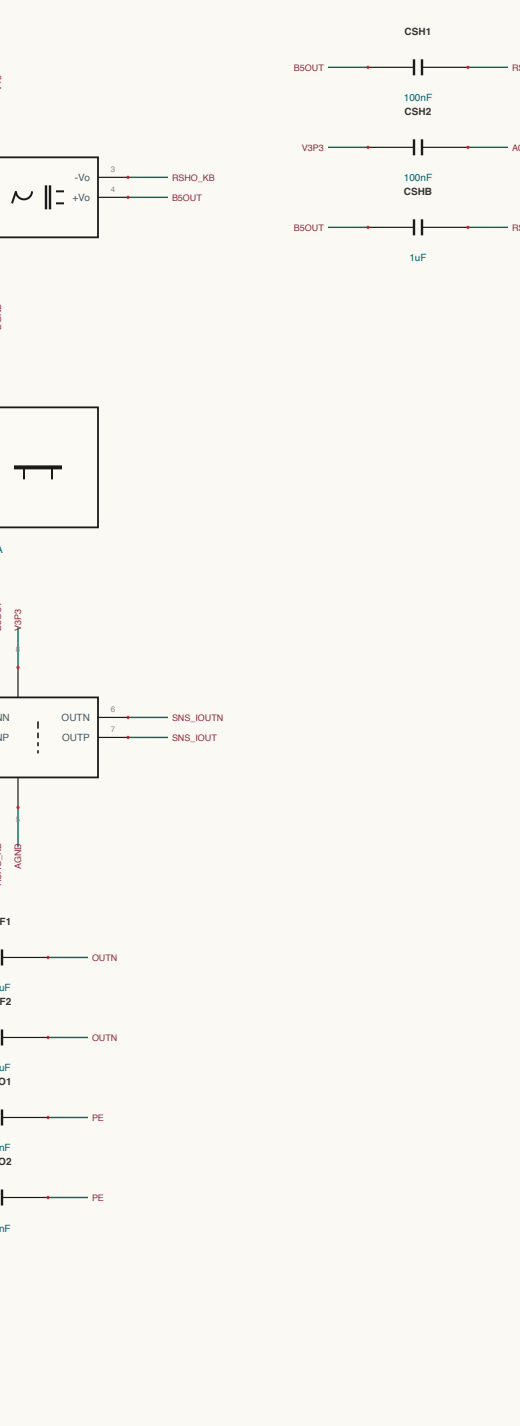


## OUTPUT-SENSING / ISO-BIAS

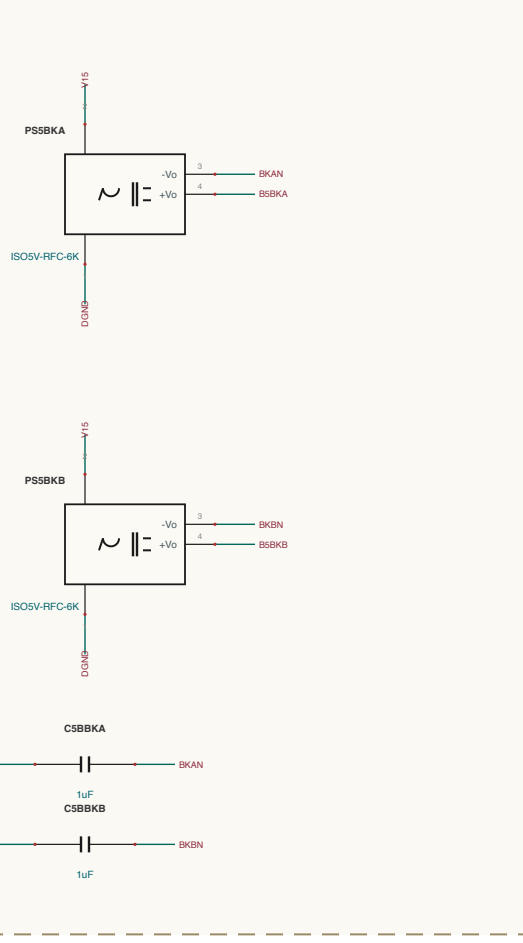


## OUTPUT-SENSING / SENSE-VOLTA

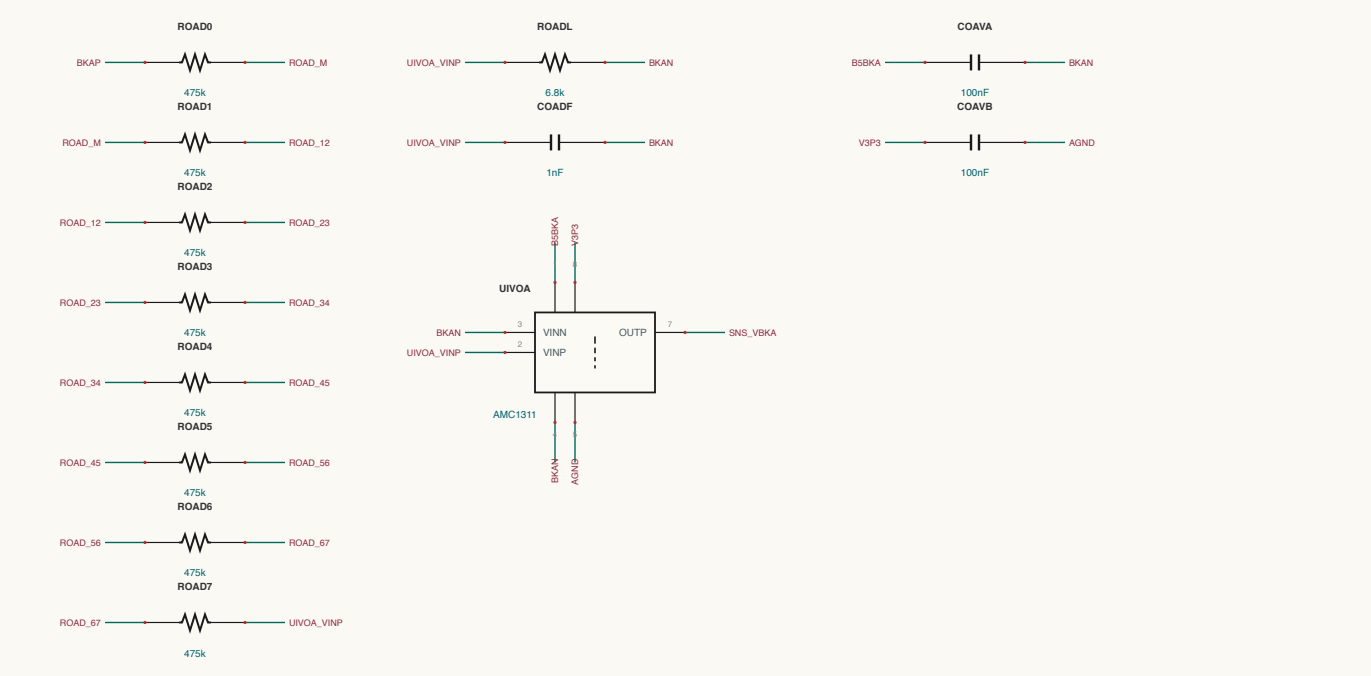

## OUTPUT-SENSING / SENSE-VOLTA

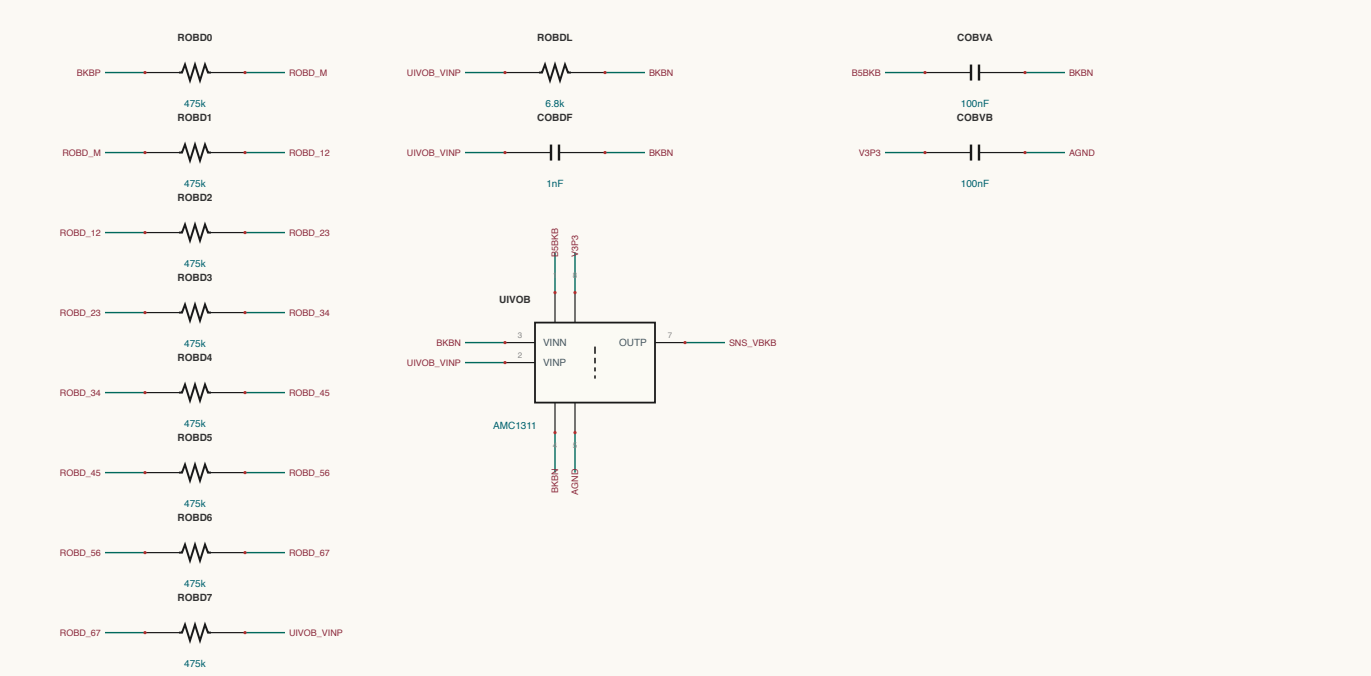

## OUTPUT-SENSING / SENSE-VOLTA

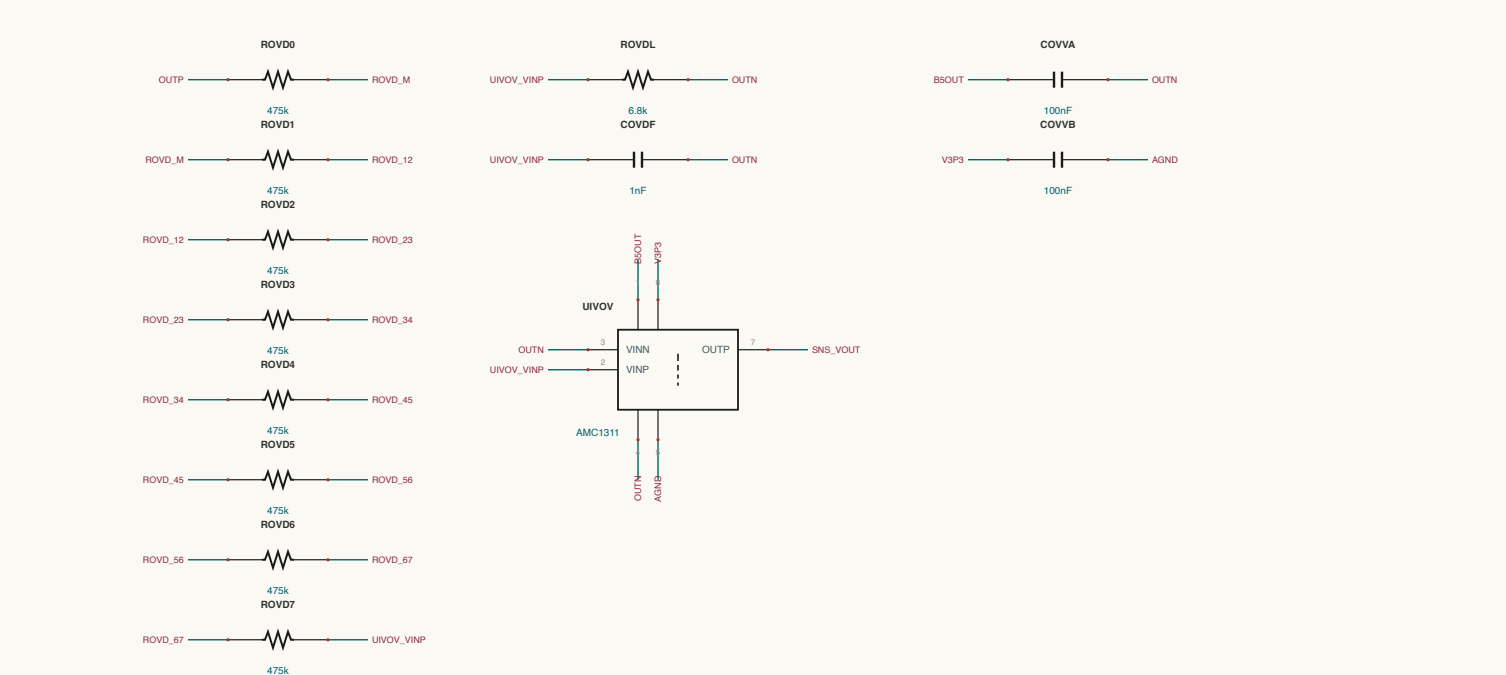

## OUTPUT-SENSING / ATC

