
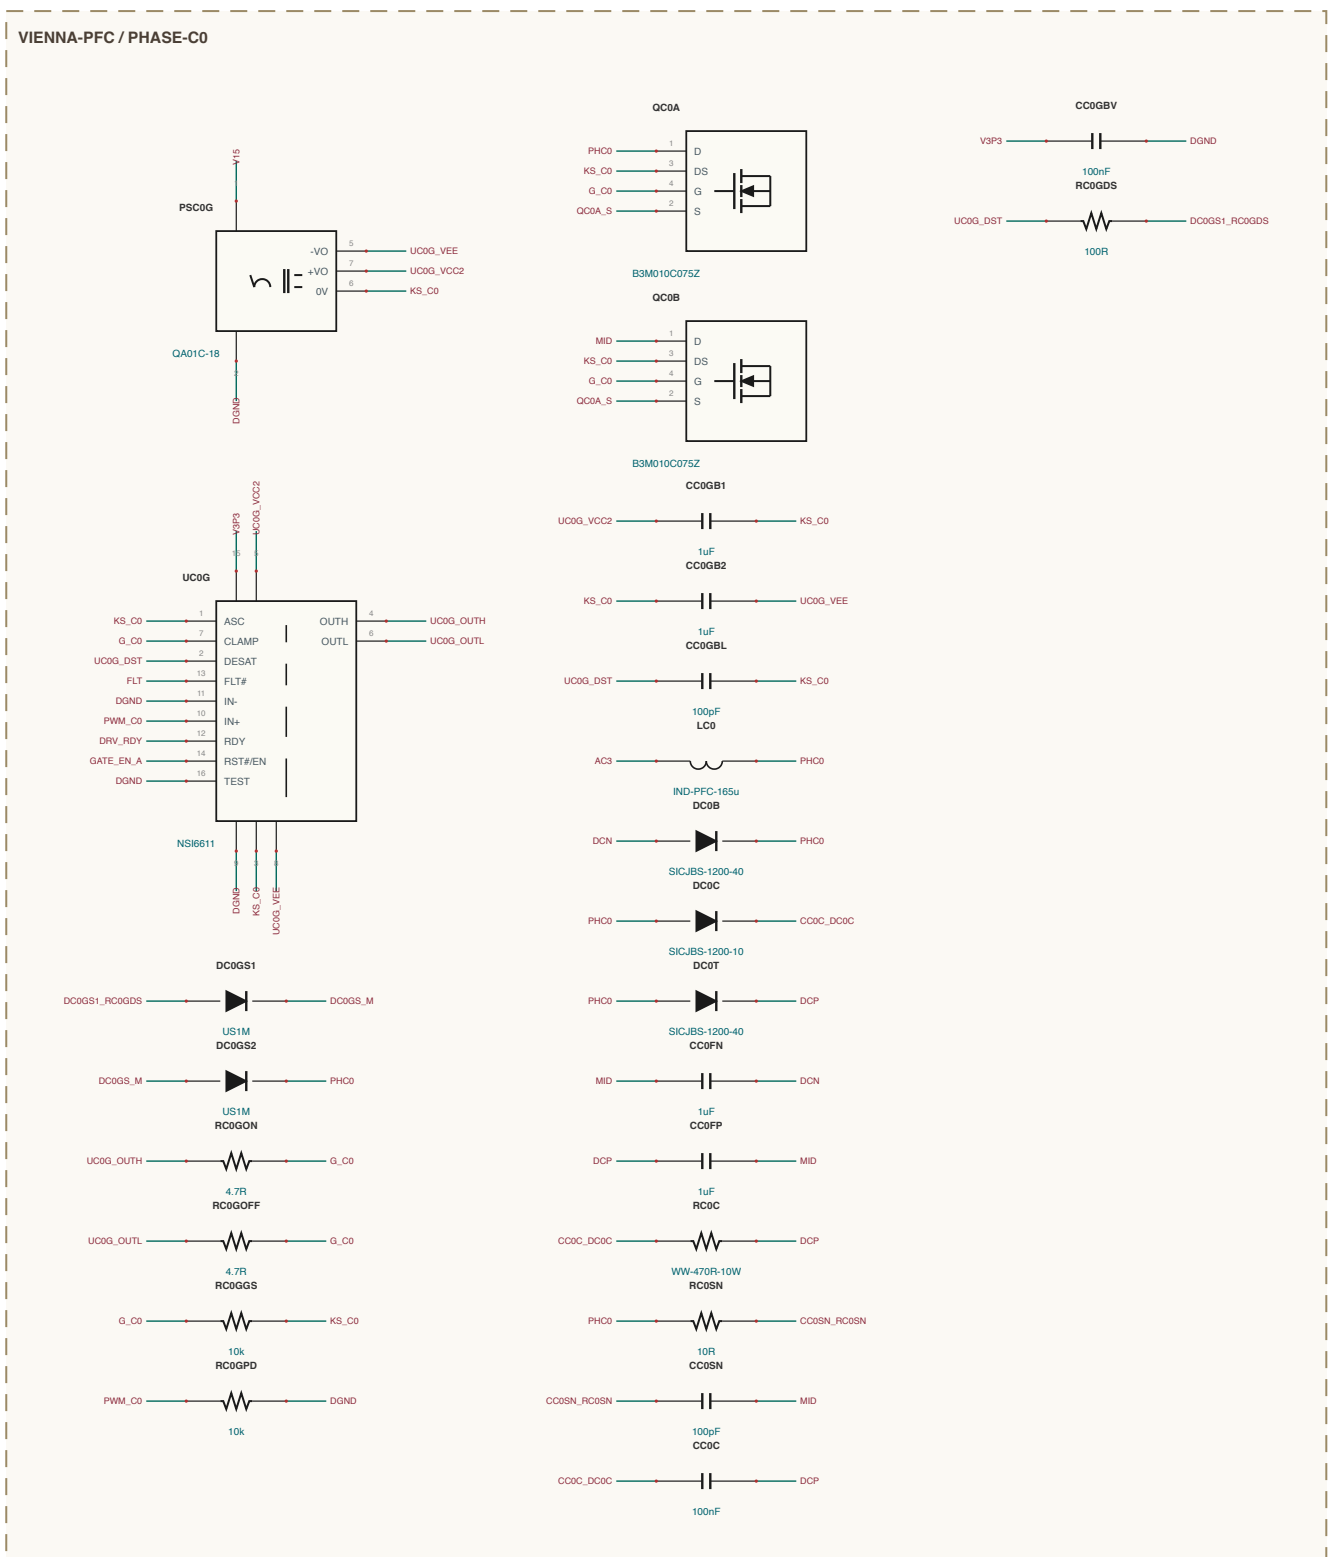
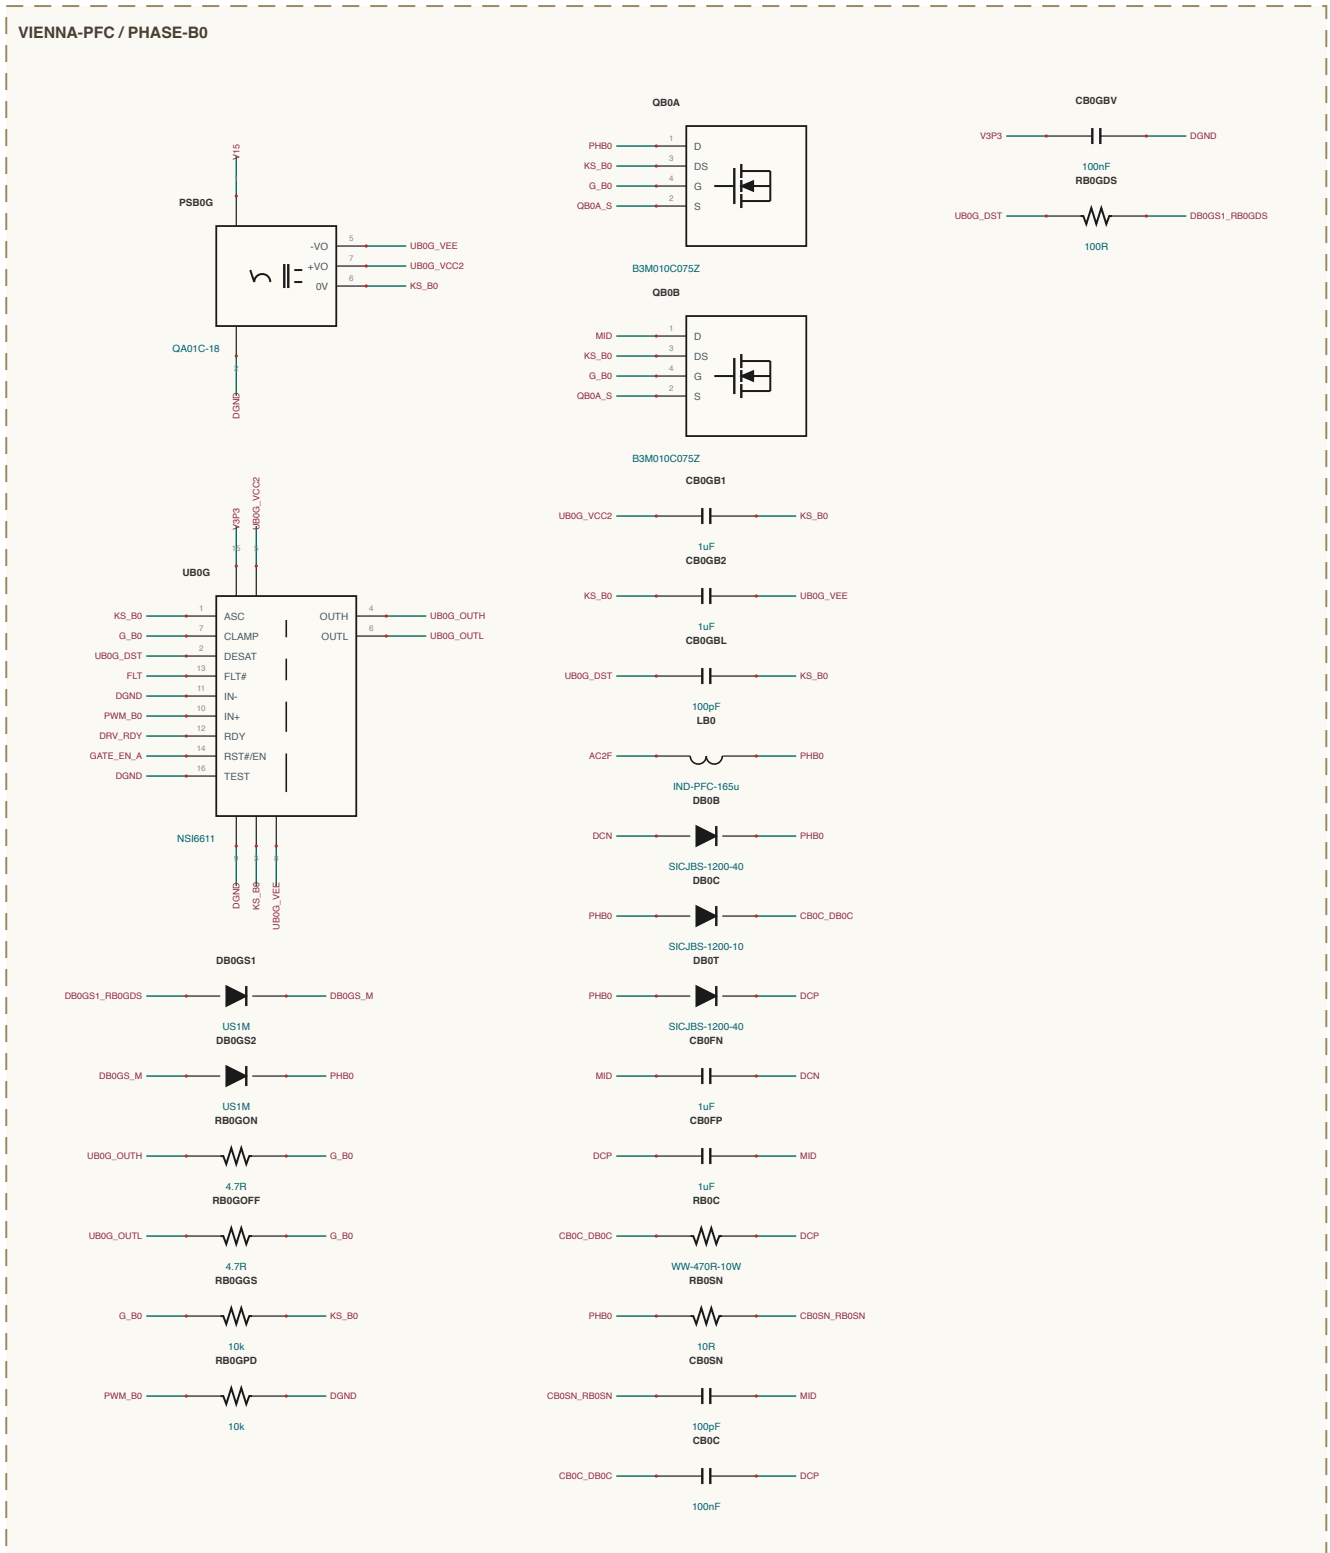
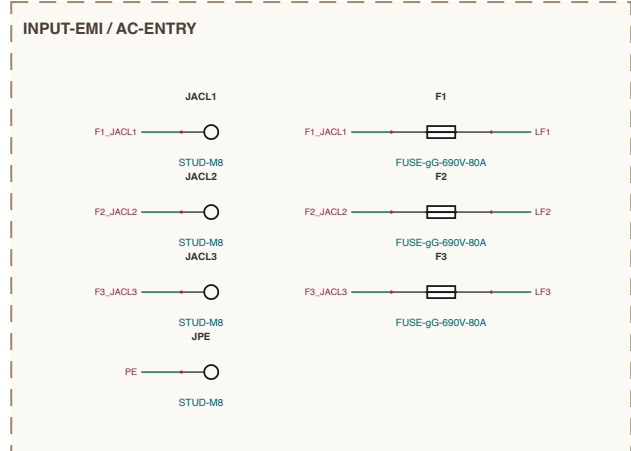
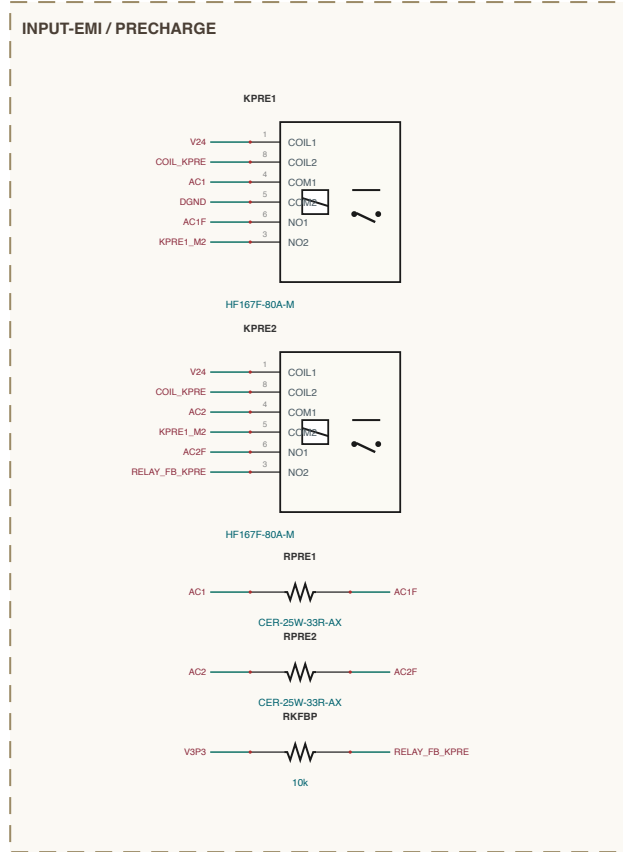
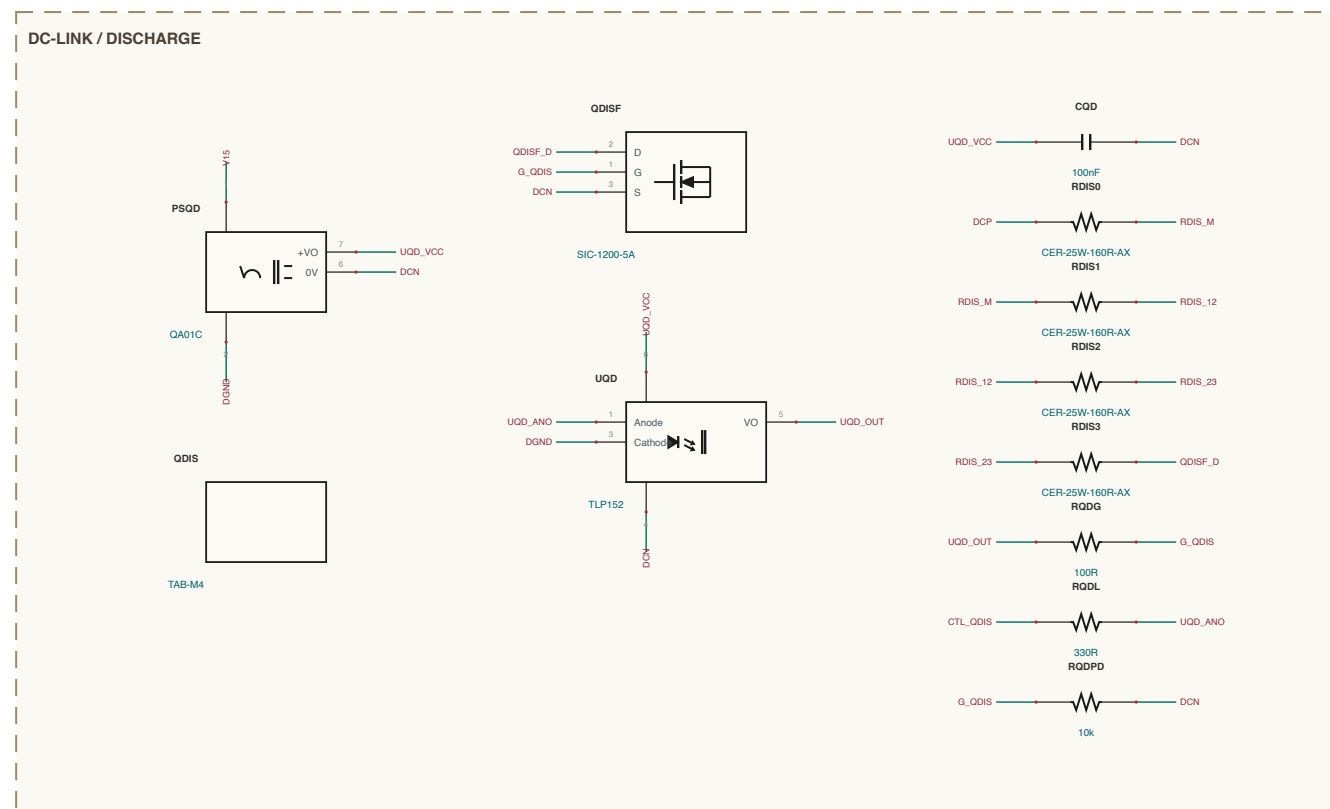
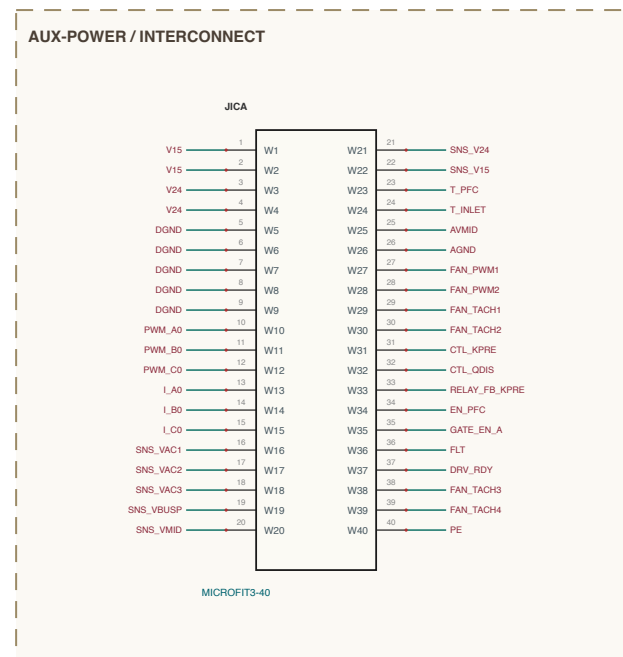
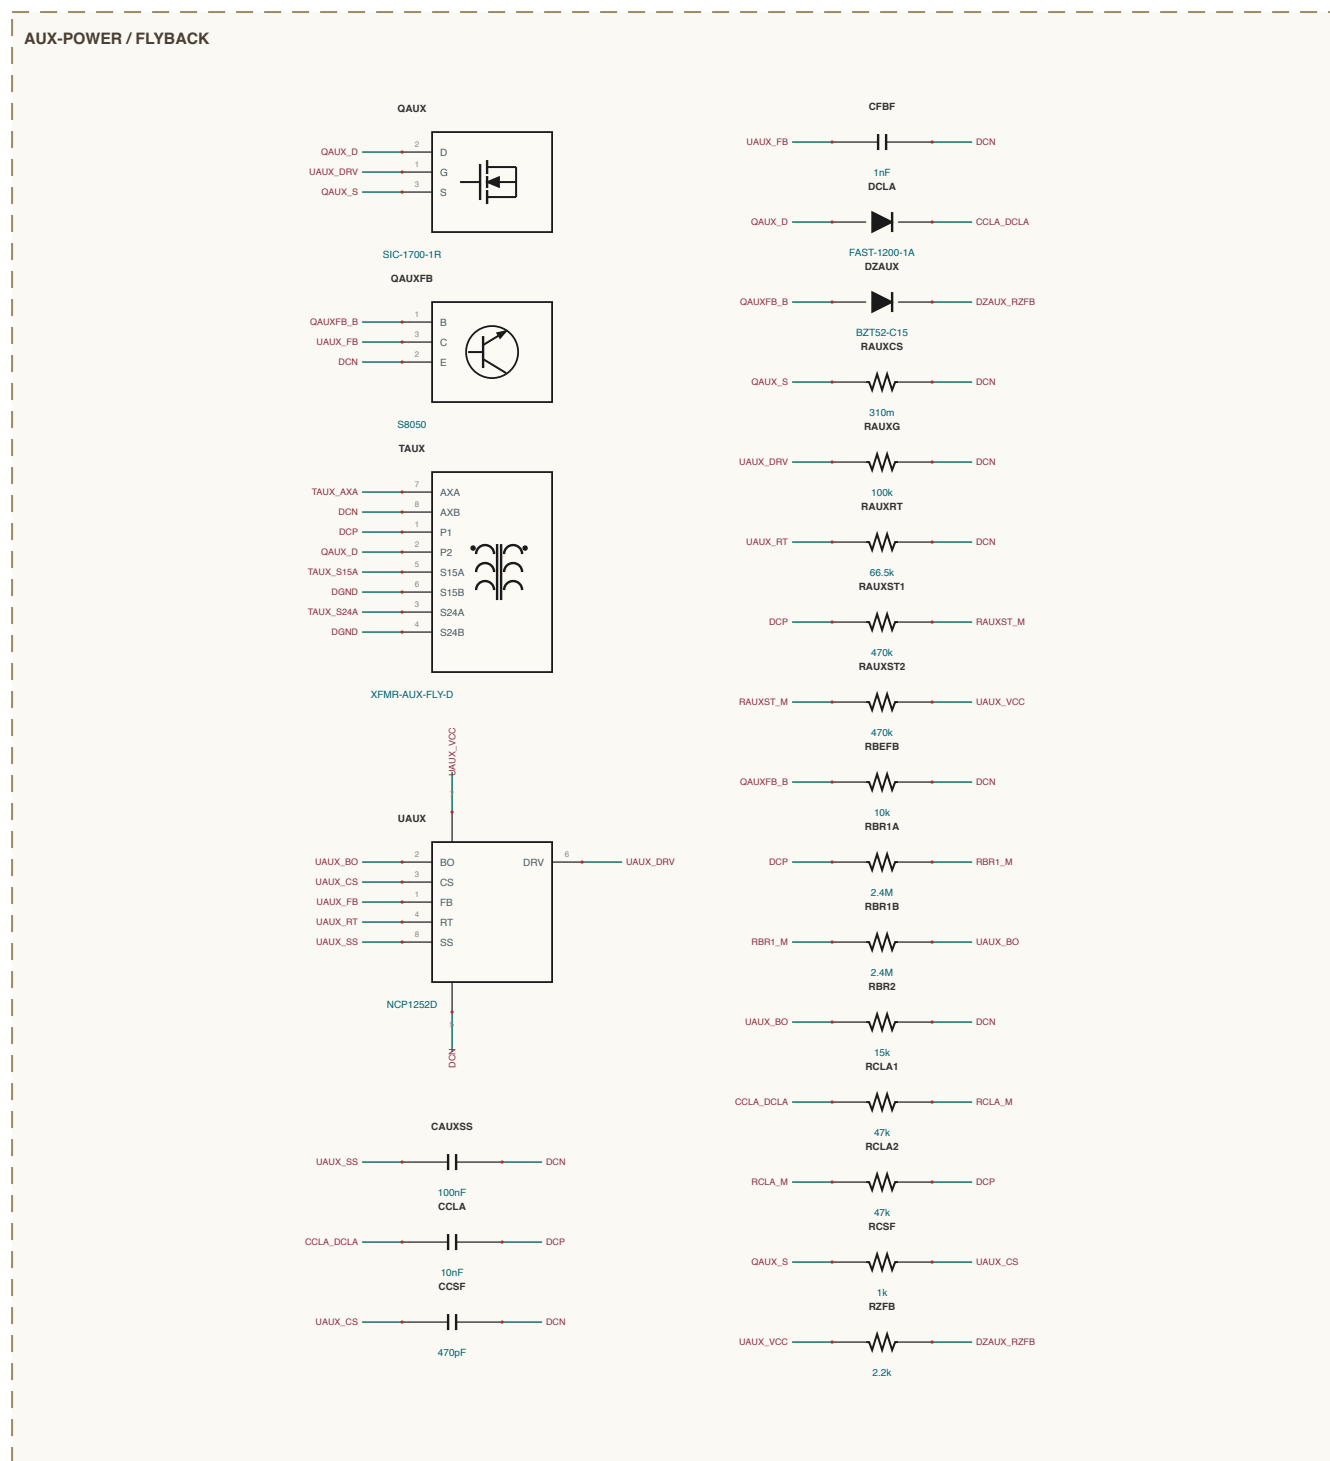
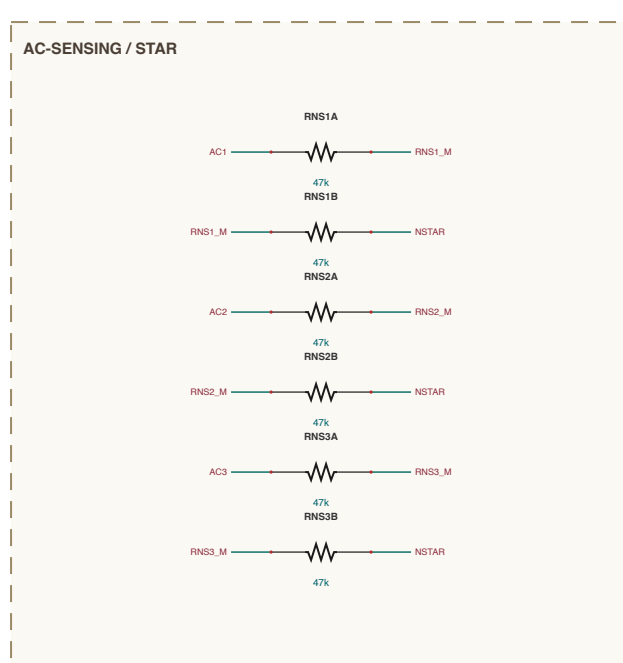
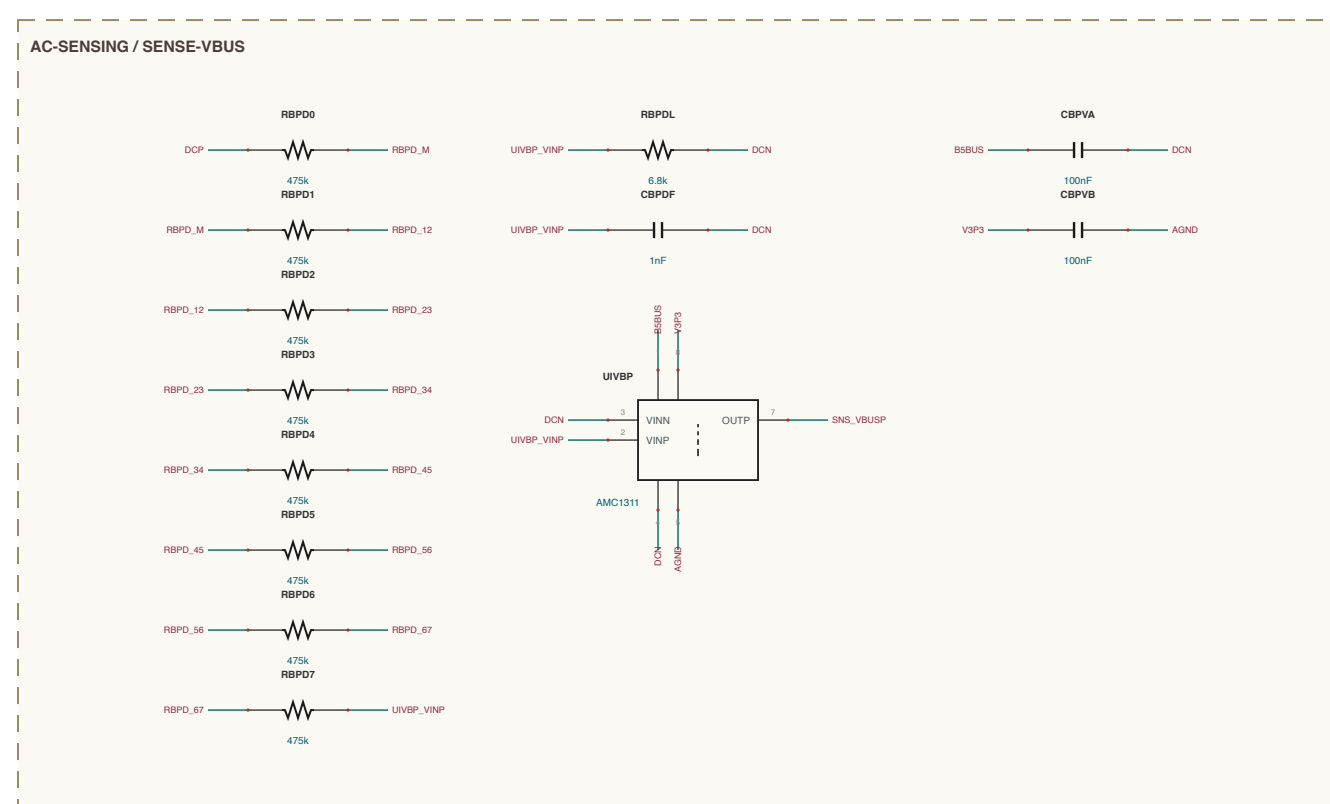
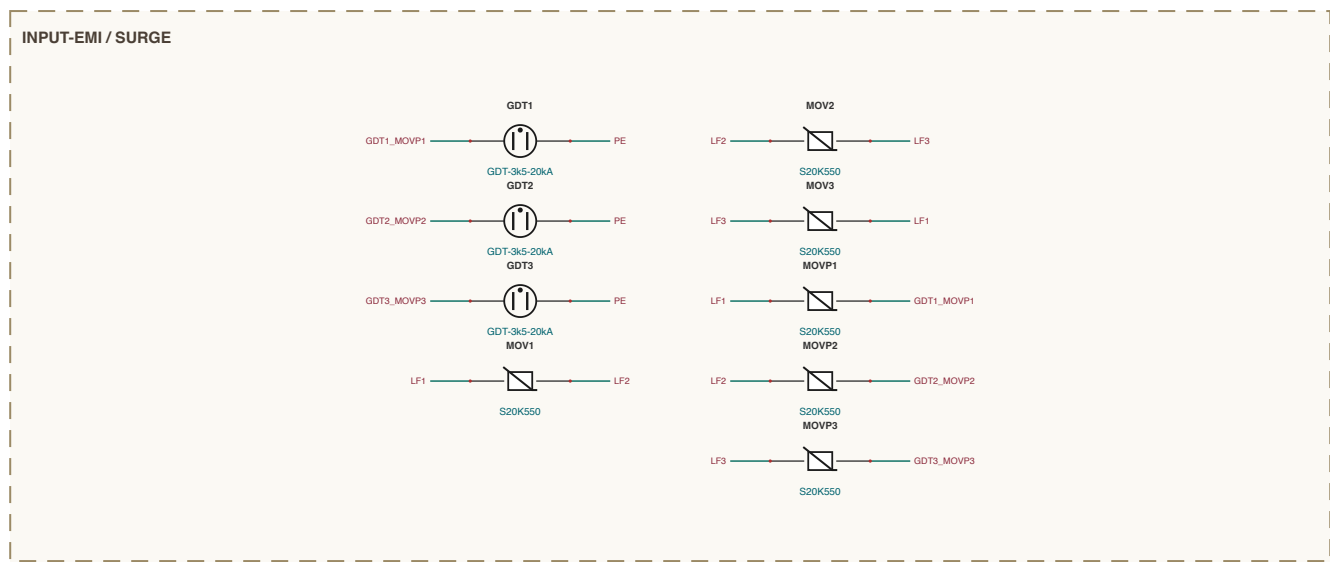
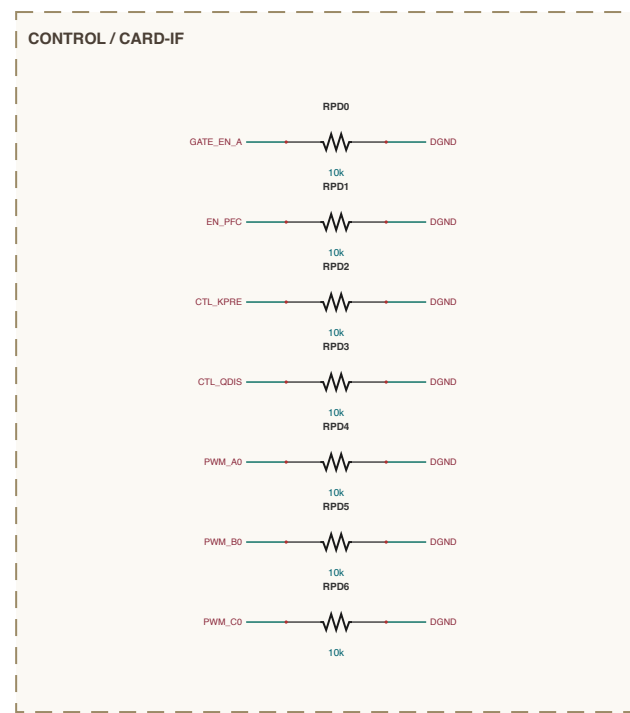
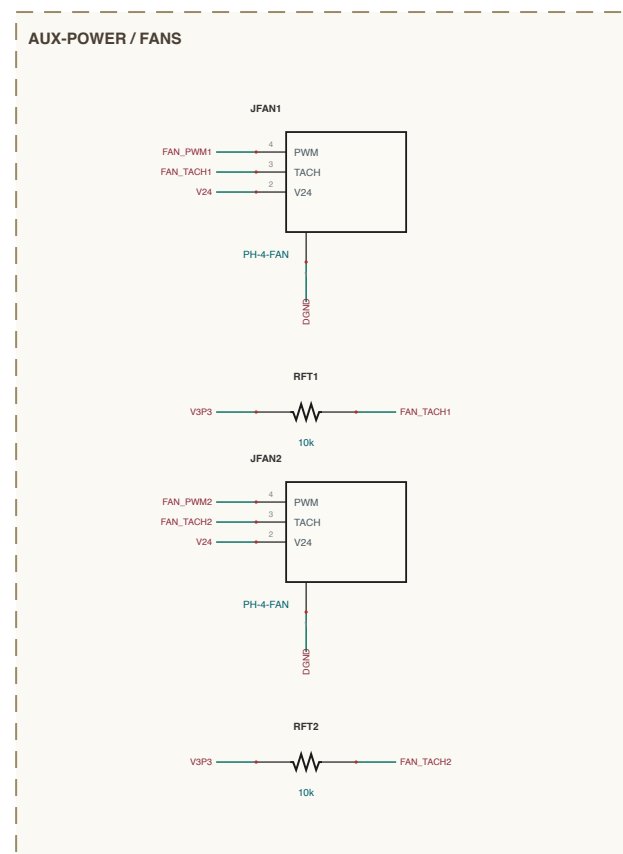
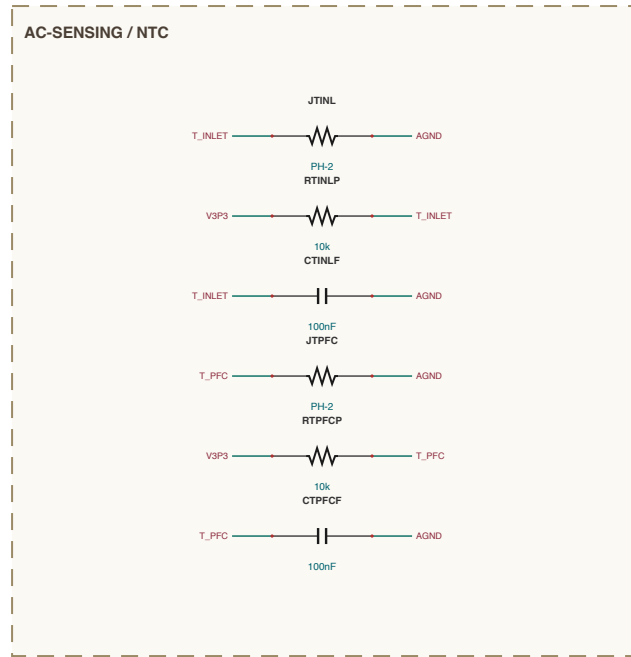
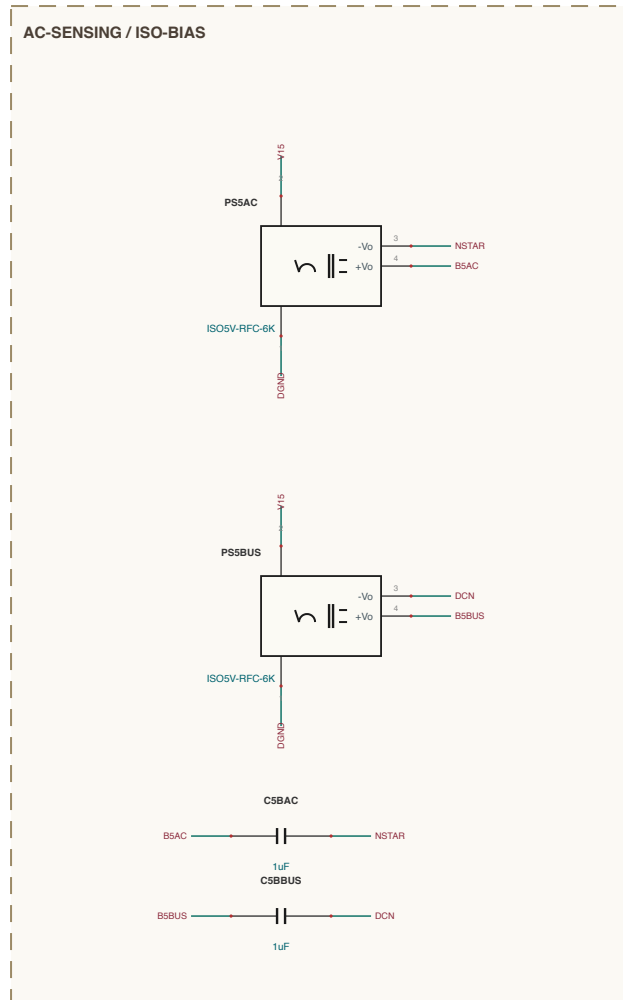
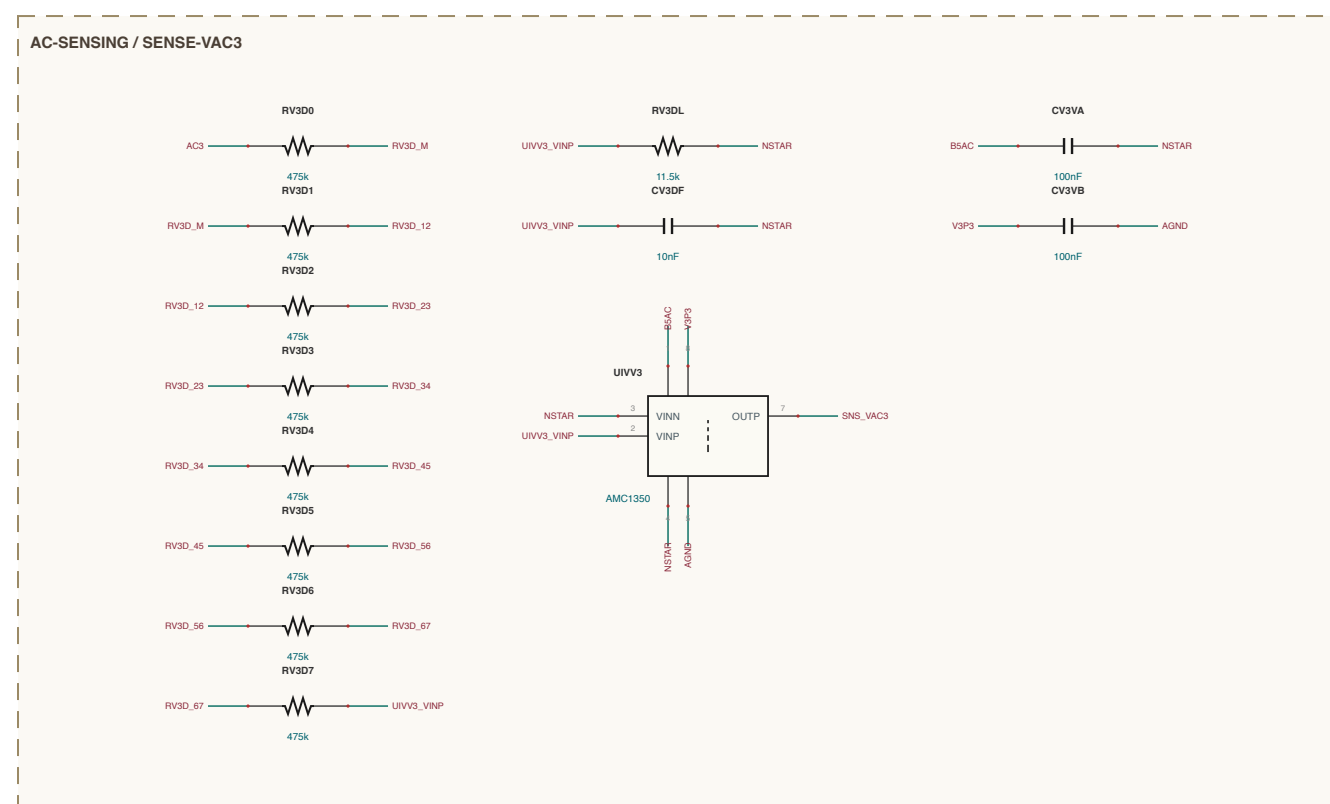
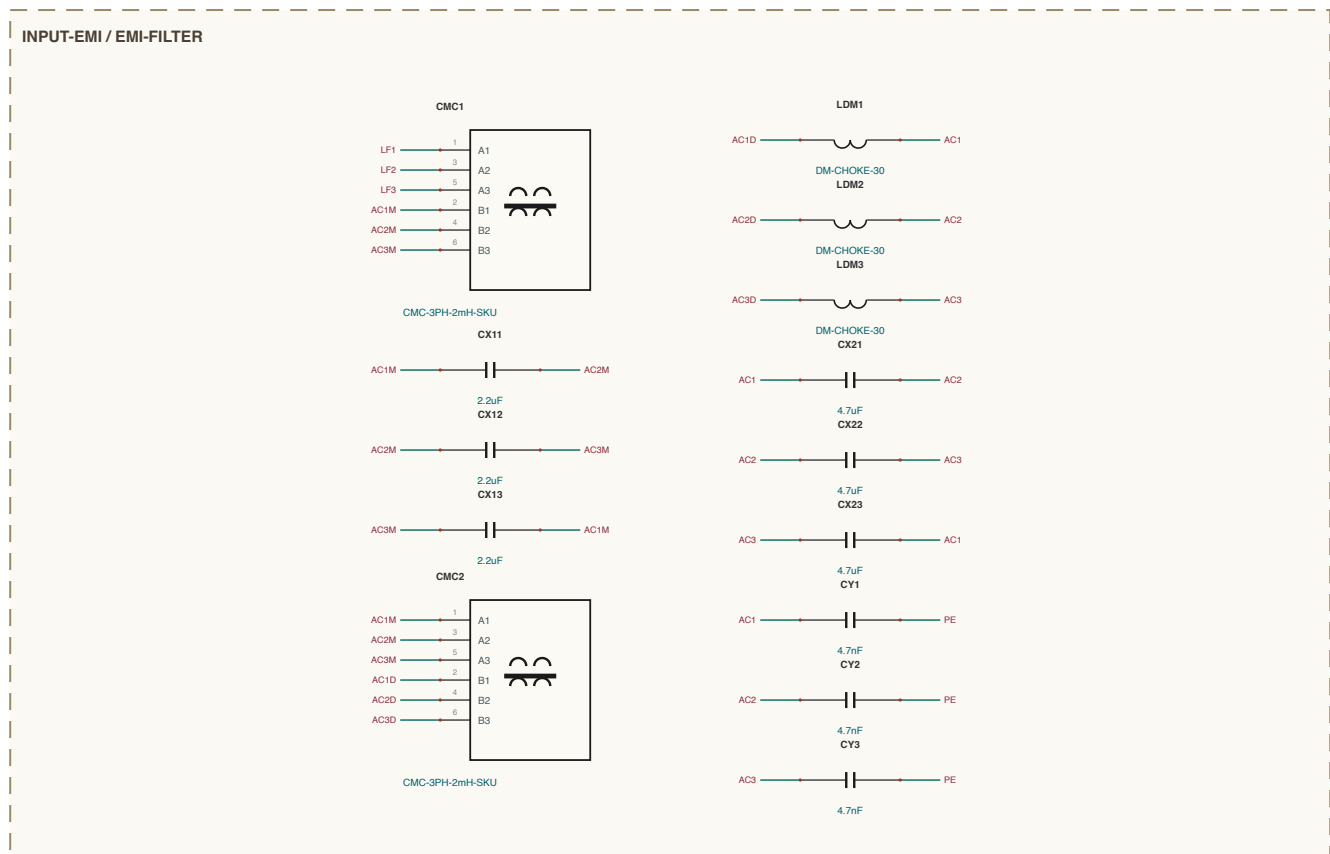
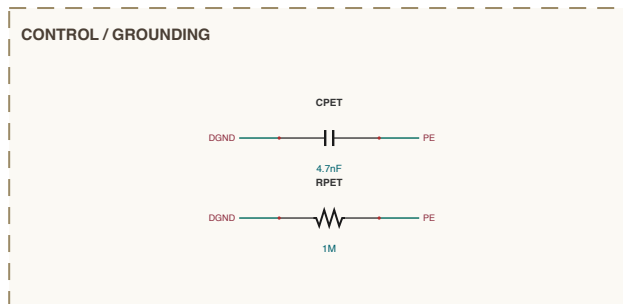
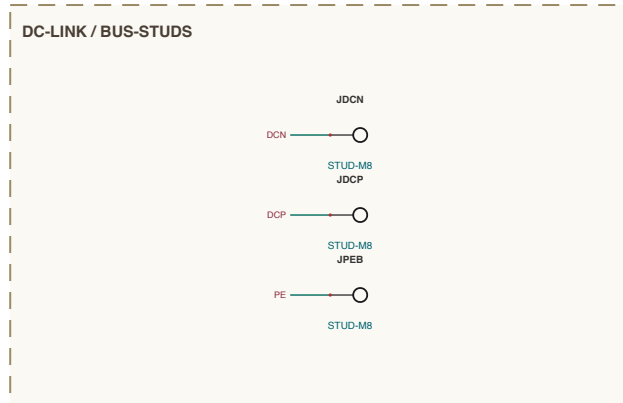
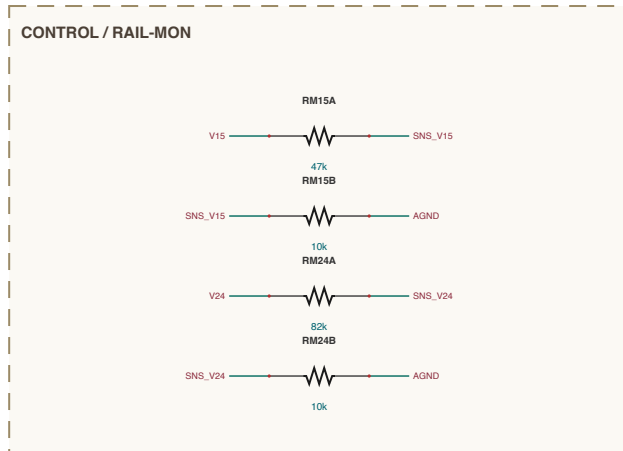
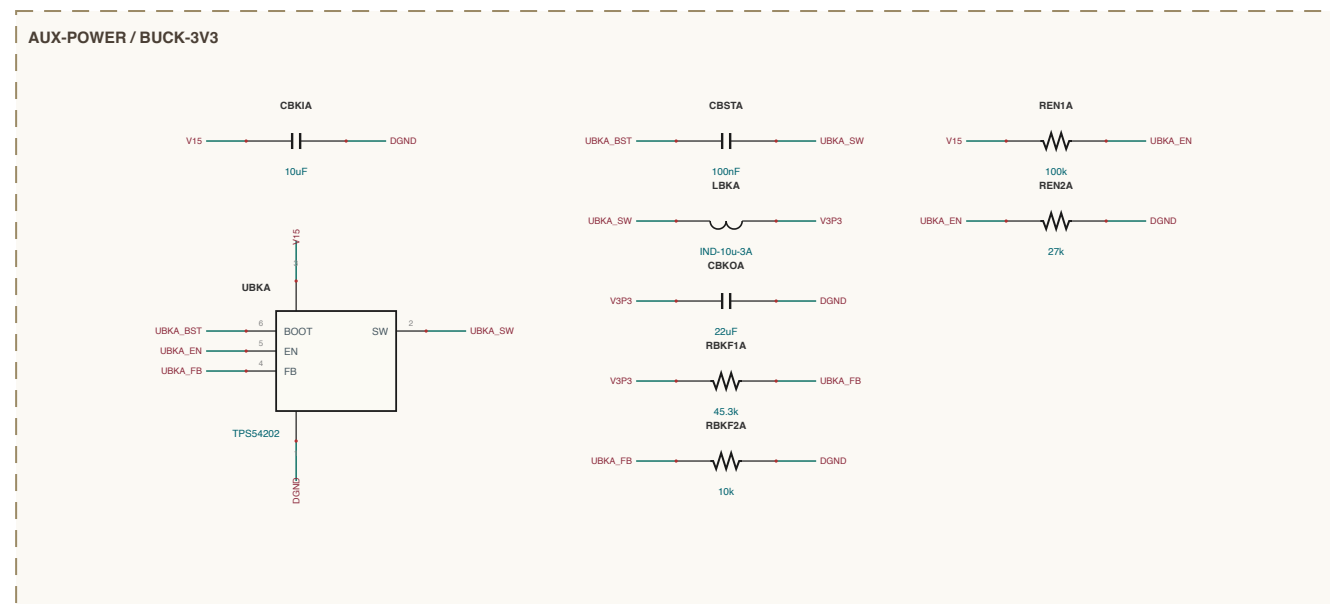
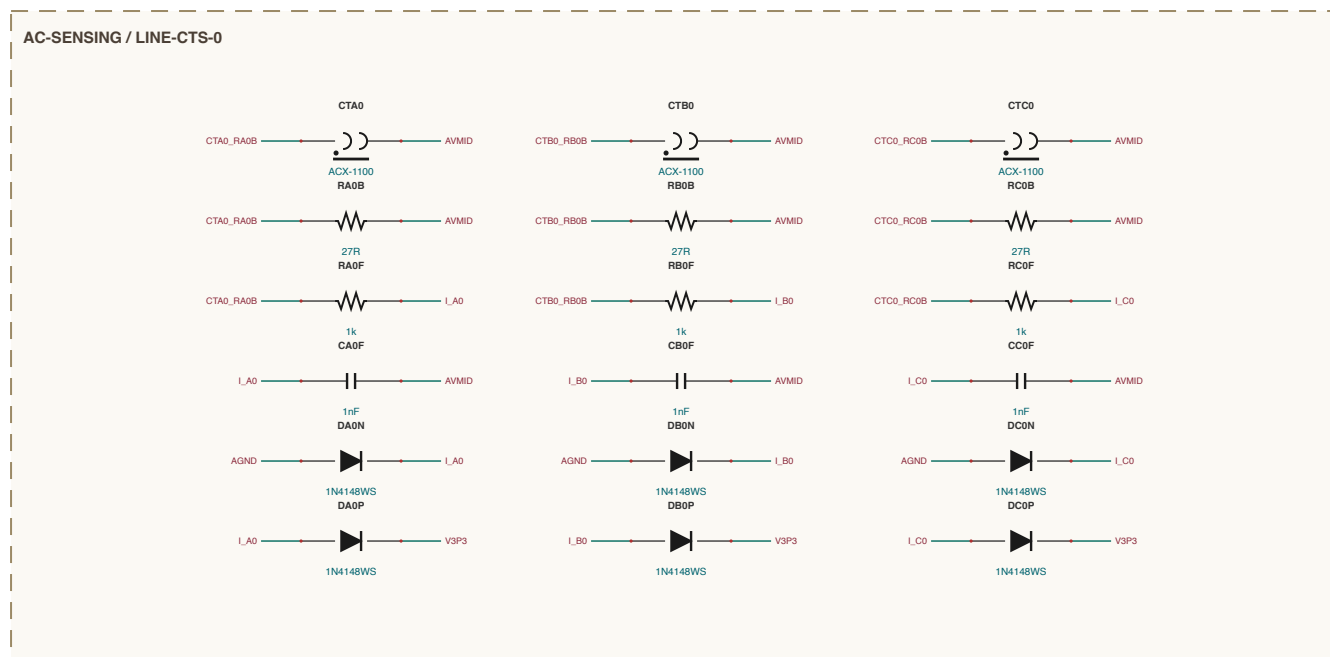
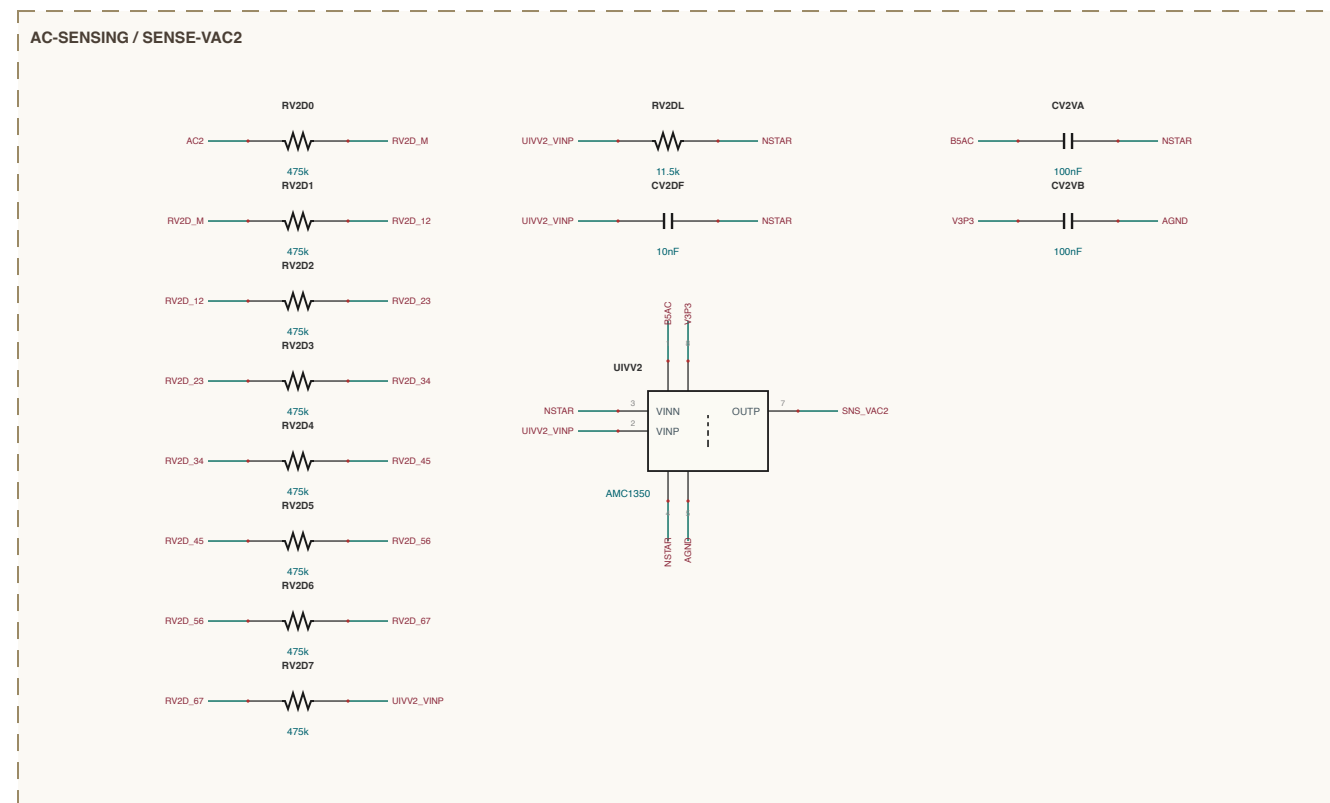
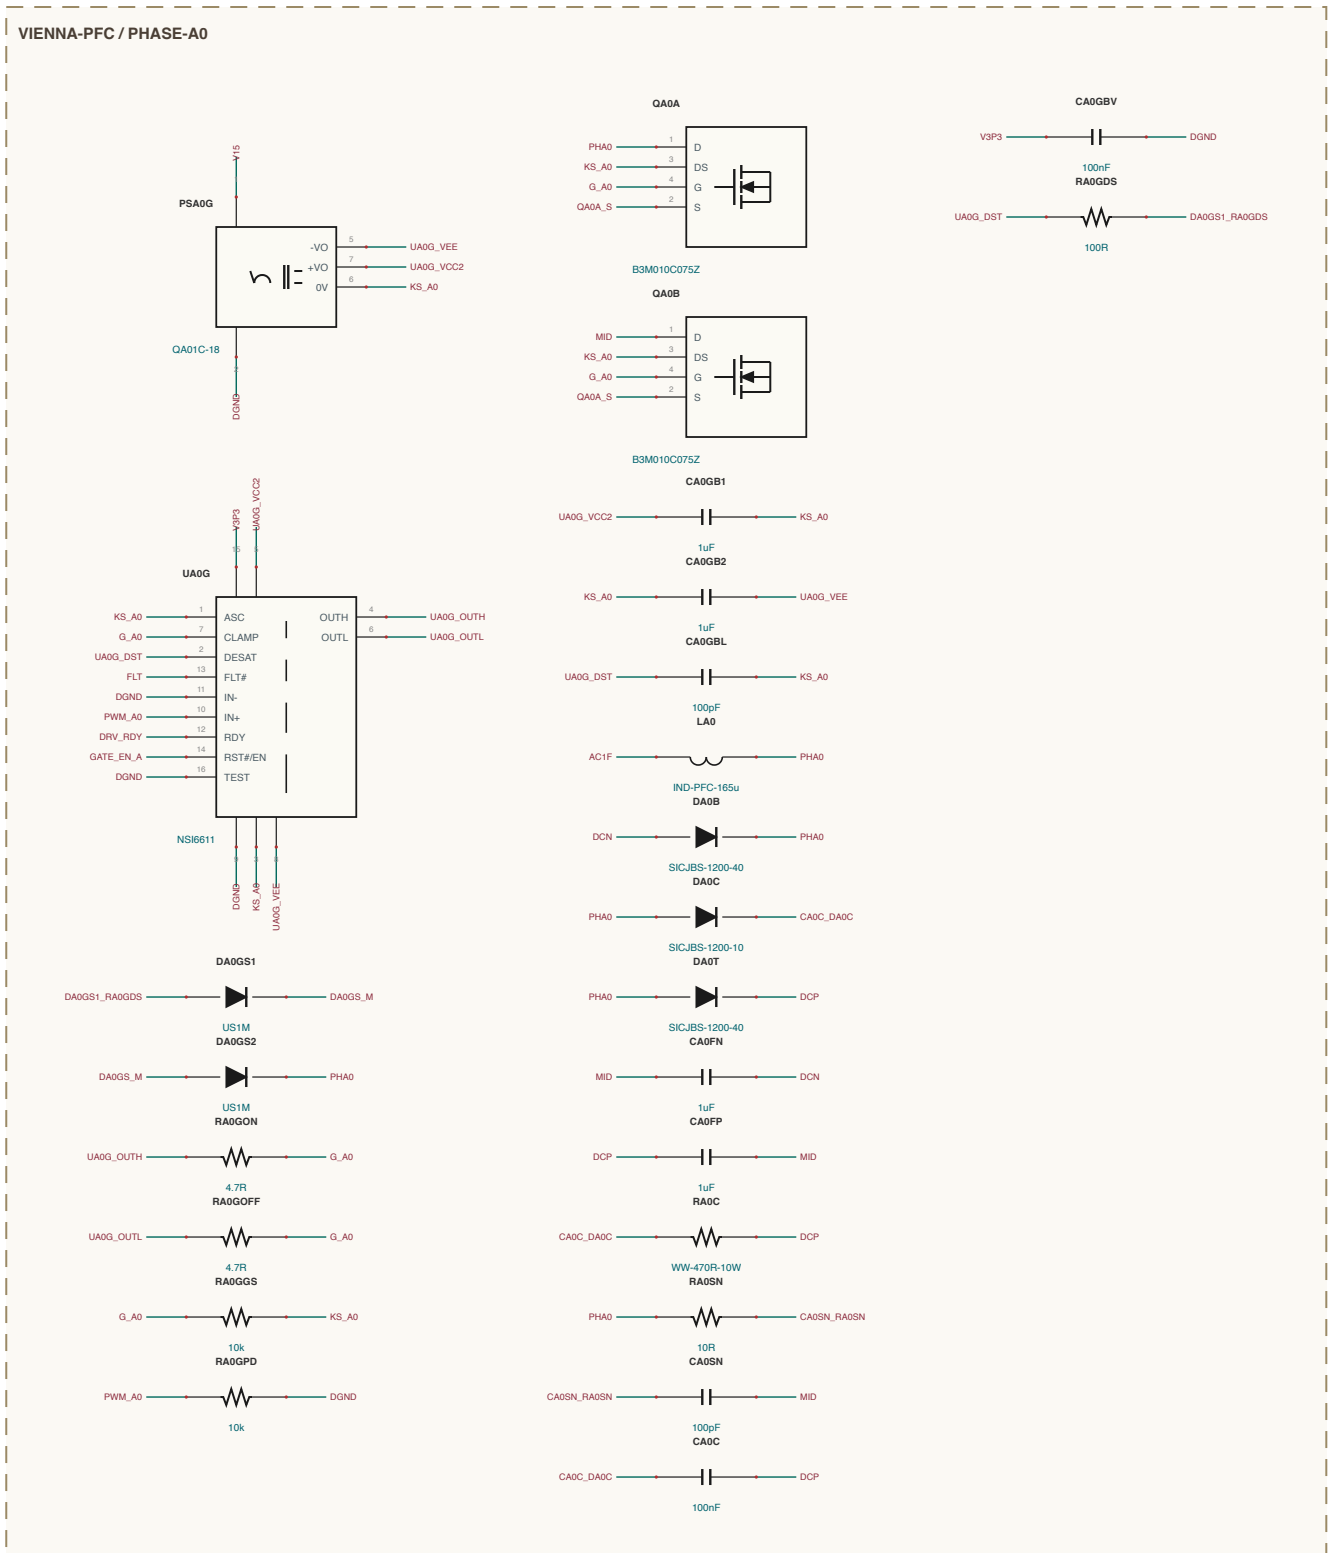
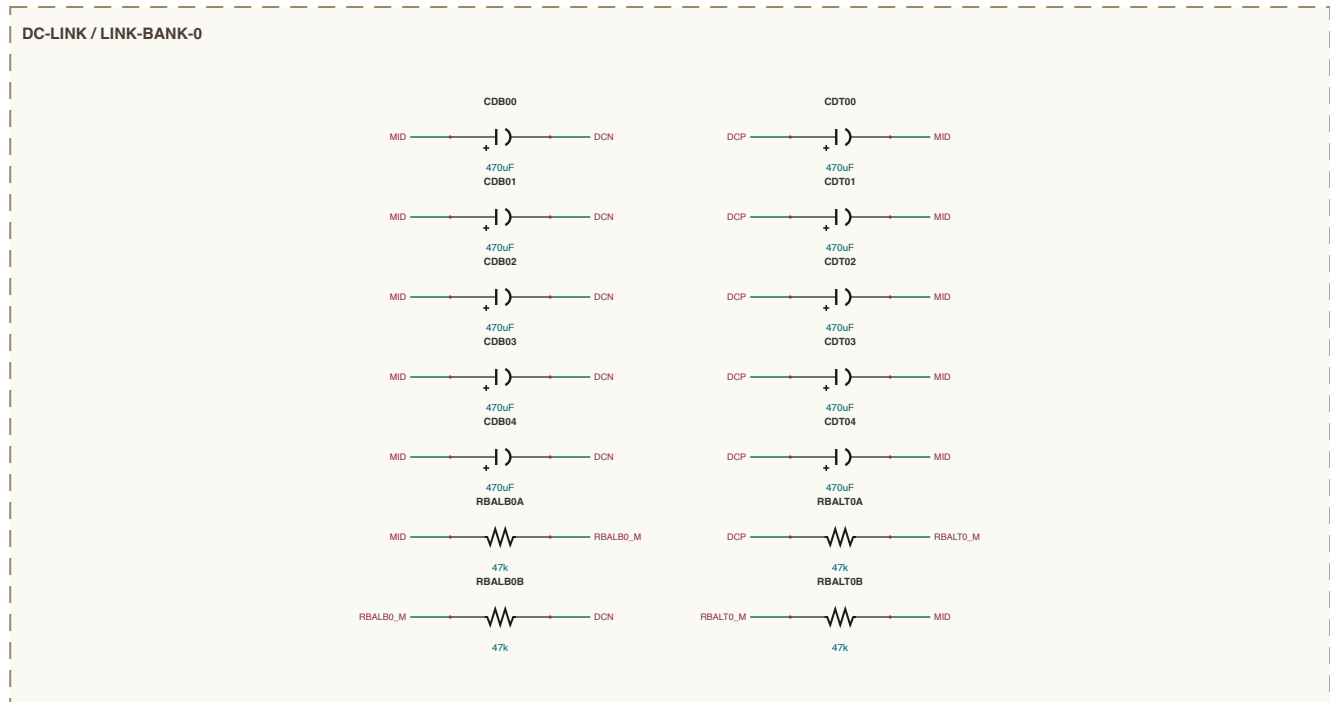
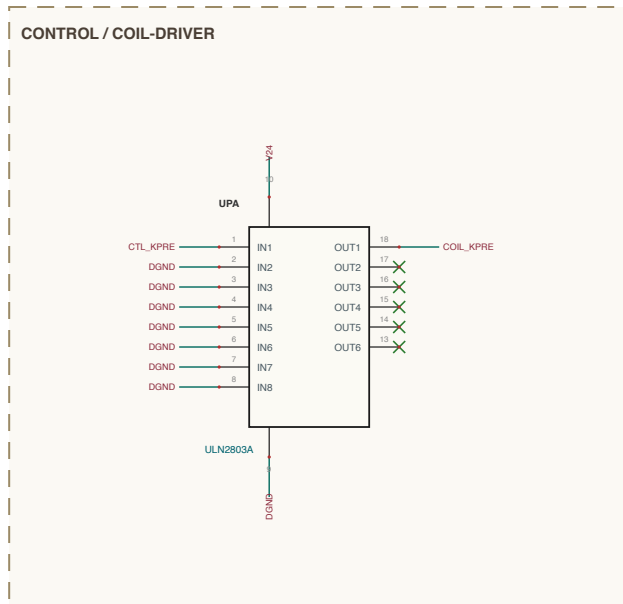
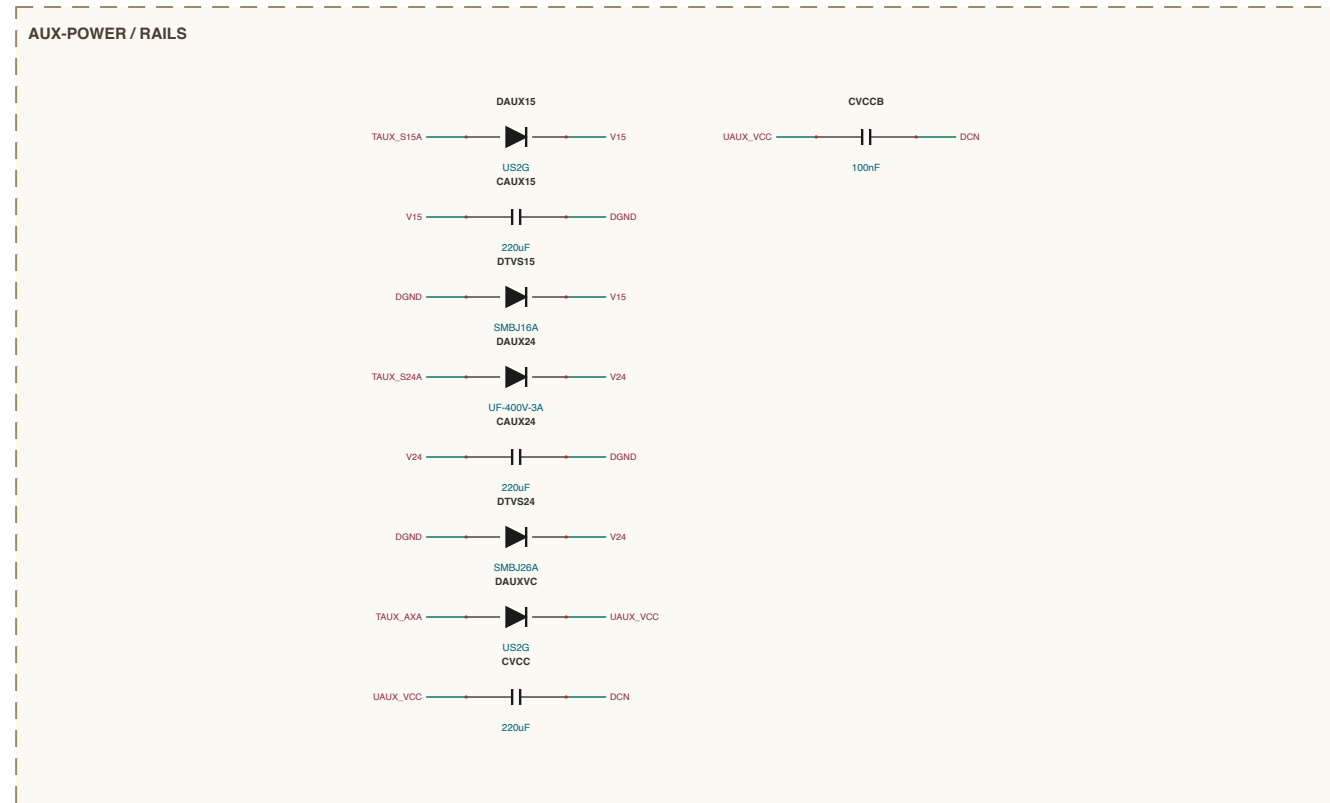
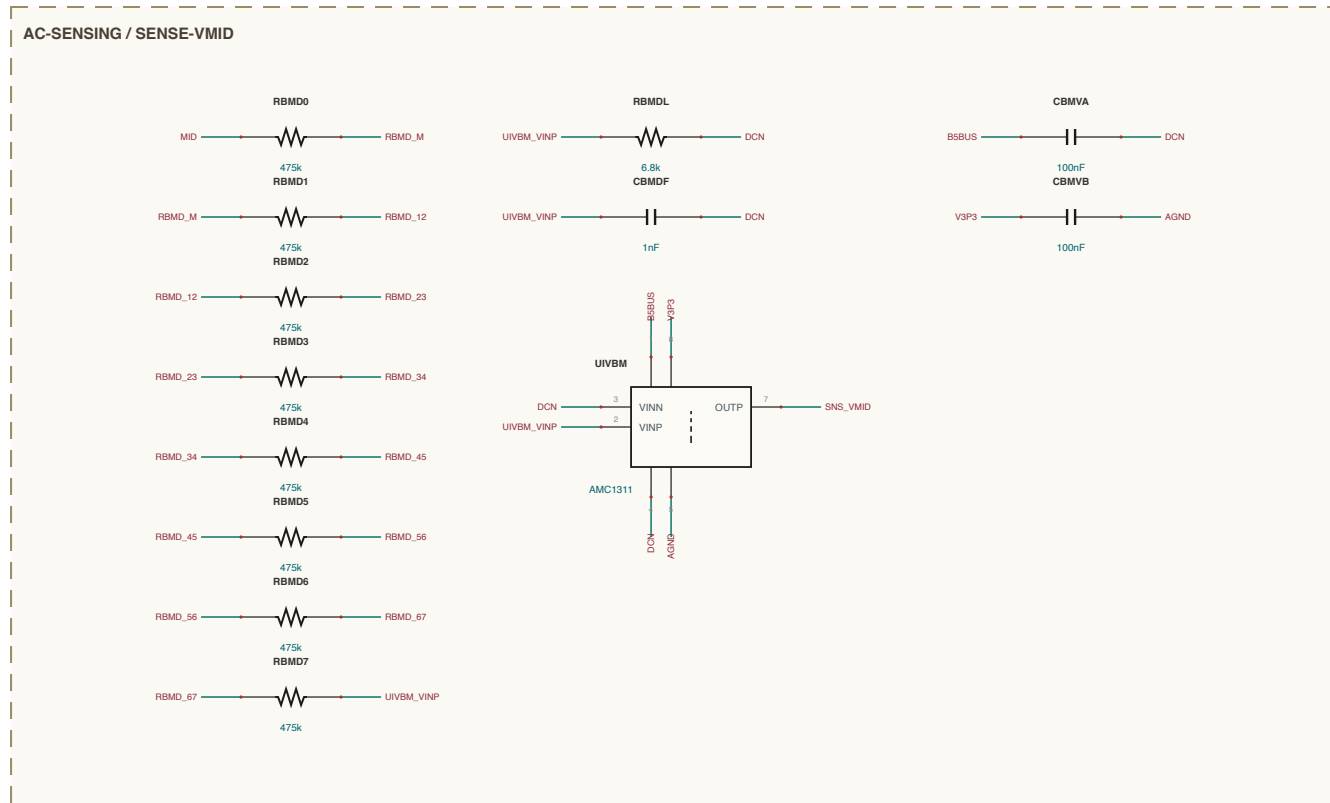


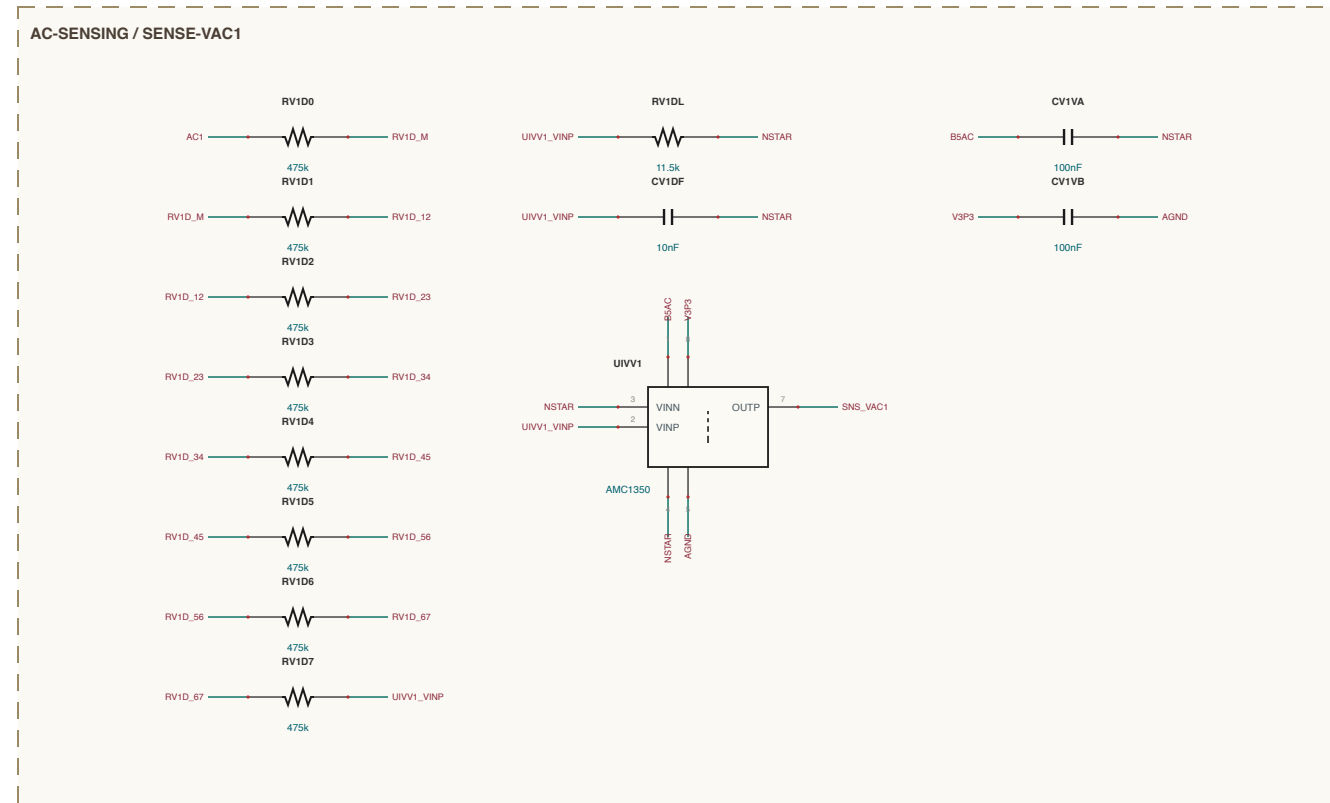

SHEET INDEX

16 MW AC DC power) 1 of 1
AC SIGNING - 8 sections
AUX POWER - 1 section
CONTROL - 4 sections
RPTD BMS - 4 sections
OCLINK - 2 sections
MENNA-PVC - 2 sections
Total : 39 sections / 786 components

NET NAMING

Internal prefixes are named for what they join

Graphs, often made of that C join e.g. UPGMA, VSP

Resistor, M midpoint of a series pair e.g. RESACTA_M

Resistor, series leg between Resistorcurve e.g. RT1D2_1

(all others are explicit design nets)

MAGNETICS CONSTRUCTION

Identify per dosimetryresults and Duran, gap, 10x, acceptance (how time times)

if LABLOCK to 80776847 Kocallm, h049 (u=1) let (time), set(timing) (time)= L0 180(u), u=70(u) 043A ps (BASED value governs apply/hp rates)

L0DBT+L0 to T18 (hu, h04, h04 (time)= 7 Auh 043A ps (Show 2.5(u))

(not L0 = x measured after leakage (show COMPENSATE leakage spread); Cr at TANK sections