
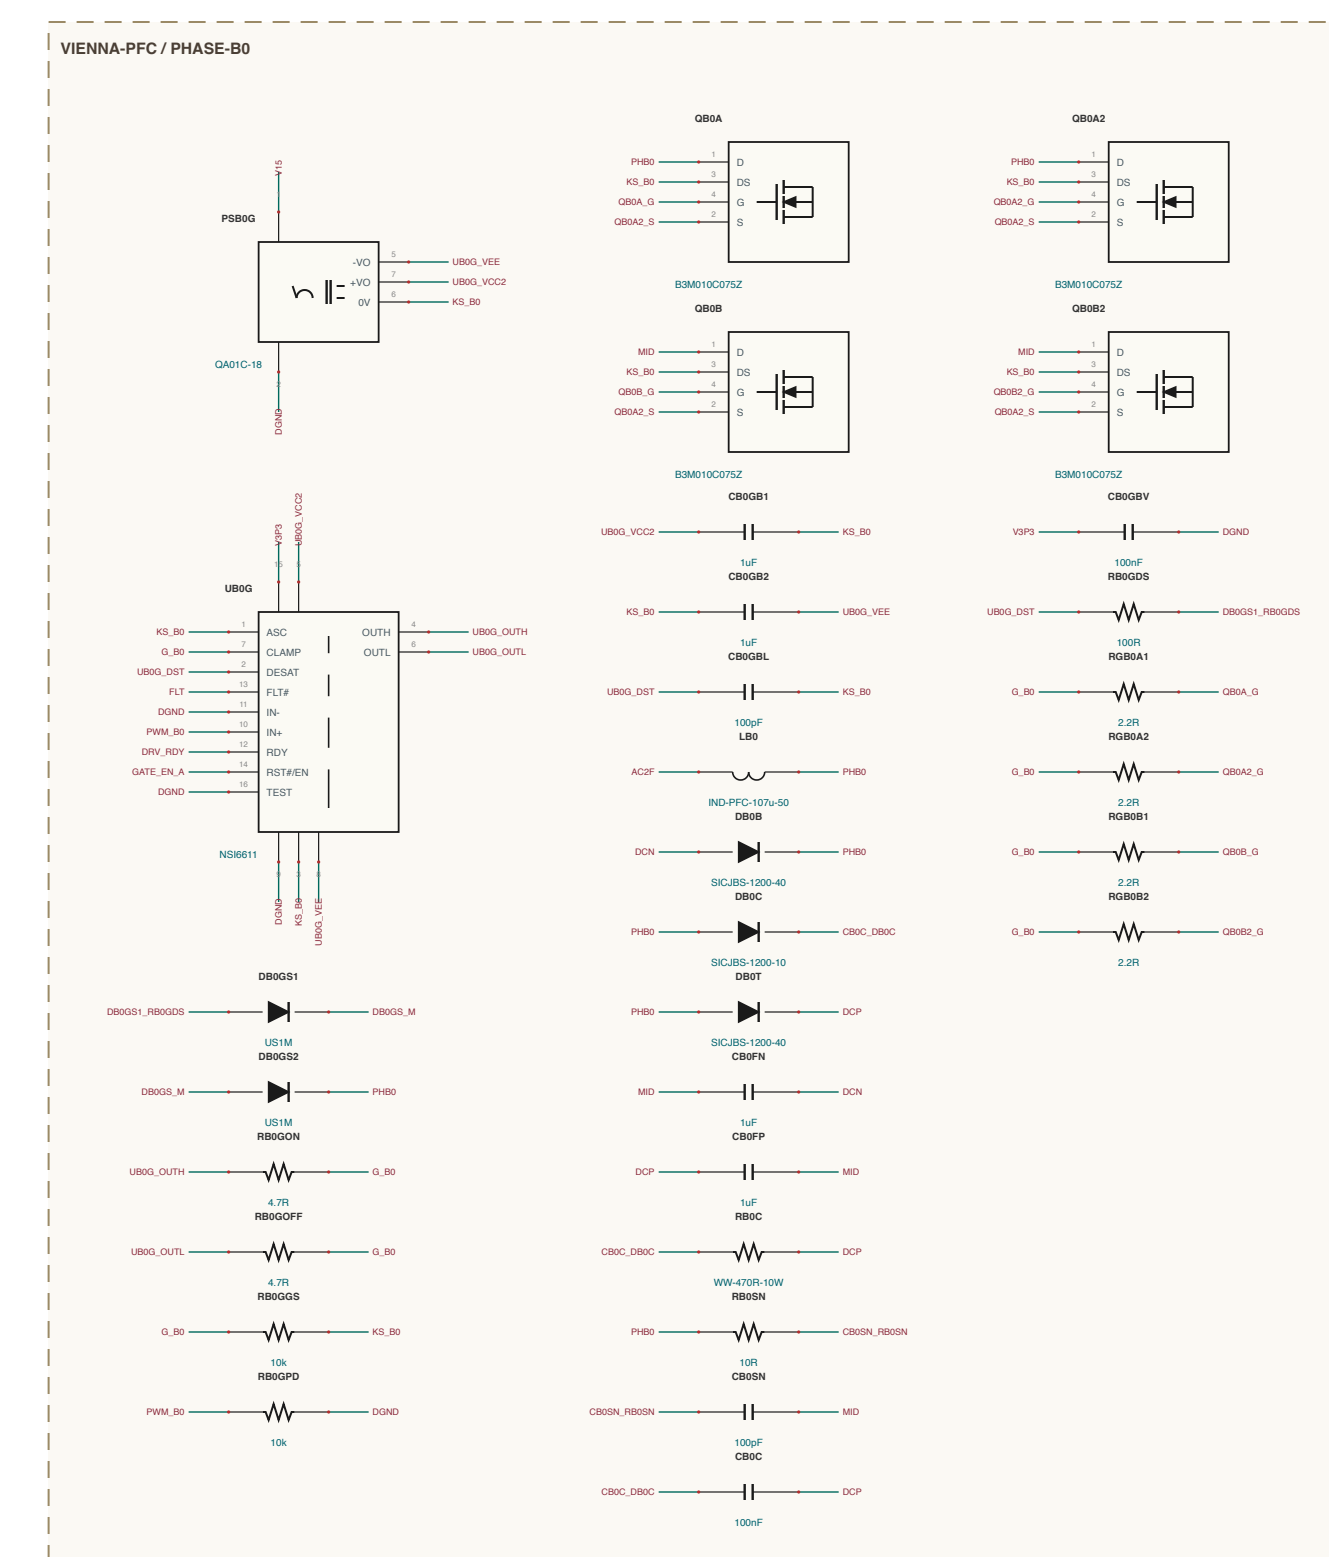
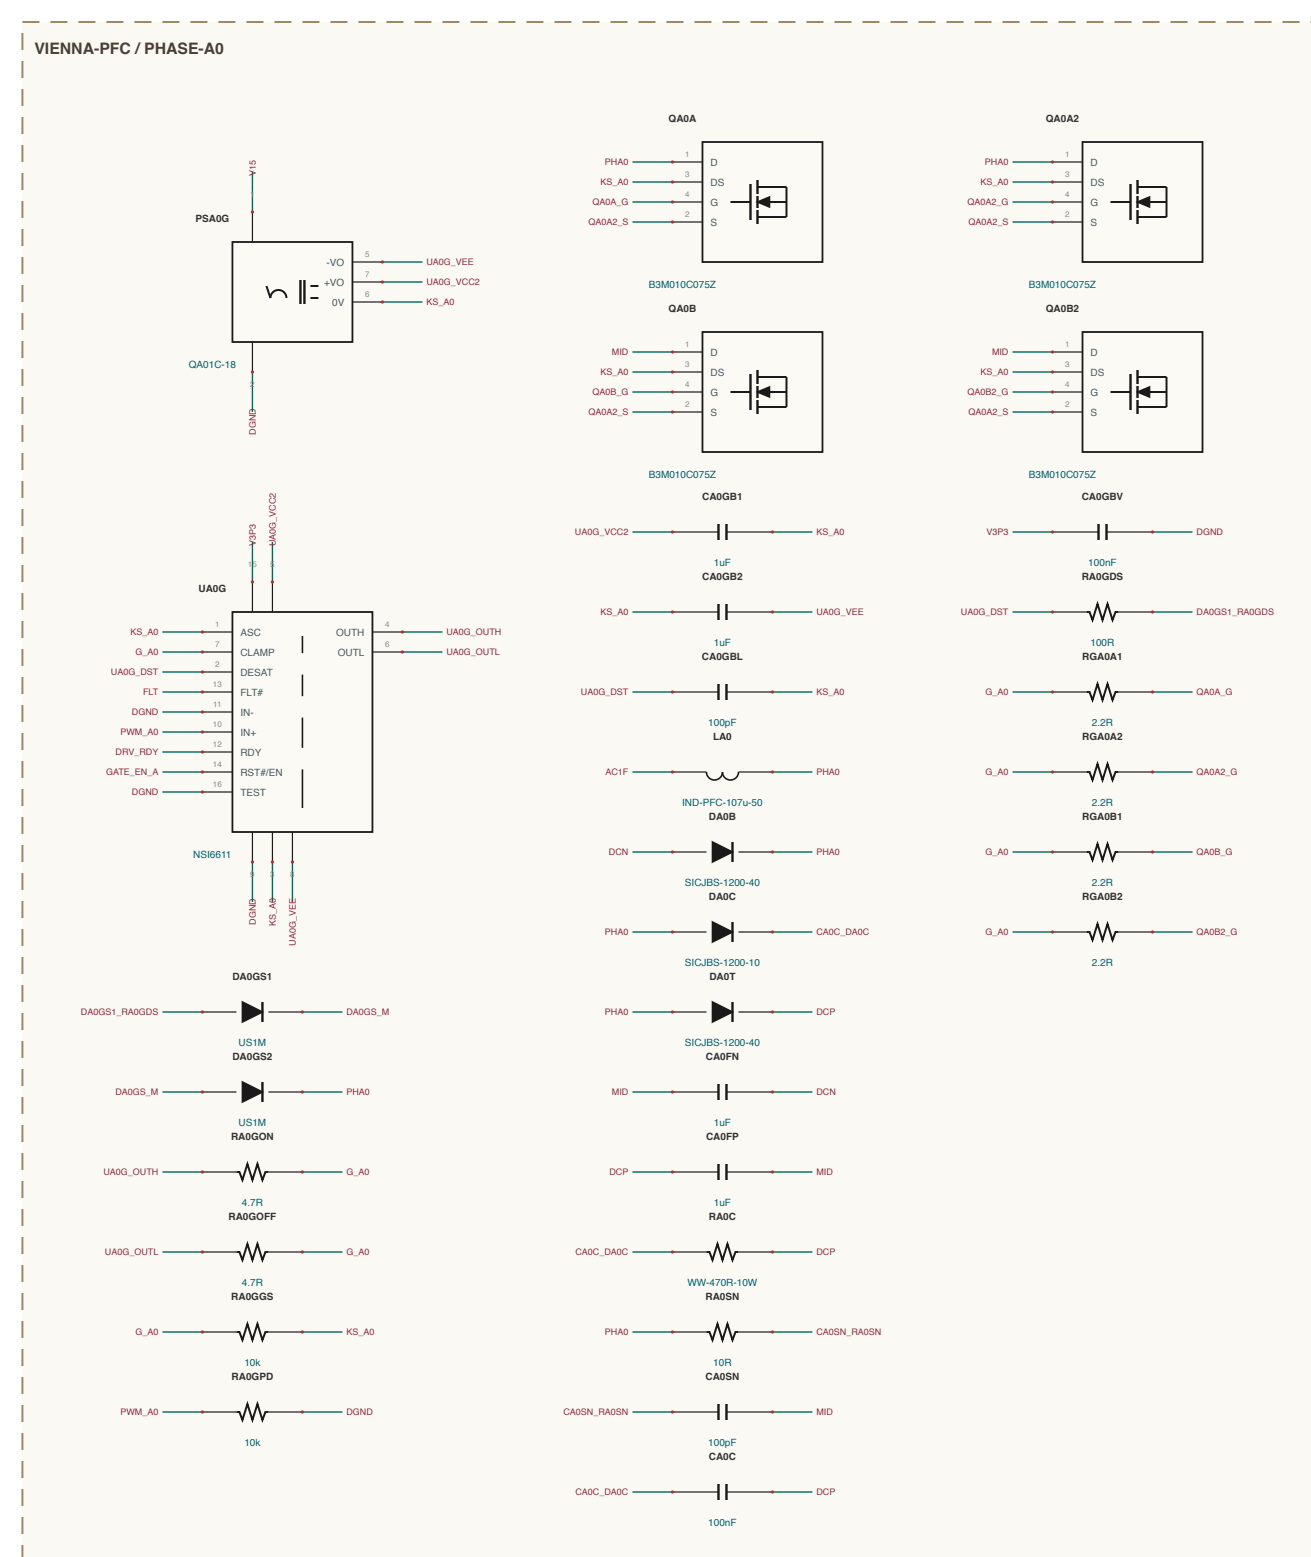
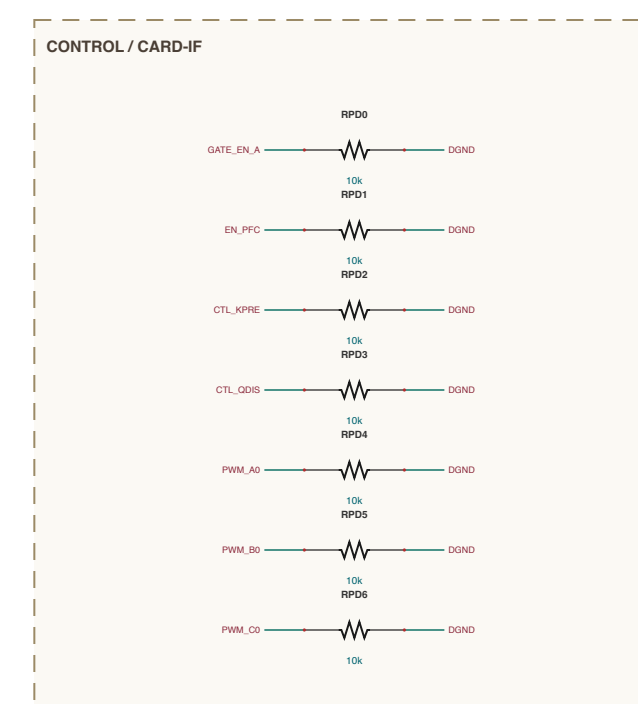
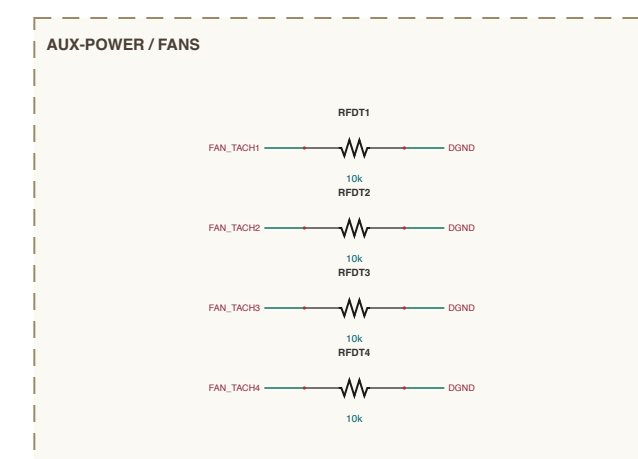
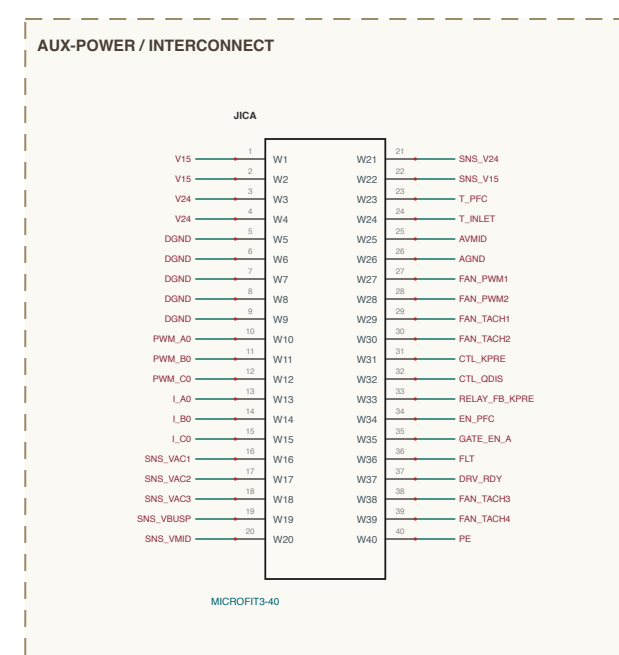
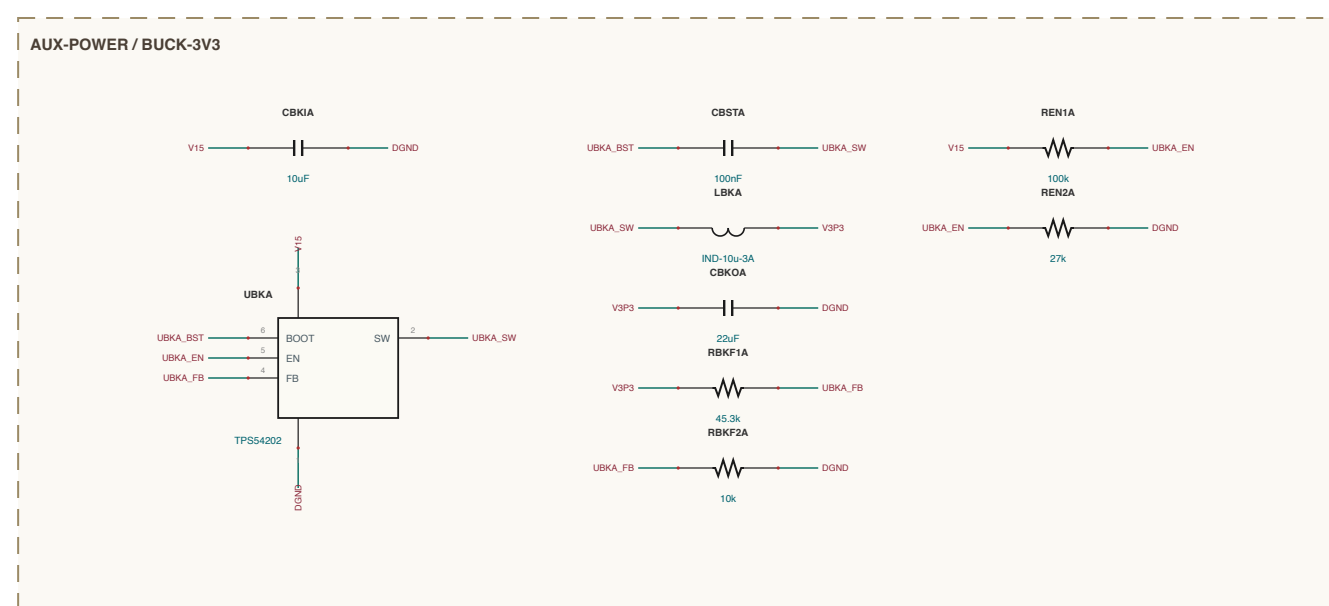
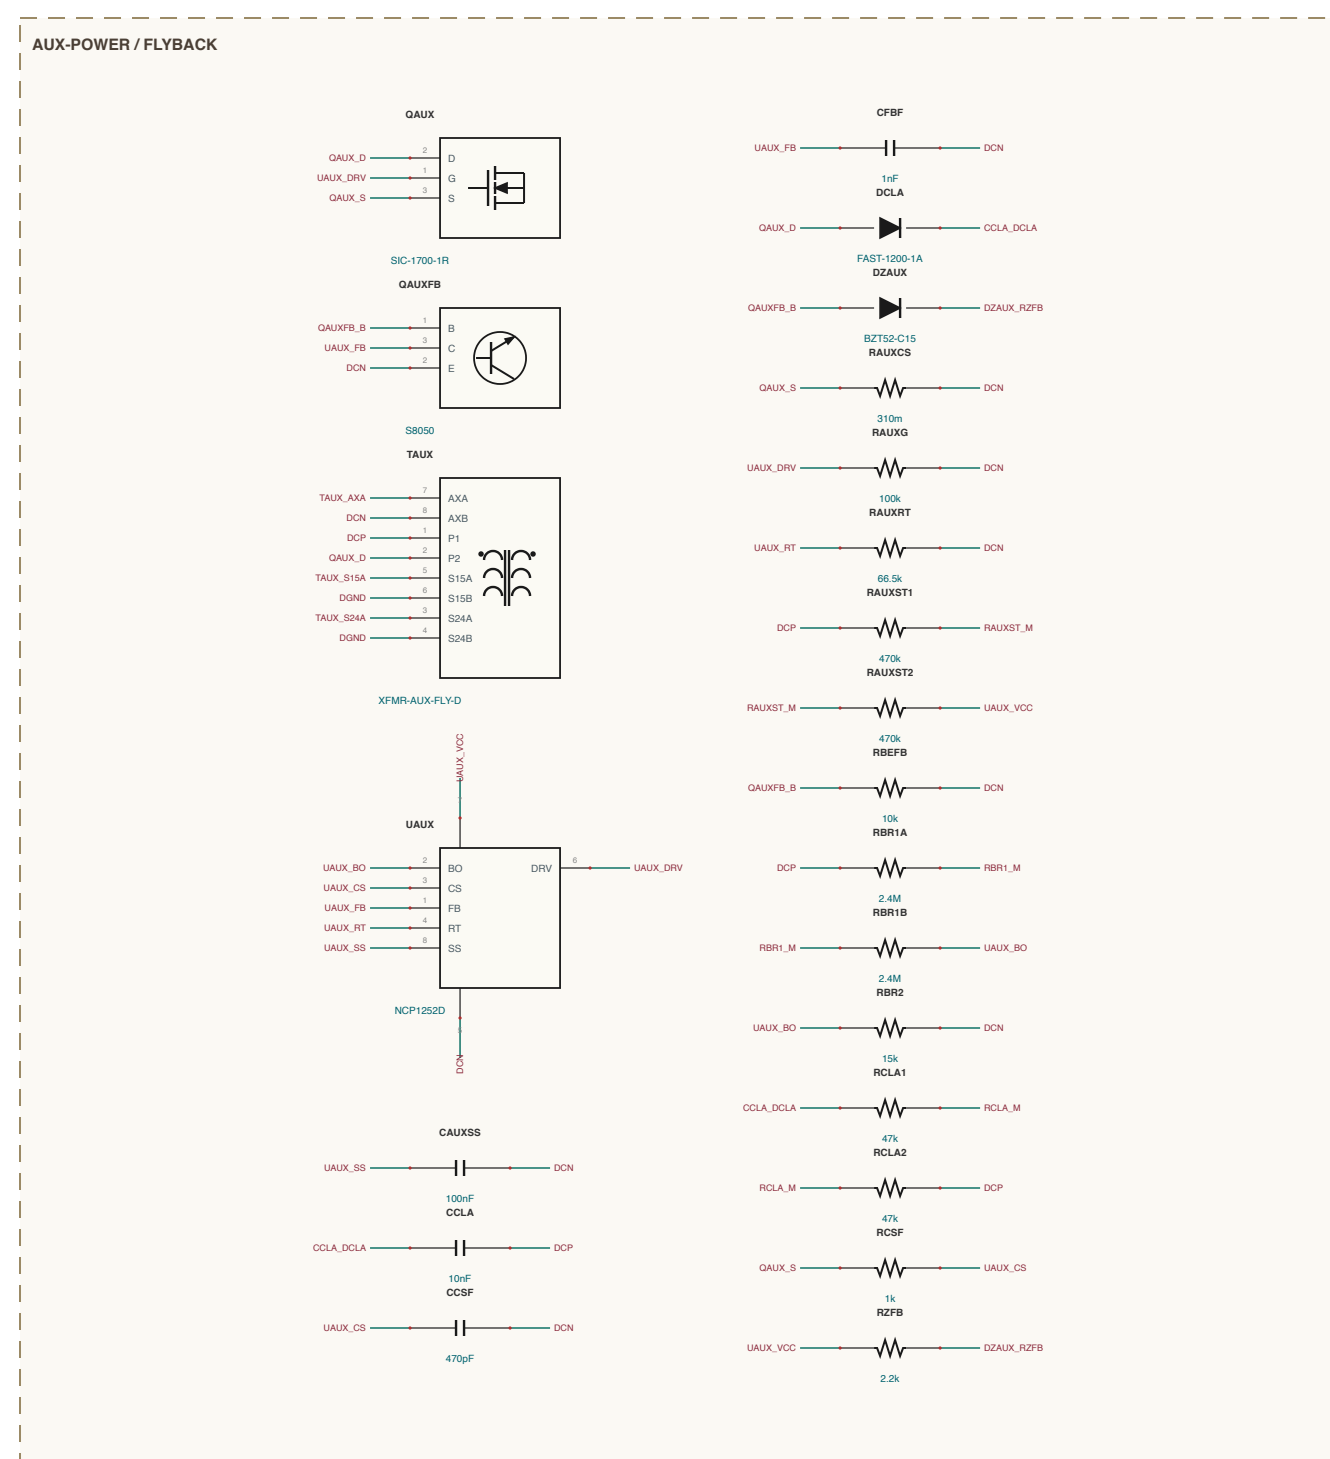
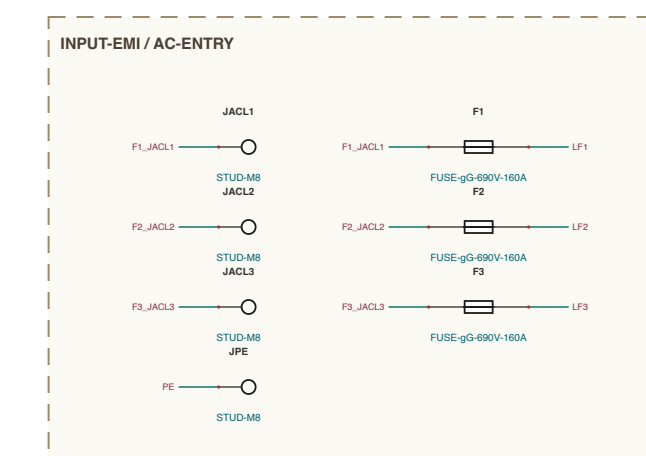
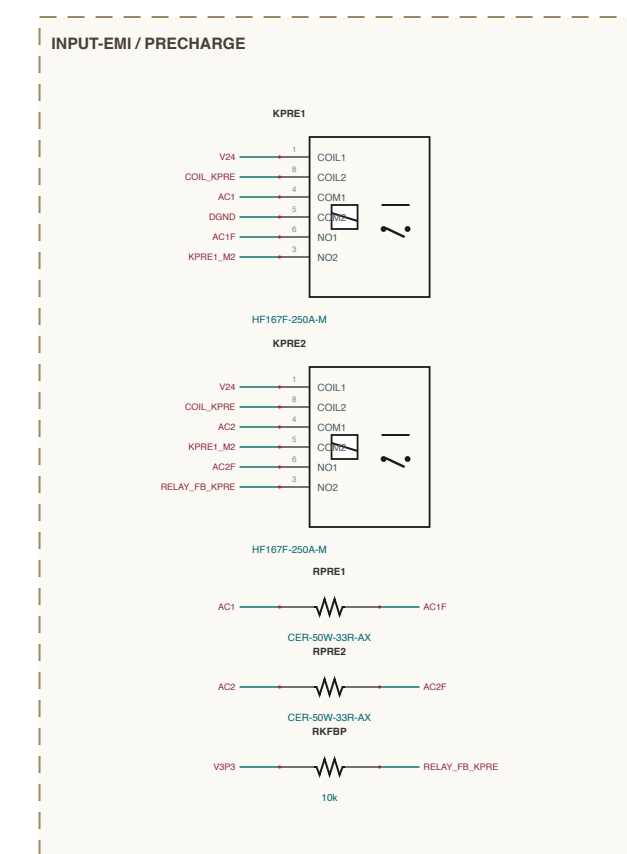
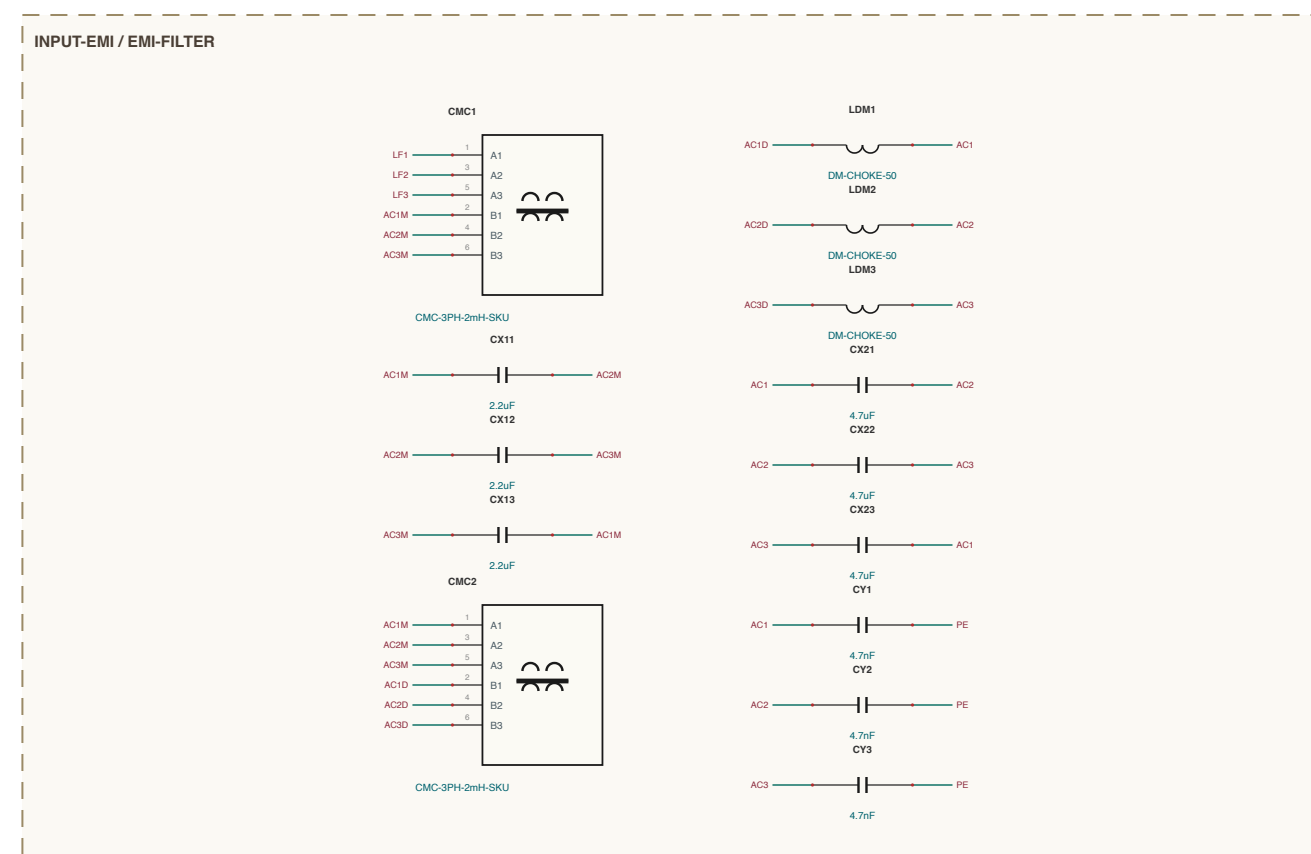
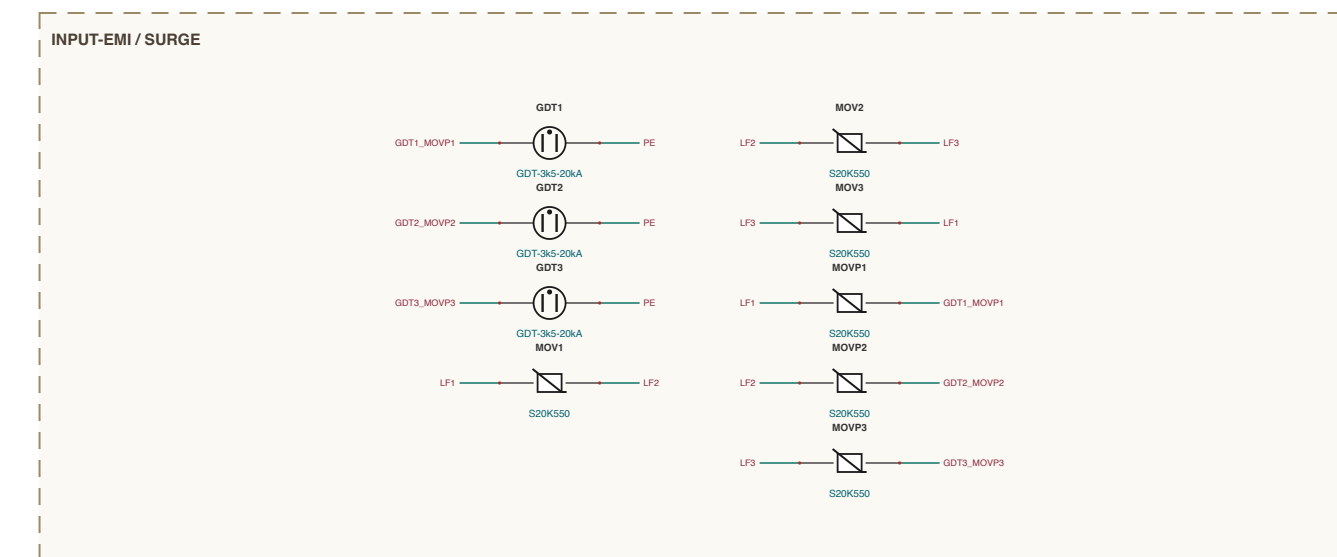
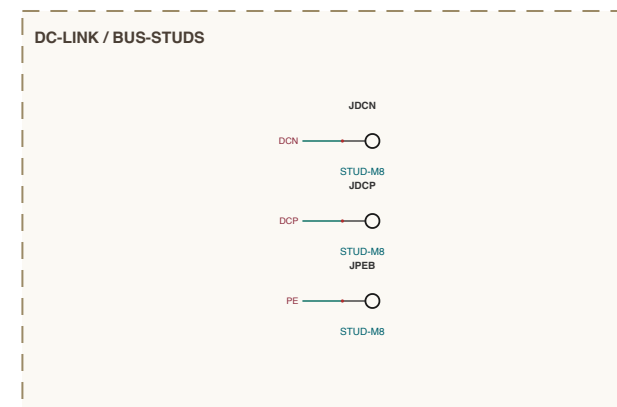
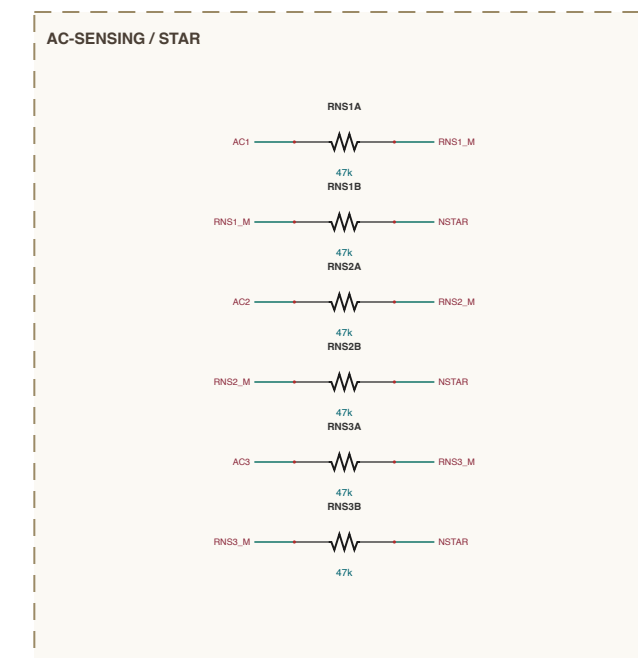
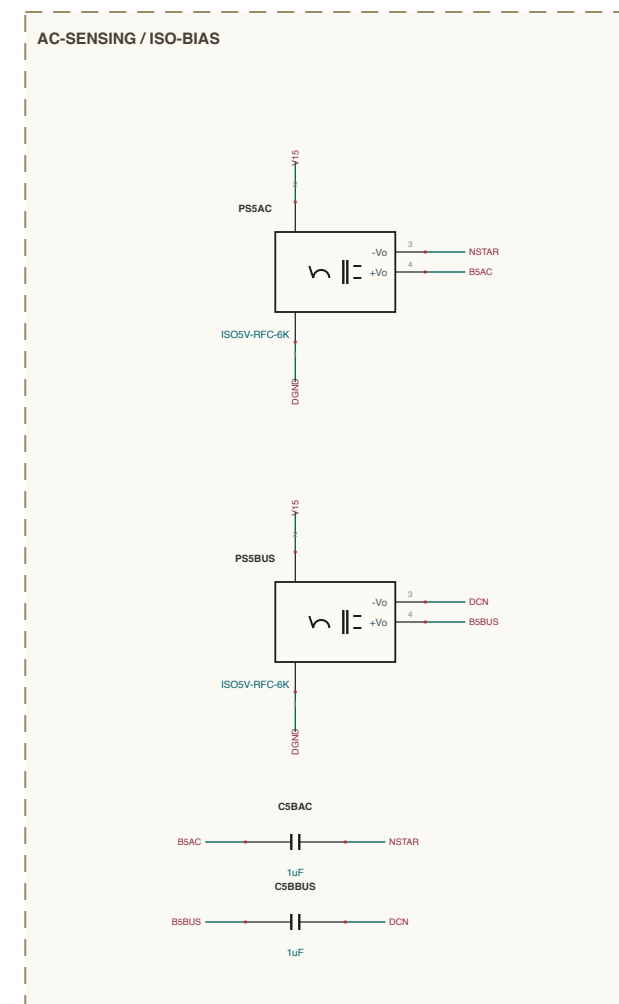
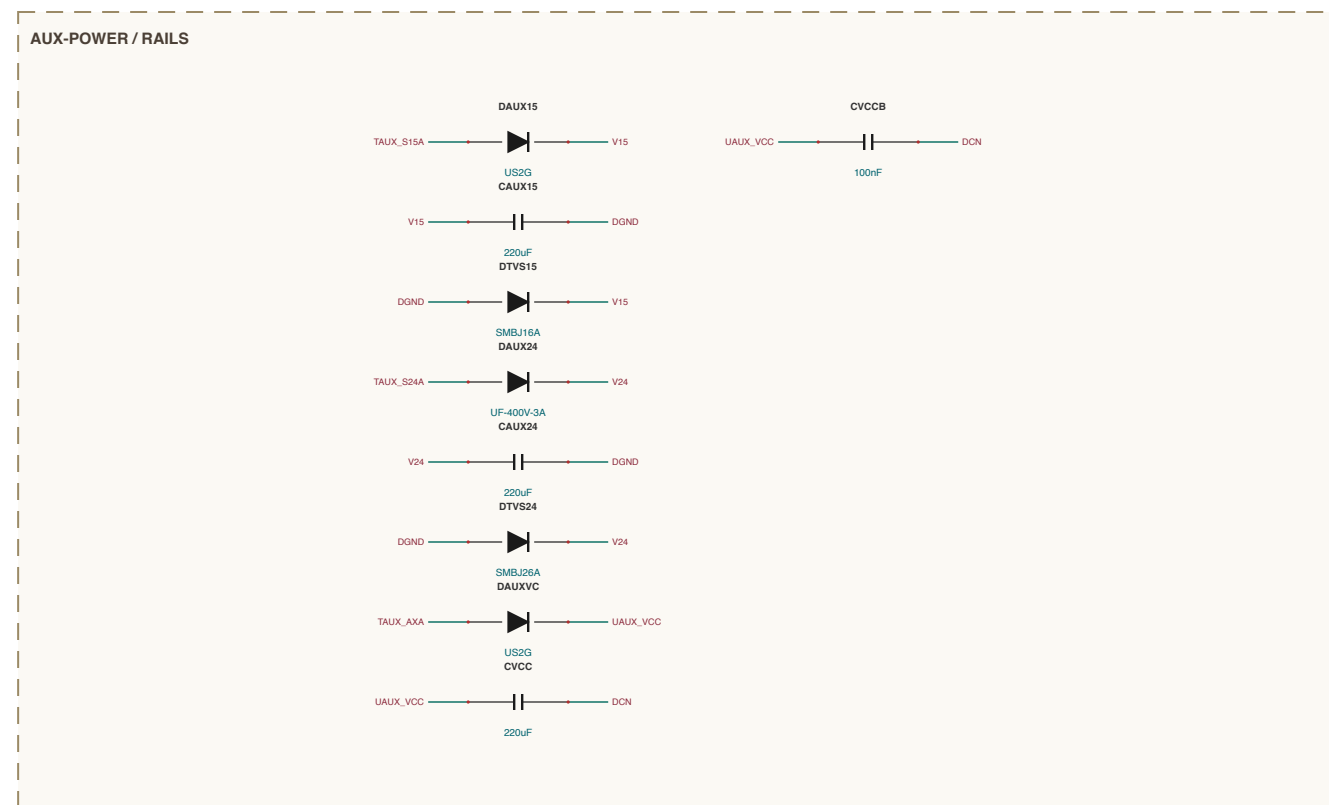
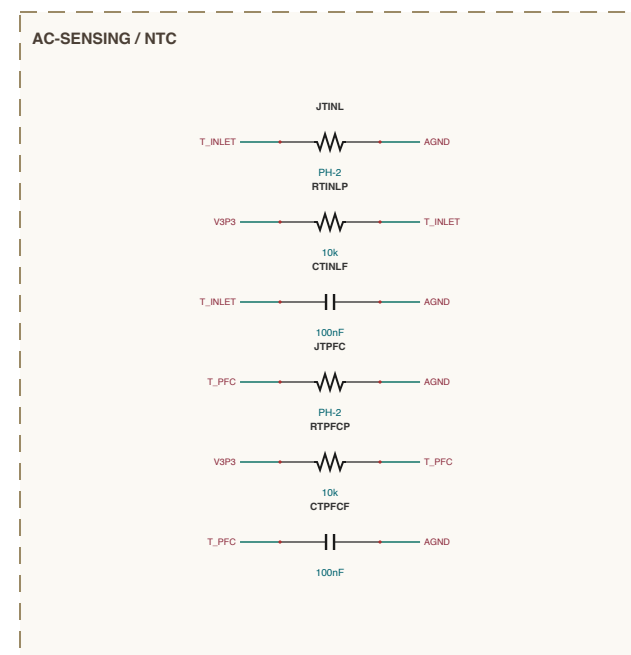
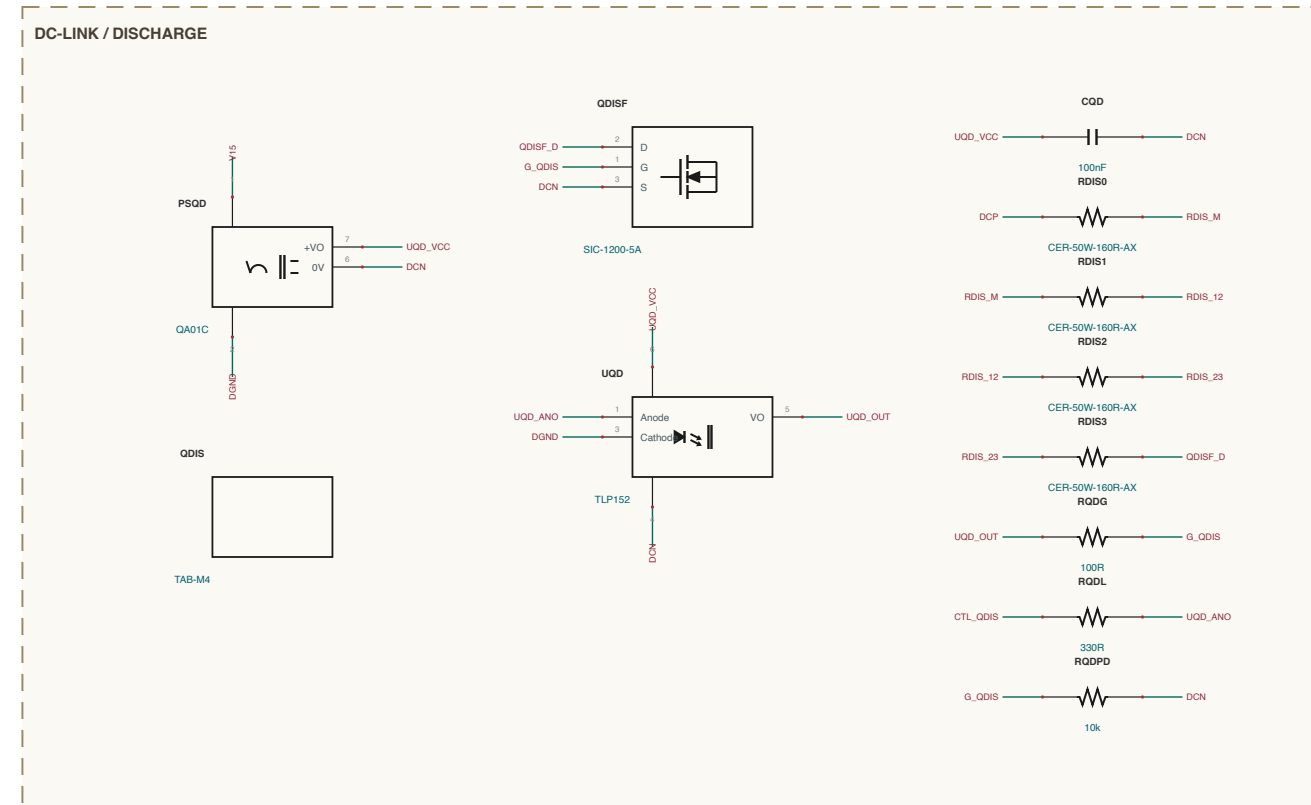
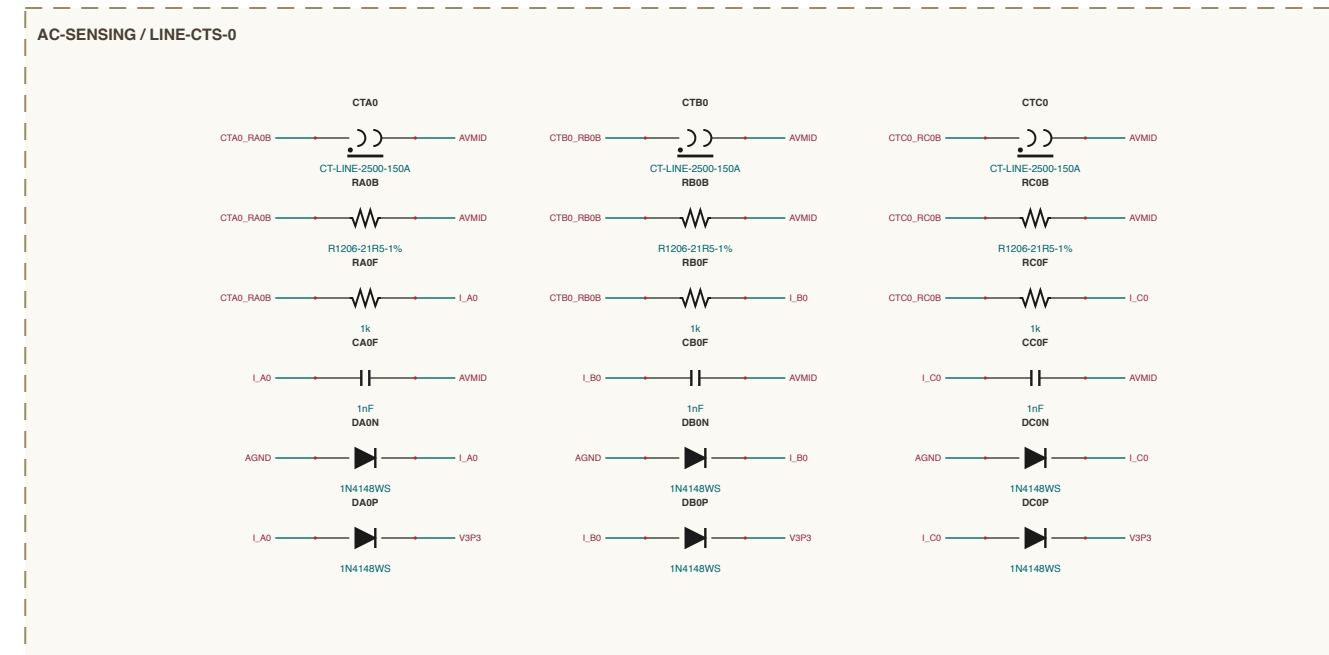
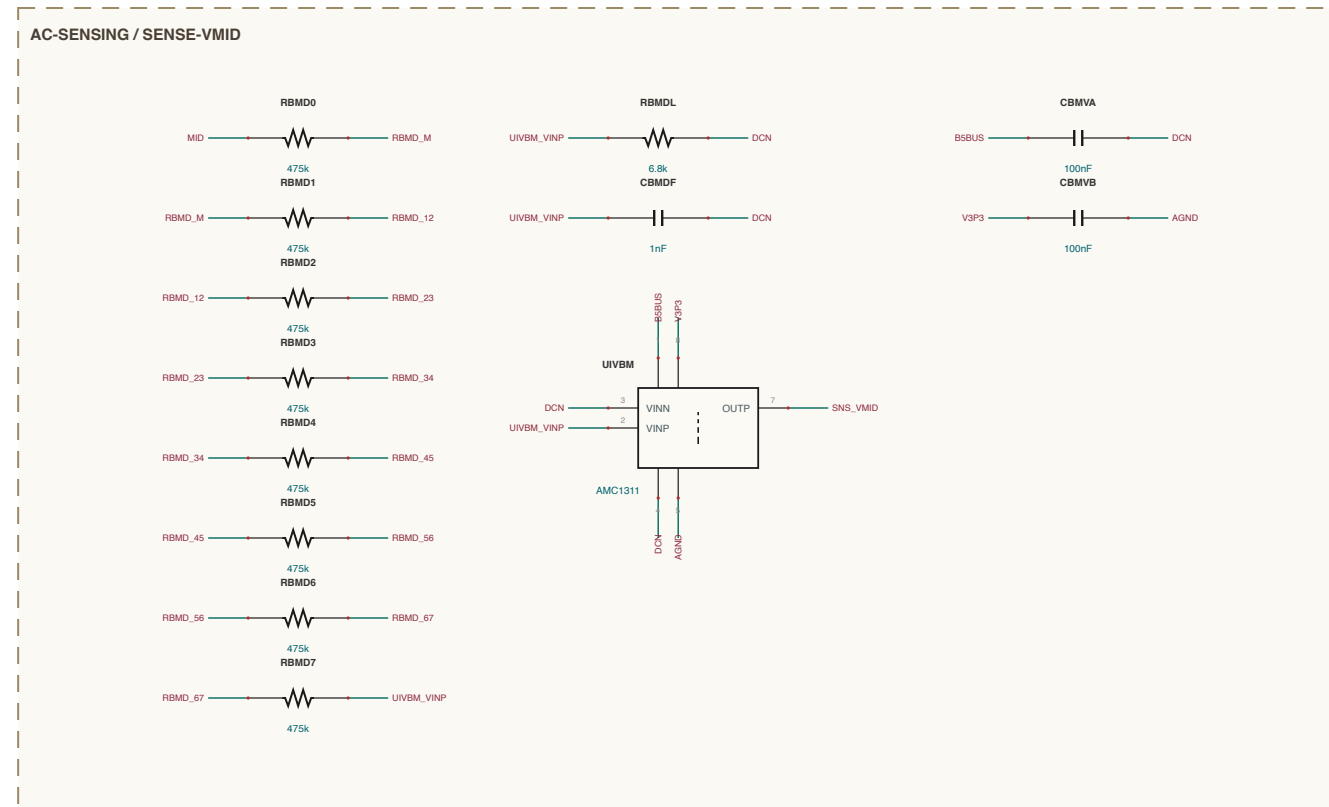
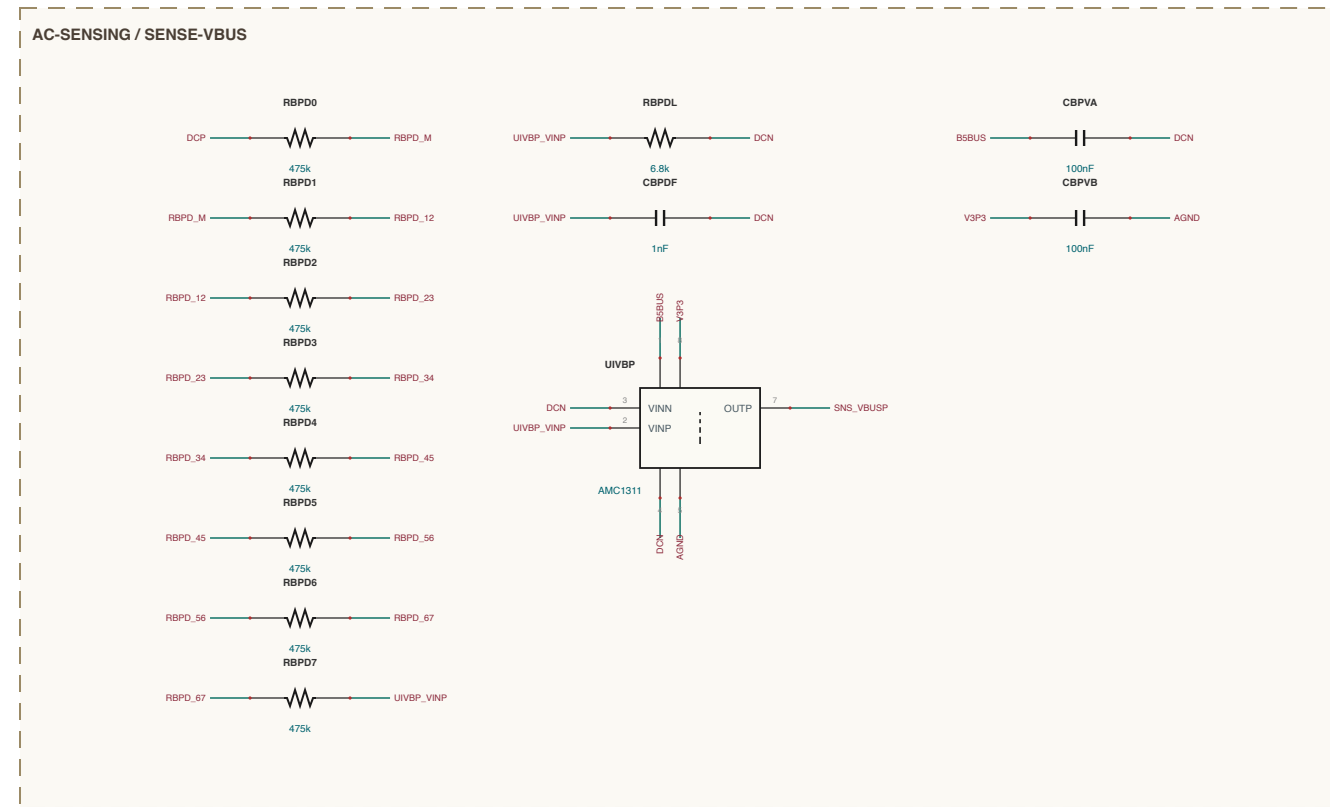
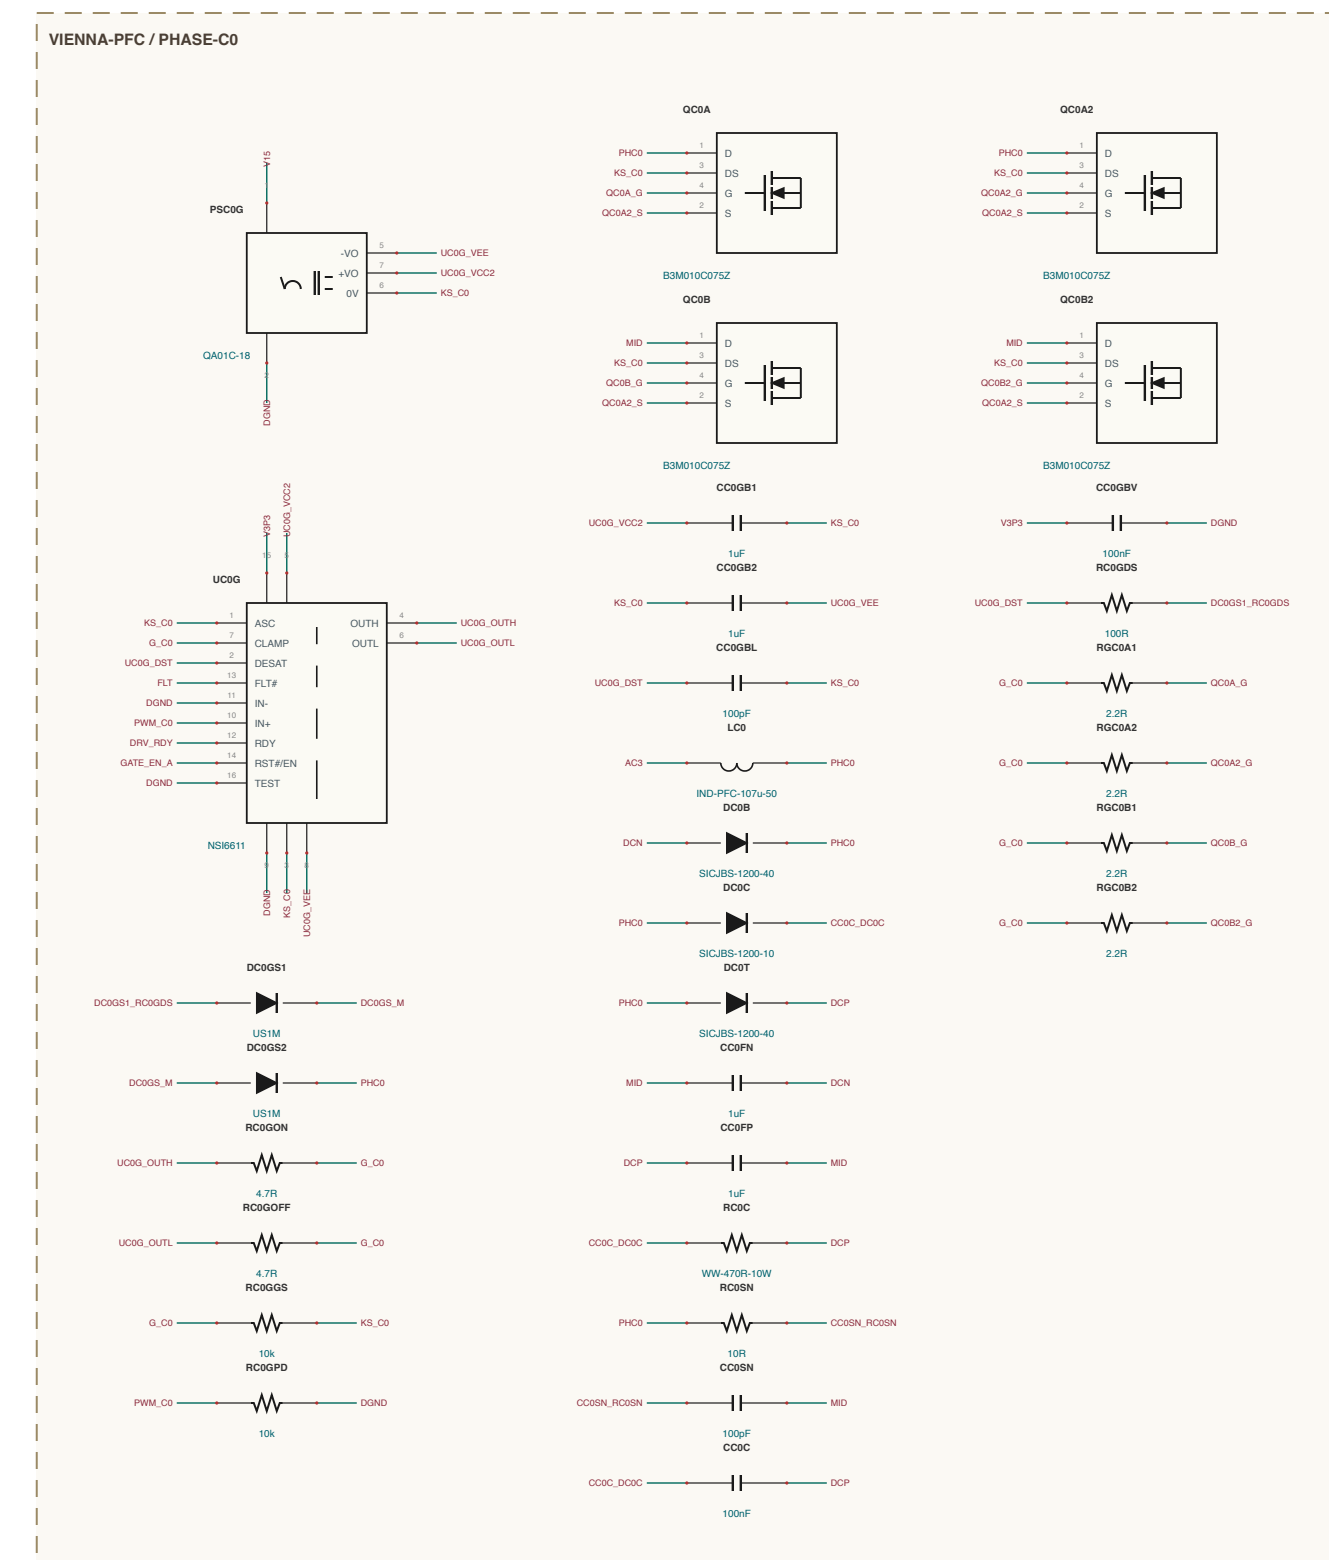
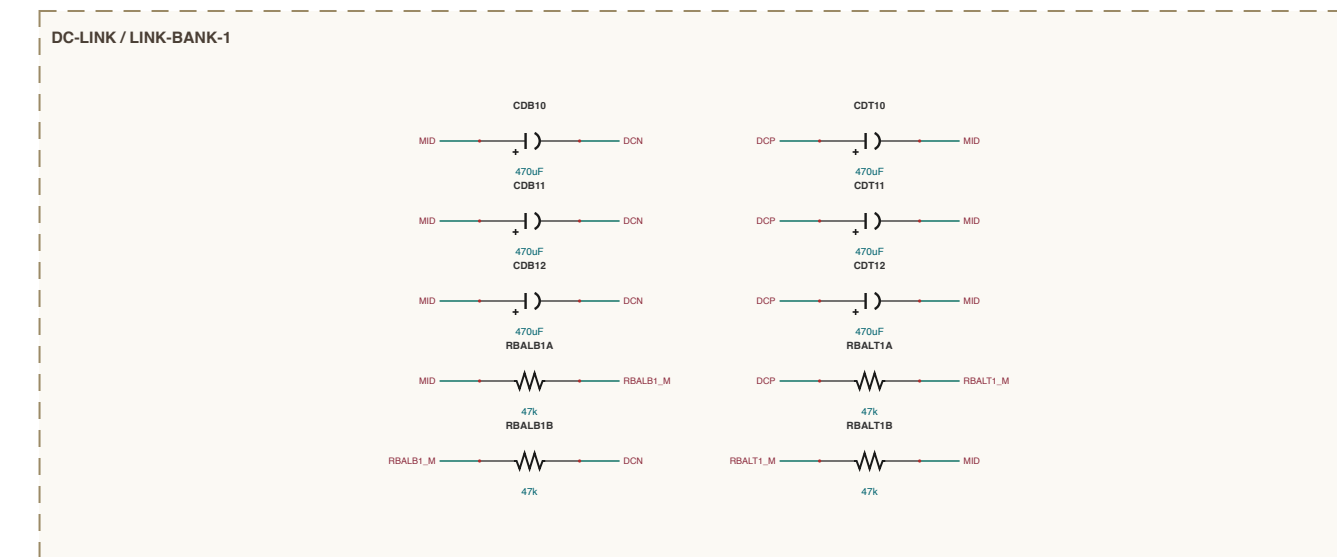
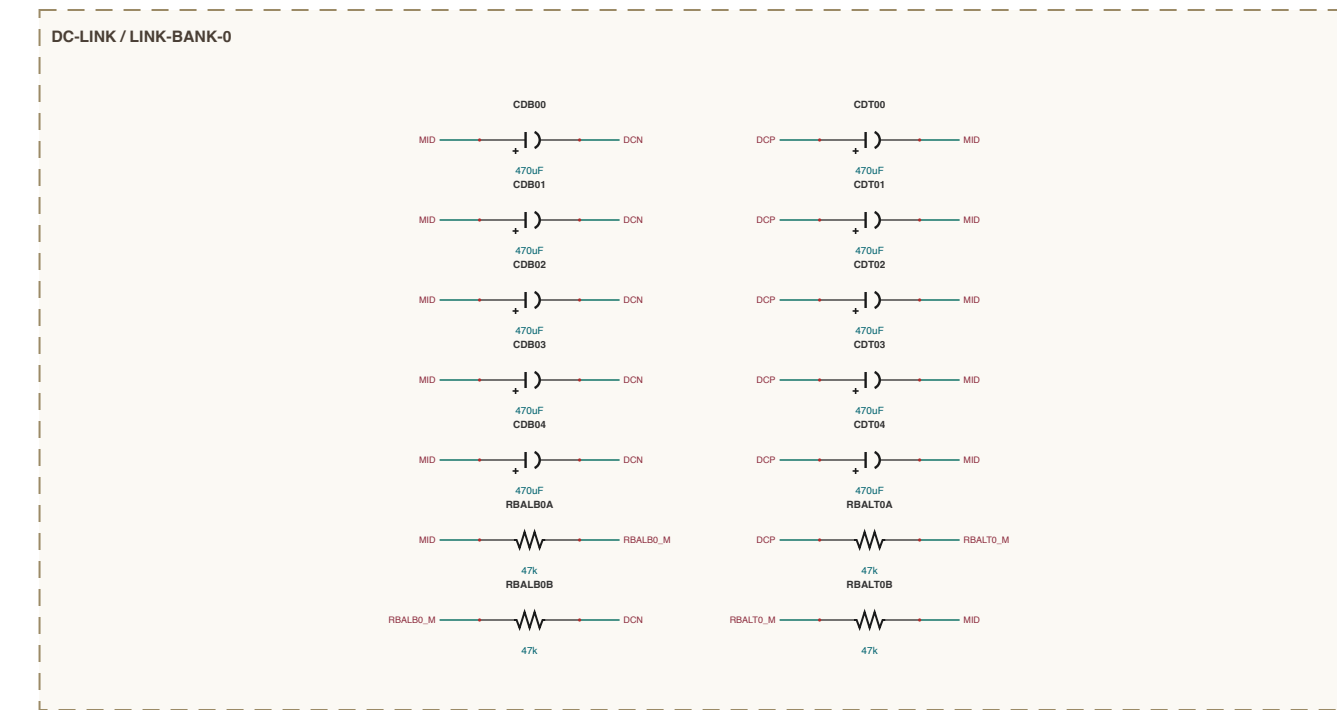
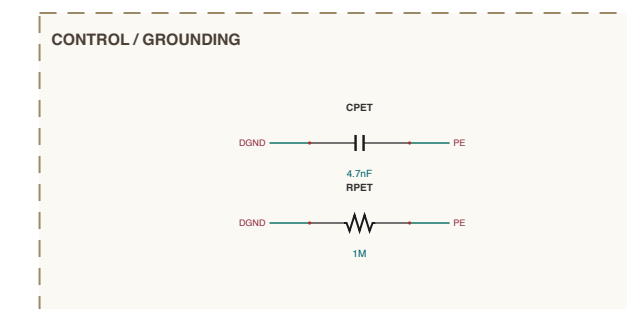
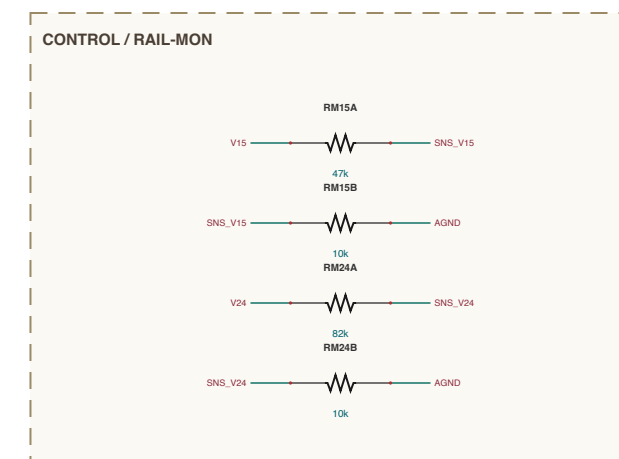
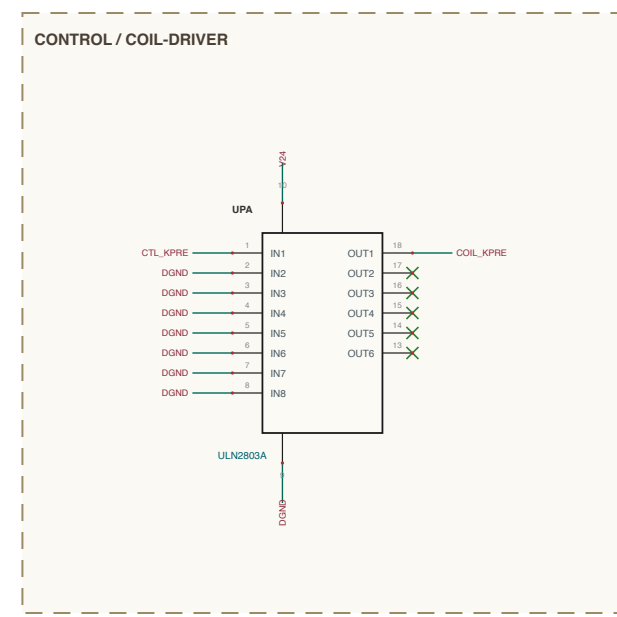
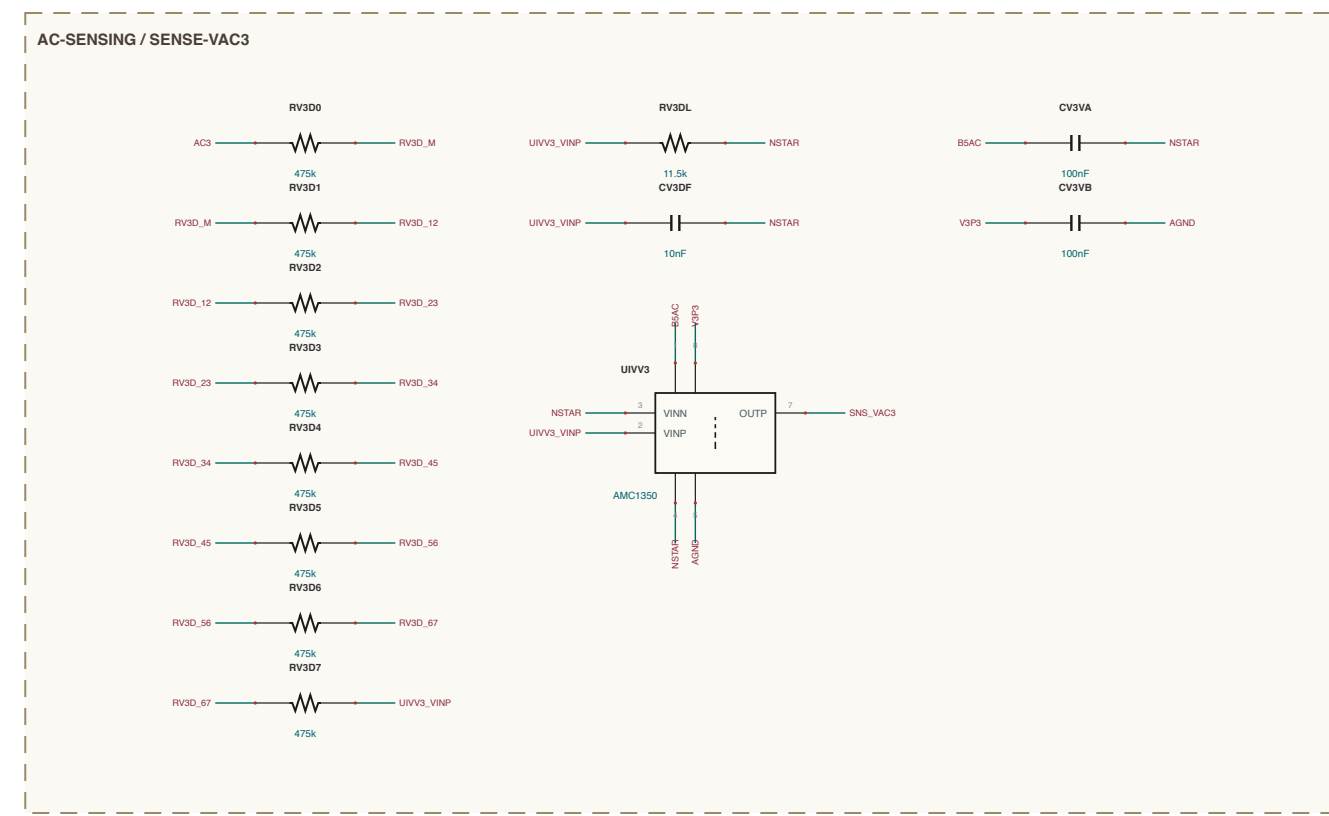
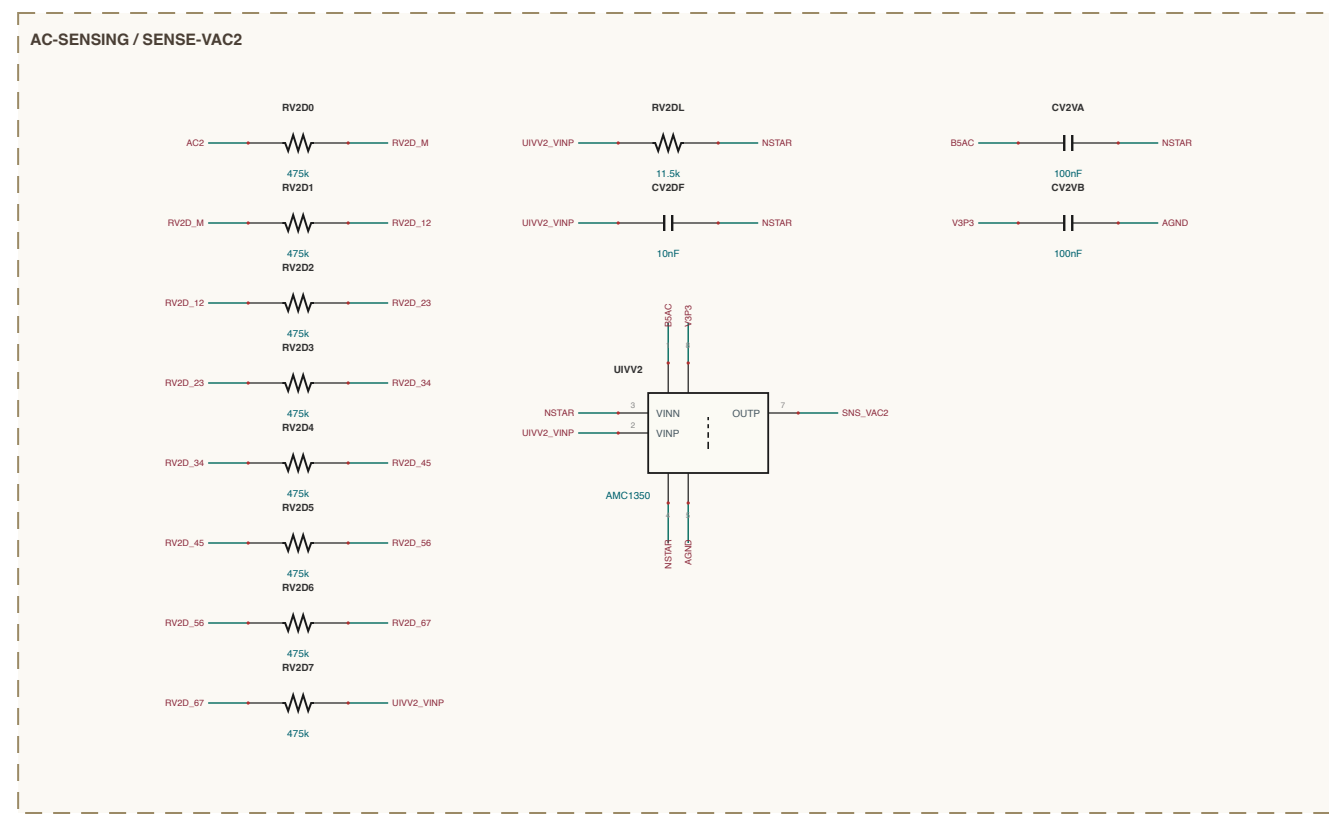


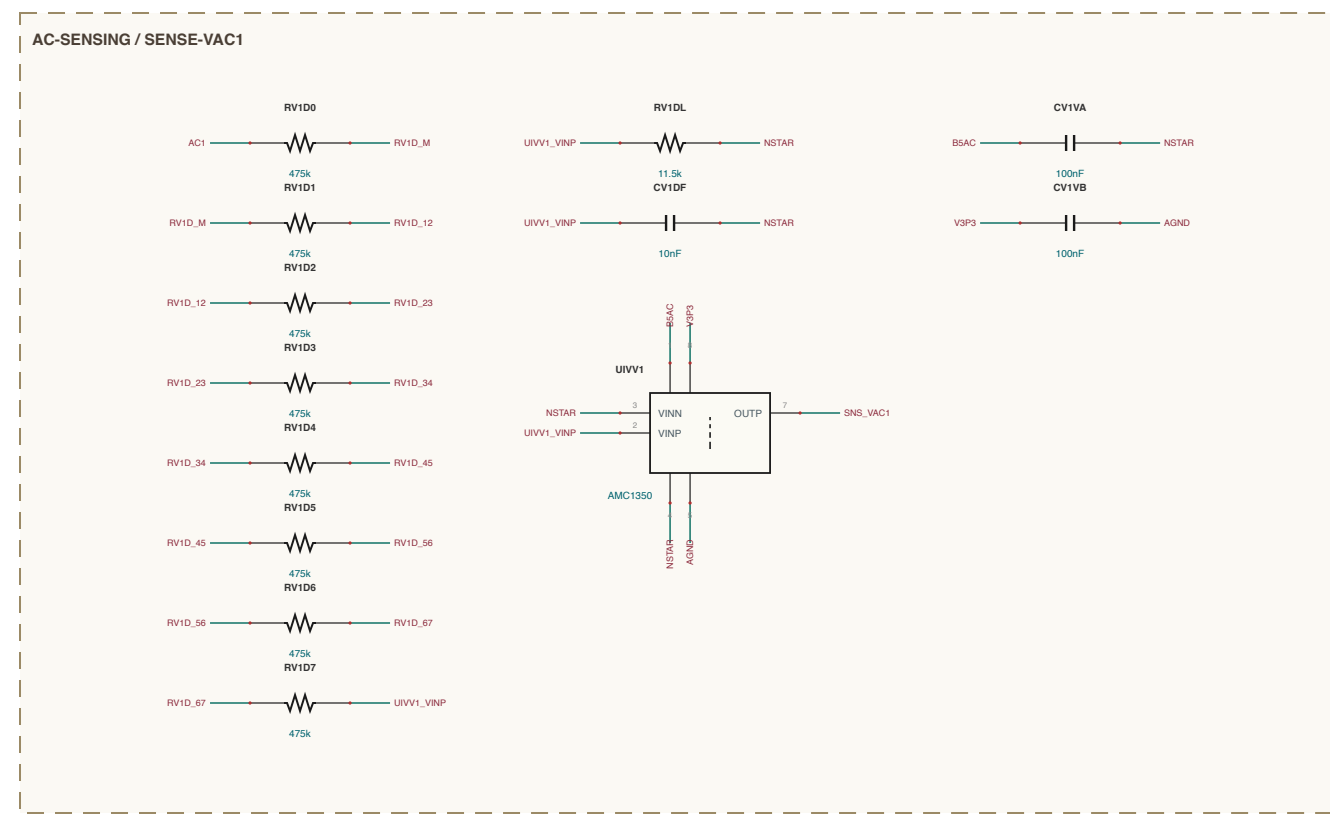

SHEET INDEX

SLAB - 1 to 2
AC REINERD - 4 sections
ALU POWER - 3 sections
CONCRE - 4 sections
DC LABS - 4 sections
INSTRUM - 4 sections
VENNA-PVC - 4 sections

see D-1 - 28 sections - 100 components

NET NAMING	
Internal junctions are named for what they join	
Usualy, "X" suffix made at that IC pin e.g. U105D, V10P	
Problems: M misquoting of a source pin e.g. R80A.7A, M	
Problems: wrong tag between two components e.g. R102.01	
all others are explicit design notes	

MAGNETICS CONSTRUCTION

Identify per drawing/magnetics (Junita, gap, etc, acceptance from line frame)

01 LAR-LCO 3m 750 20m sendout (4740.00 AL73), 8m24 v=1 set time = L4 1074U, sendOut 0 120.5A (p 055)

06 LCM01= 3m 750 50m, 8m, 0.8m24 = 13.8m 0 136A (p 009) 11.4A, 0.51 treated basin 11.8 = med)

total L4 = time + measured after leakage (3m COMPENSATE leakage spread), Cr at TANK sections