




BANKS-SP / BANK-A

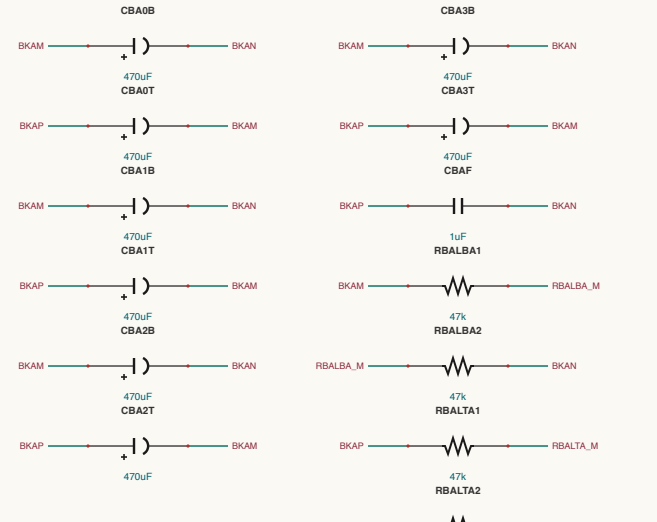


BANKS-SP / BANK-B

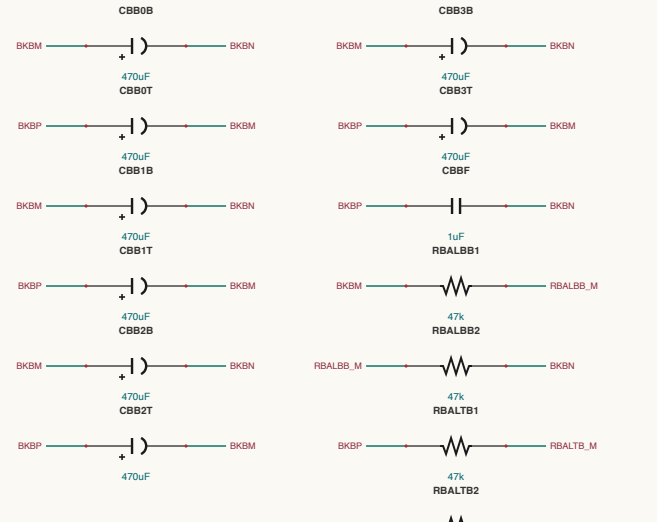


BANKS-SP / SP-MATRIX

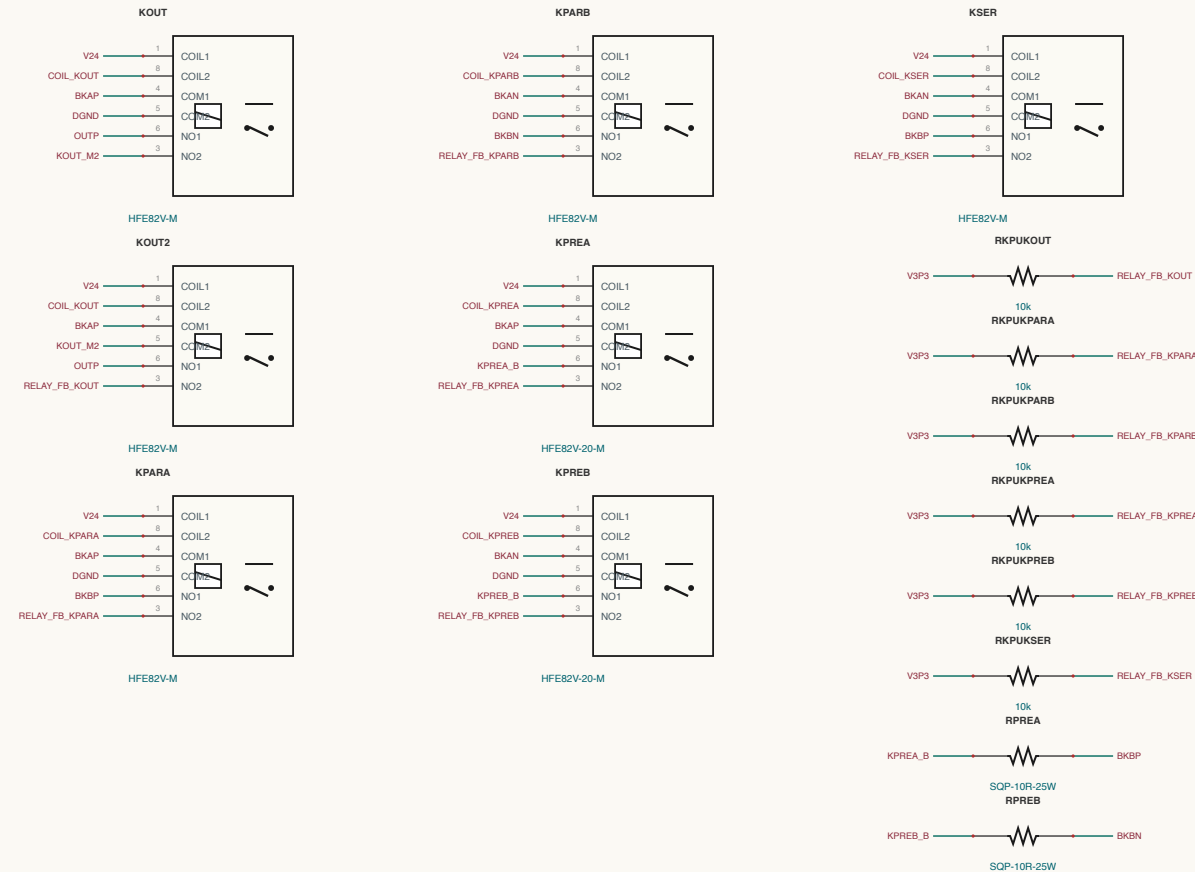


LLC-LESS / LEO-1

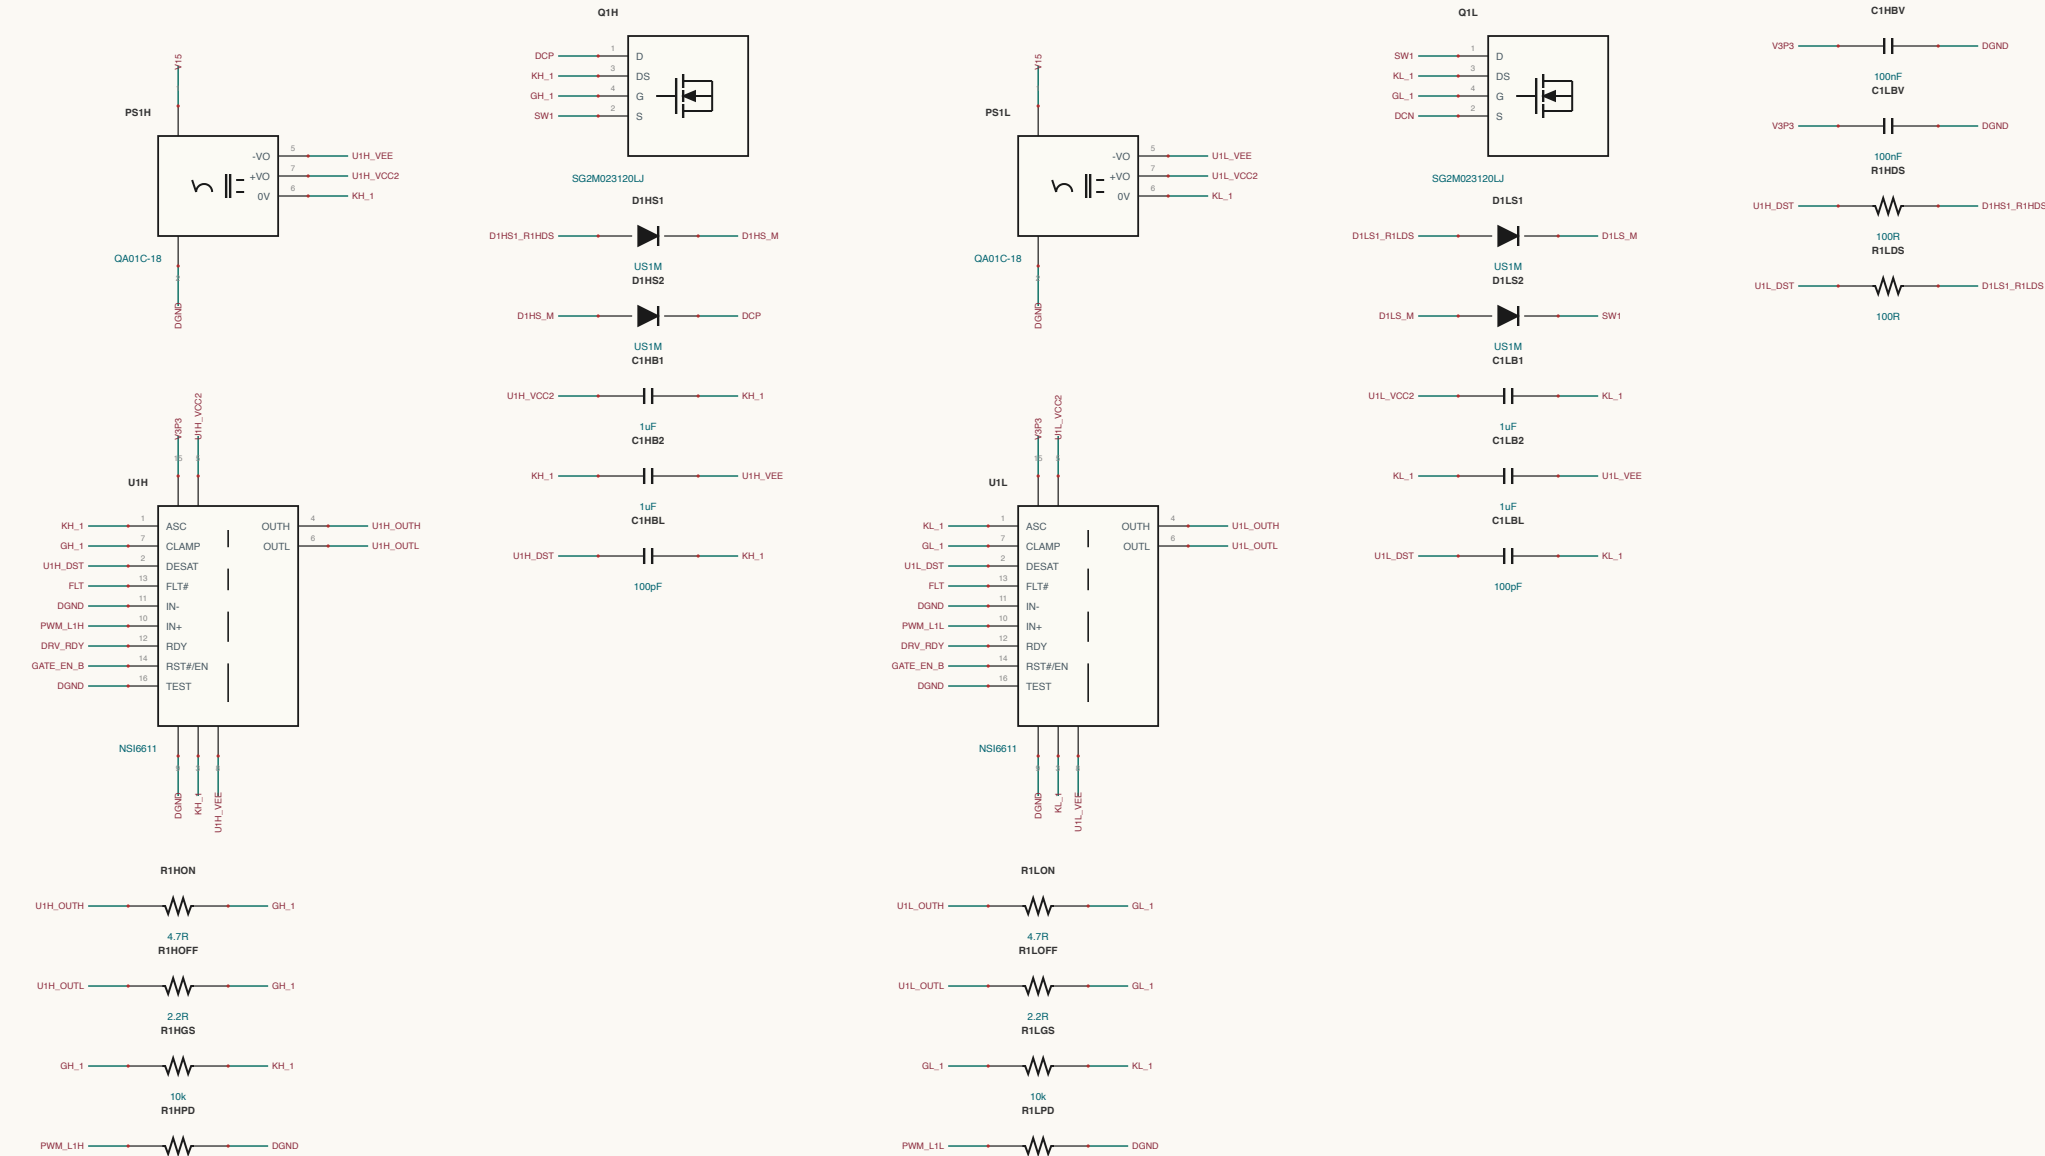


LLC-TANKS / TANK-1

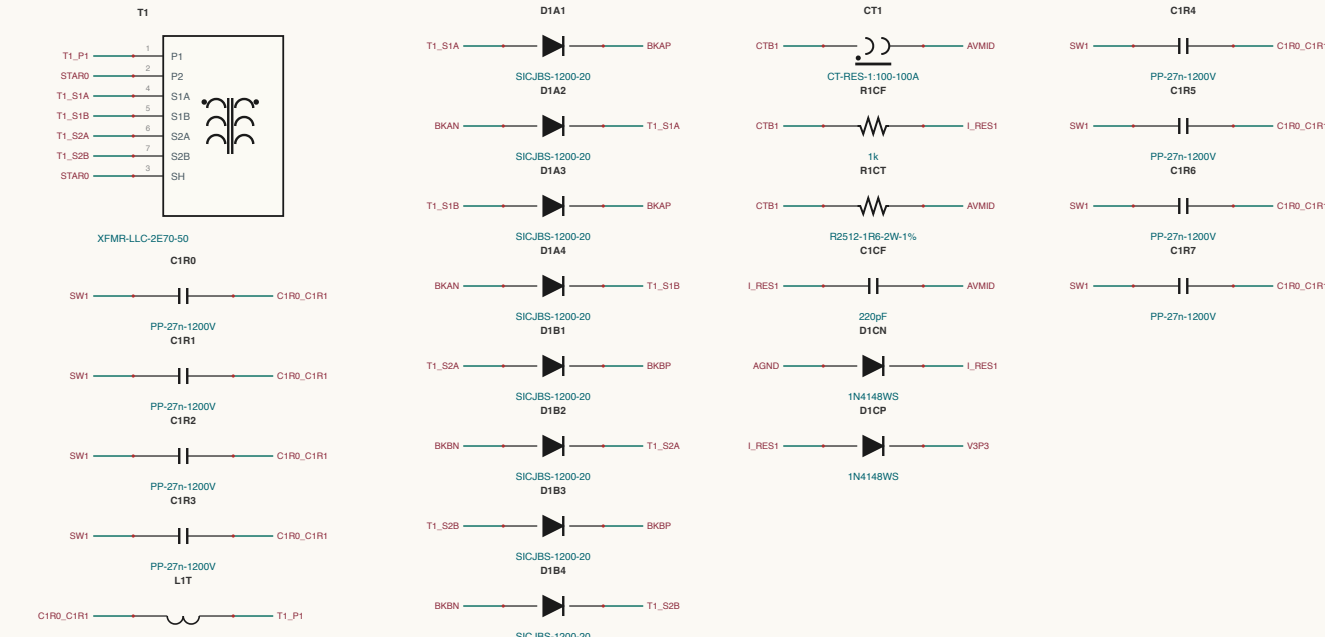


BANKS-SP / BLEEDERS

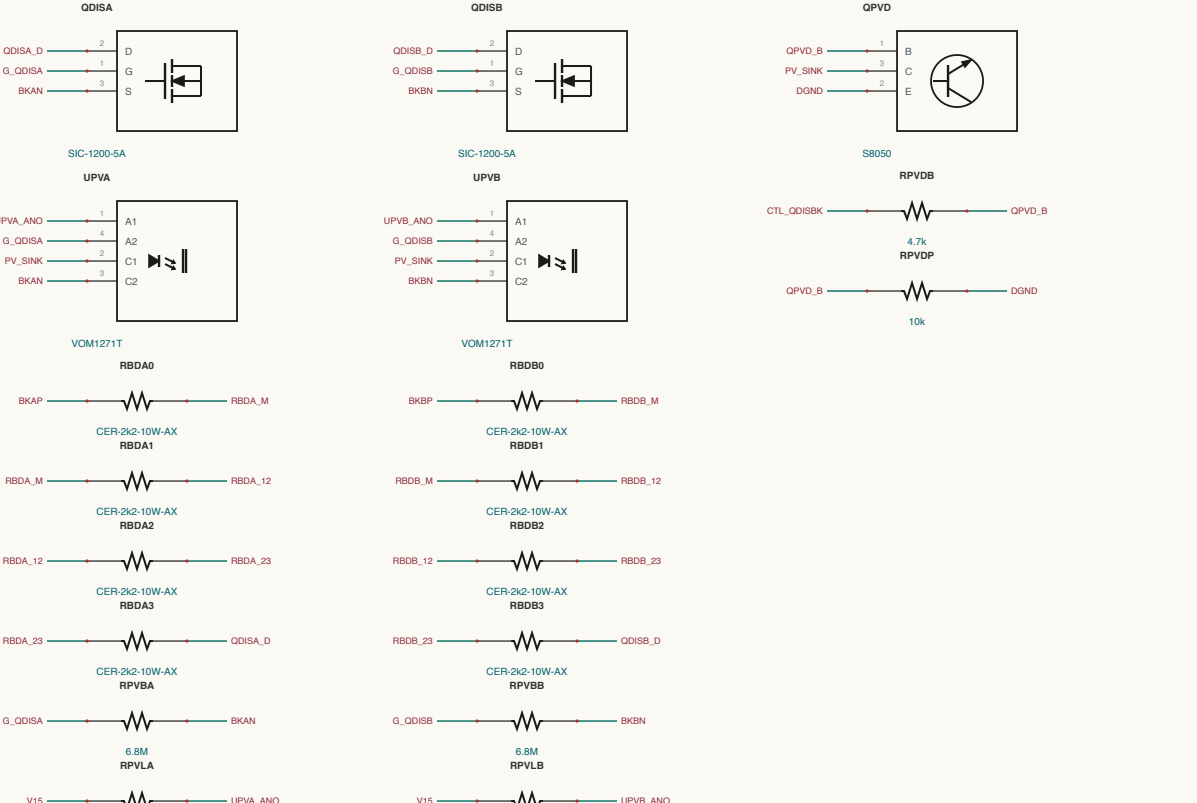


COMMS-HB / HB

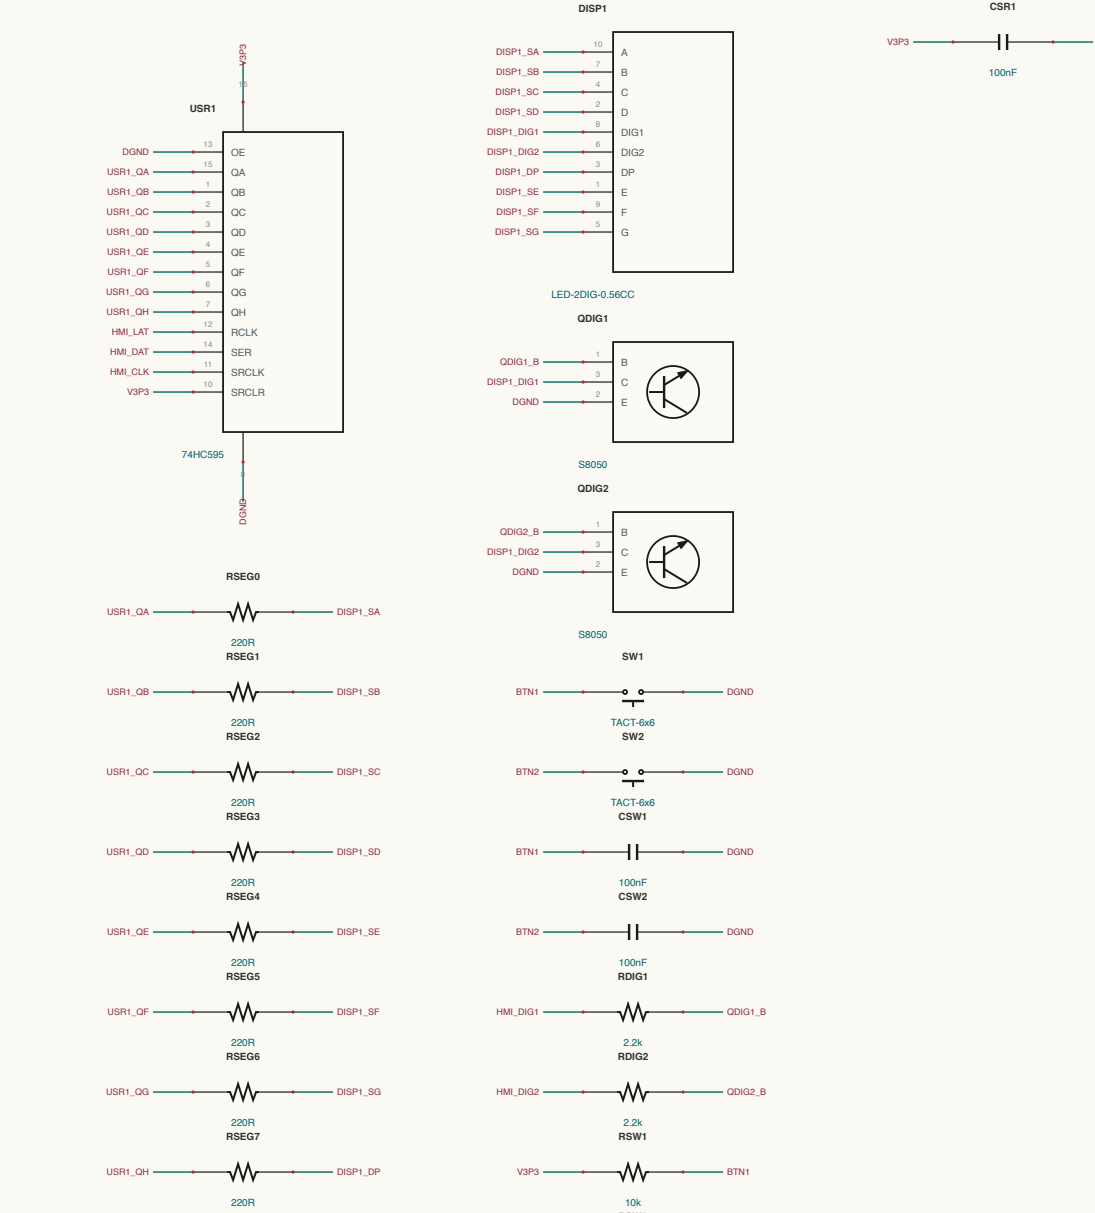


COMMS-HB / CAN

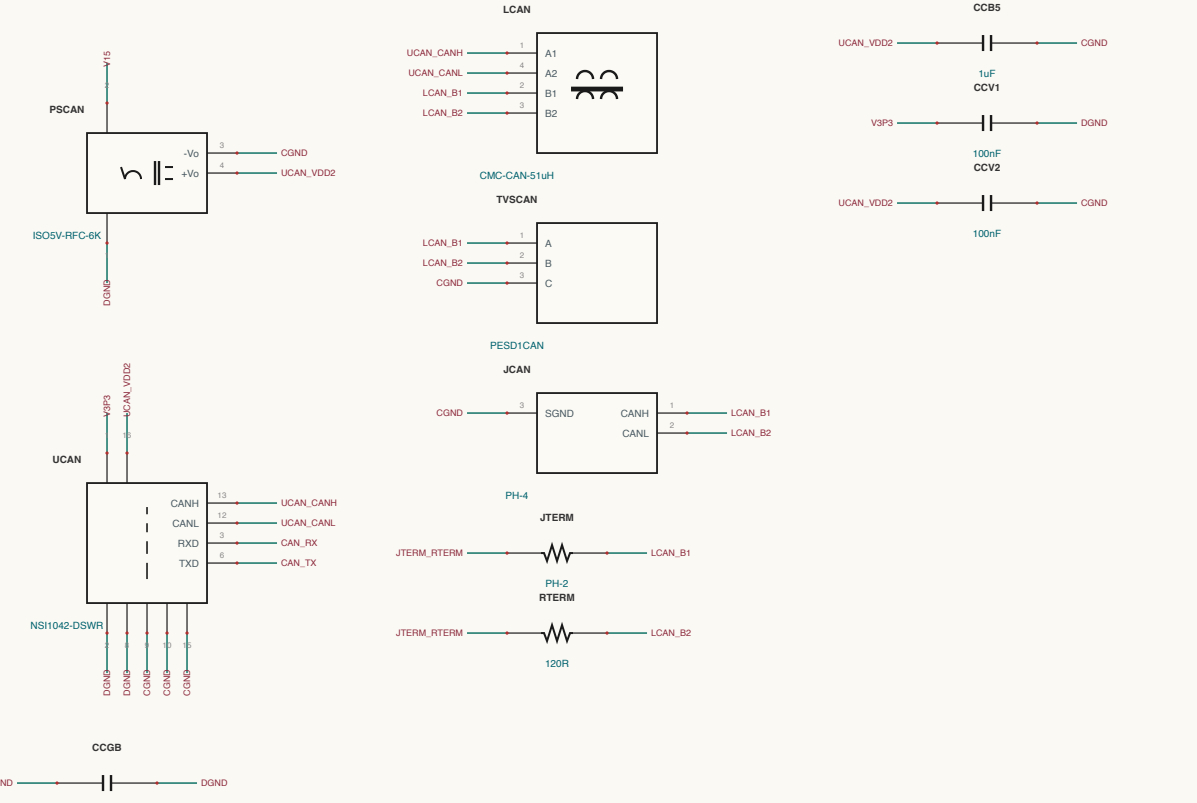


CONTROL / CARD-F

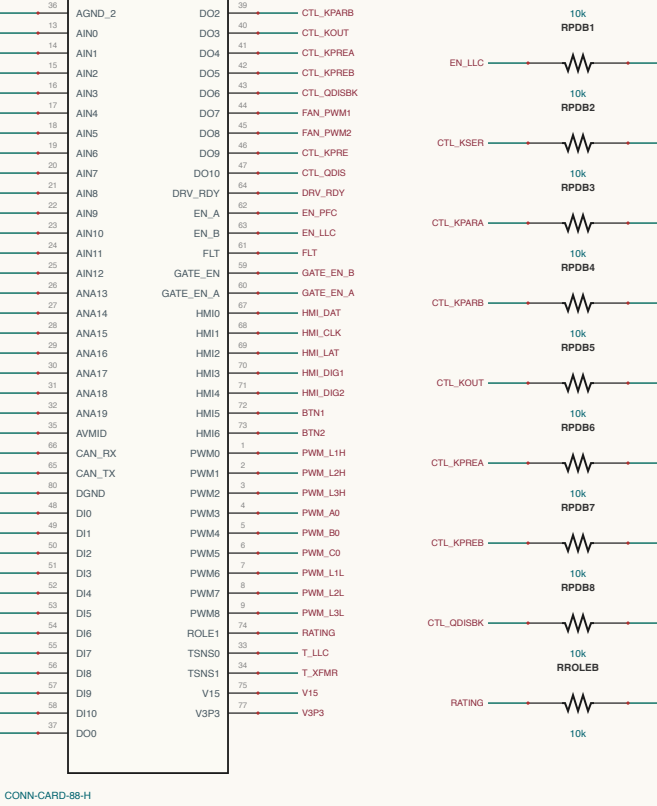


LLC-LESS / BUS-IN

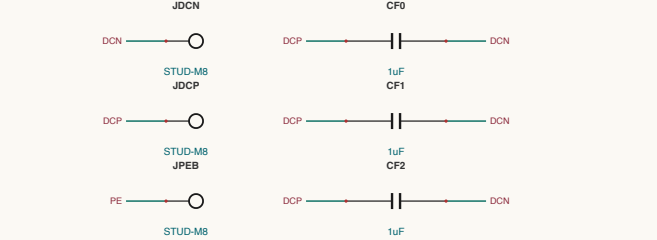


CONTROL / COL-DRIVER

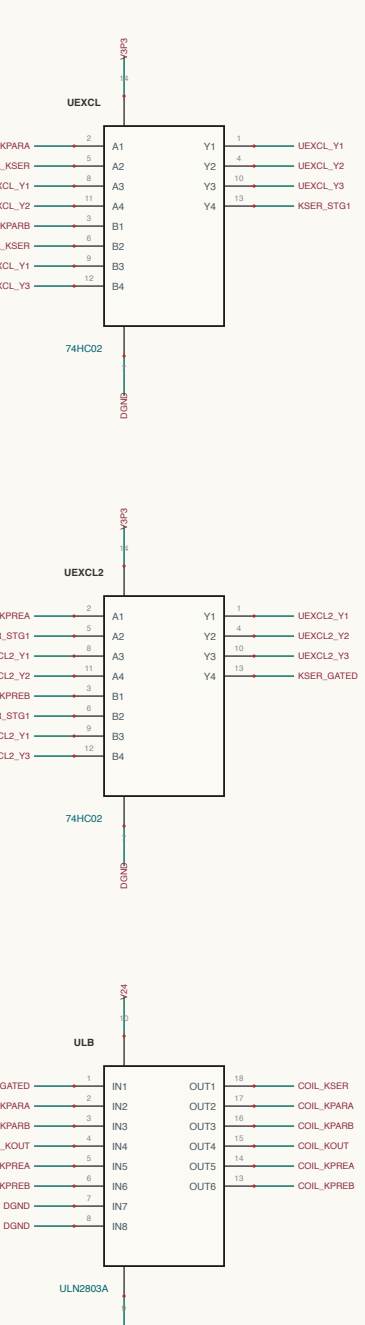


CONTROL / INTERCONNECT

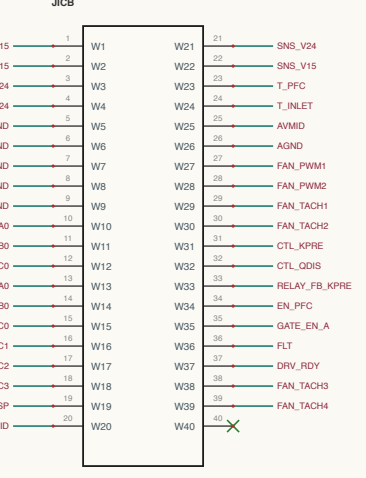


LLC-LESS / LEO-5

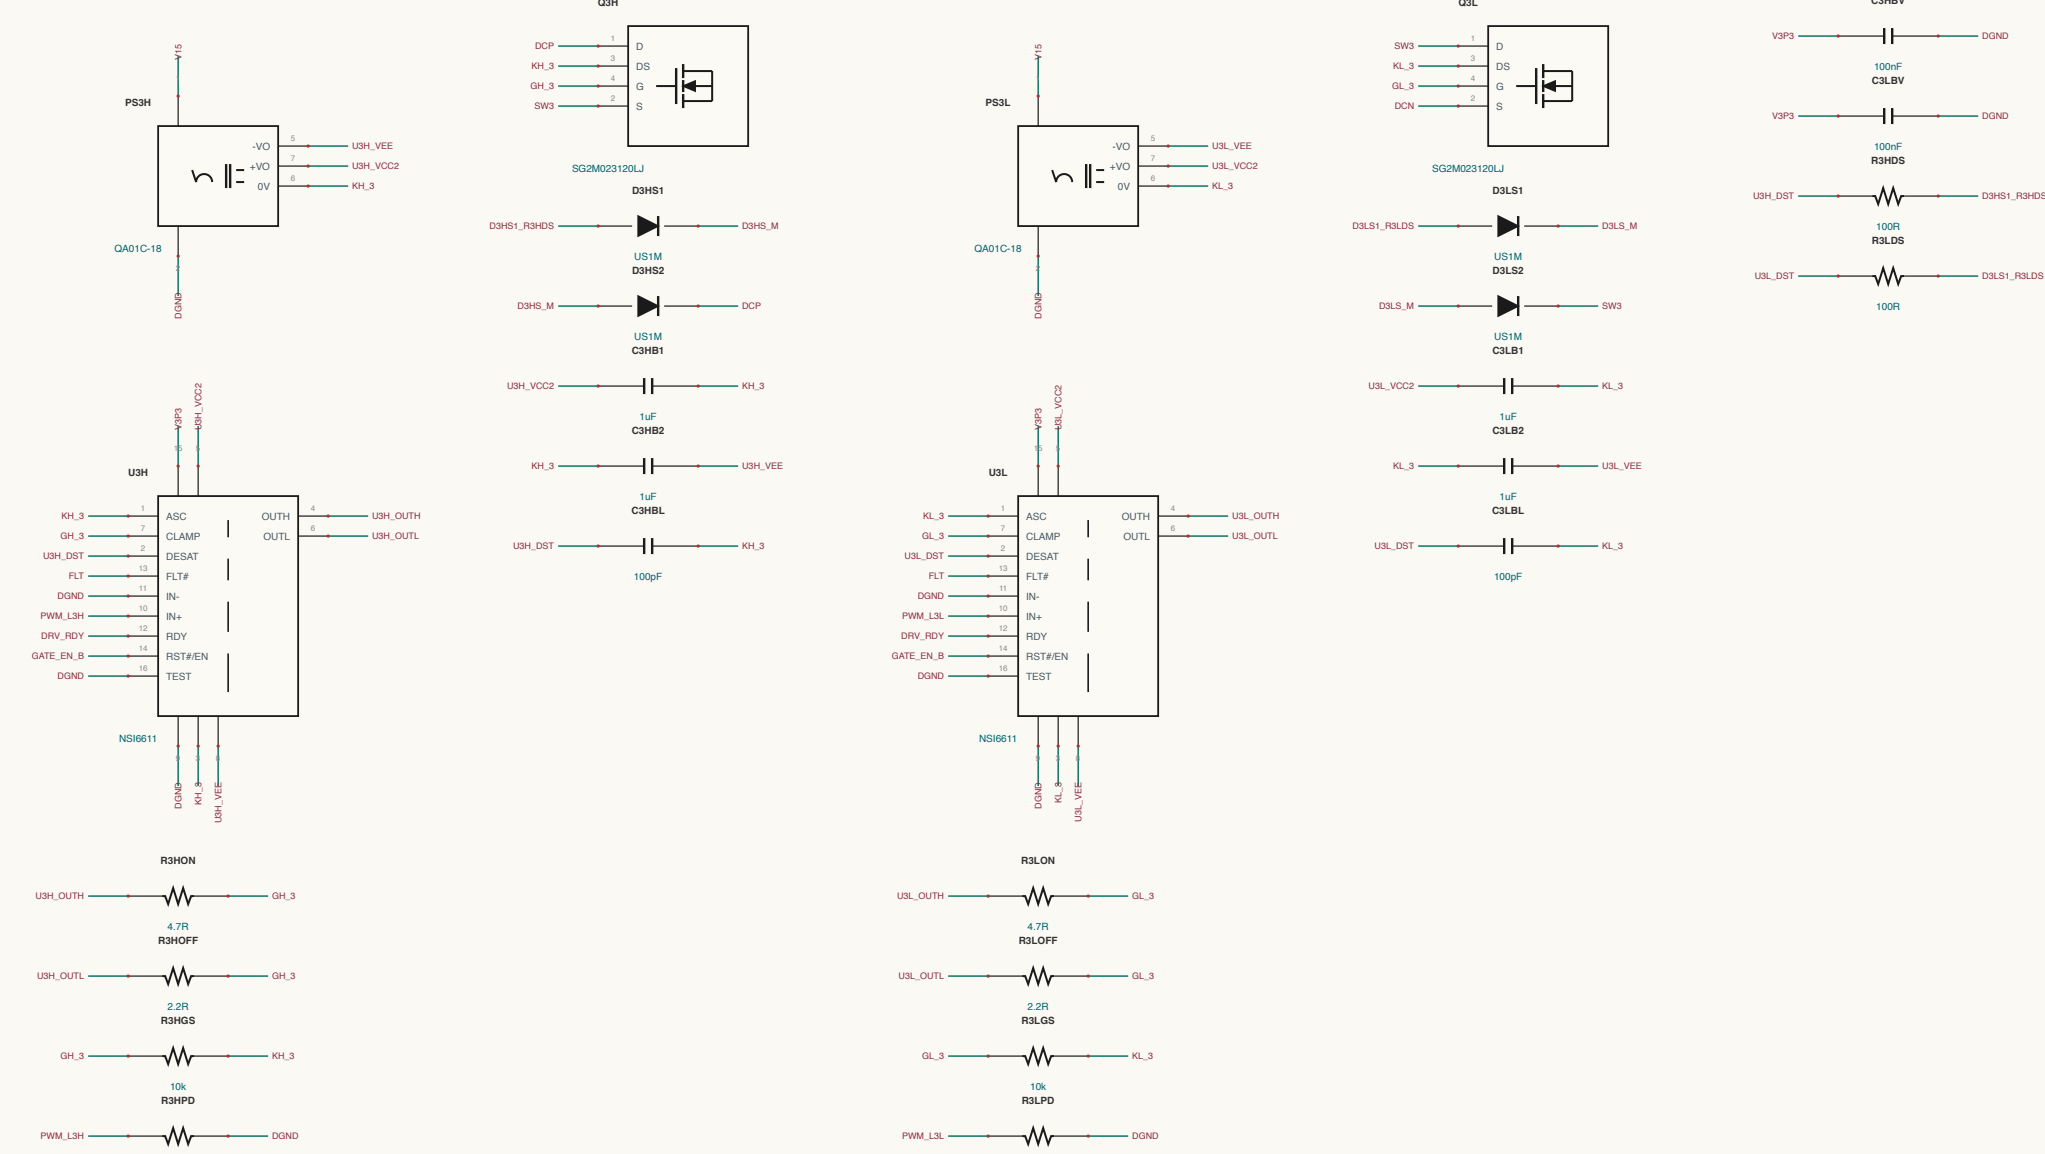


OUTPUT-SENSING / OUTPUT

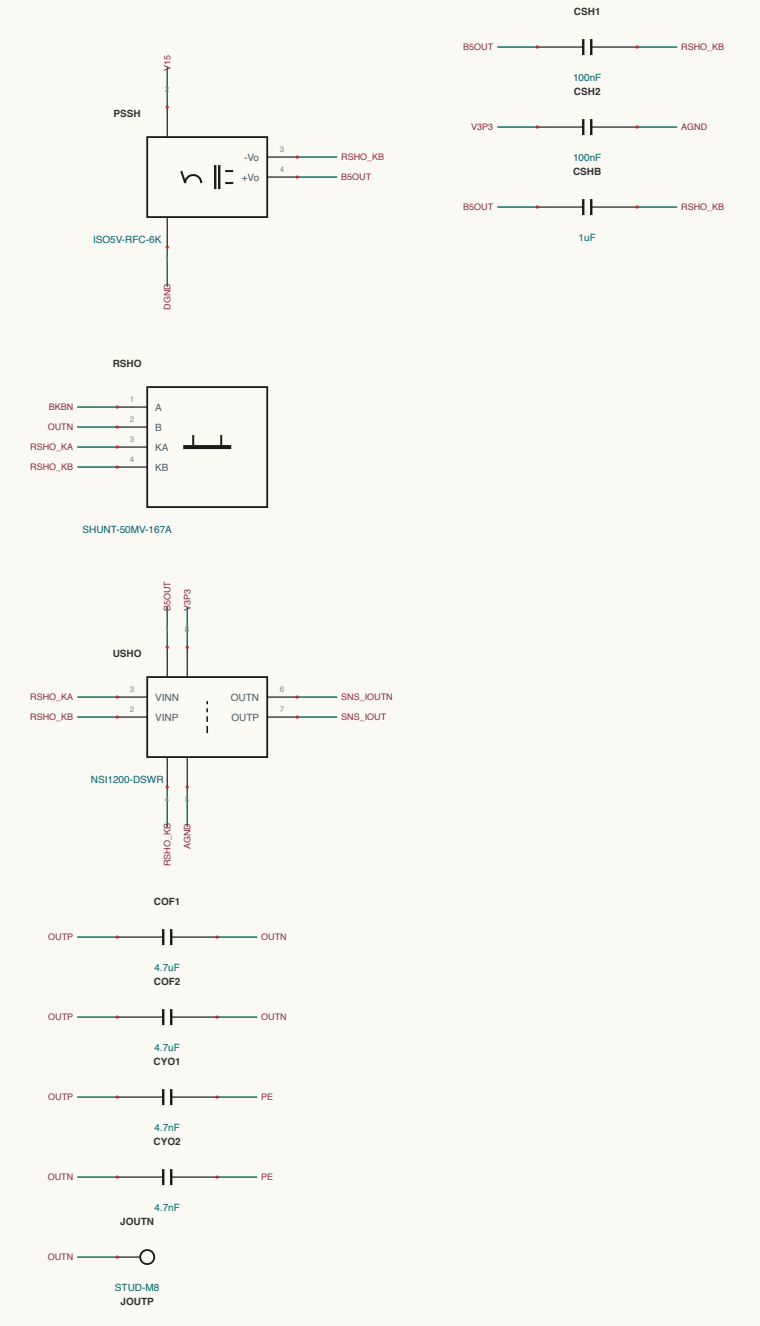


OUTPUT-SENSING / SENSE-VOLTA

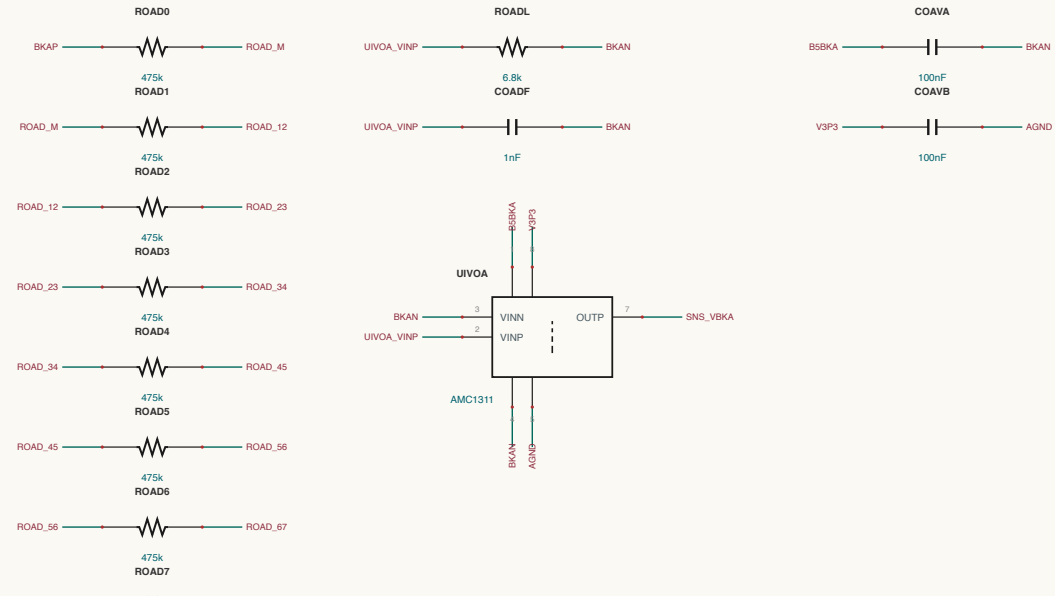

OUTPUT-SENSING / SENSE-VOLTA

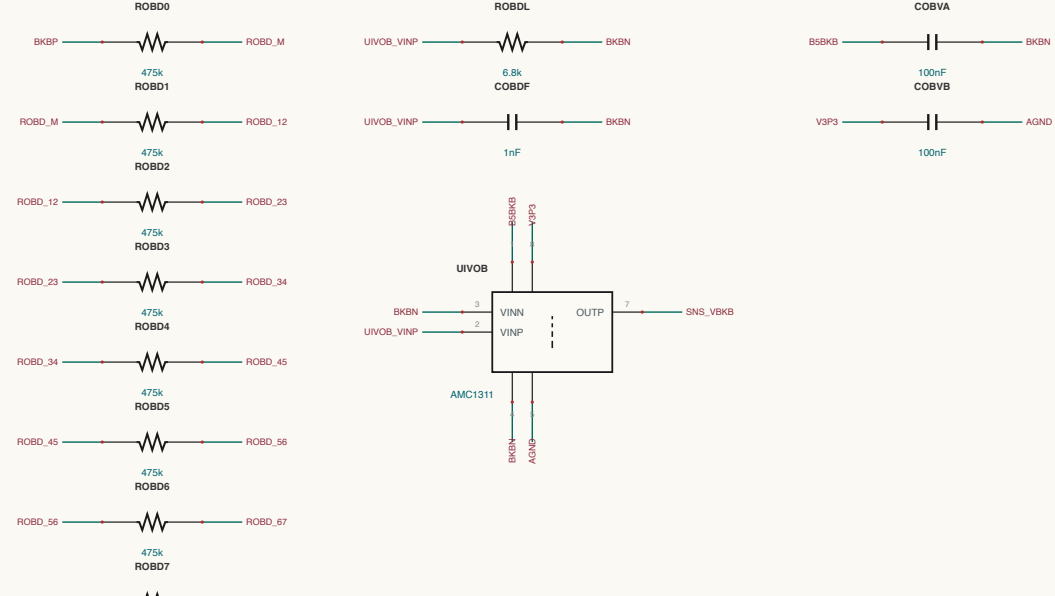

OUTPUT-SENSING / ISO-MAX

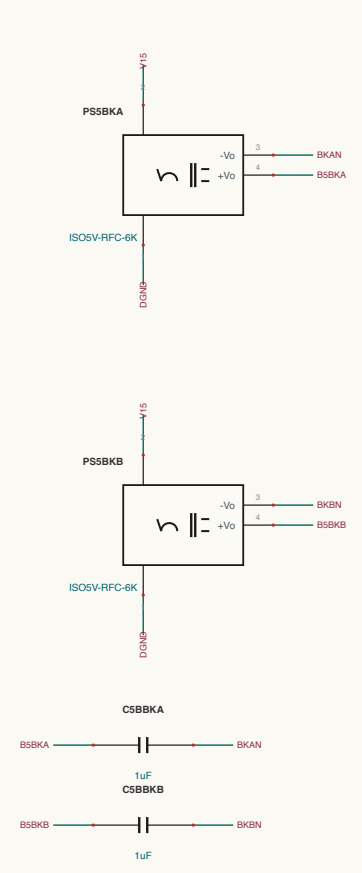

NET NAMING

Internal positions are named for what they say

Location - 4800 mode at that IP pin e.g. 4800A_VMP

Position - 3rd pin of a 4800 pin e.g. 4800A_M

Reference - value for reference resistance e.g. 4800A_1

All others are regular design rules

MAGNETICS CONSTRUCTION

Identify per design rule set (e.g. 4800A_VMP)

500V 1000V 1500V 2000V 2500V 3000V 3500V 4000V 4500V 5000V 5500V 6000V 6500V 7000V 7500V 8000V 8500V 9000V 9500V 10000V

500V 1000V 1500V 2000V 2500V 3000V 3500V 4000V 4500V 5000V 5500V 6000V 6500V 7000V 7500V 8000V 8500V 9000V 9500V 10000V

500V 1000V 1500V 2000V 2500V 3000V 3500V 4000V 4500V 5000V 5500V 6000V 6500V 7000V 7500V 8000V 8500V 9000V 9500V 10000V

500V 1000V 1500V 2000V 2500V 3000V 3500V 4000V 4500V 5000V 5500V 6000V 6500V 7000V 7500V 8000V 8500V 9000V 9500V 10000V