
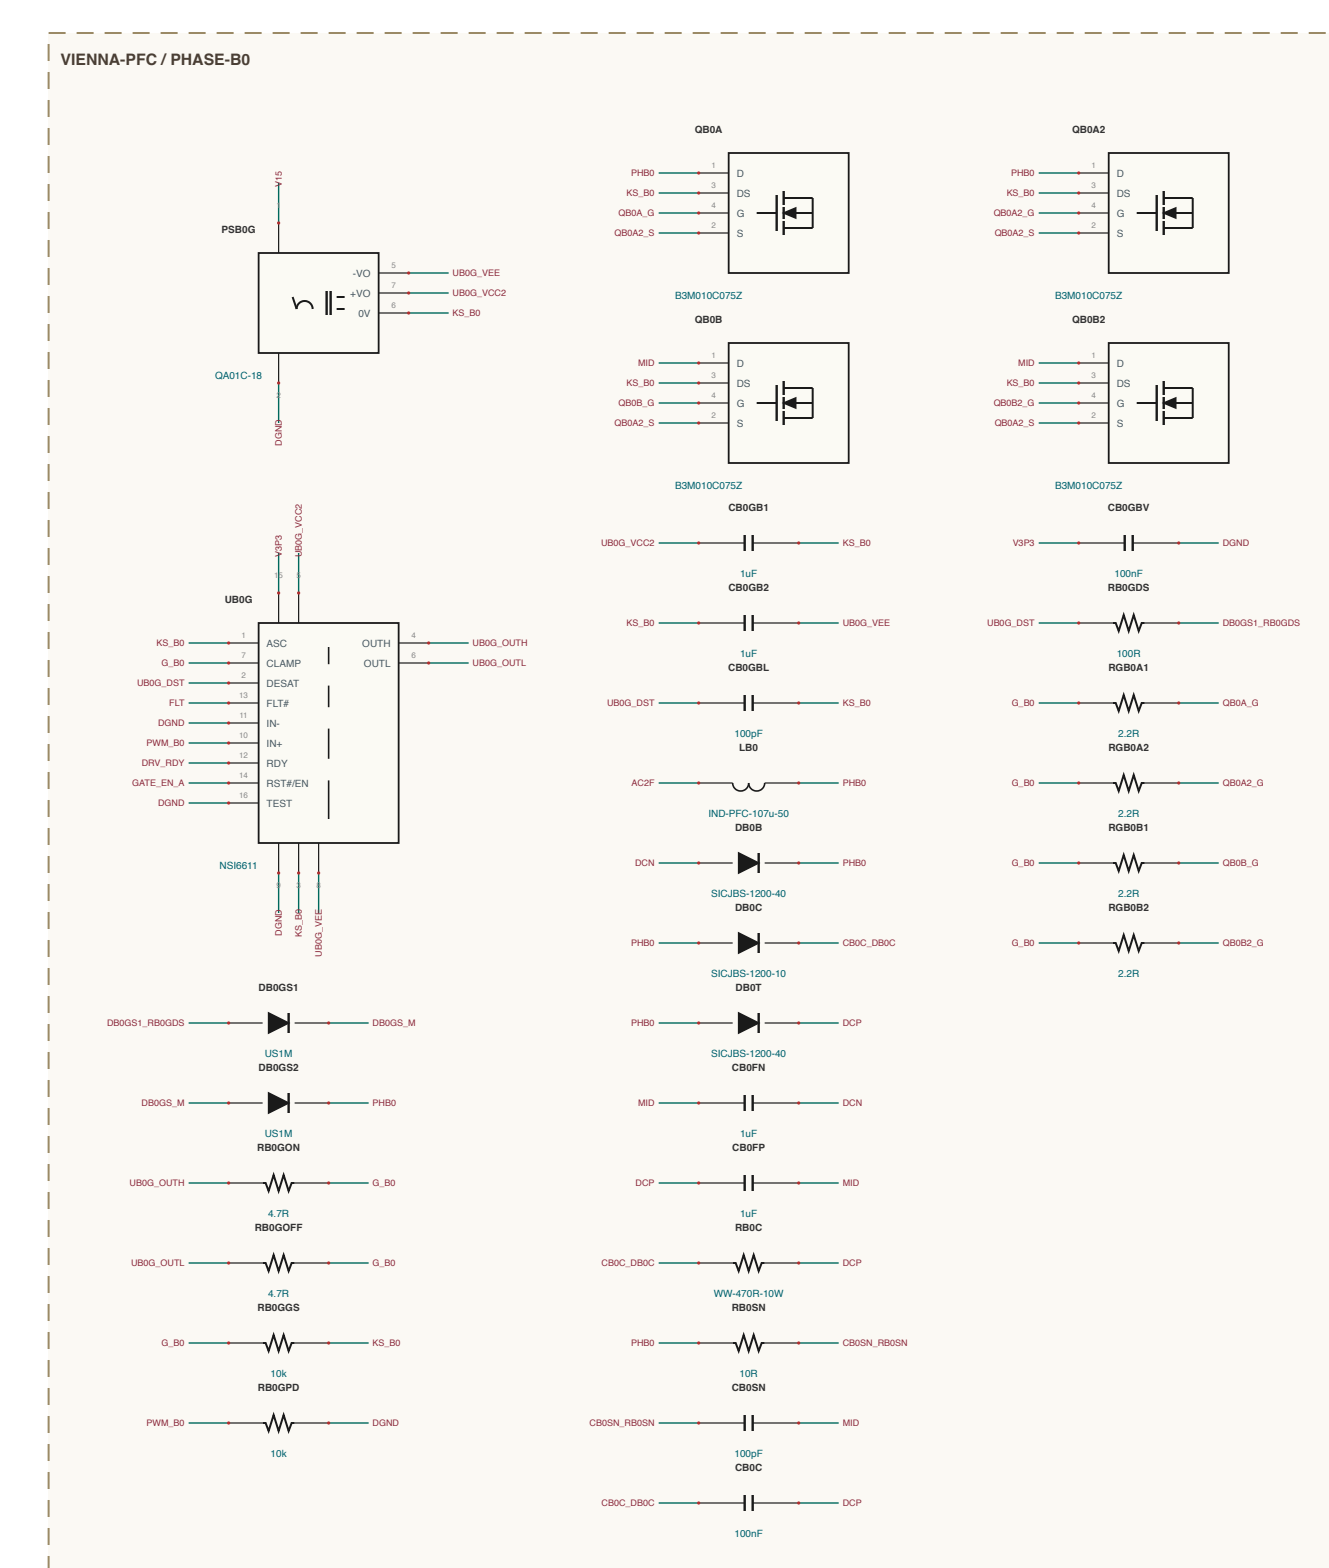
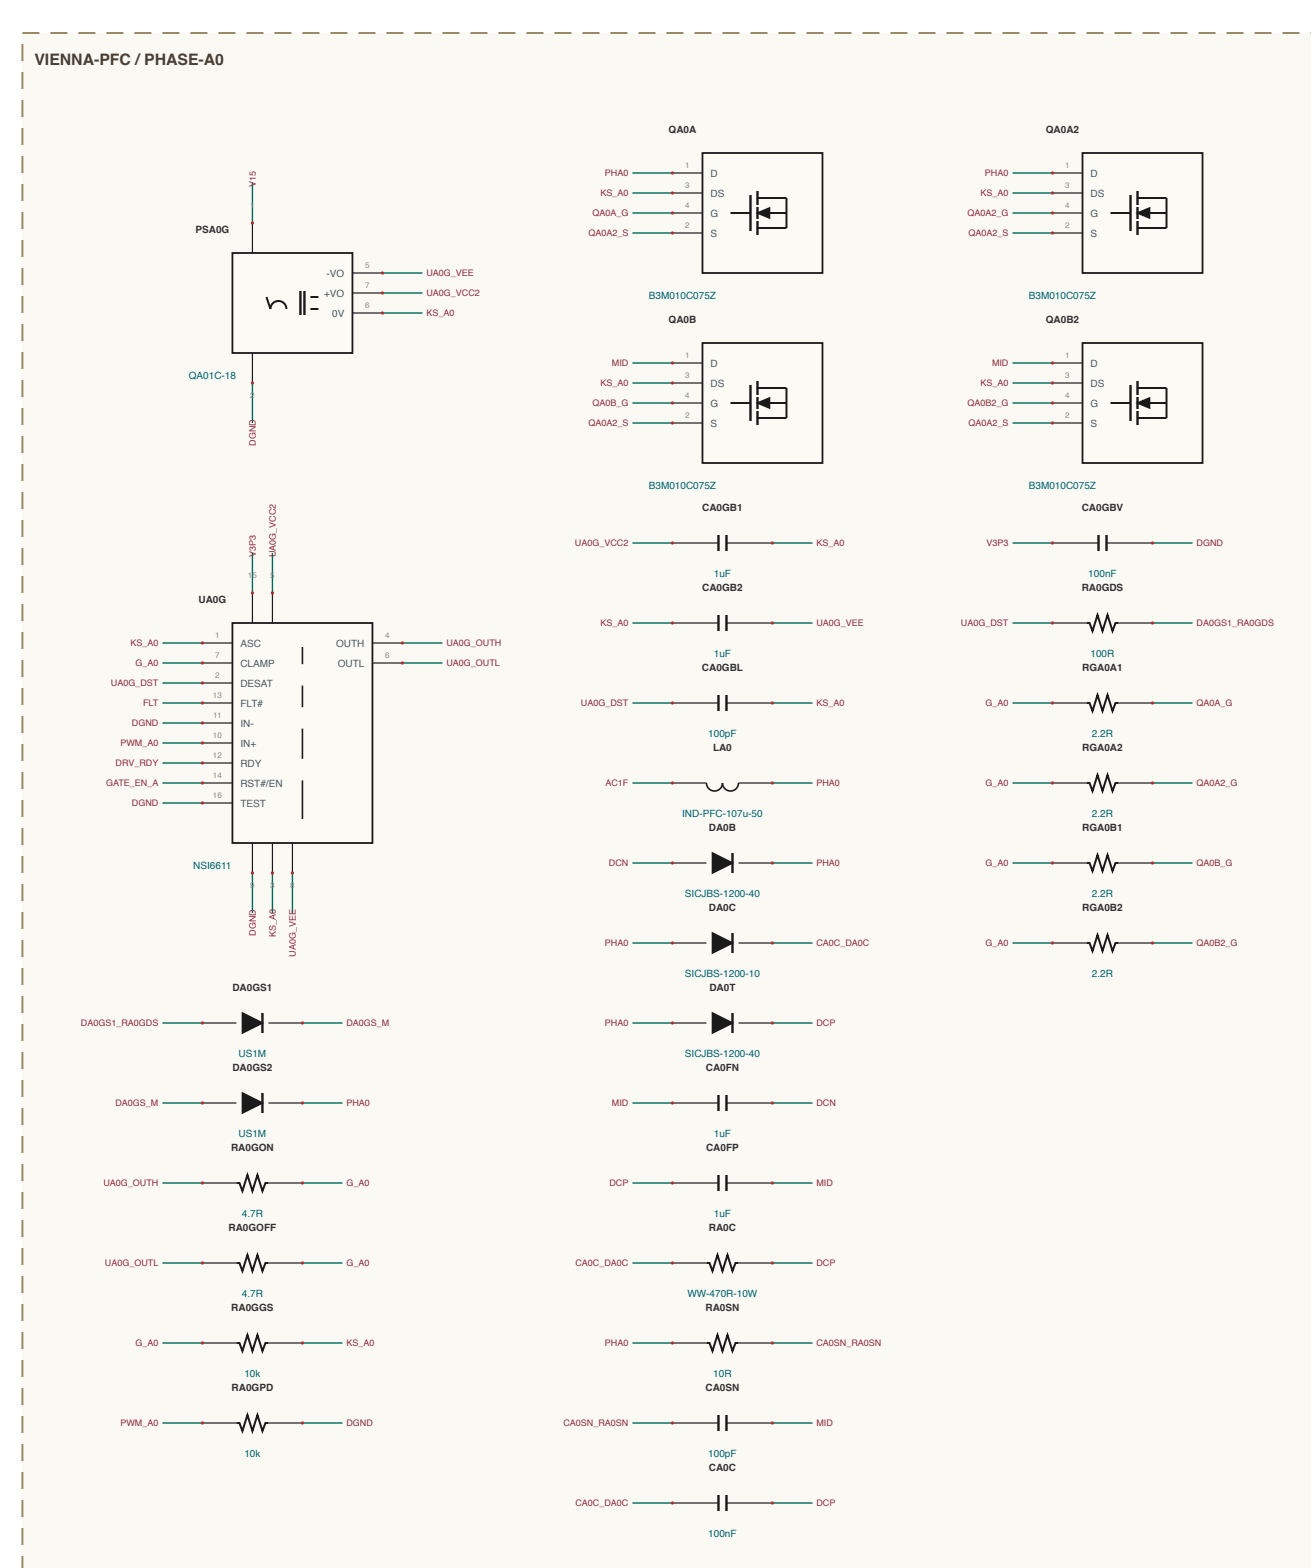
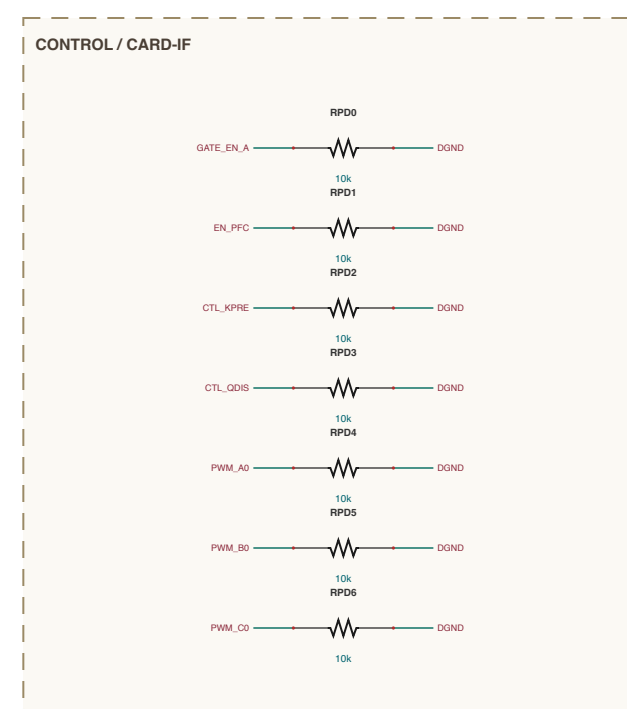
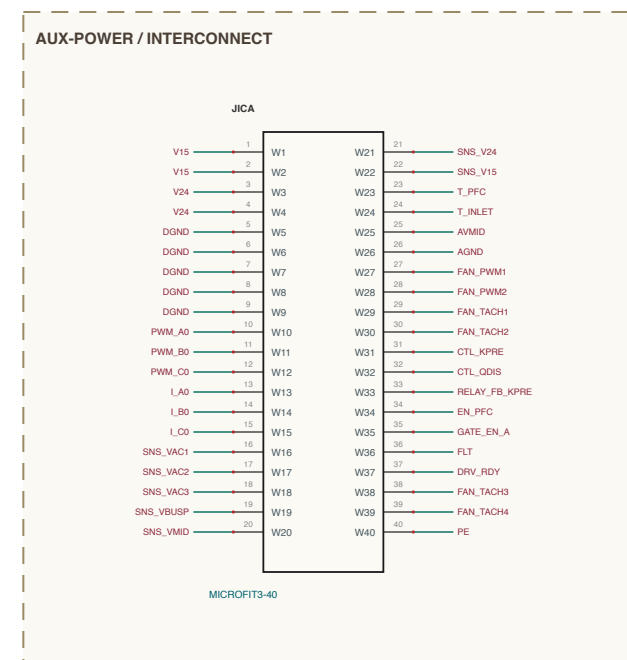
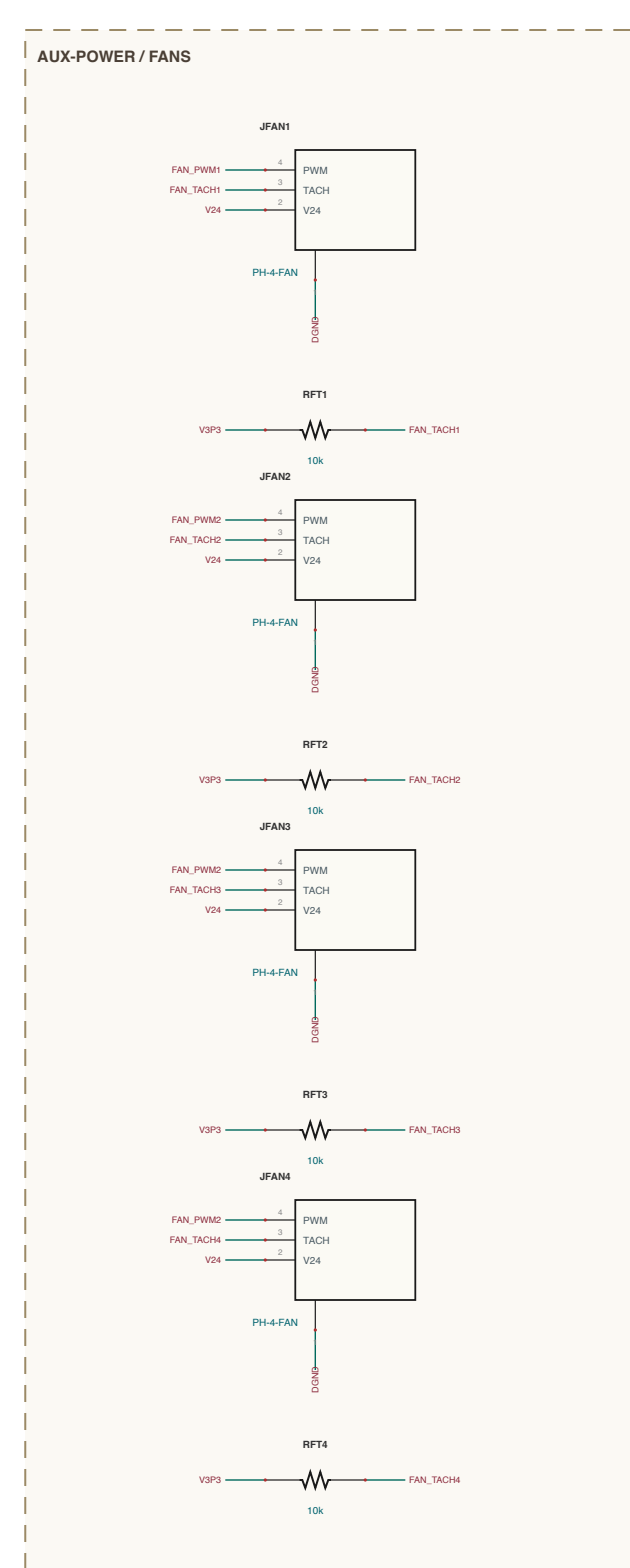
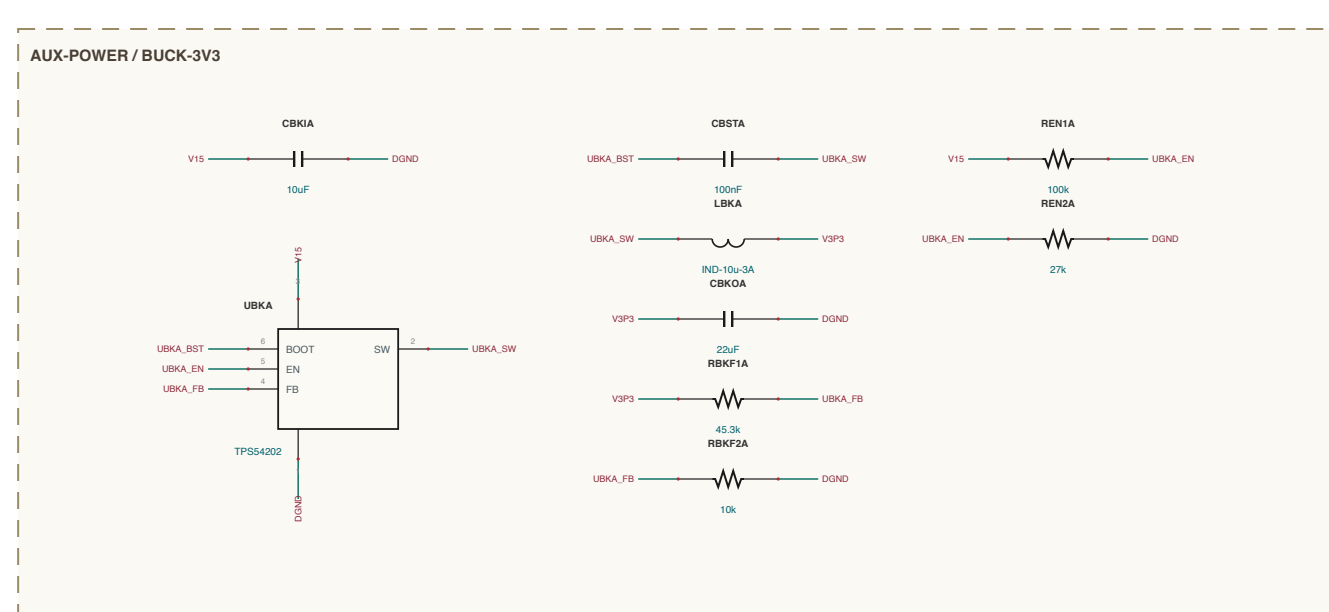
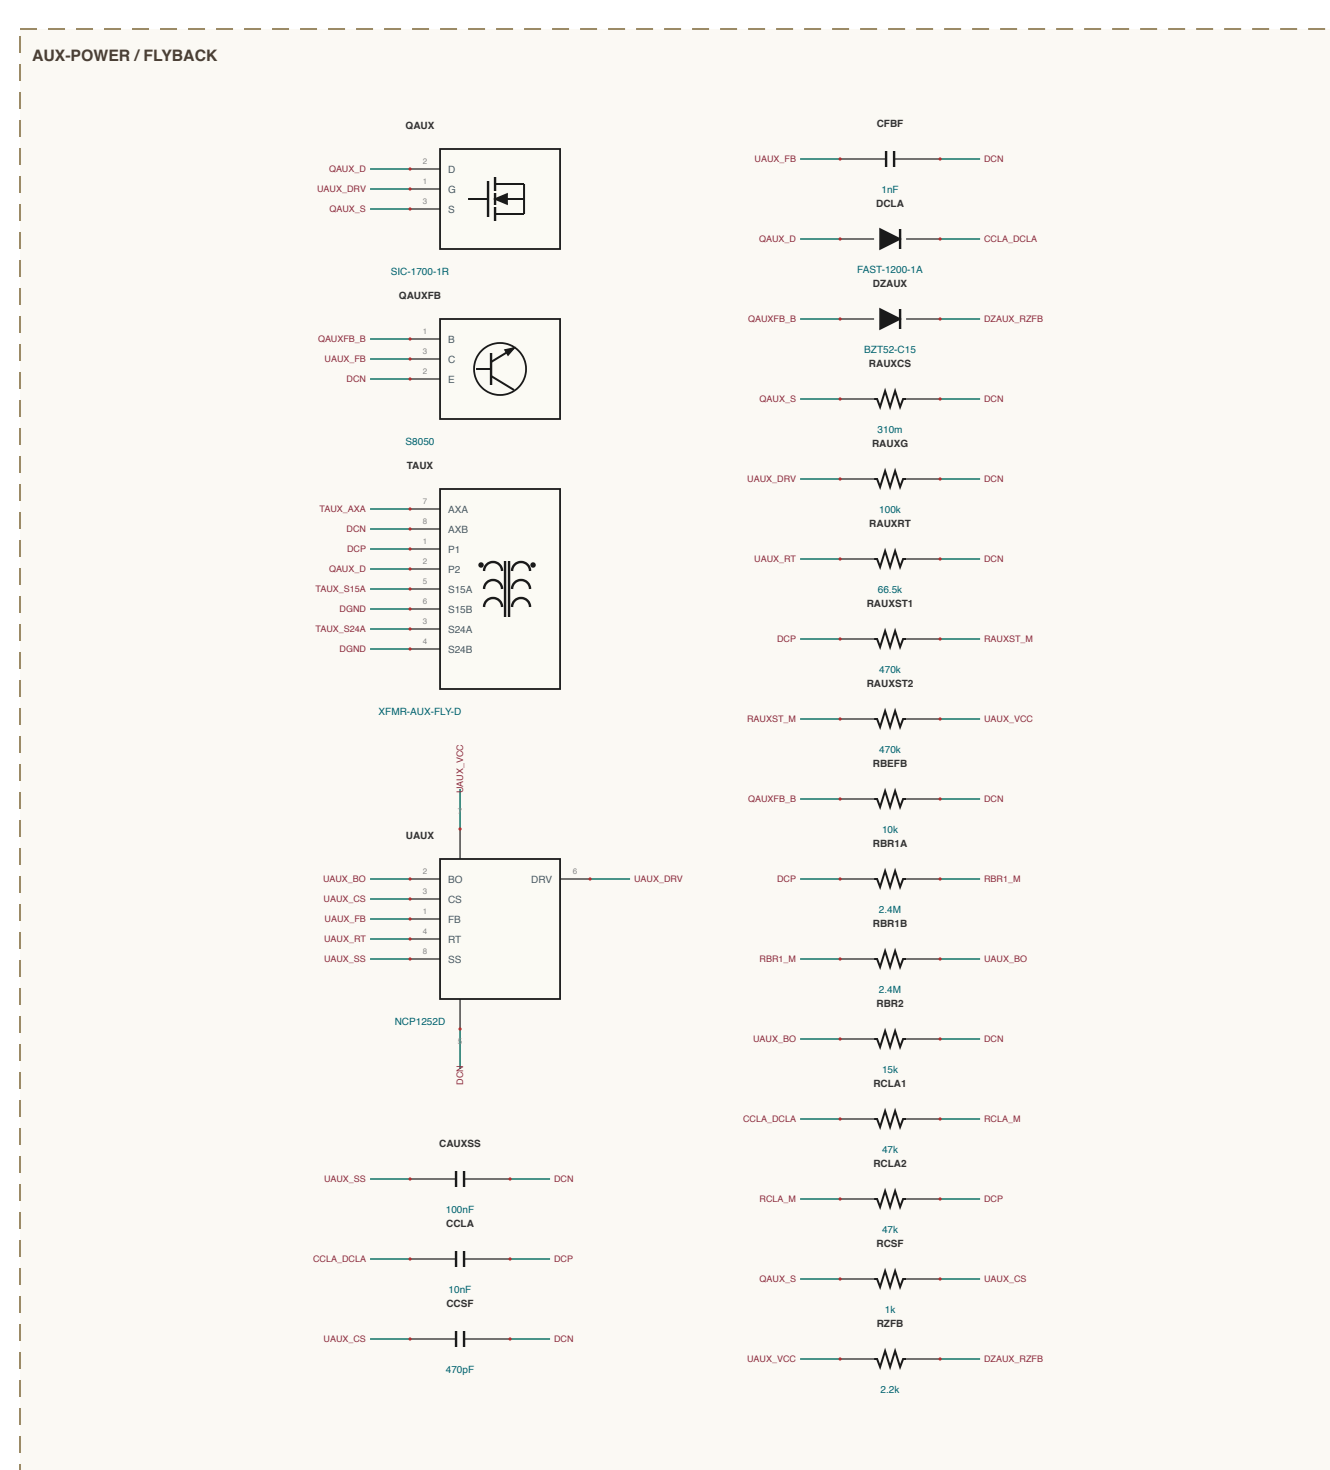
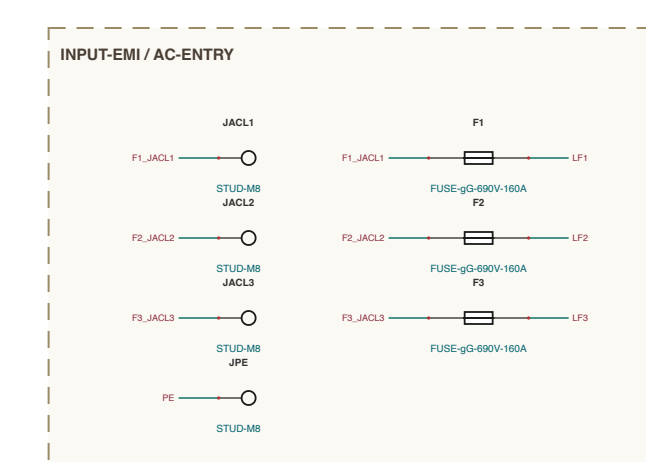
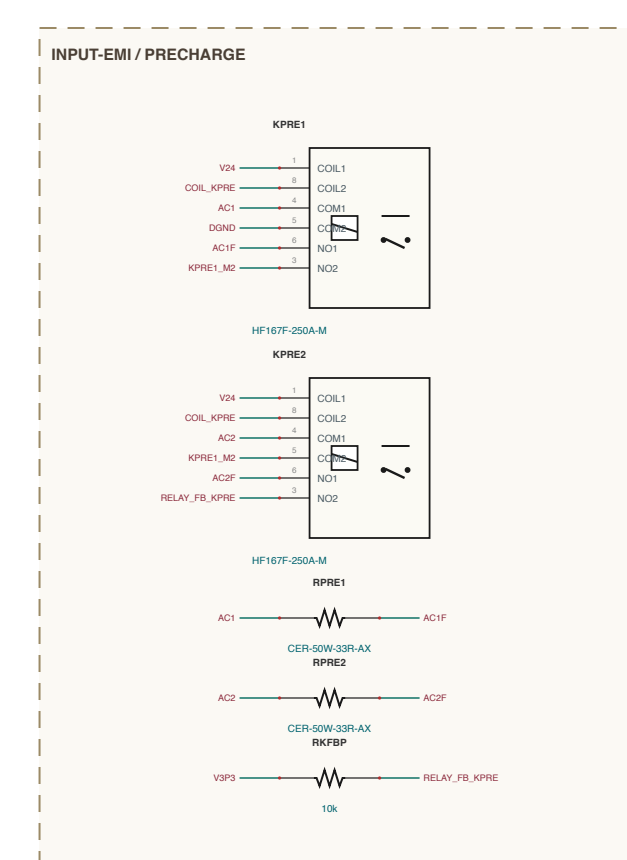
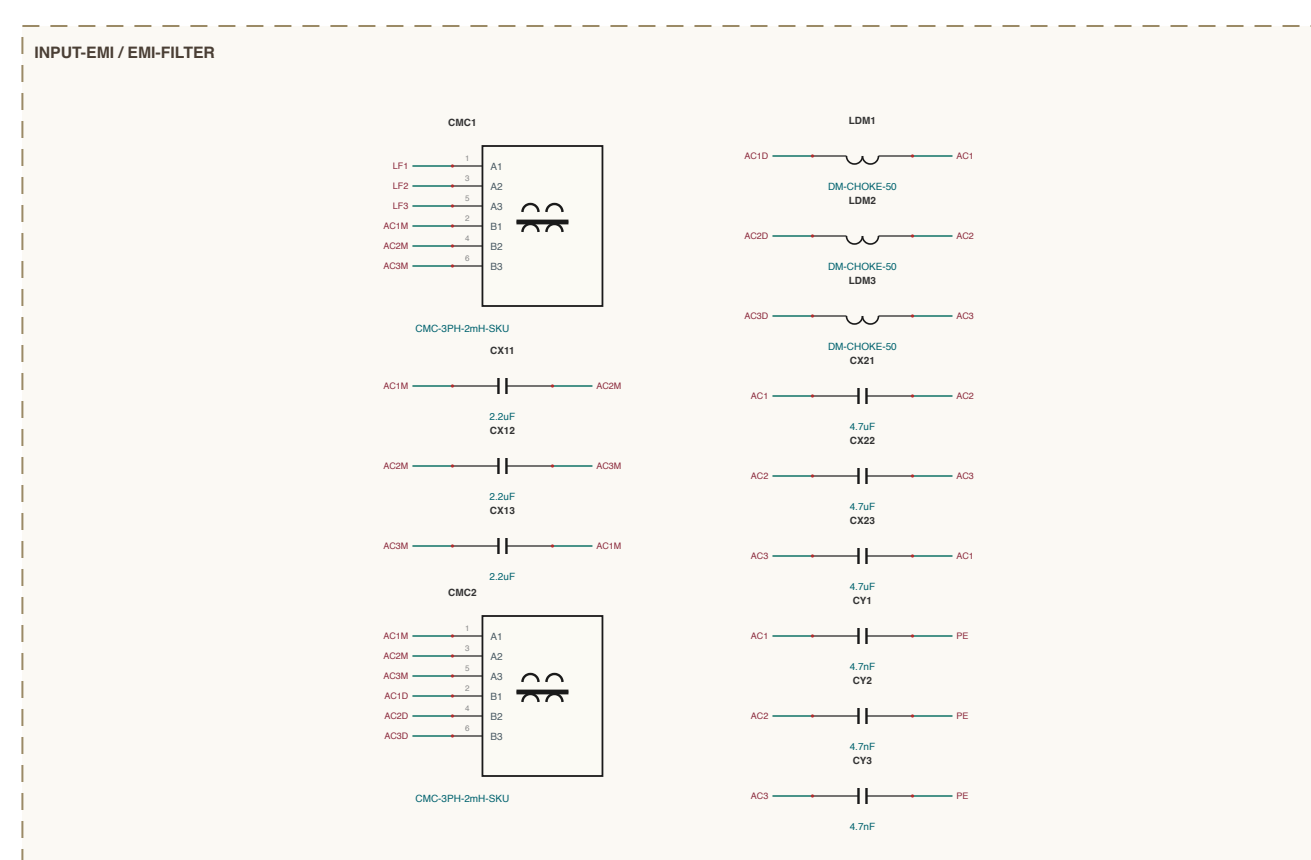
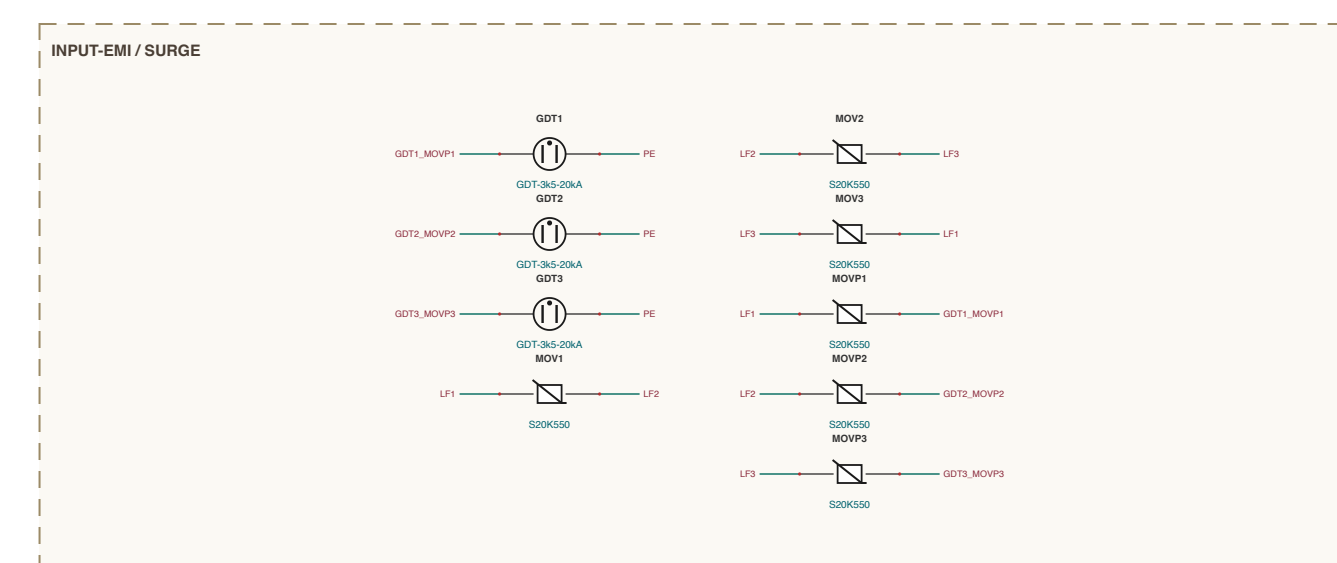
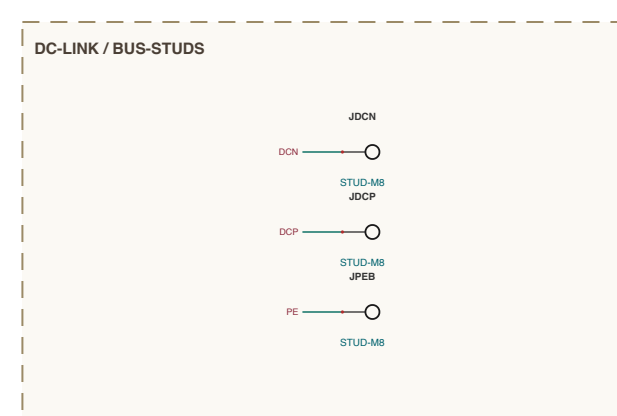
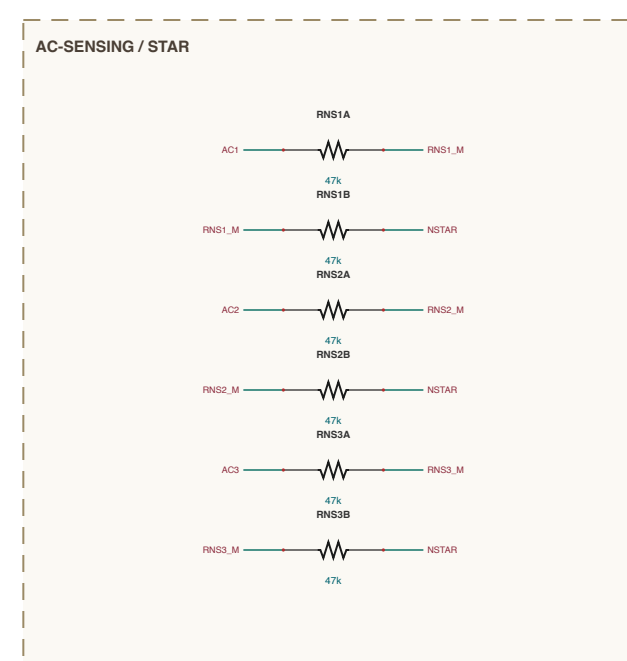
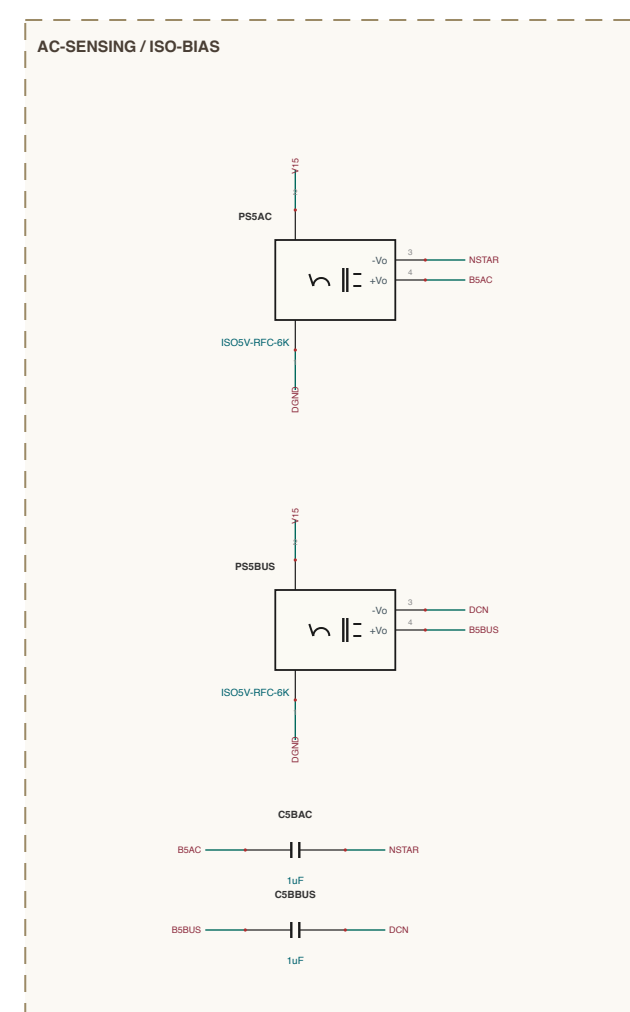
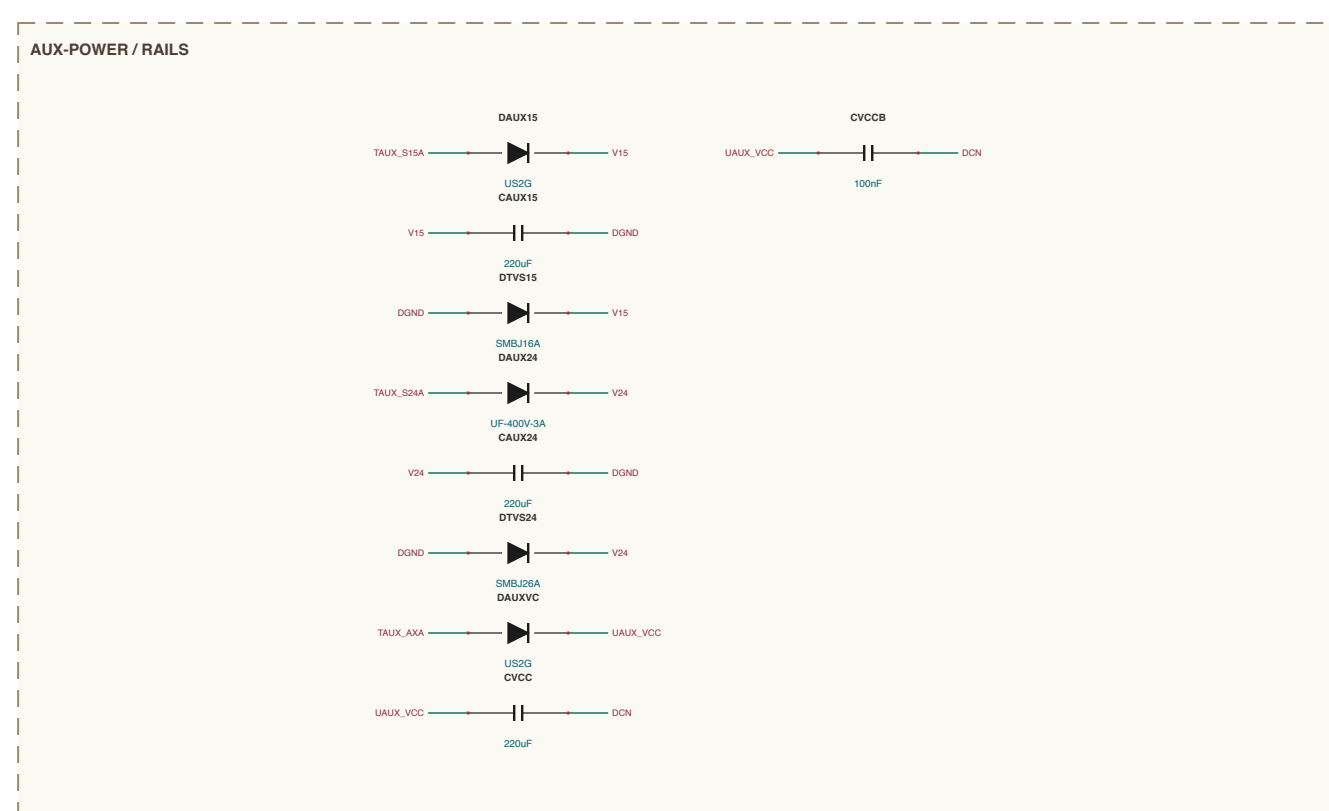
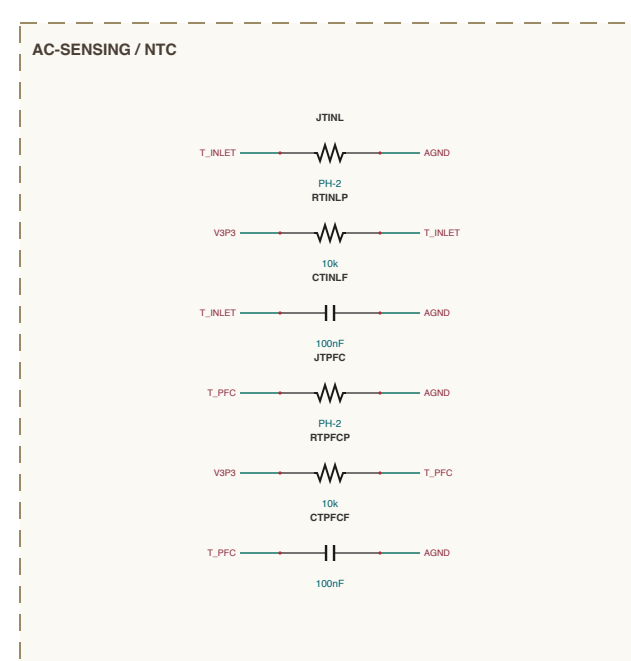
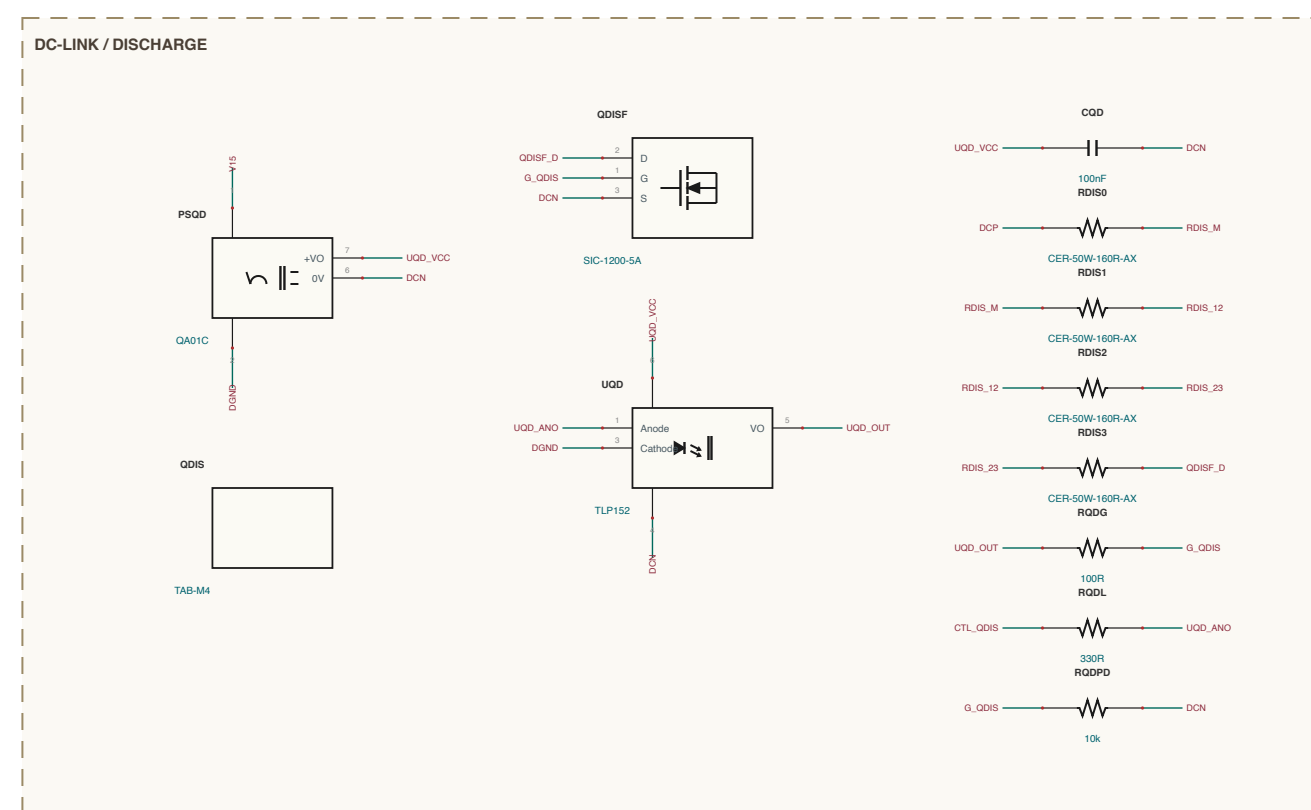
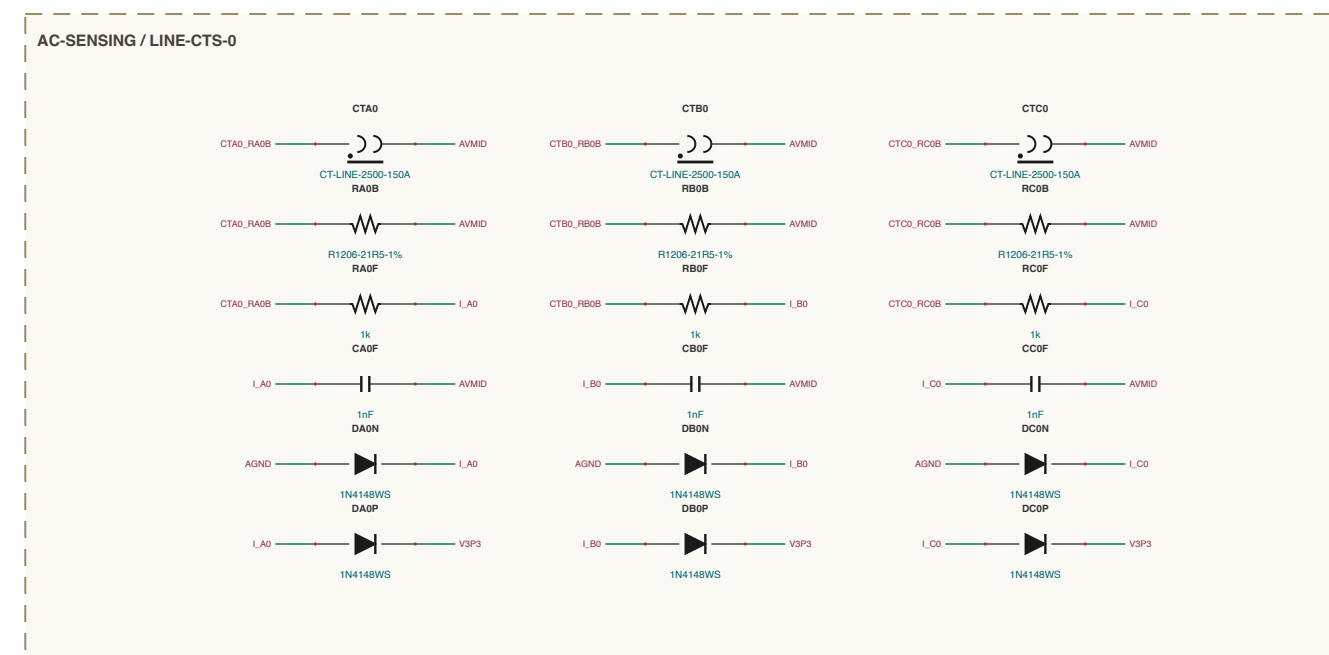
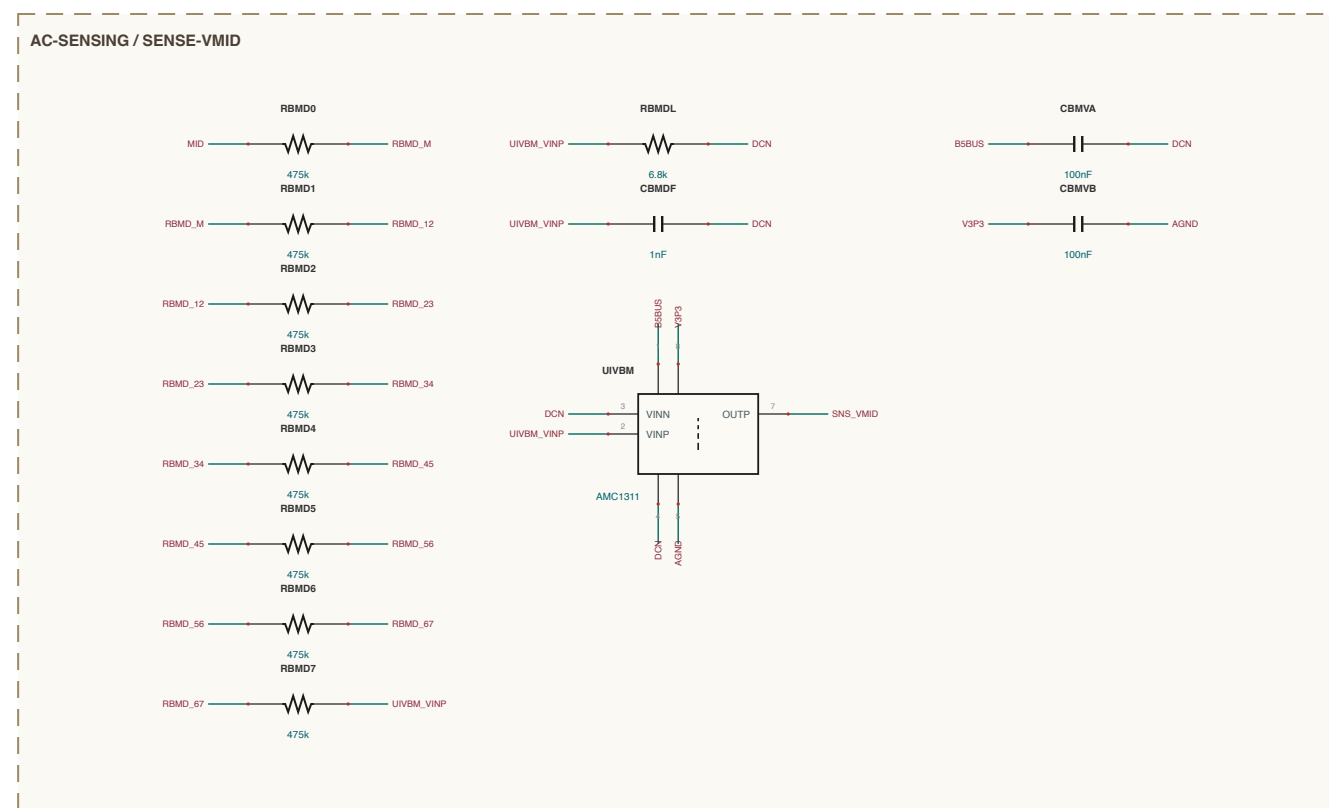
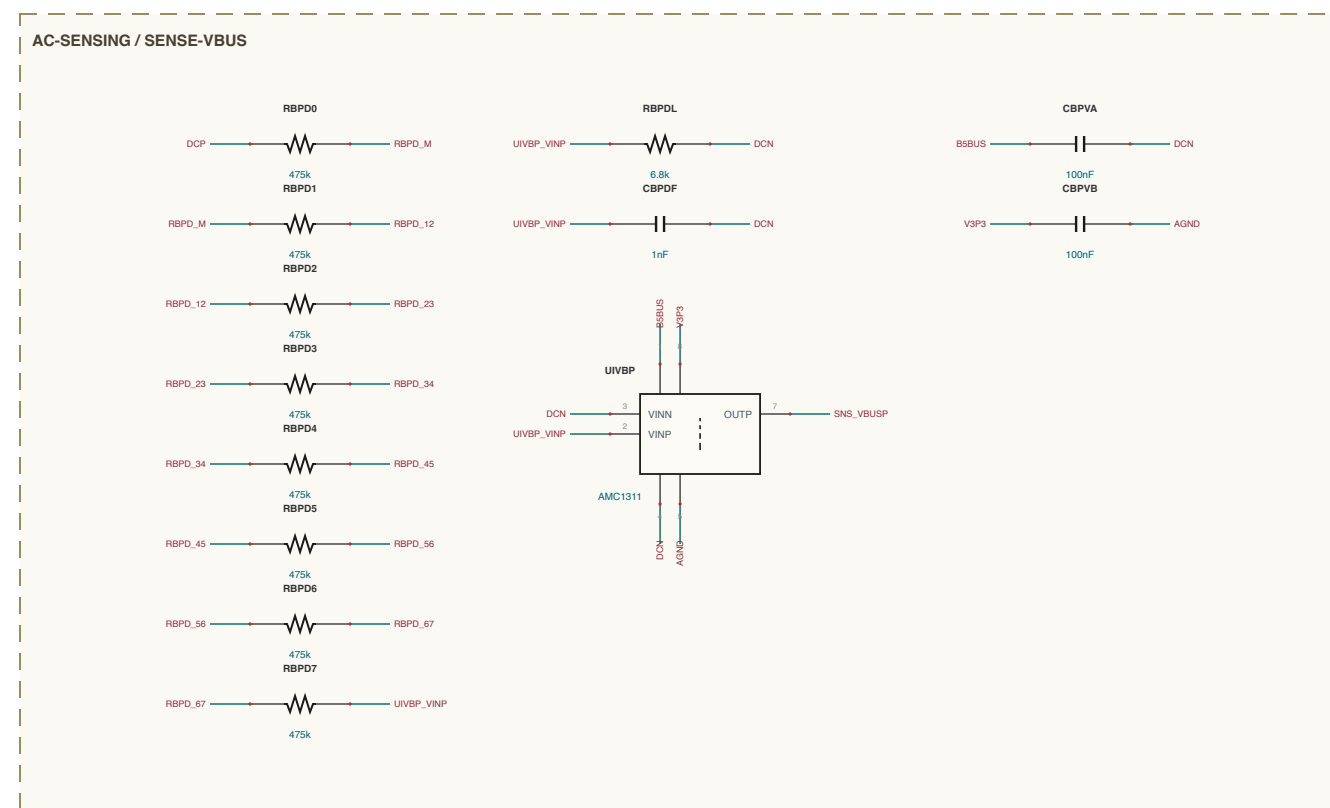
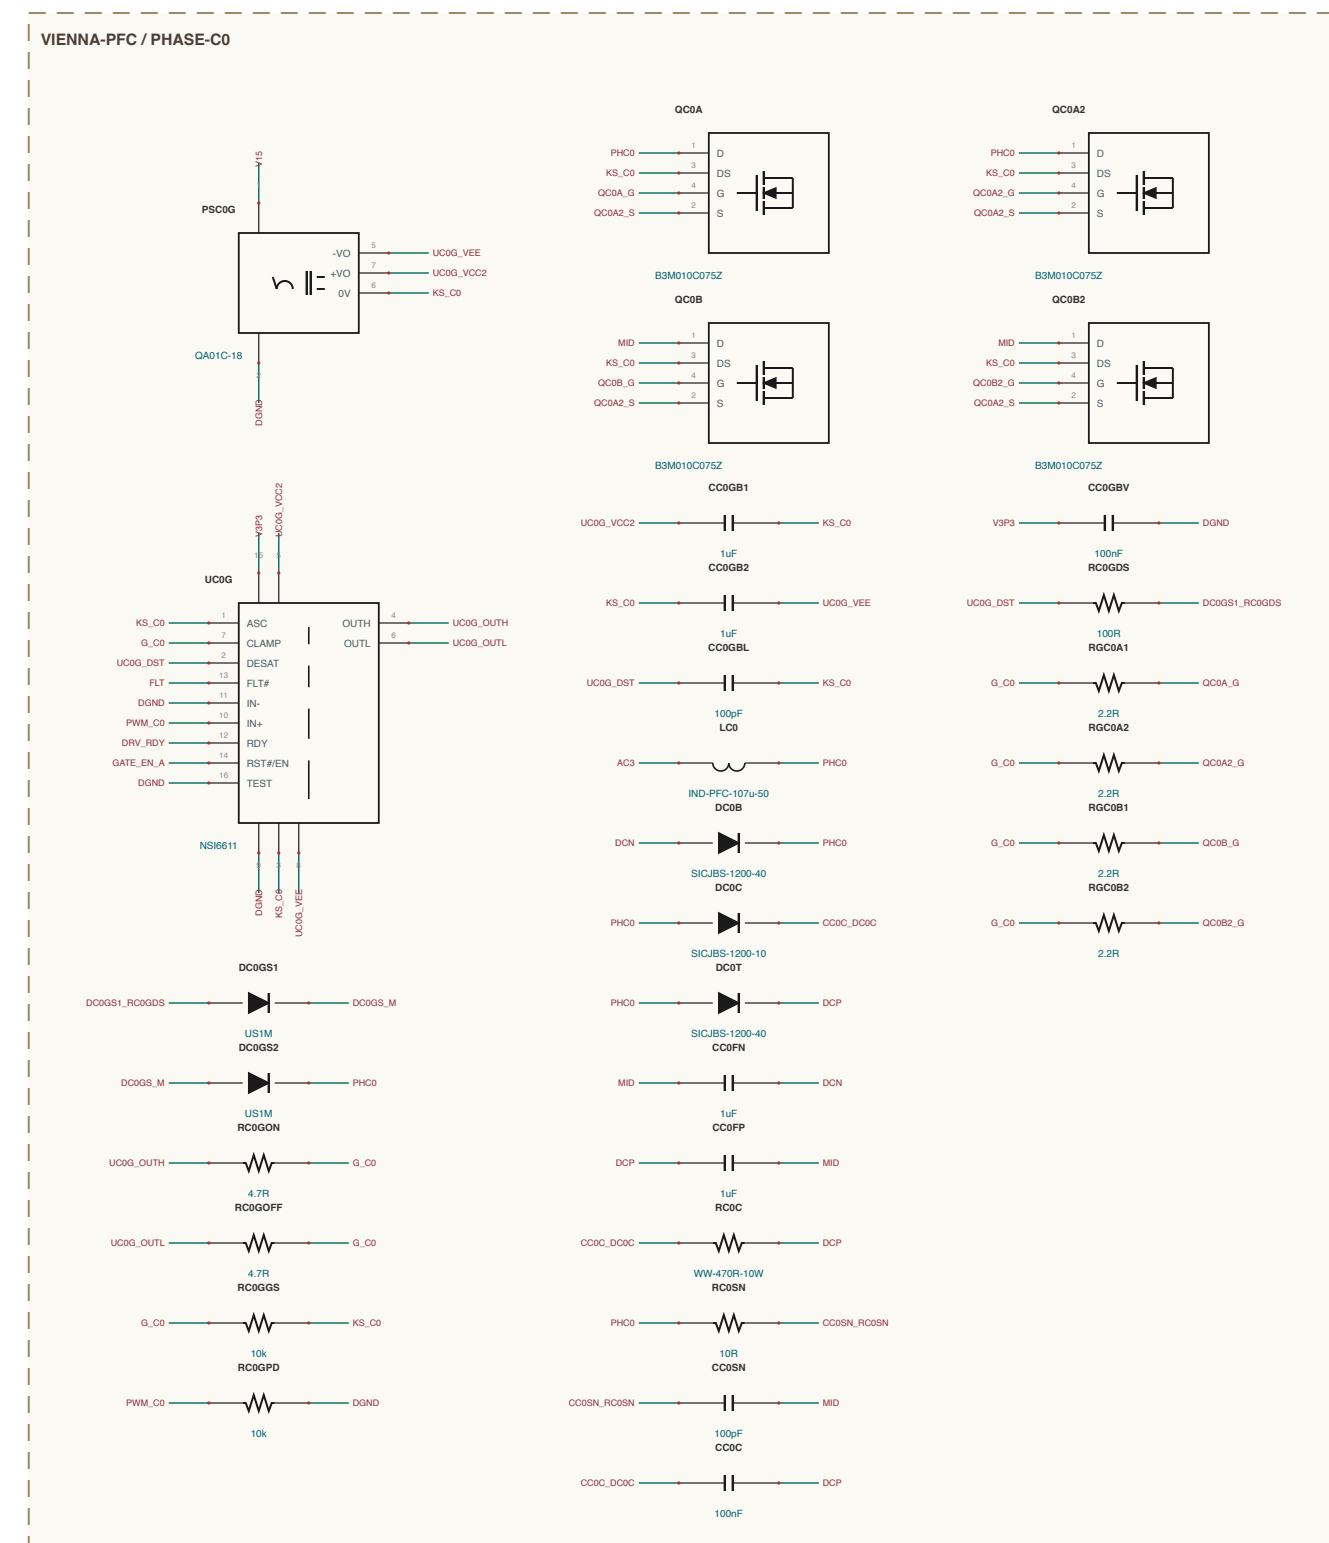
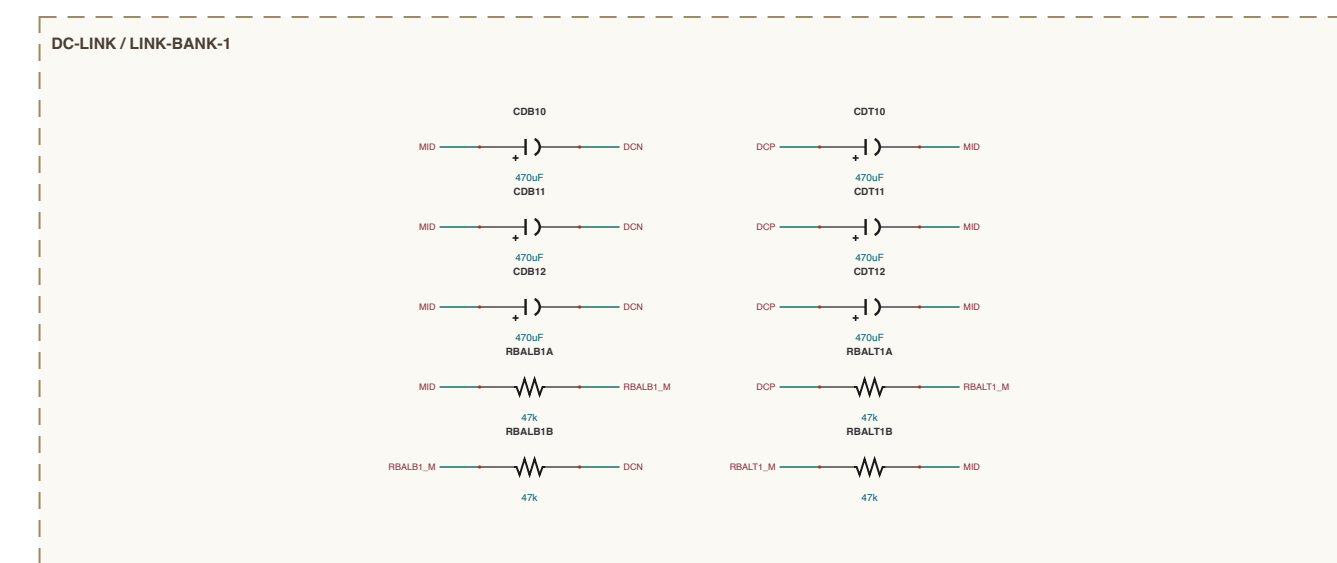
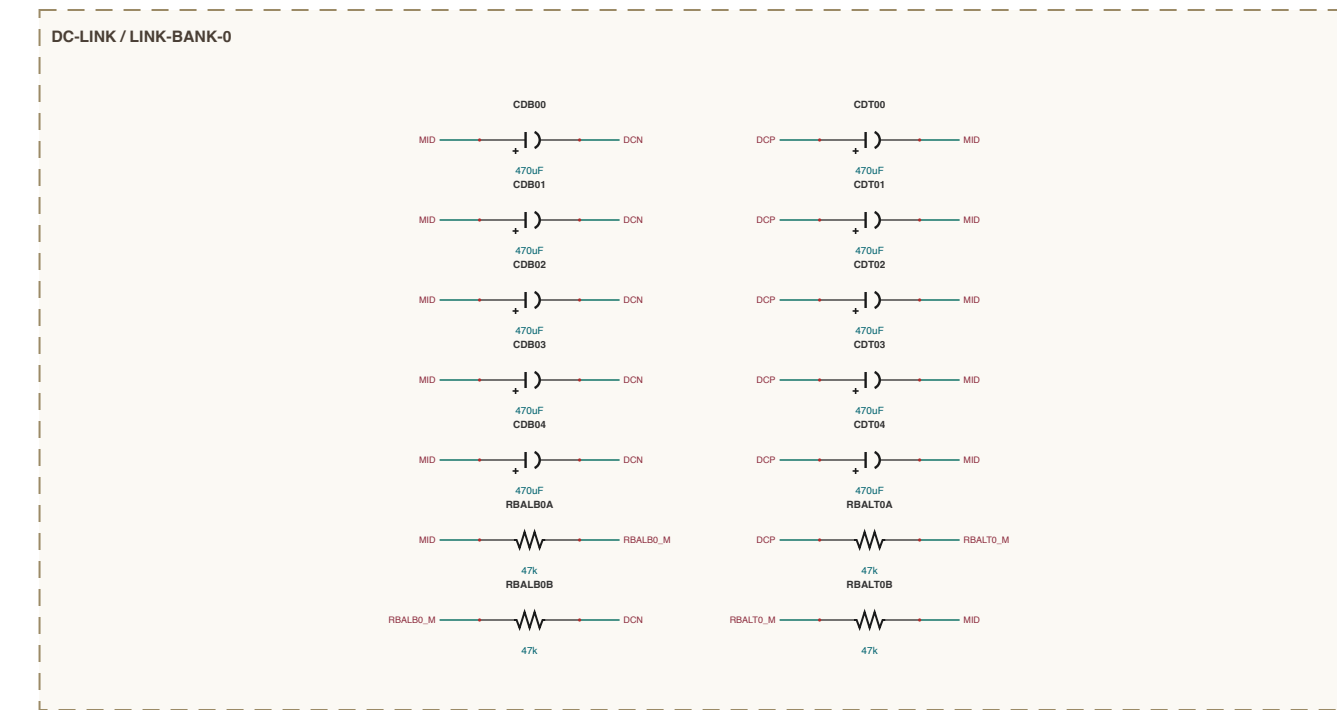
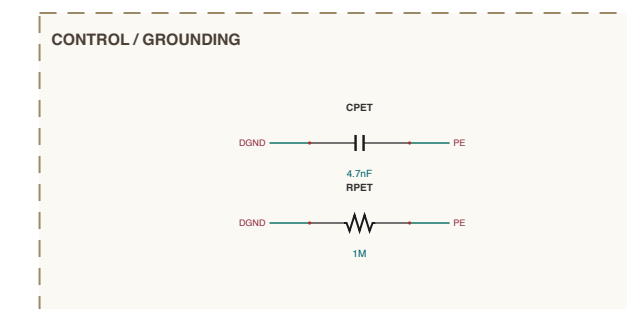
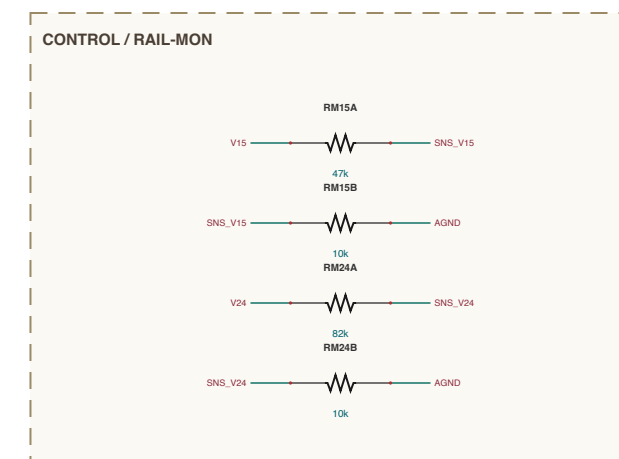
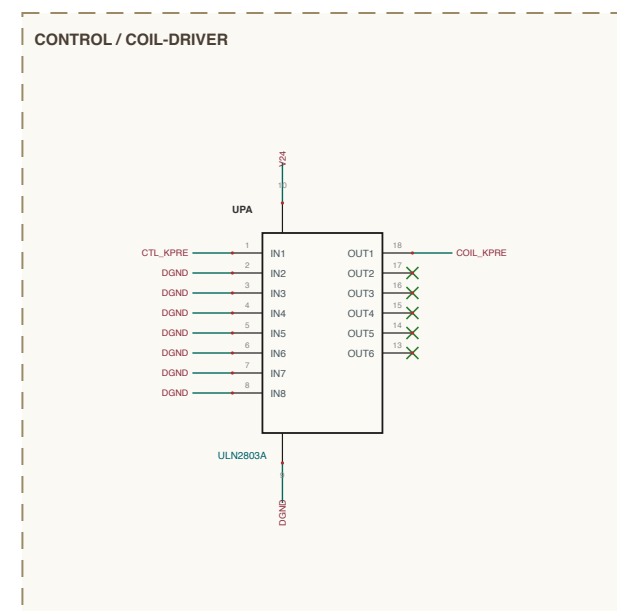
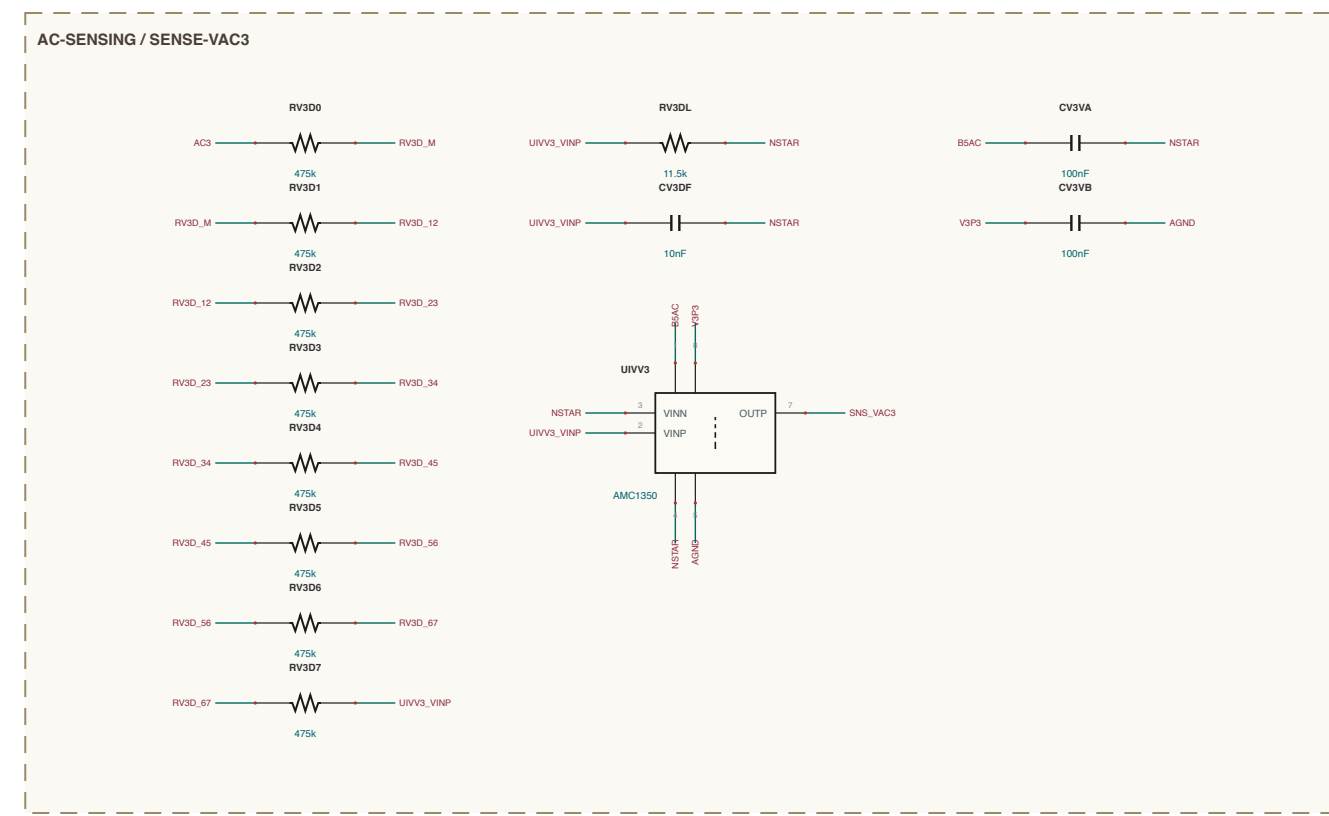
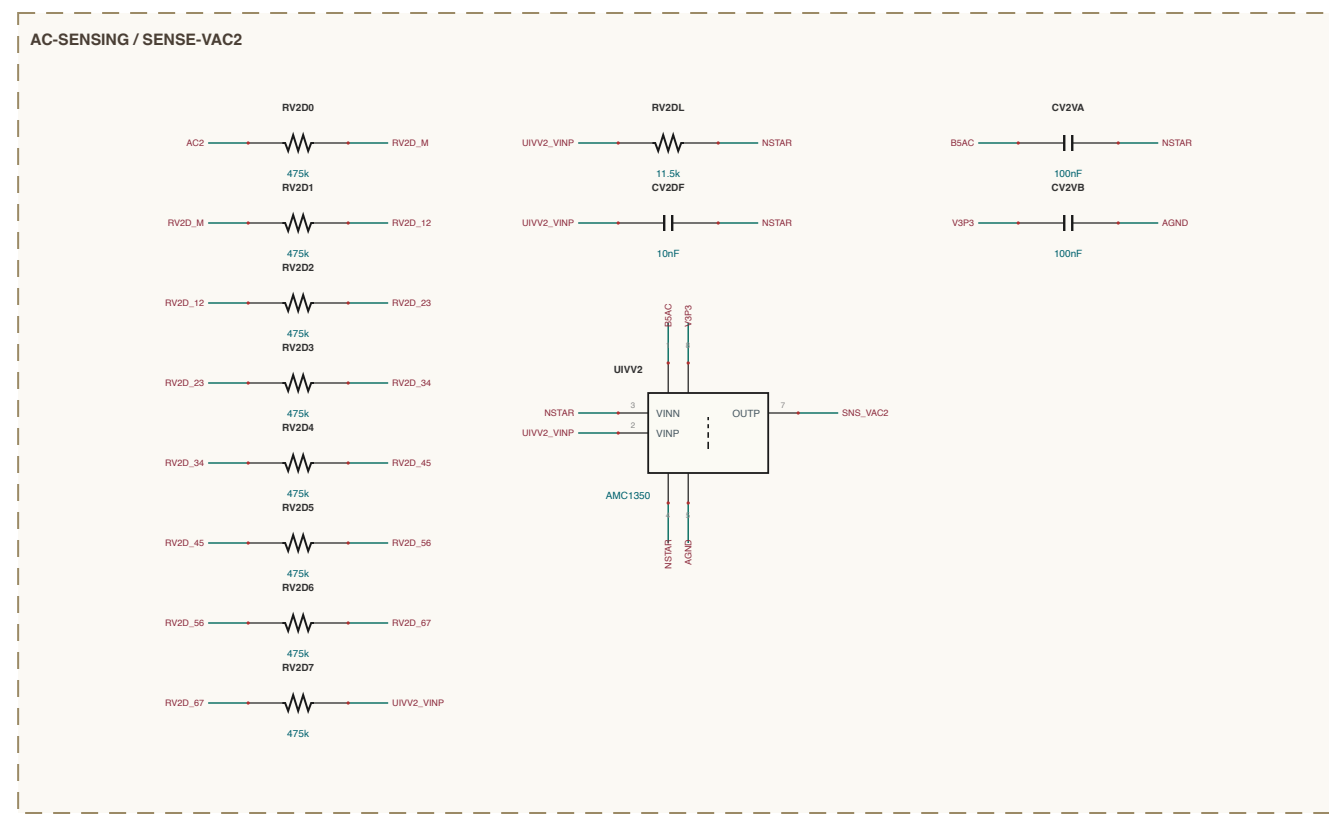


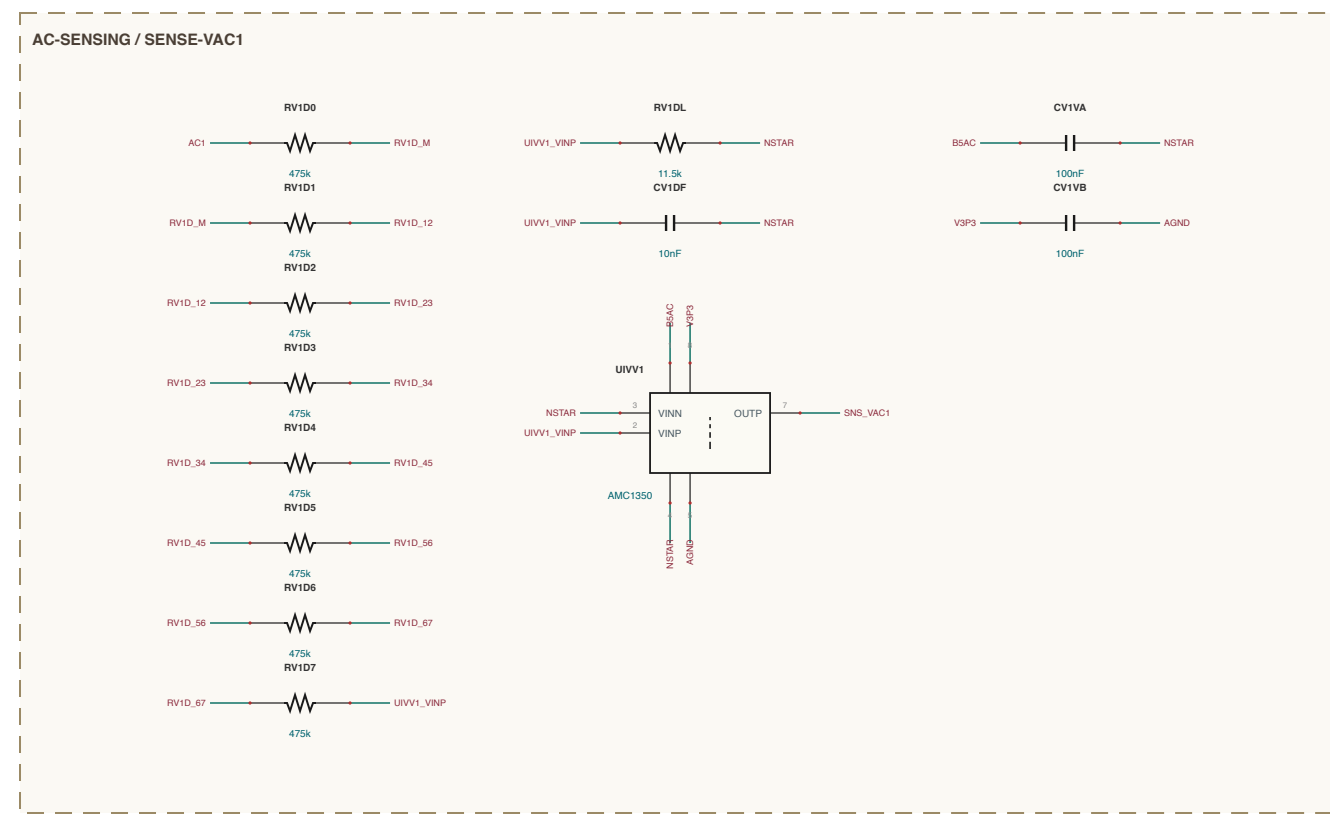

SHEET INDEX	
30	005 - 7 of 2
31	
32	005-005 - 1 section
33	
34	ALFA POWER - 1 section
35	
36	CONTROLS - 4 sections
37	
38	DC LINE - 4 sections
39	
40	INVERTERS - 4 sections
41	
42	VERTICAL PVC - 3 sections
43	
44	005 - 08 sections - 720 components

NET NAMING

Internal junctions are named for what they join

Usual: *„PPNs“* made at that I₂ pin e.g. *LEPDA_V3P*

Problem: *„M“* redundant of a series pair e.g. *BBB15A_M*

Problem: *„series“* link between *fluctuomicro* e.g. *RVFD_01*

all others are explicit design nets

MAGNETICS CONSTRUCTION

Identify per disc/magnetics (in Durac, gpa, gpa, acceptances from line team)

D1 LBA-L05: 3c T79 306 (stack) [CATALOG AL37], 501 1st tot trim -> L8 L05/NV, 504 (split) @ 120 S/A (c) (E51)

D6 LDMH-0: 3c T57 60a, N6b, 26.4mm @ -12.50G @ 136A pc (door 11 4A/E, E51 retained heads 11.8 - me)

total Lr = trim + measured after leakage (pins COMBINATION/DATE leakage spread; Cr @ TANK sections