
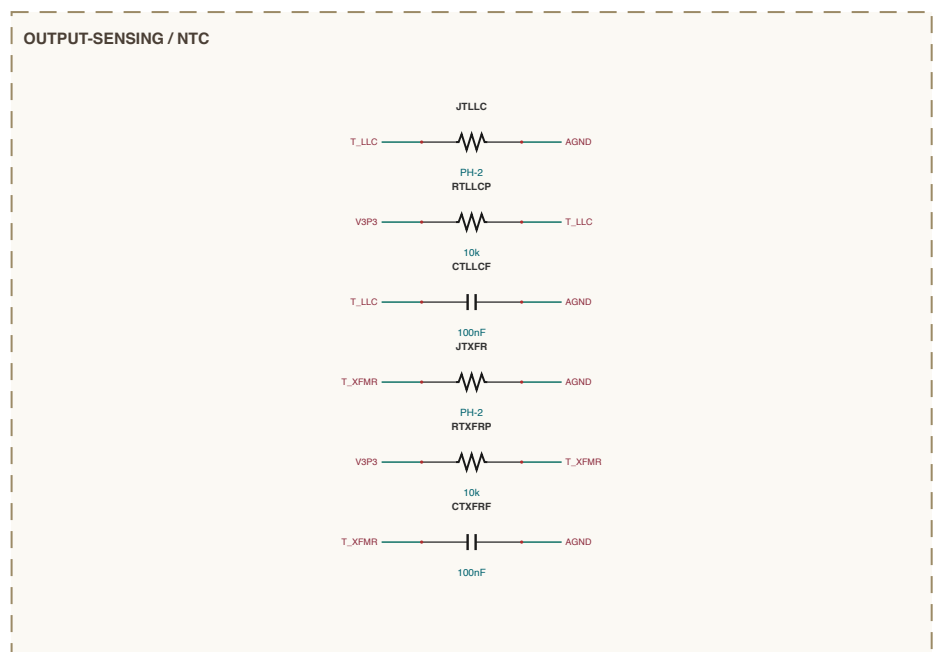
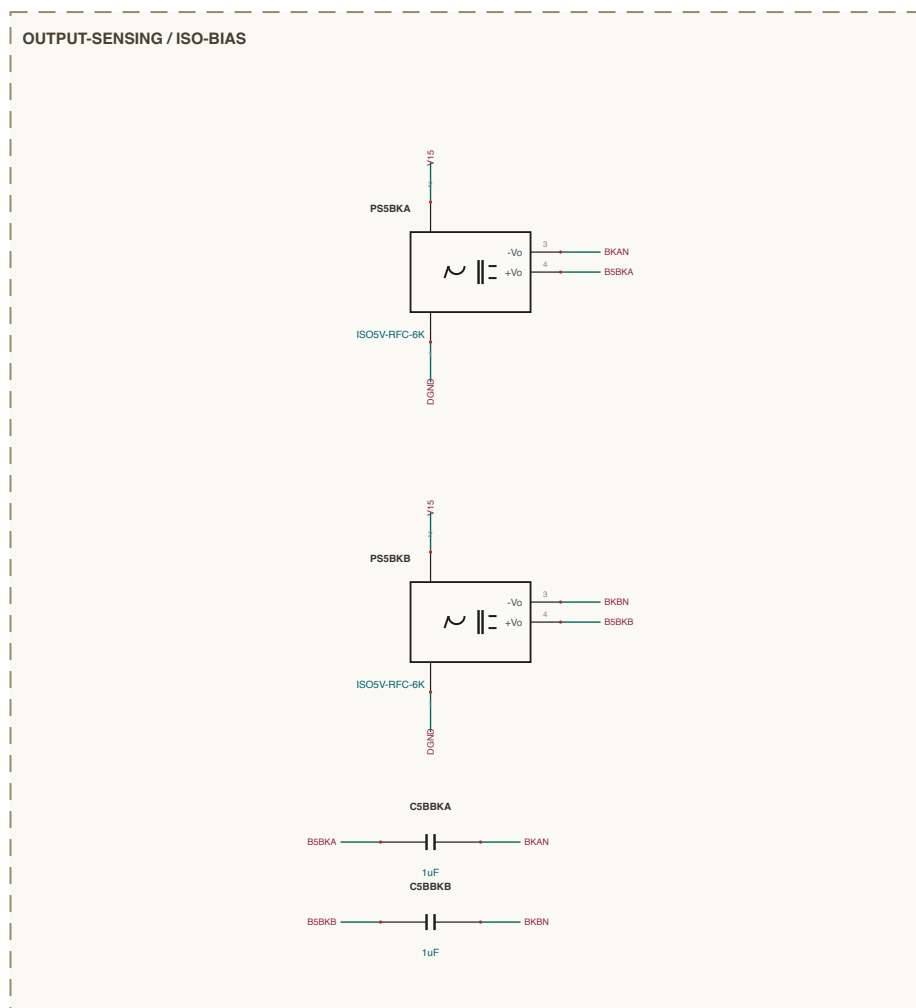
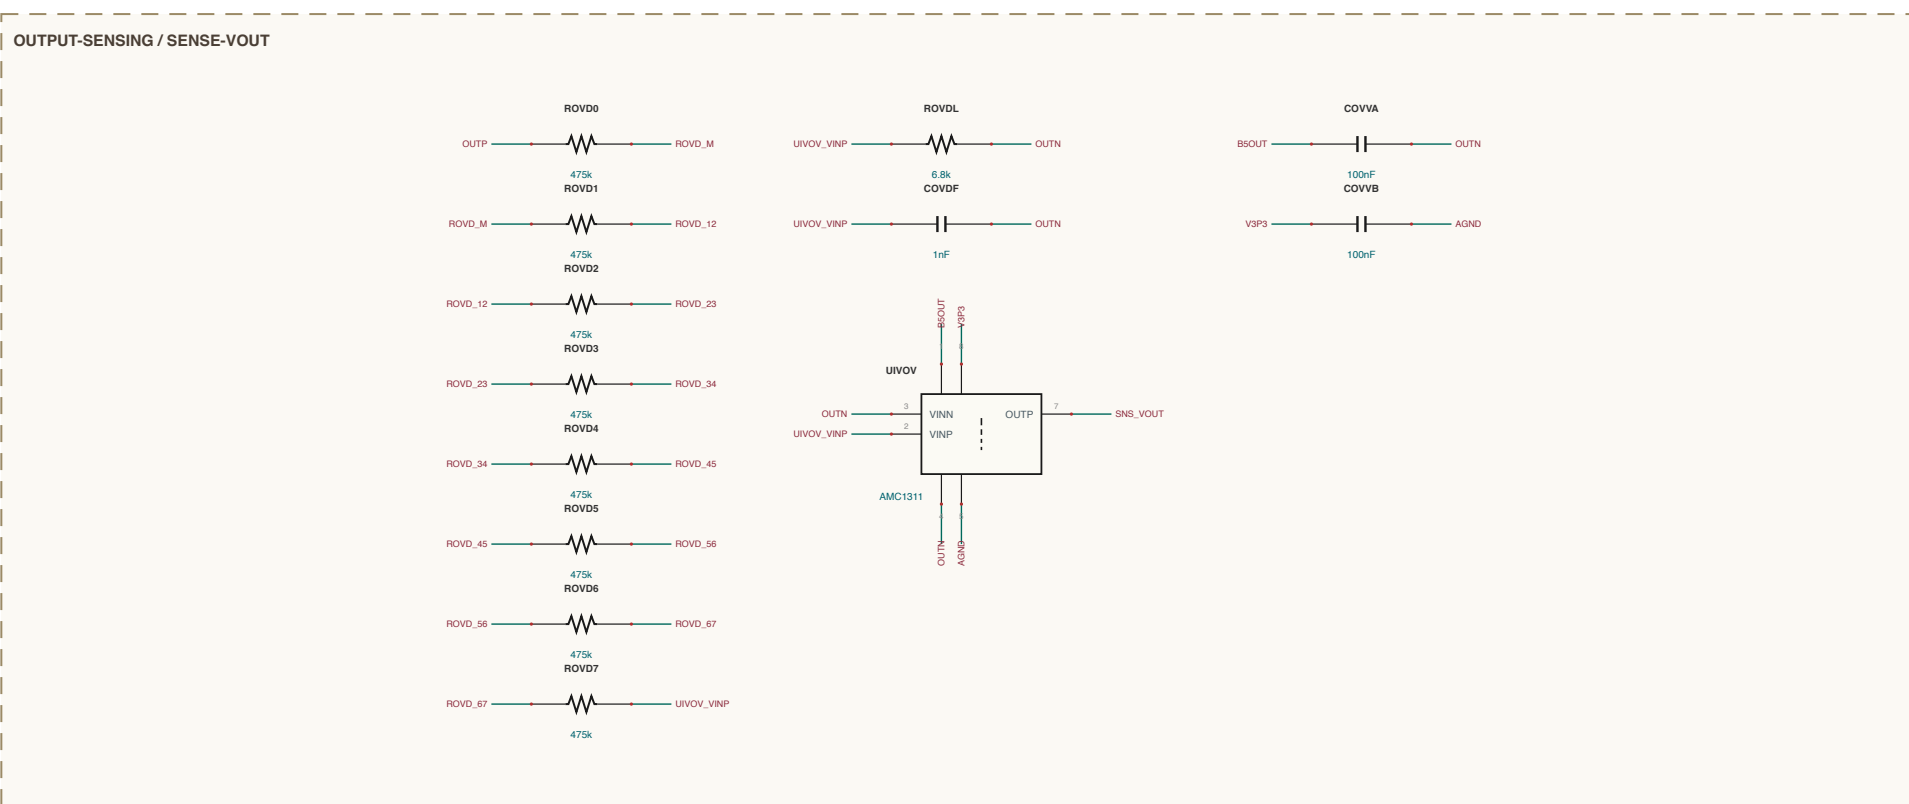
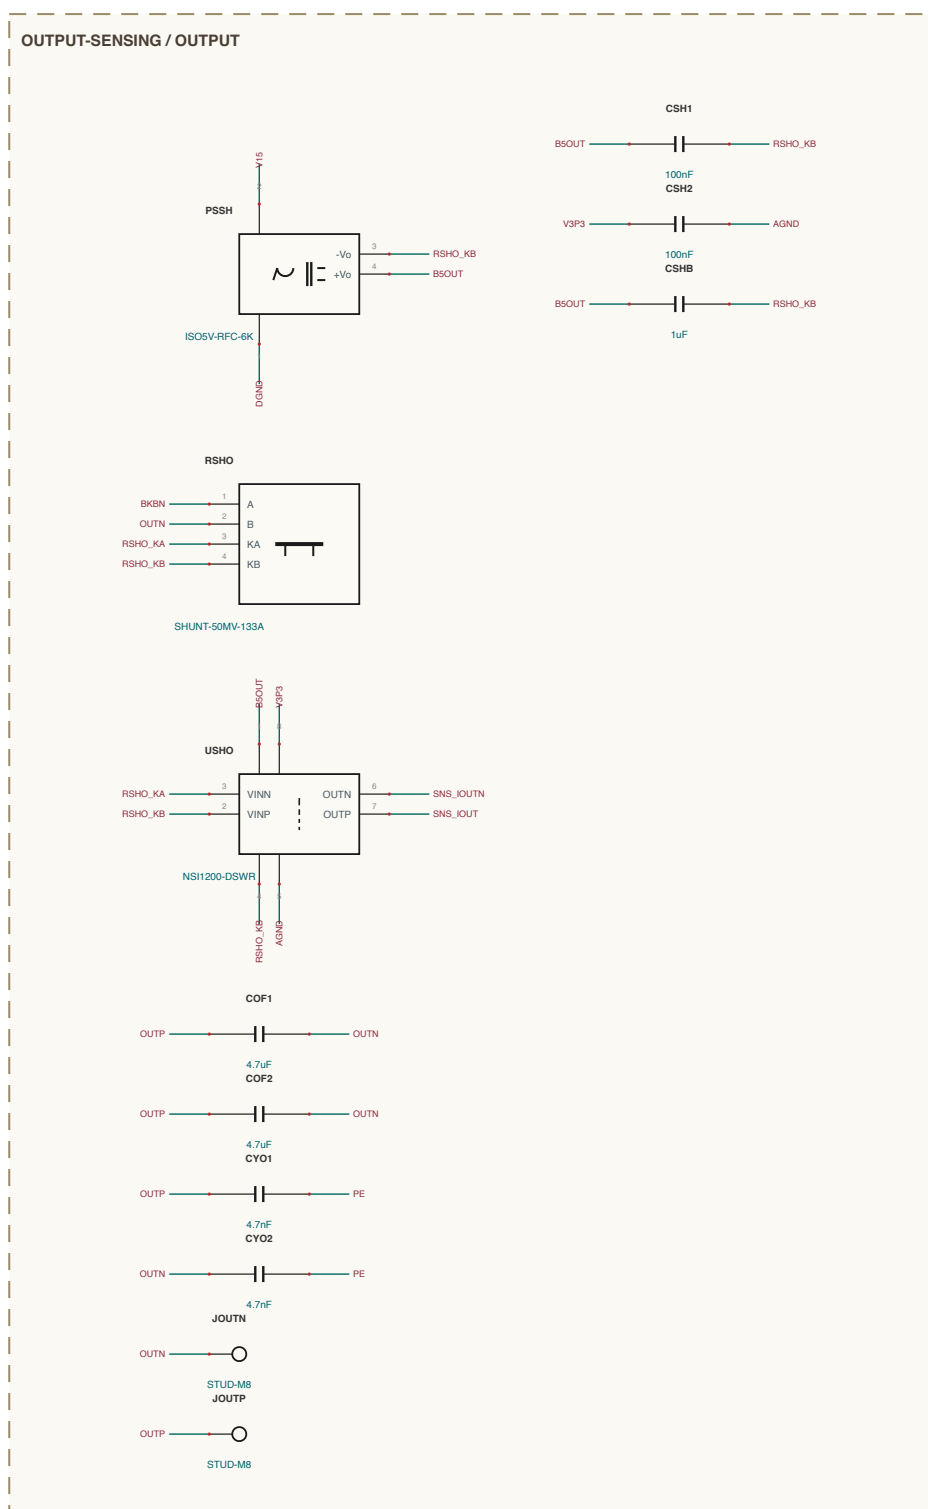
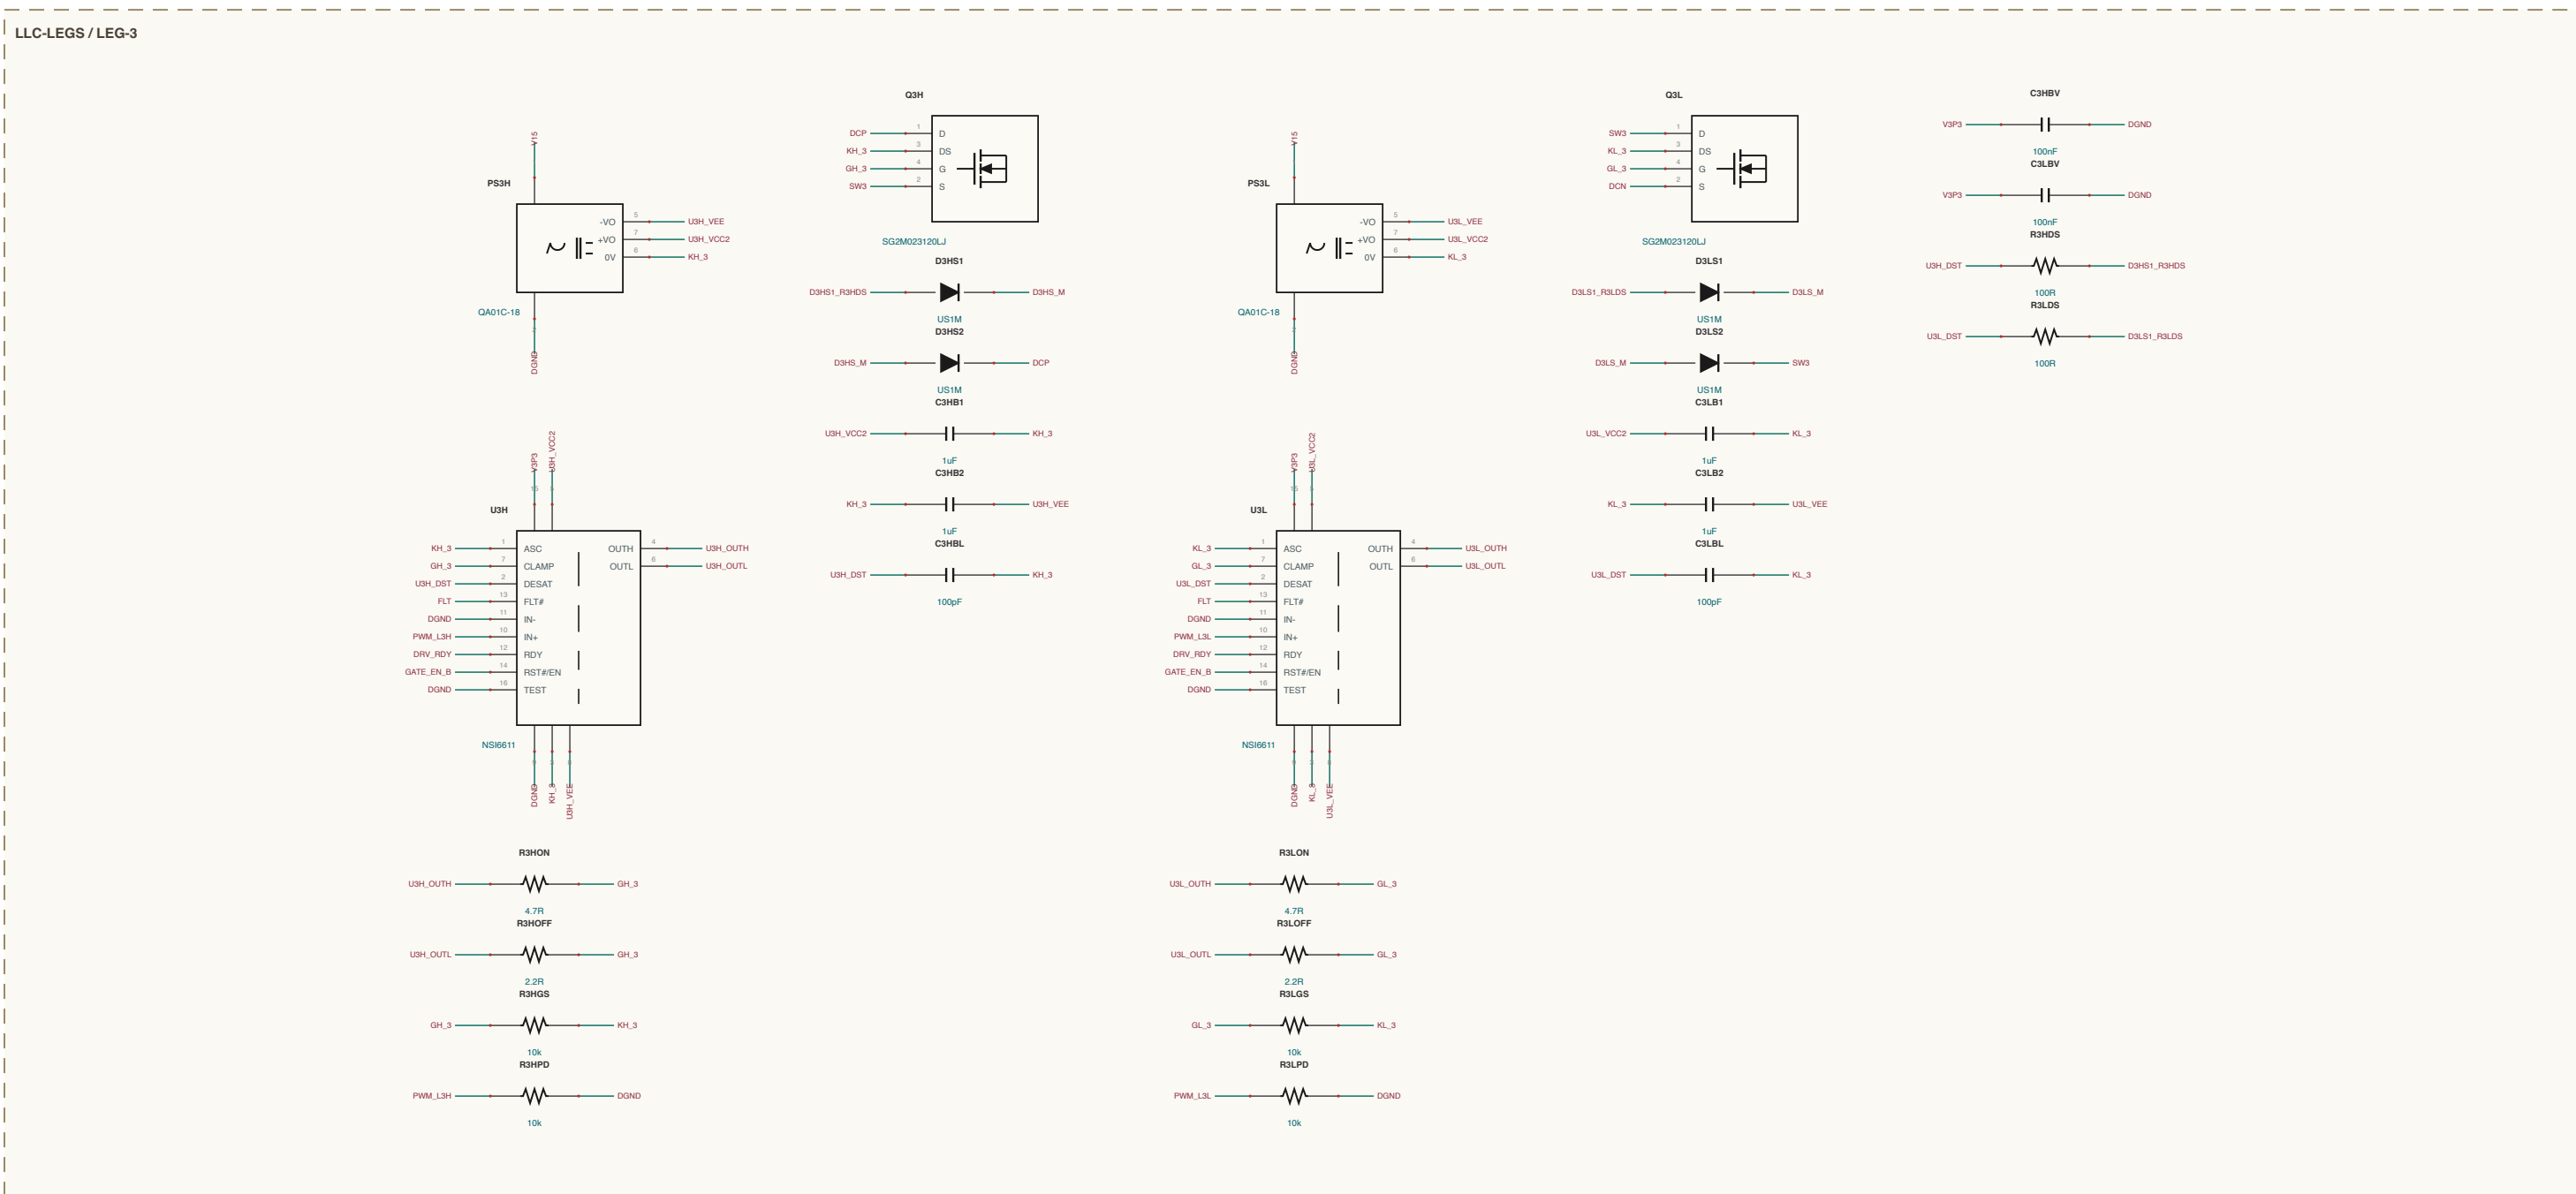
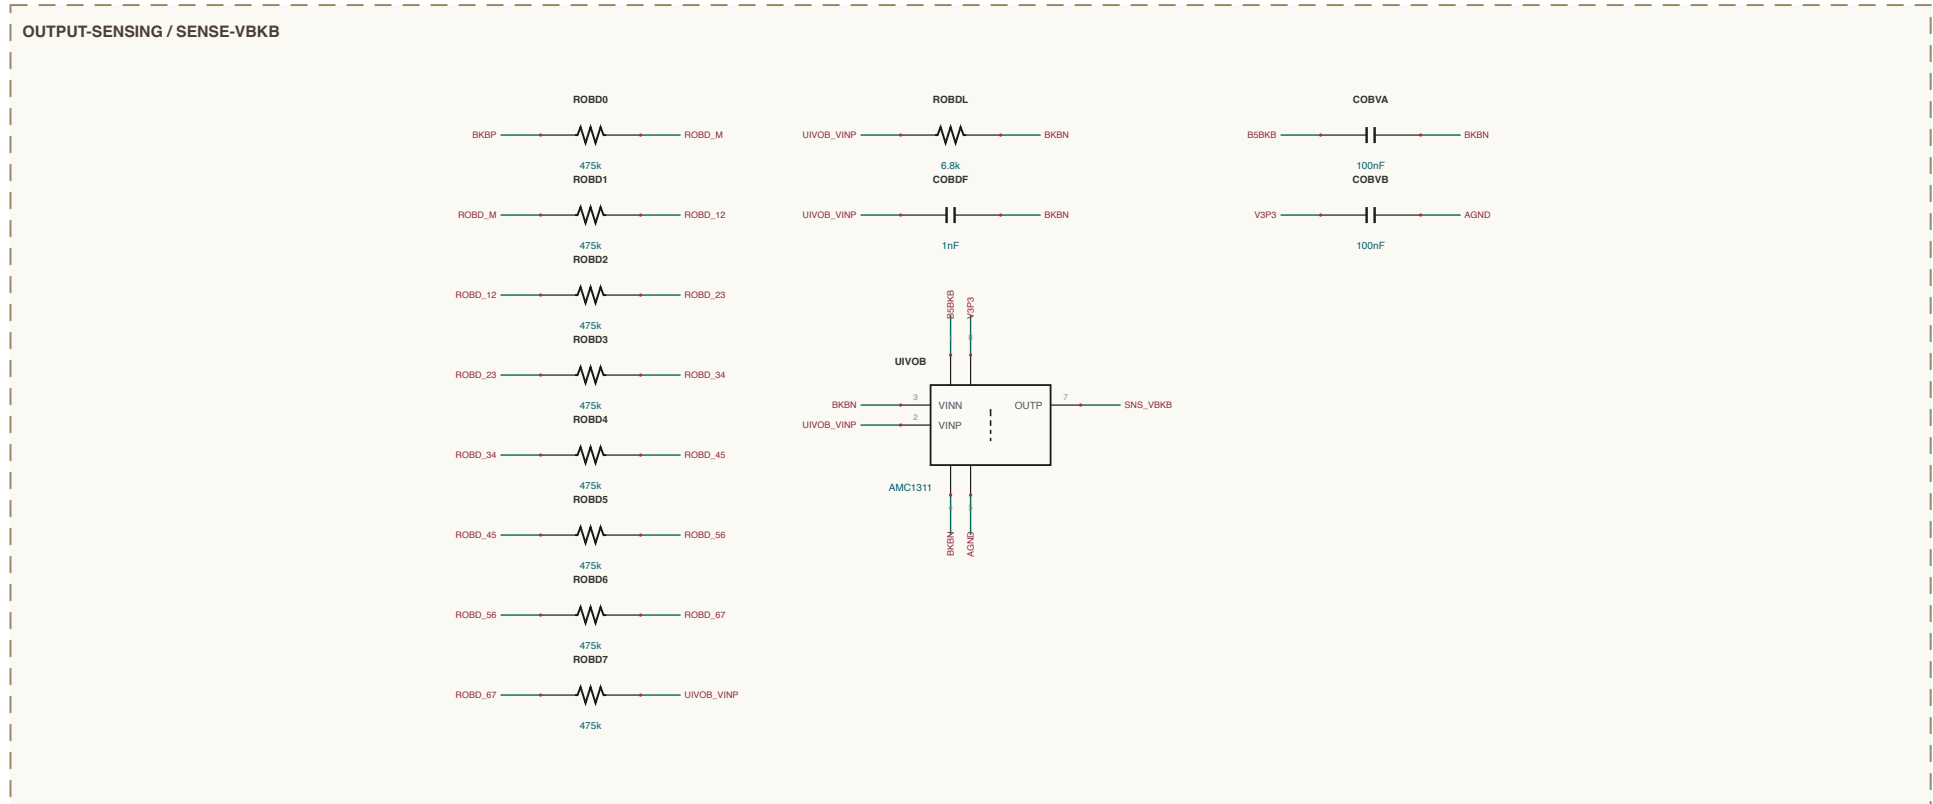
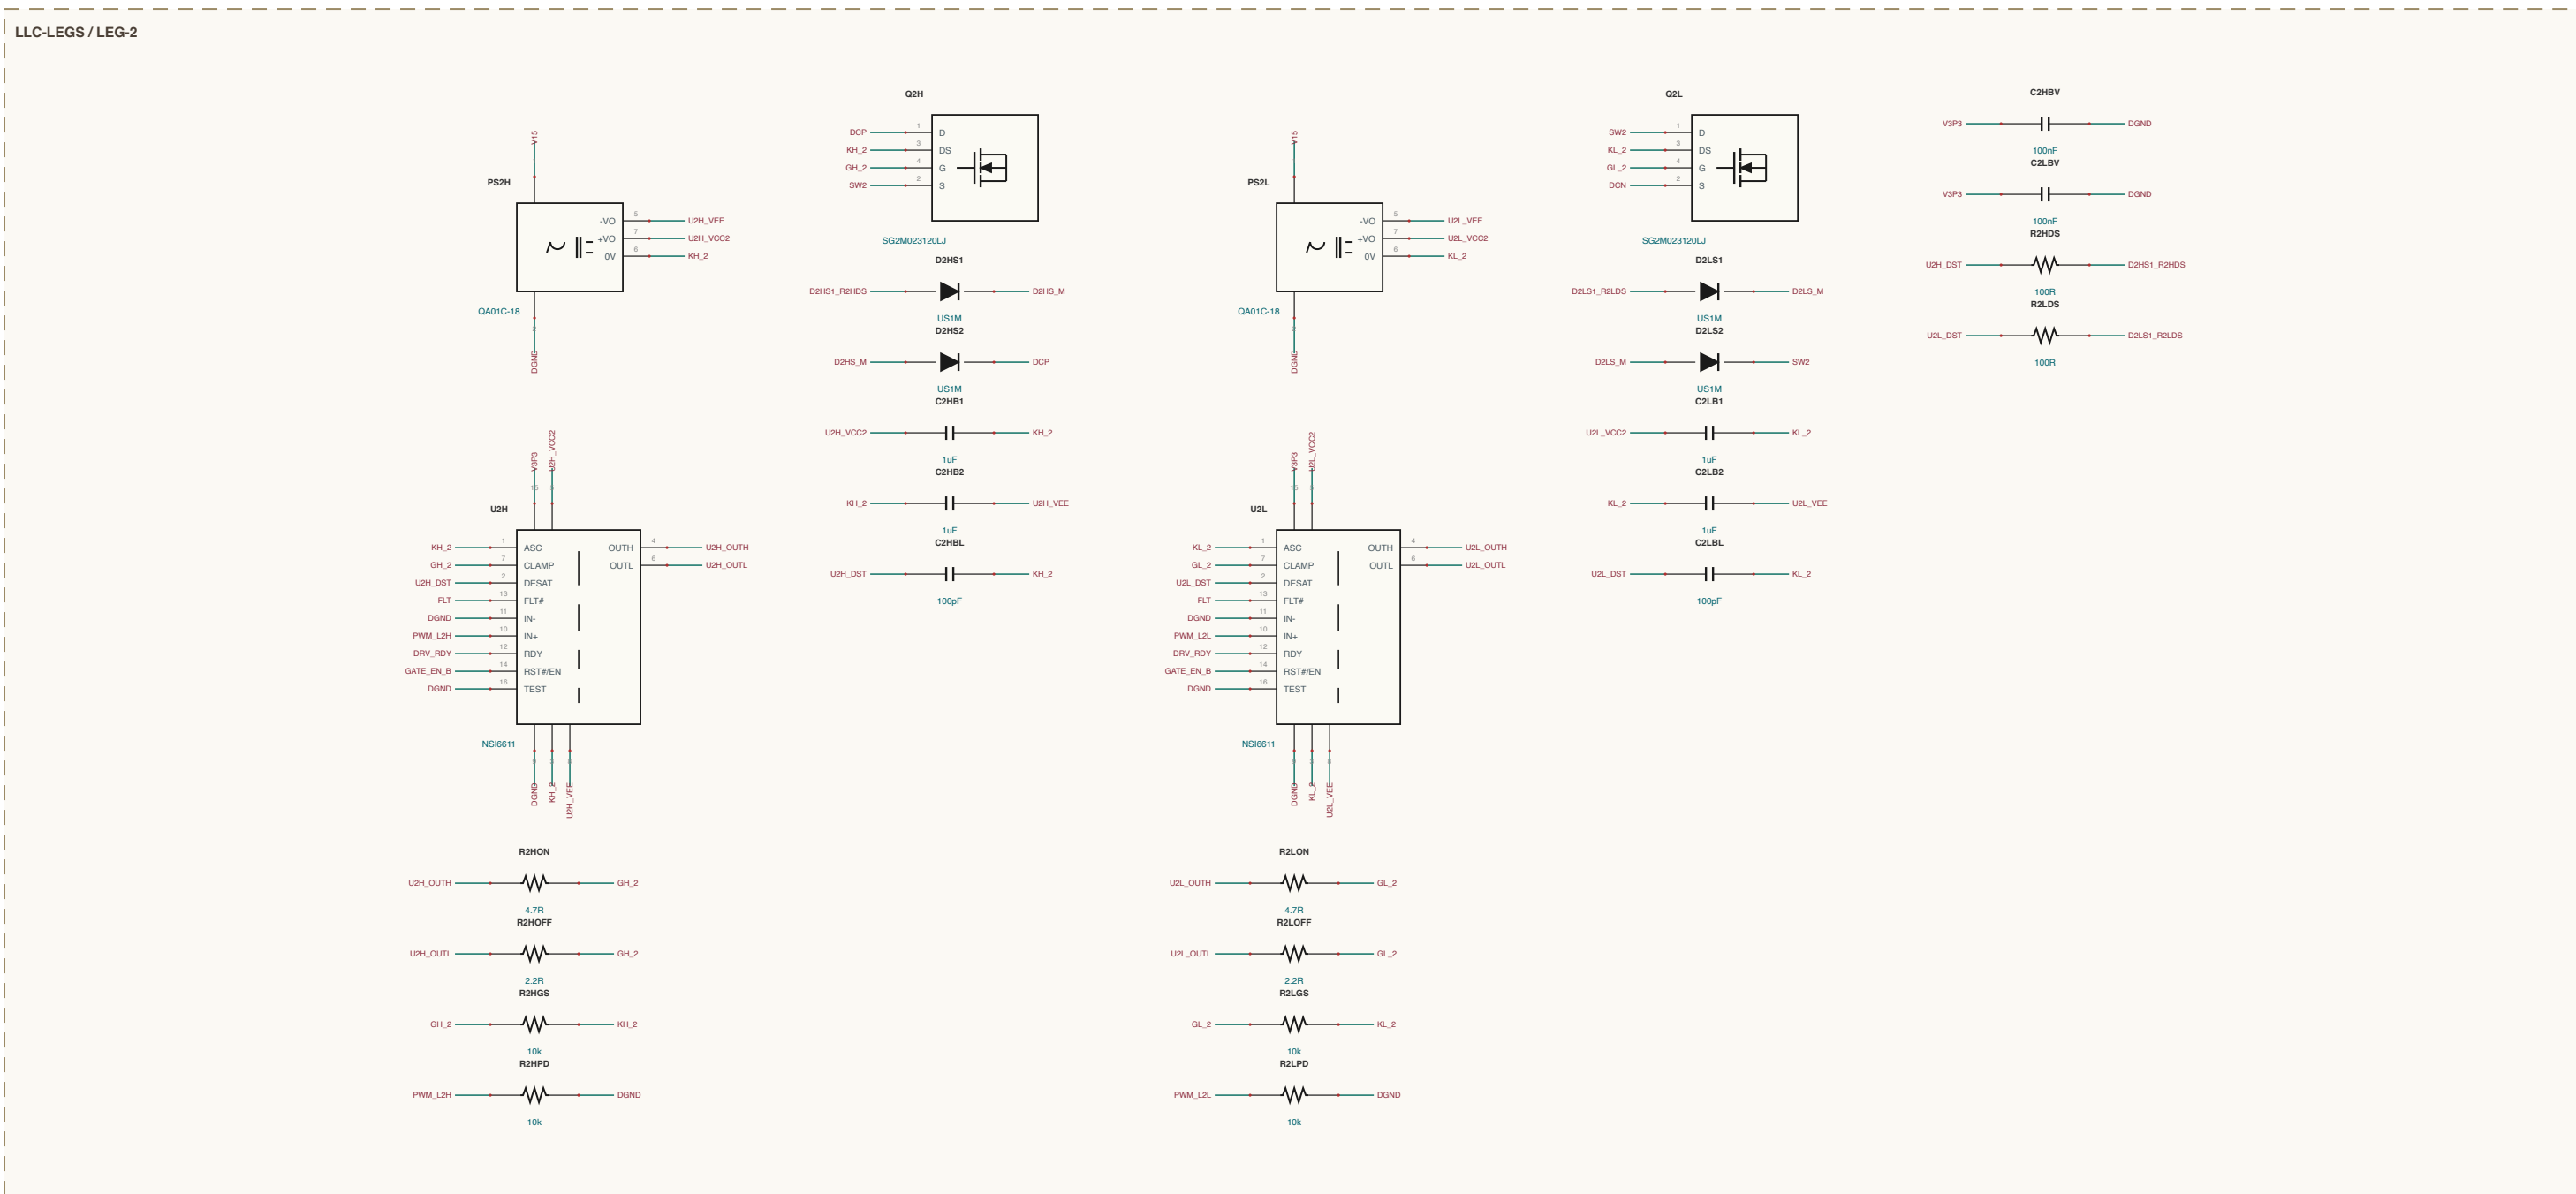
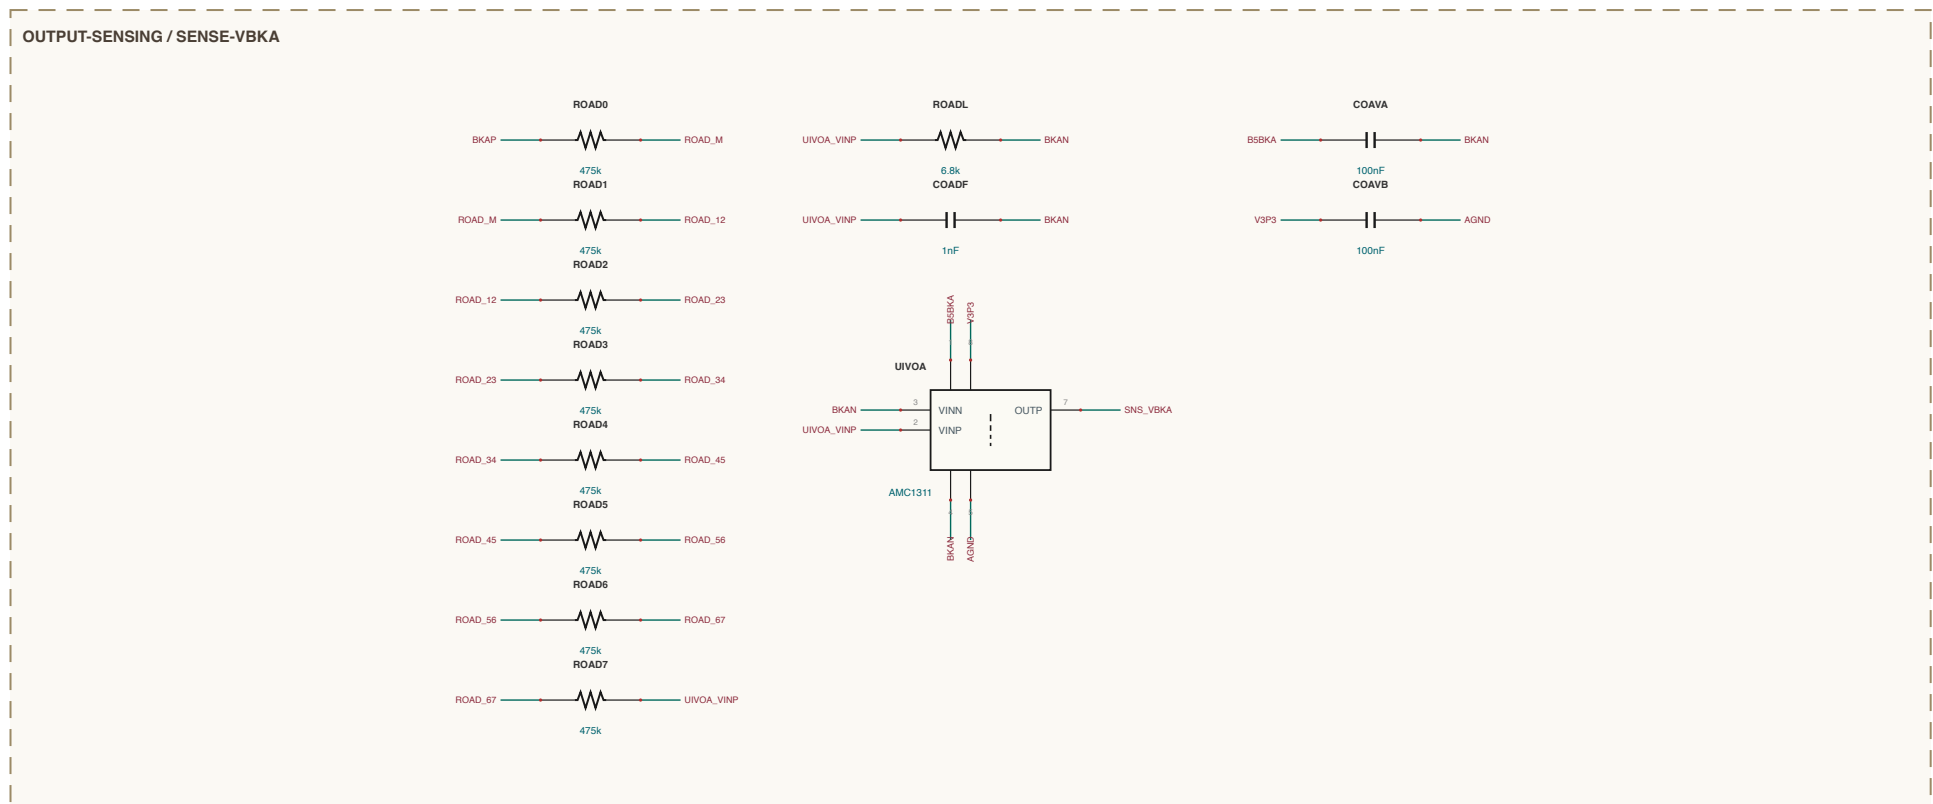
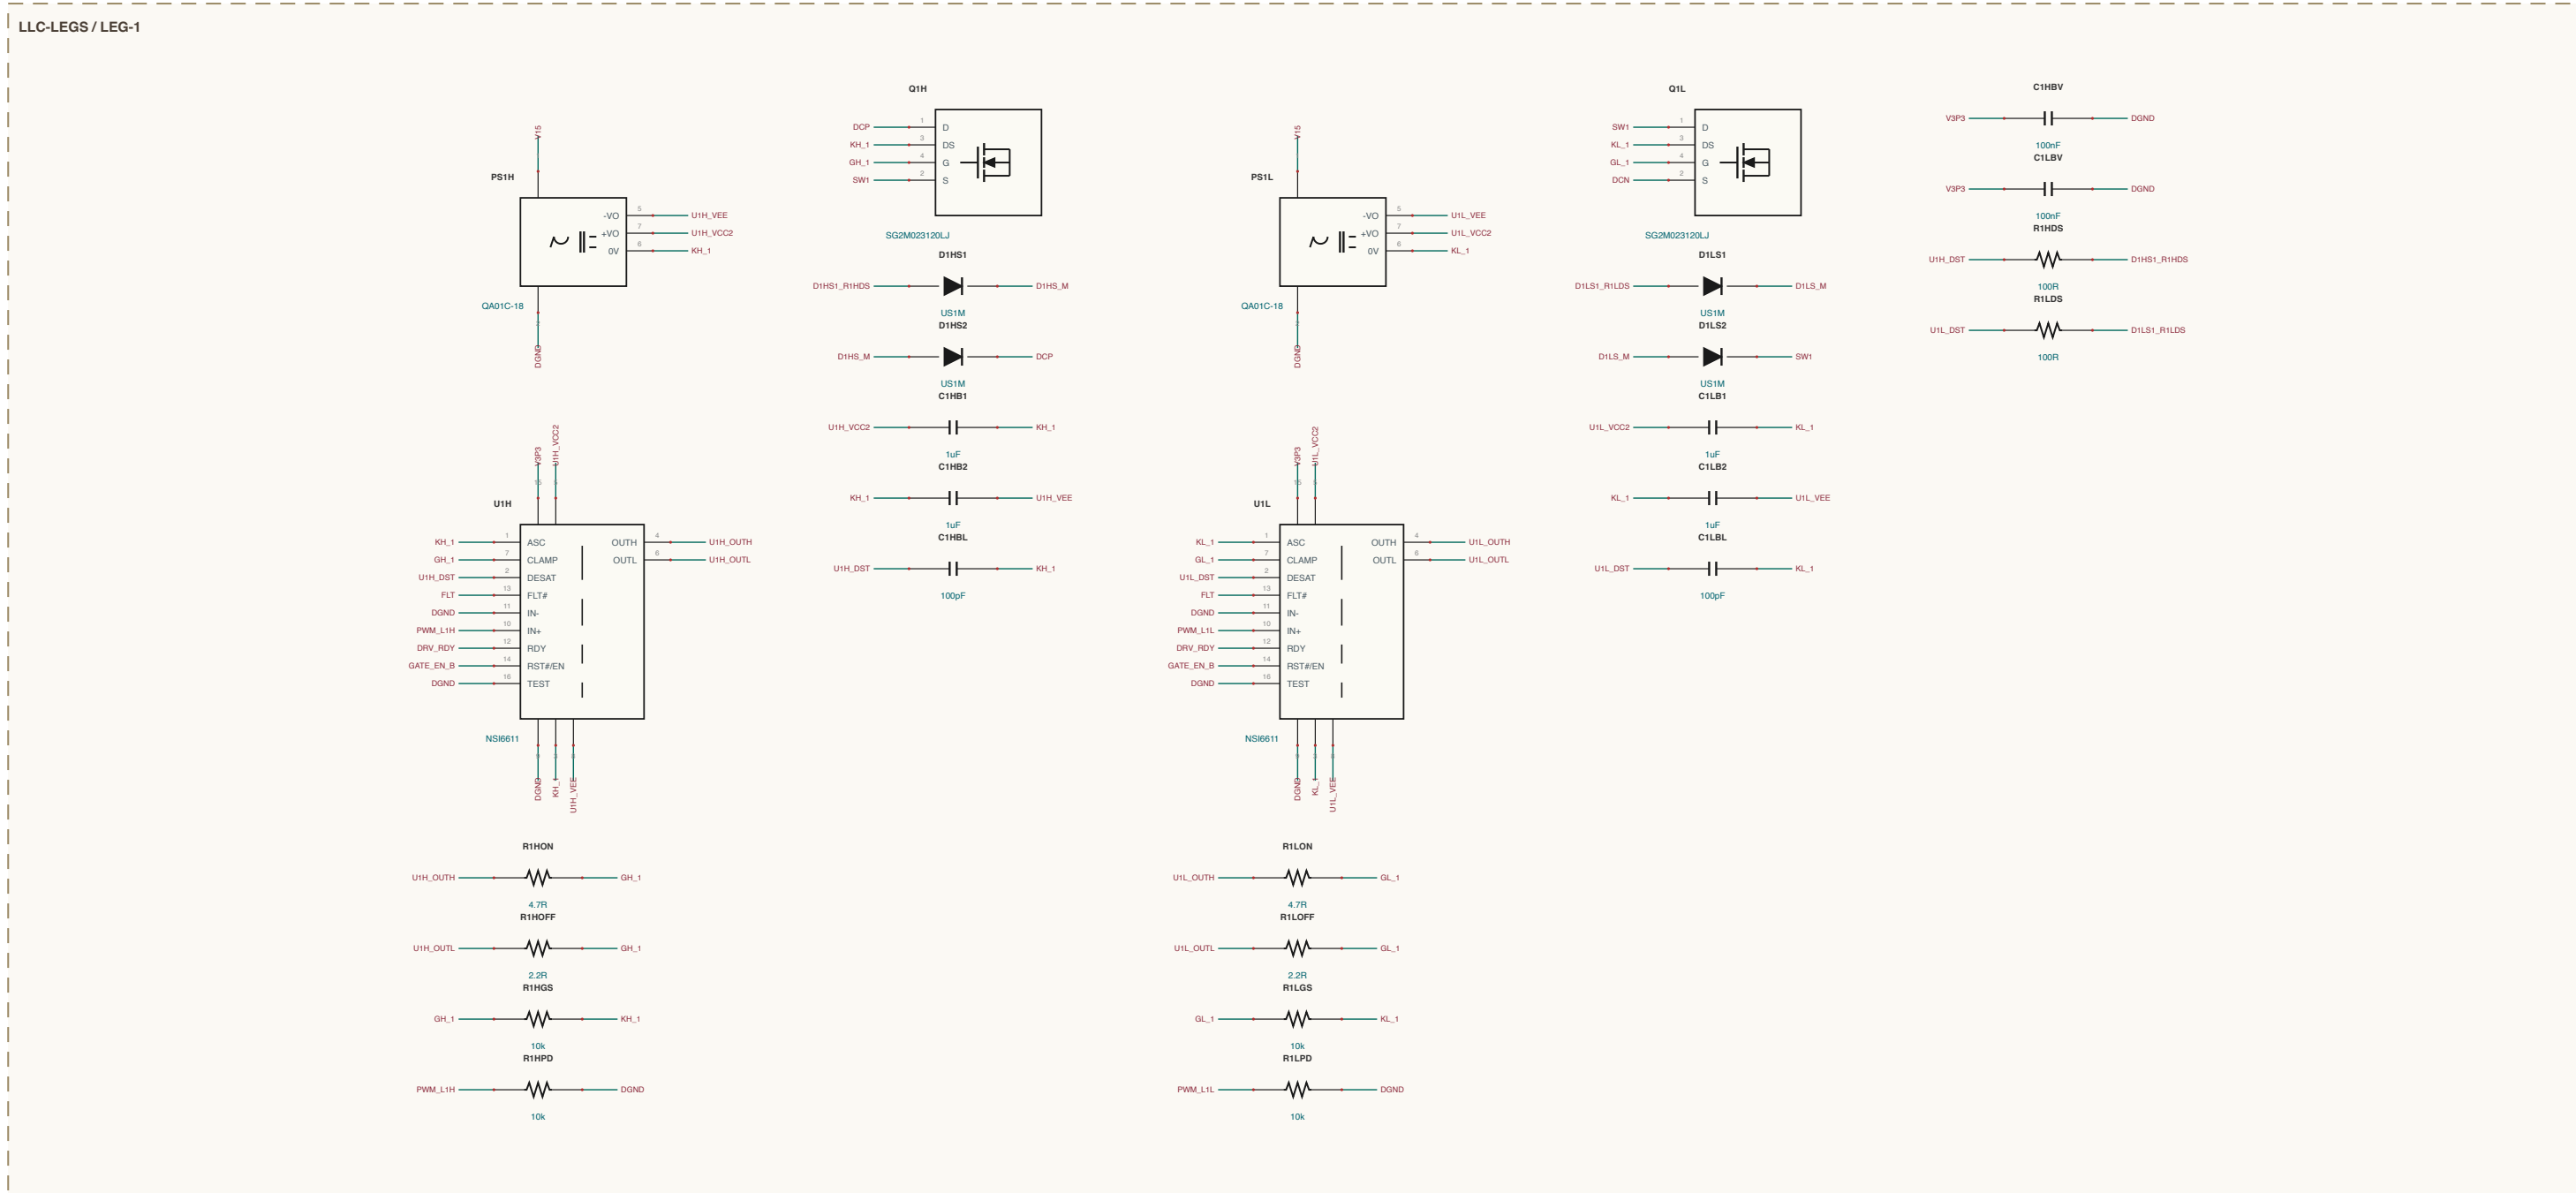
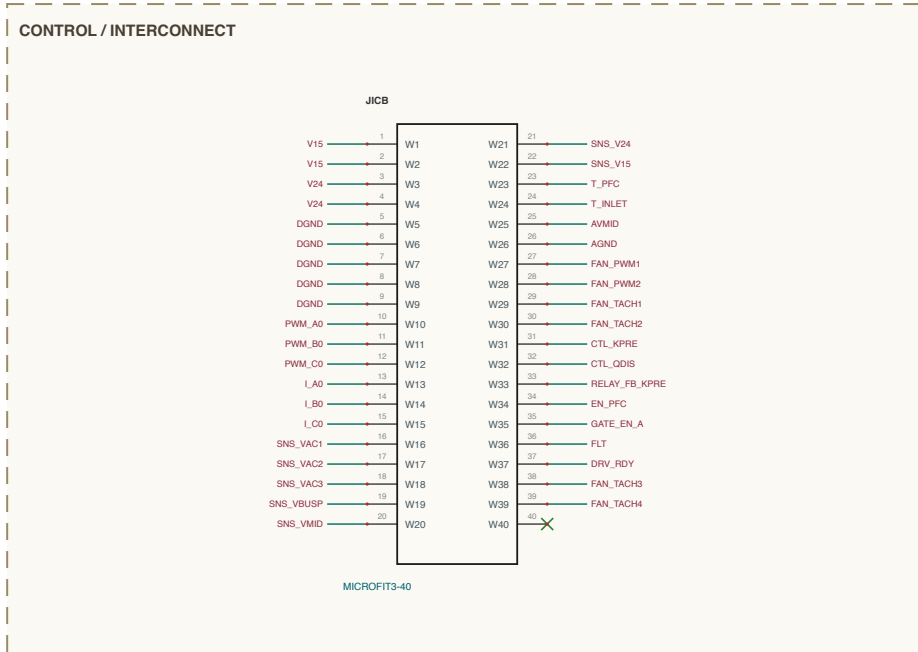
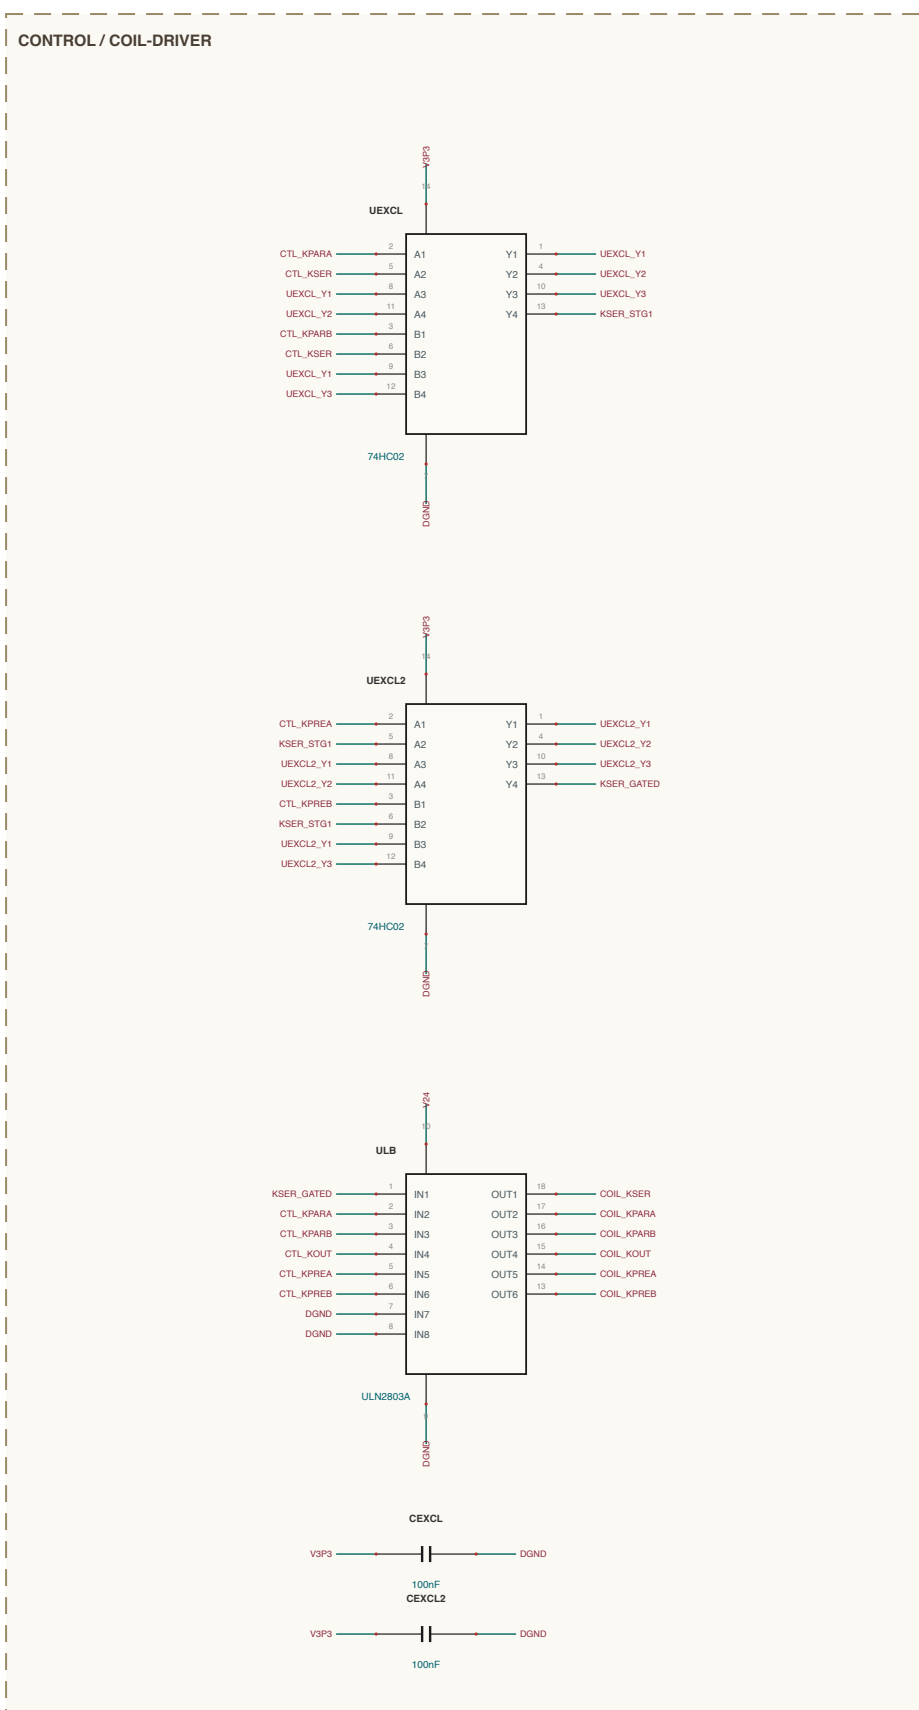
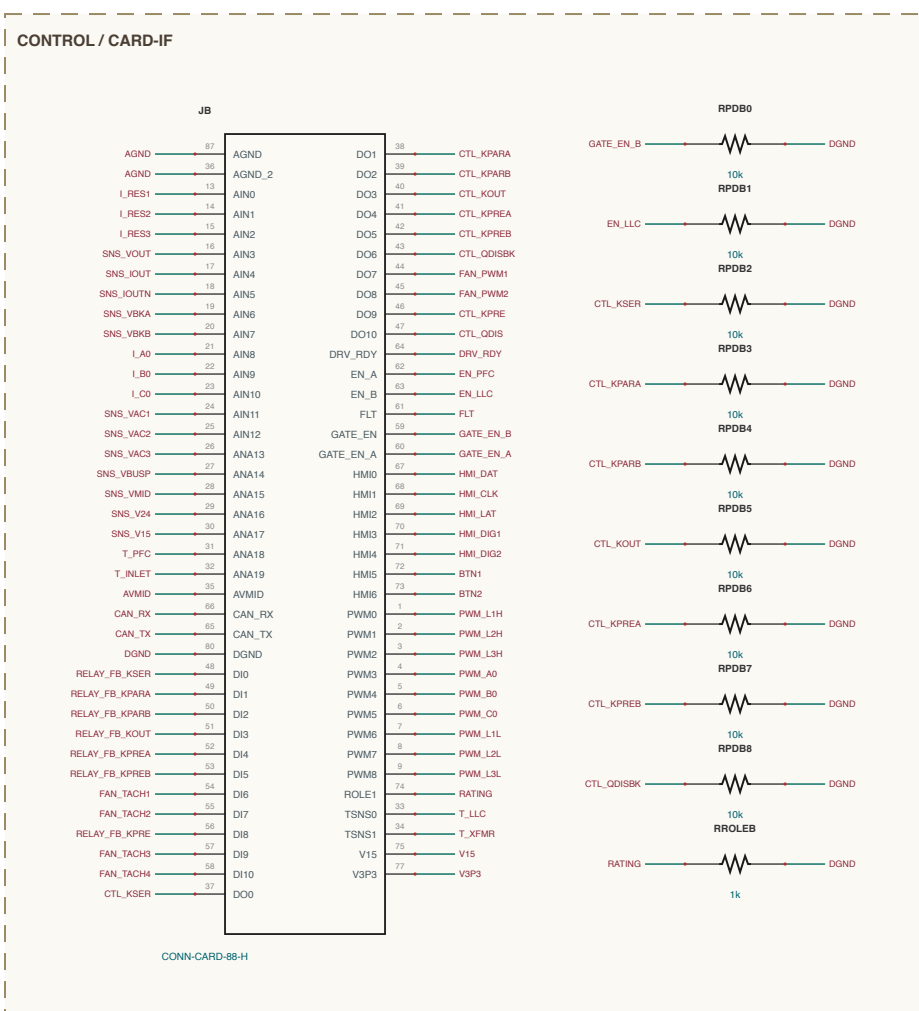
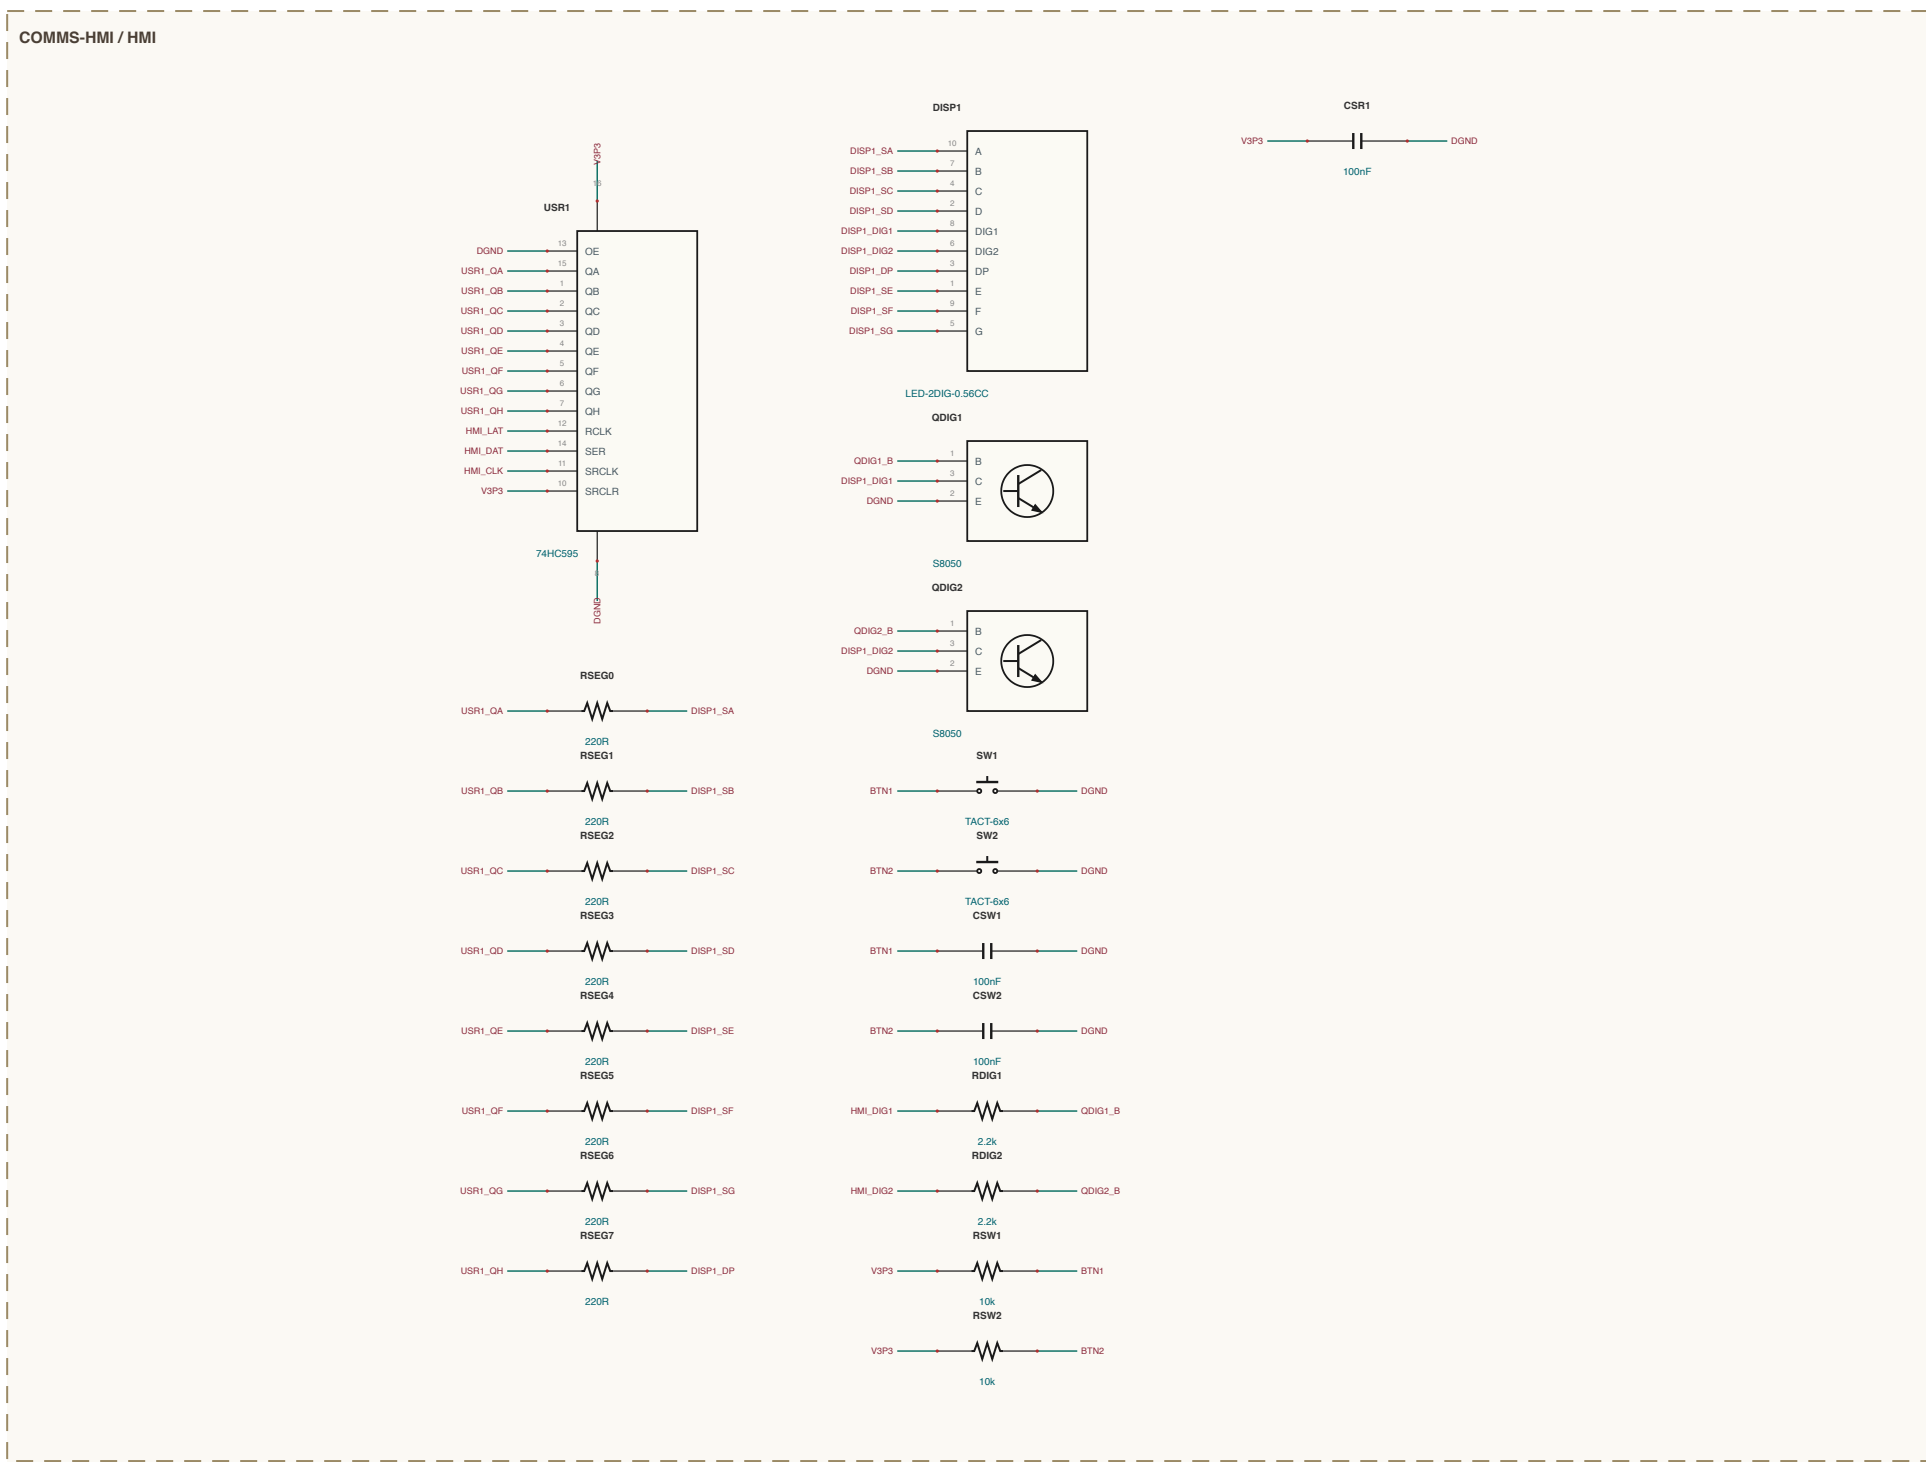
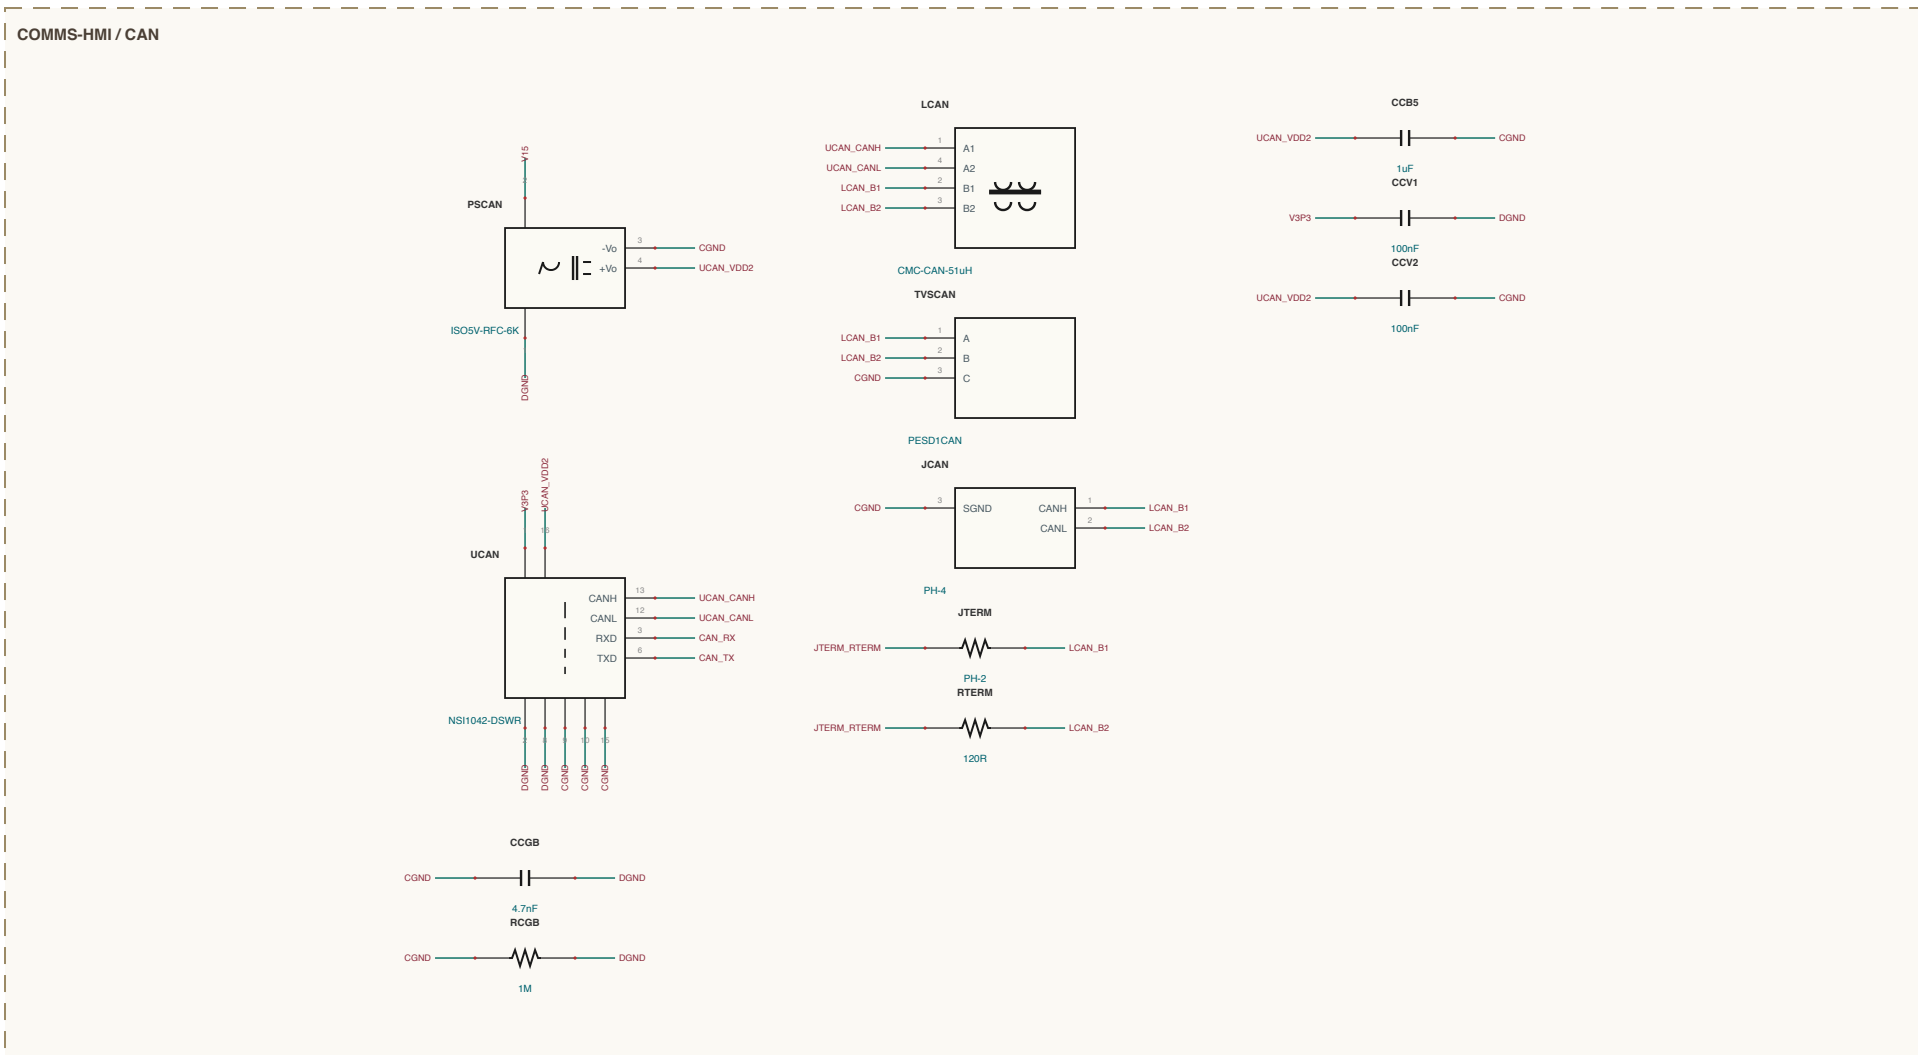
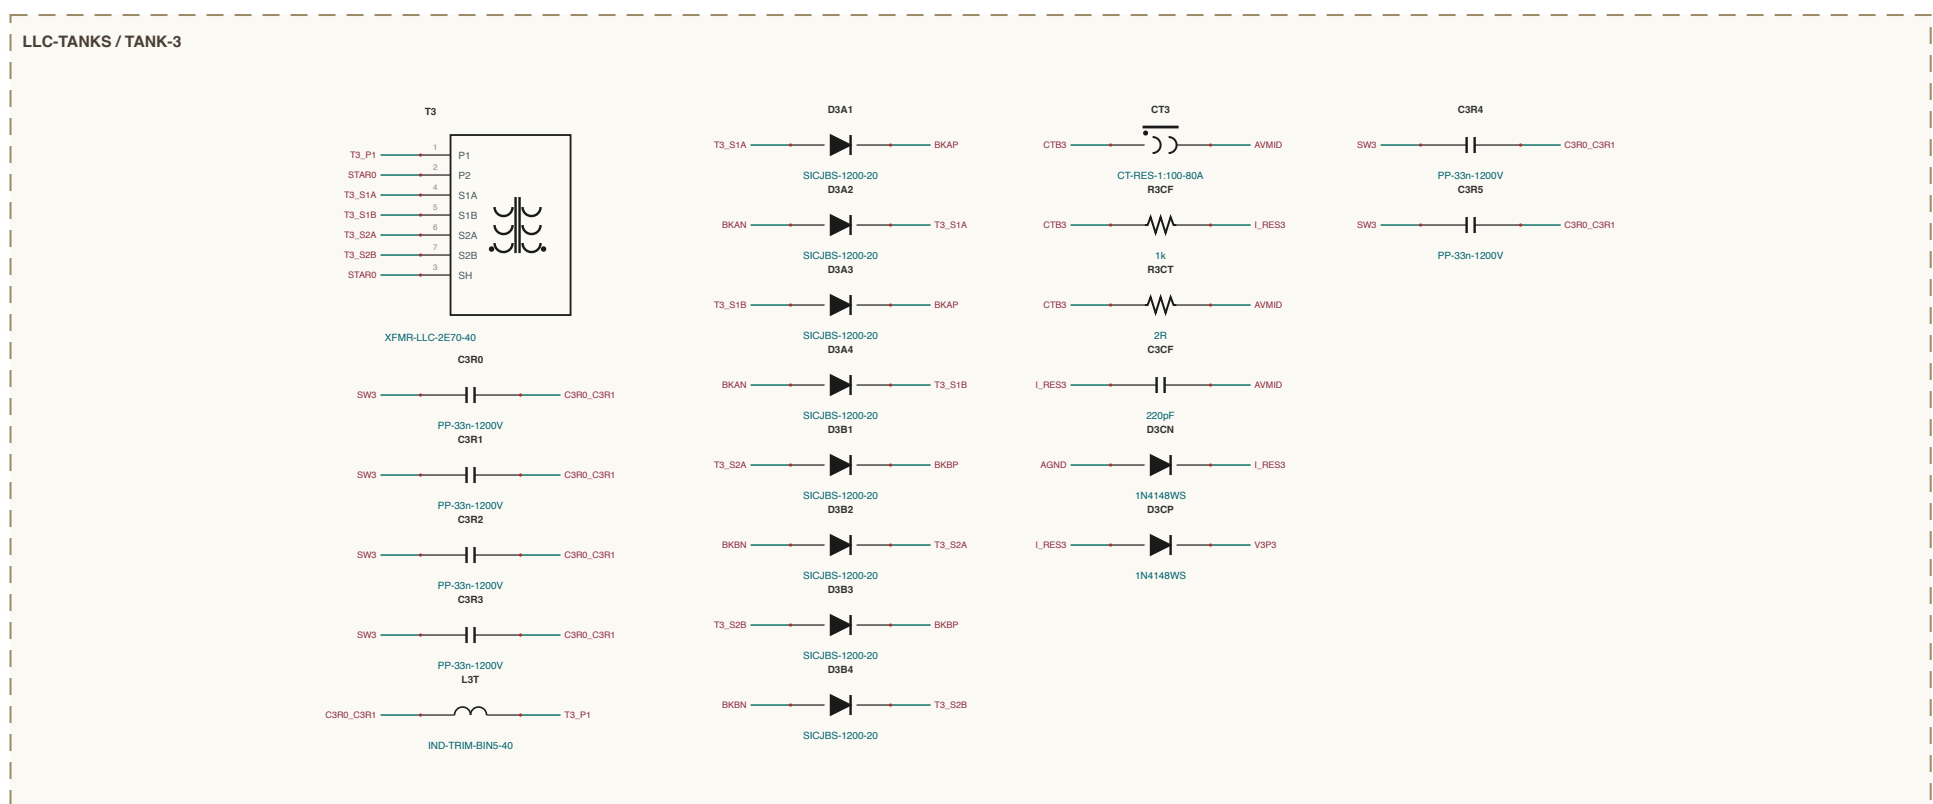
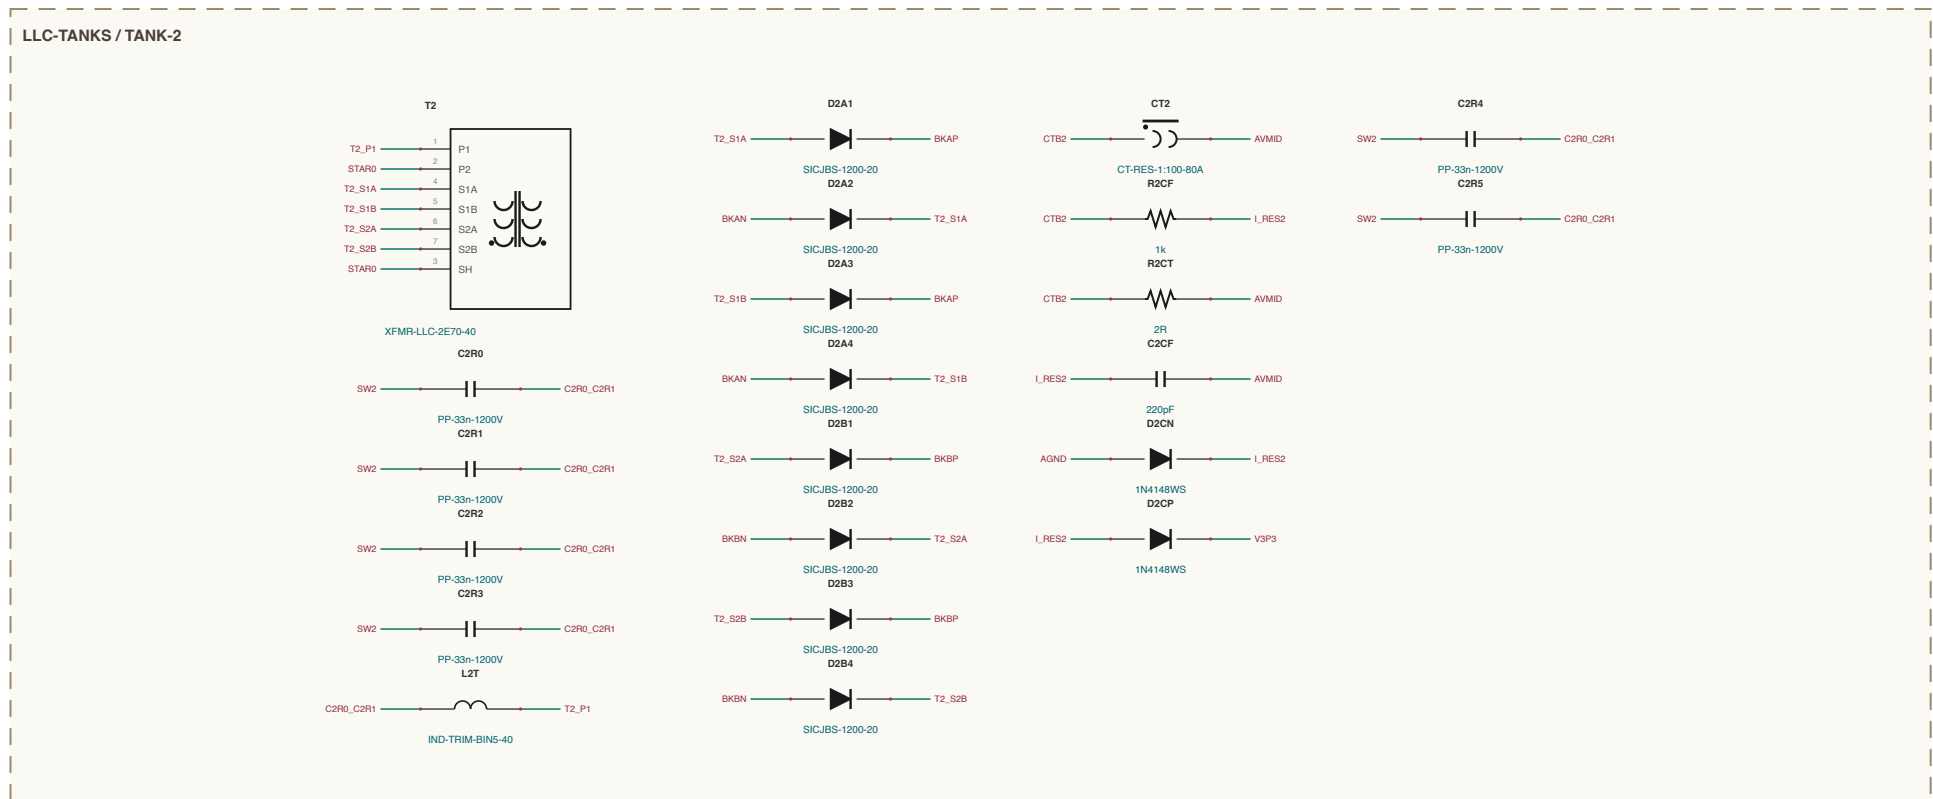
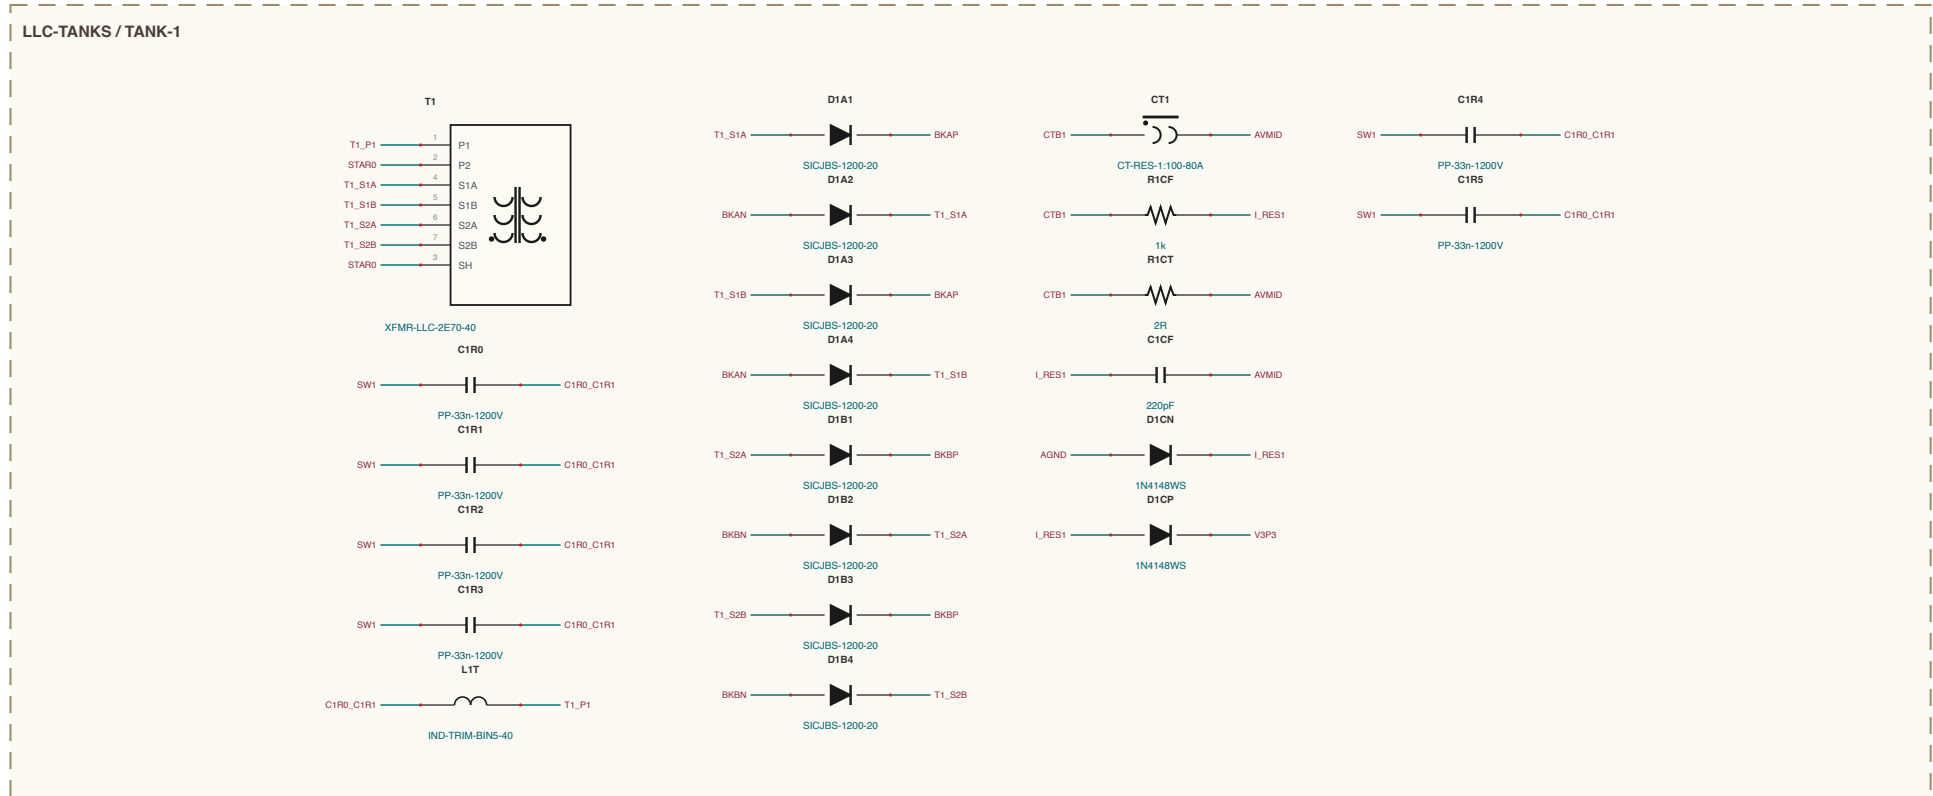
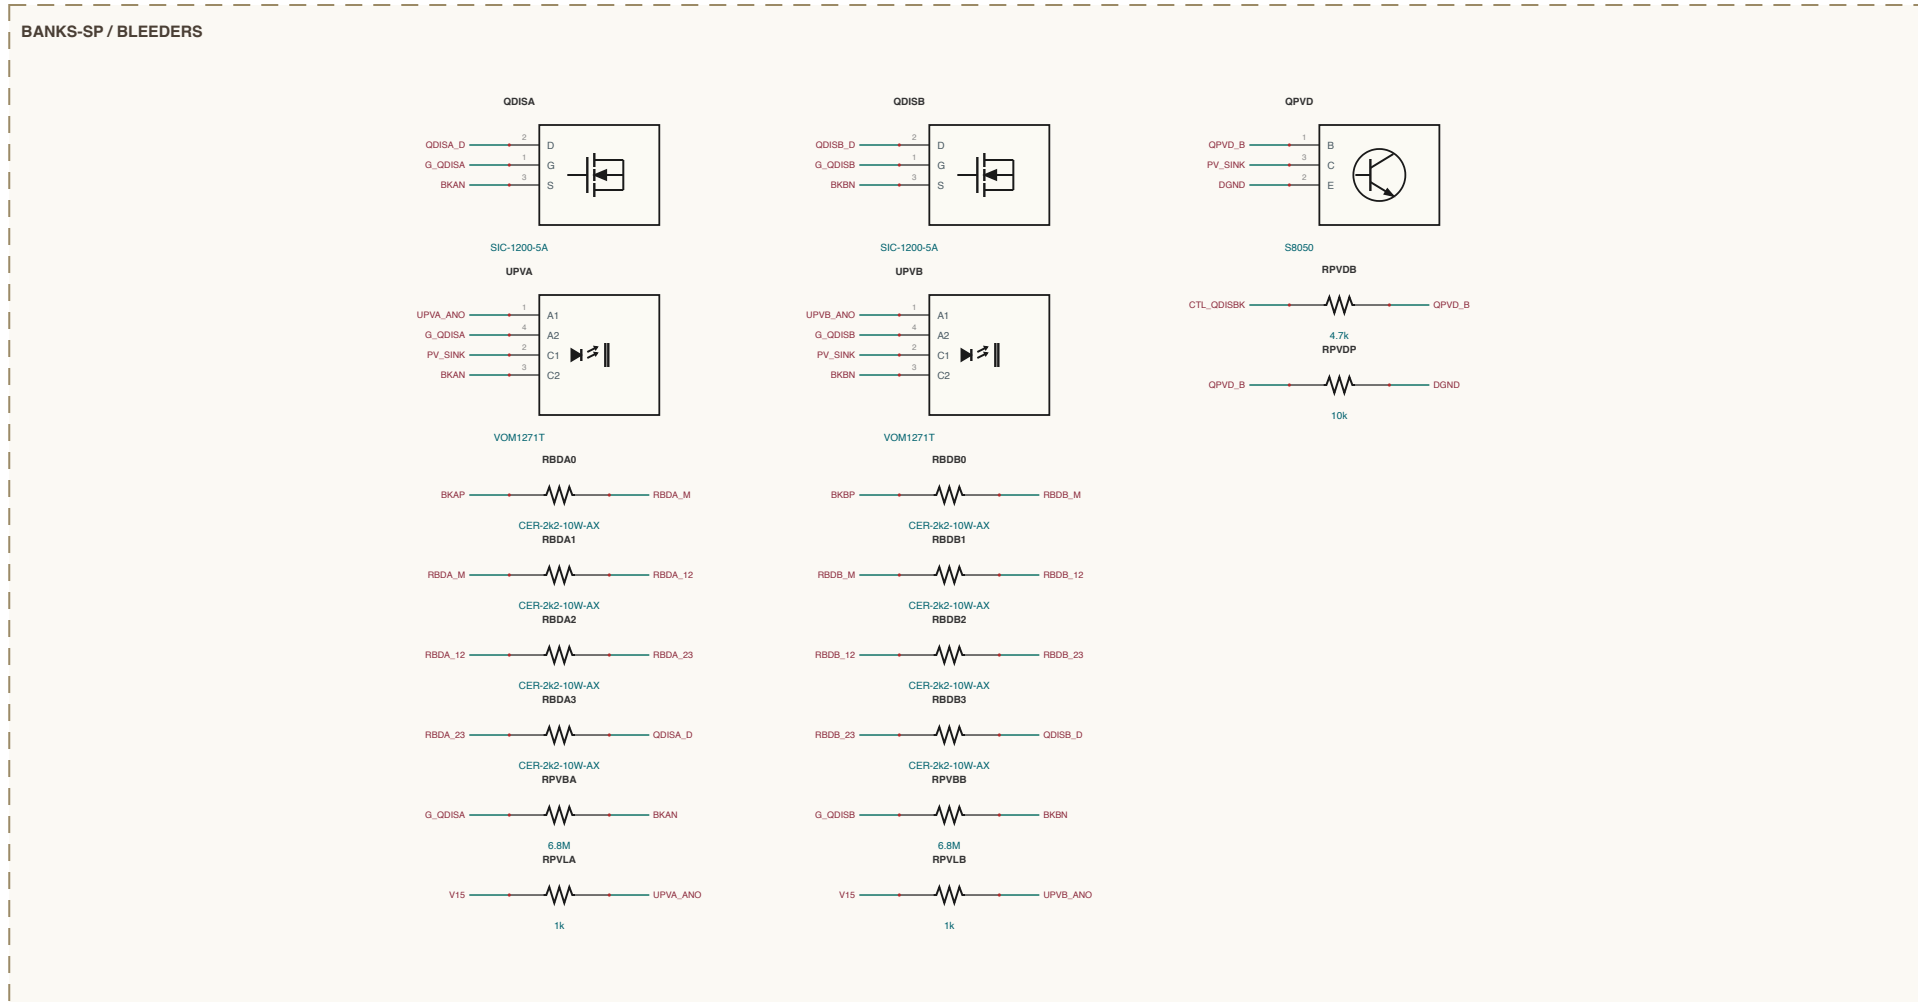
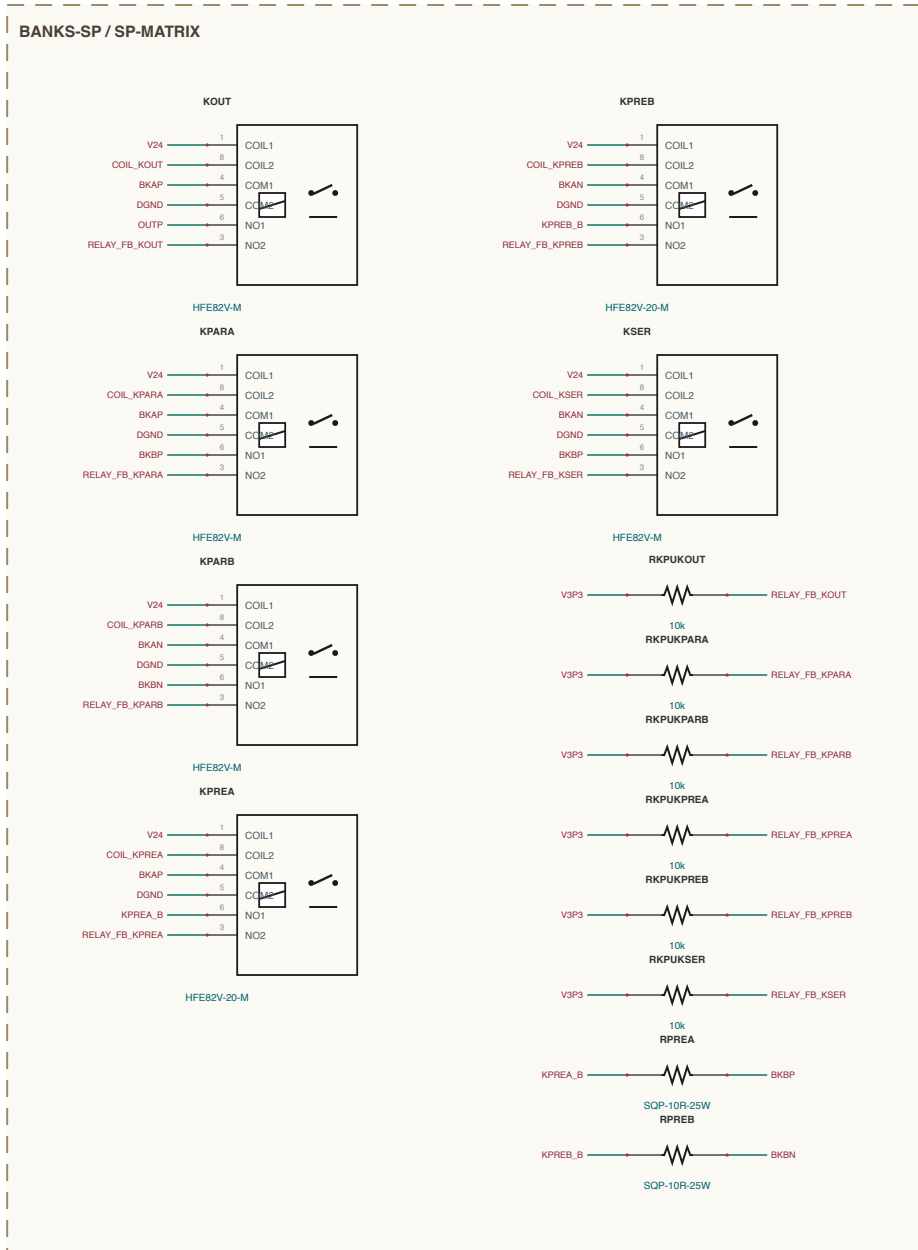
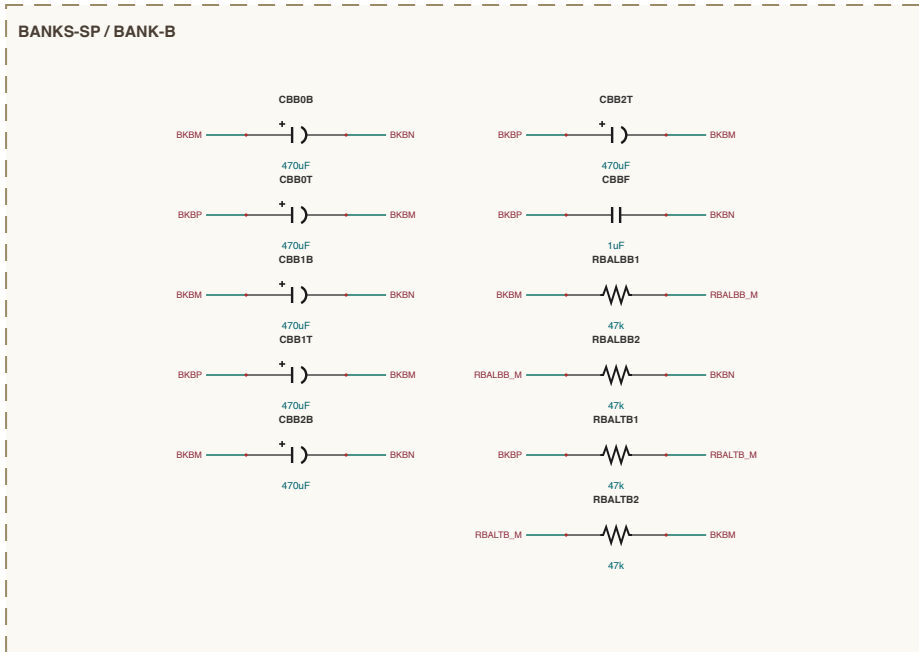


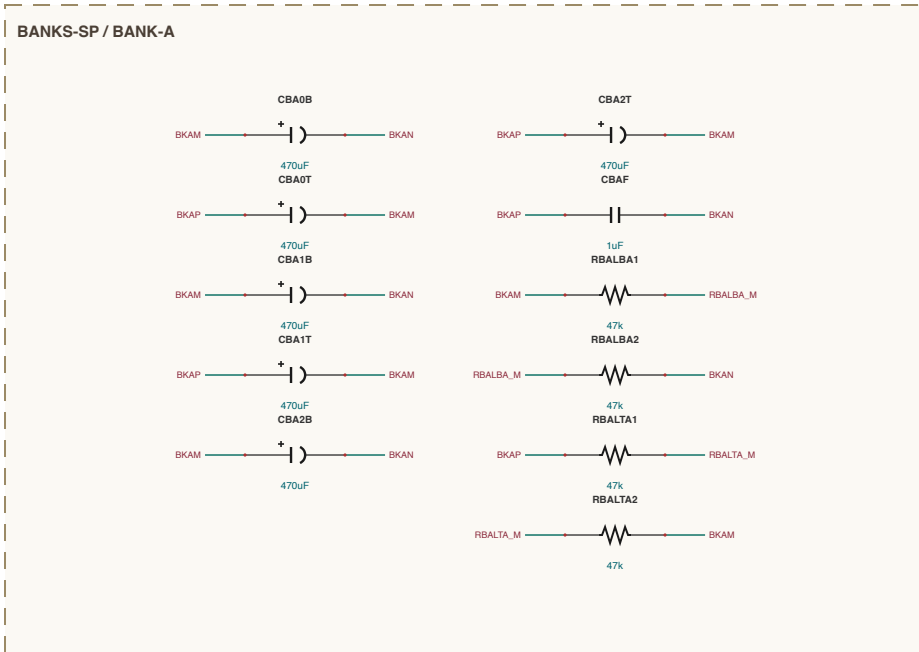

MAGNETICS CONSTRUCTION

Identify per doc/magnetics.mtd (burn, gap, fill, acceptance lines like this)

EQ 17.171 2x 4759353.5 vms (8653782880 format, 6.66, 8/94 NovT 255) 34-9 vms was unbuildable at 2.4x window; compensated (ie + full acc), 180 kbit at 2% gap-ground

EQ 17.174 3x 64, bins 0.20-55.8/uri, 1/2 2880x4 (0.57mm)

total L = 91m + measured other leakage (bins CORRESPONDING leakage spread) or AT TANK sections