
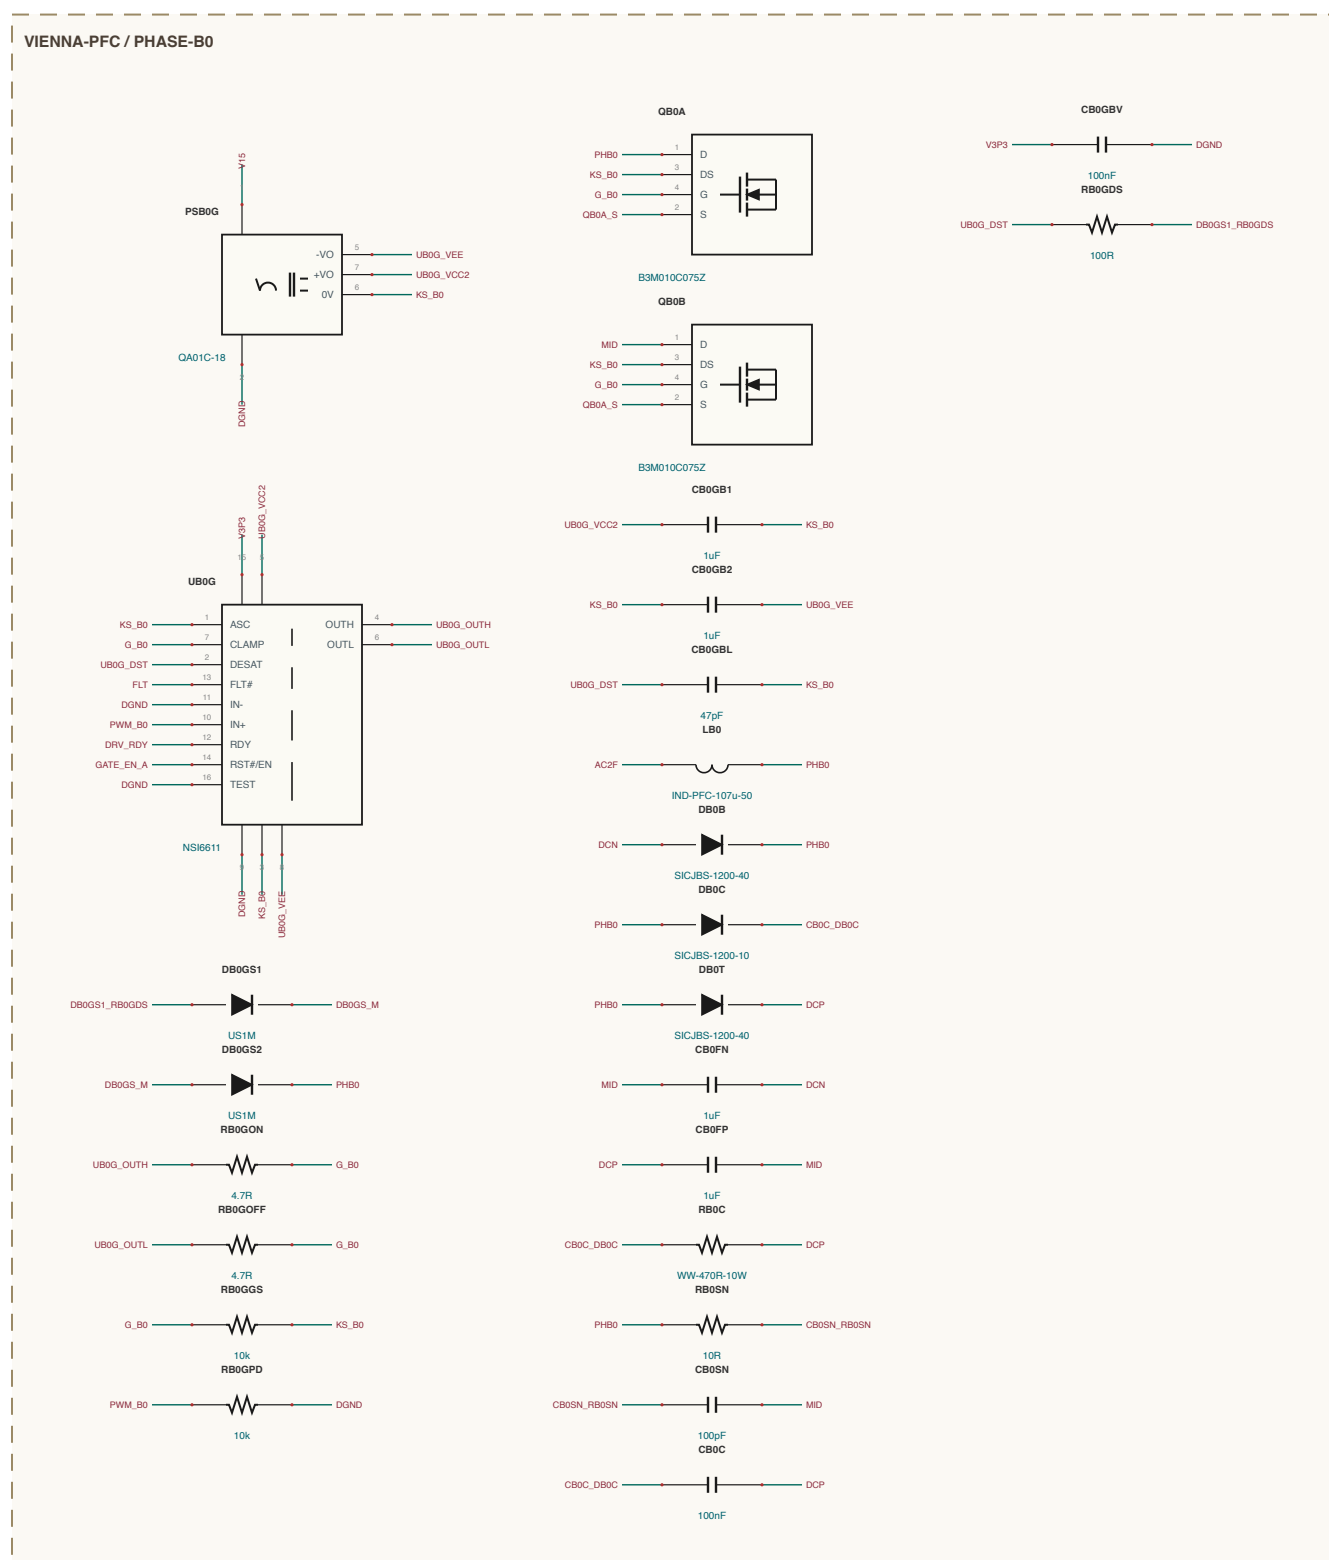
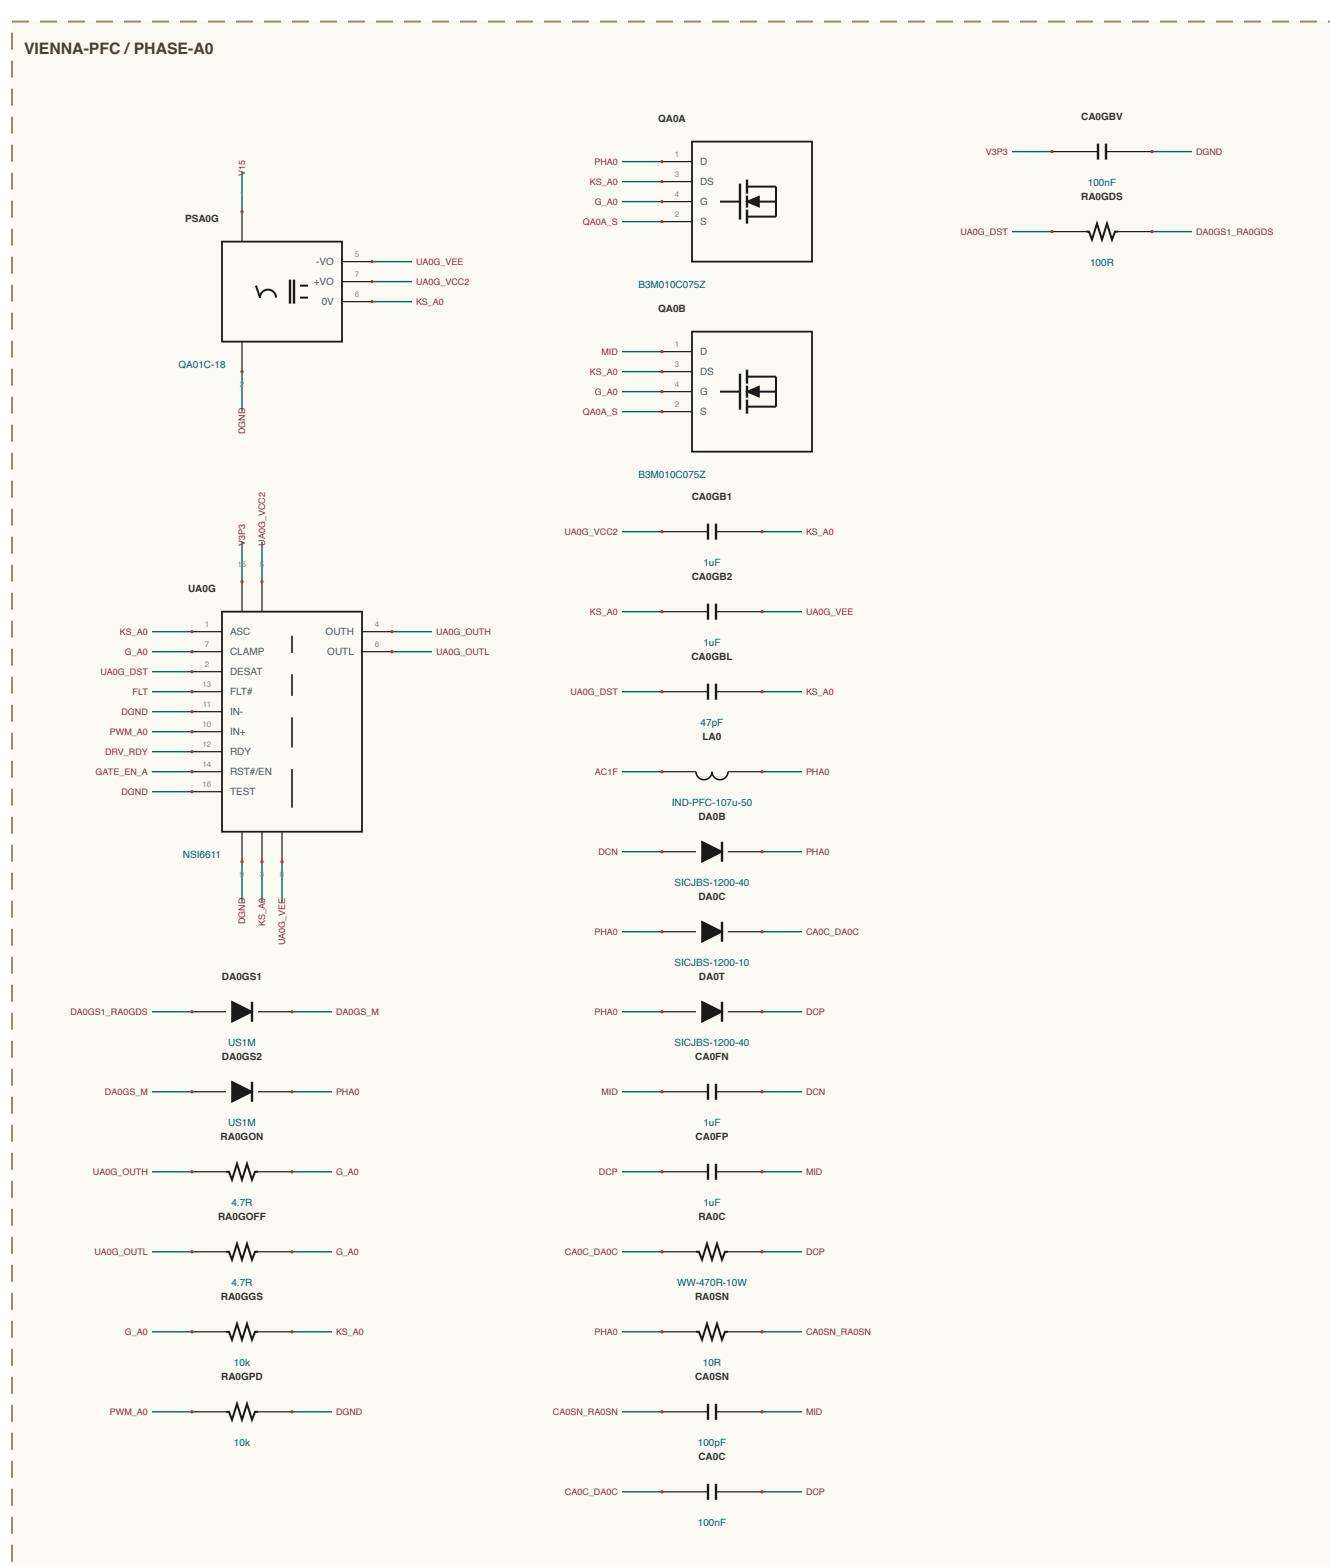
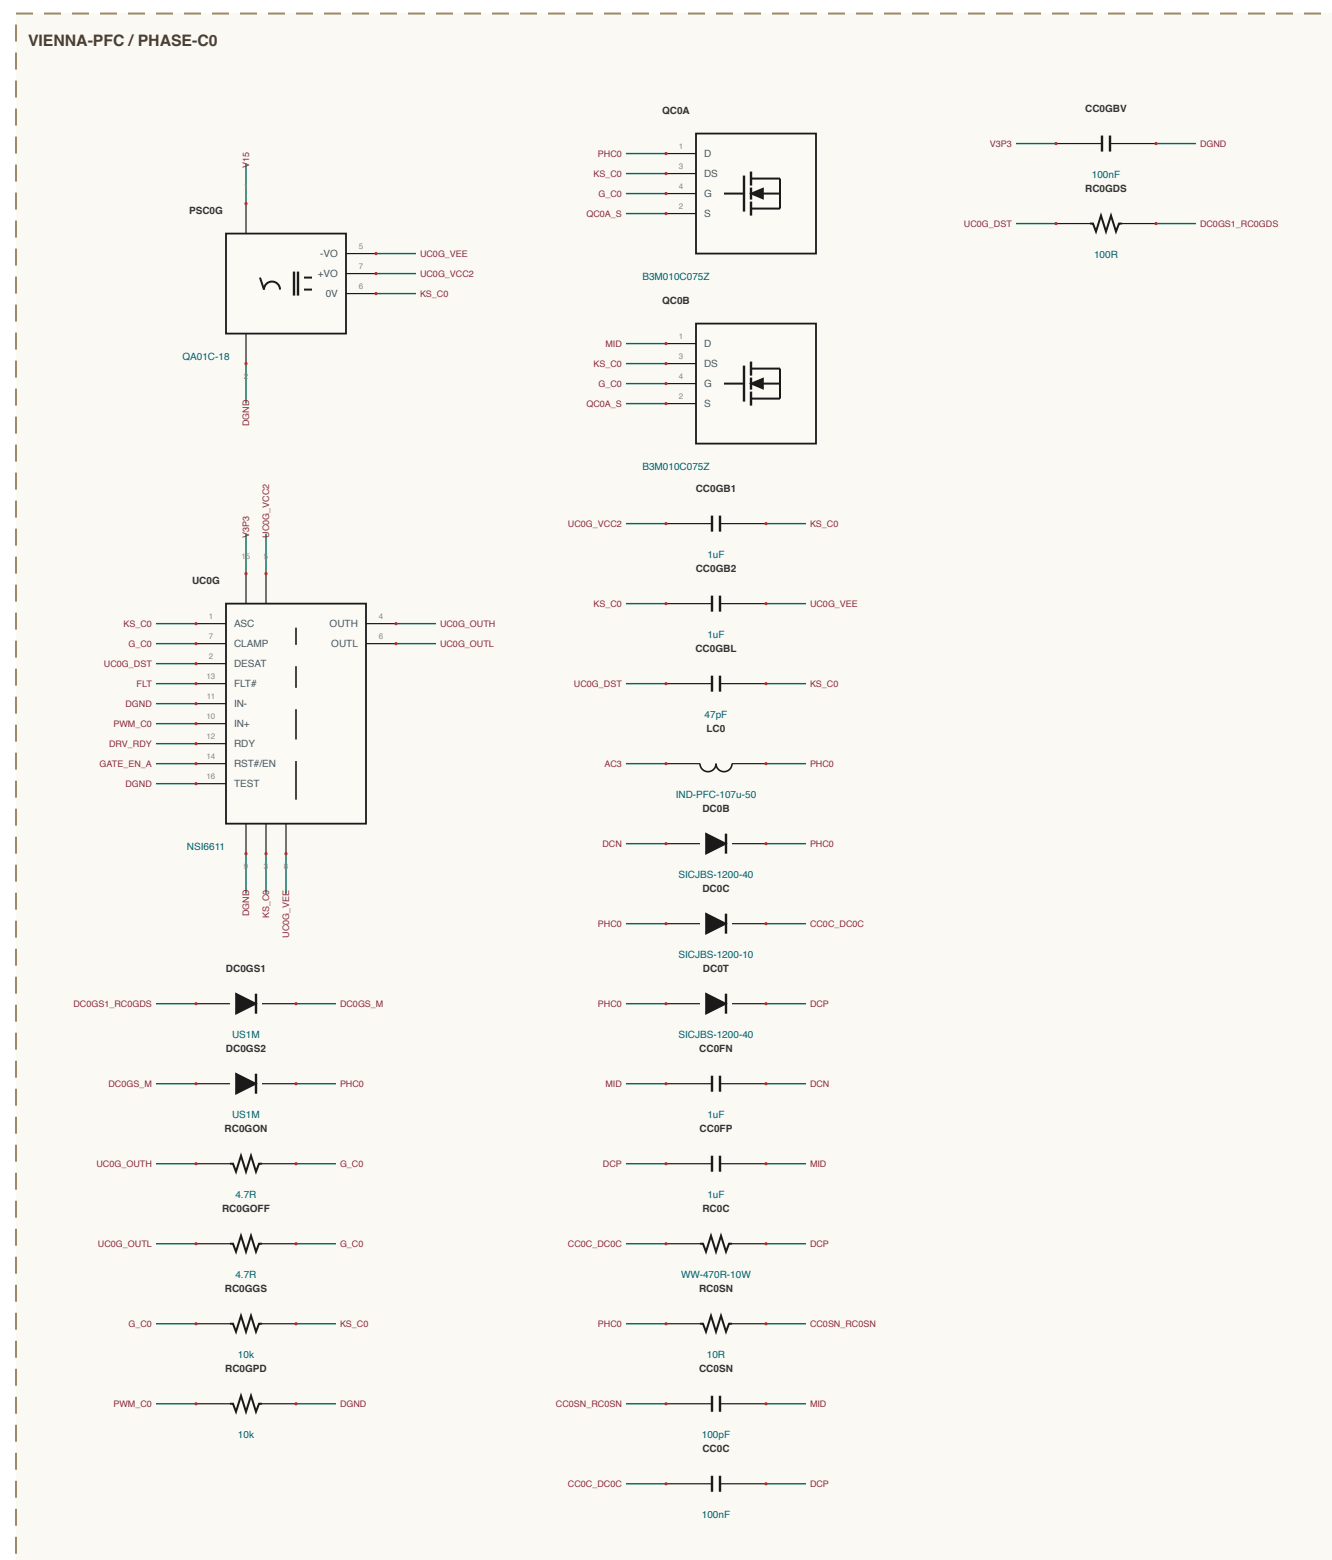
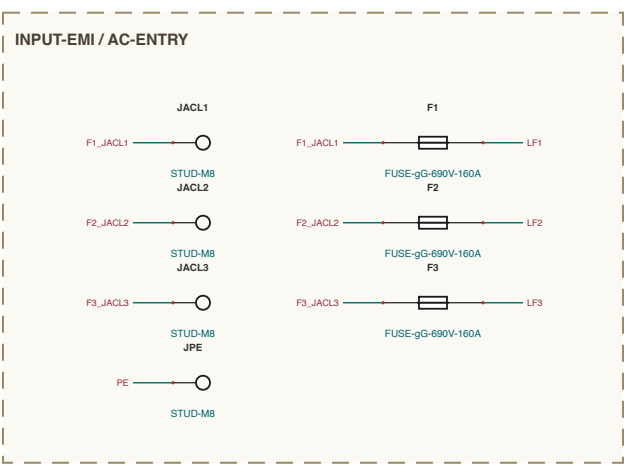
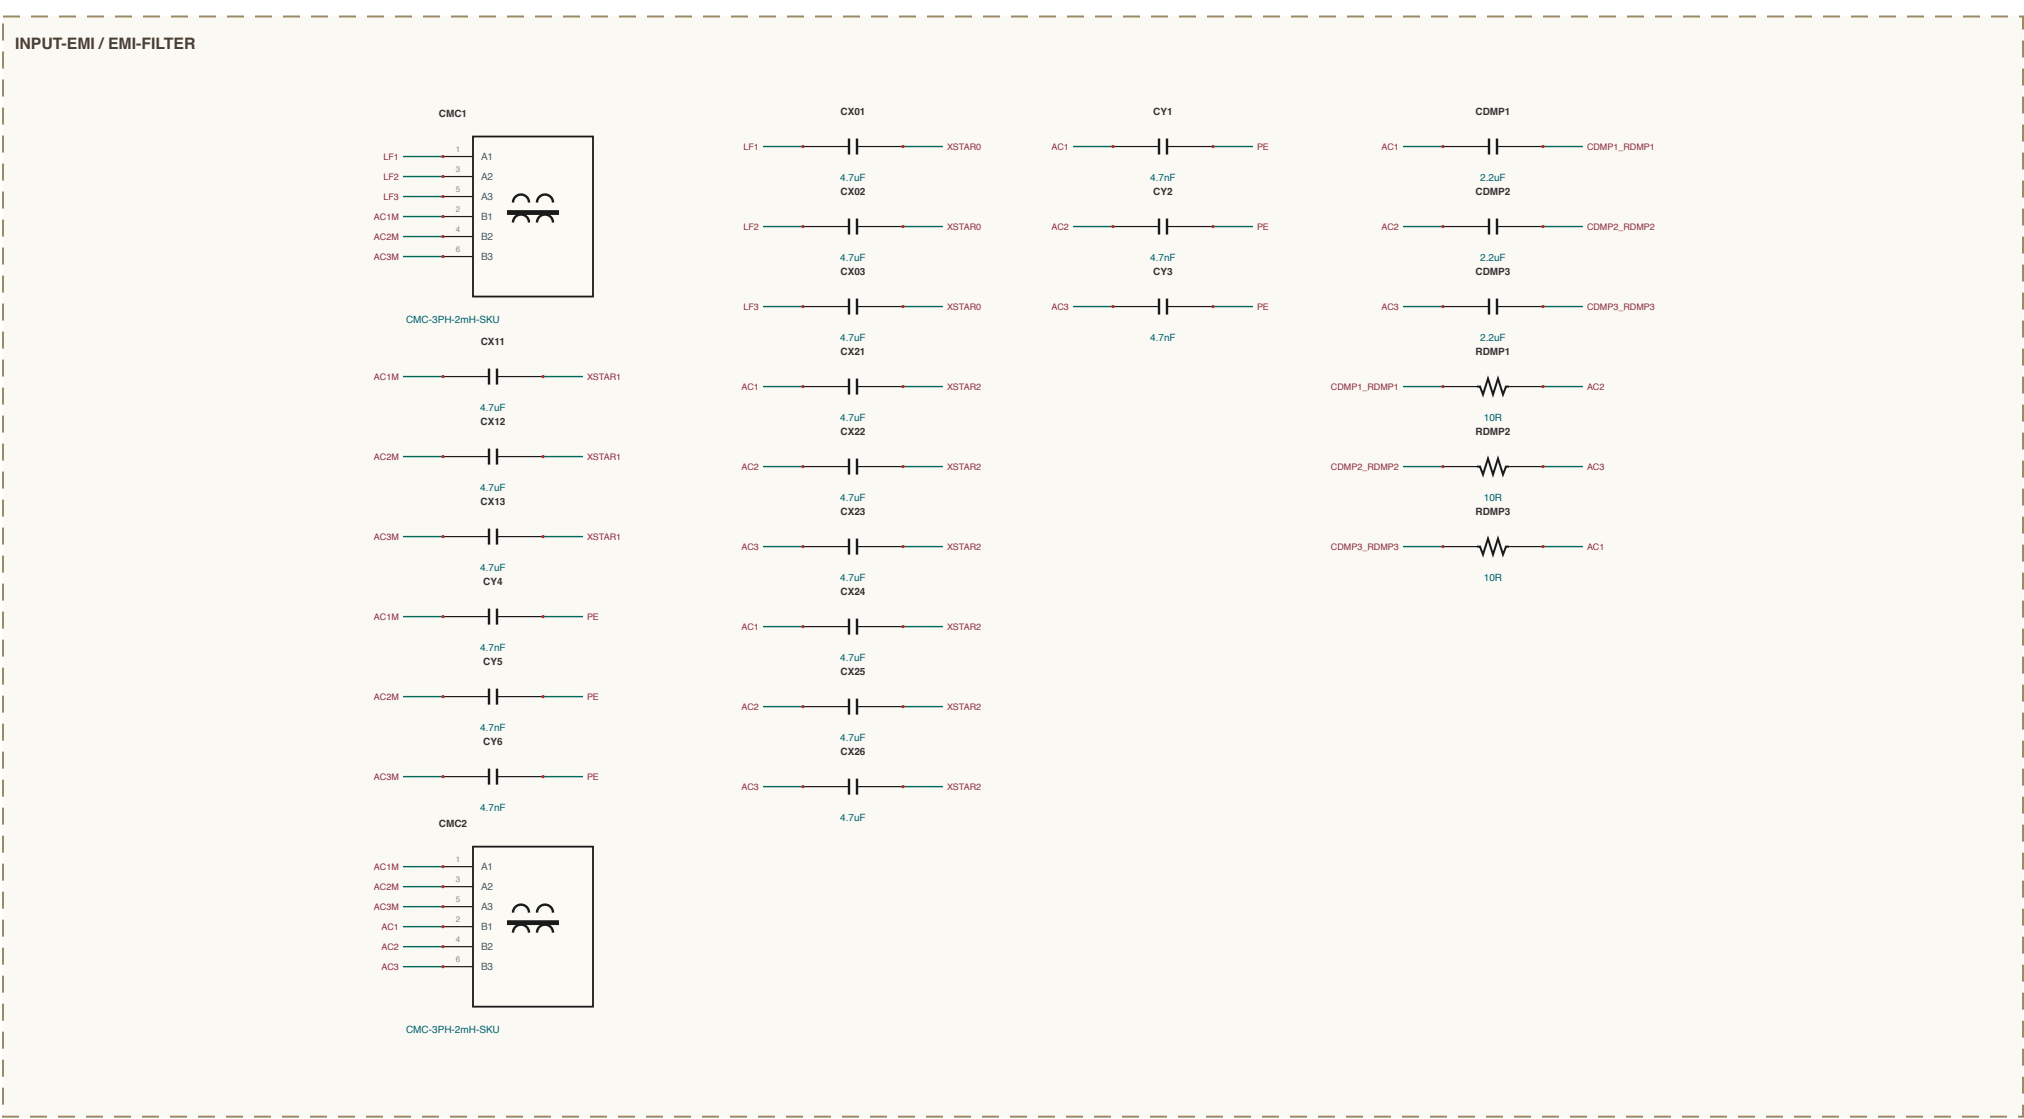
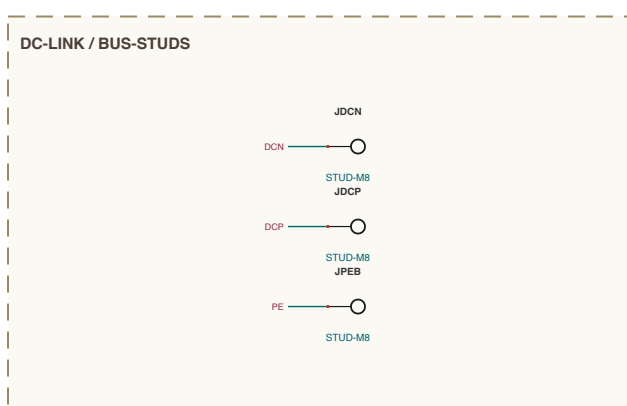
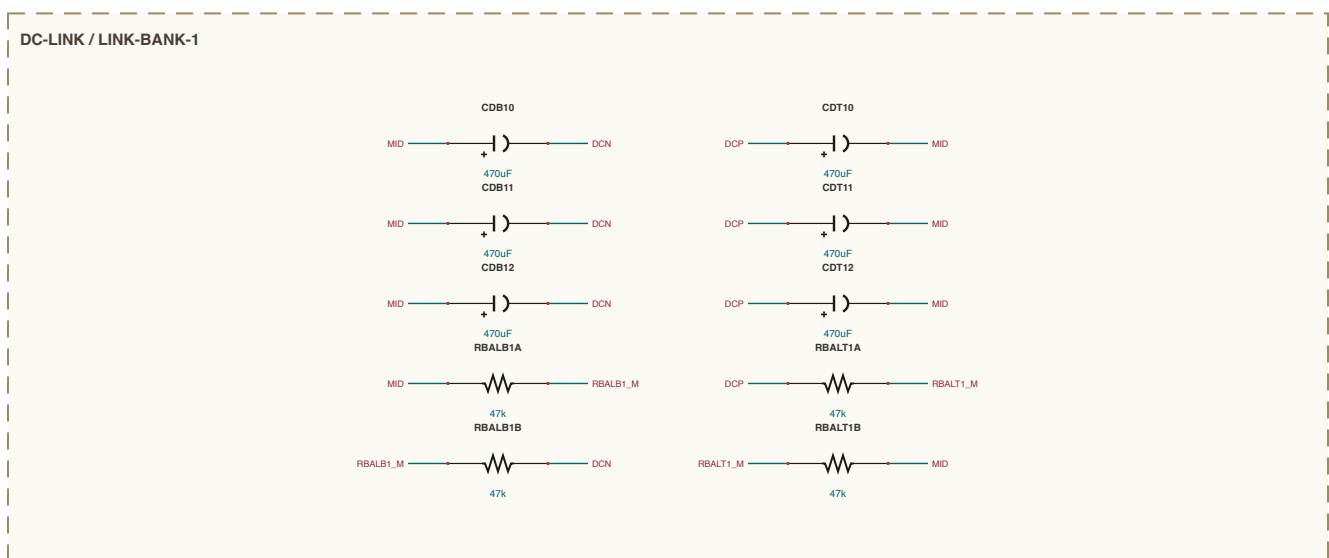
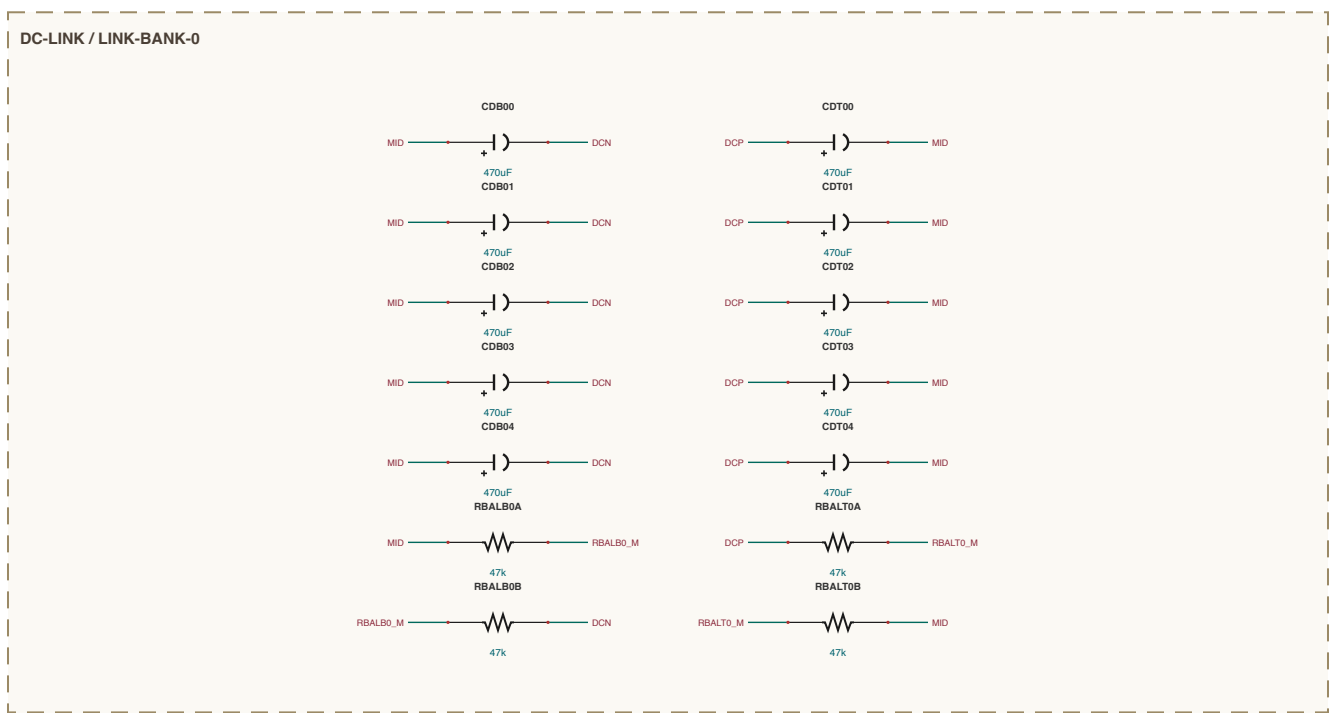
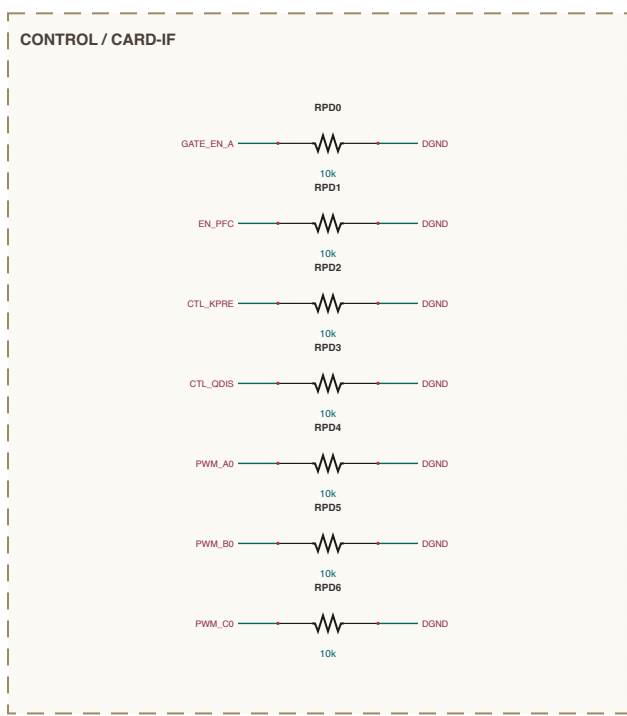
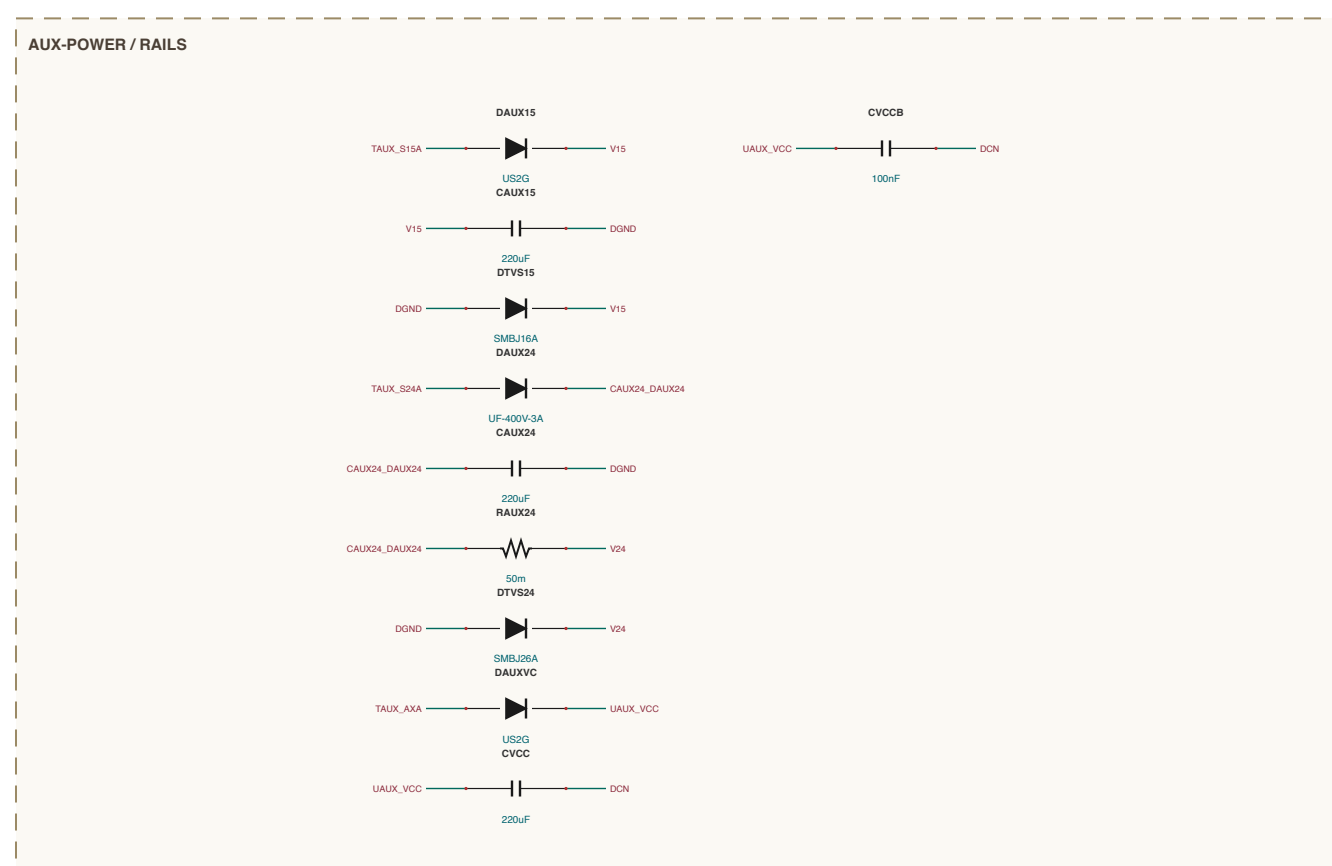
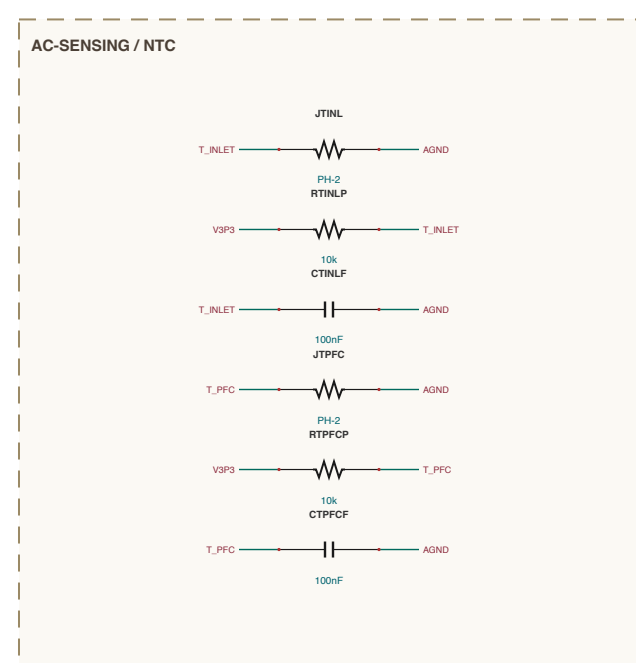
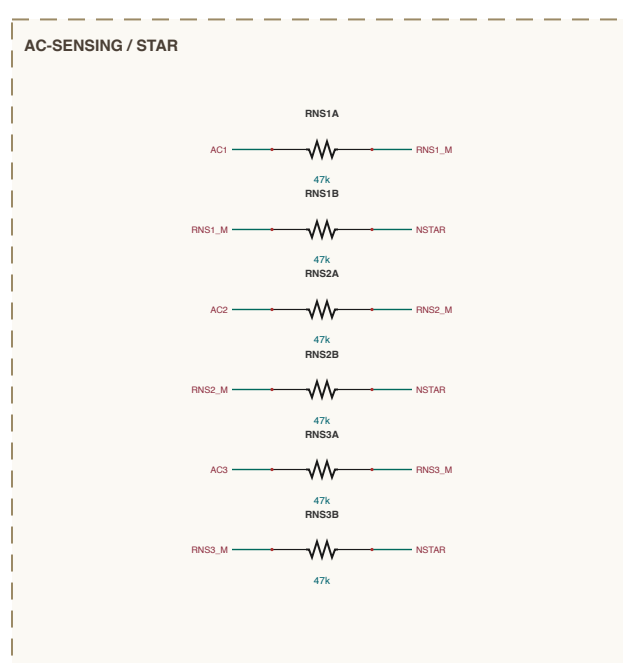
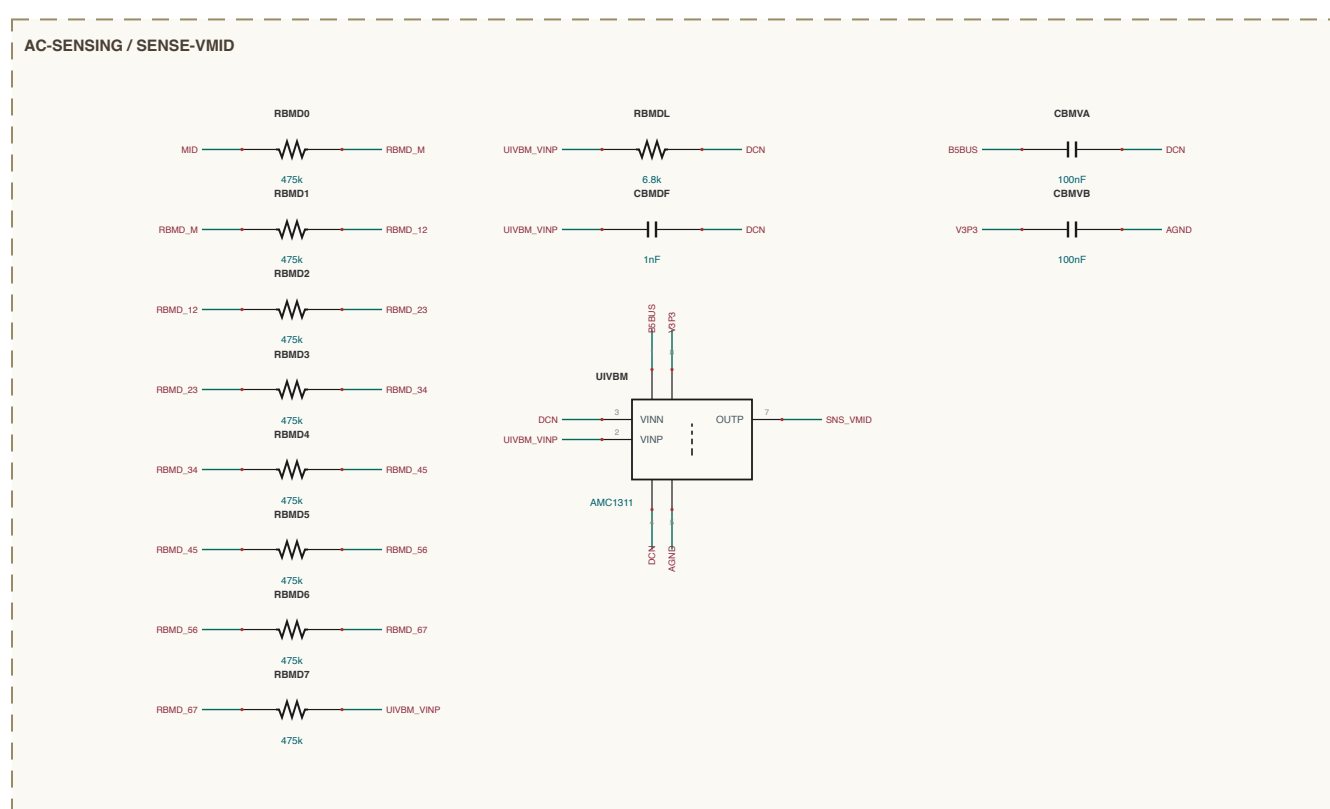
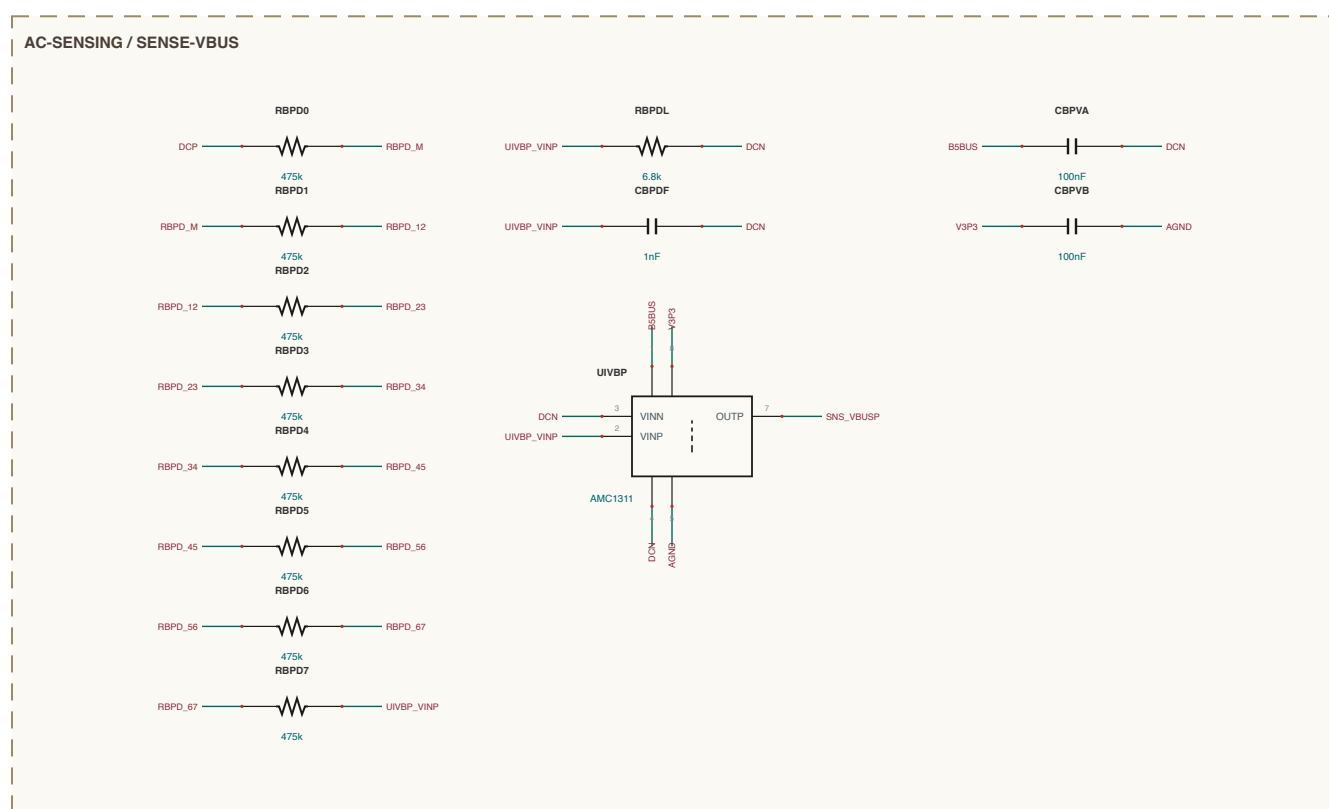
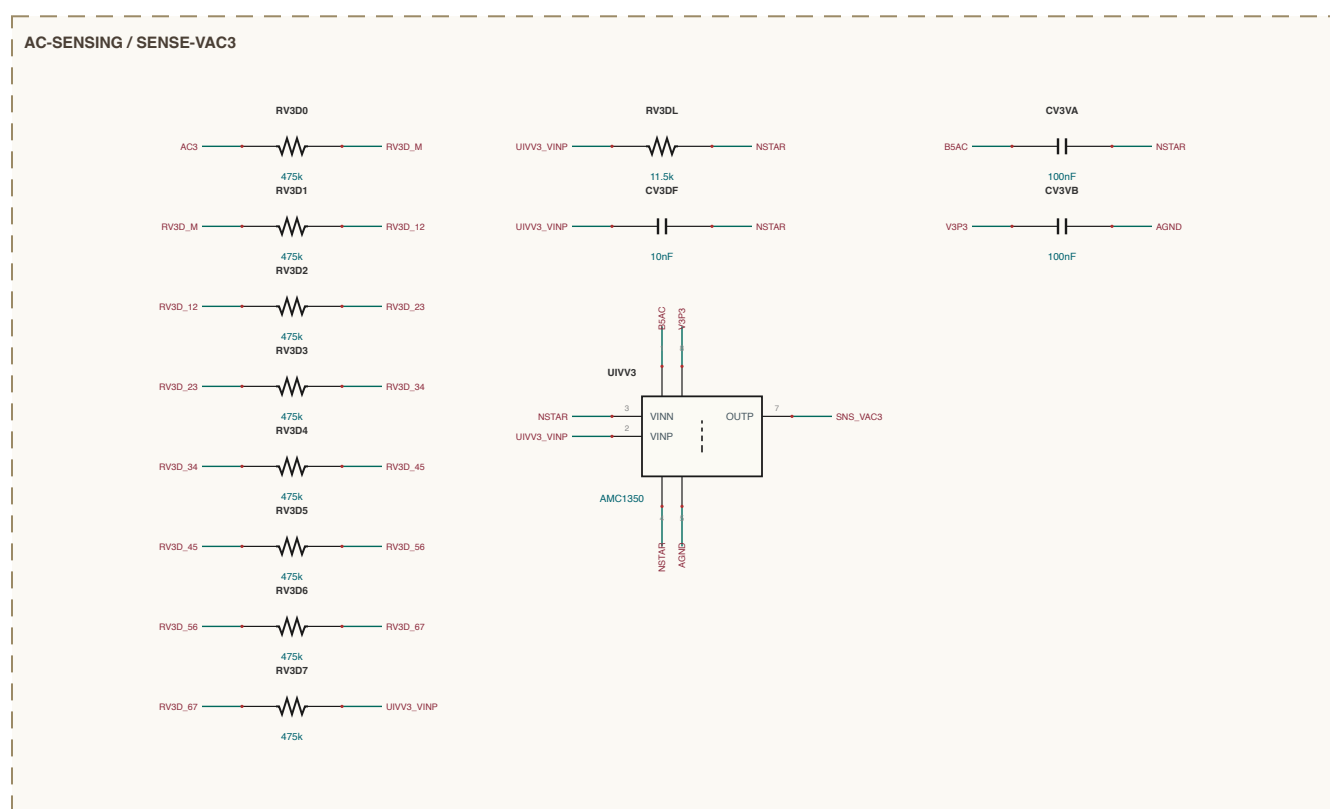
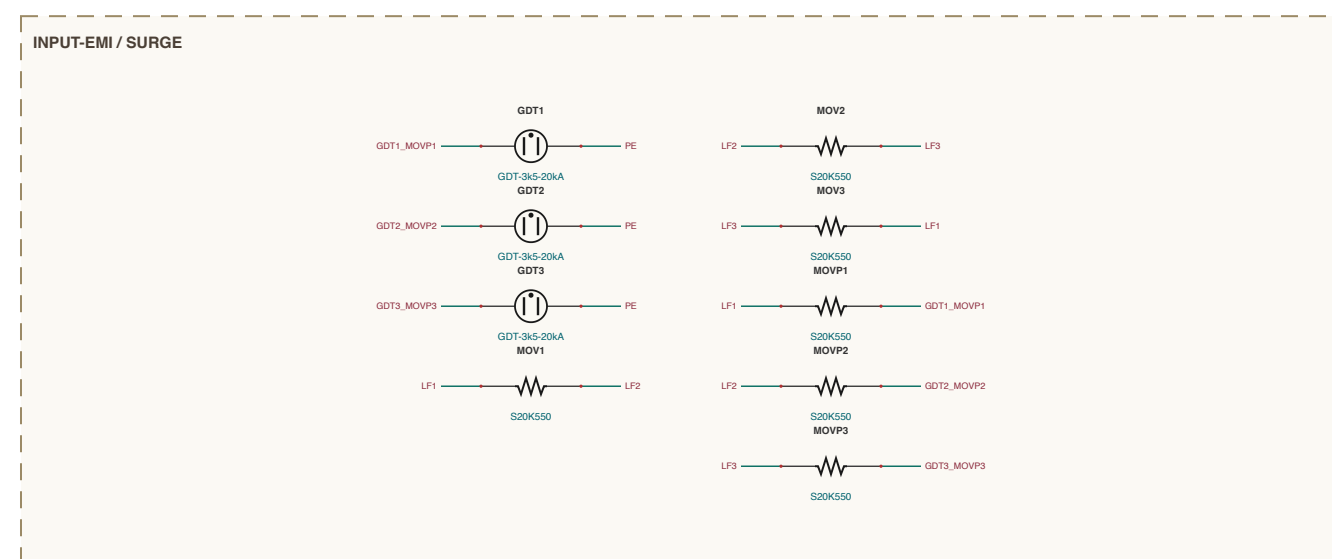
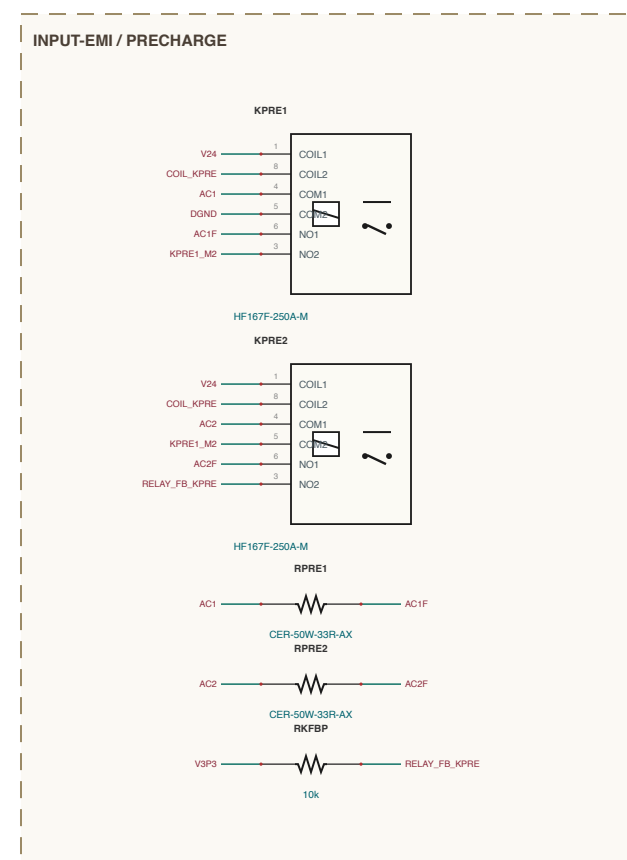
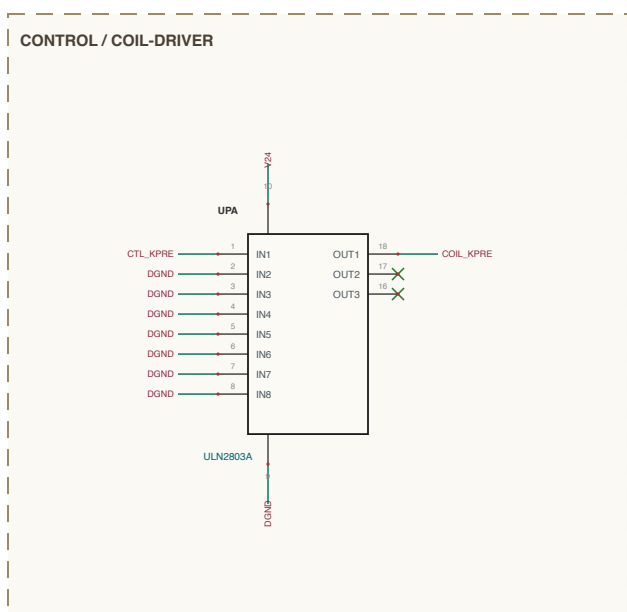
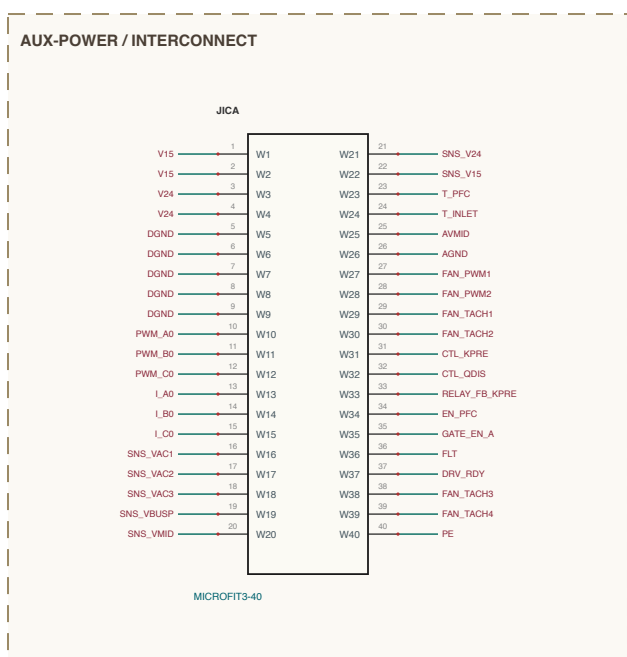
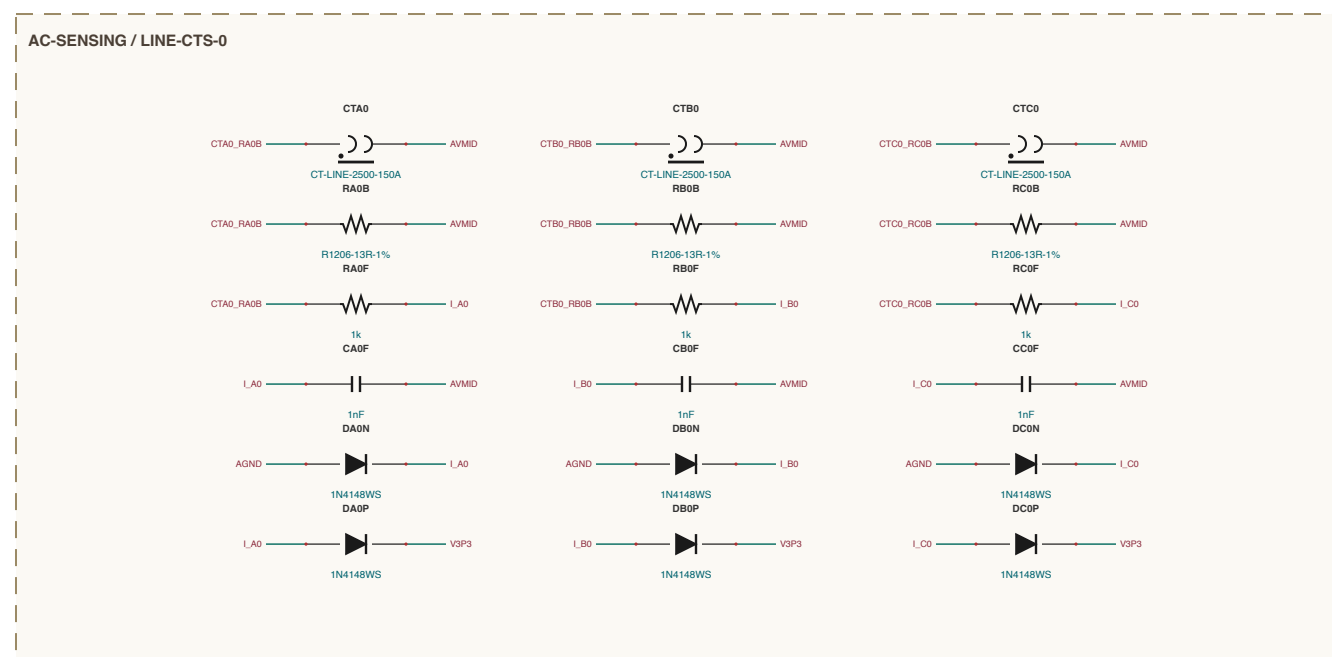
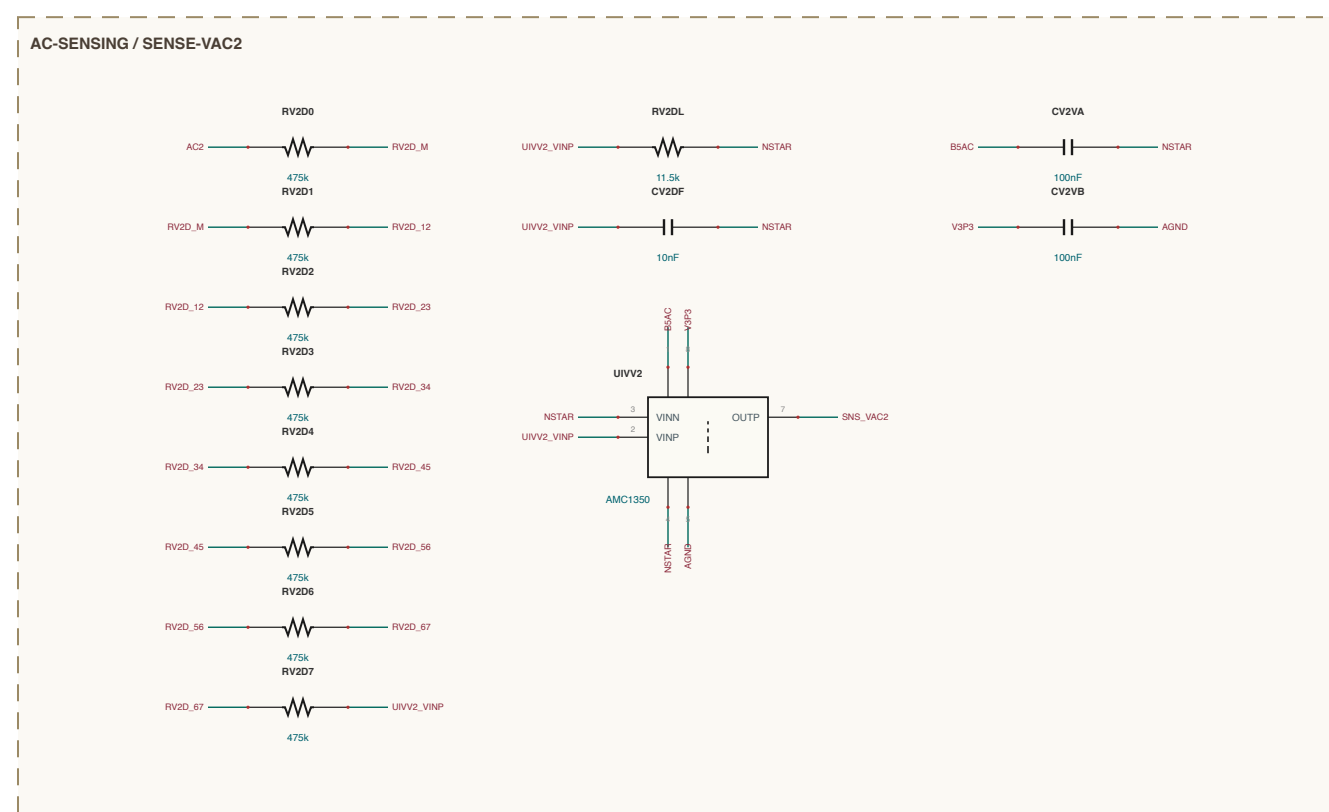
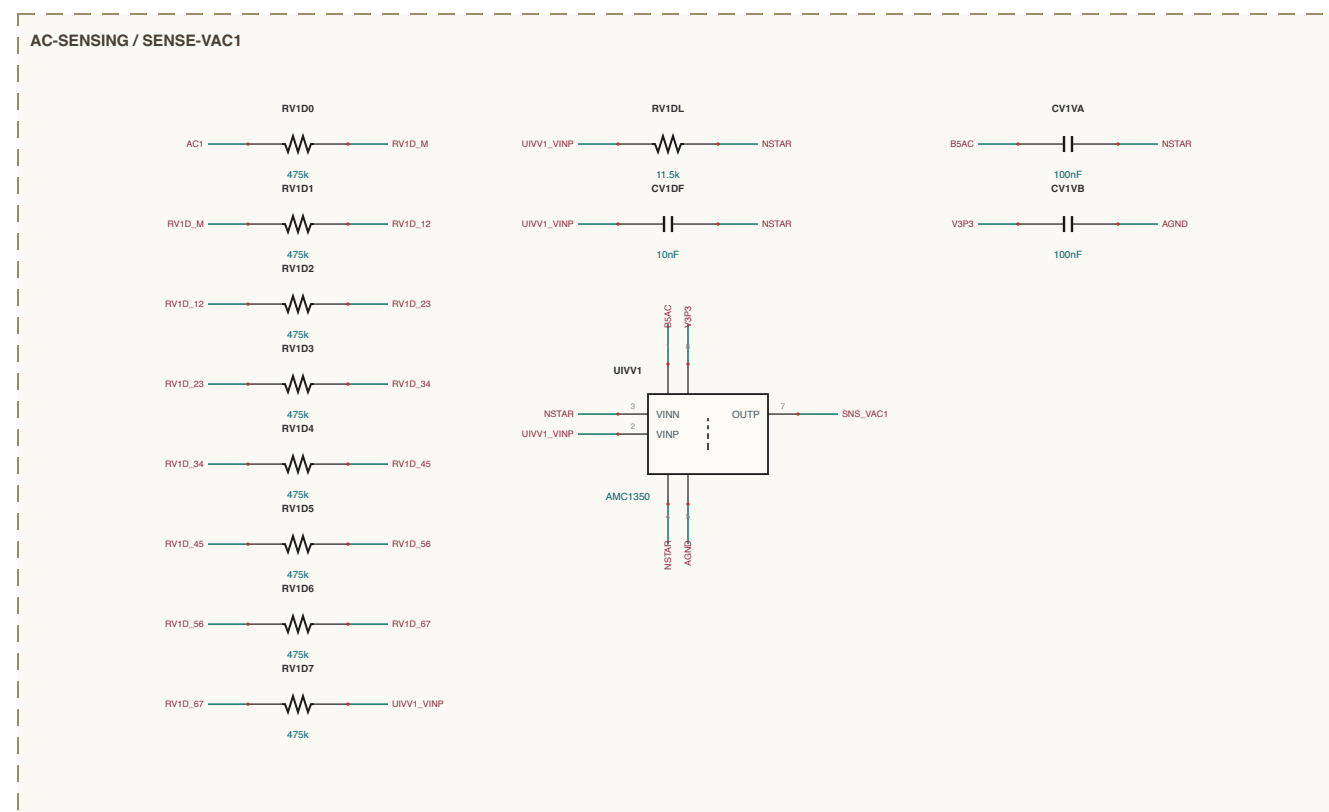


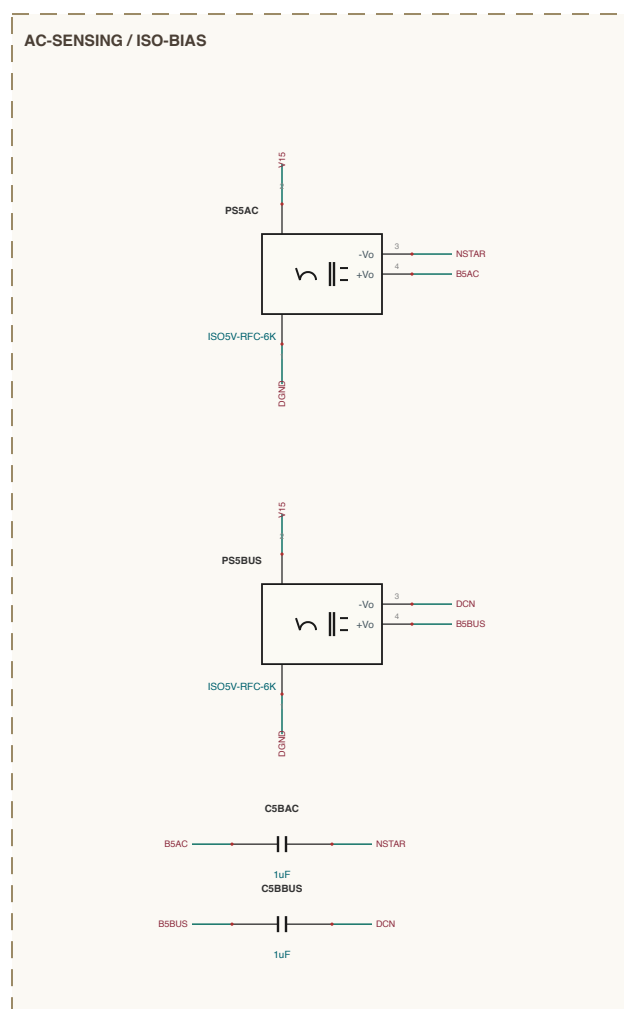

```
SEVEN INDEX
```

```
0-986 Kspn AC-DC (power) - 1 of 1  
AC-BUSSES - 8 sections  
AIA-POWER - 5 sections  
CONTROLS - 4 sections  
DC-LINK - 4 sections  
HOLDERS - 4 sections  
VIBRATION-FPC - 2 sections  
  
res 0.4 - 75 sections - 382 components
```

NET NAMING

Internal junctions are named for what they join

Junctions of 0-fibres made at that IC join e.g. UNICA_VMP

Systems: M midpoint of a series pair e.g. BBALTA_M

Systems: cross-hip between B-systermic e.g. BVALD_K1

all others are explicit design rules

MAGNETICS CONSTRUCTION

Identify per [data/magneticsAnd](#) (Crima, gap, fill, acceptance loss free Trans)

[2] LAM: Loss = $179.28u$ [wandauf](#) [CATHLOON, Ac2H7, Ac2H7 = 1 tot 100 = 0.10 TETAP, wandauf = 0.123, 3.4 pp (E81)]

SBH E8B C8C1 = $13x$ K2 A.7H in 3 star atropis + C8C2 + PC damper; DE DBI choices divided

at TARM, questions