
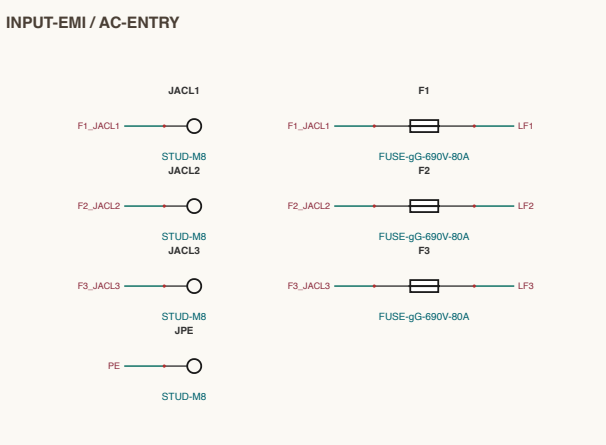
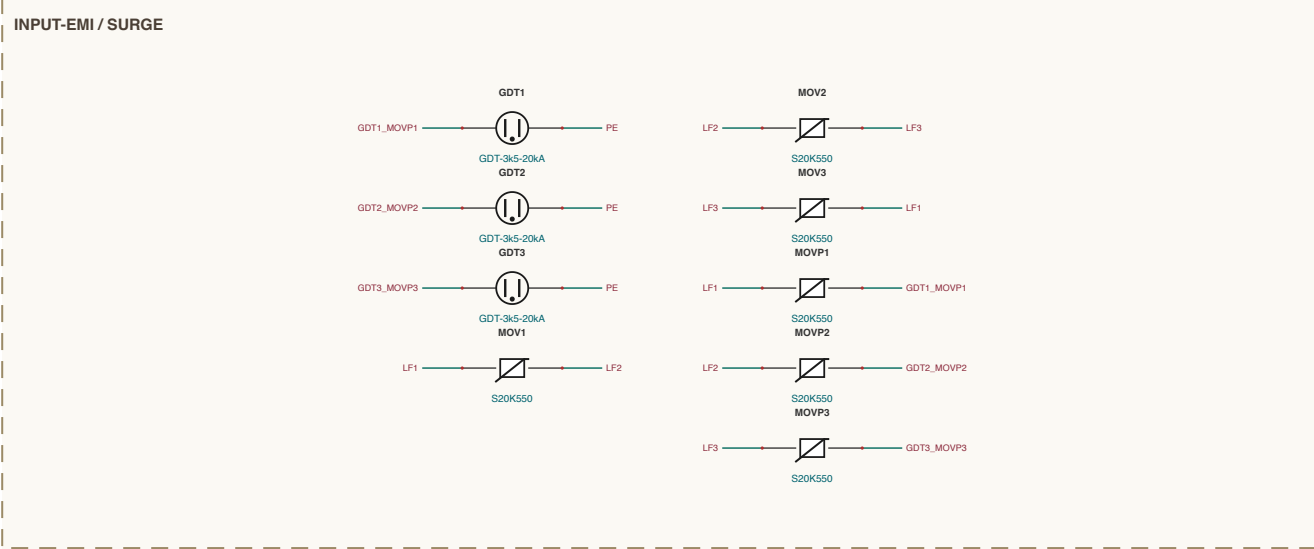
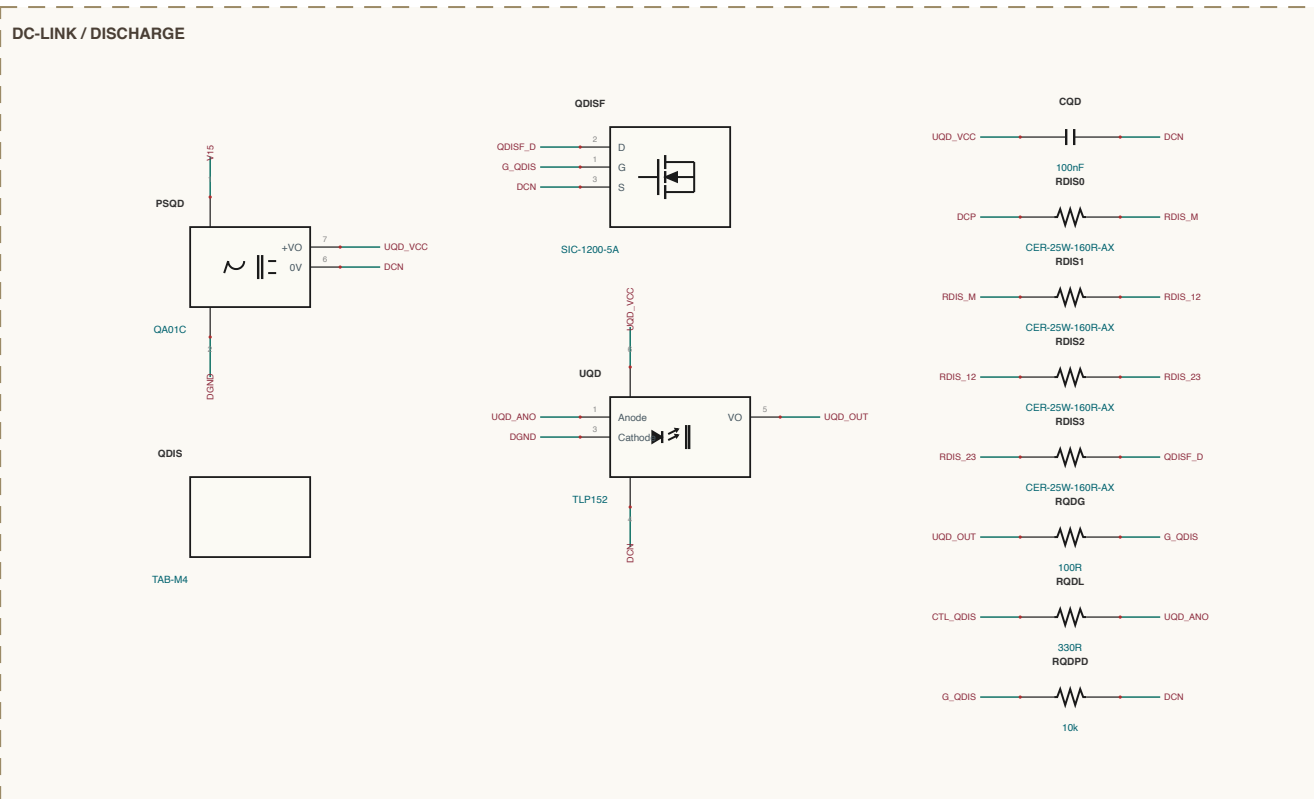
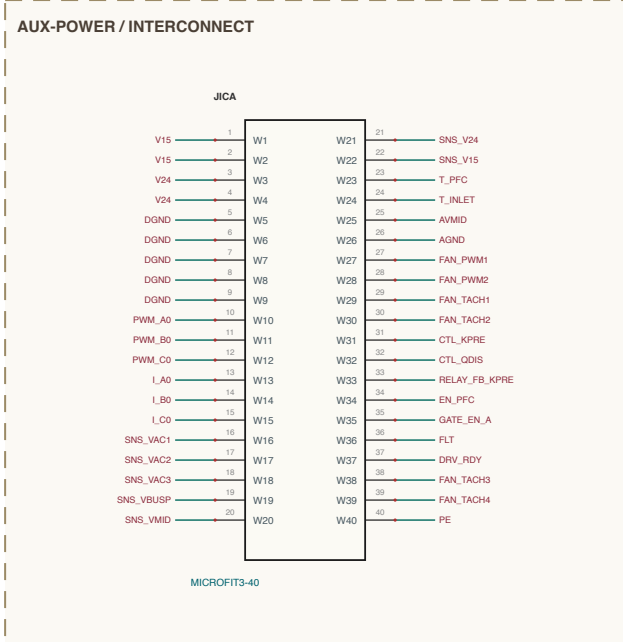
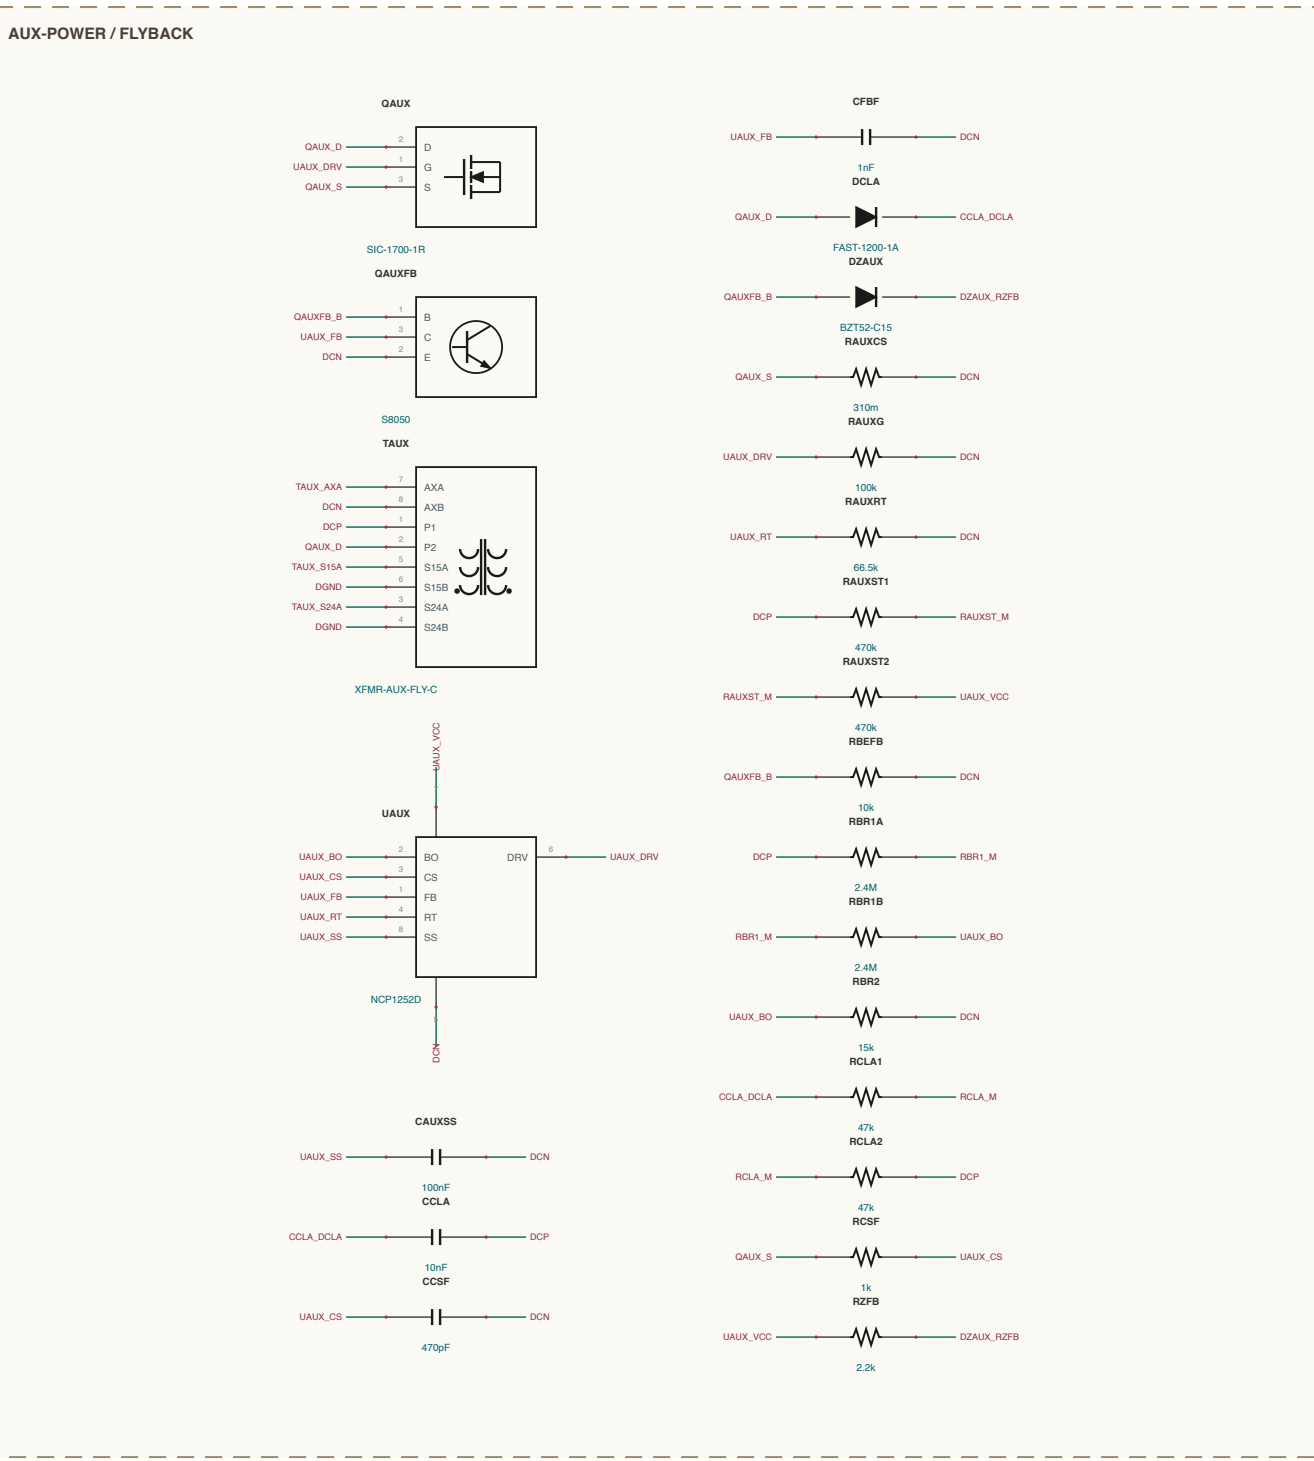
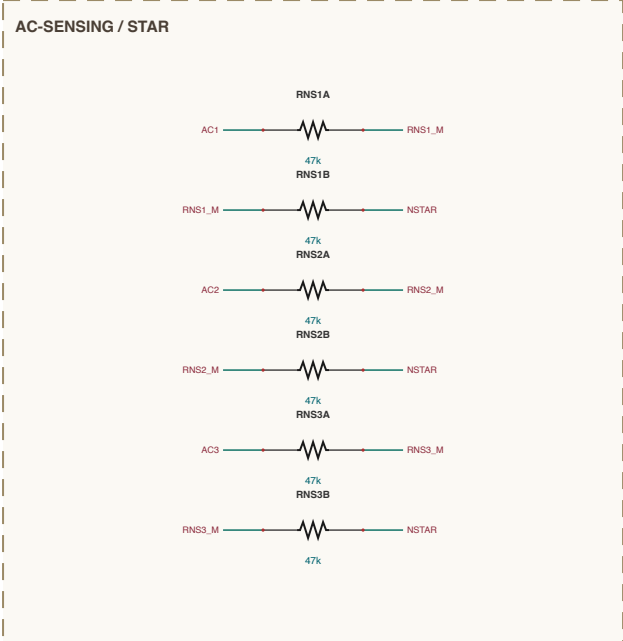
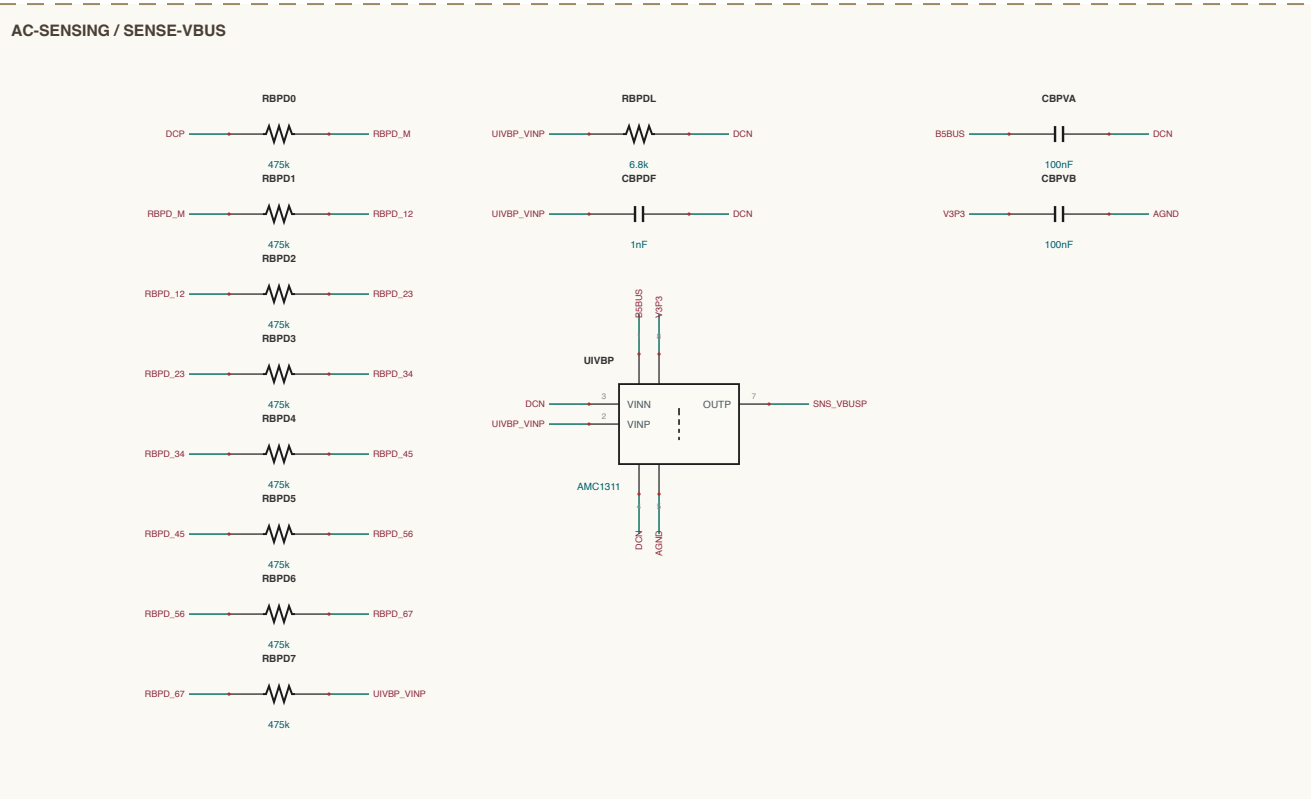
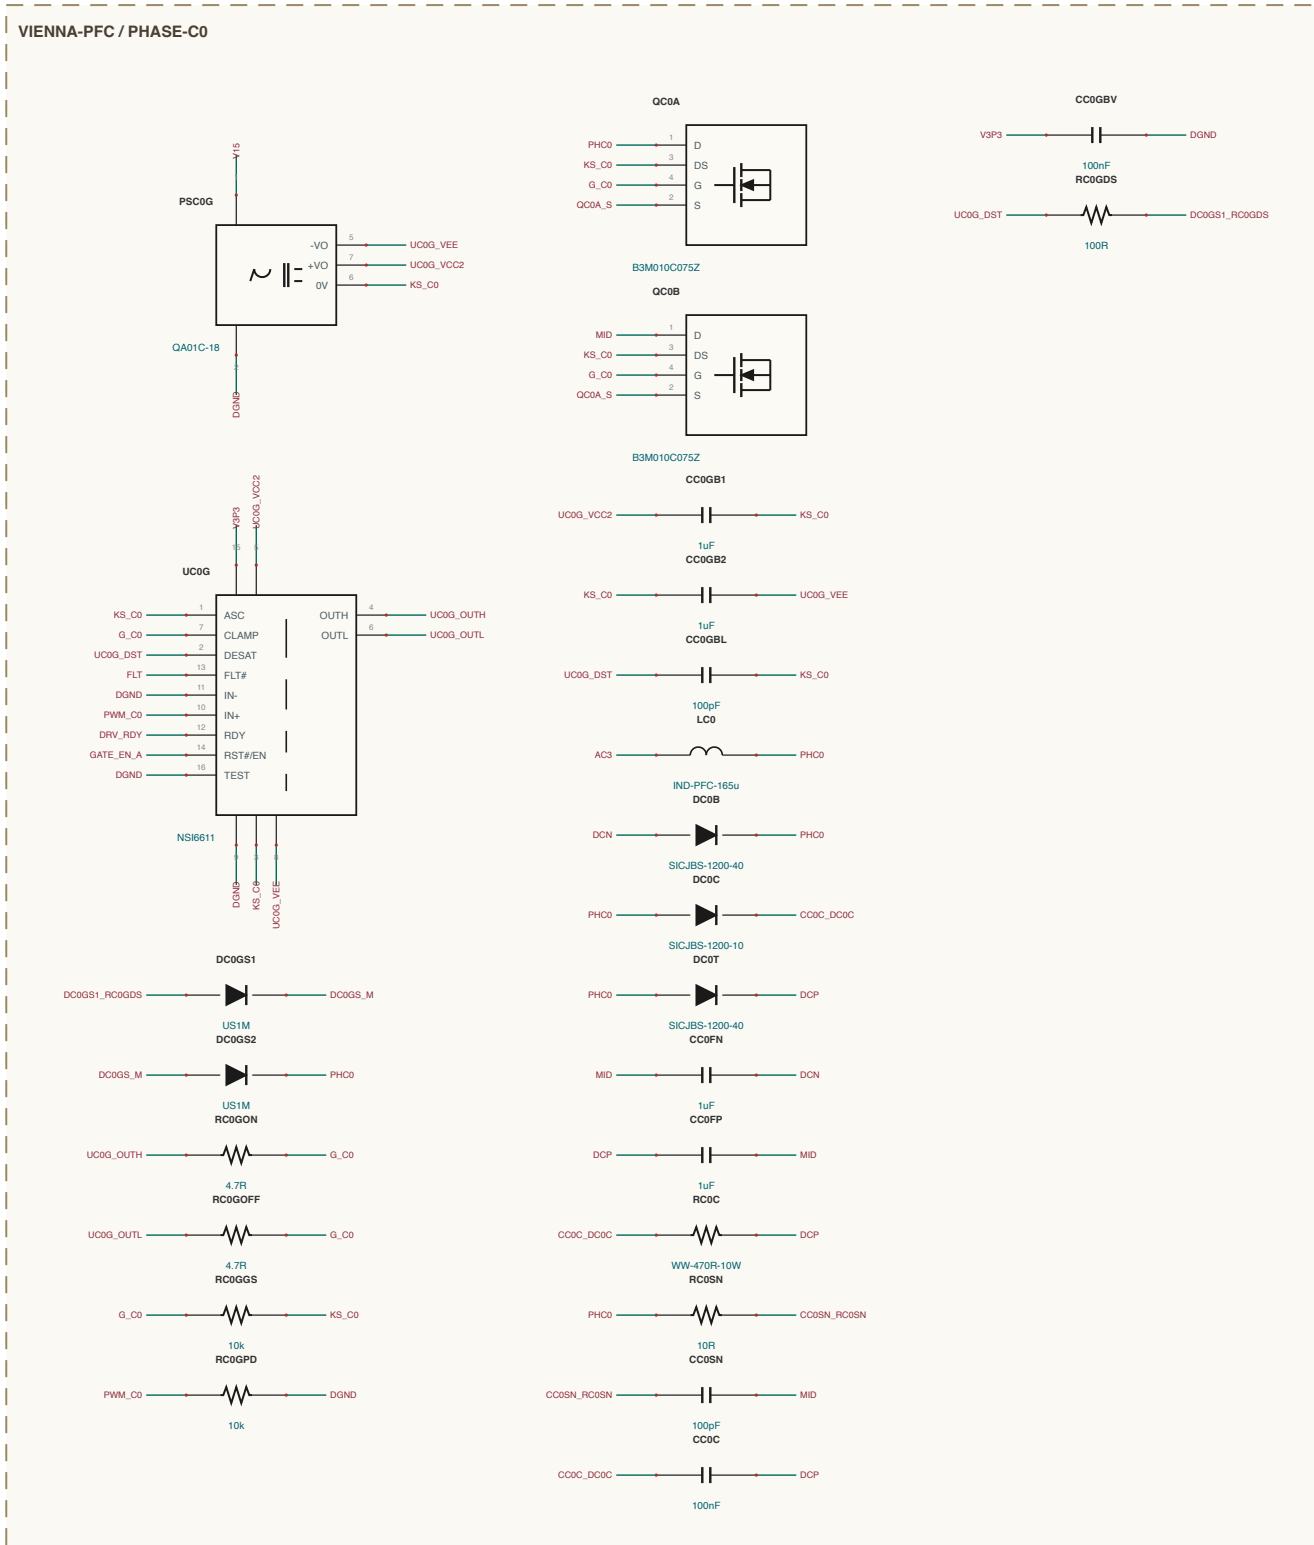
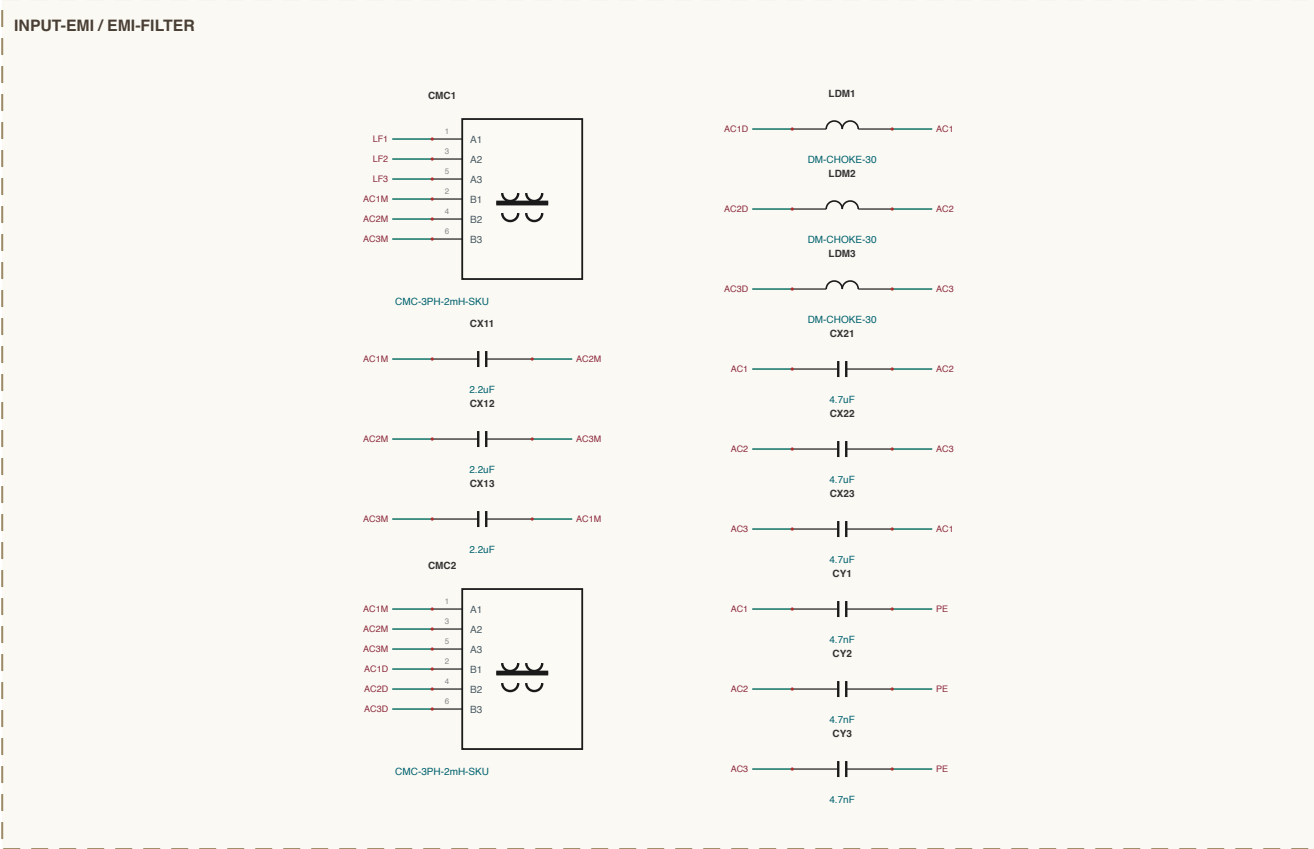
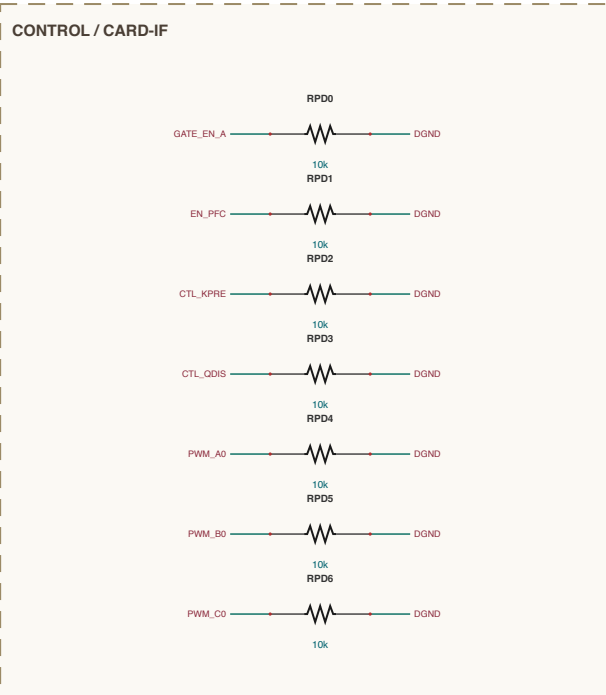
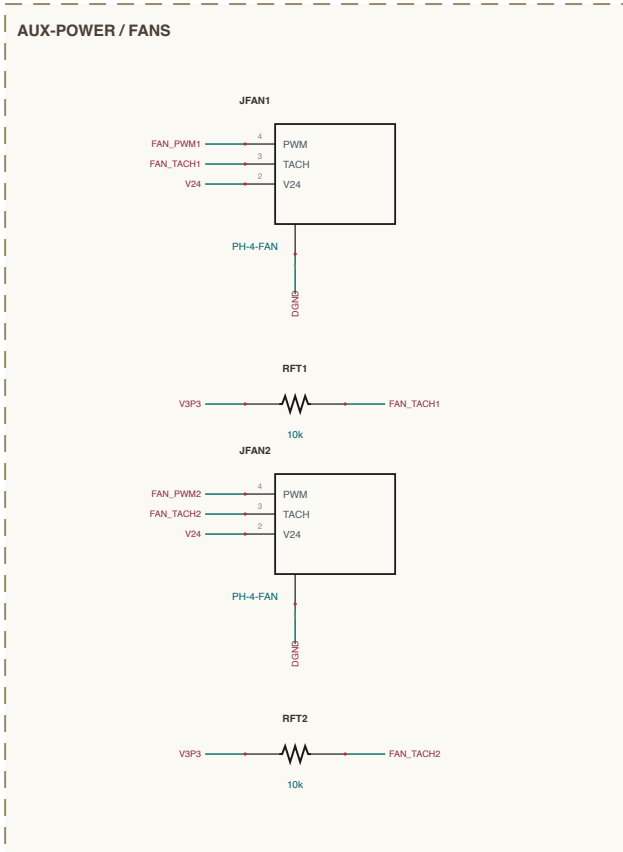
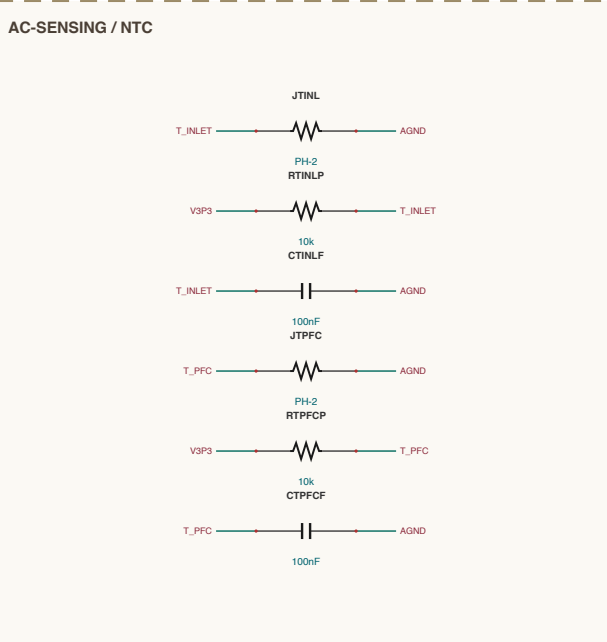
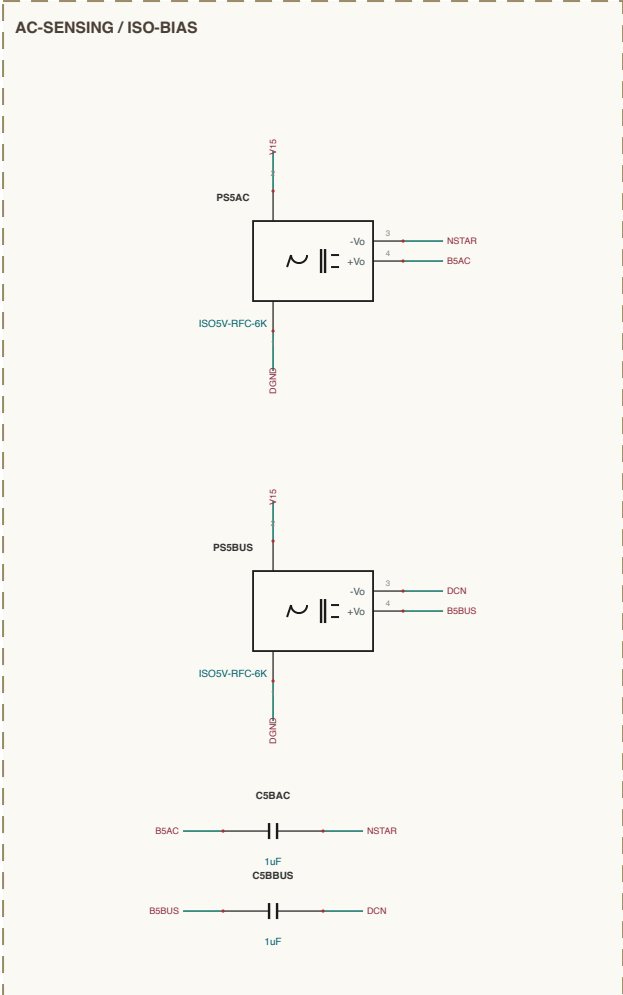
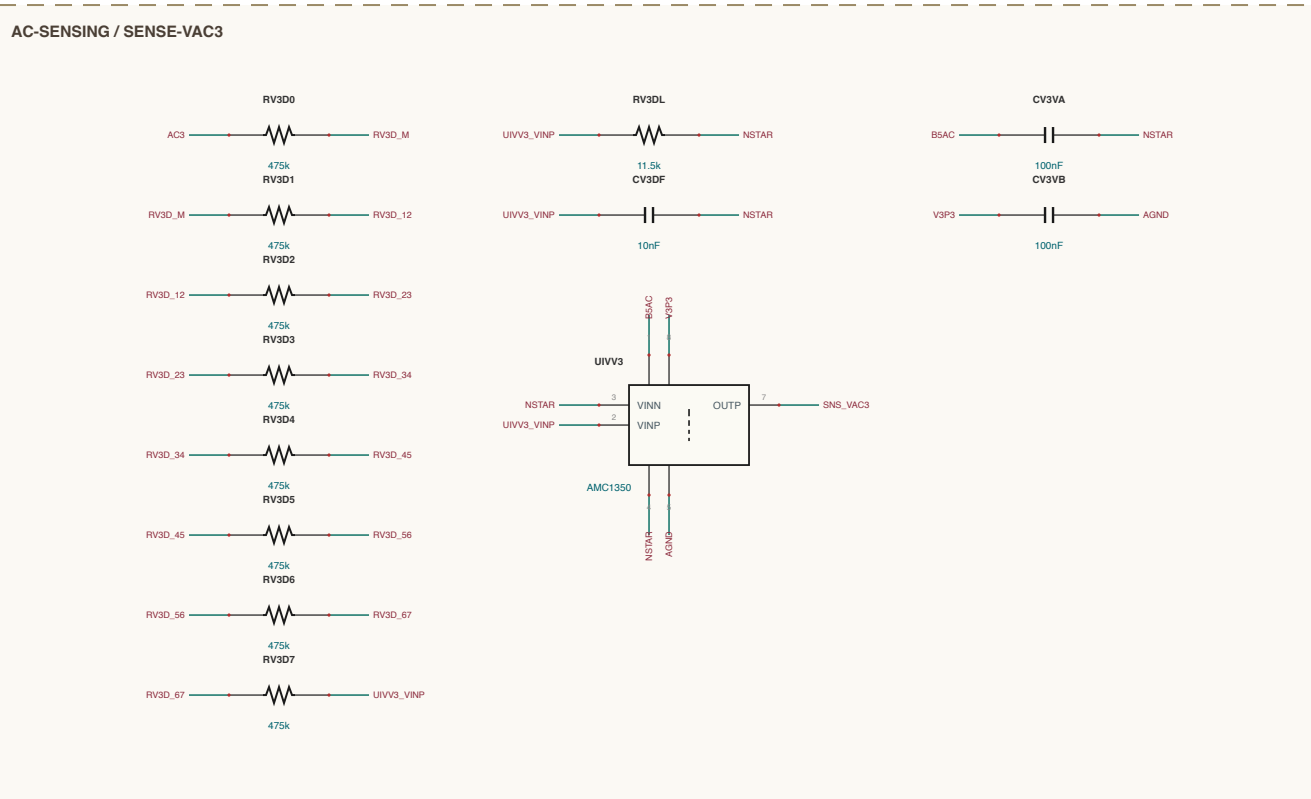
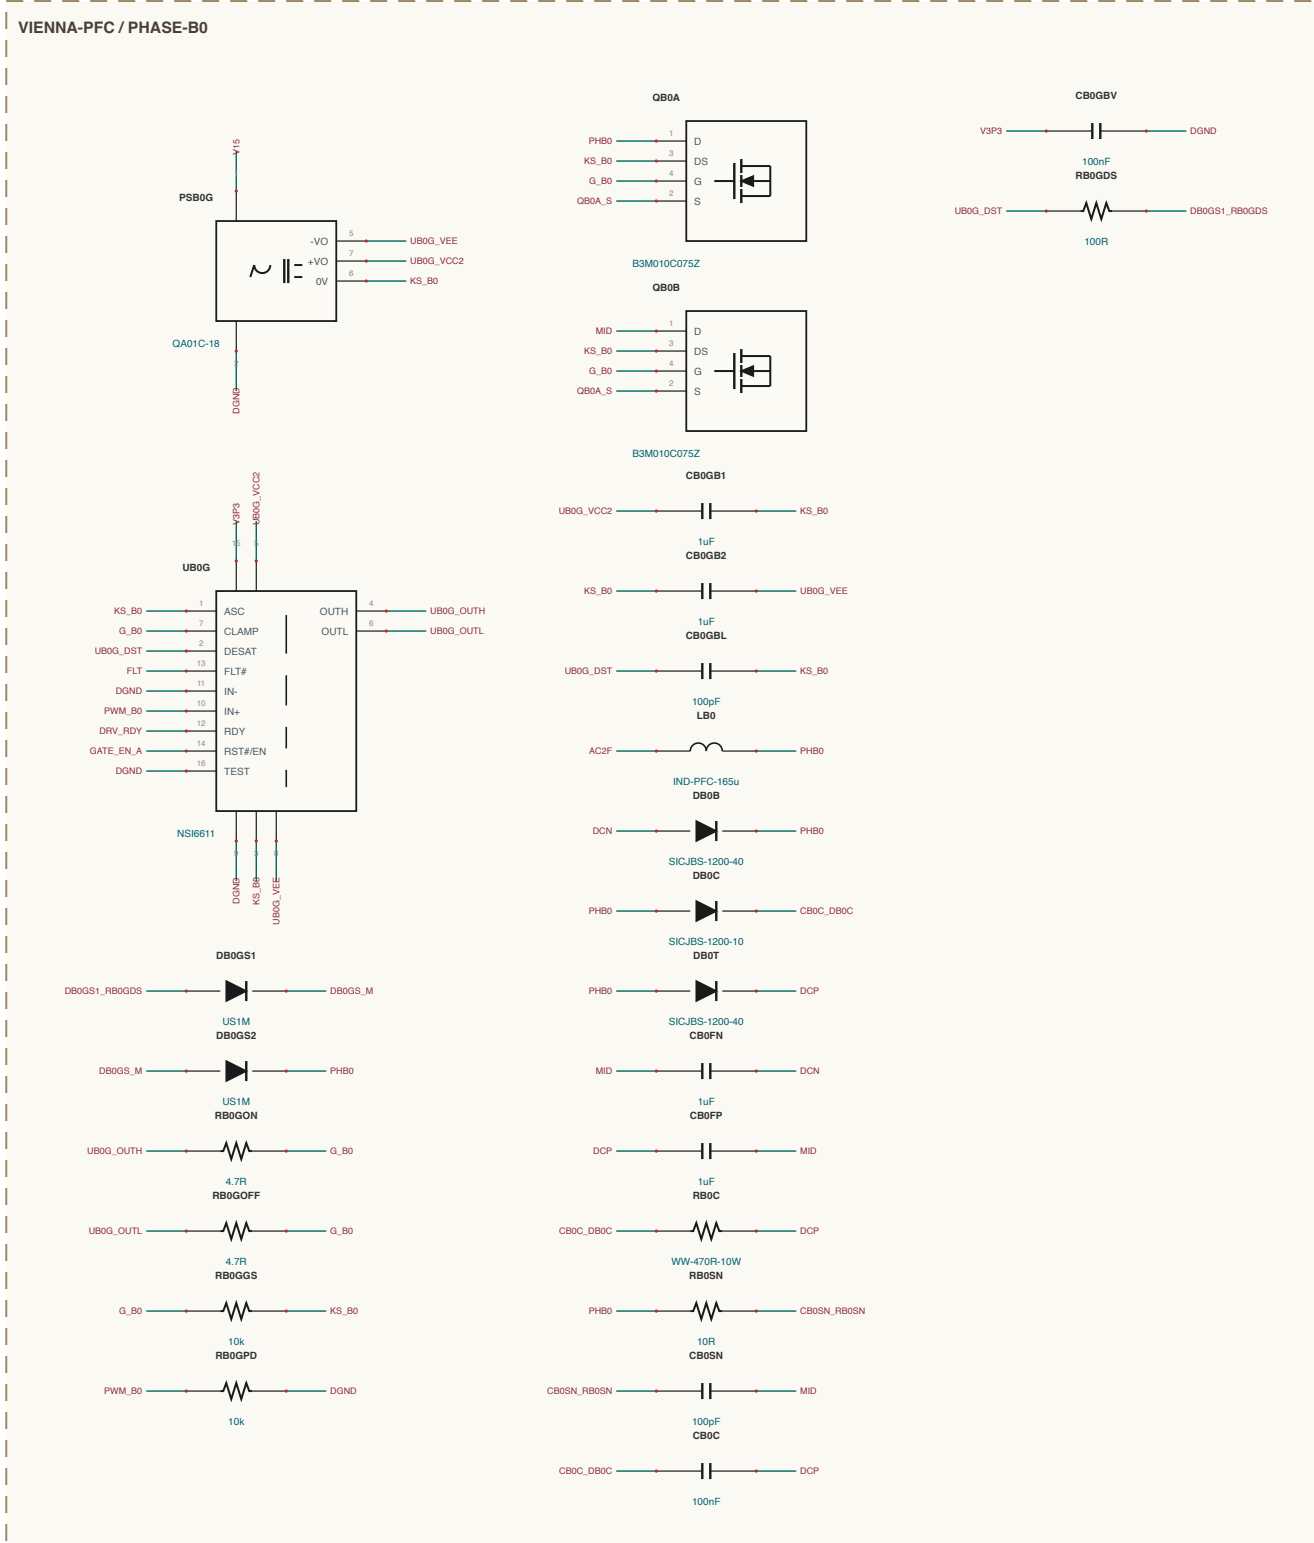
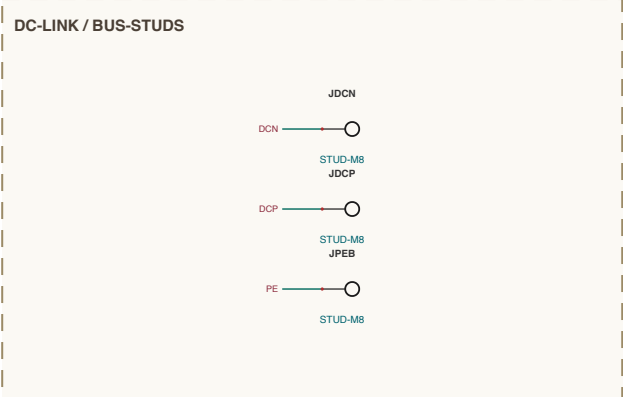
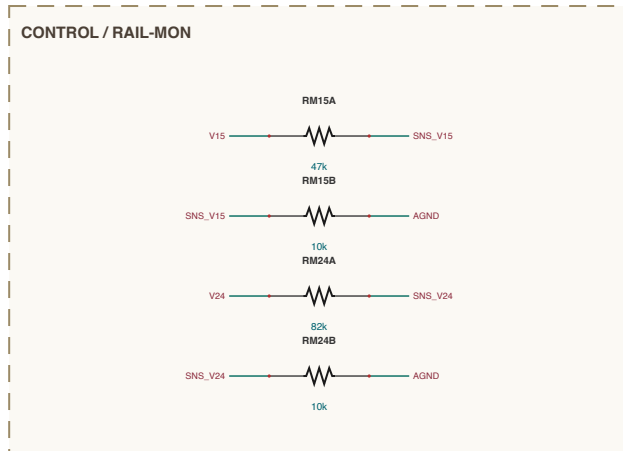
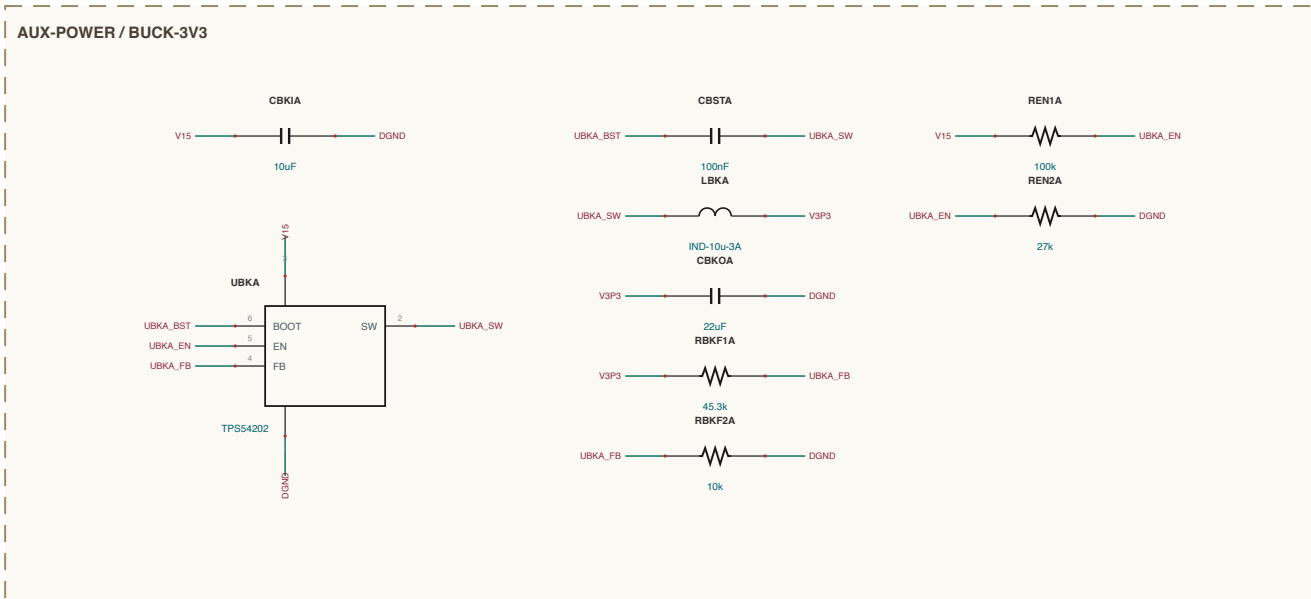
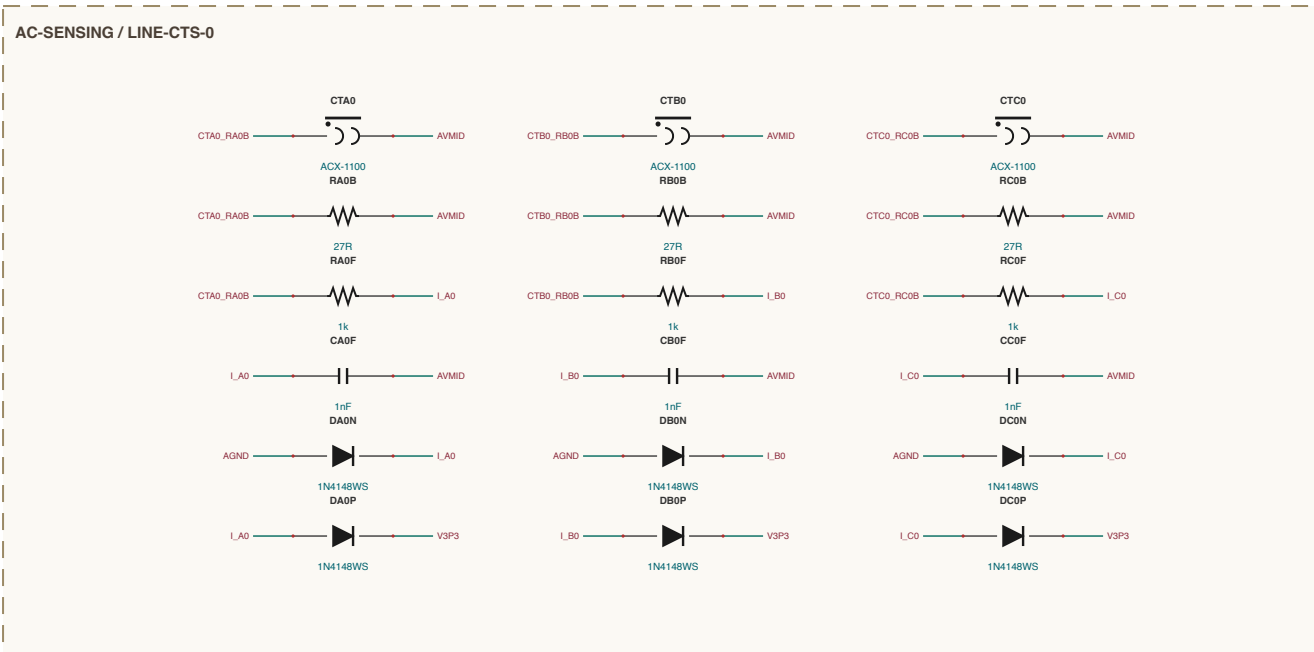
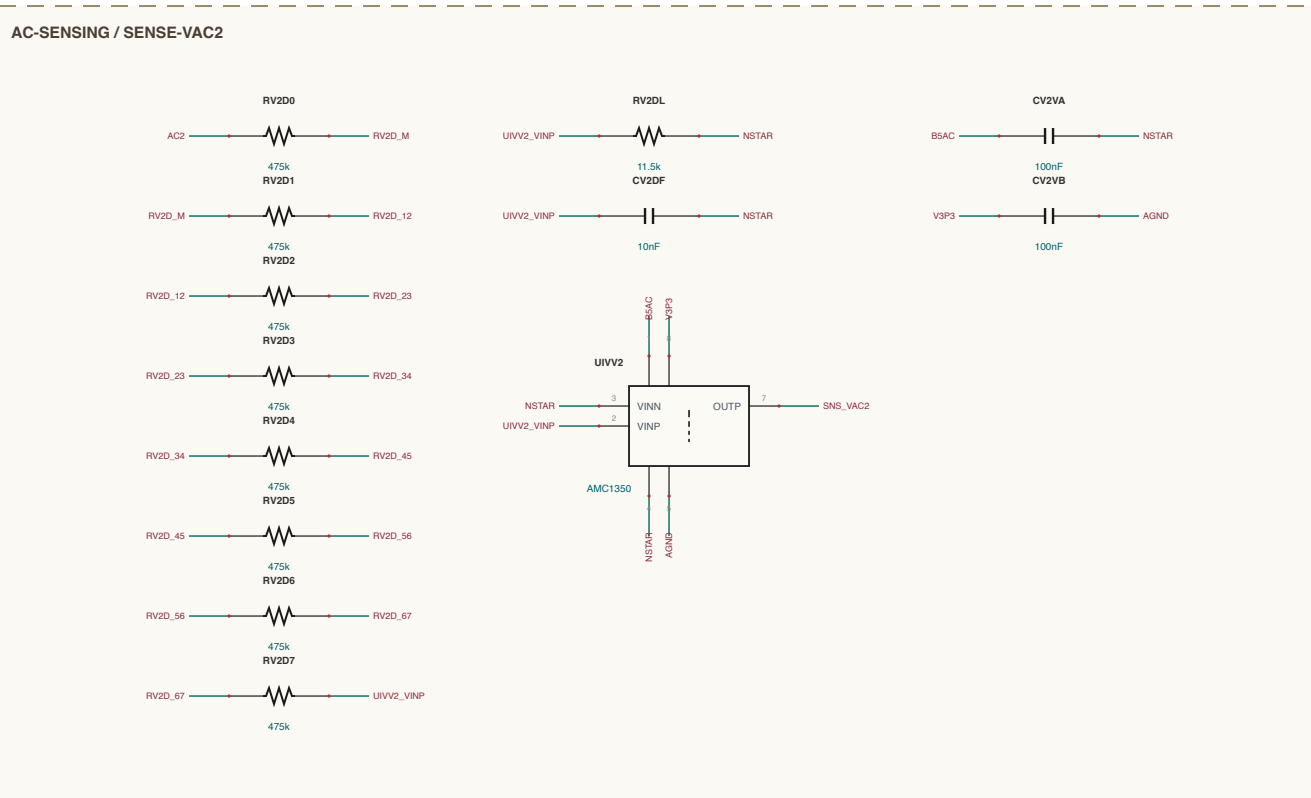
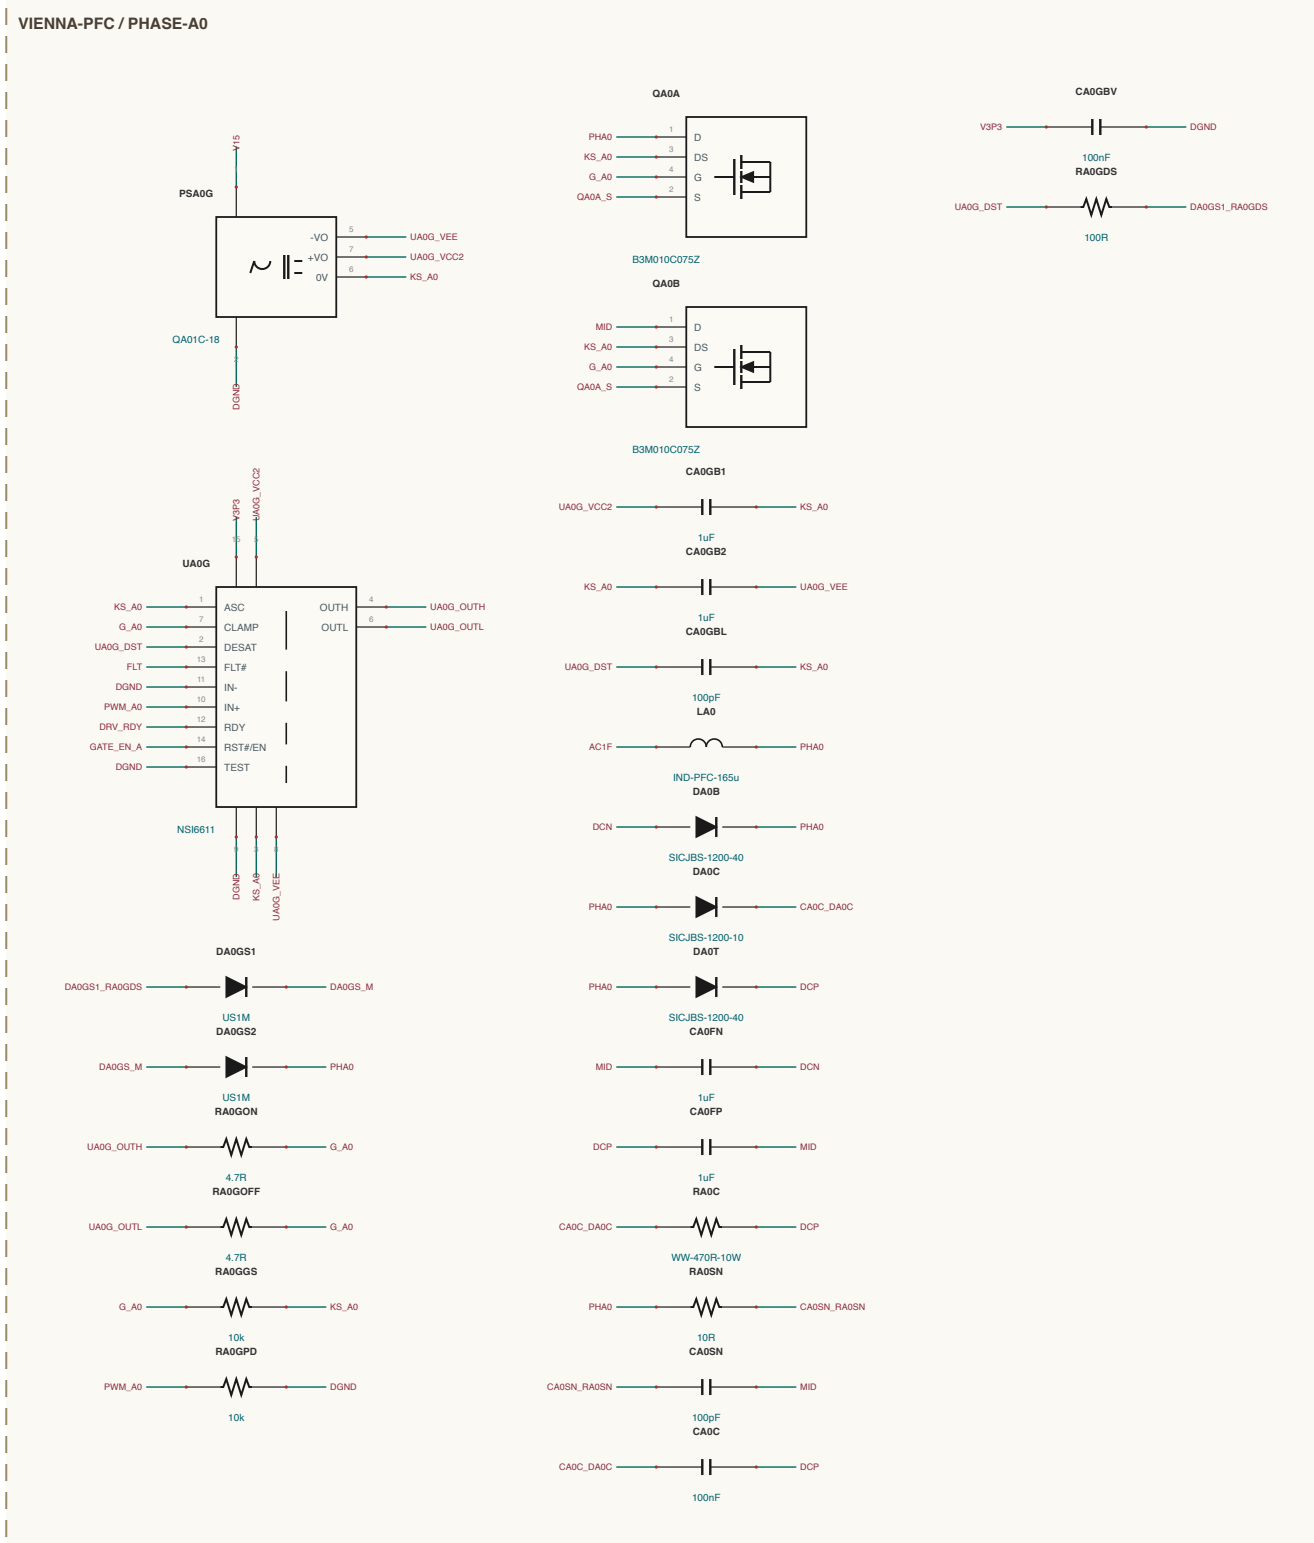
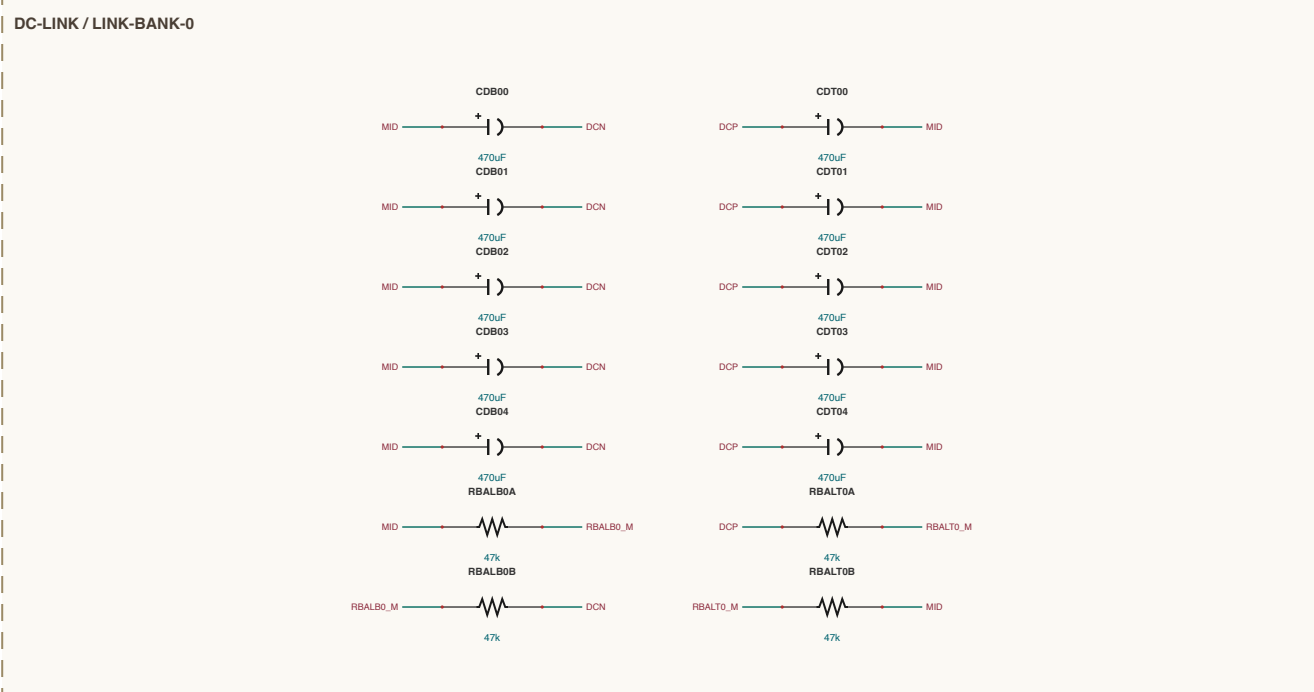
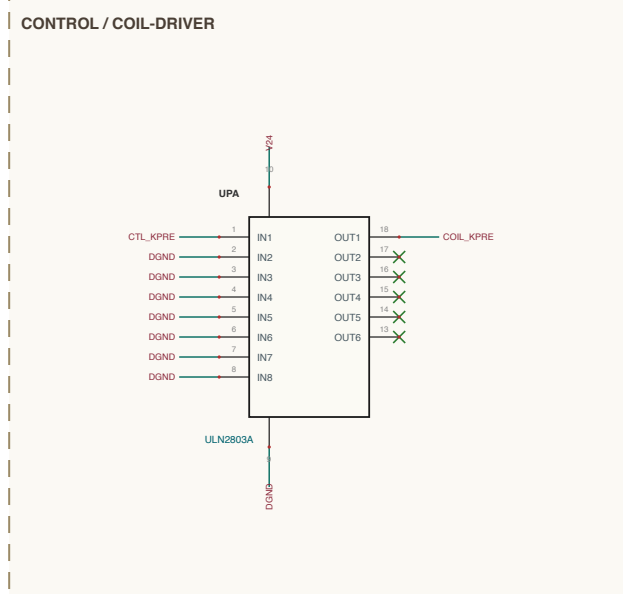
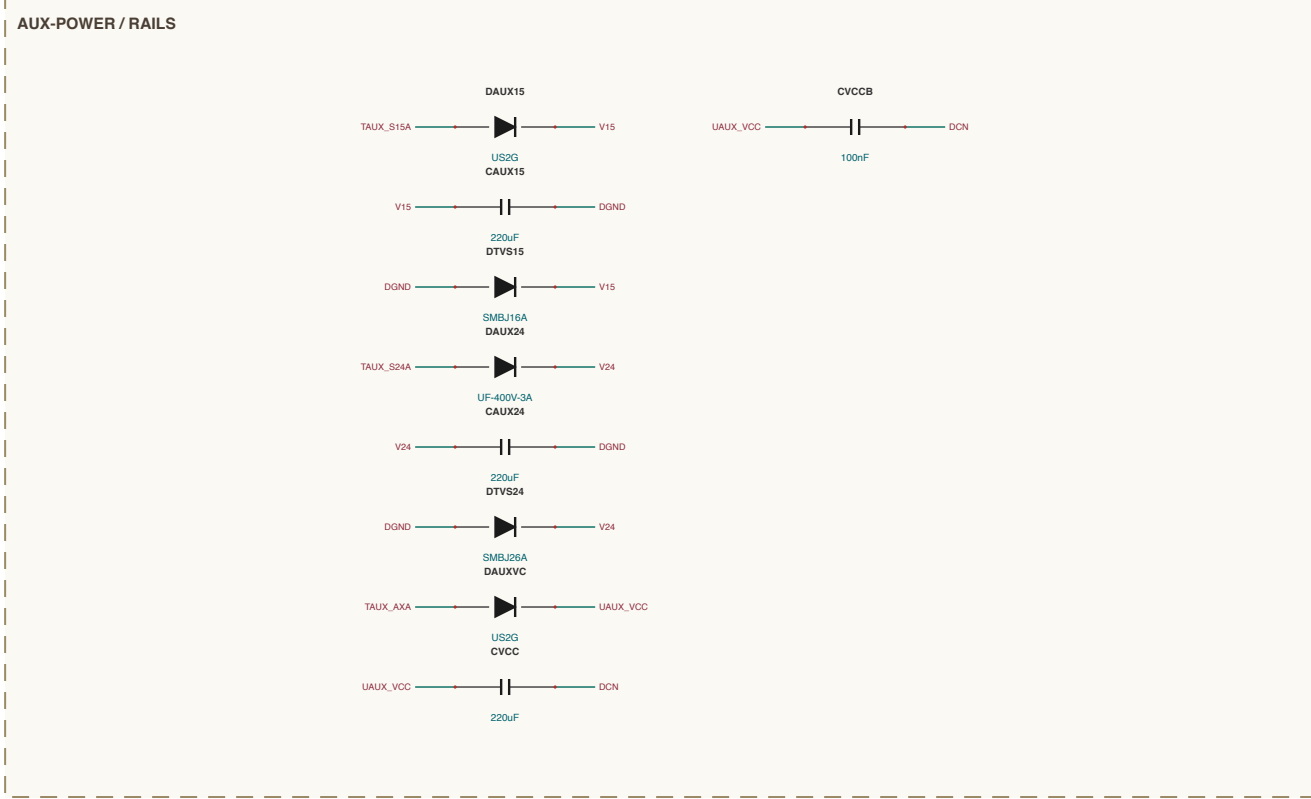
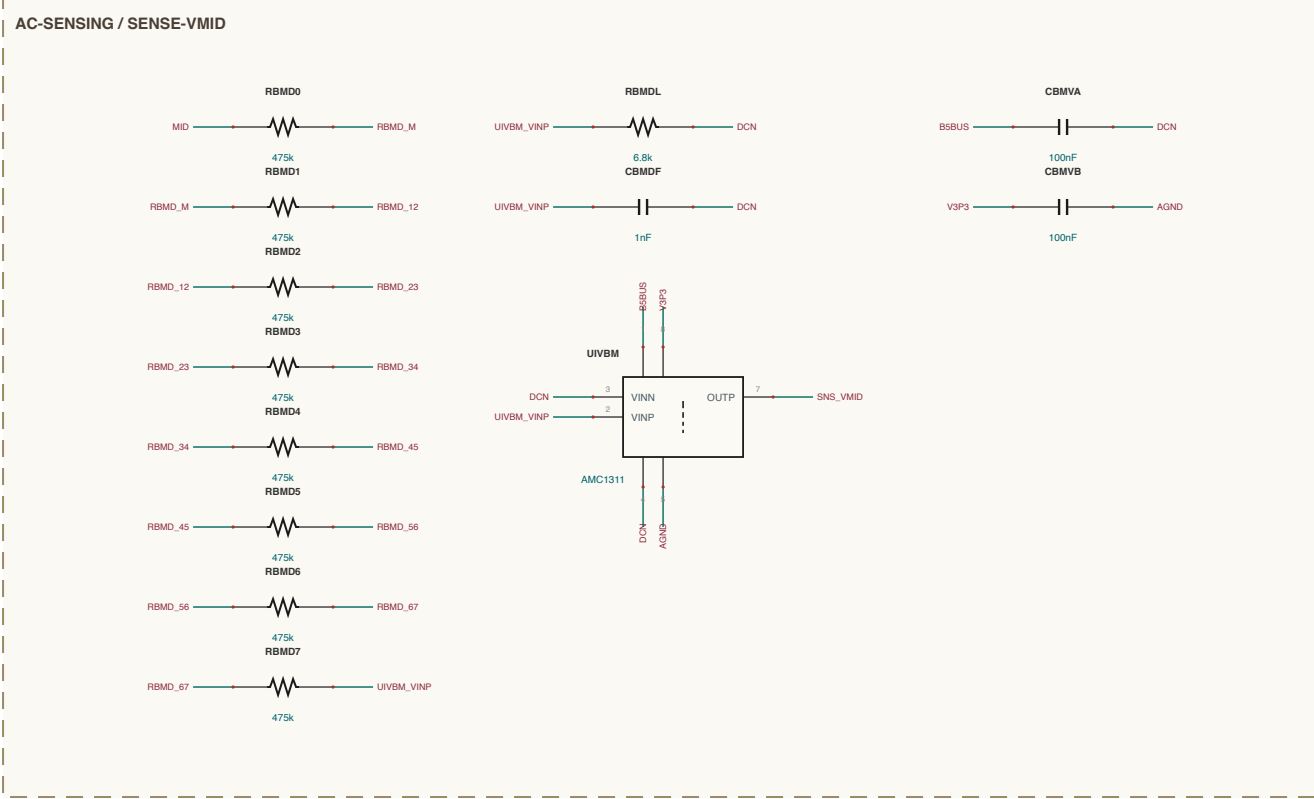


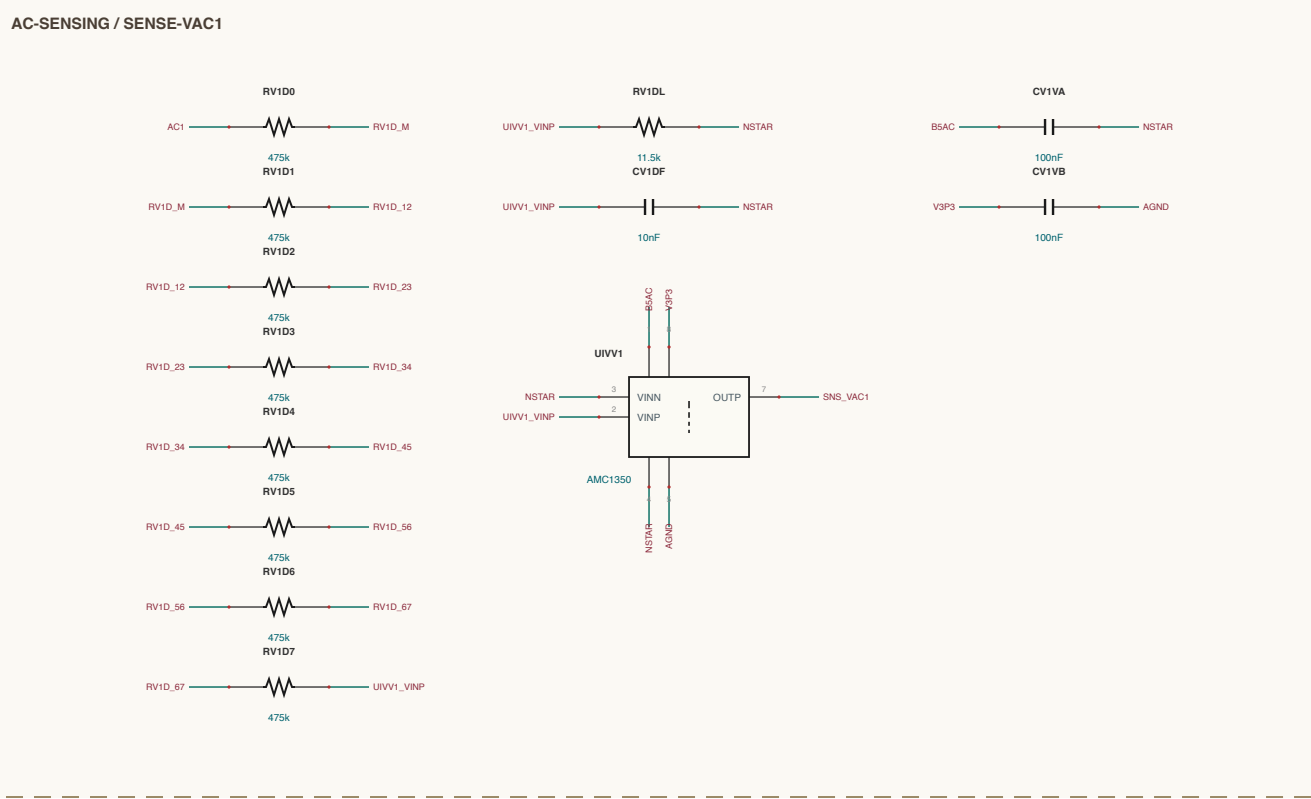

SHEET INDEX

30 kW AC-DC (lower) 1 of 3
AC-SENSING: 3 sections
AUX-POWER: 5 sections
CONTROL: 4 sections
INPUT-EMI: 4 sections
DC-LINK: 3 sections
VIENNA-PFC: 3 sections
rev 0.1: 28 sections - 288 components

NET NAMING

Internal junctions are named for what they join
Capacitors, while made at that (C) pin e.g. C100A, 100P
Resistors, M, except at 0, a series pin e.g. R0A10, 10
Resistors, series tap between Resistorpins e.g. R010, 01
All others are explicit design rules

MAGNETICS CONSTRUCTION

Identify per design/magnetics and design, spec, file, acceptance from time sheet
(S) LAM-00: 3x NOTINAT 00000, 0000 (x) 1st time, Inductance (mH) = 0.01800, 0.01800 (S) 0000 value governs (typical/actual)
(S) LAM-01: 3x 100 000, 100, 100 (S) 0000 (x) 1st time, Inductance (mH) = 0.01800, 0.01800 (S) 0000 value governs (typical/actual)
Total L = 3 x 100 000, 100, 100 (S) 0000 (x) 1st time, Inductance (mH) = 0.01800, 0.01800 (S) 0000 value governs (typical/actual)