
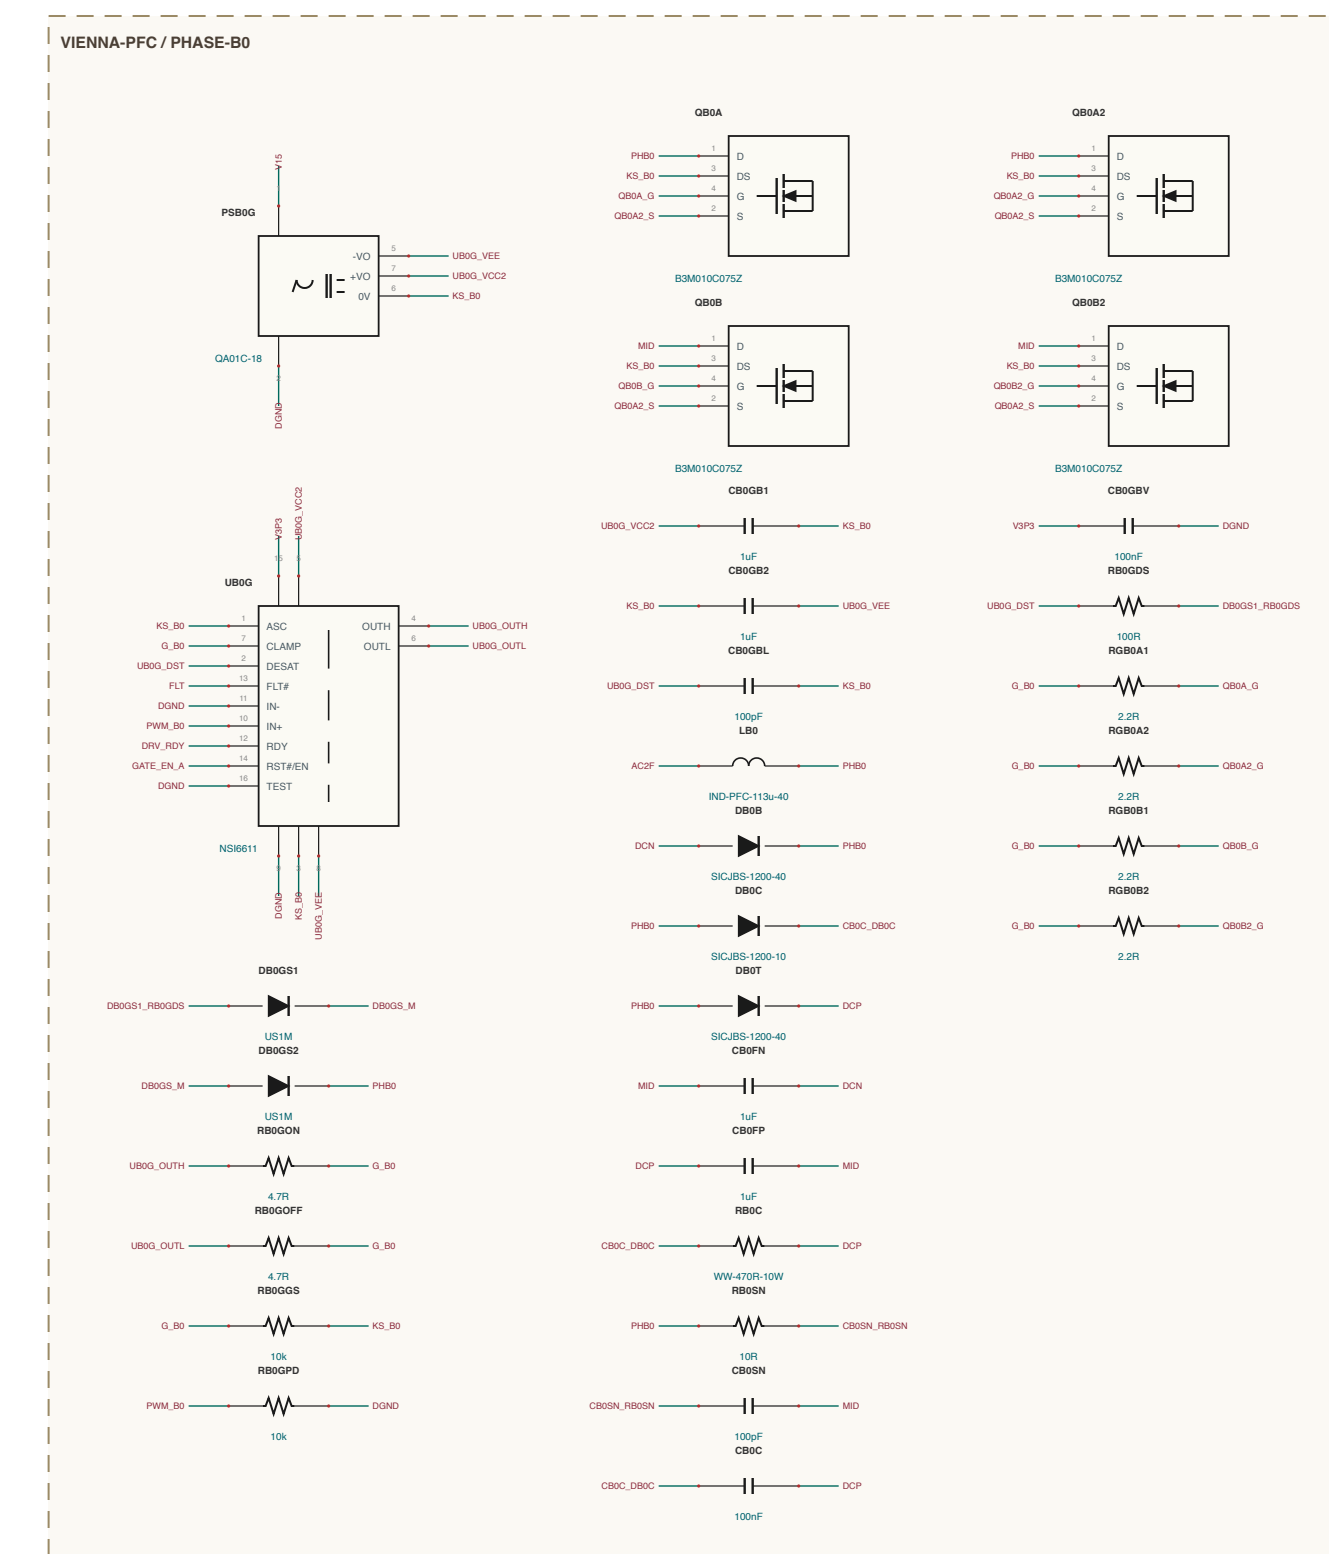
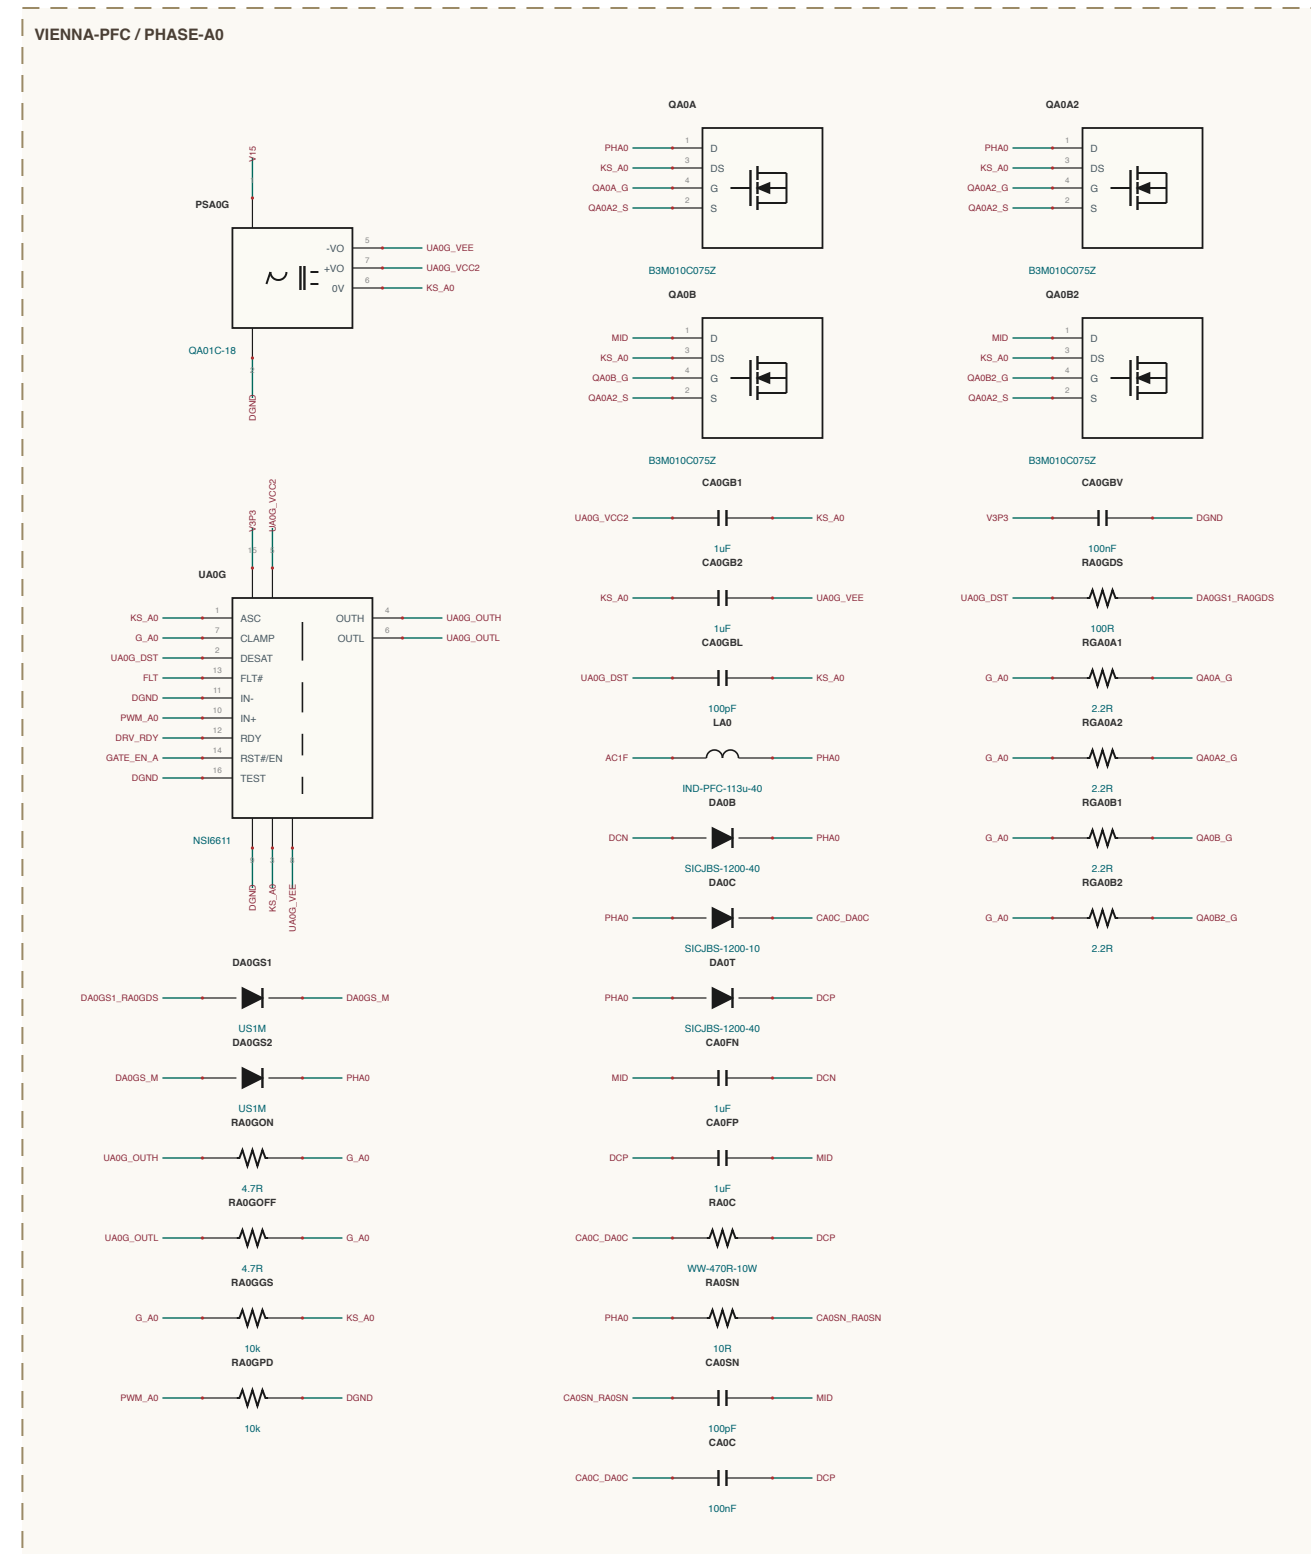
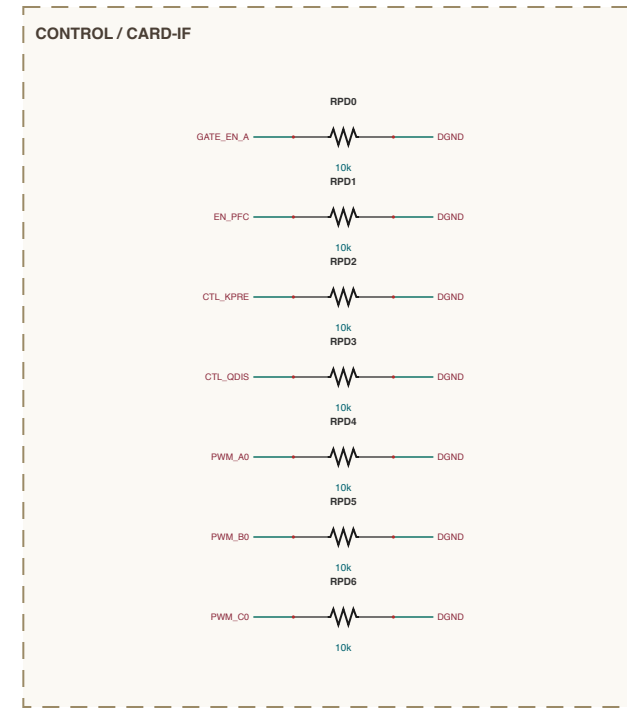
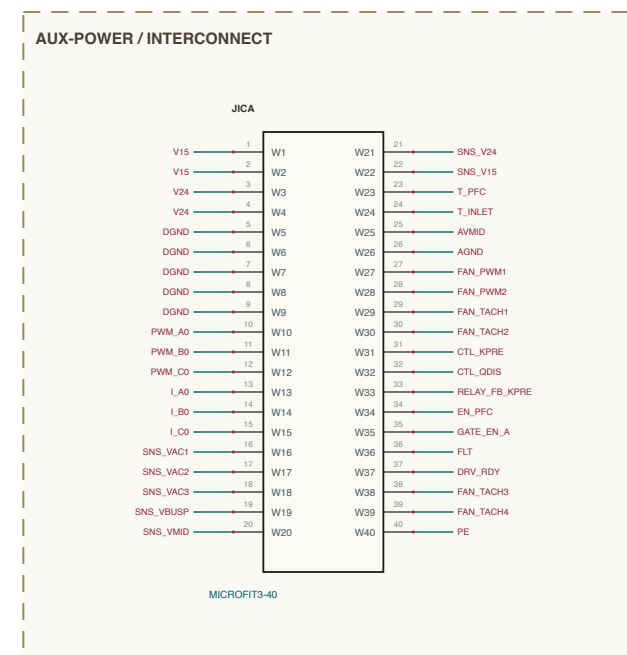
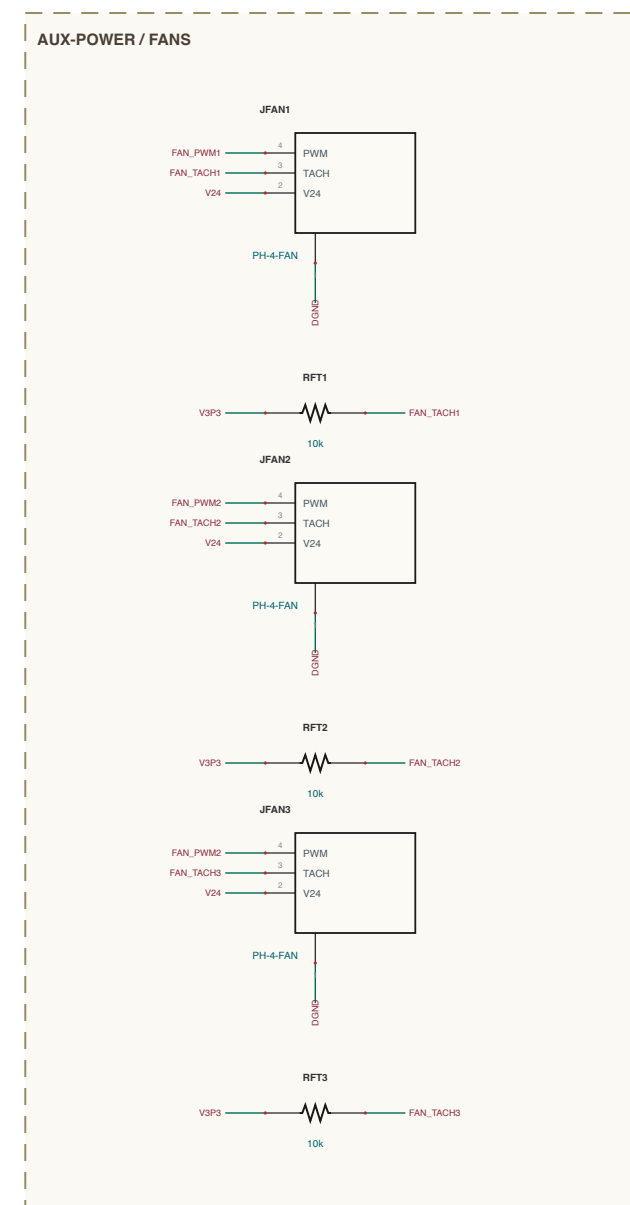
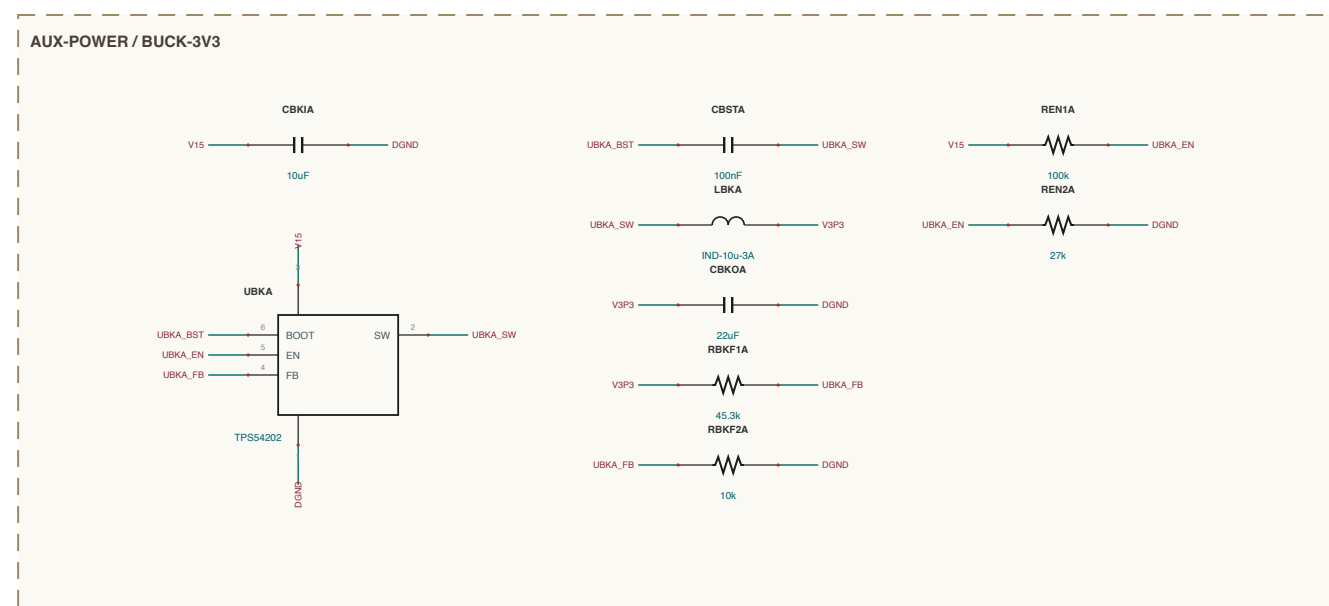
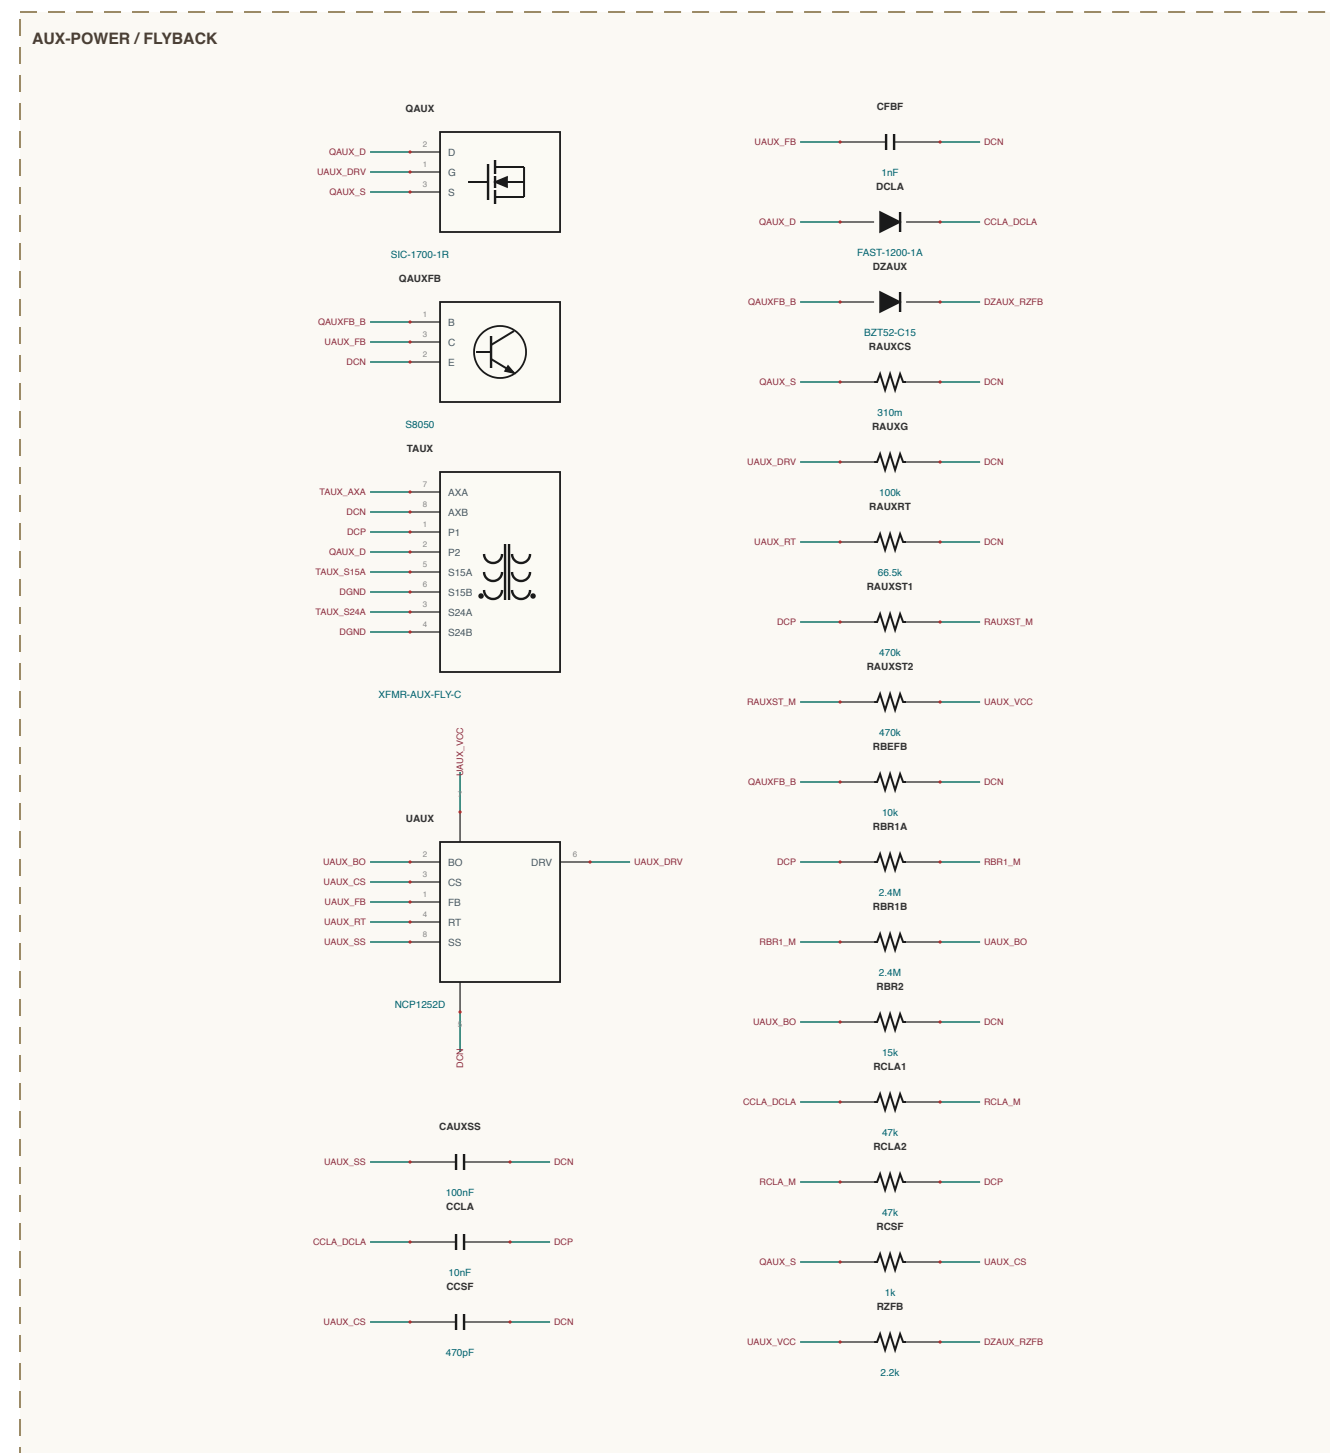
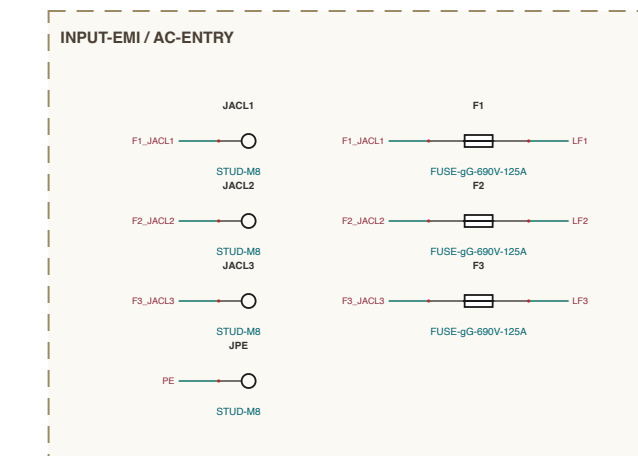
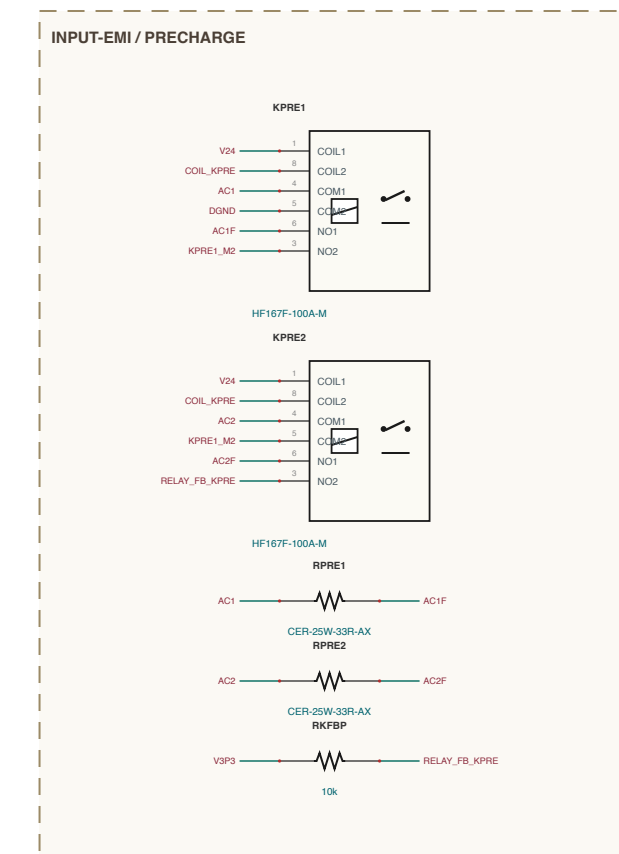
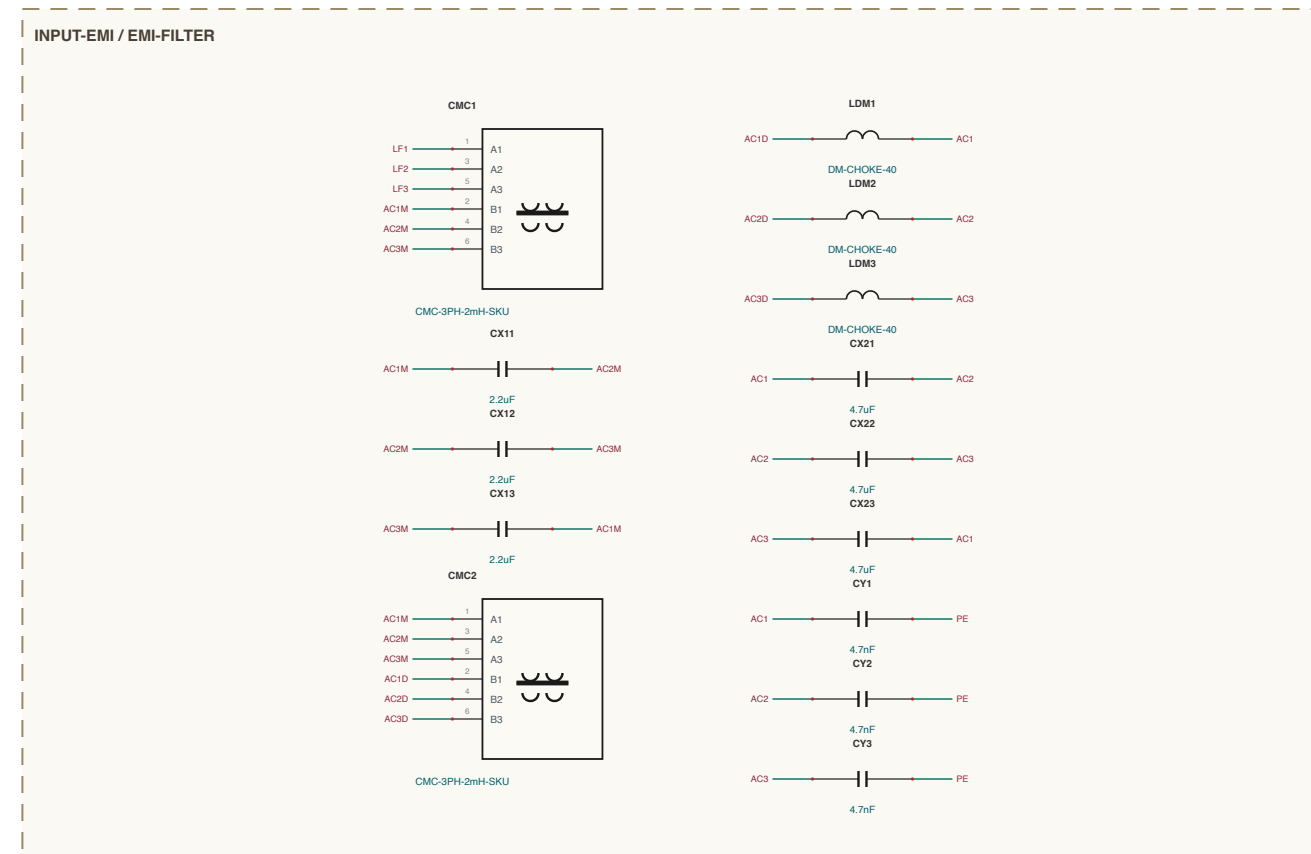
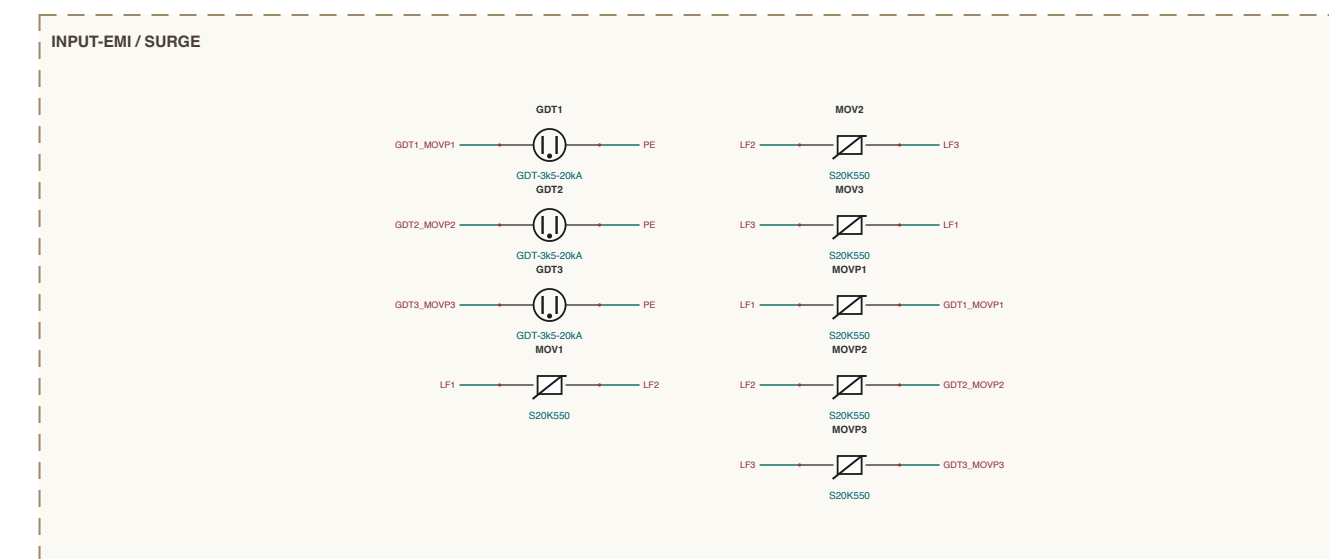
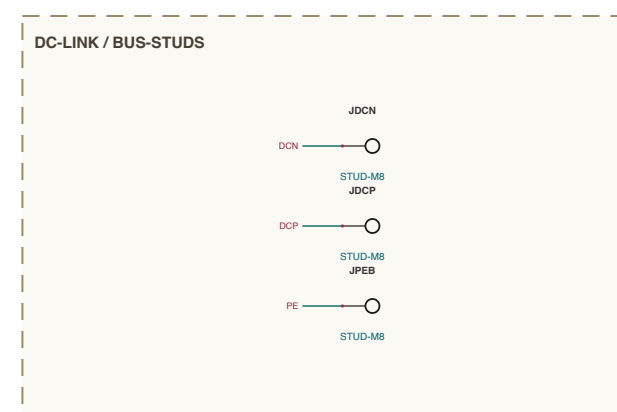
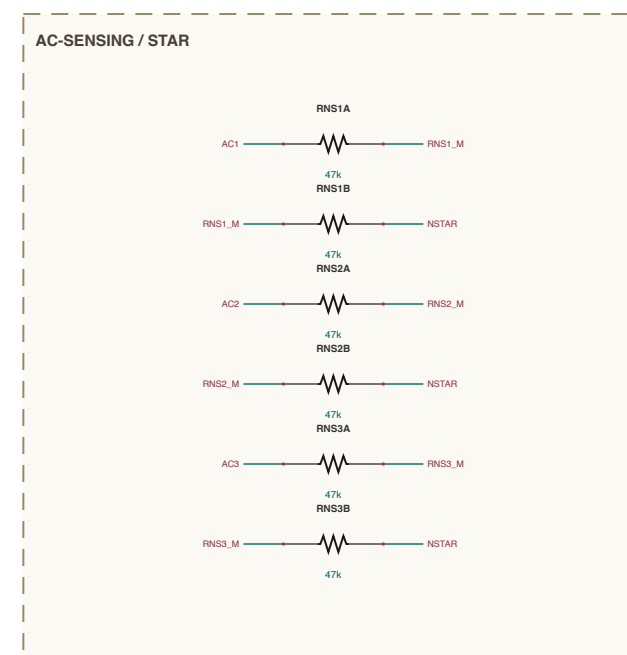
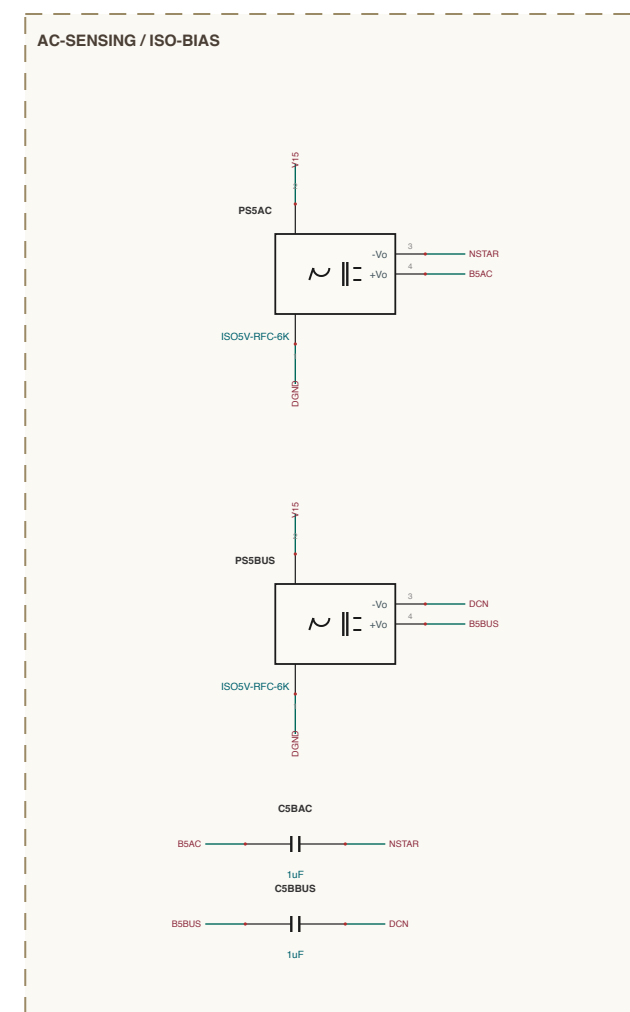
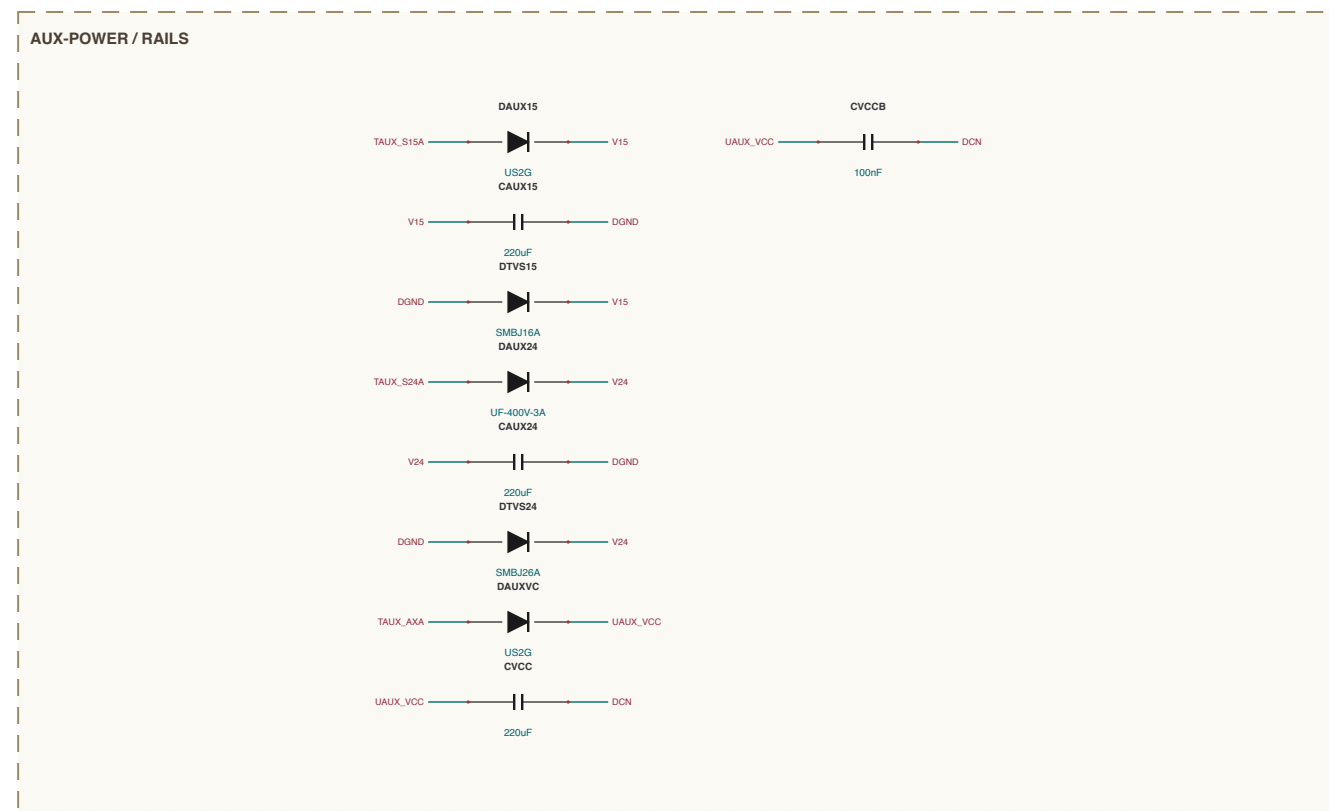
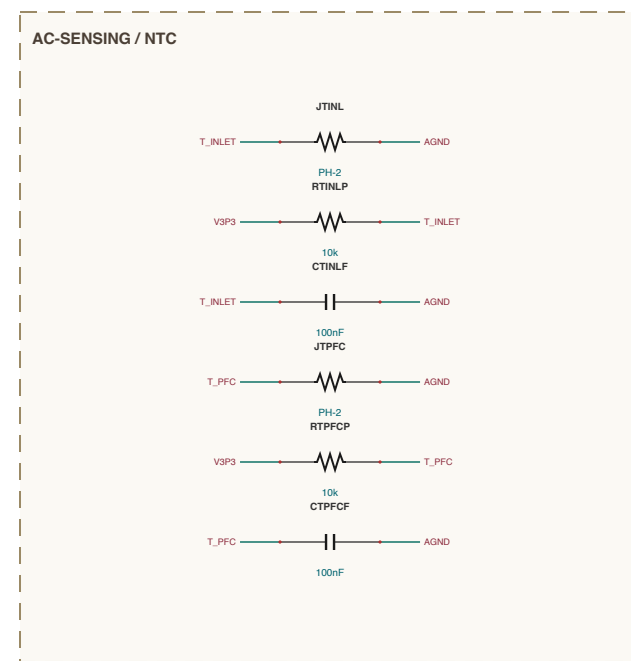
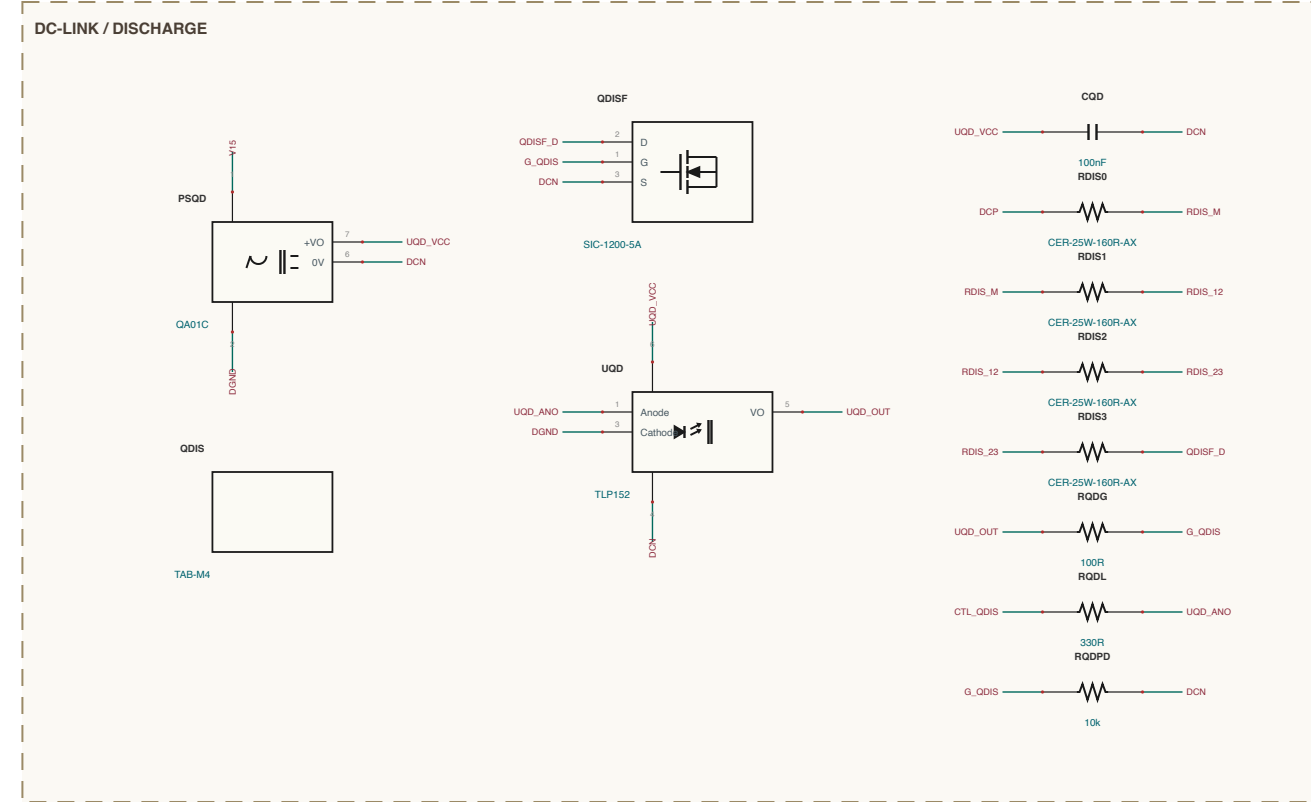
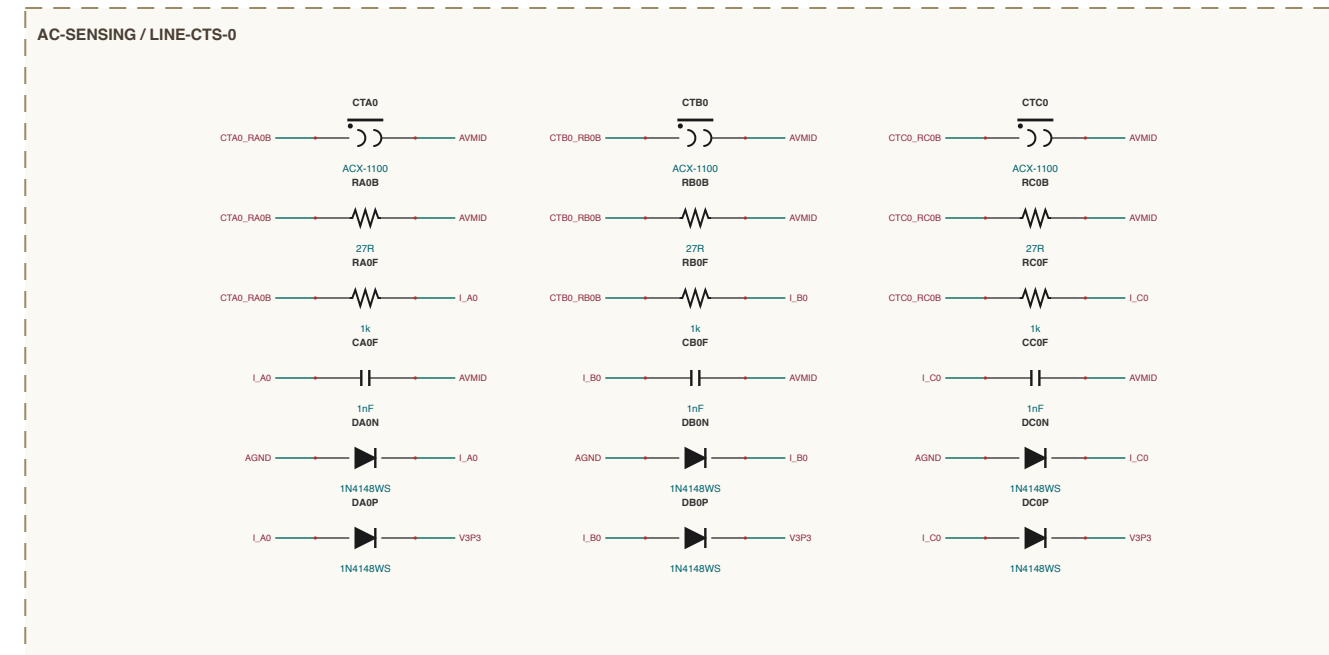
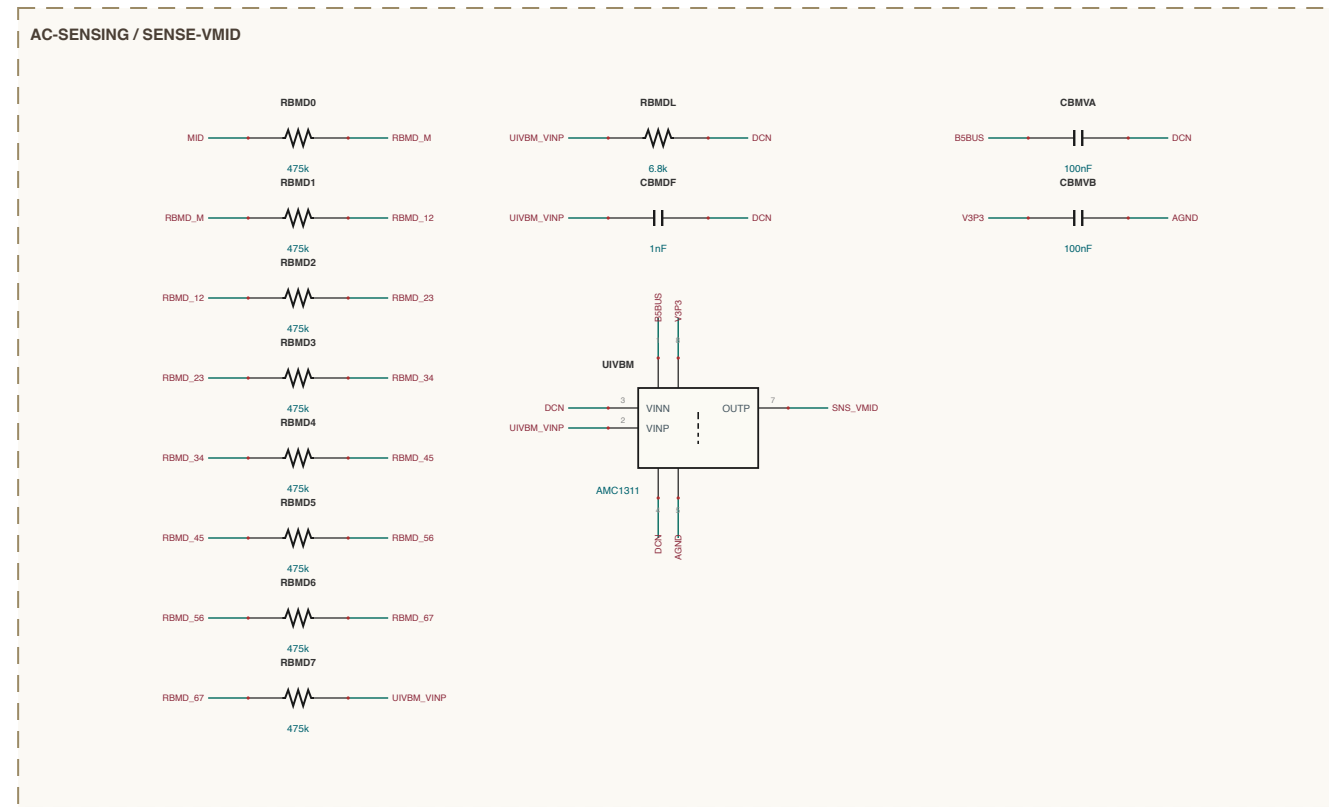
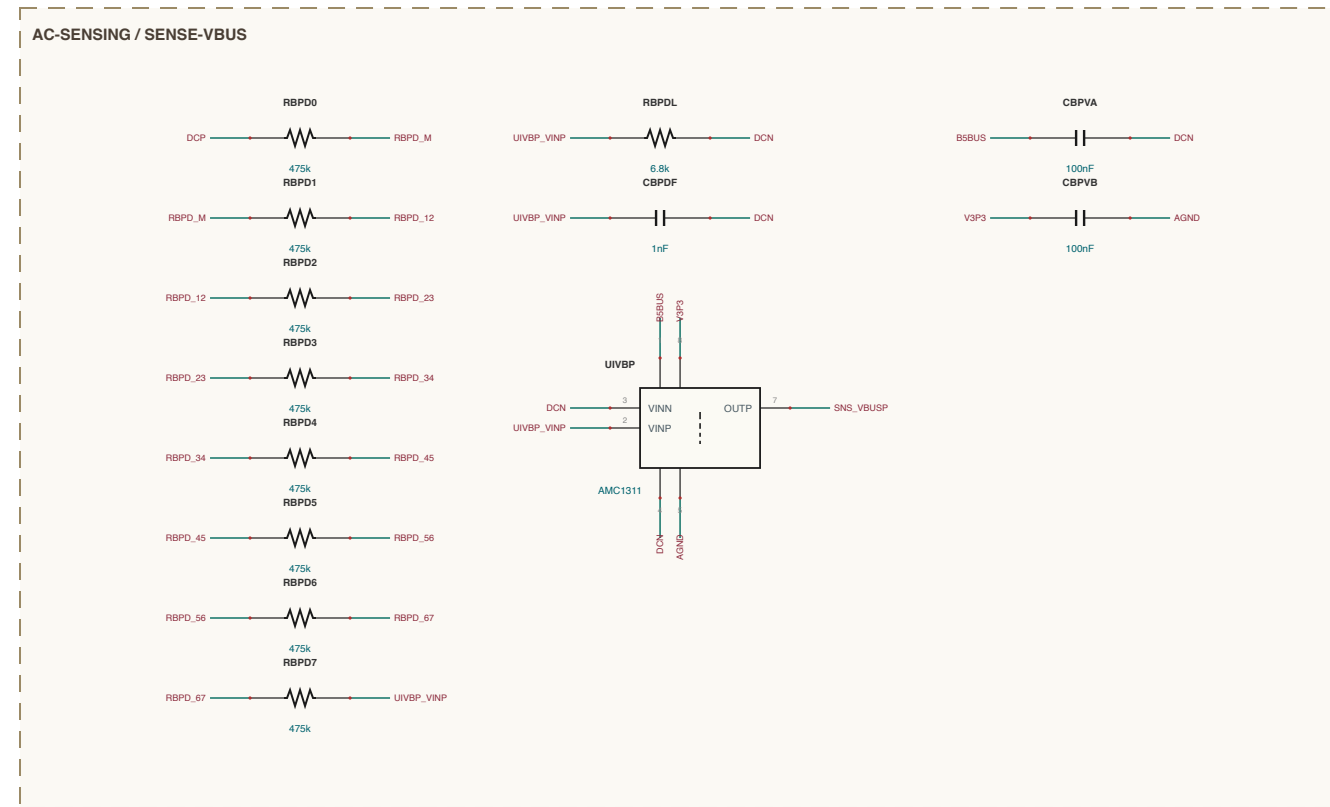
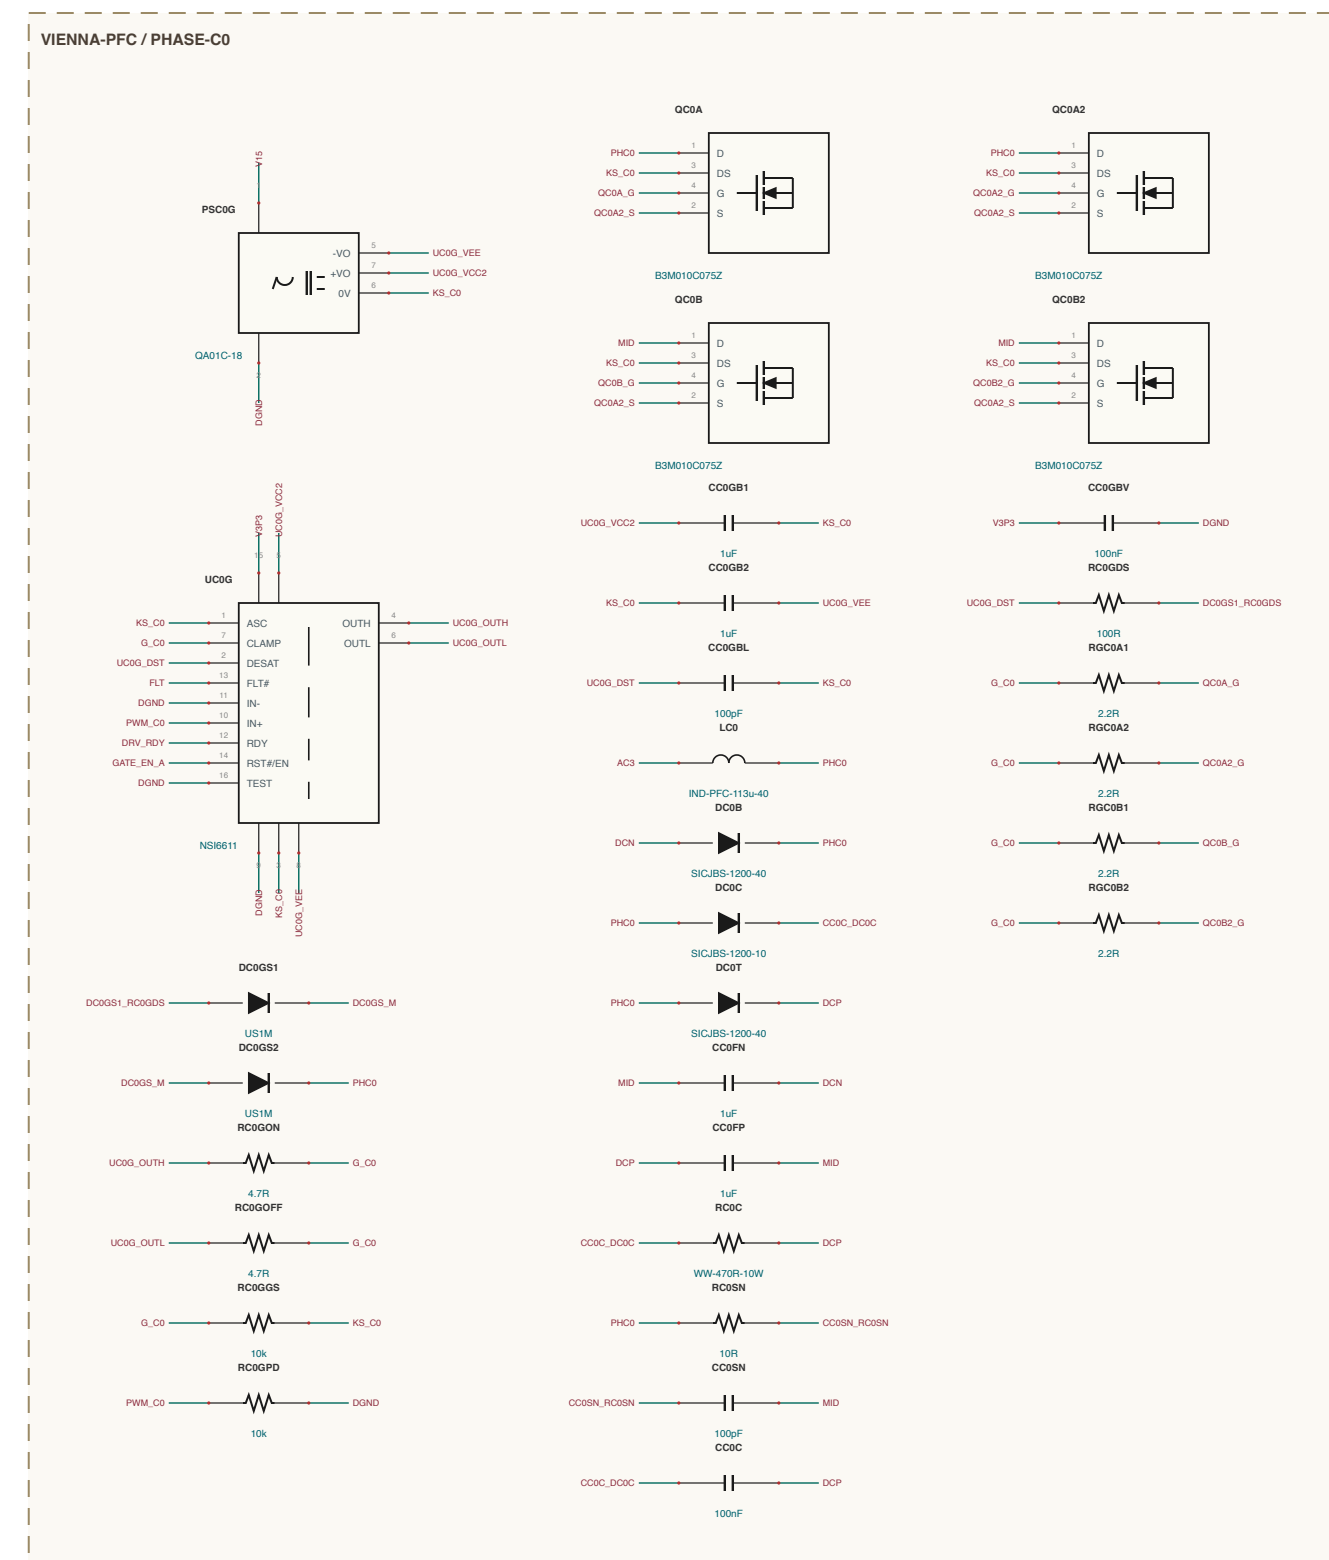
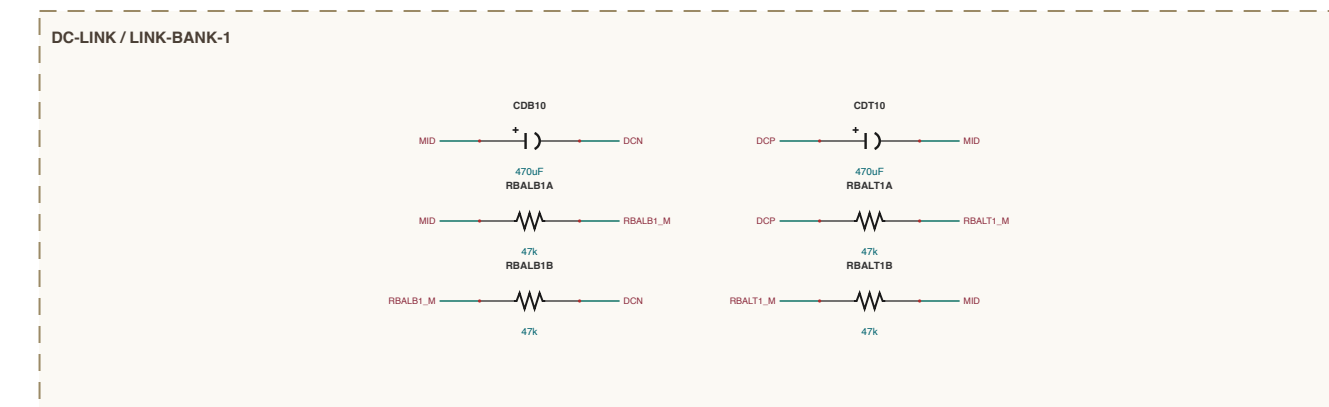
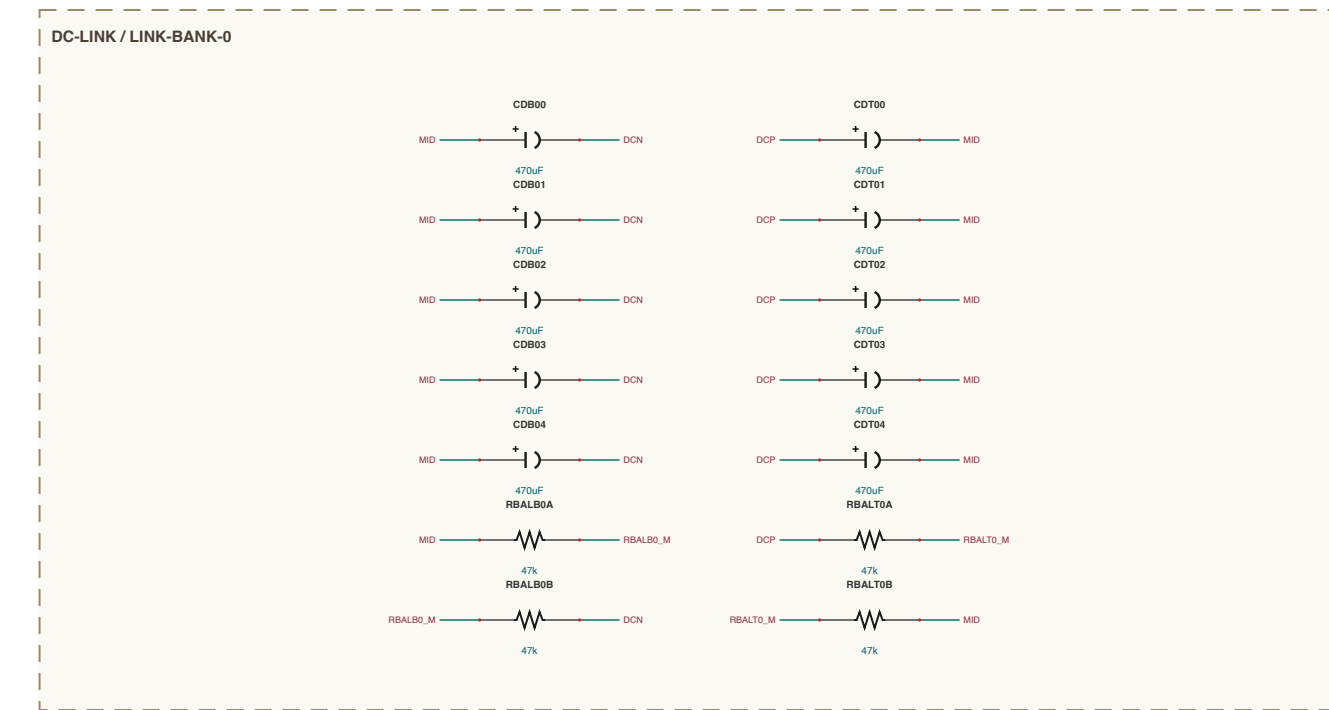
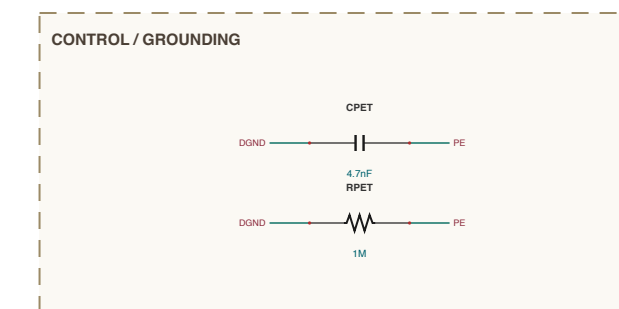
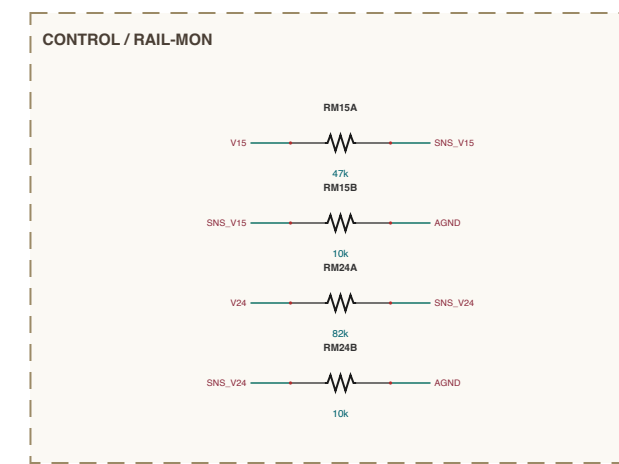
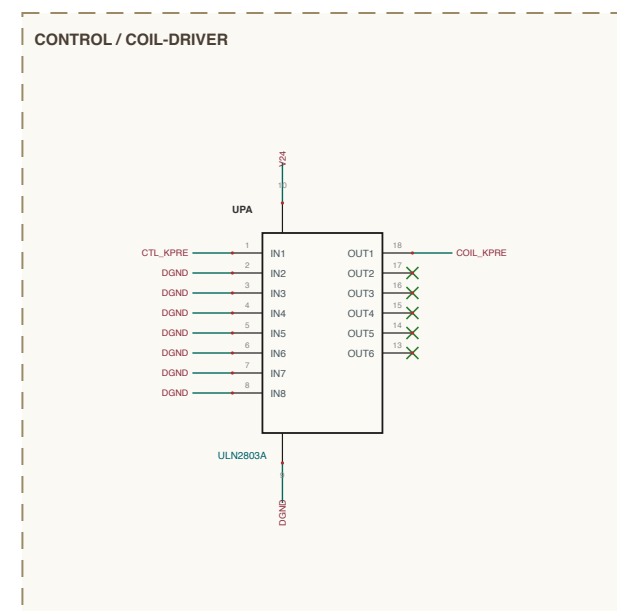
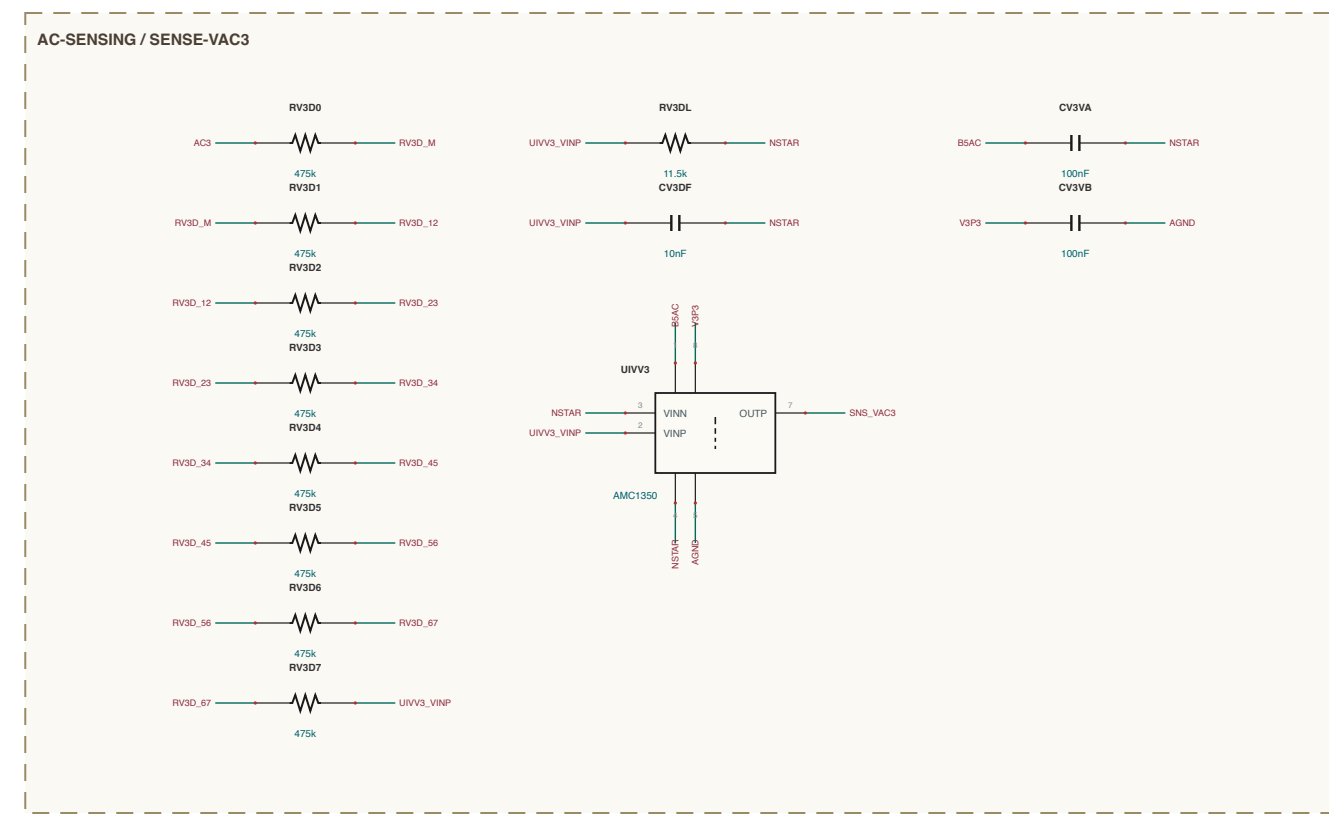
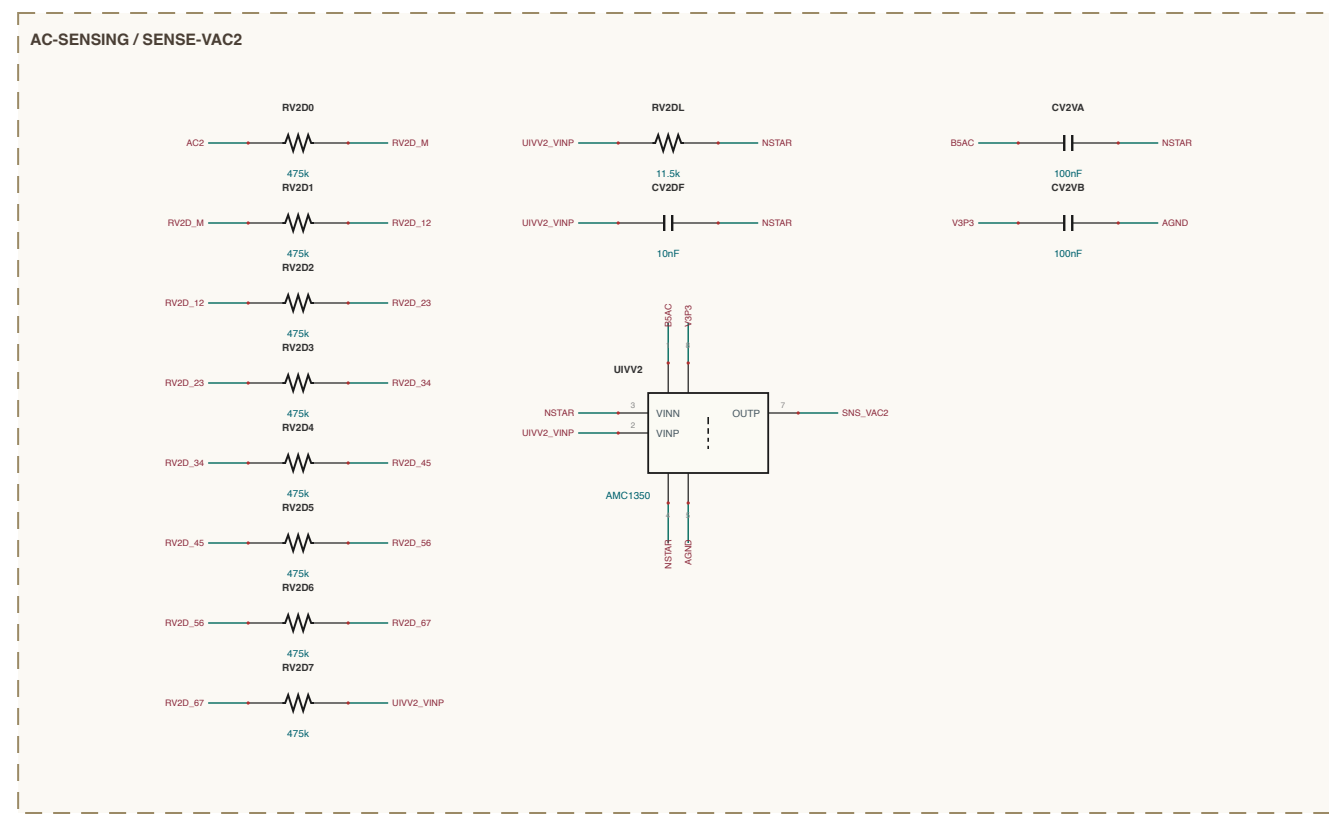


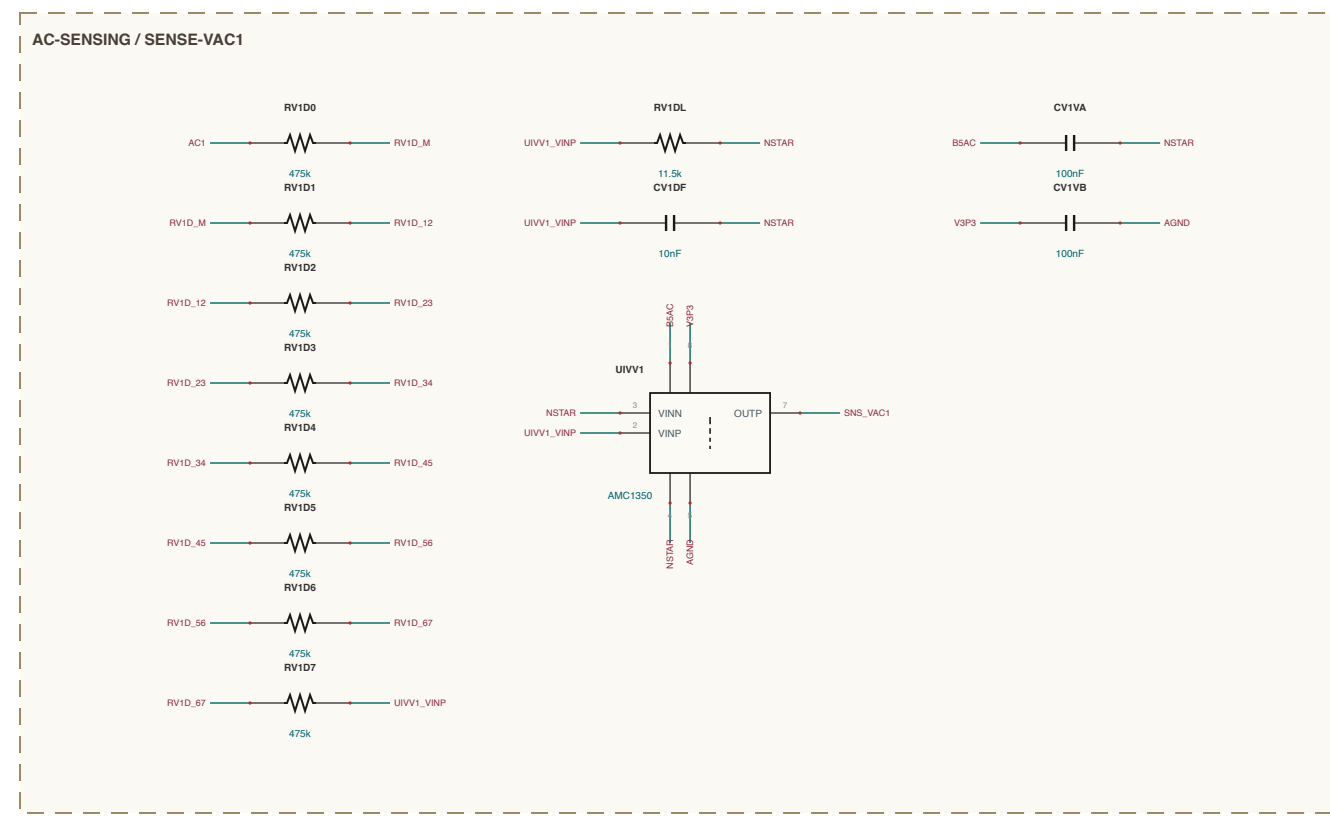

SHEET INDEX	
40 MW AC-DC (rows): 1 of 3	
AC-BANDS: 1 sections	
ALU POWER: 3 sections	
CONTROL: 4 sections	
DC-LINK: 4 sections	
INPUT-FRM: 4 sections	
TRNSA-MTC: 3 sections	
no D.C. 38 sections - 381 components	

NET NAMING
Internal junctions are named for what they join
Usually, 4FFs made at that J pin e.g. LF02A, V08P
Problems: 1) misquoting of a source part e.g. #B0L7A, M
Problems: 2) using too business-like numbers e.g. R0V12, D1
all others are English design notes

MAGNETIC RESTRICTION	
Identify per declassification, add DATA, geo, etc. (unclassified from free Press)	
1. LBA CCS to 00770847 (codeBIL, 04-20 > L3 11/24/01, uid:ALF 01/04/04, ps)	
2. LDBN 02 to TSD 001, Refd, 26-4800 > 03/04/01 01/05/04 (floor 0, 0,0/0)	
Total L or L + m = measured after leakage (2m COMPENSATE leakage spread); C or L/TANK sections	