




BANKS-SP / BANK-A

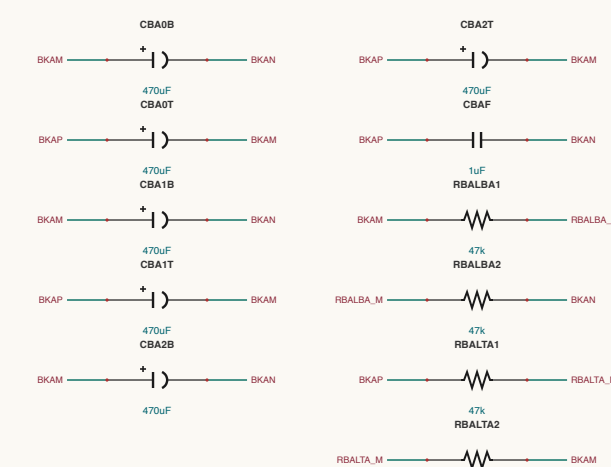


BANKS-SP / BANK-B

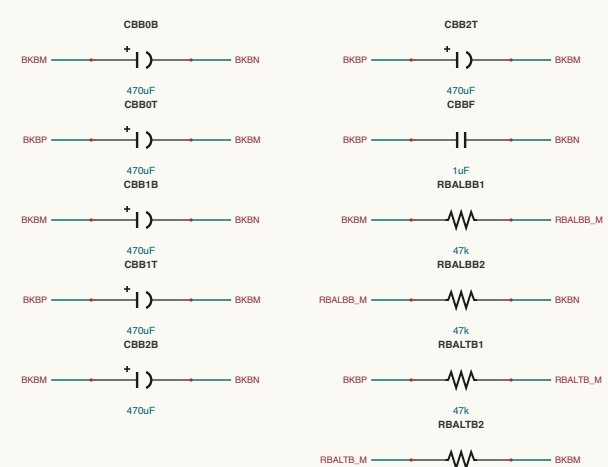


BANKS-SP / SP-MATRIX

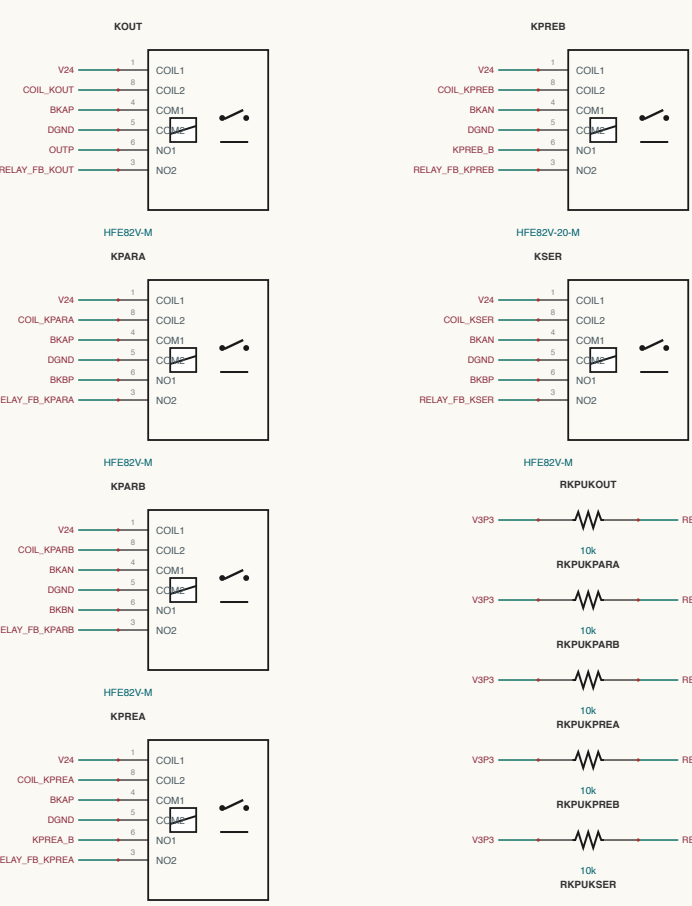


BANKS-SP / BLEEDERS

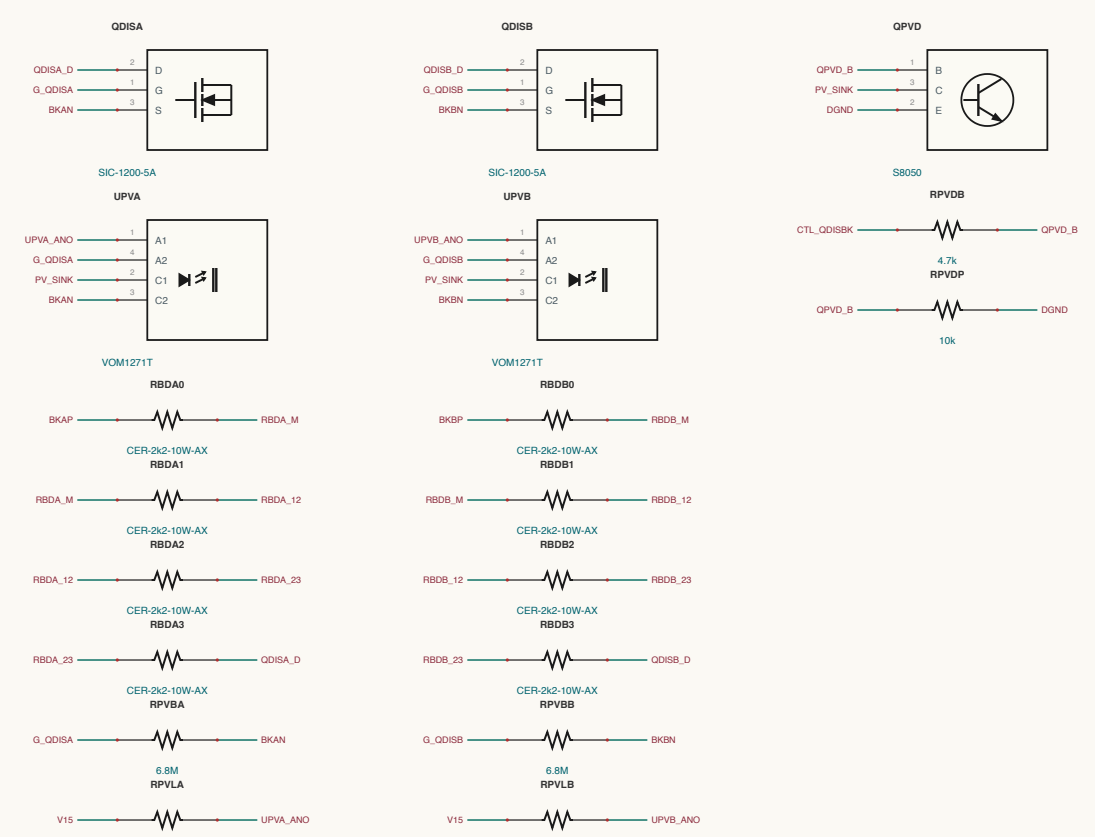


LLC-TANKS / TANK-1

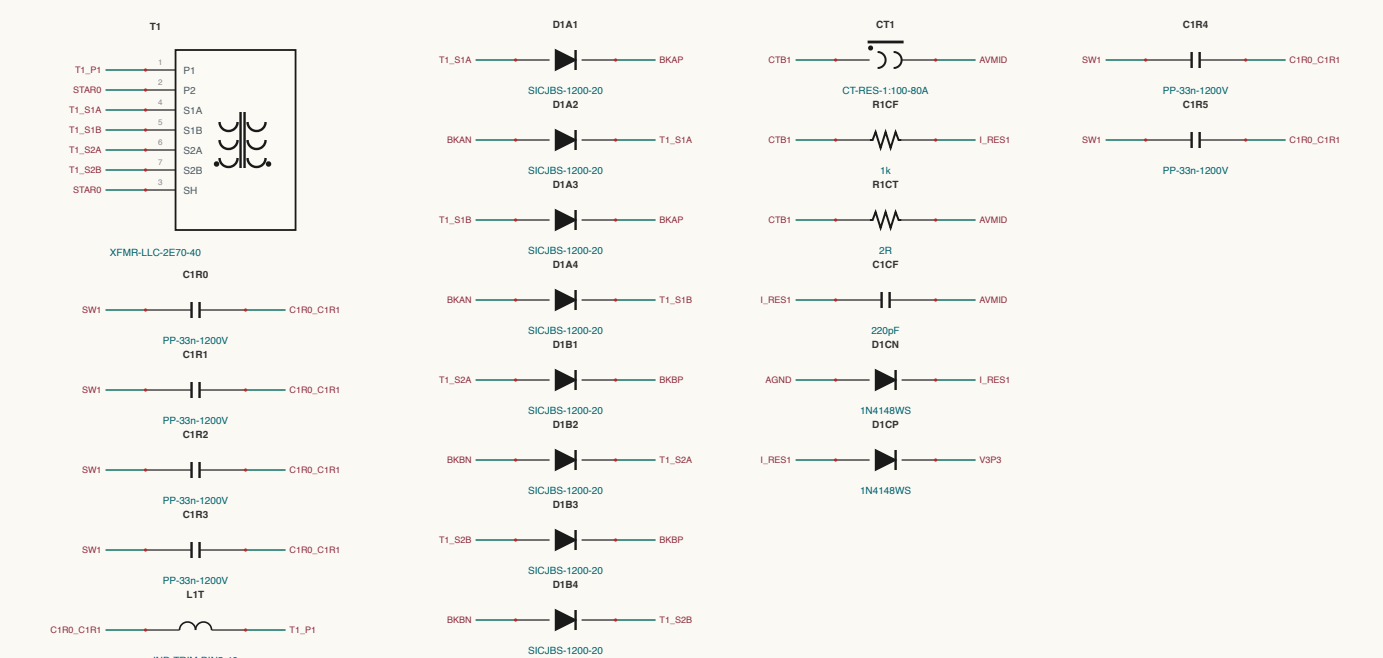


LLC-TANKS / TANK-2

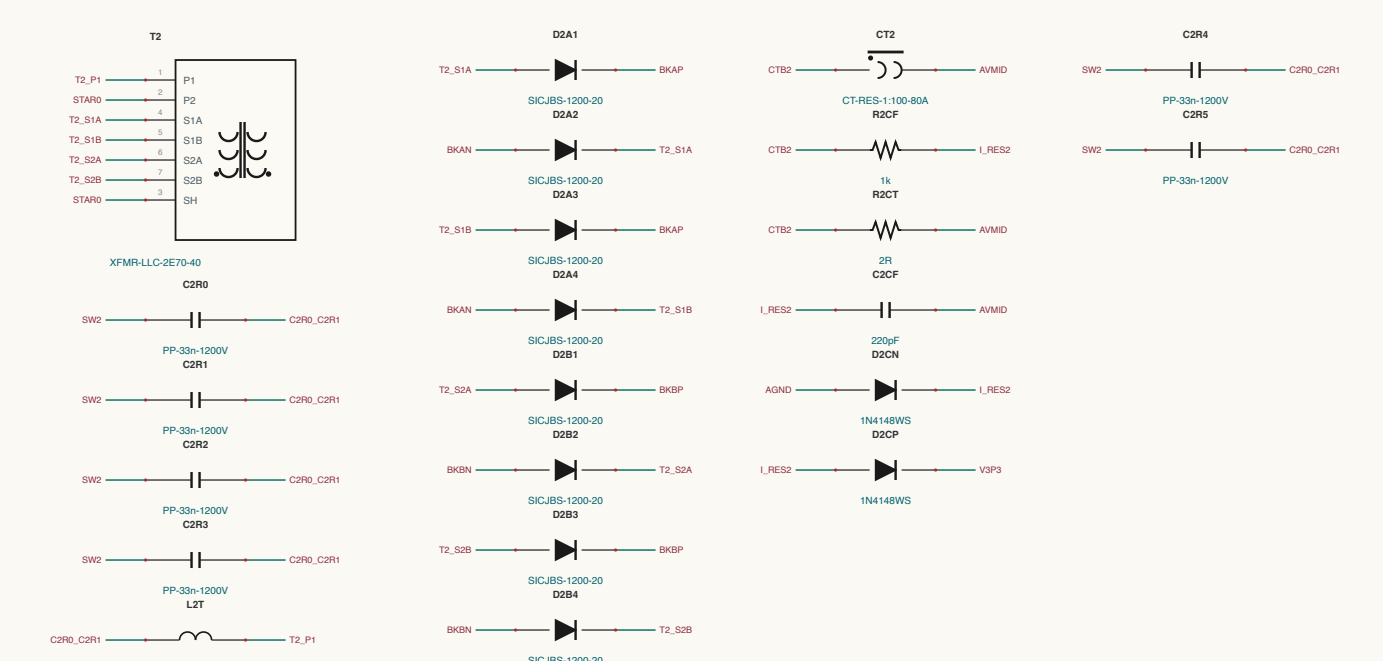


LLC-TANKS / TANK-3

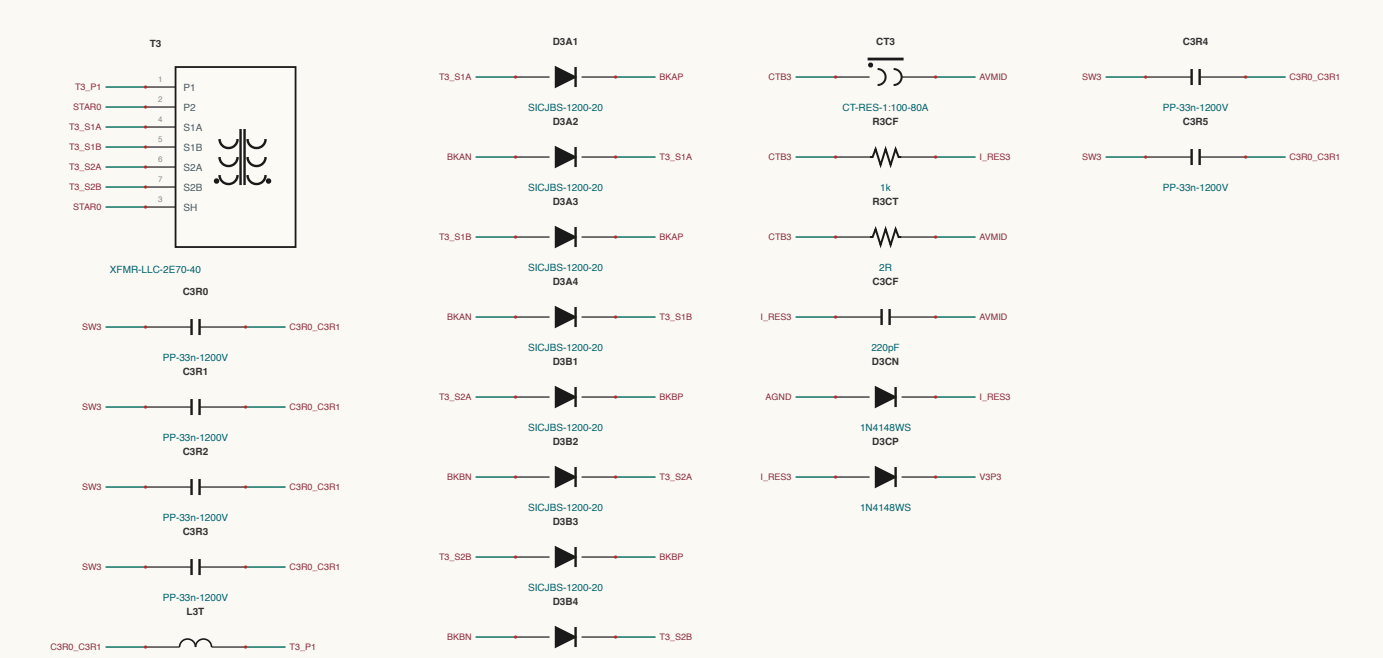


OUTPUT-SENSING / SENSE-VIRKA

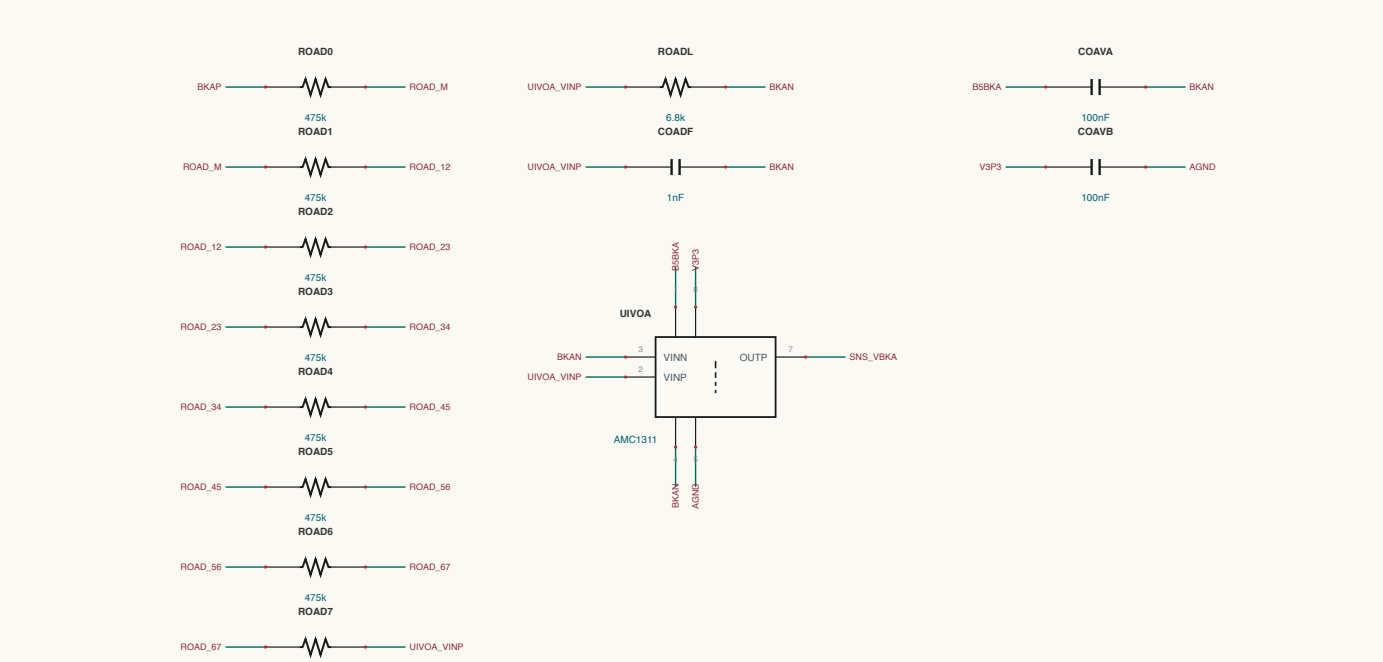


OUTPUT-SENSING / SENSE-VIRK3

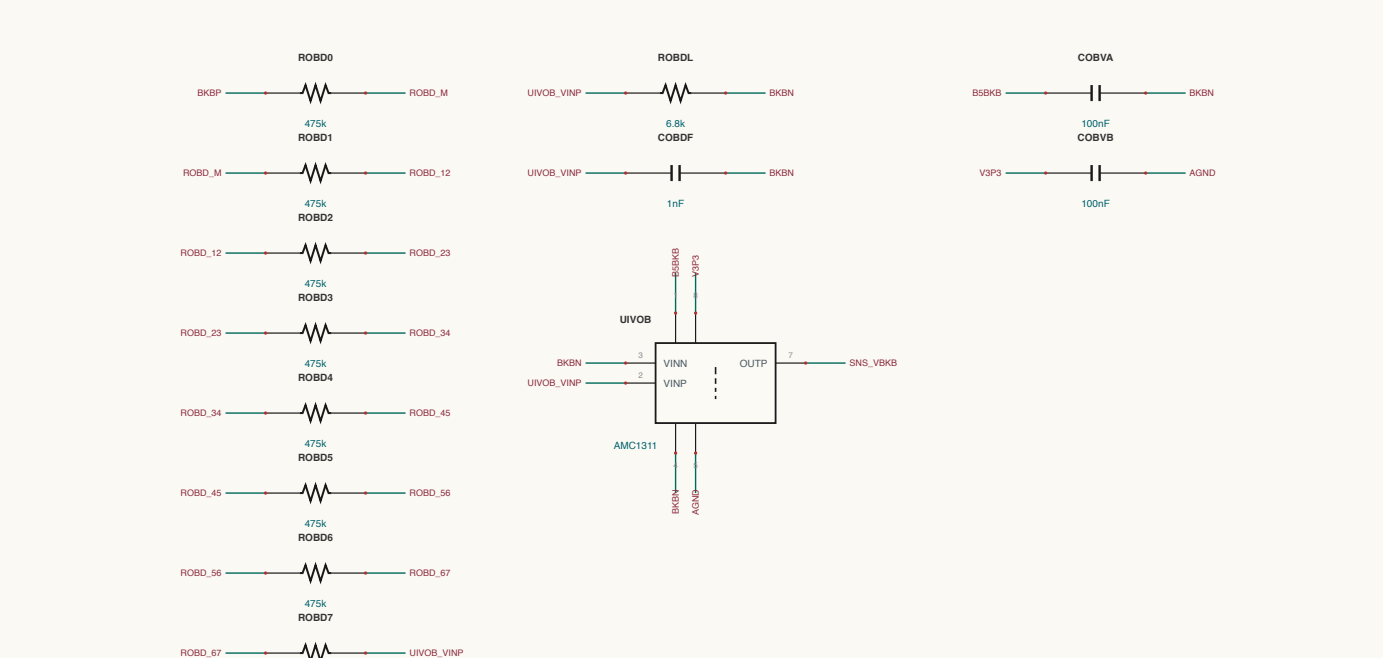


OUTPUT-SENSING / SENSE-BIAS

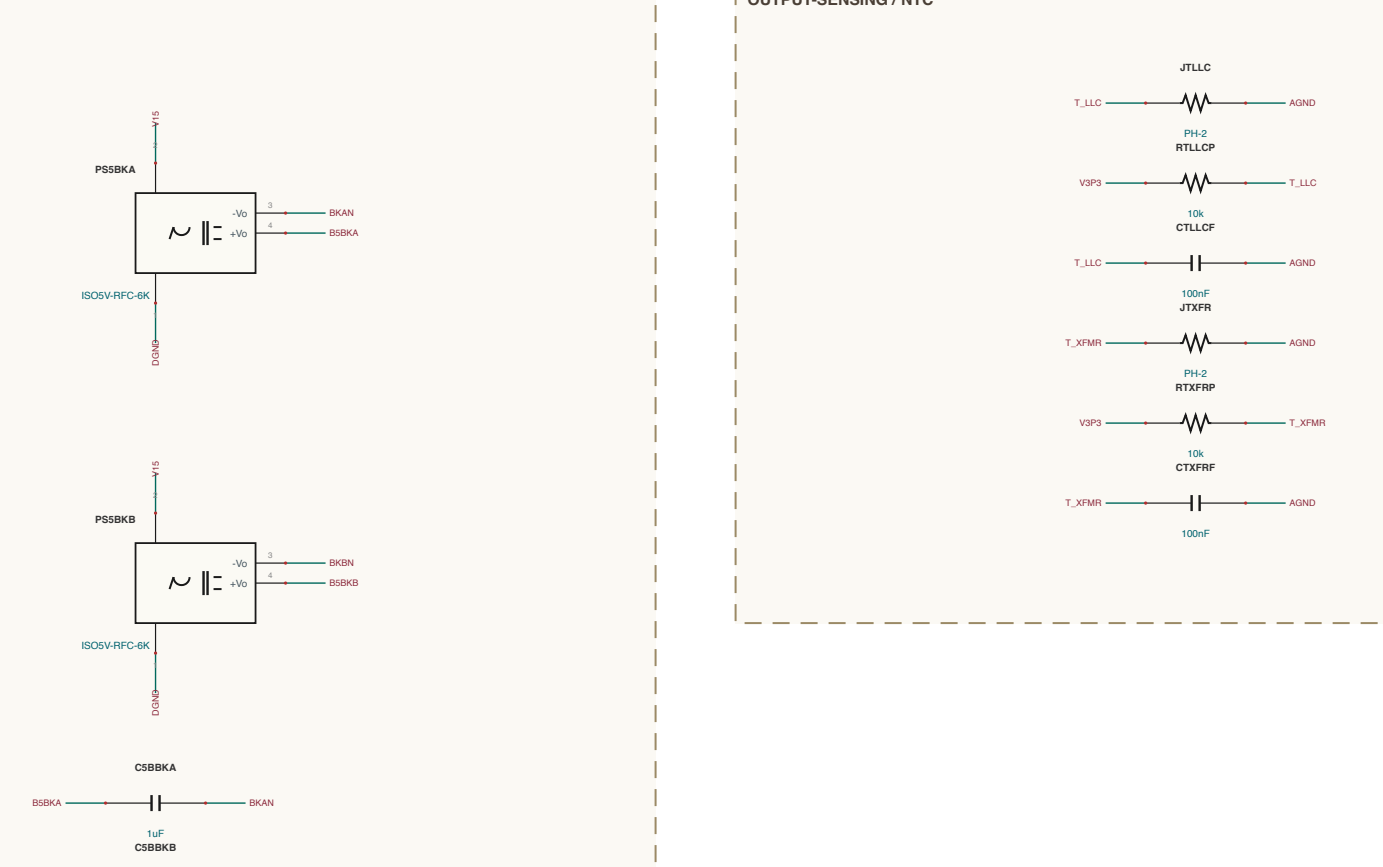


OUTPUT-SENSING / SENSE-NTC

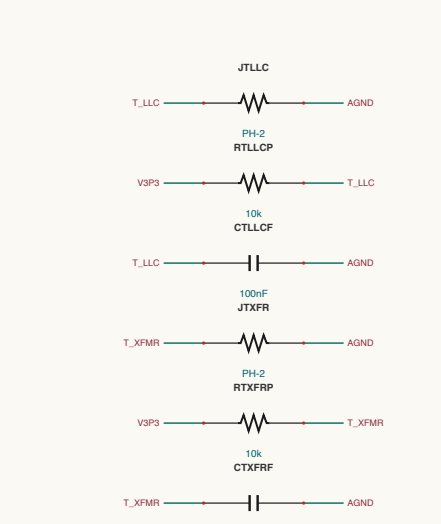

COMBS-HW / CAN

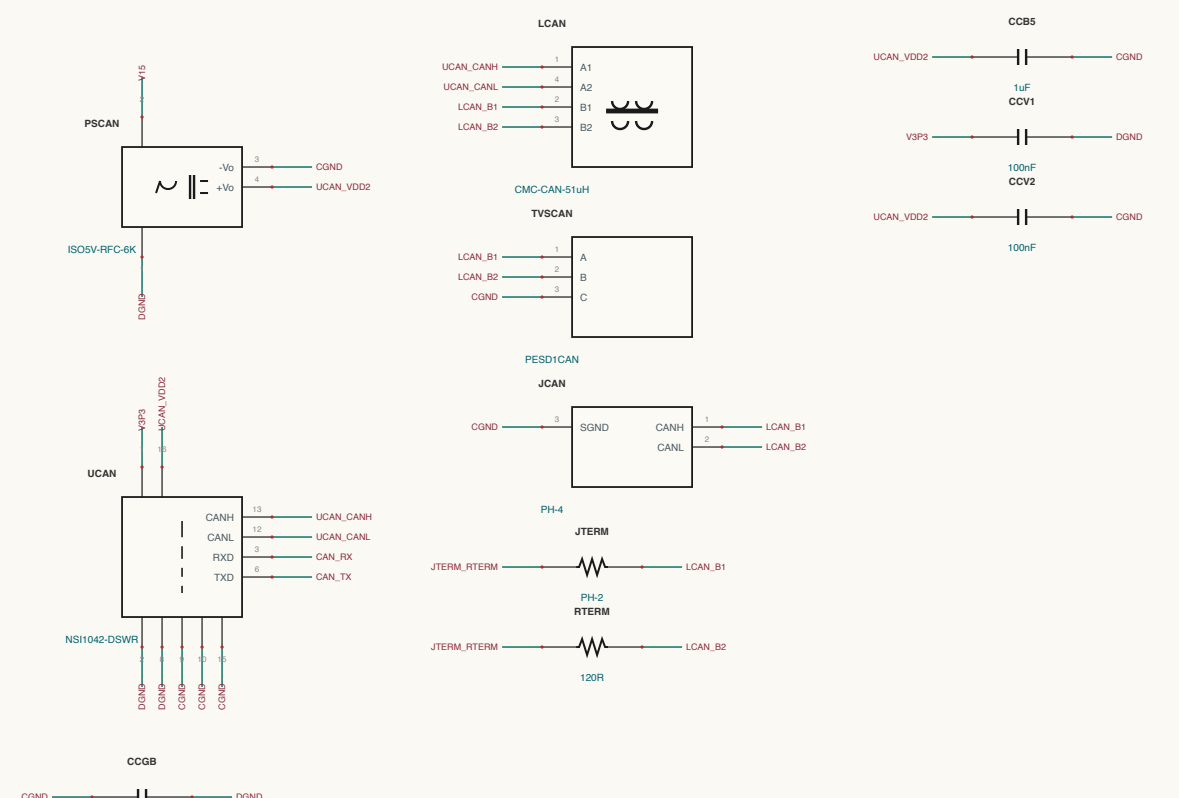

COMBS-HW / HW

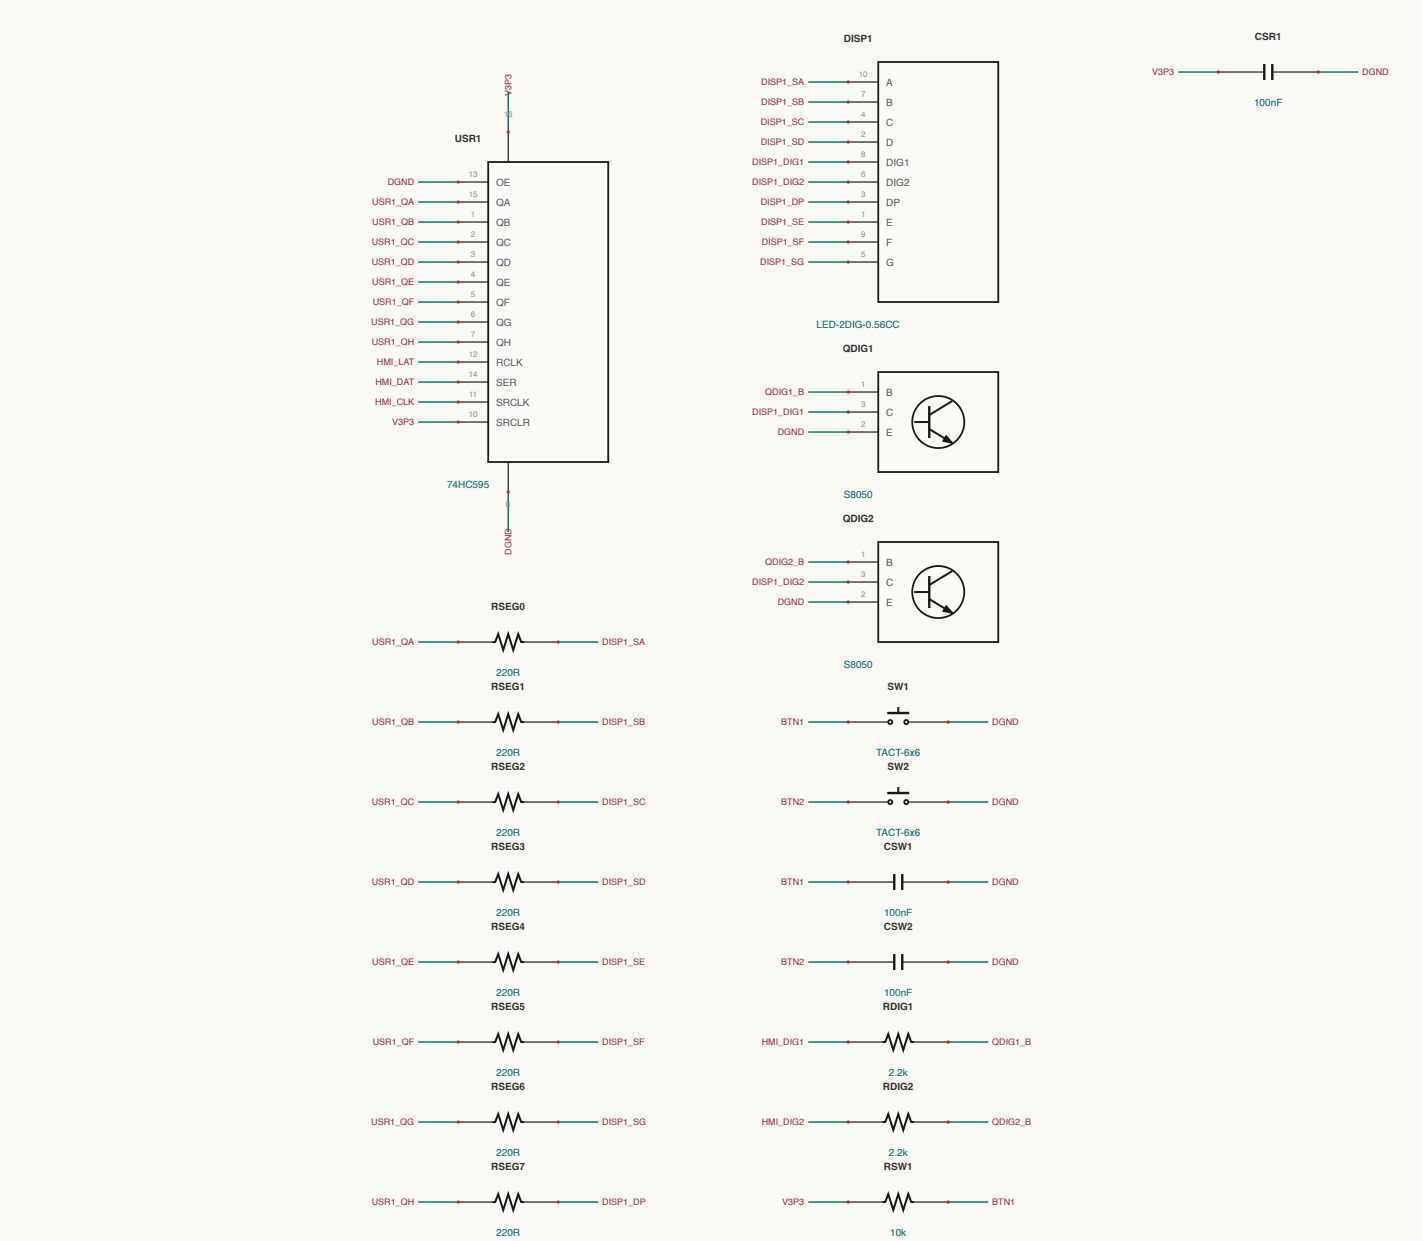


SHEET INDEX

40 kW DCDC Upper 1 of 3
 40 kW DCDC Lower 1 of 3
 40 kW DCDC Upper 2 of 3
 40 kW DCDC Lower 2 of 3
 40 kW DCDC Upper 3 of 3
 40 kW DCDC Lower 3 of 3


NET NAMING

Internal prefixes are reserved for what they join
 Connect - 40kW mode at that C pin e.g. 40kW_VIRK3_M
 Resistor - M resistor of 4 series pair e.g. 40kW_VIRK3_M
 Diodes - diodes for between components e.g. 40kW_VIRK3_M
 All others are explicit design units


CONTROL / CARD-IF

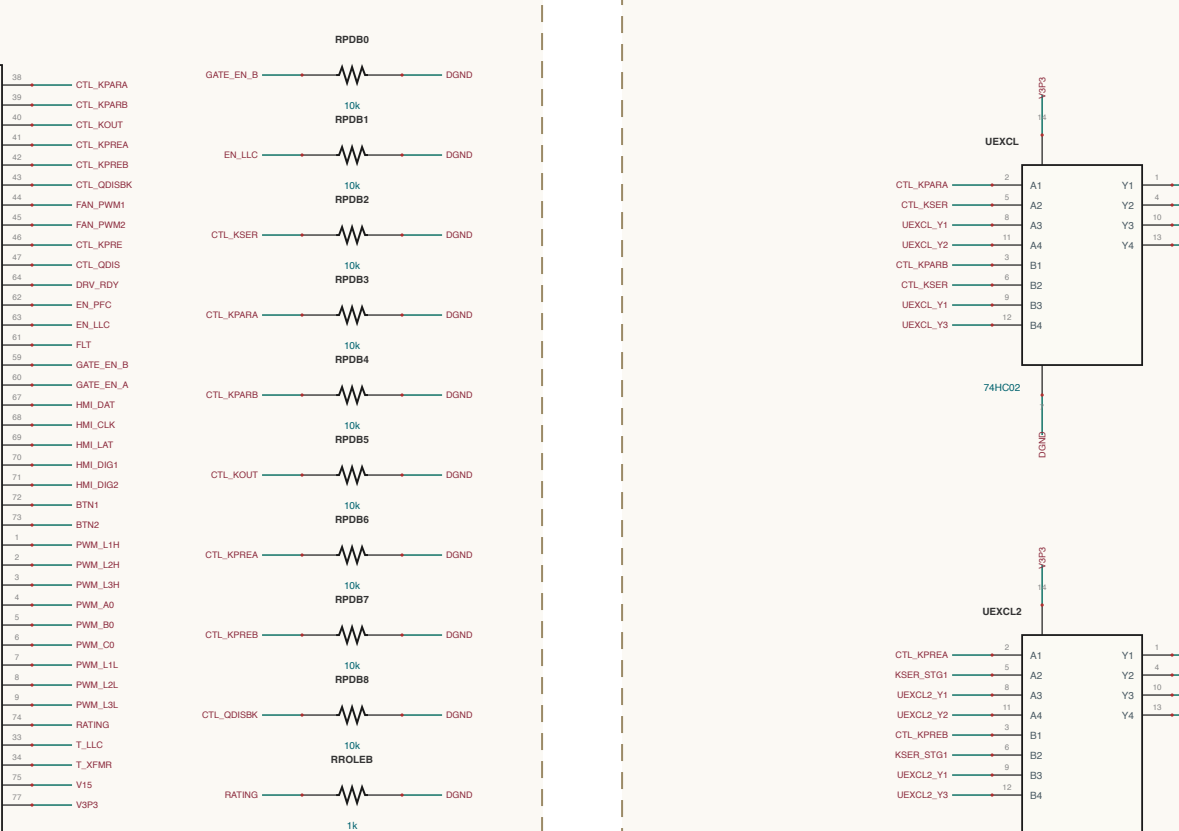


CONTROL / COIL-DRIVER

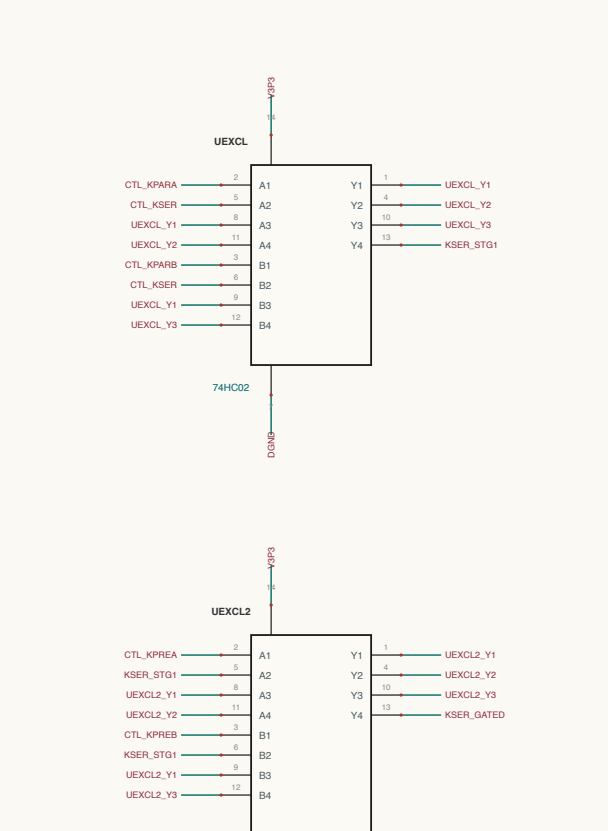


CONTROL / INTERCONNECT

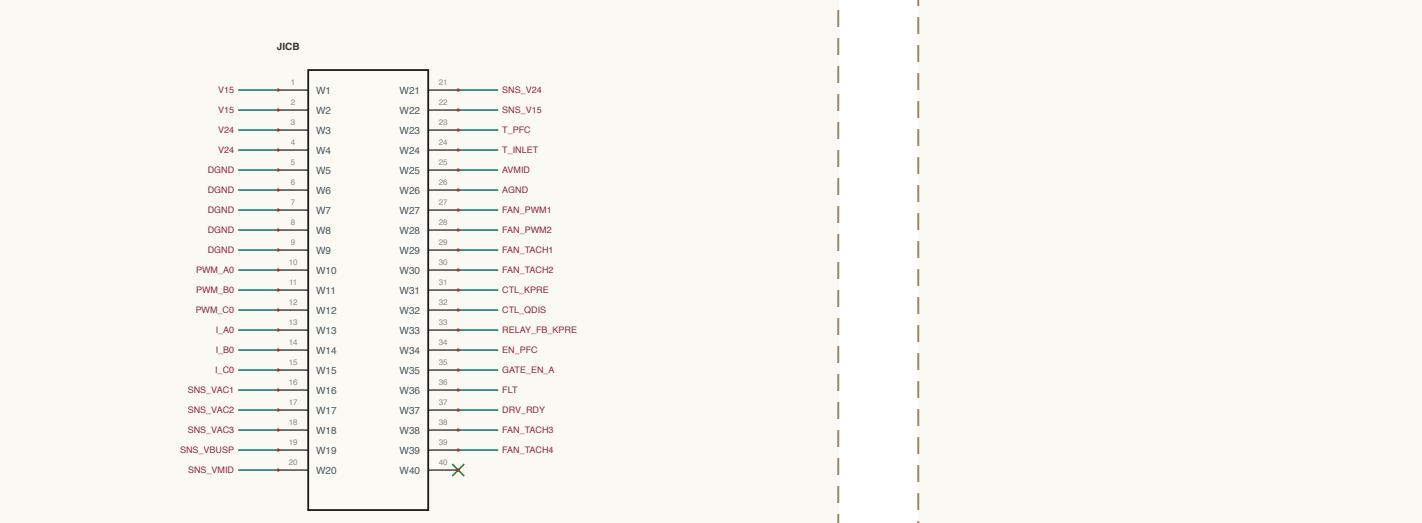


LLC-LESS / LES-1

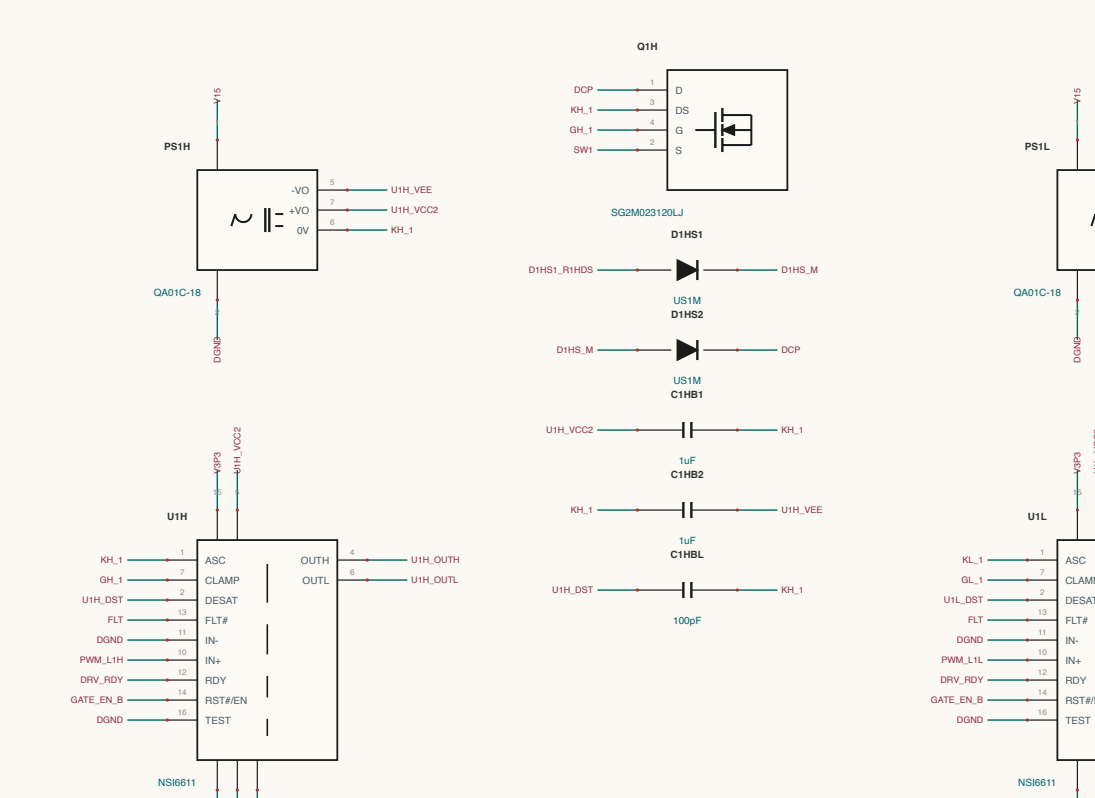

LLC-LESS / LES-2

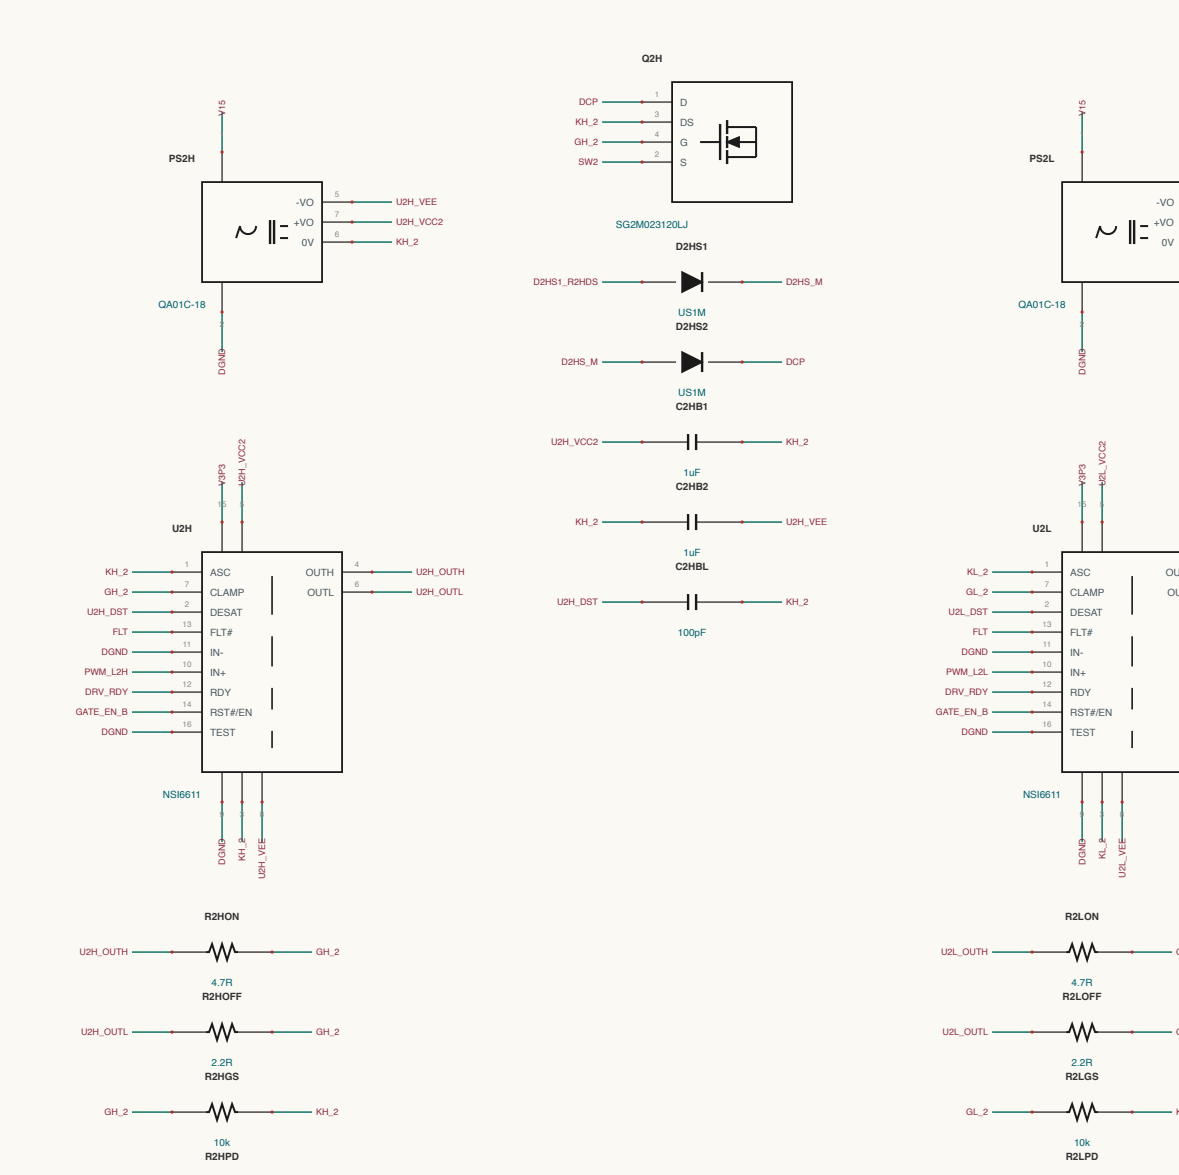

LLC-LESS / LES-3

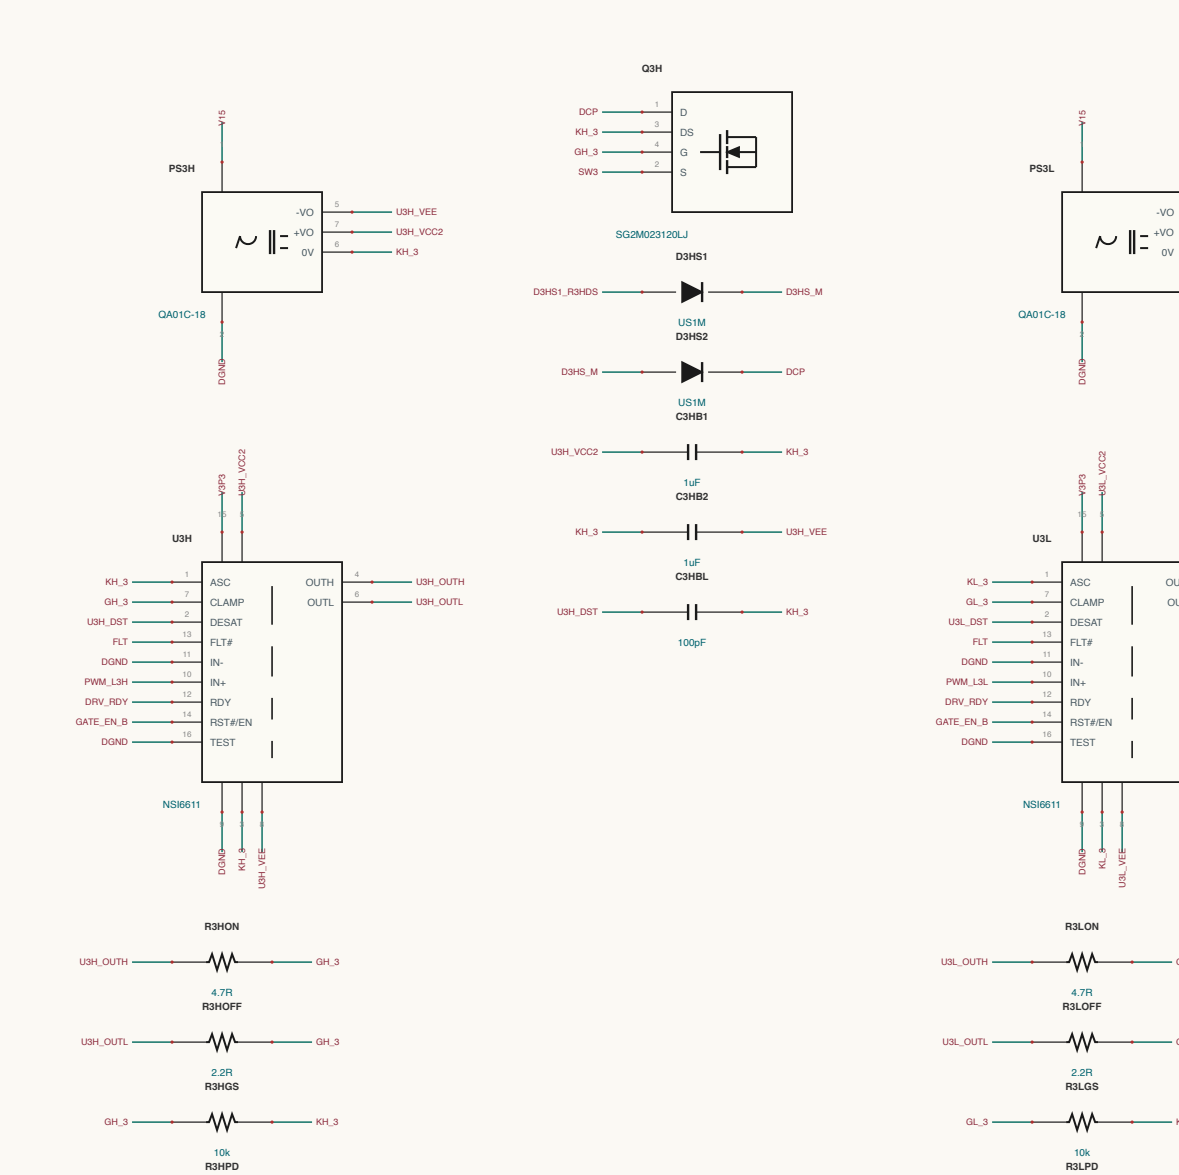

MAGNETICS CONSTRUCTION

Identify per manufacturer not shown, give 10% acceptance from the theory
 0.1 to 1.0 10 to 100000 per section, 0.1 to 1.0 10 to 100000 per section, 0.1 to 1.0 10 to 100000 per section
 0.1 to 1.0 10 to 100000 per section, 0.1 to 1.0 10 to 100000 per section, 0.1 to 1.0 10 to 100000 per section
 0.1 to 1.0 10 to 100000 per section, 0.1 to 1.0 10 to 100000 per section, 0.1 to 1.0 10 to 100000 per section