


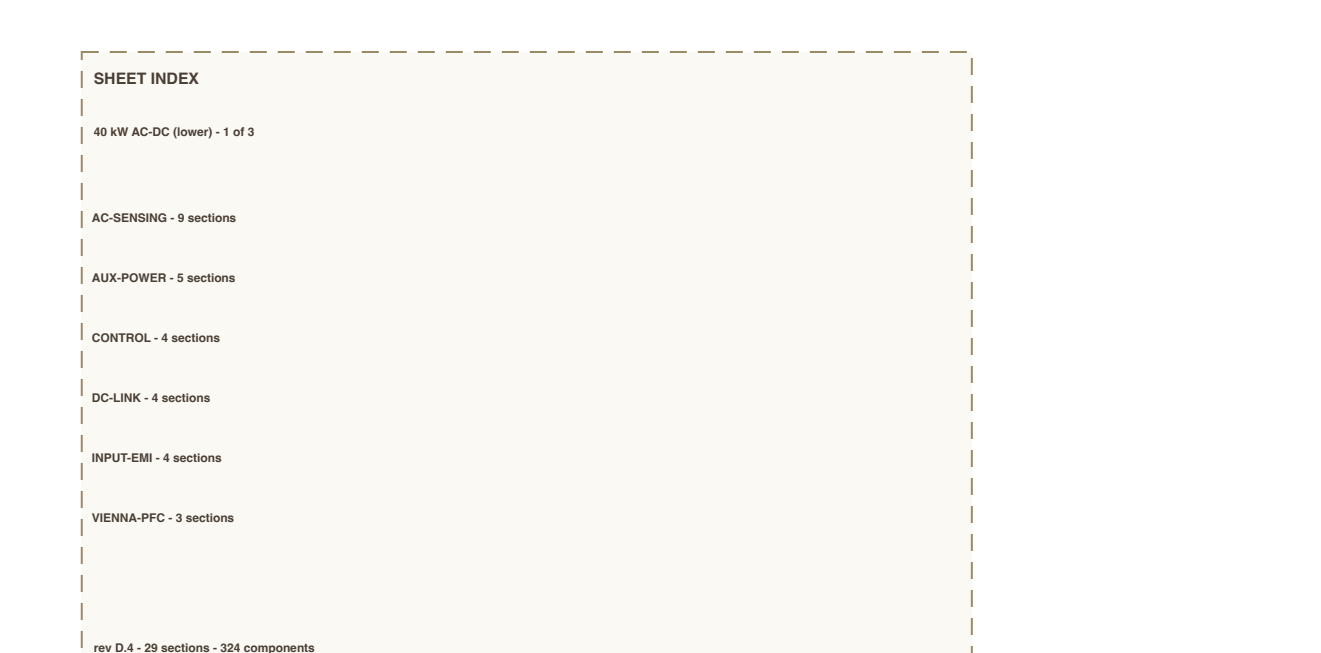
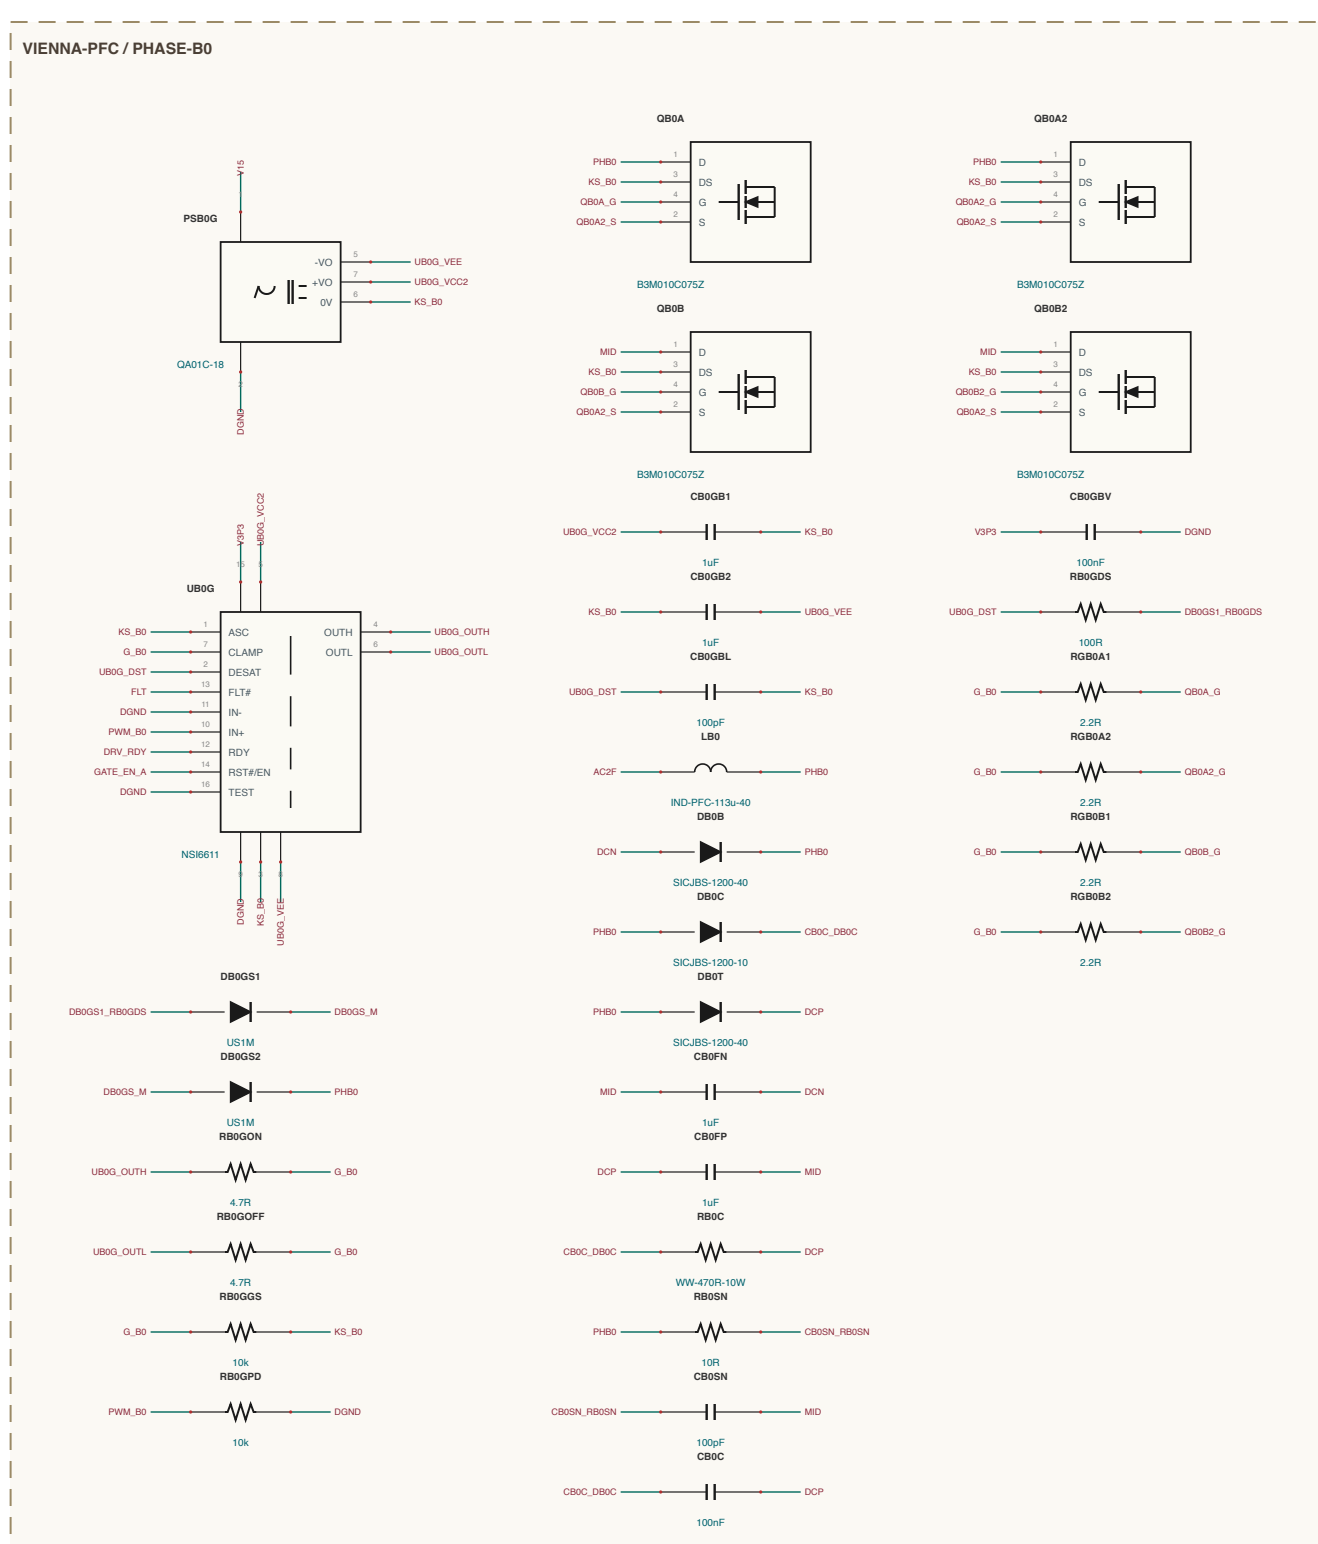
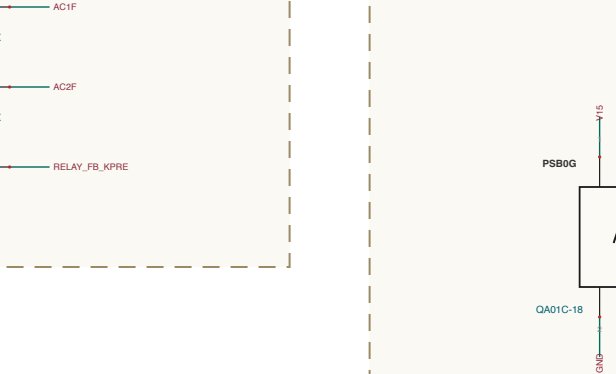
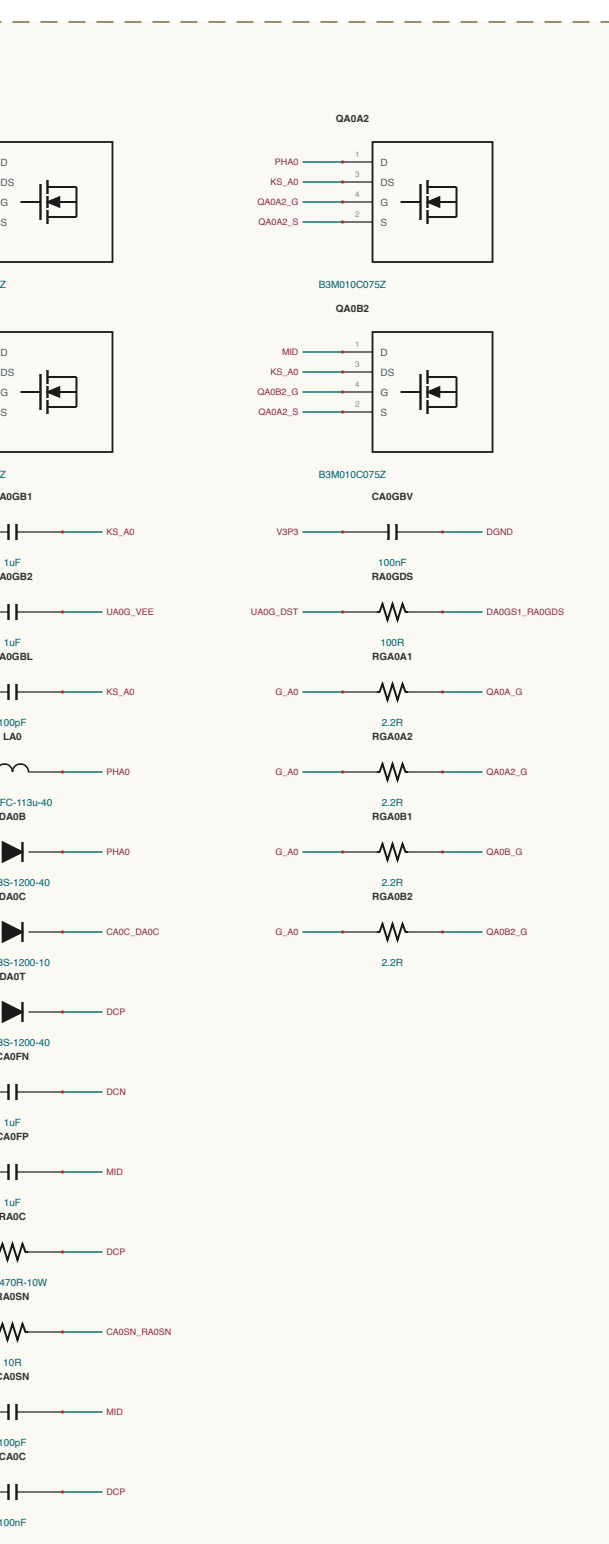
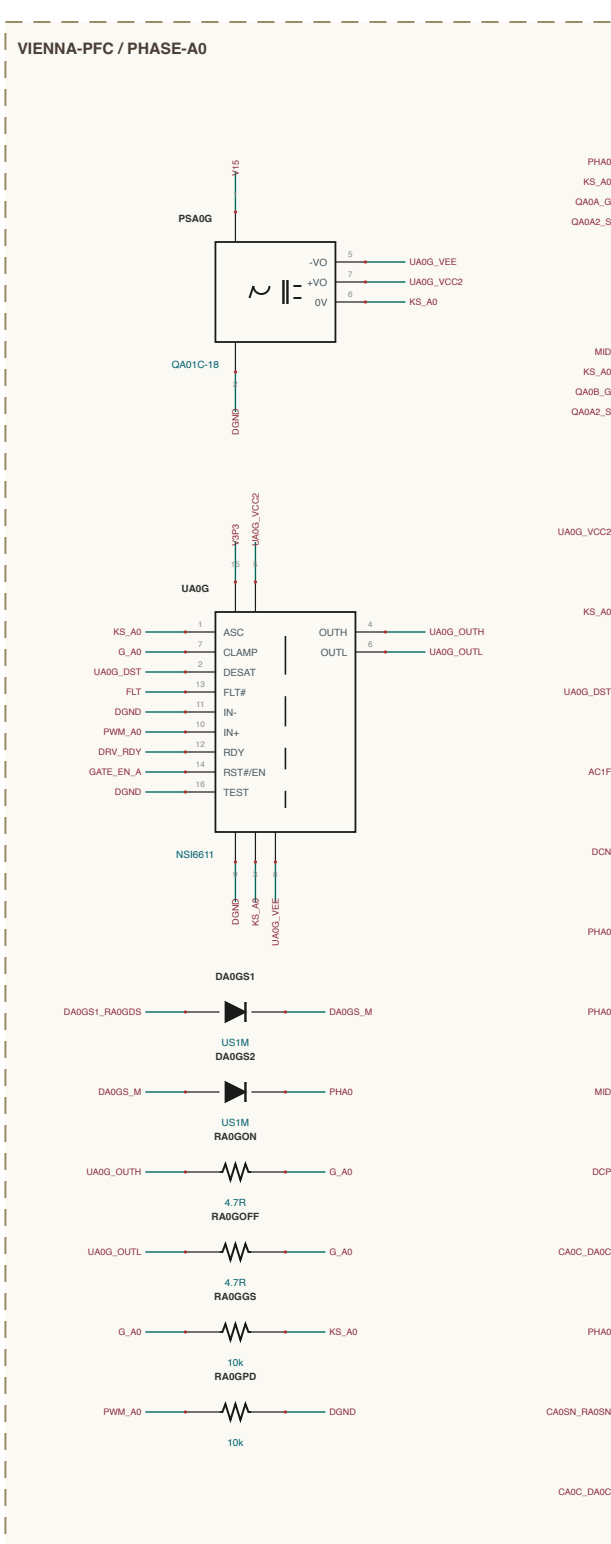
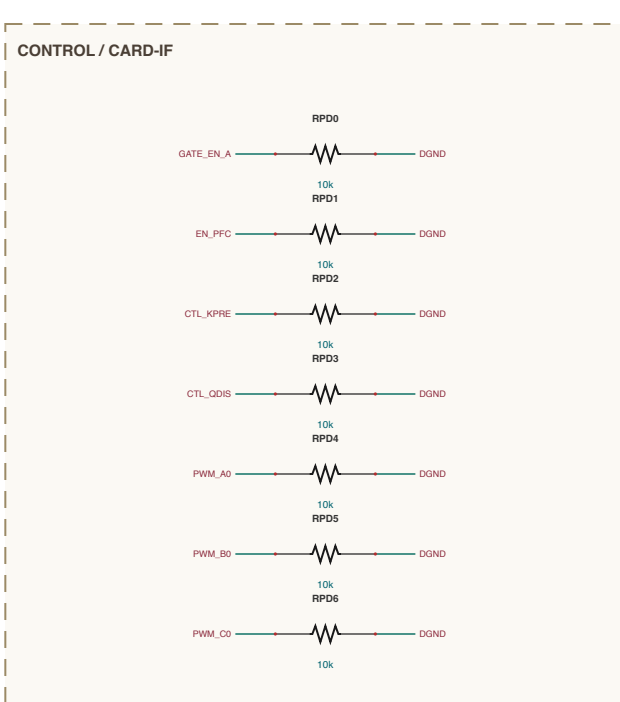
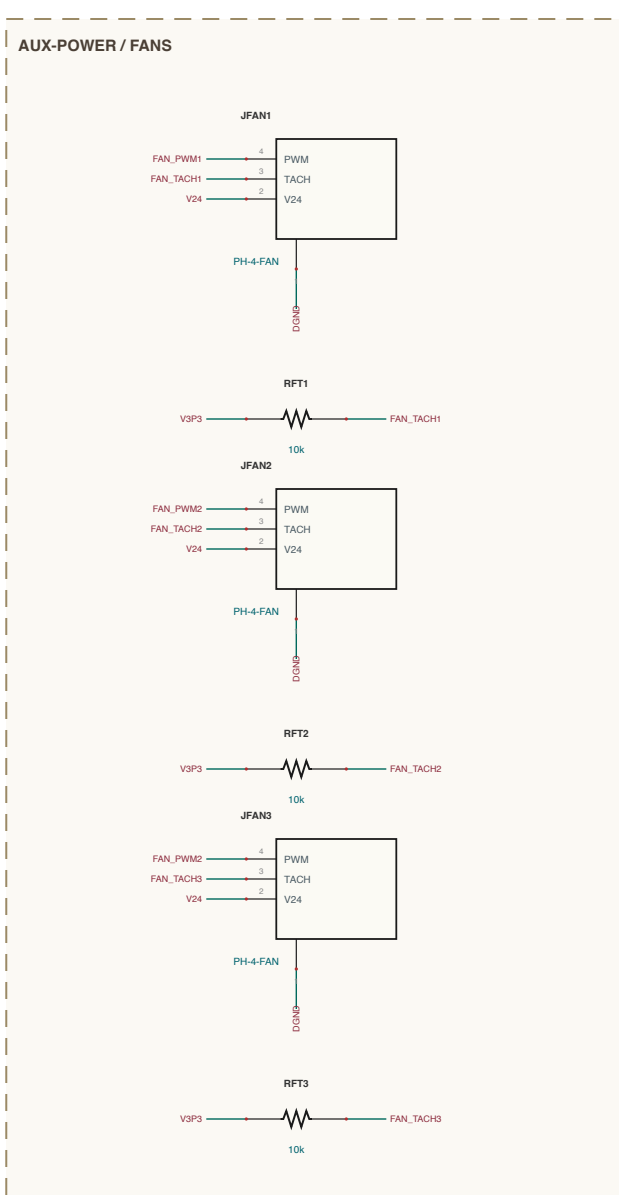
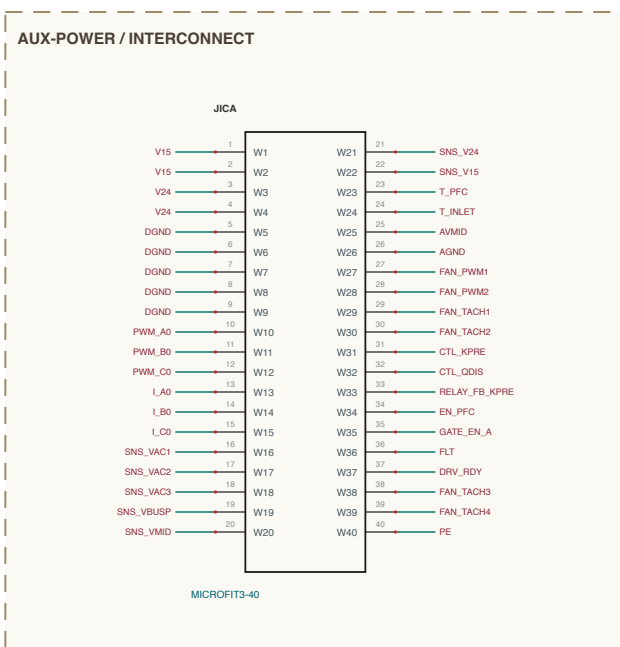
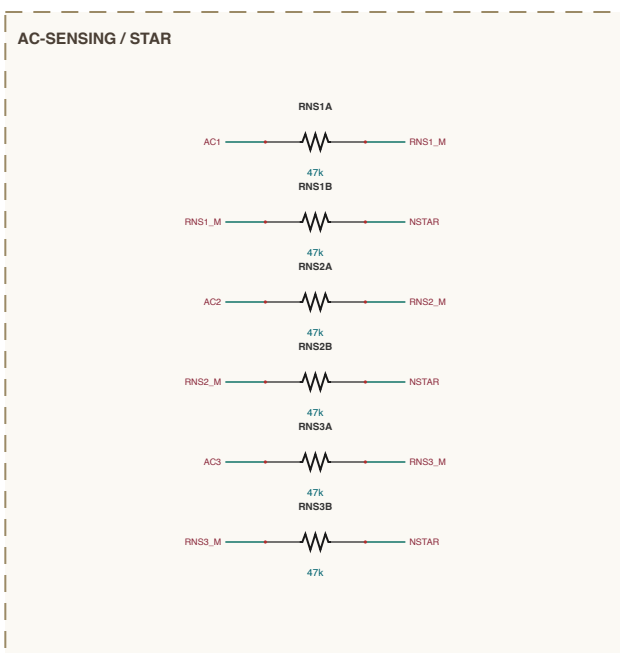
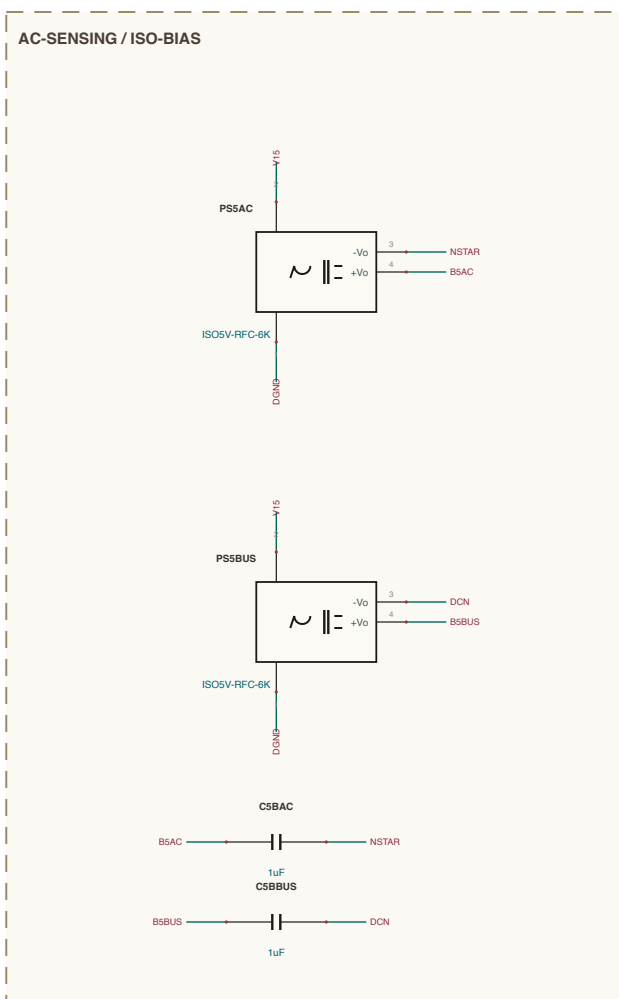
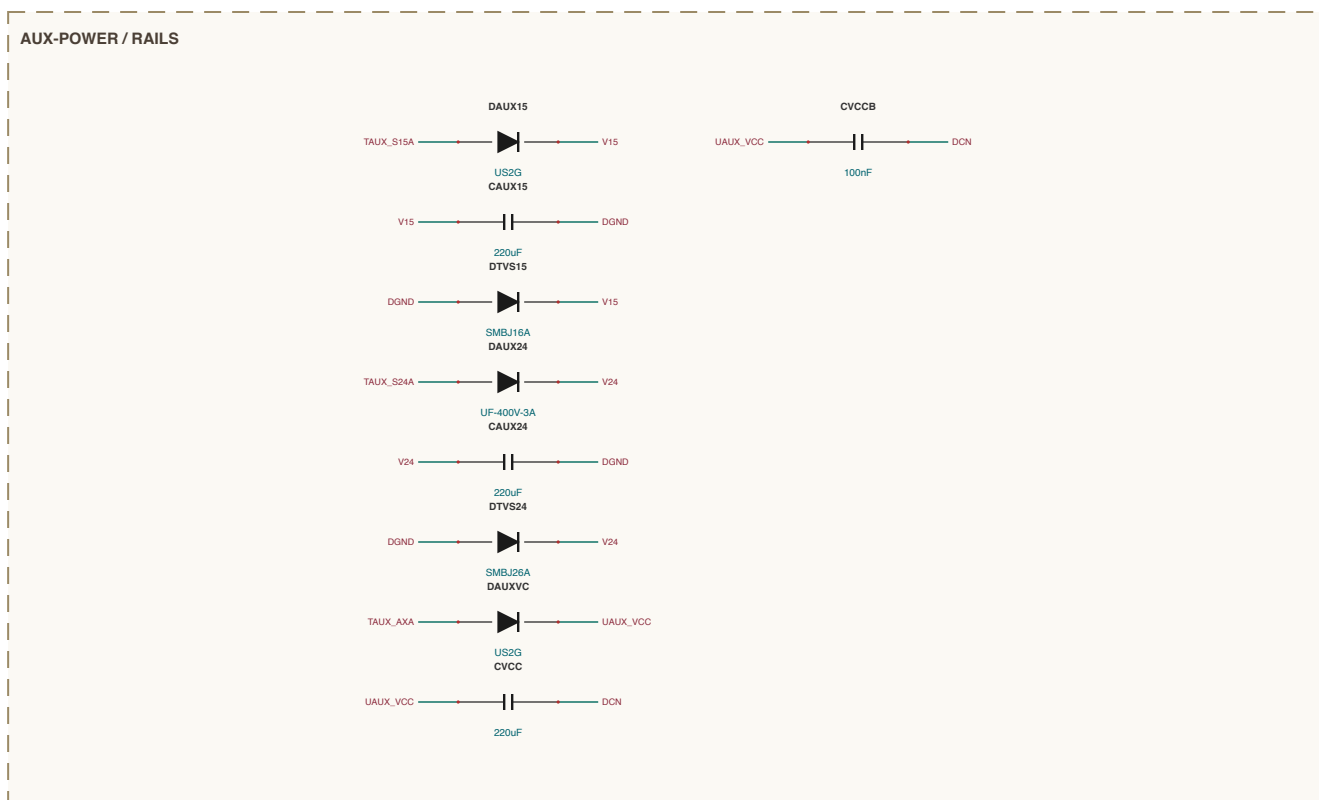
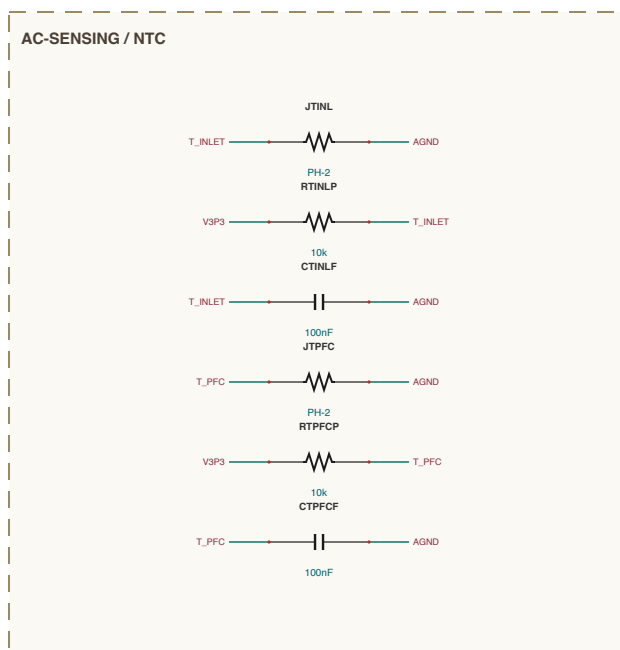
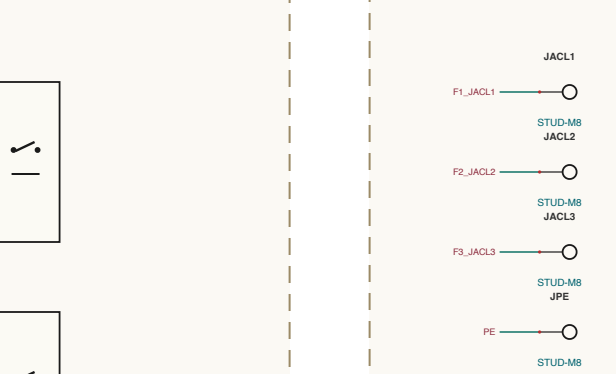
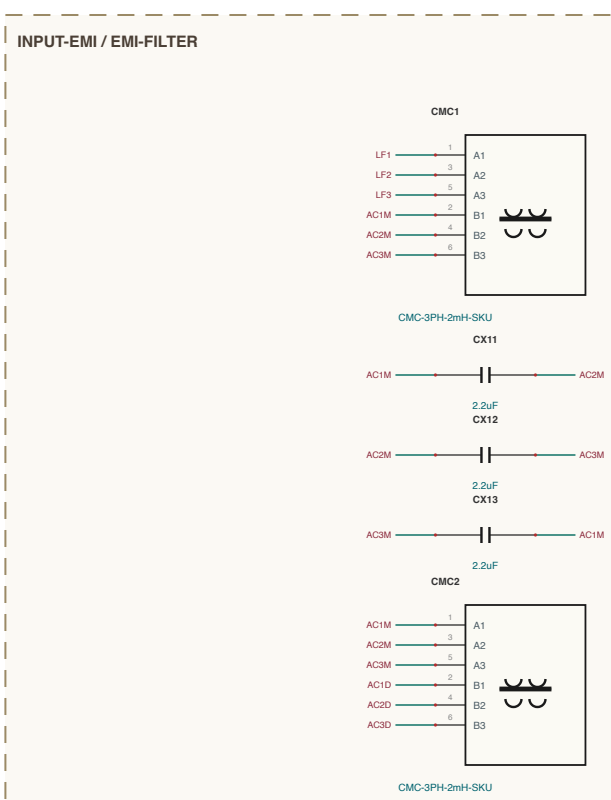
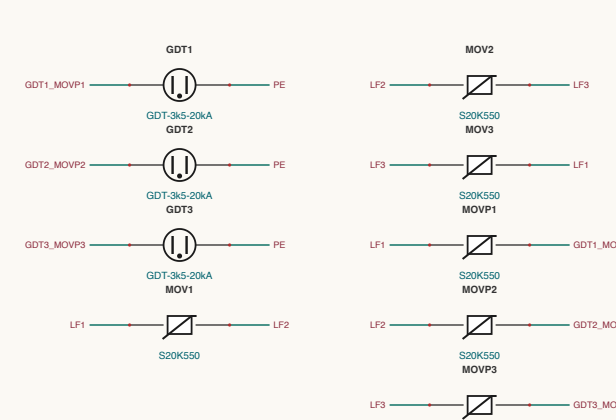

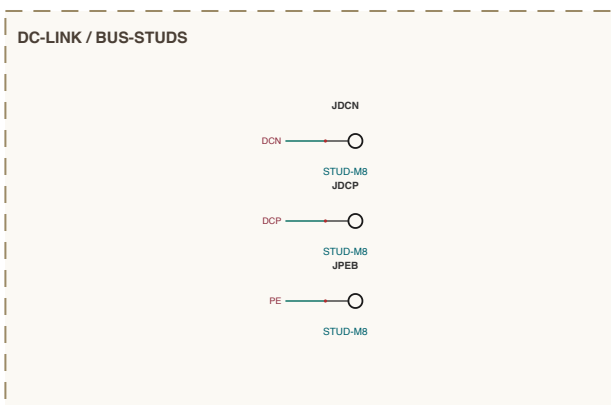
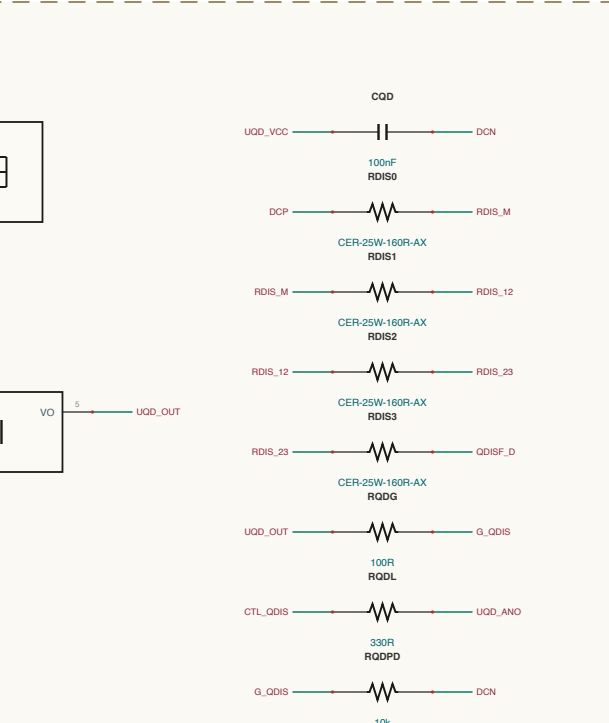
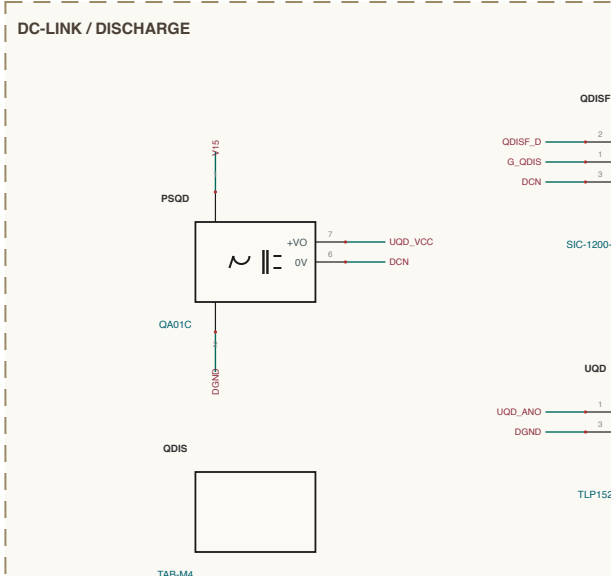
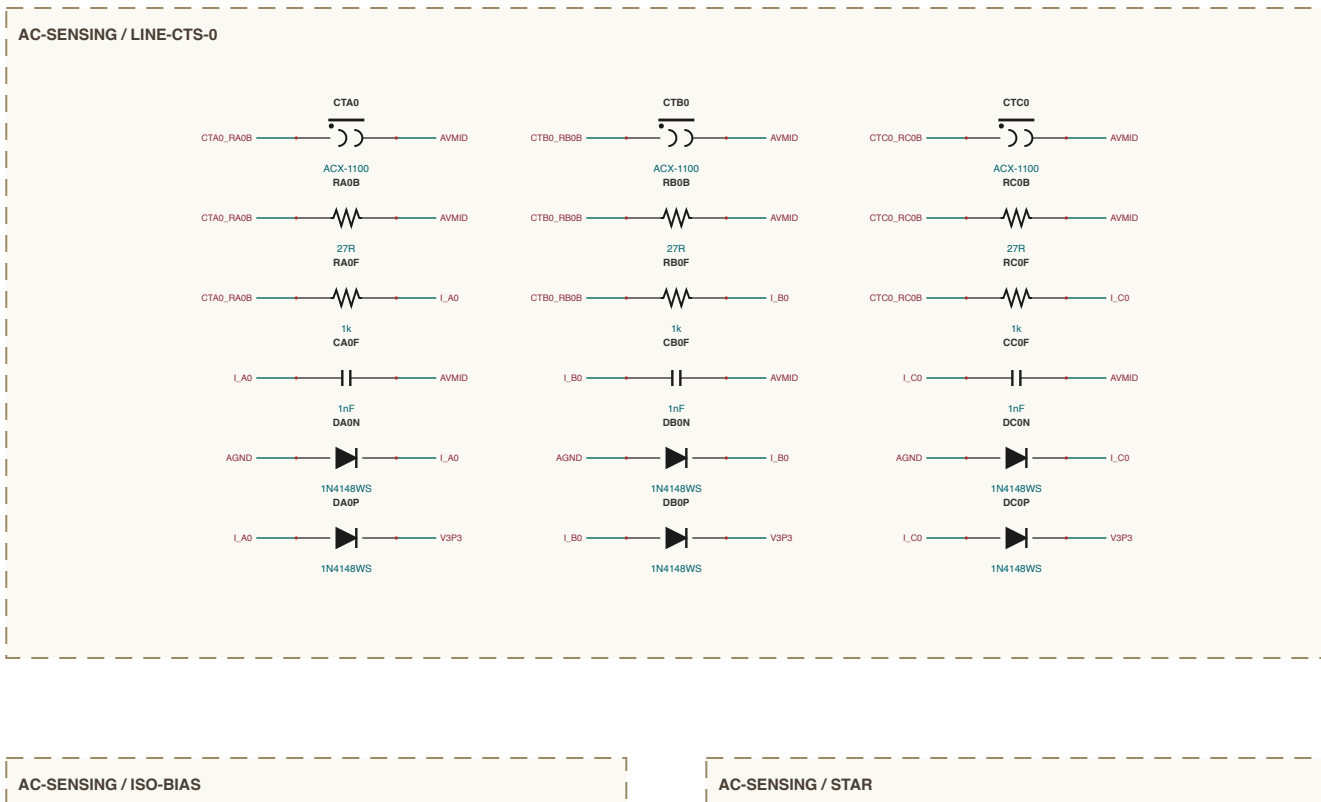
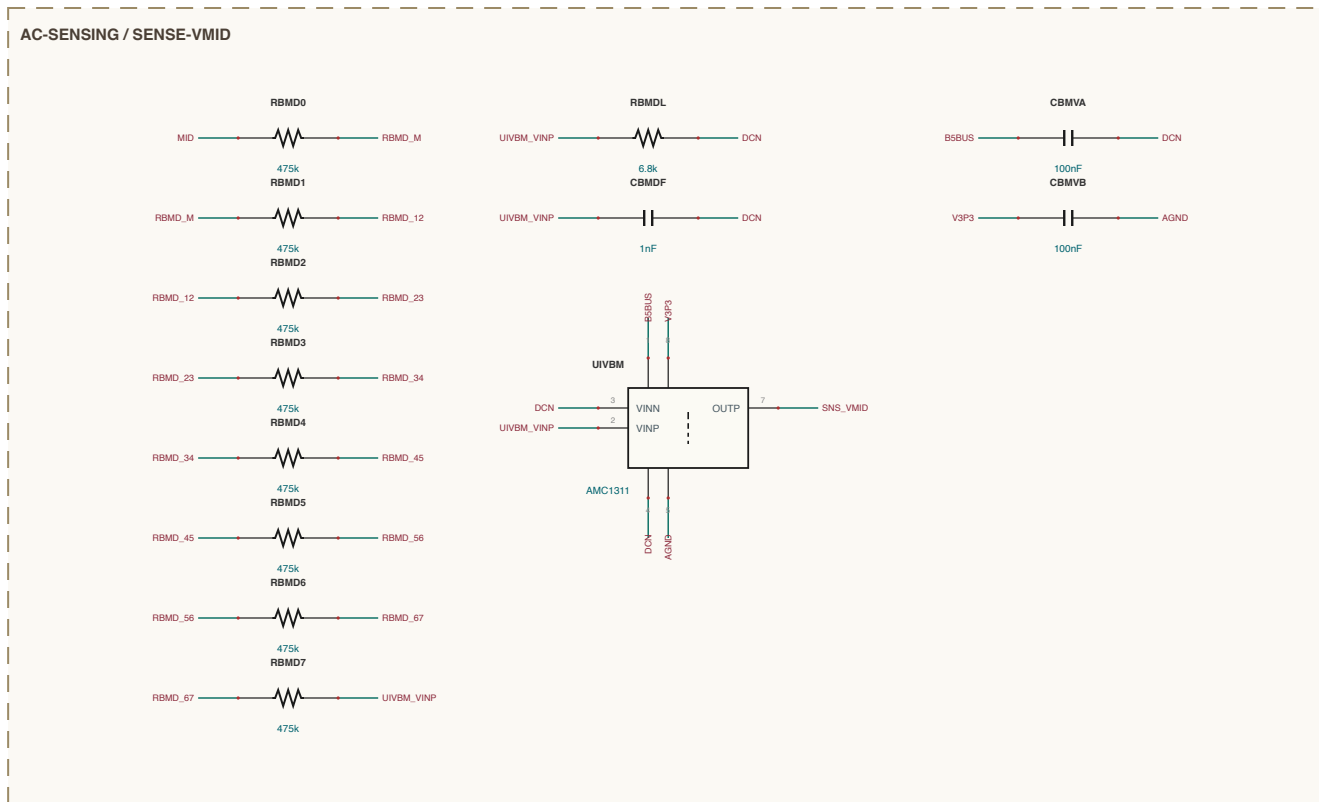
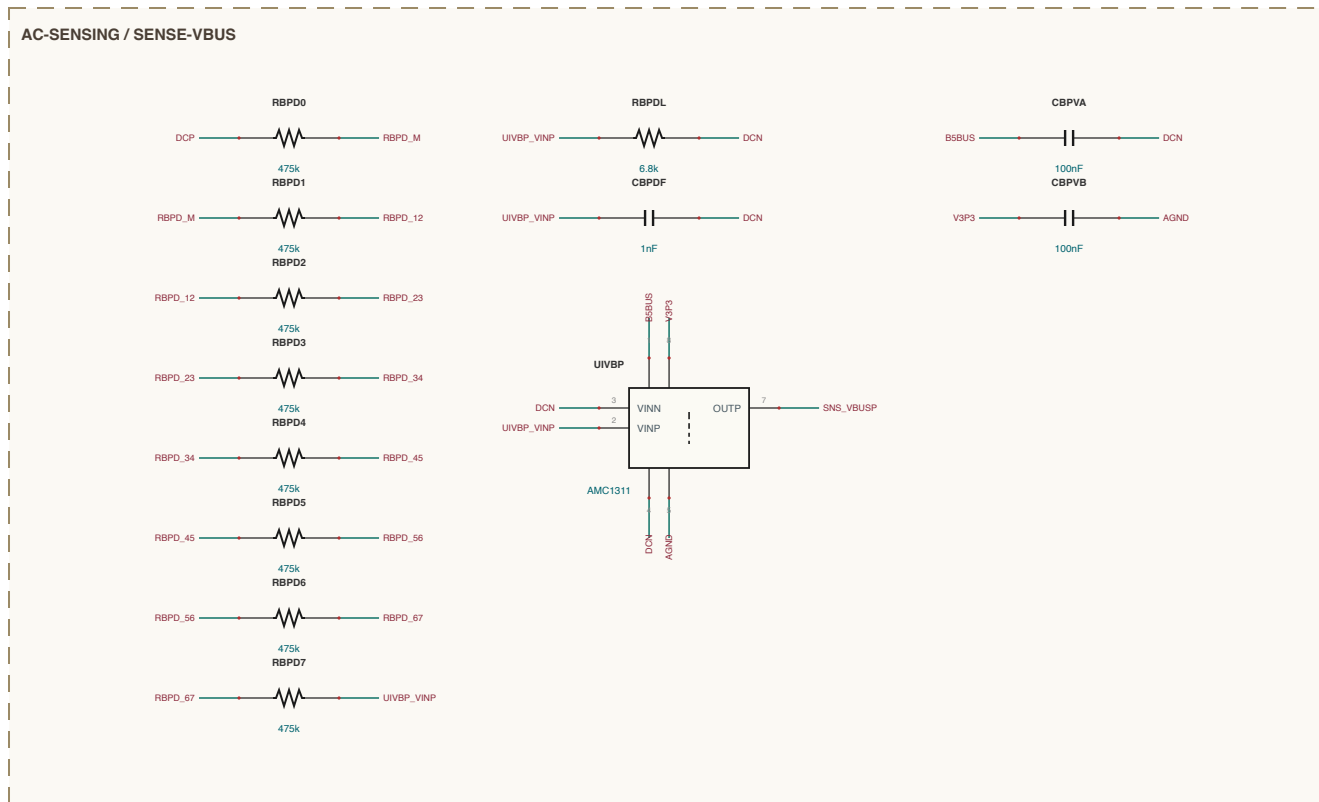
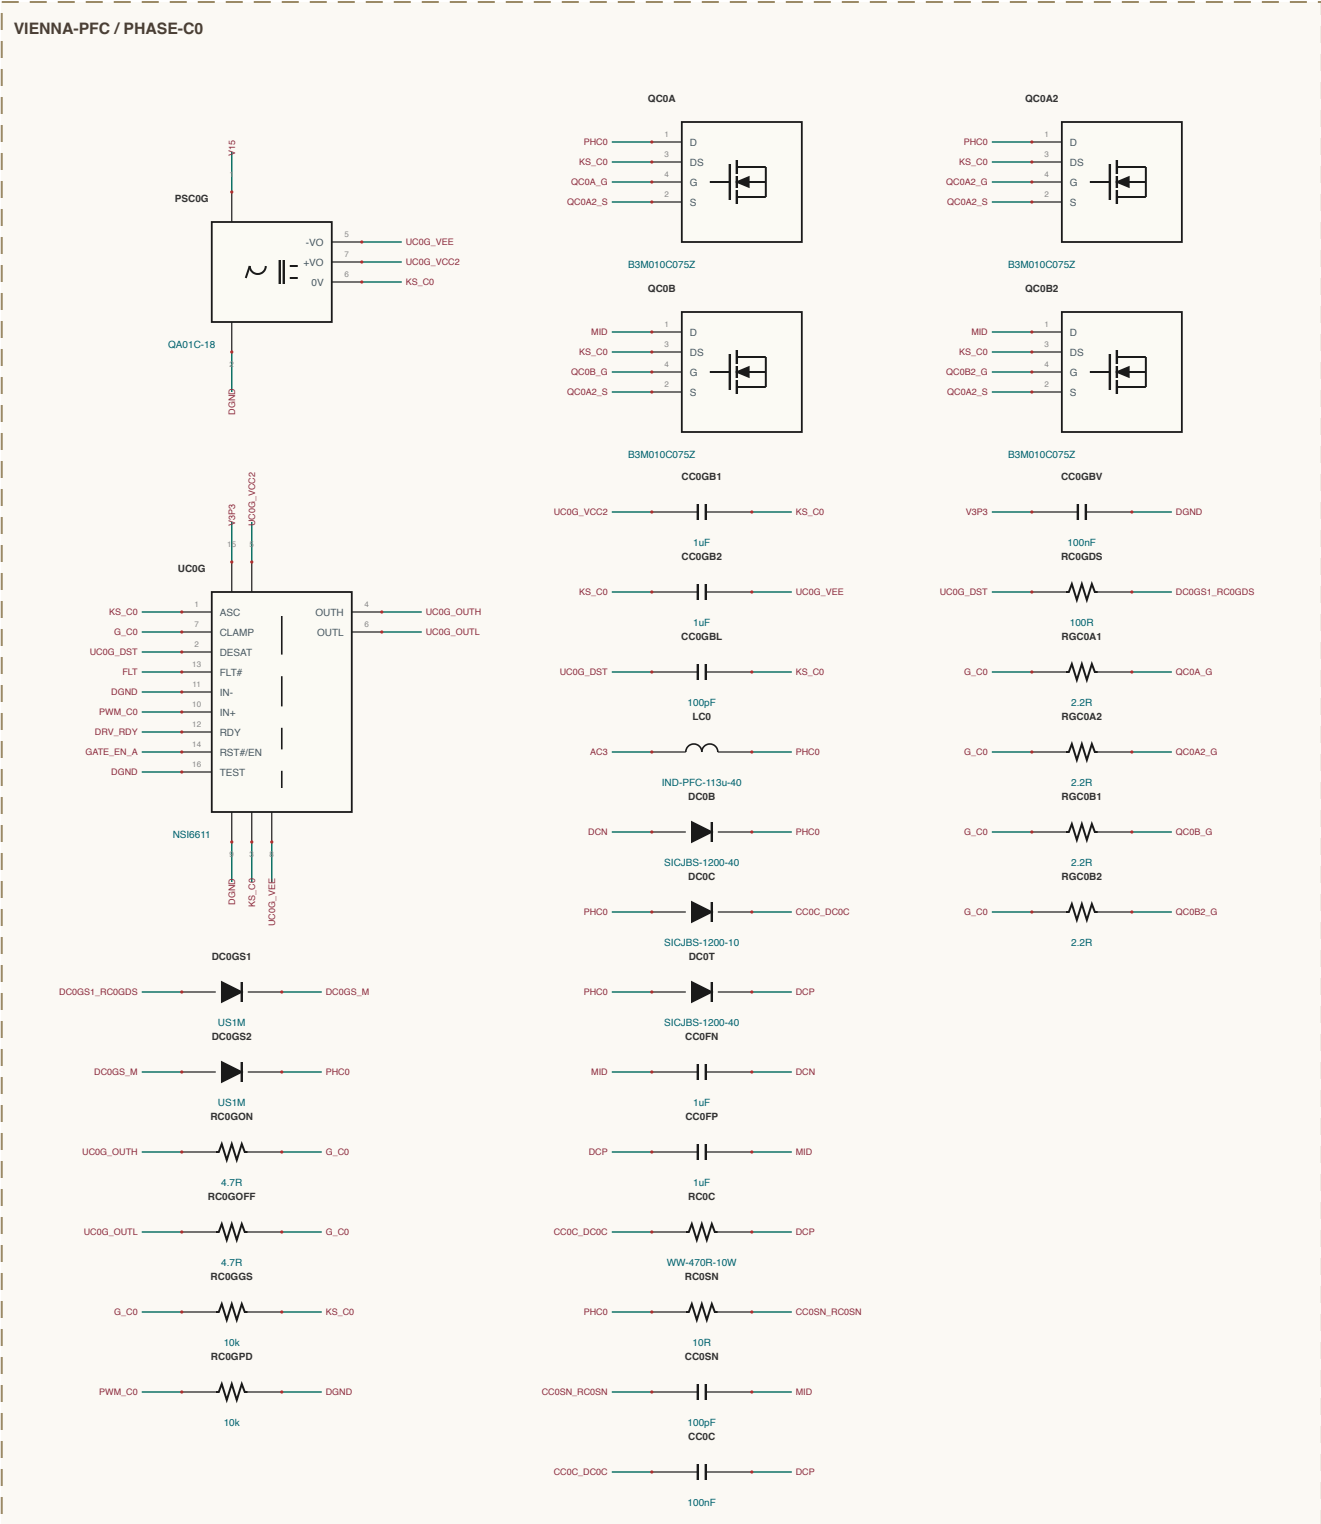
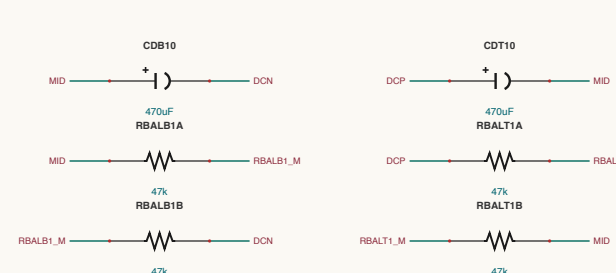
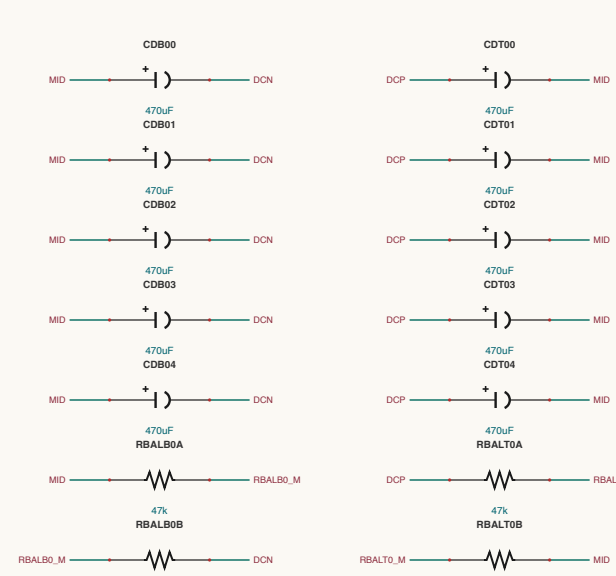
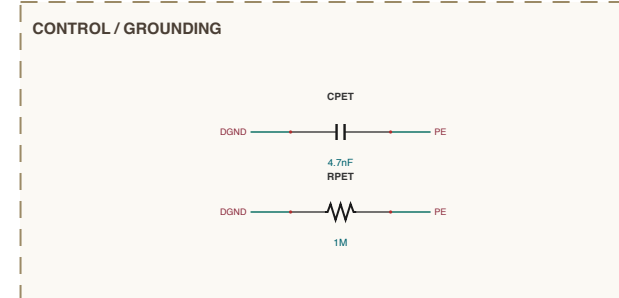
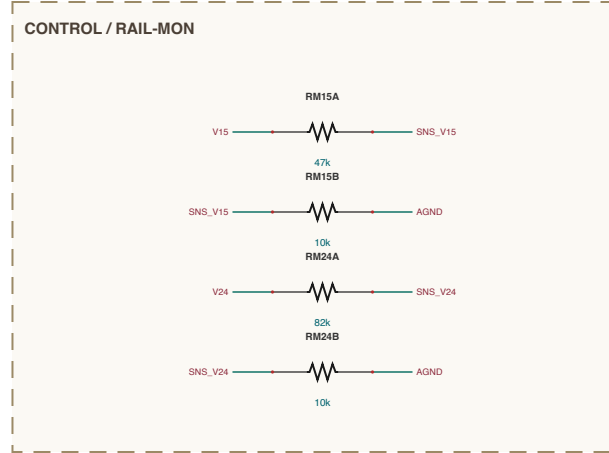
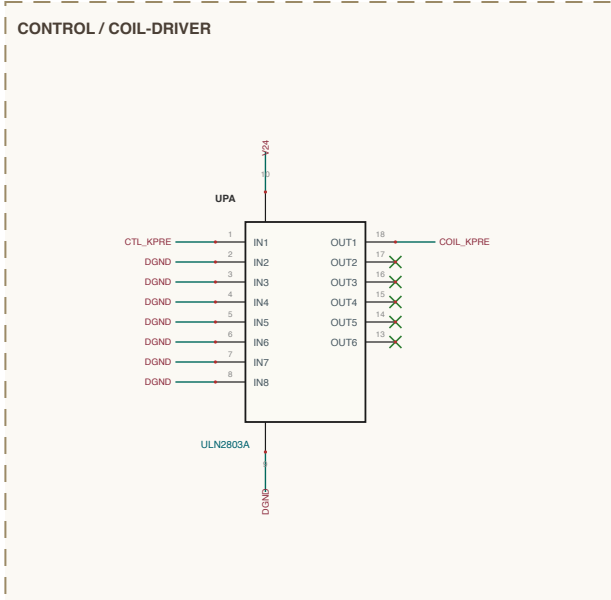
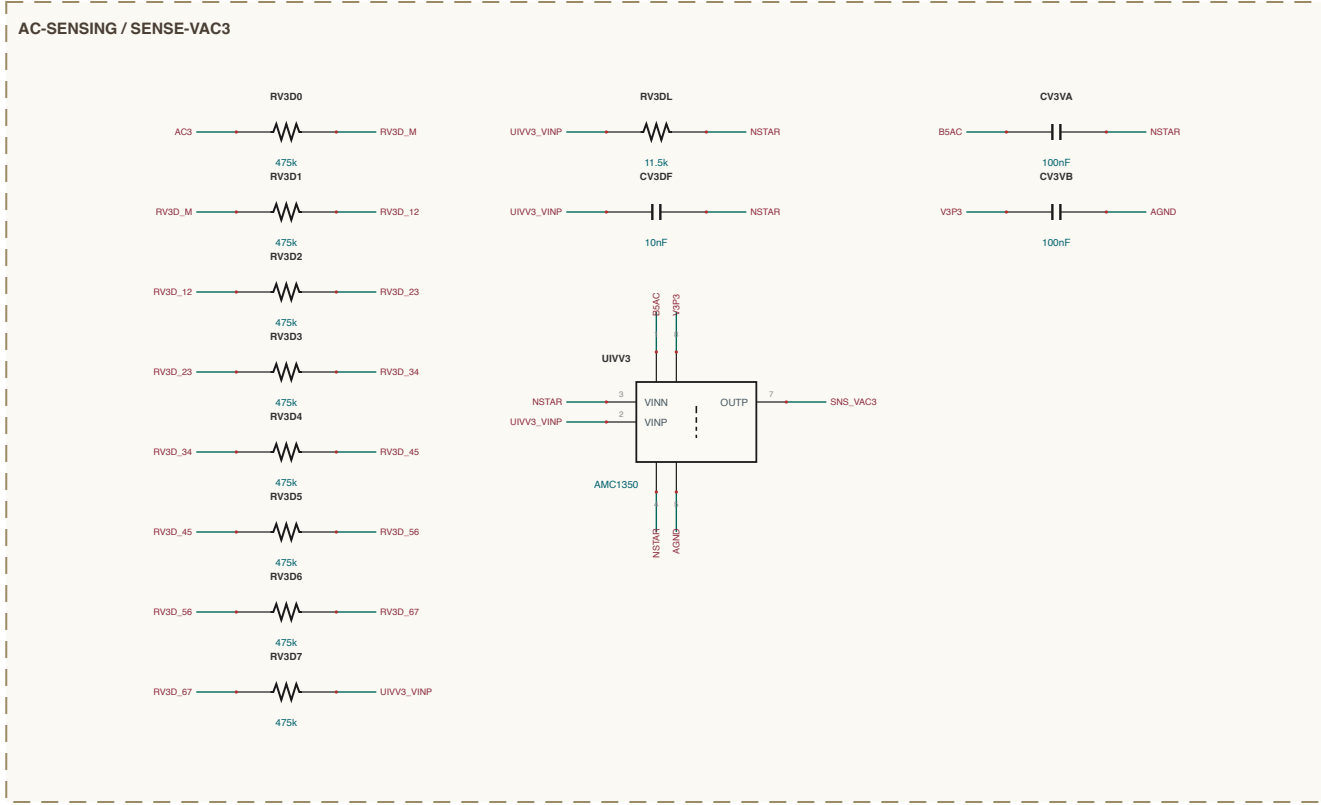
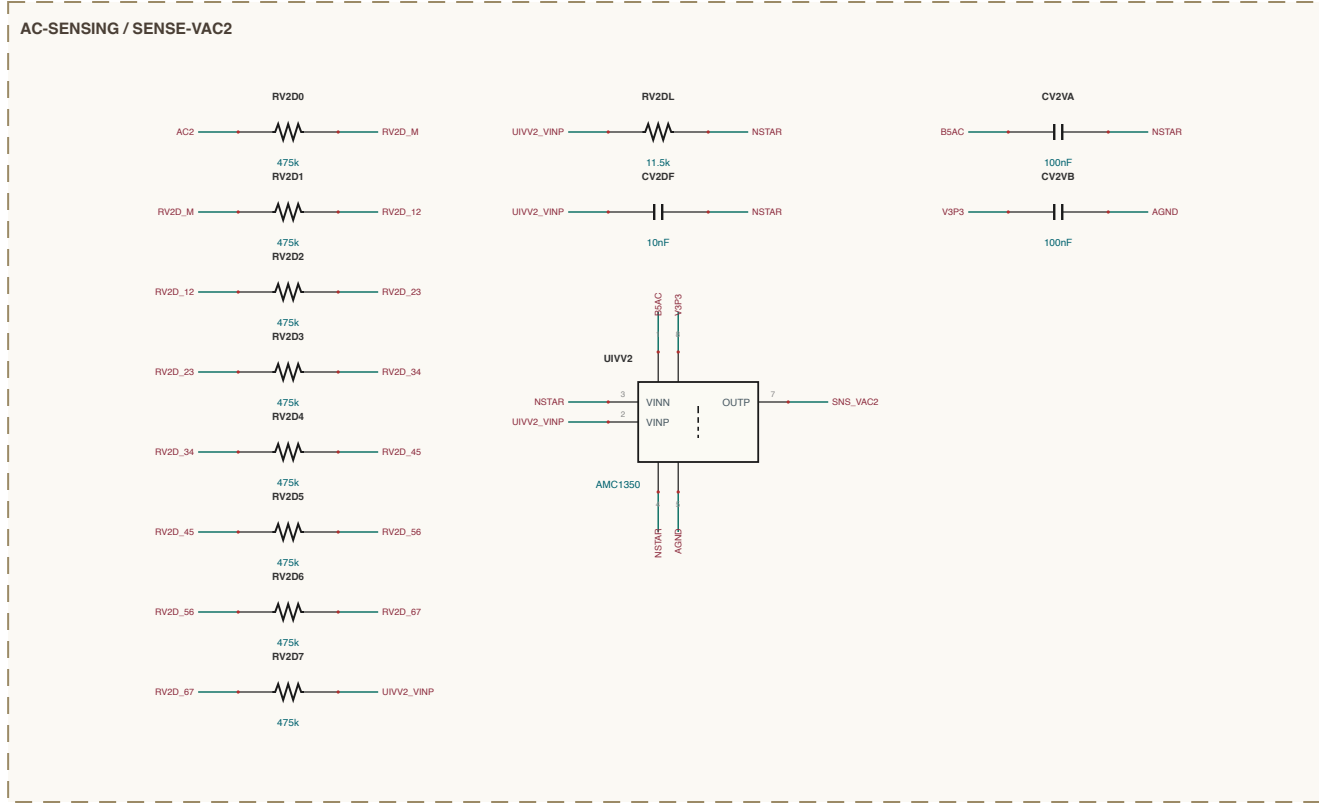


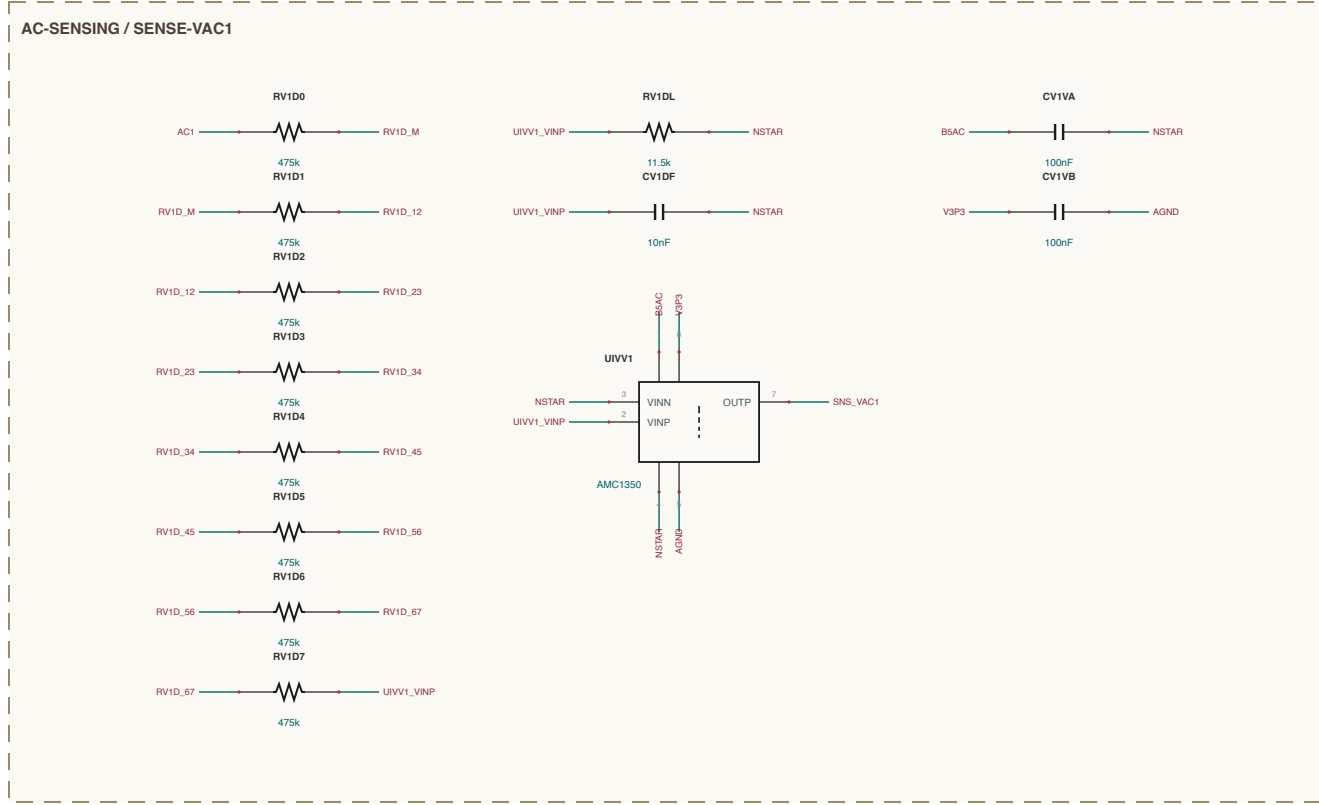


BANKS-SP / BANK-A

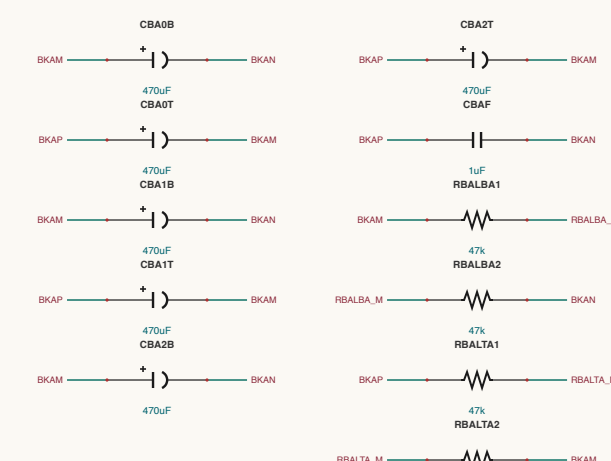


BANKS-SP / BANK-B

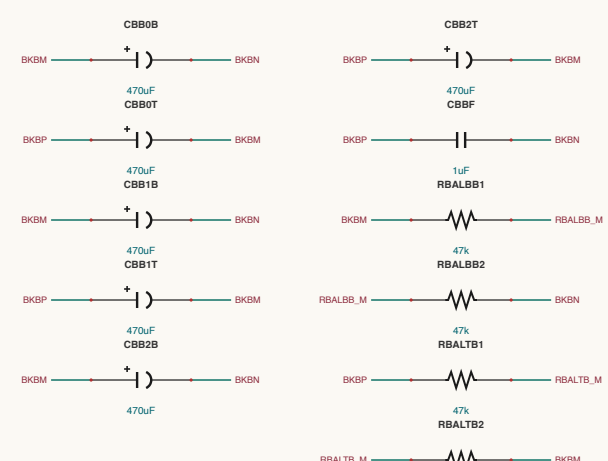


BANKS-SP / SP-MATRIX

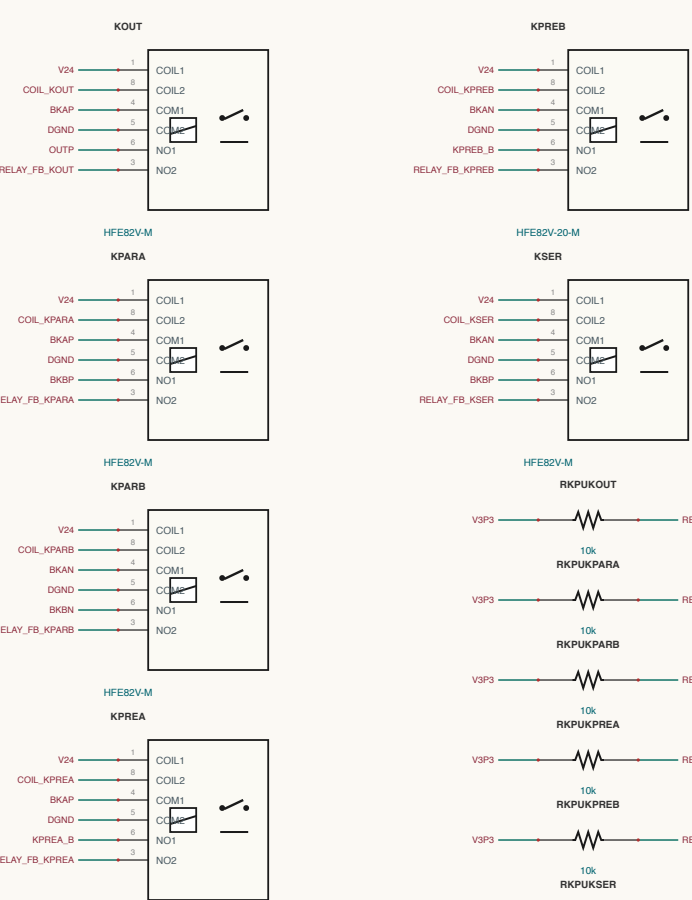


BANKS-SP / BLEEDERS

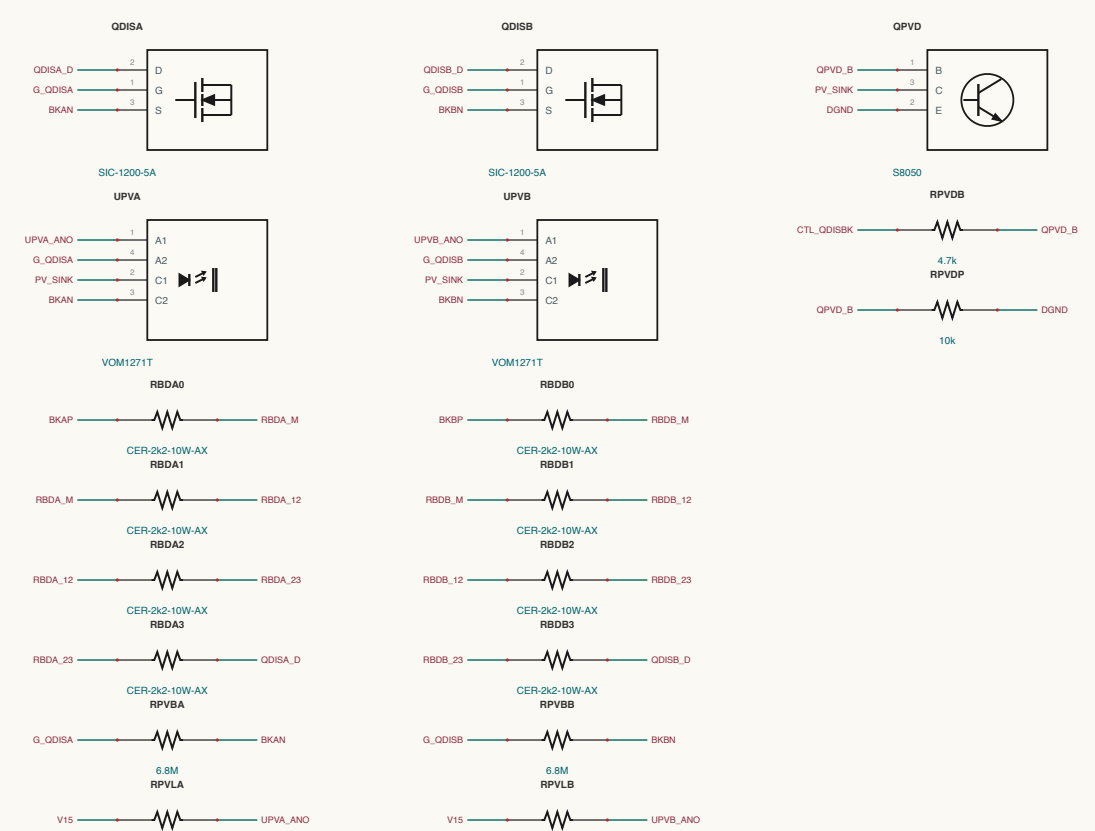


LLC-TANKS / TANK-1

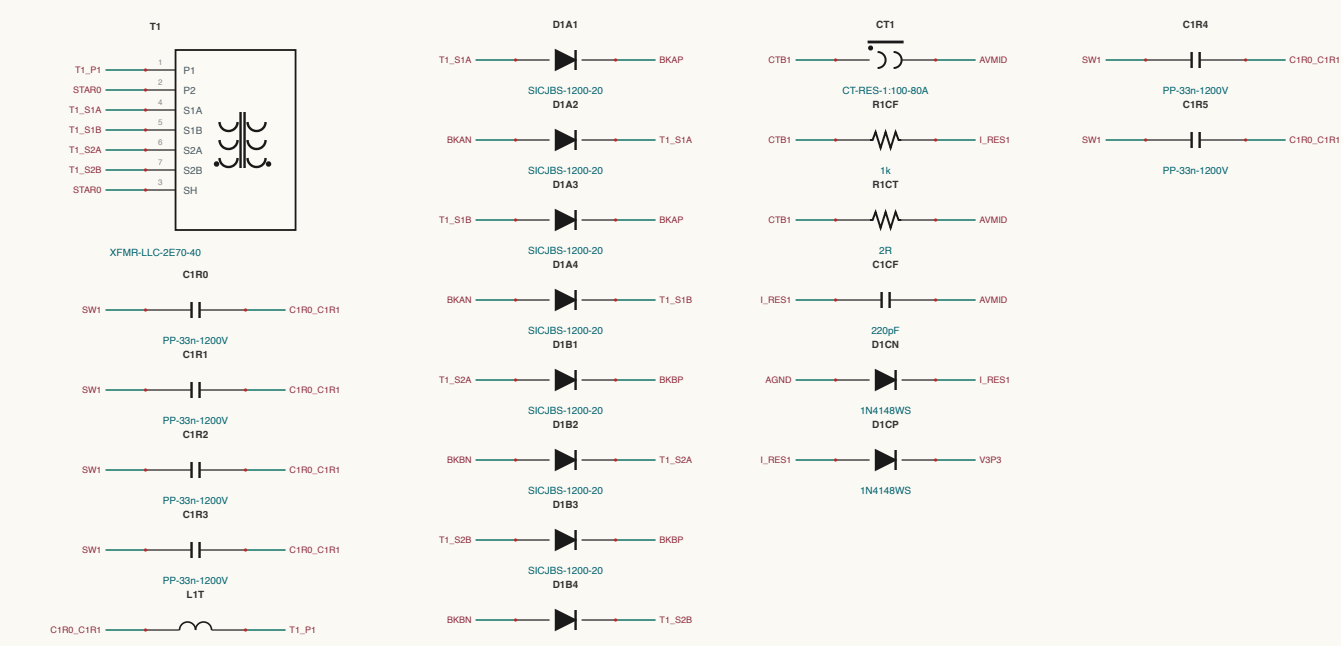


LLC-TANKS / TANK-2

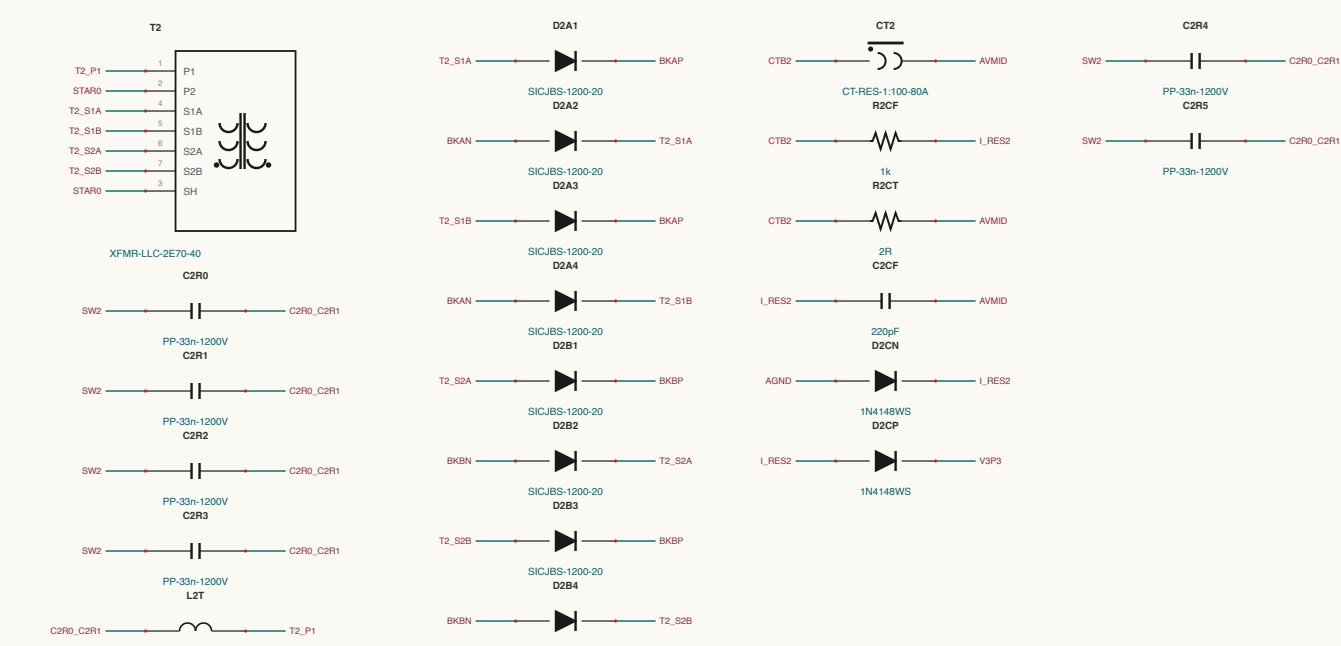


LLC-TANKS / TANK-3

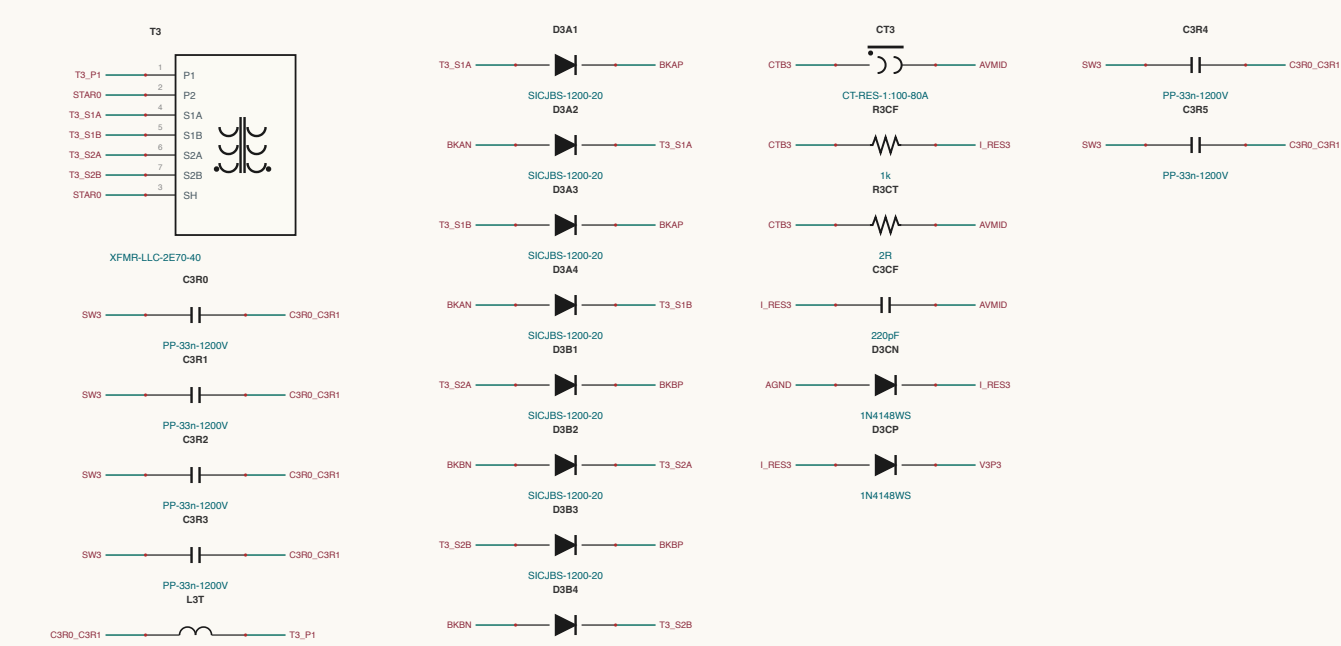


OUTPUT-SENSING / SENSE-VIRKA

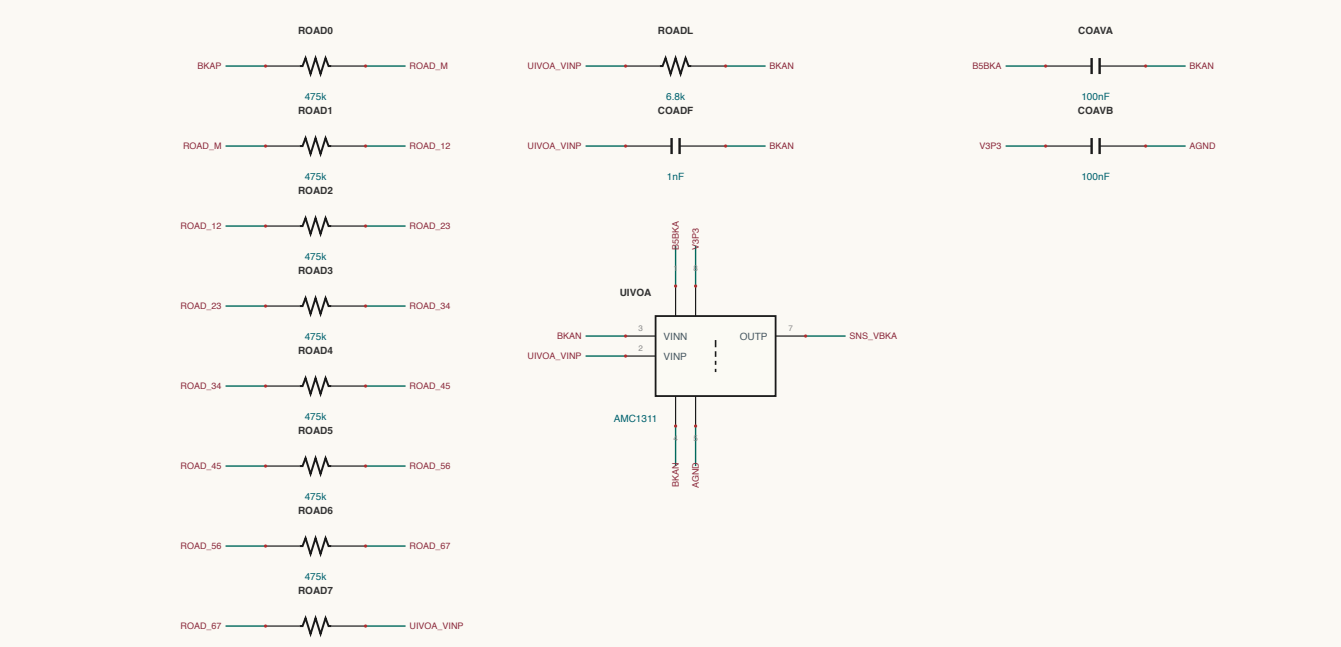


OUTPUT-SENSING / SENSE-VIRK3

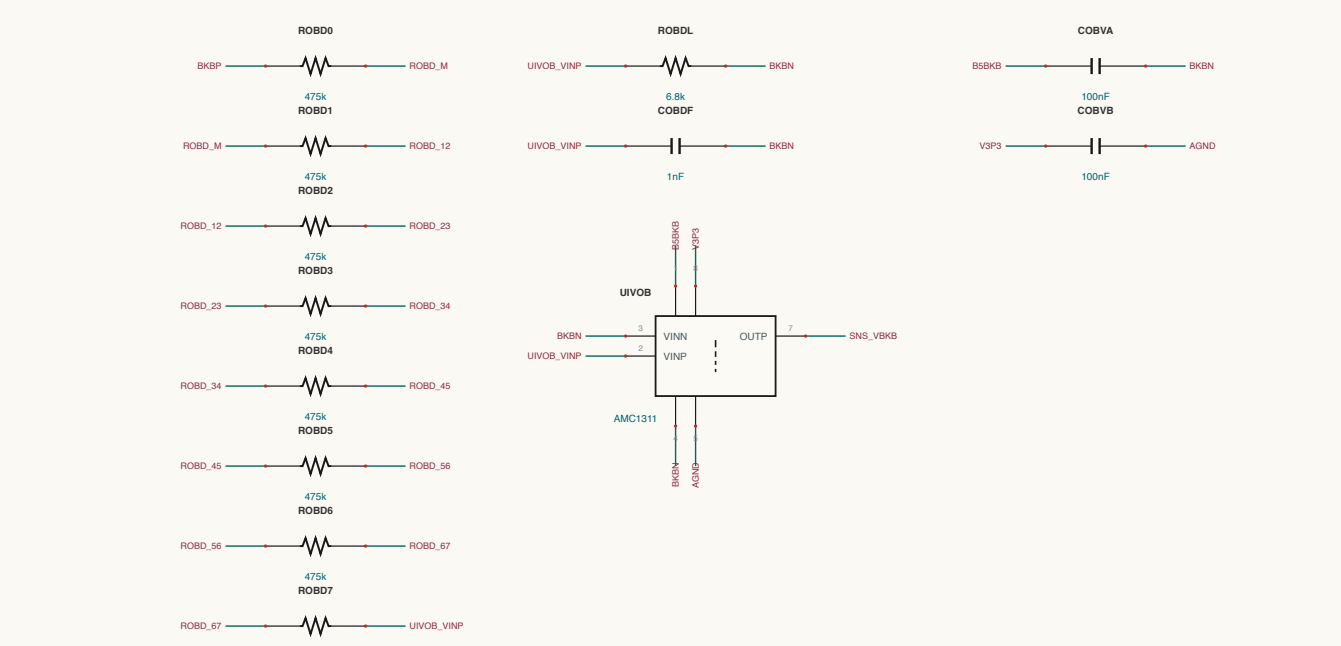


OUTPUT-SENSING / SENSE-BIAS

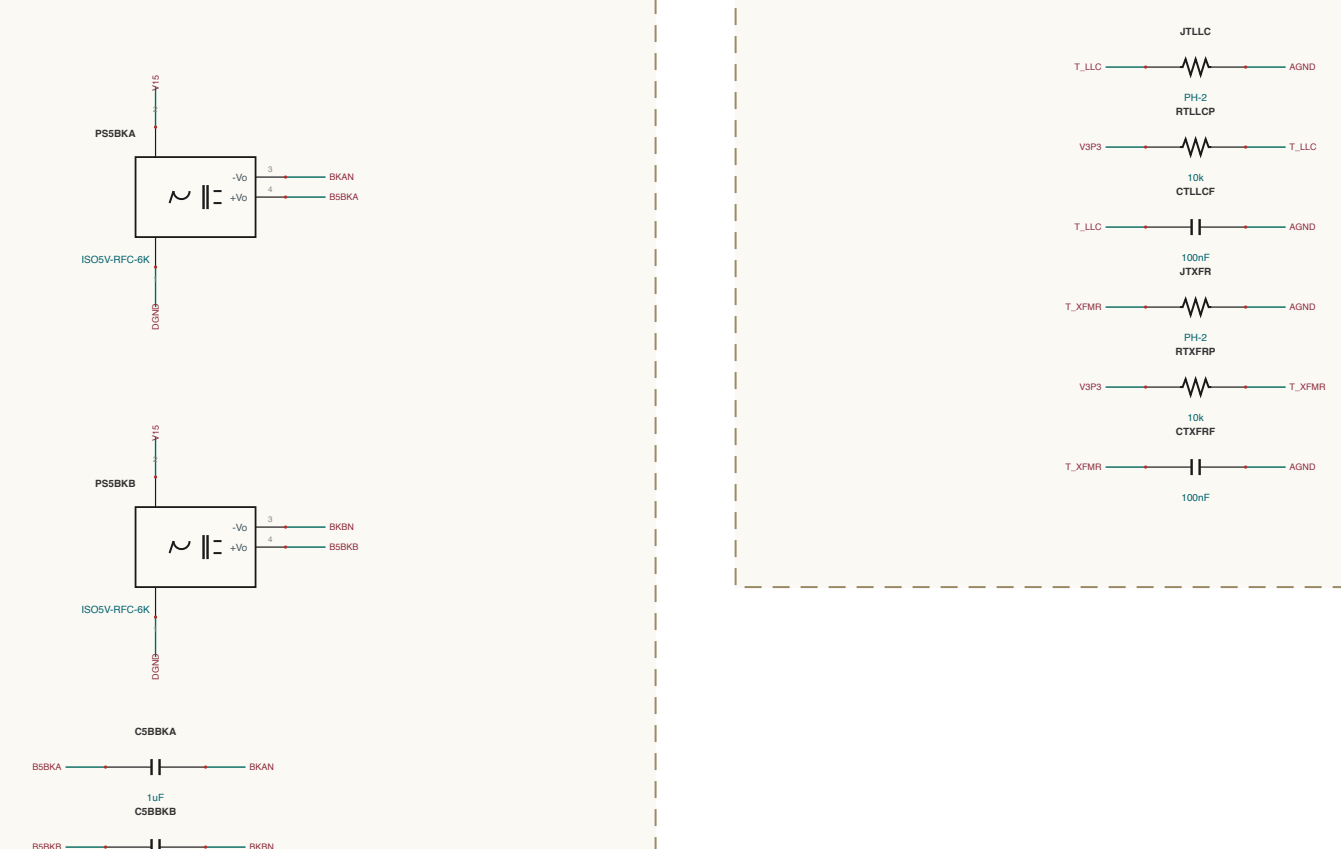


OUTPUT-SENSING / SENSE-NTC

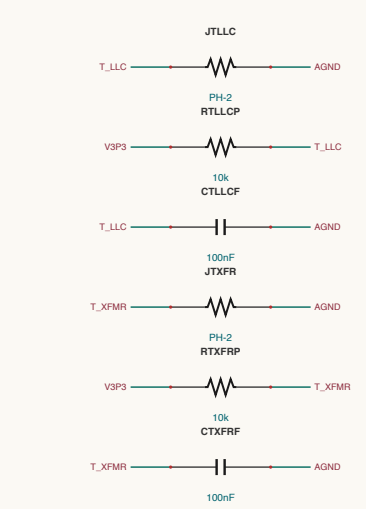

COMBS-HW / CAN

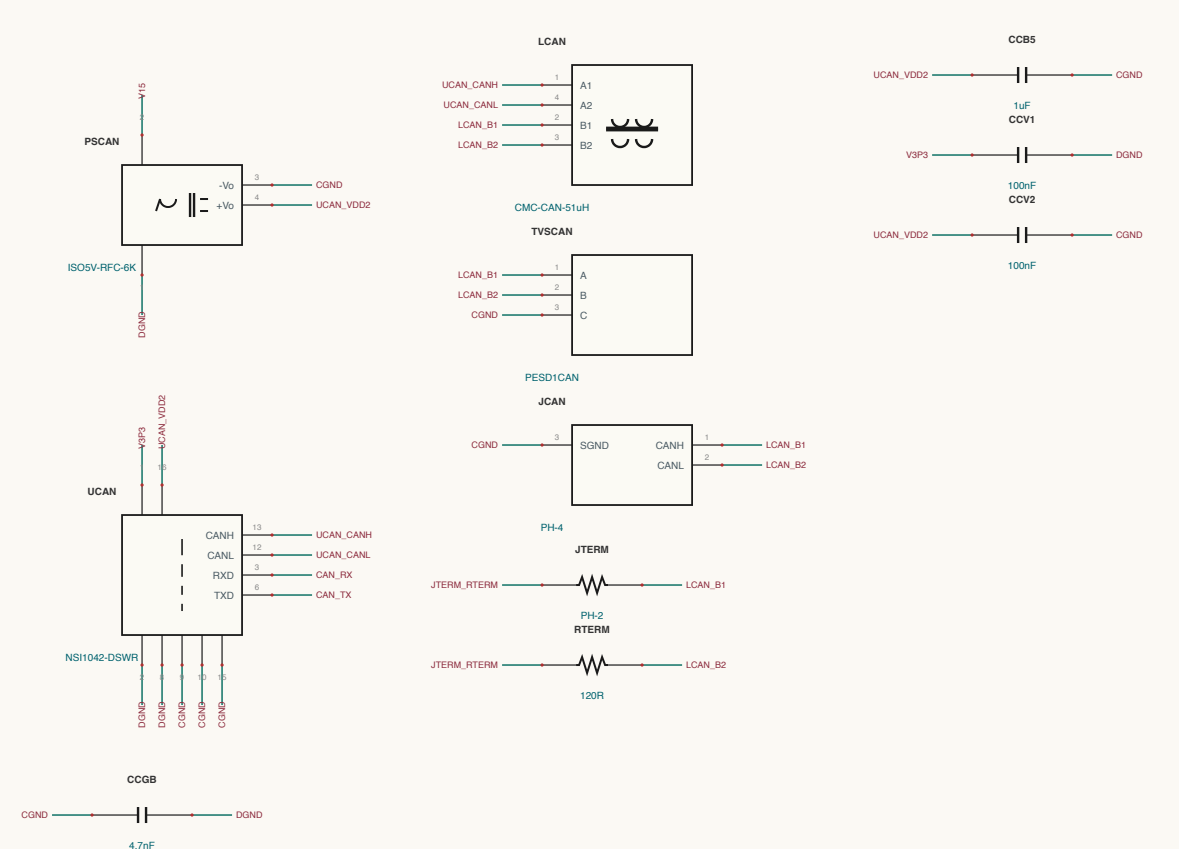

COMBS-HW / HW

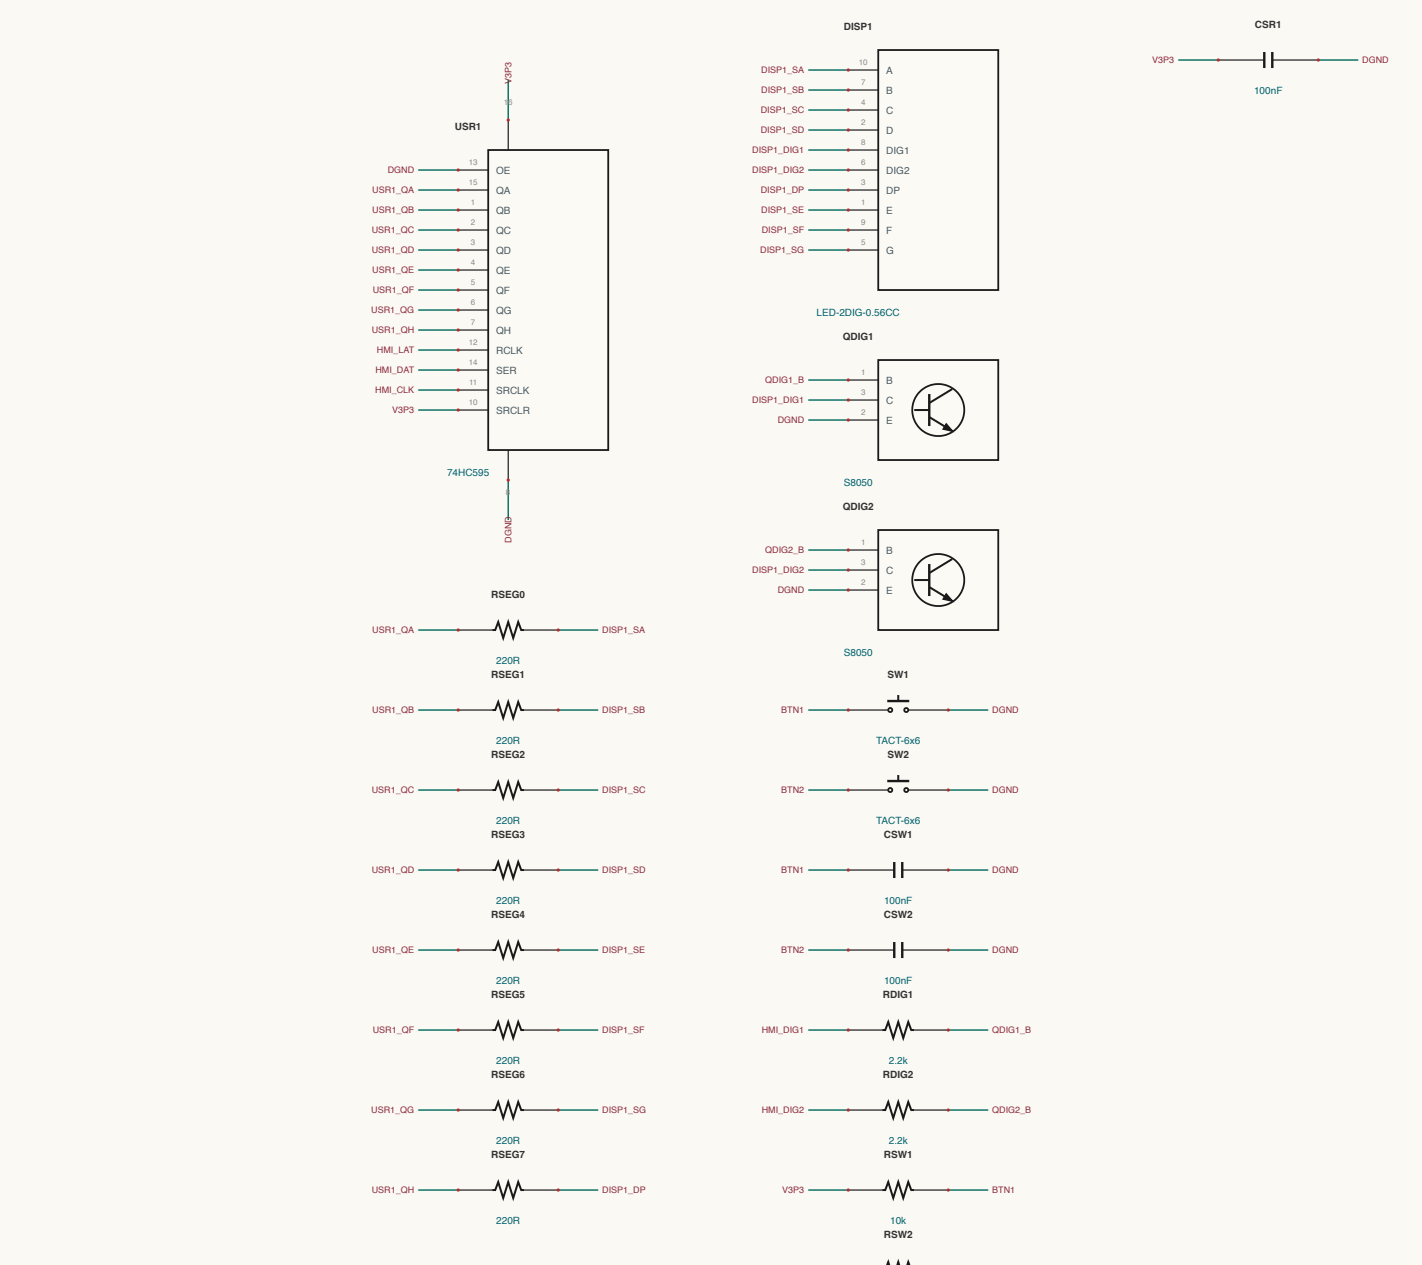

SHEET INDEX

40 kW DCDC (upper) 1 of 3

OUTPUT-BLEEDERS 1 section

BANKS-SP 1 section

LLC-TANKS 1 section

CONTROL 1 section

LLC-TANKS 1 section

COMBS-HW 1 section

40 kW 12 sections - 100 components

NET NAMING

Internal prefixes are reserved for what they join


Locals - JPNs made at that C pin e.g. JPN0A, JPN1

Outputs - M independent of a series part e.g. BRACKA_M


Outputs - when two between parentheses e.g. JPN0A_1

All others are explicit design units


CONTROL / CARD-IF

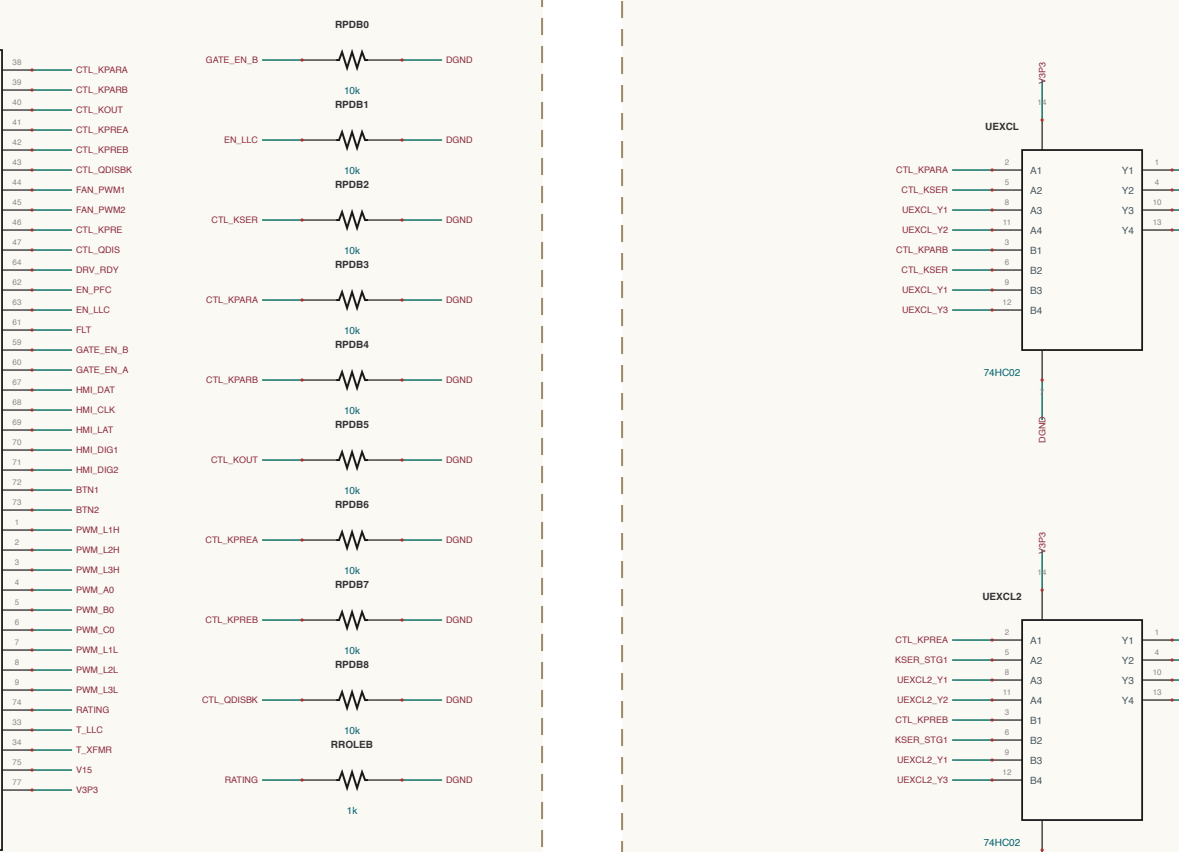


CONTROL / COIL-DRIVER

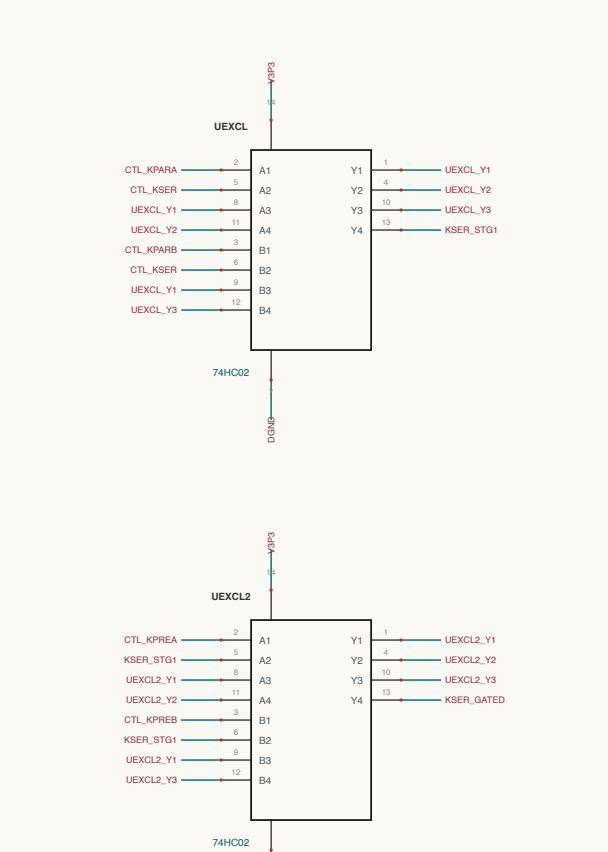


CONTROL / INTERCONNECT

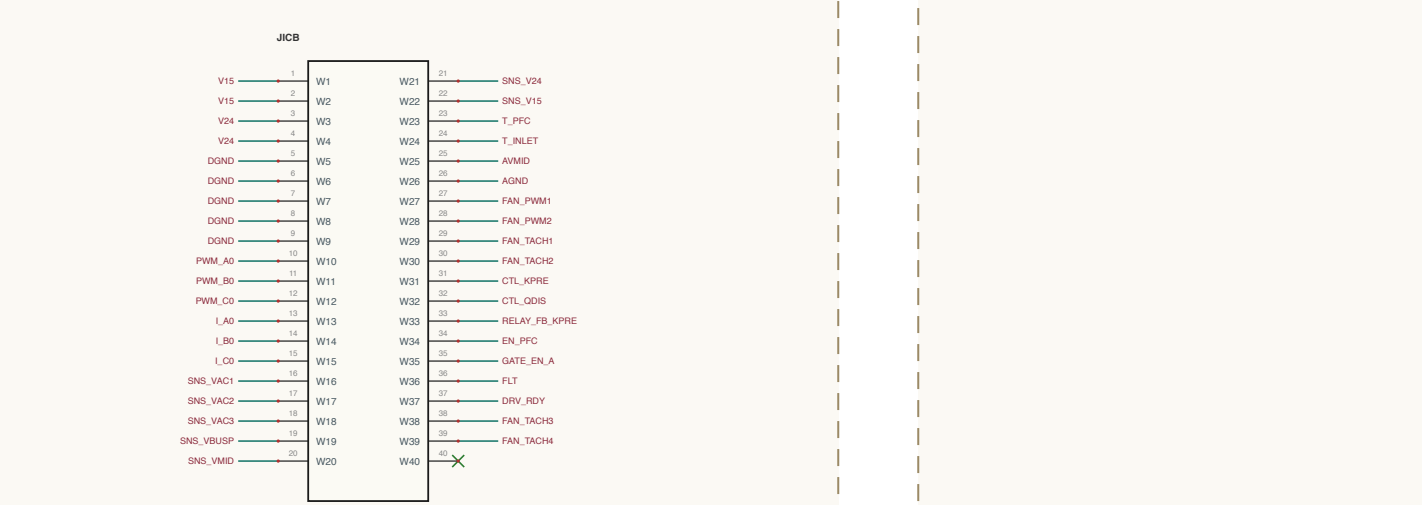


LLC-LESS / LES-1

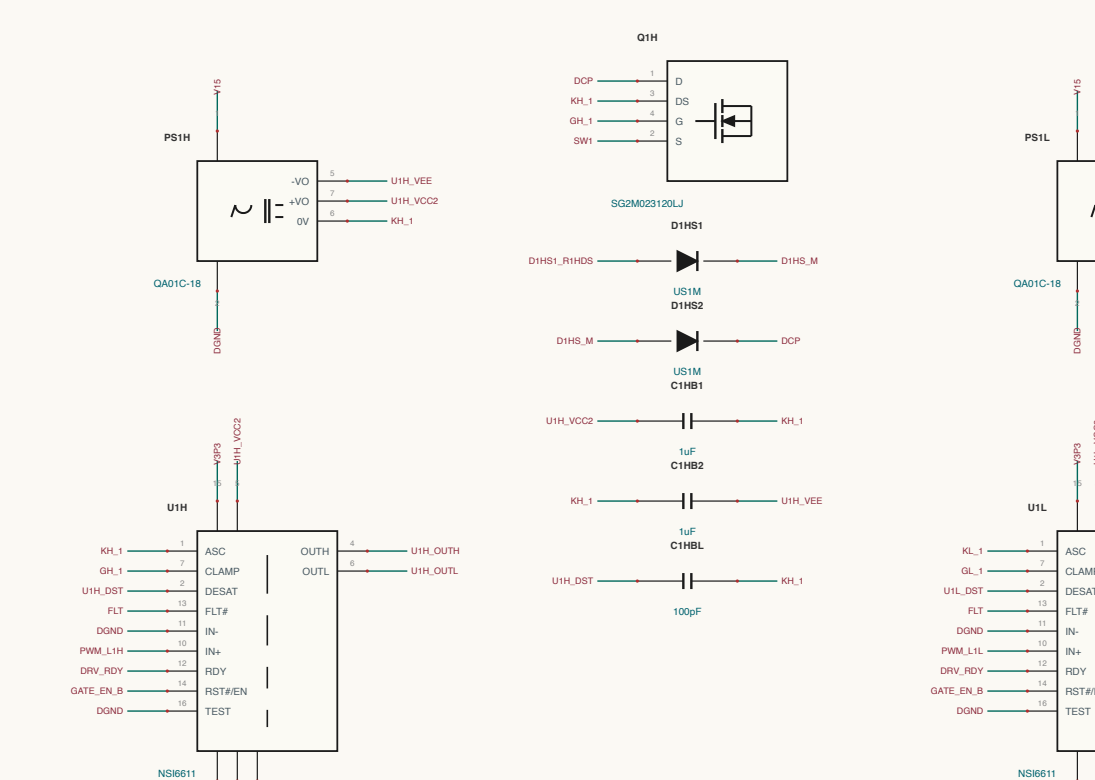


LLC-LESS / LES-2

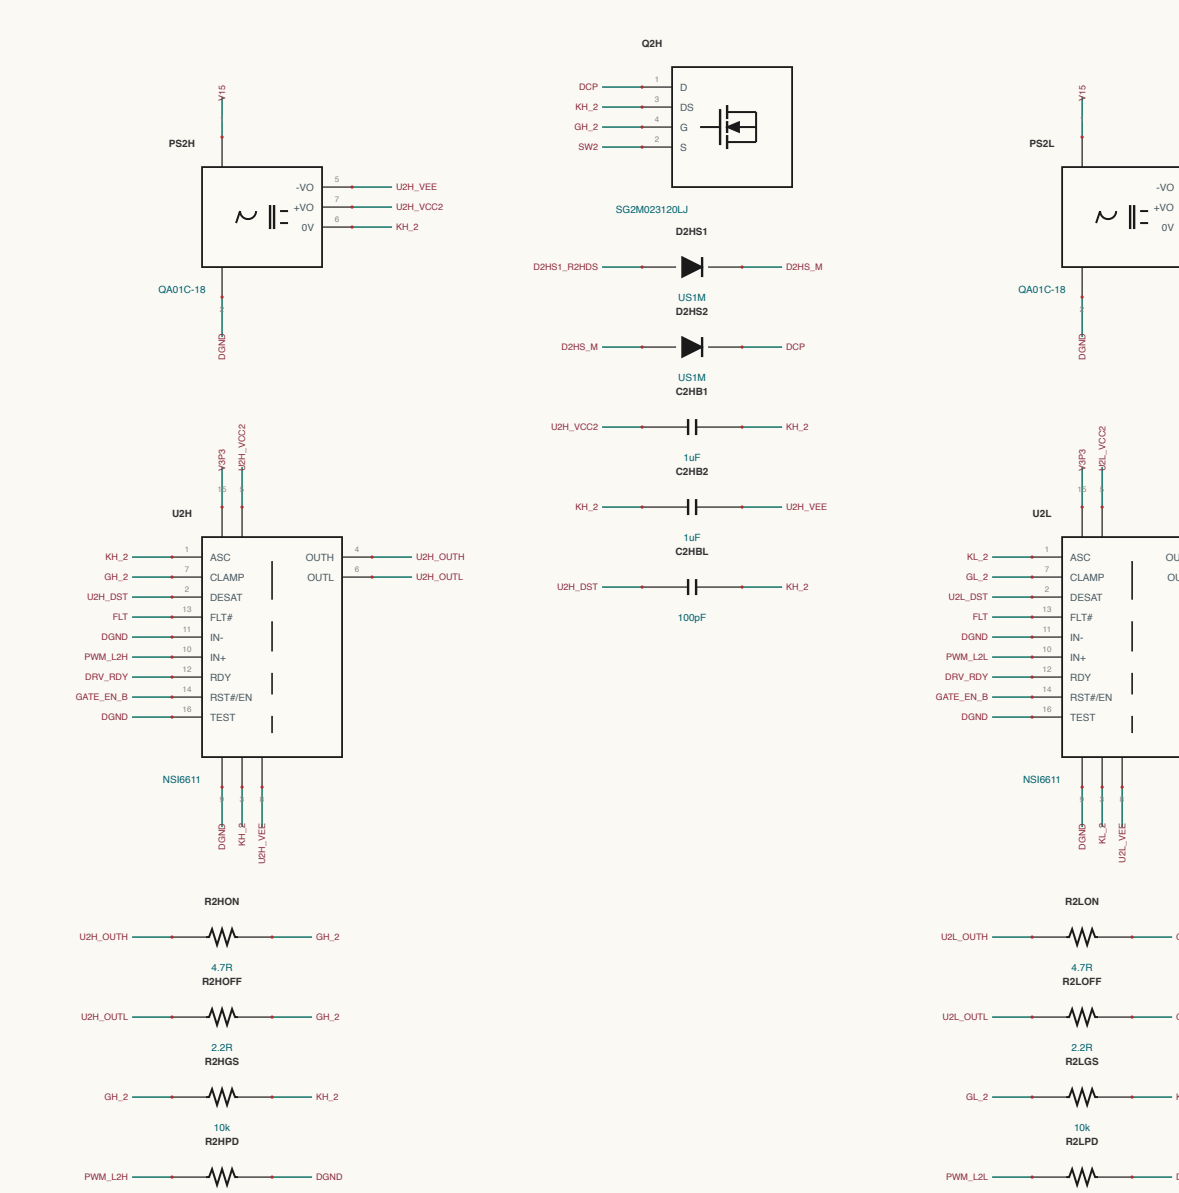


LLC-LESS / LES-3

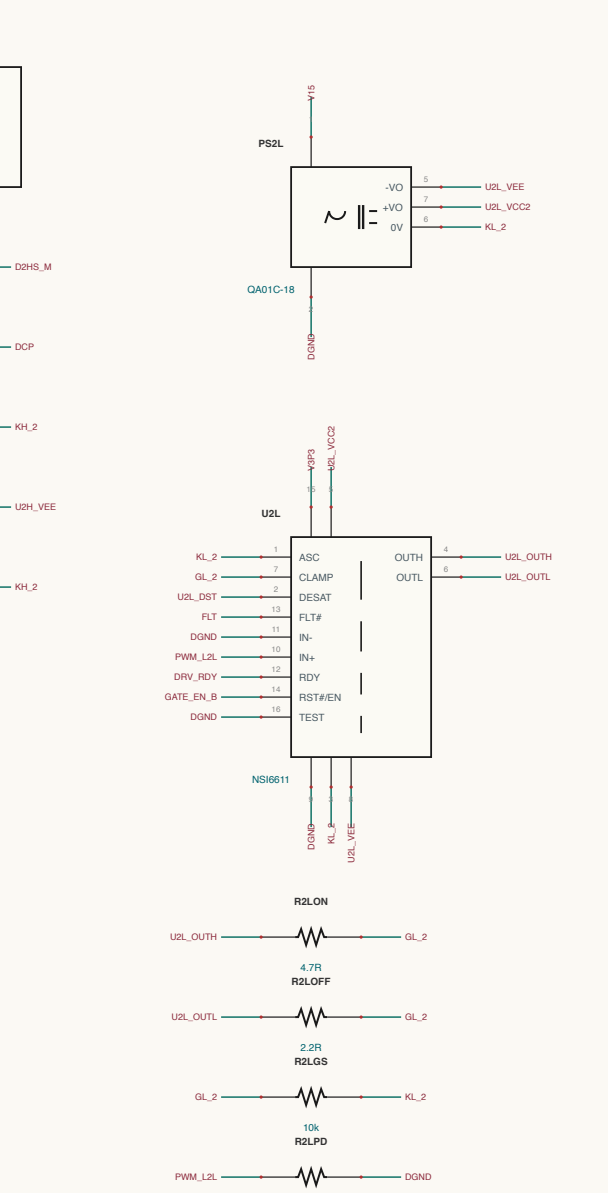


LLC-LESS / LES-4

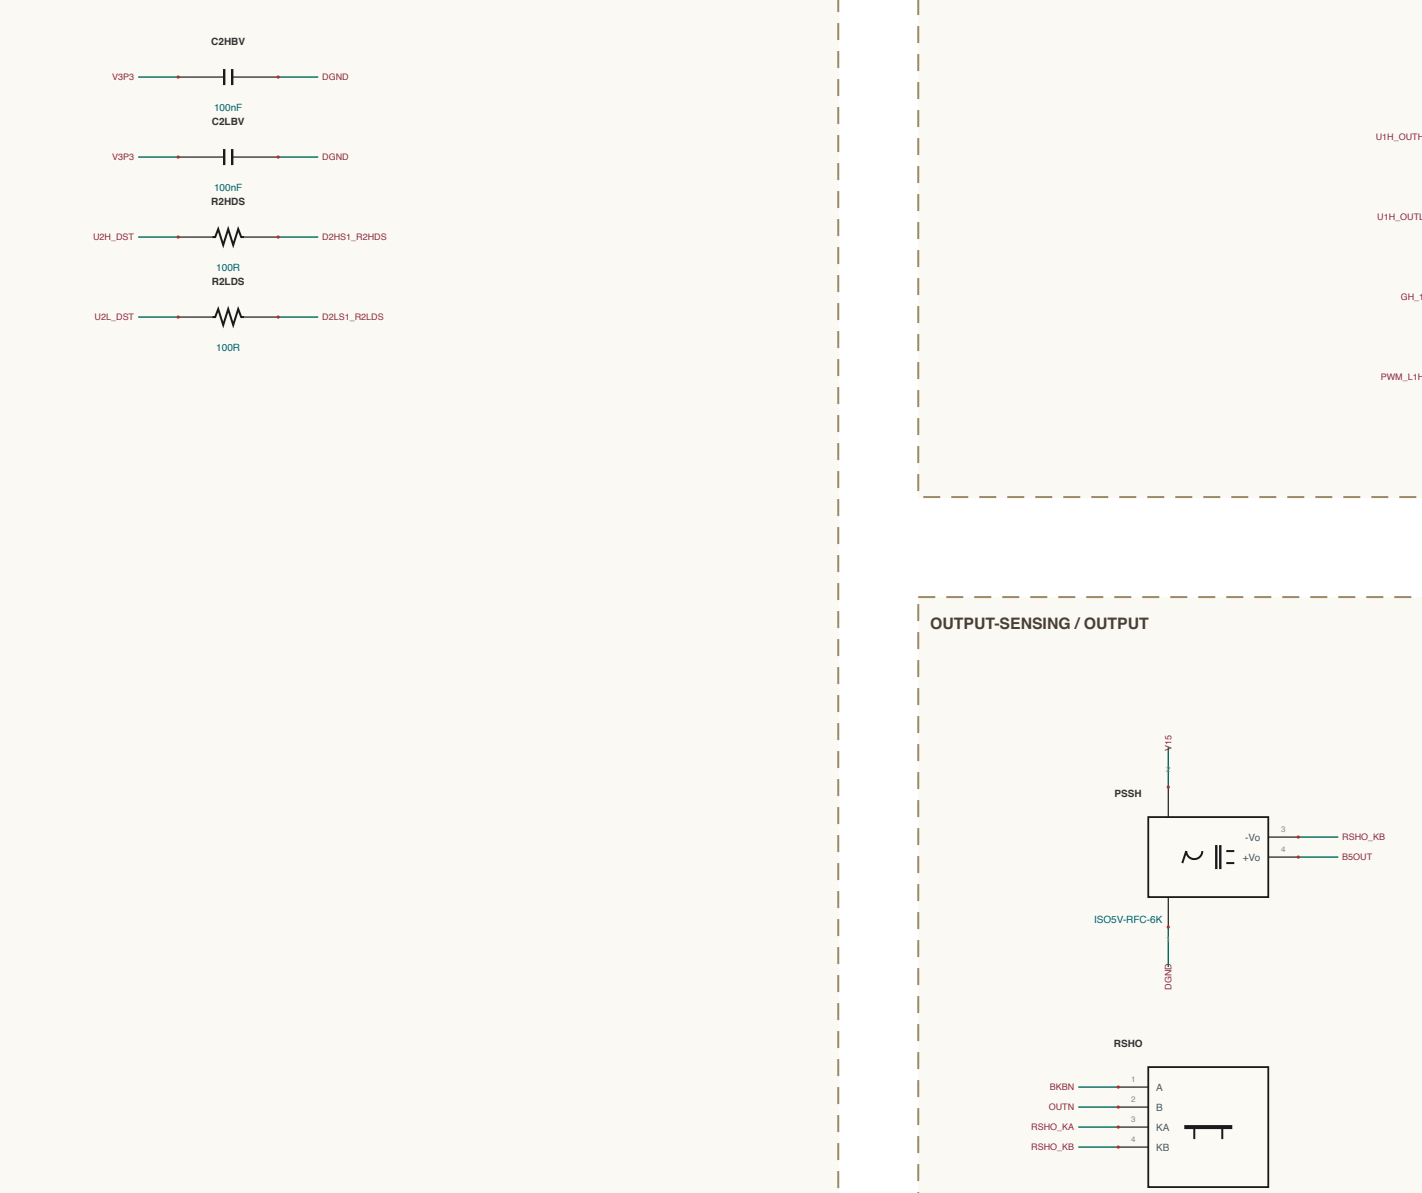

OUTPUT-SENSING / OUTPUT

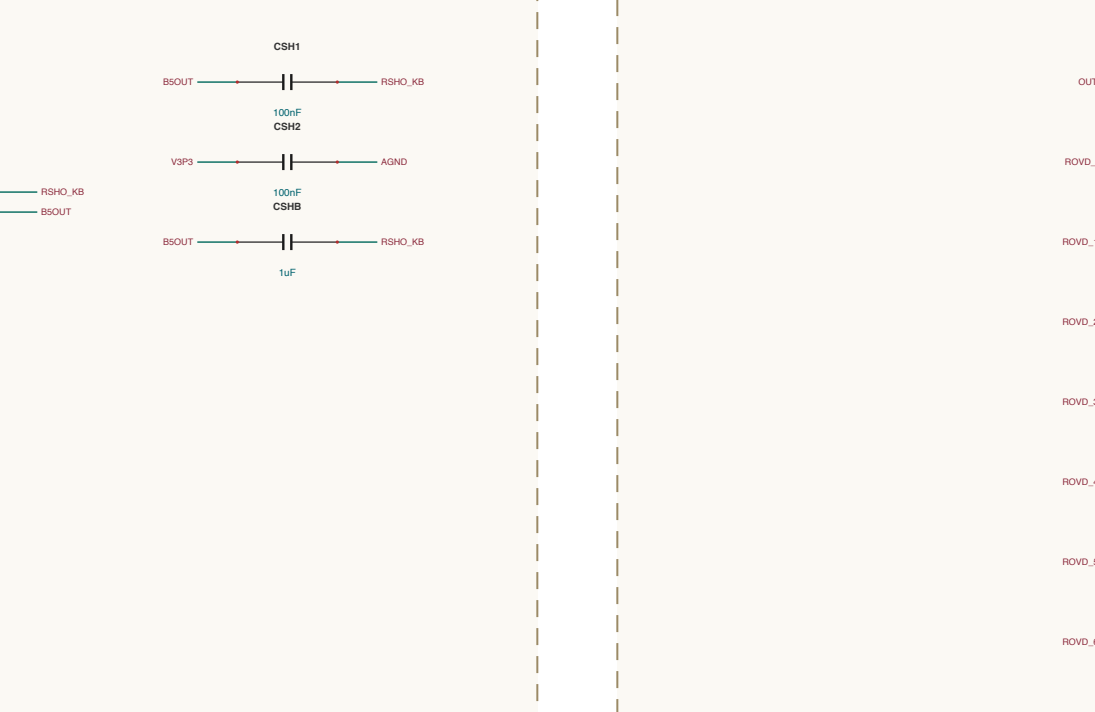

OUTPUT-SENSING / SENSE-VOLT

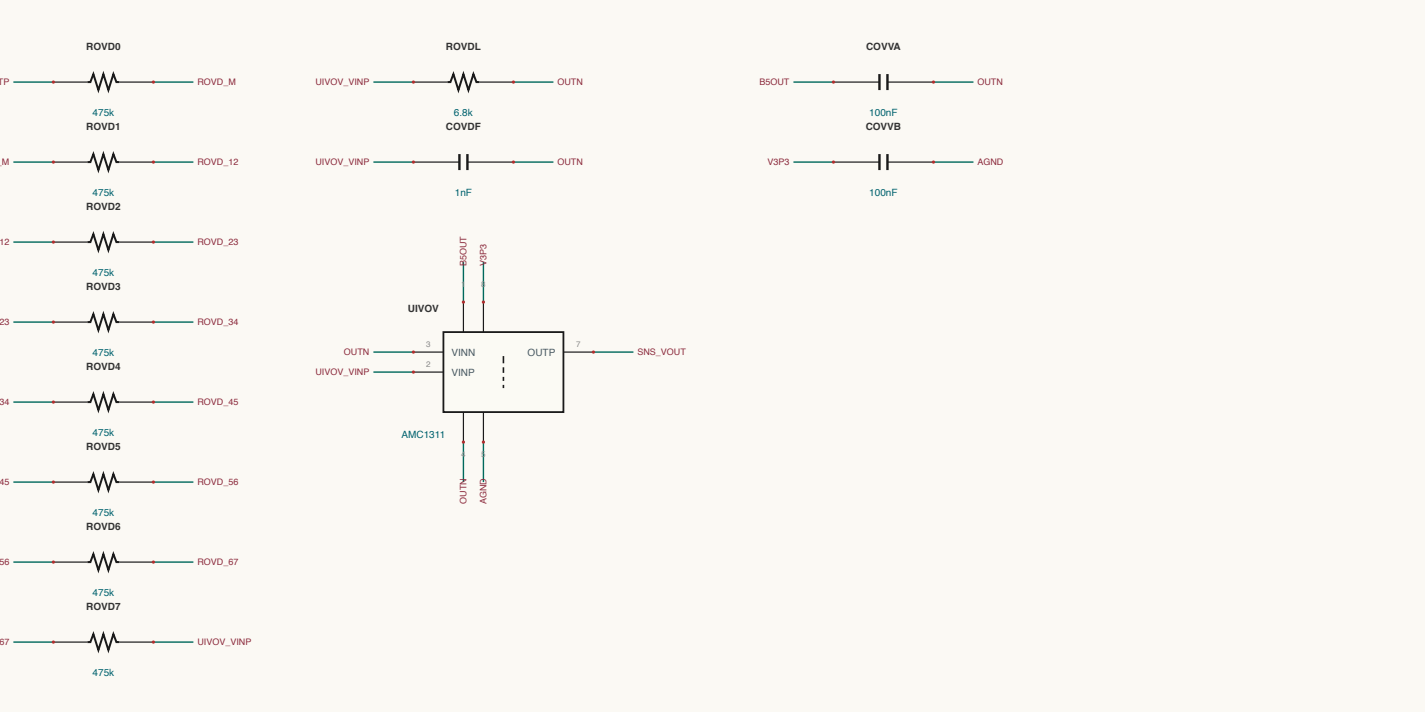

MAGNETICS CONSTRUCTION

Identify per manufacturer not shown, give 10% acceptance from the theory


0.1 to 1.0 to 2.0 100000 per section, 0.1 to 1.0 to 2.0 100000

0.1 to 1.0 to 2.0 100000 per section, 0.1 to 1.0 to 2.0 100000


0.1 to 1.0 to 2.0 100000 per section, 0.1 to 1.0 to 2.0 100000

0.1 to 1.0 to 2.0 100000 per section, 0.1 to 1.0 to 2.0 100000


CONTROL / MCU

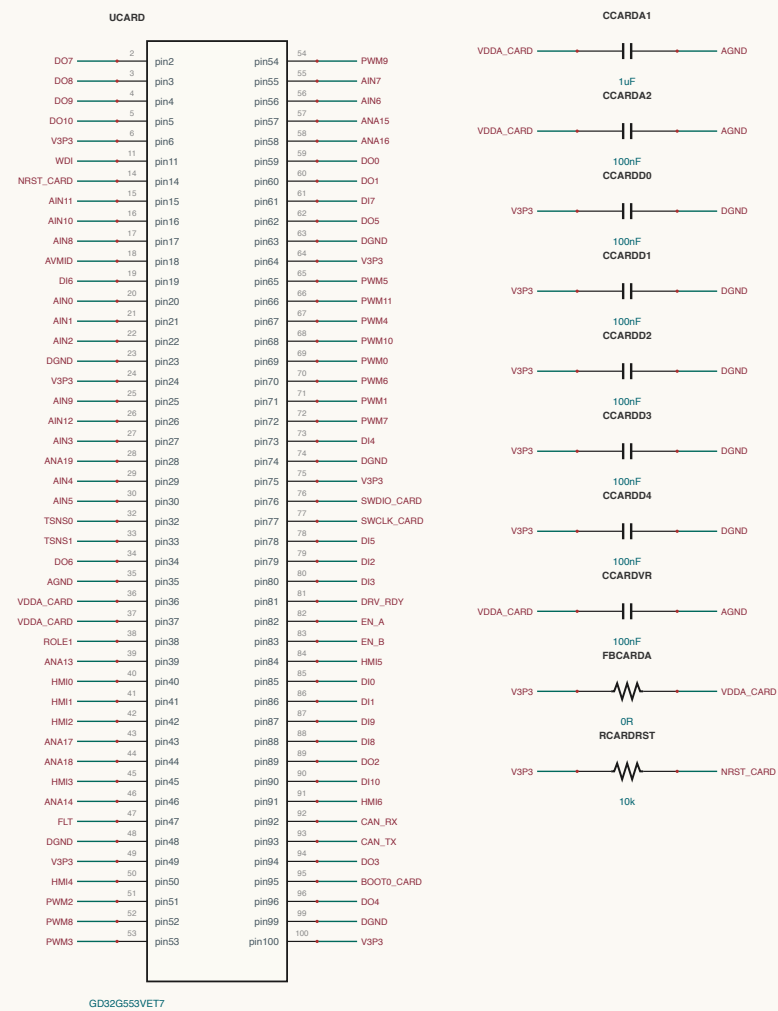


CONTROL / SWD-BOOT

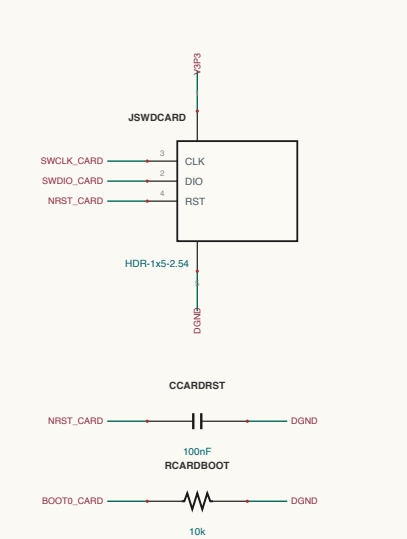


CONTROL / SAFETY

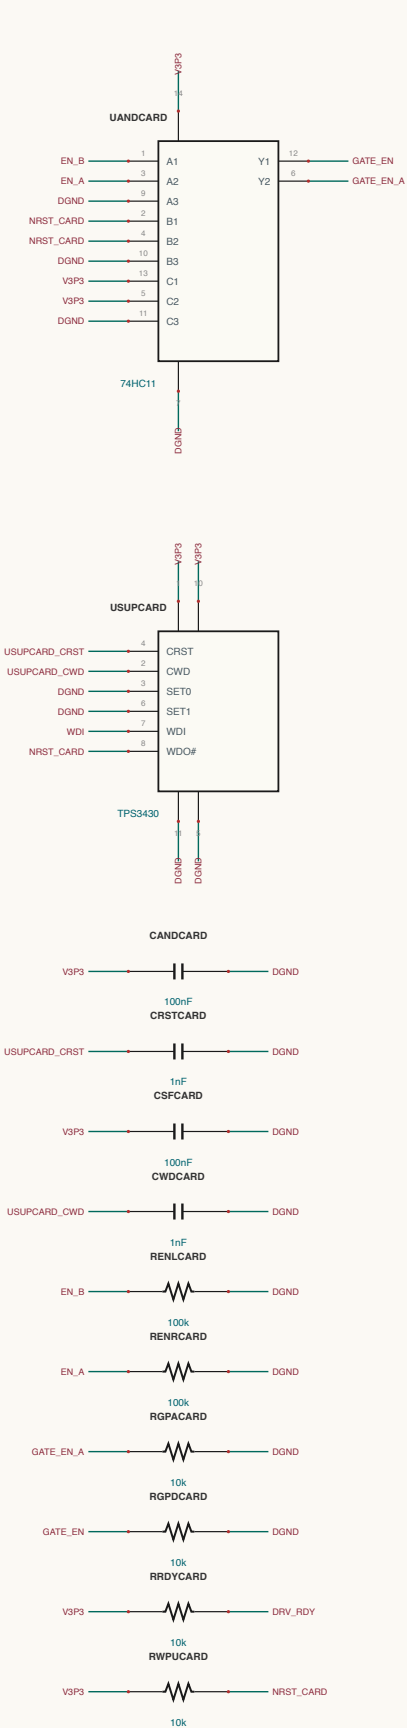


CONTROL / FLT-GROUND




CONTROL / ROLE



CONTROL / BUCK-3V3

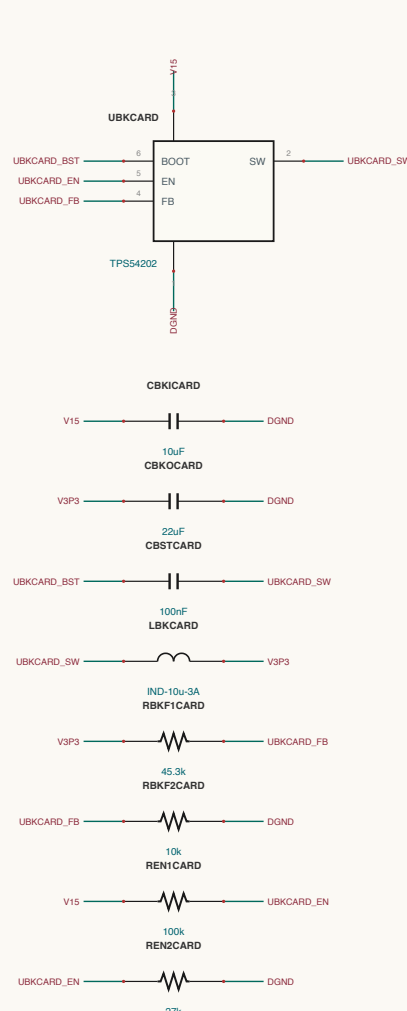

CONTROL / ANALOG-MID

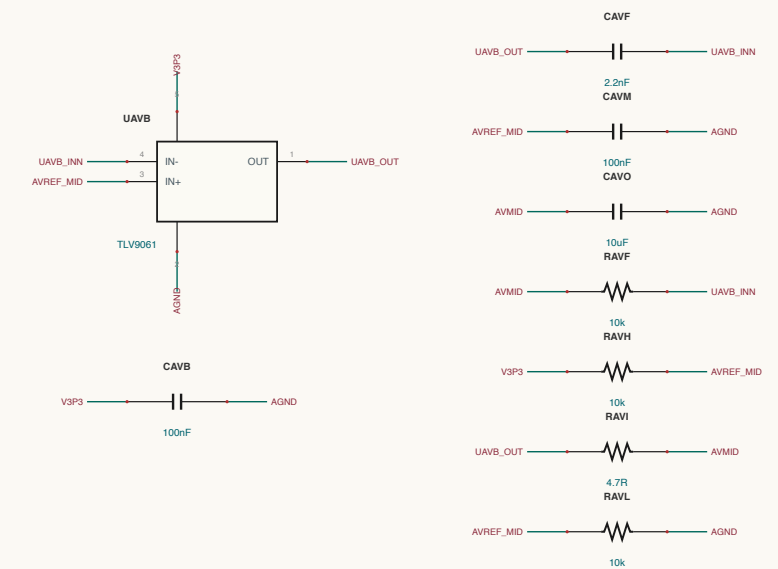

CONTROL / CARD-IF

