
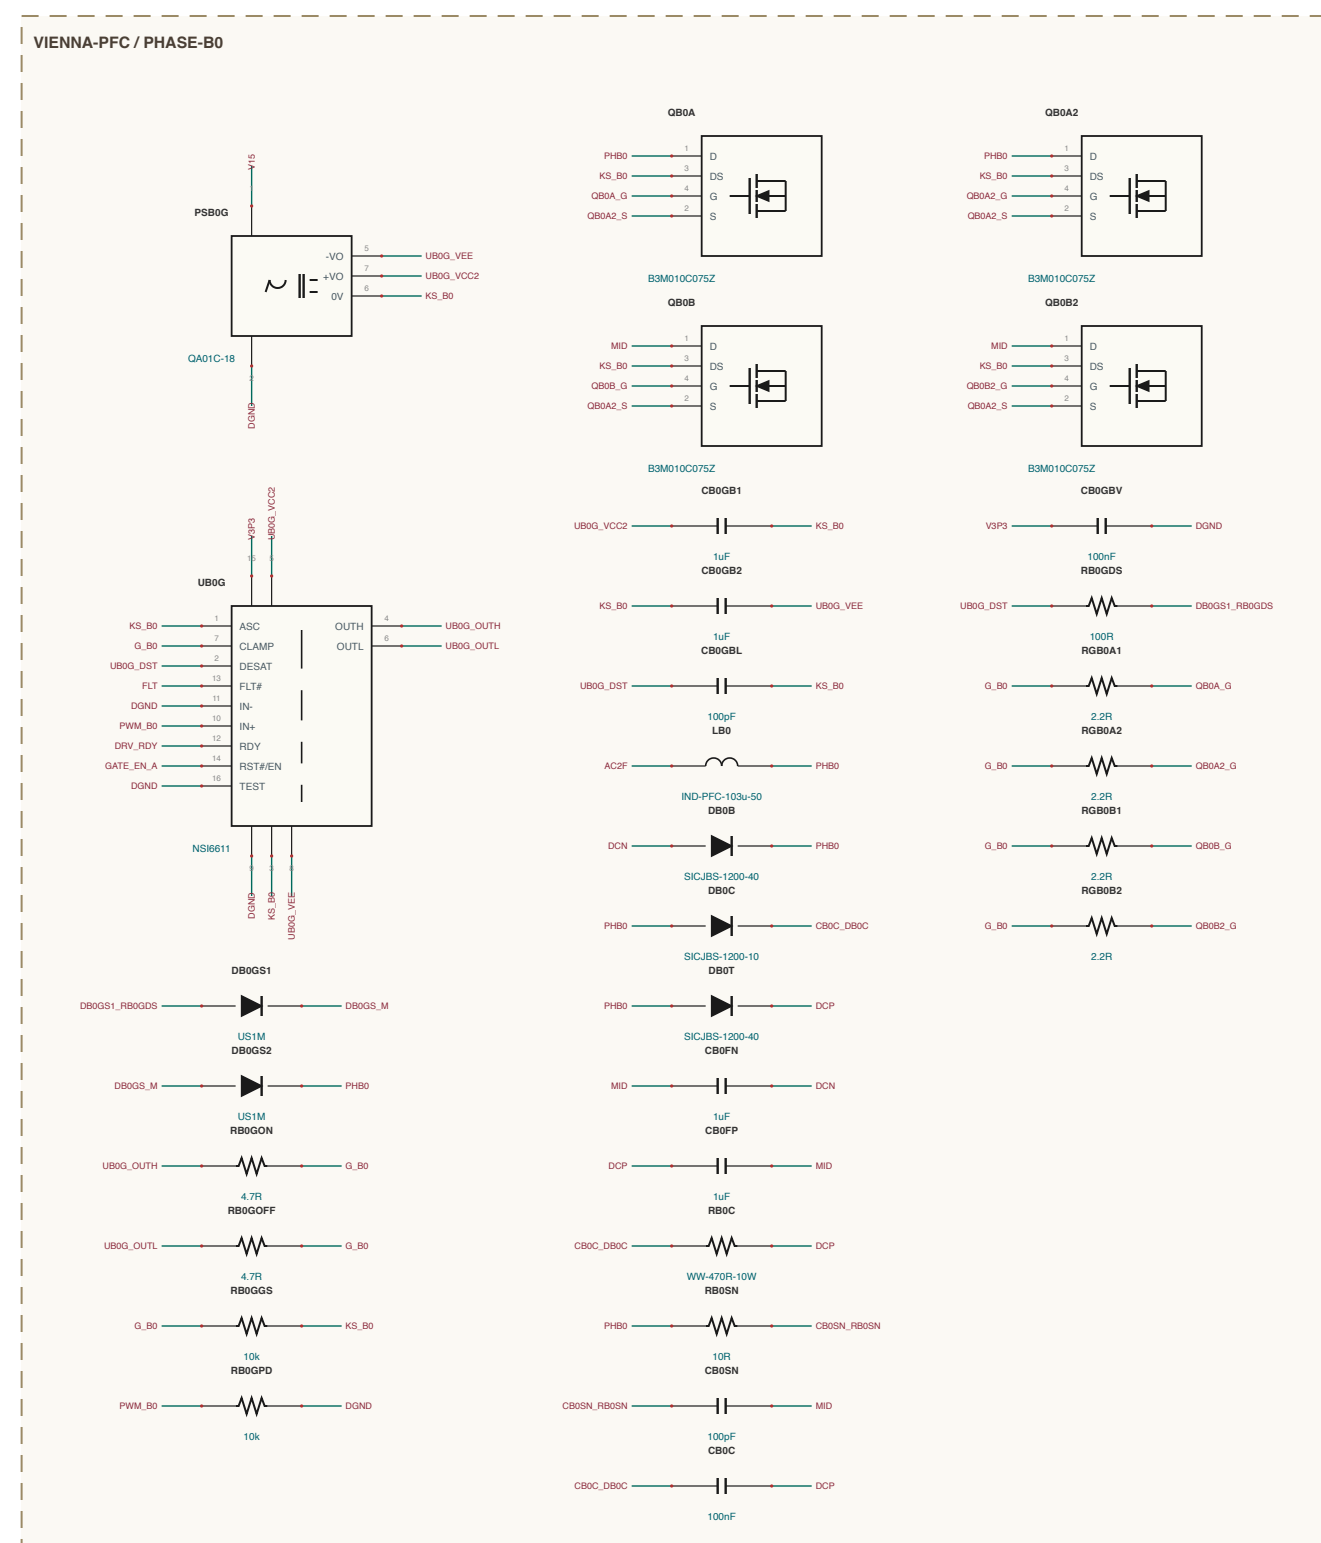
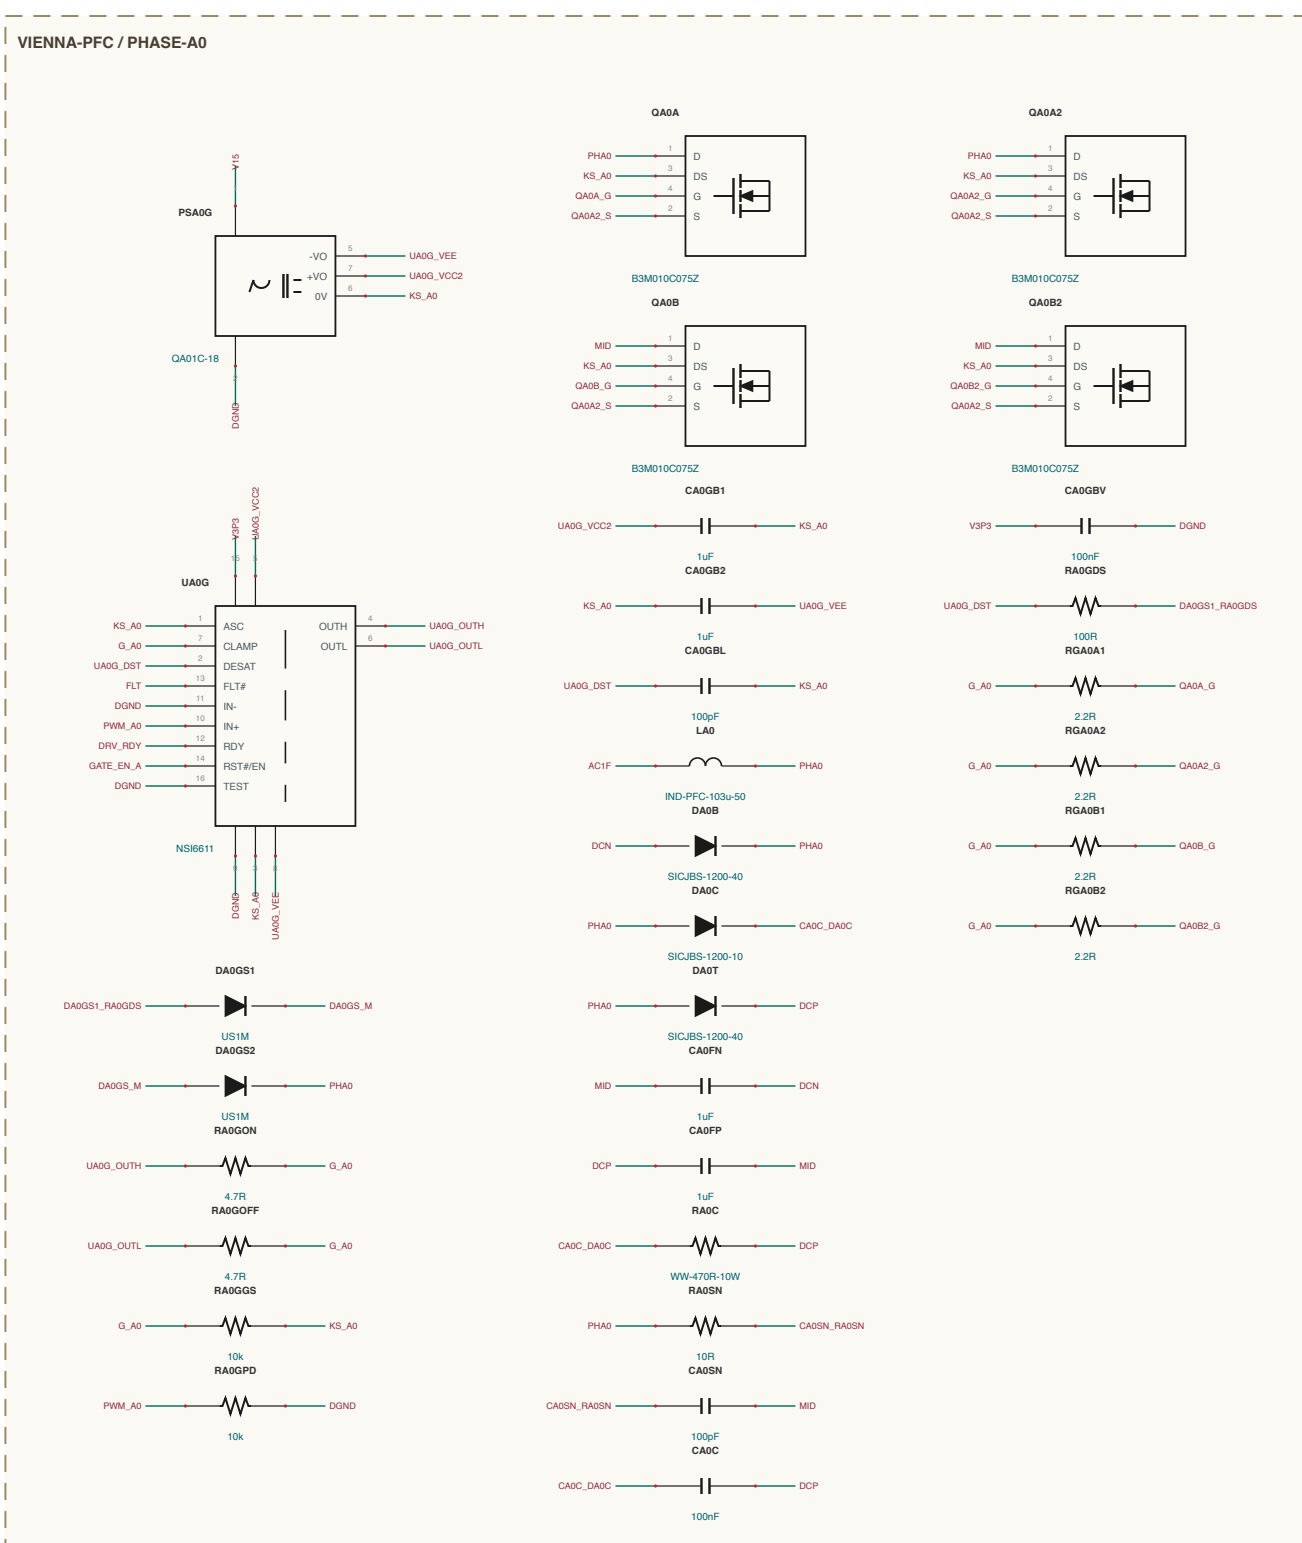
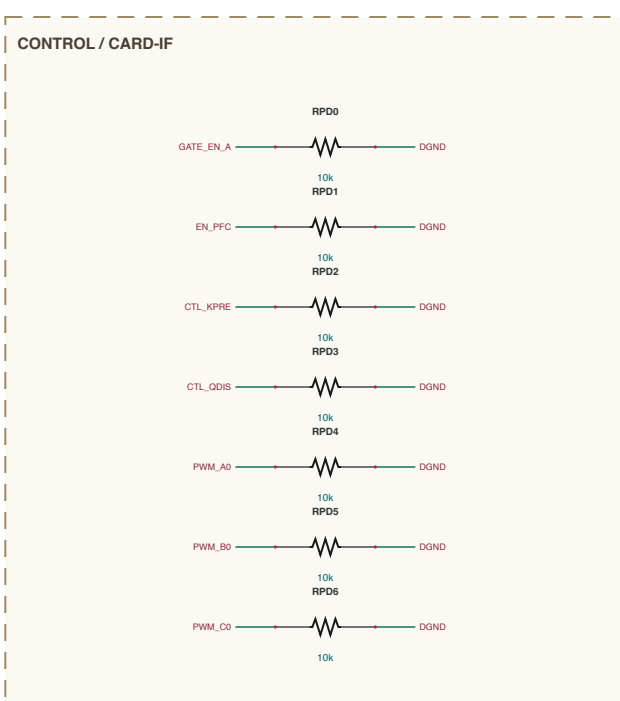
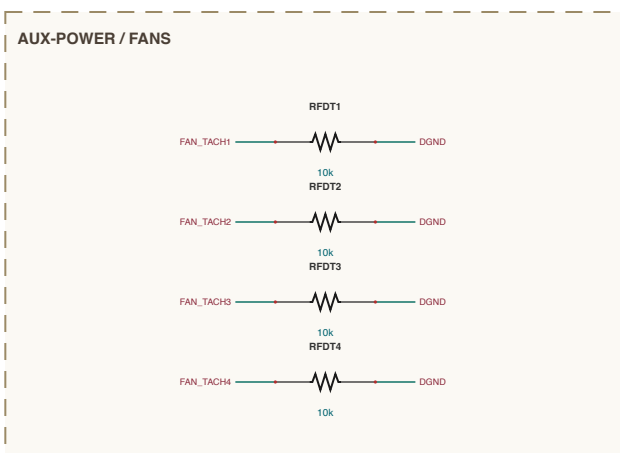
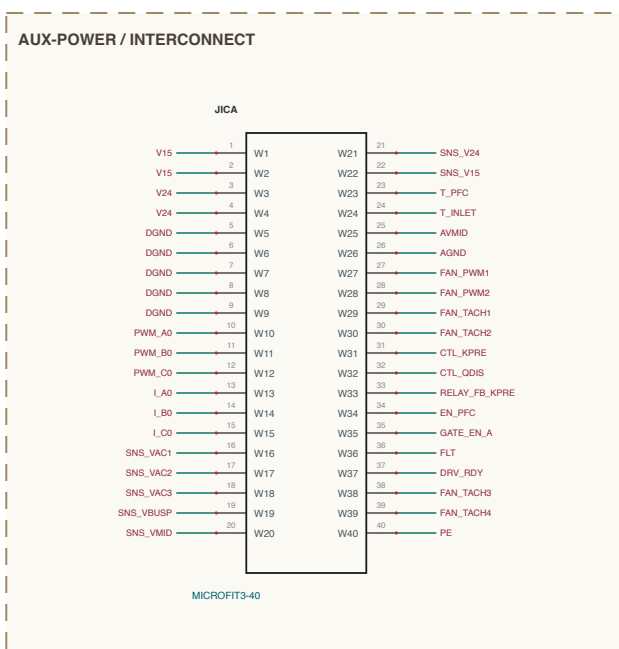
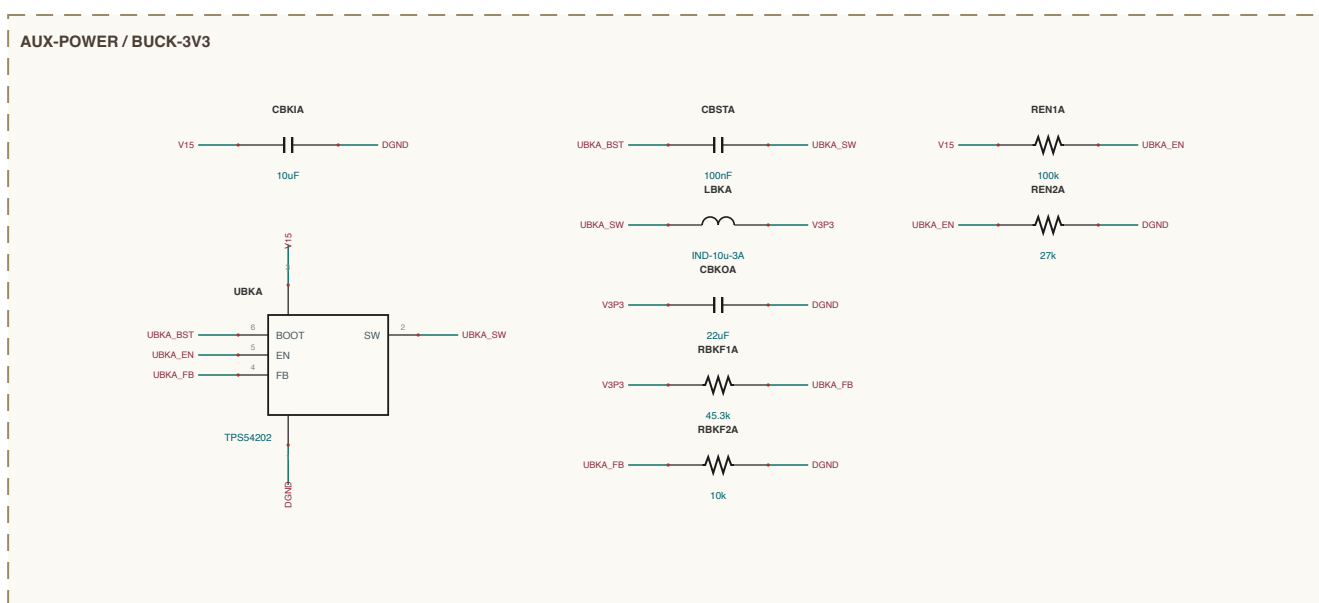
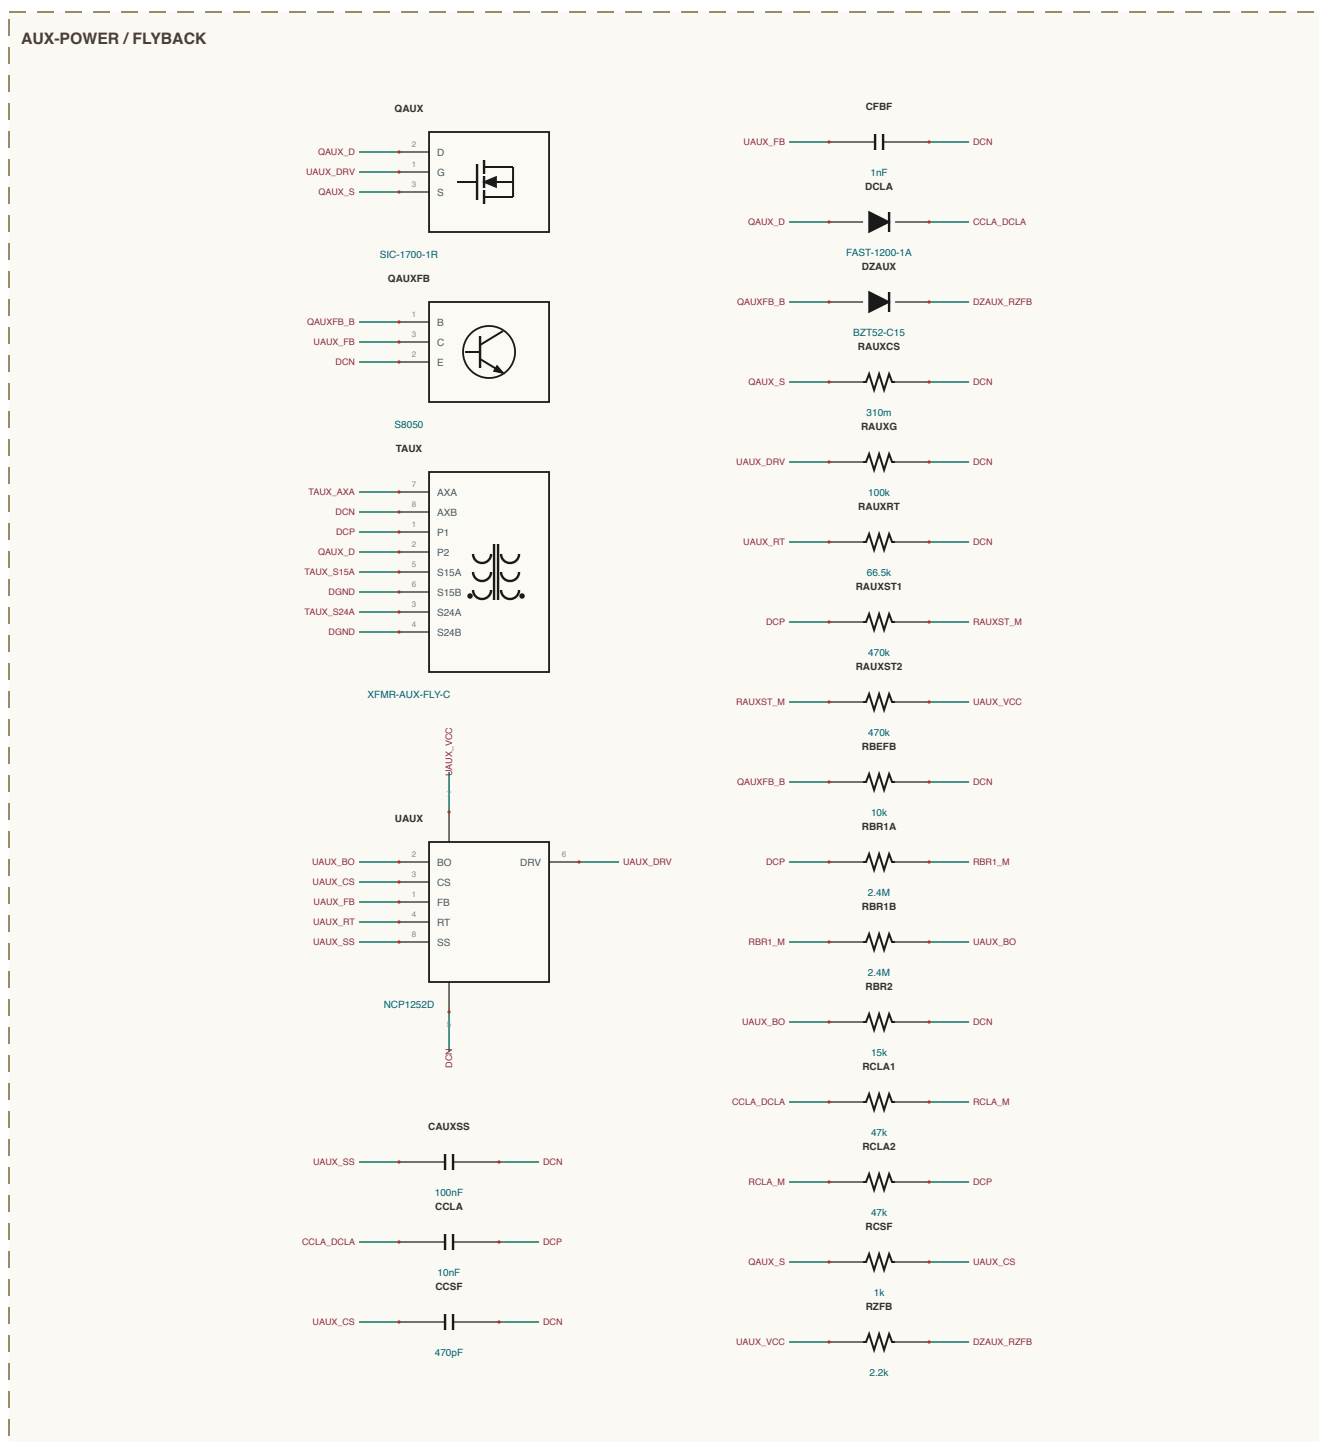
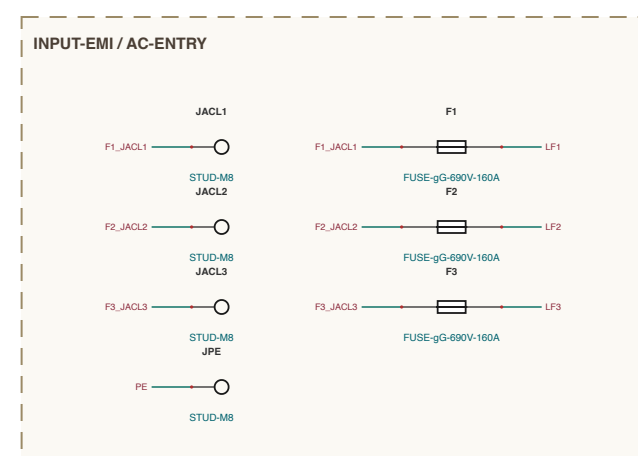
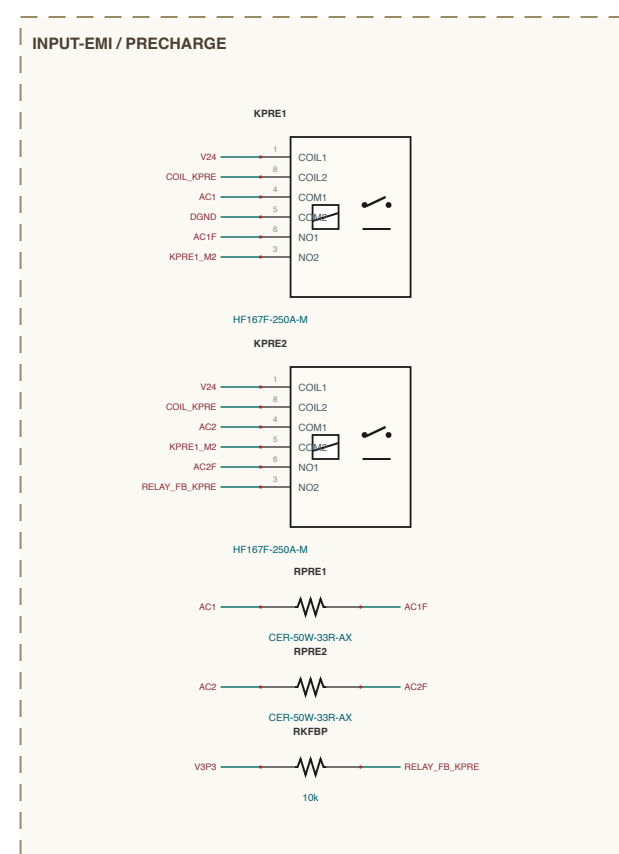
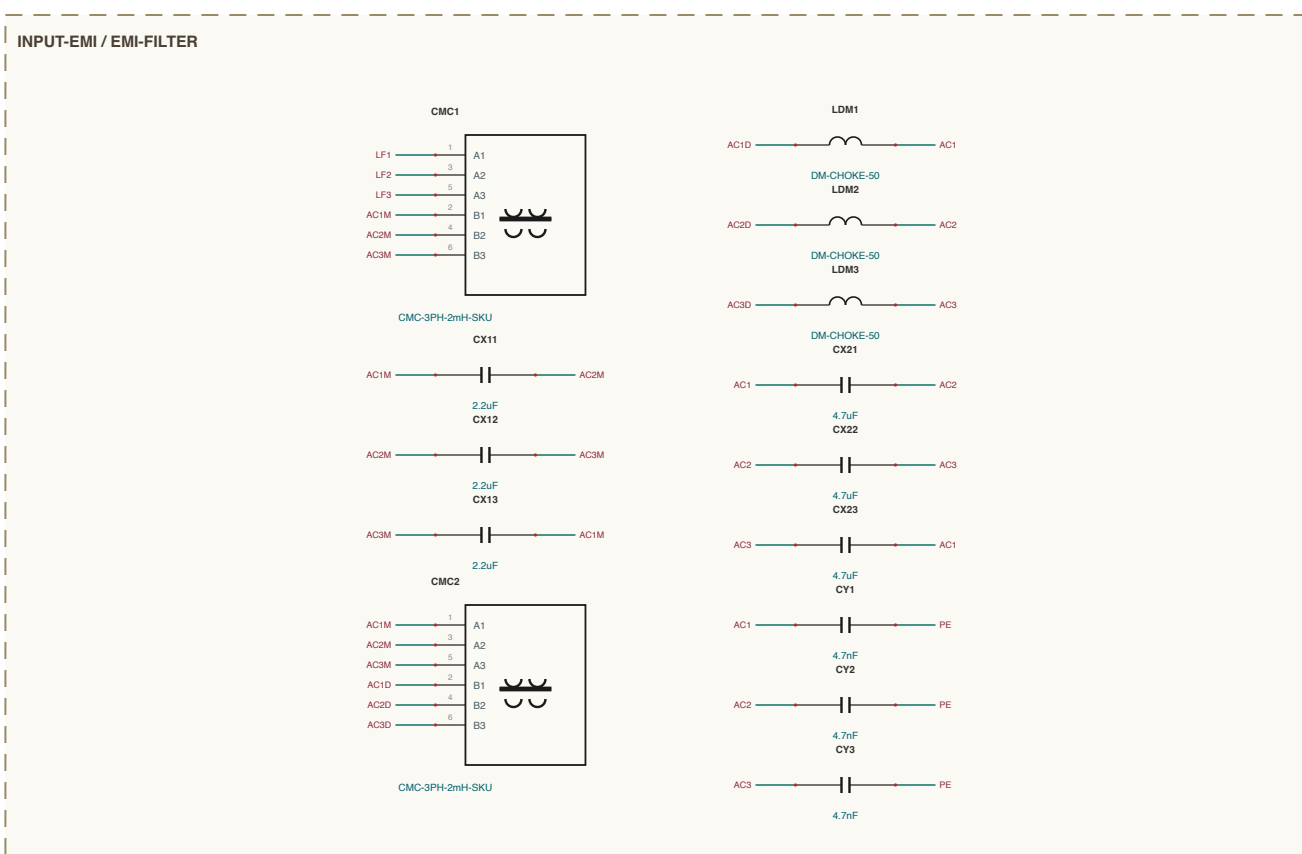
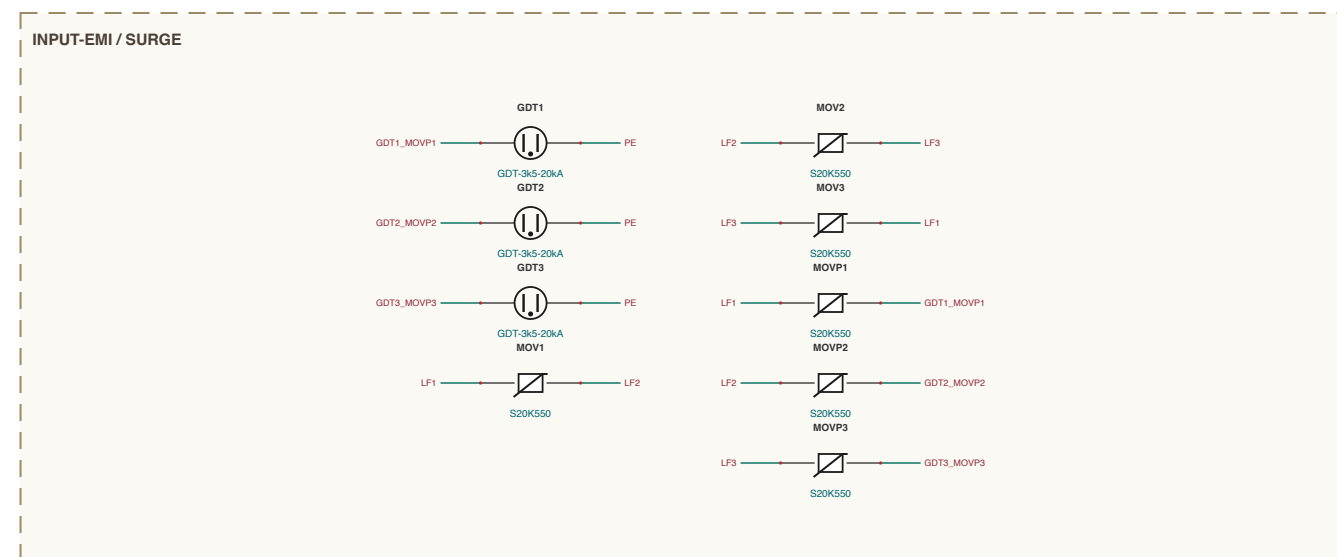
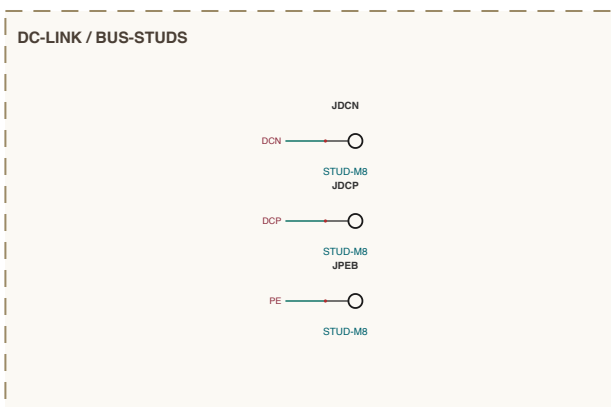
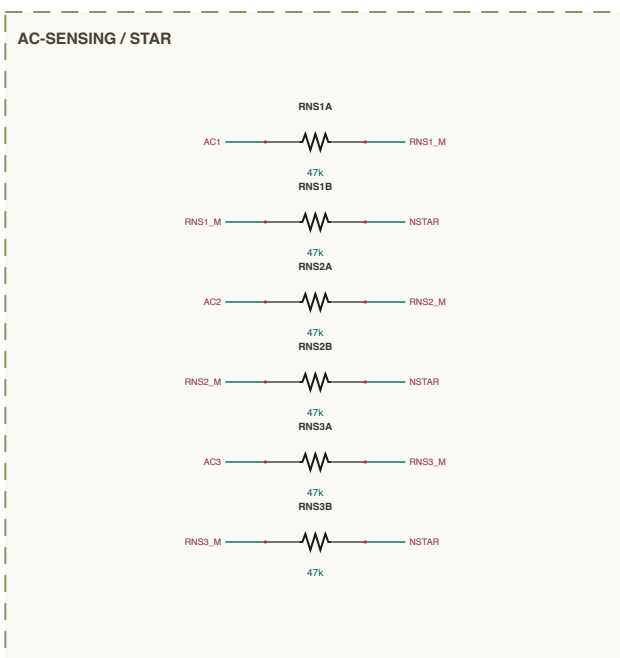
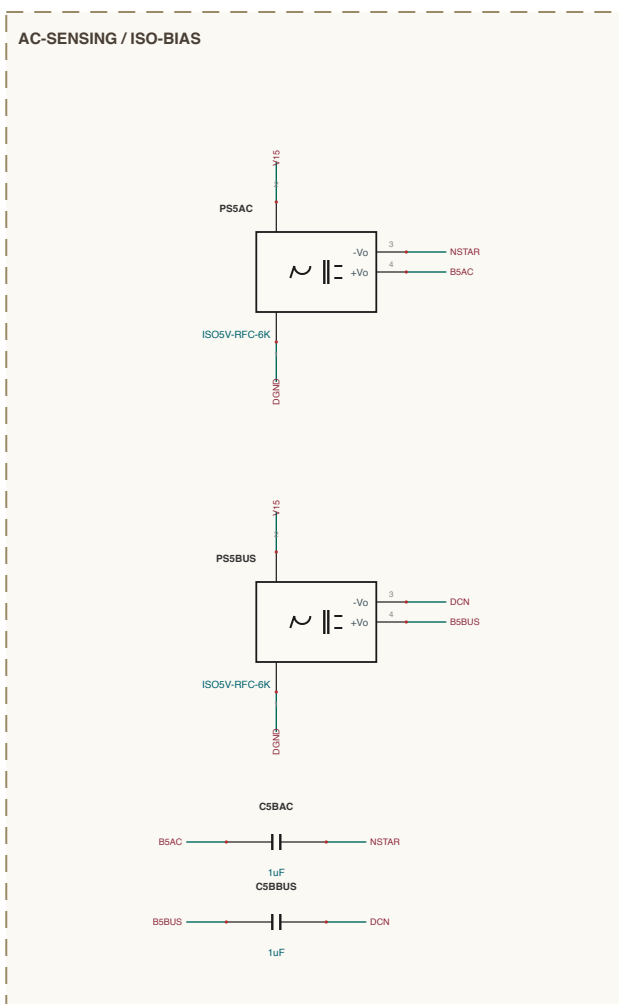
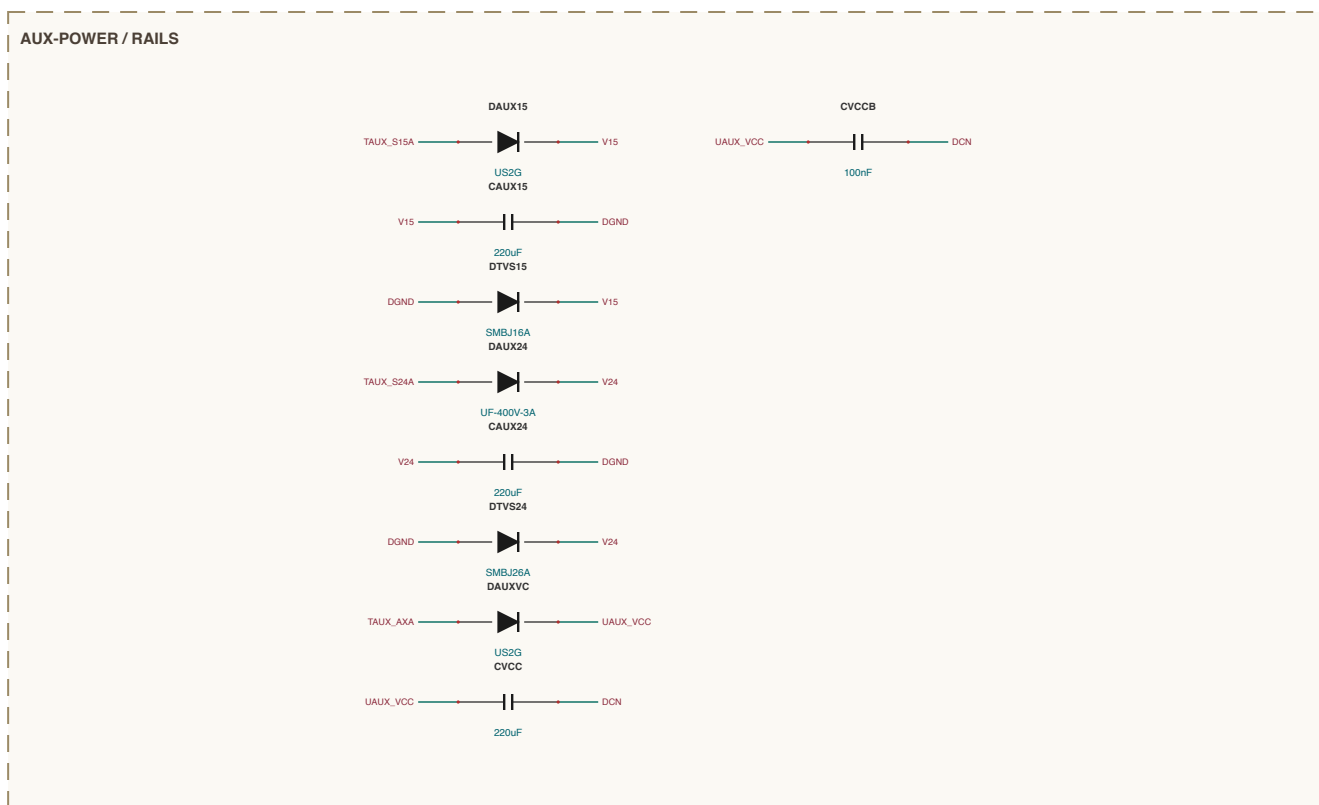
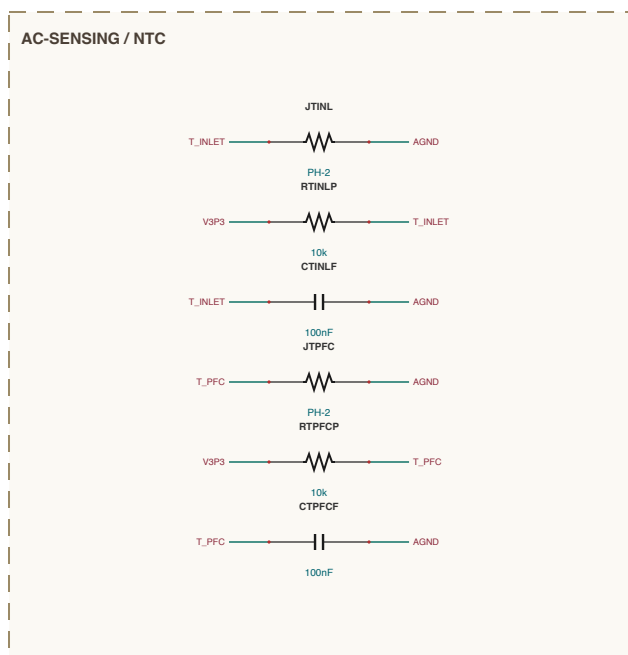
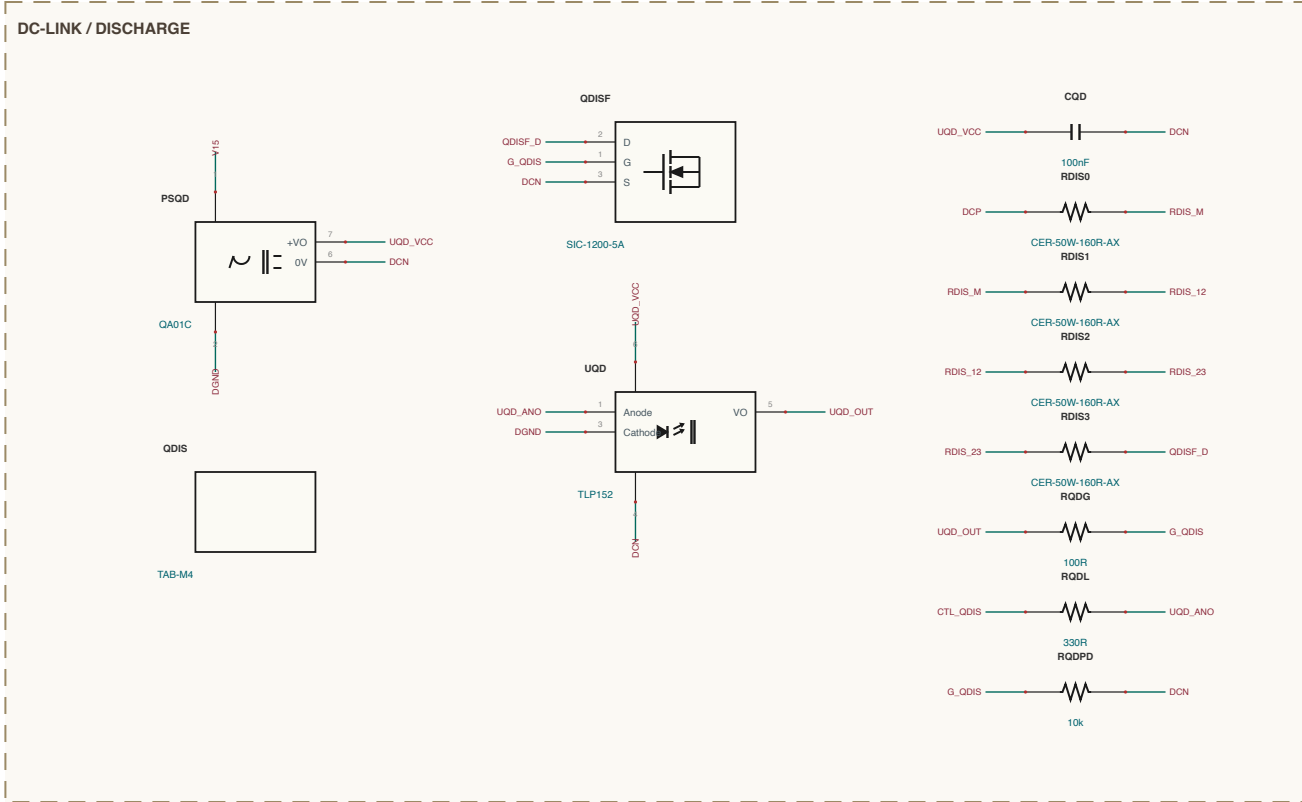
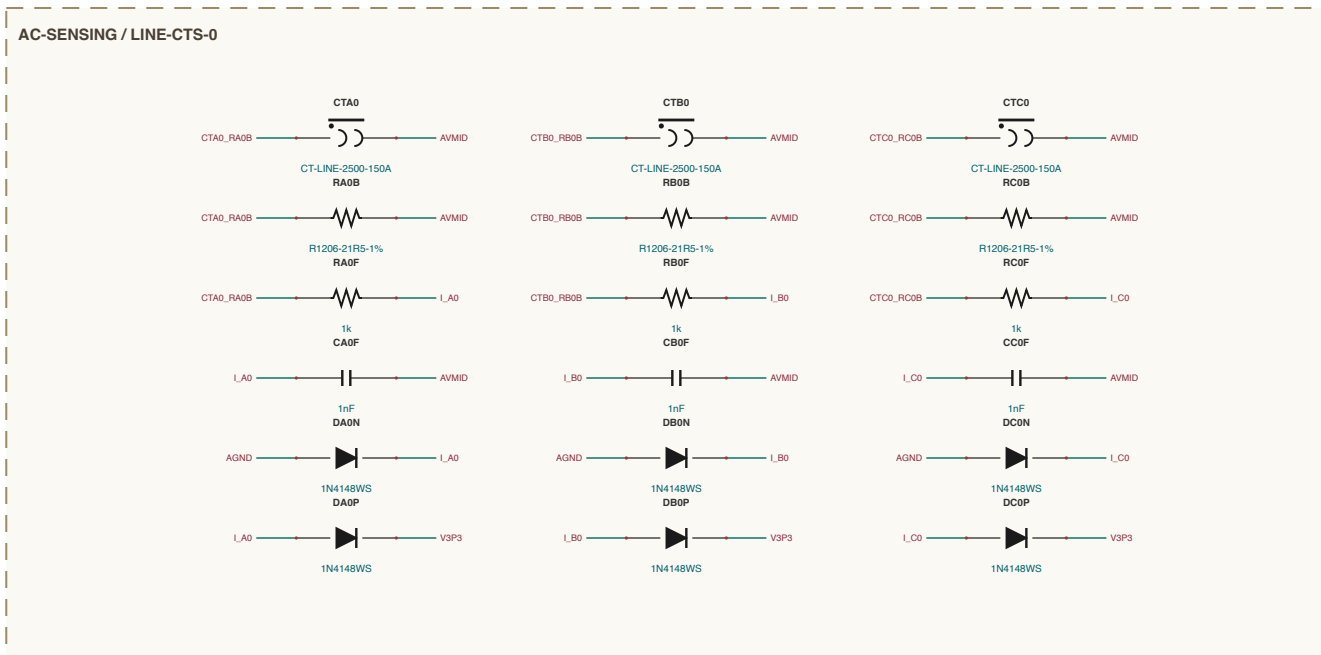
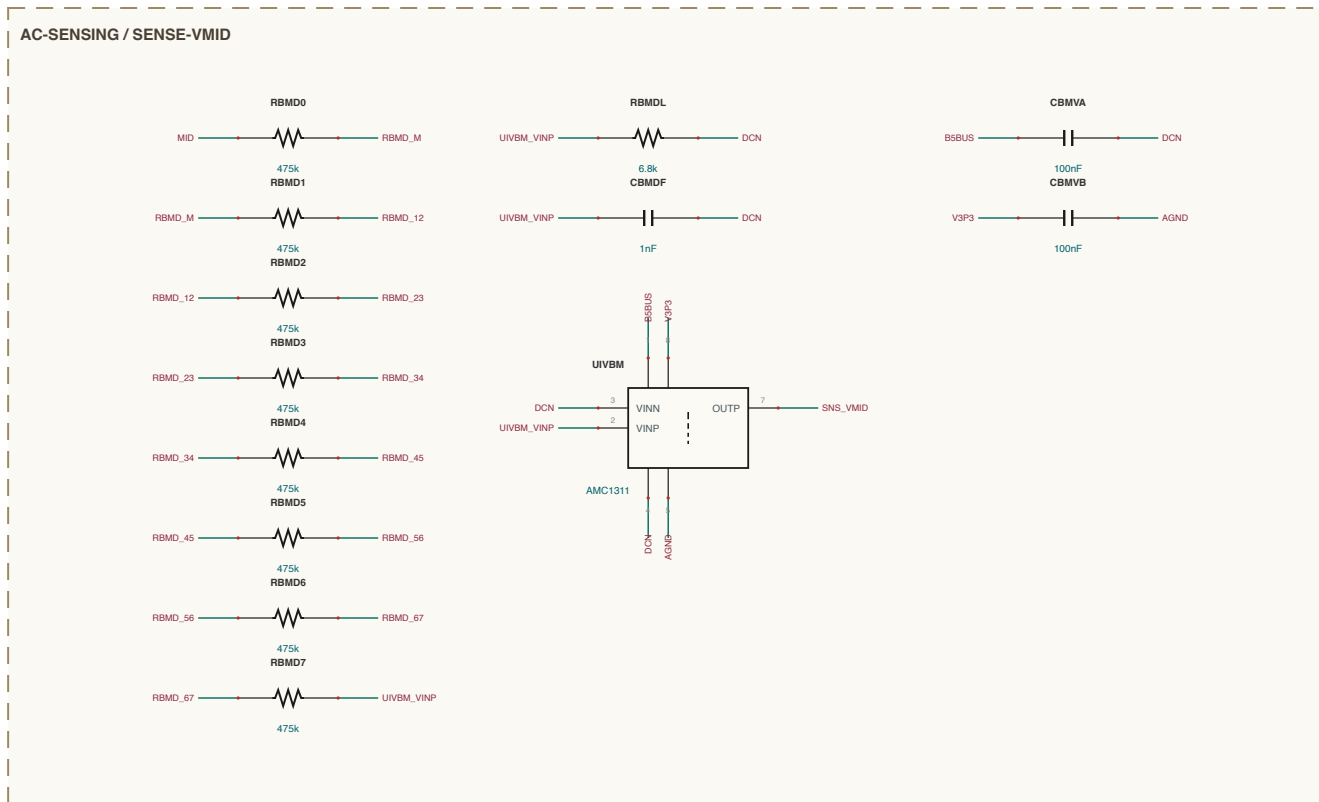
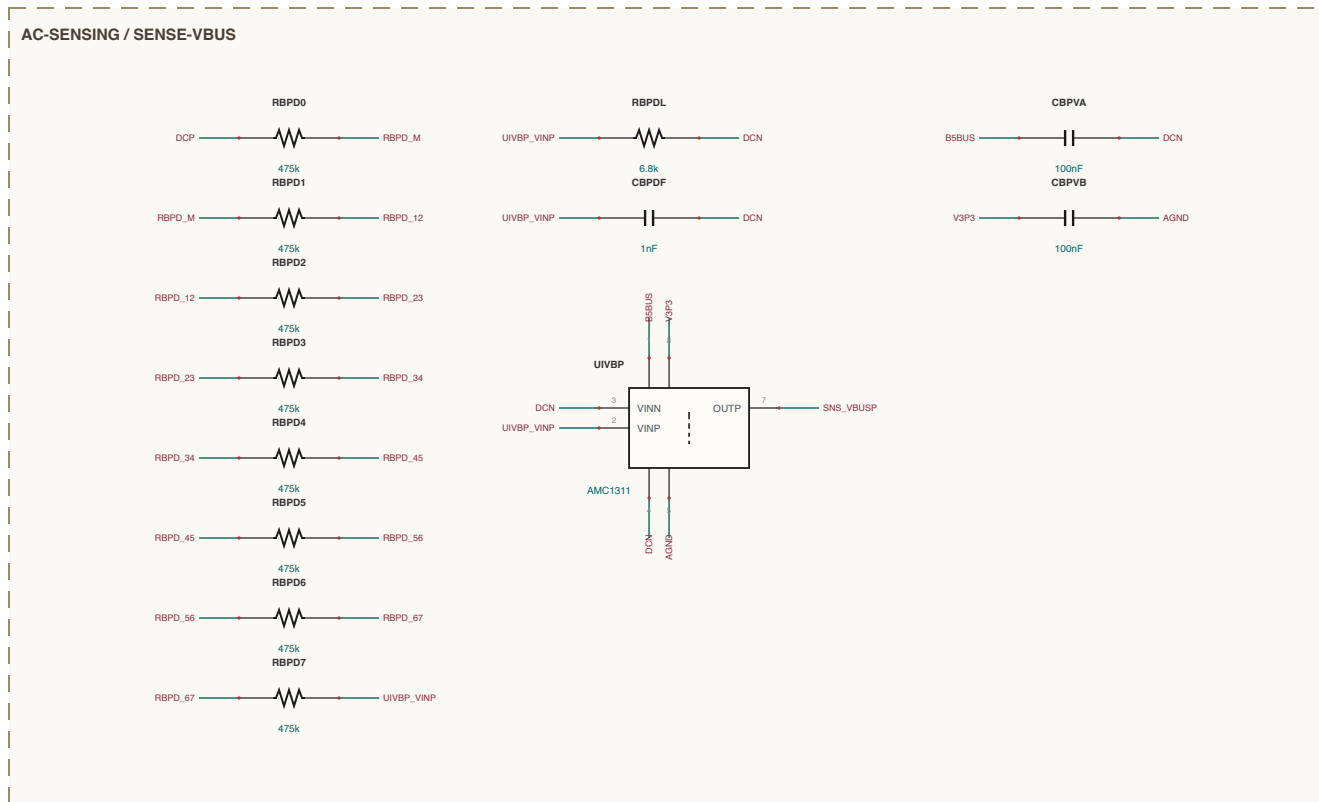
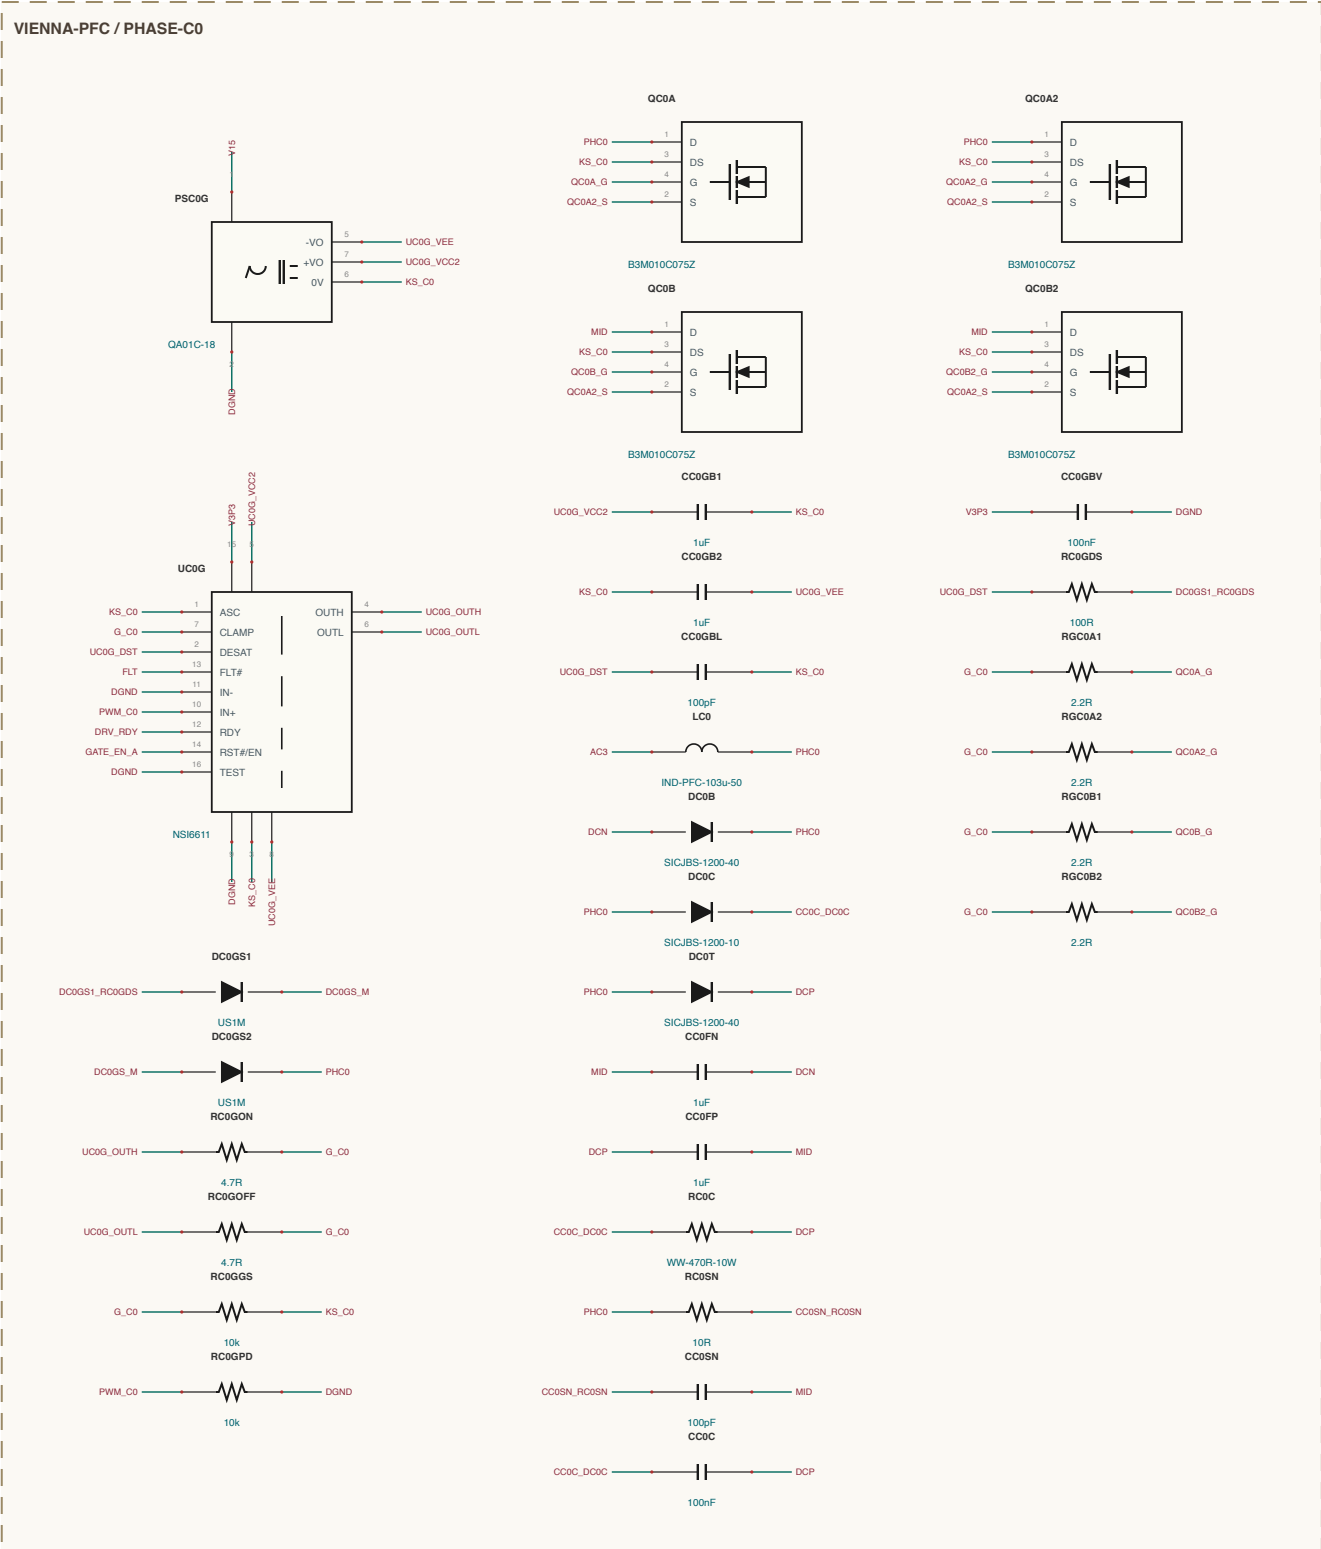
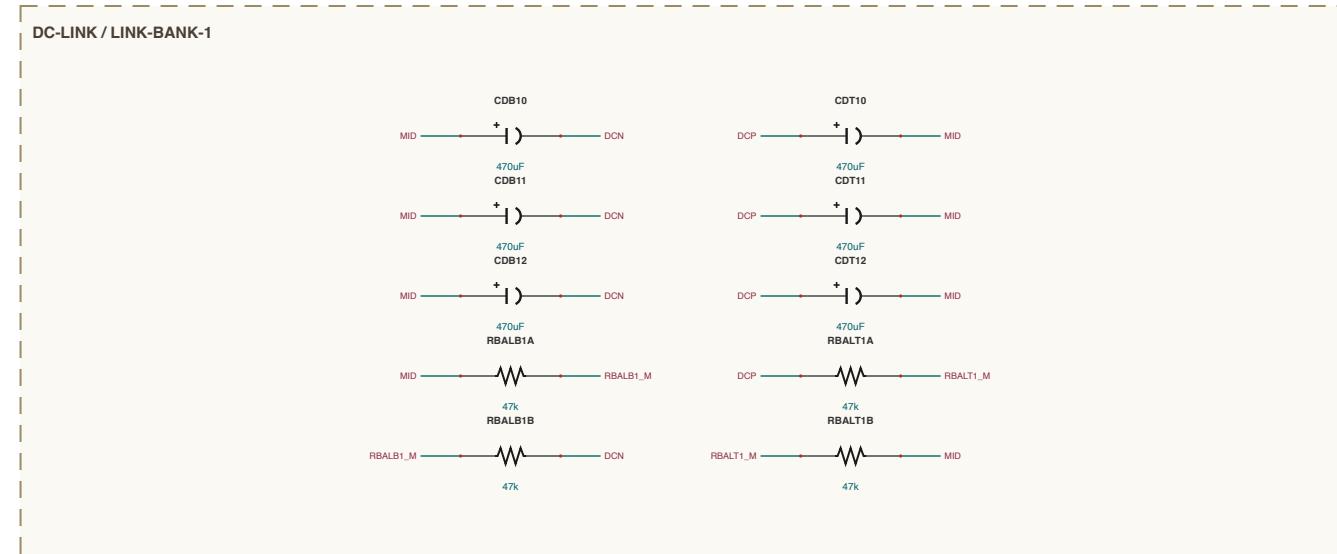
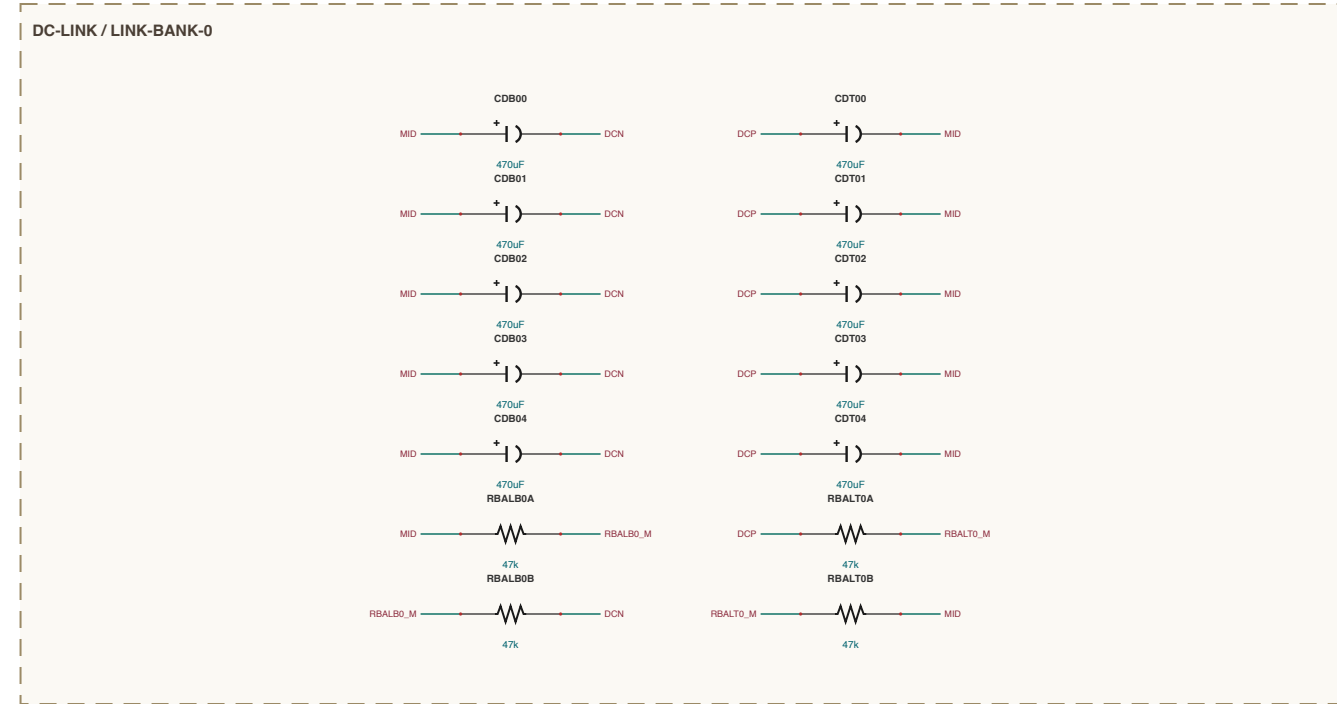
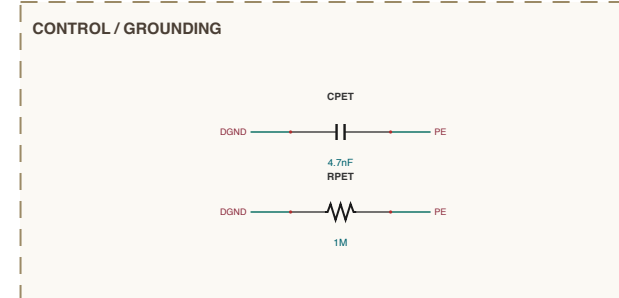
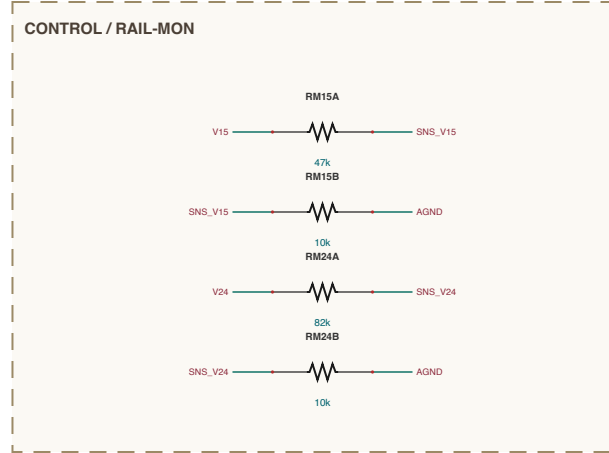
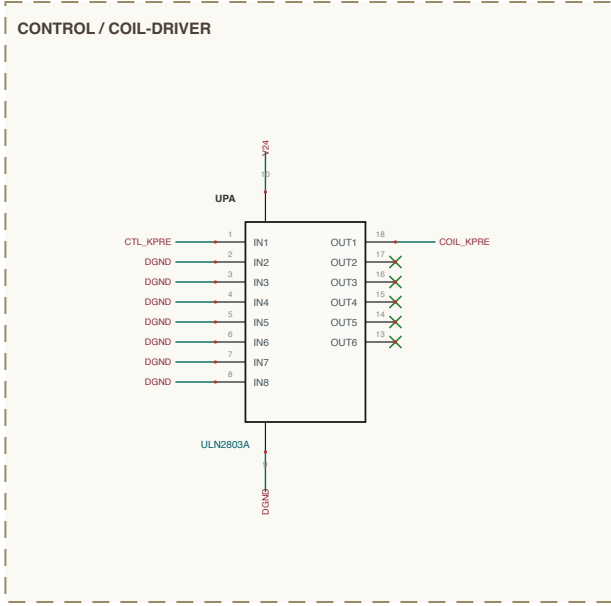
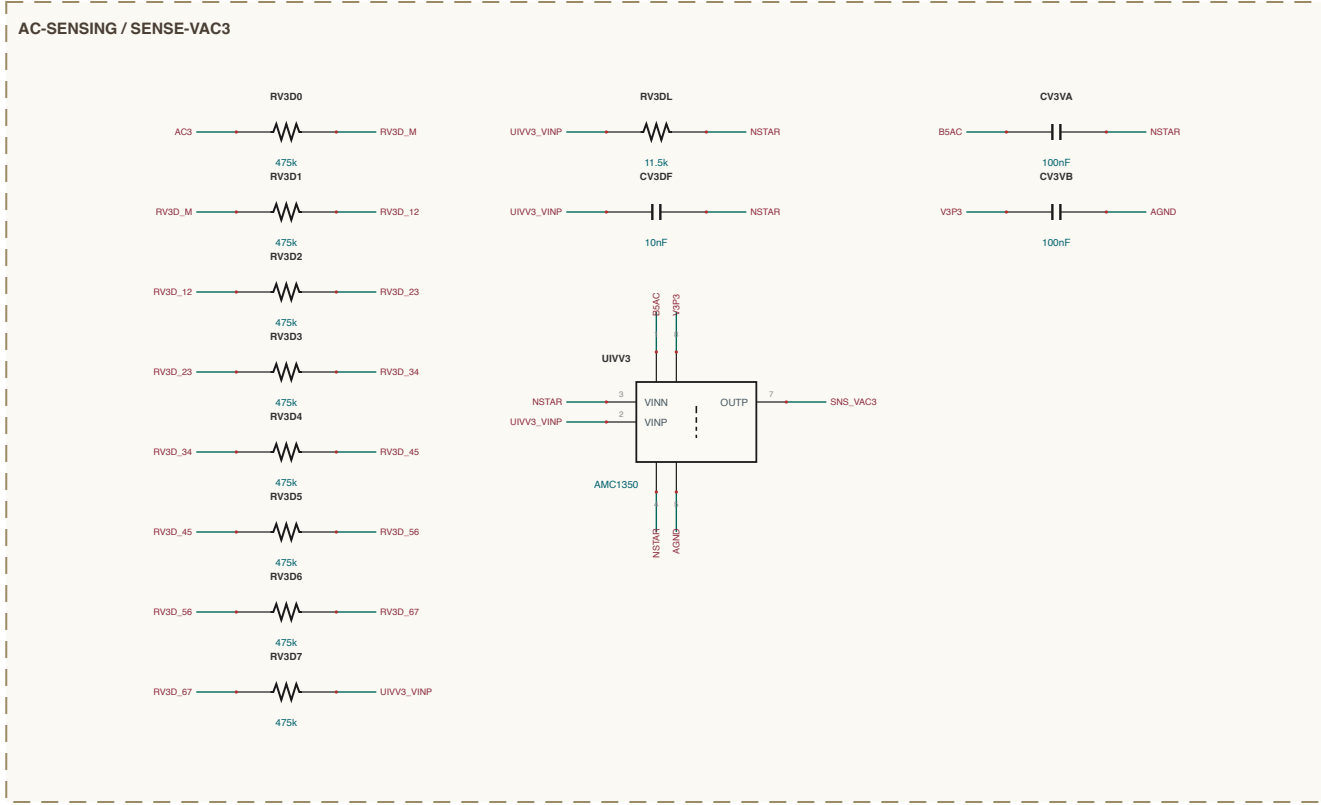
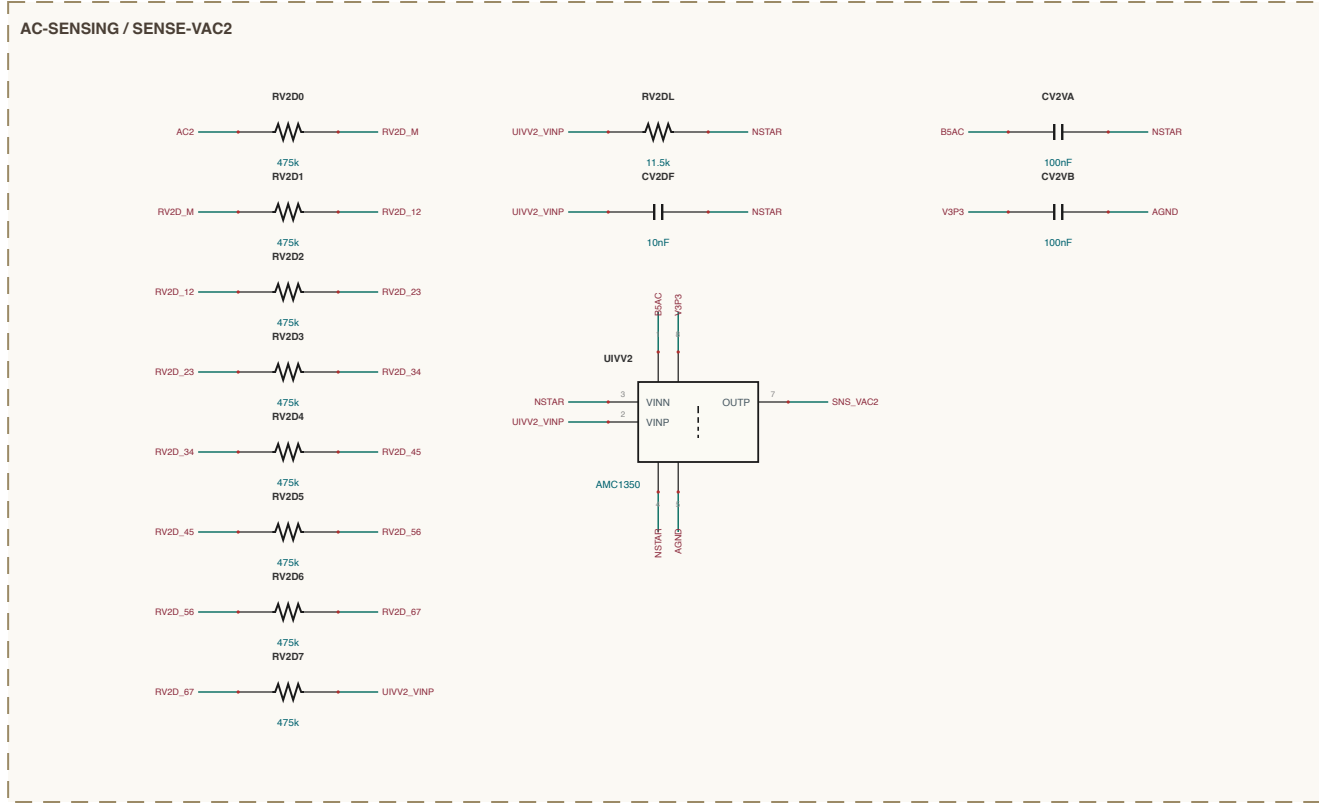


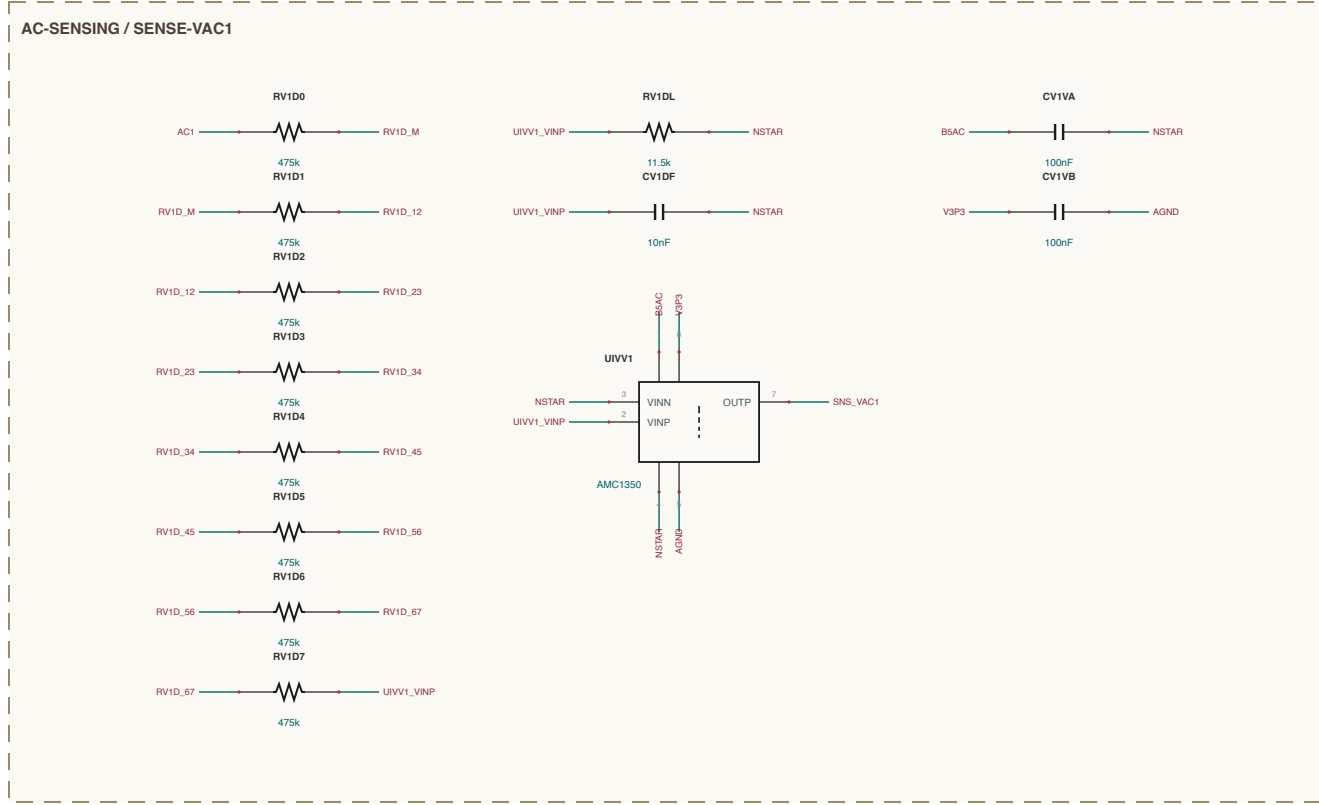

SHEET INDEX

SE 7-1 of 2

AC RESISTO - 4 sections
ALFA POWER - 3 sections
CORREX - 4 sections
EC-BMC - 4 sections
IMPET-BMC - 4 sections
VERNALYTIC - 3 sections

see 5.4 - 28 sections - 288 components

NET NAMING

internal functions are named for what they *do*

Unset, ϕ File-read all KE jobs e.g. ϕ FILED, ϕ RP

Residue, ϕ multiplicity of a series pair e.g. ϕ RS2,2, ϕ

Residue, ϕ residue tags between ResidueCode e.g. ϕ RV2, 01

all others are explicit design sets

MAGNETICS CONSTRUCTION


Identify your diachronemics, old forms, gaps, etc., acceptance lines (see below)

D1 LA3 C03: 5x T39 30u weebut, Wc22, D5.4mQ $\rightarrow$ 30.6uH $\rightarrow$ 105.54 μ s


56 L2M1-3: 3x T37 30u, h6d, 36.4mQ $\rightarrow$ 12.6uH $\rightarrow$ 135A μ s (hor 1.4uH)

total $L \approx$ measured after leakage (plus COMPOSITE leakage spread); C or TANK sections


BANKS-SP / BANK-A

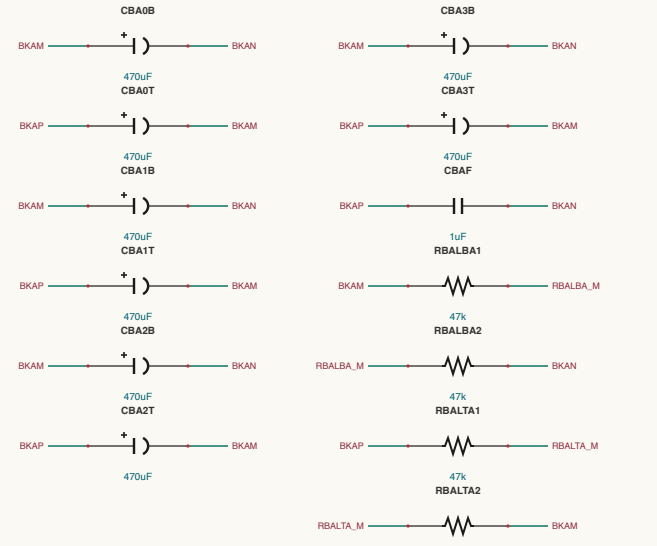


BANKS-SP / BANK-B

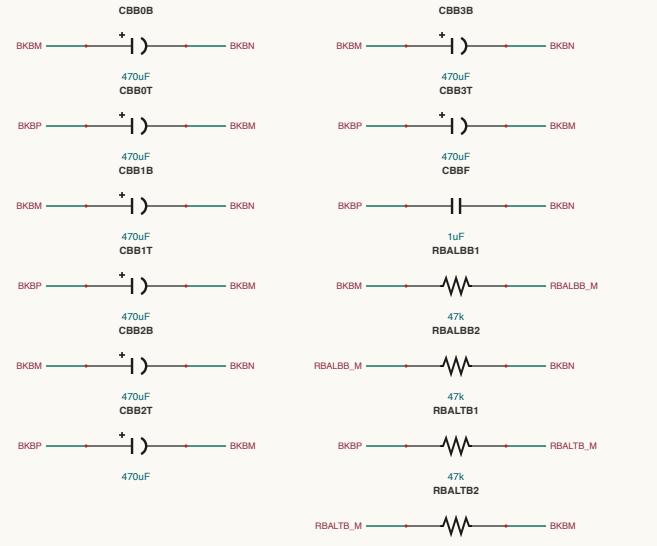


BANKS-SP / SP-MATRIX

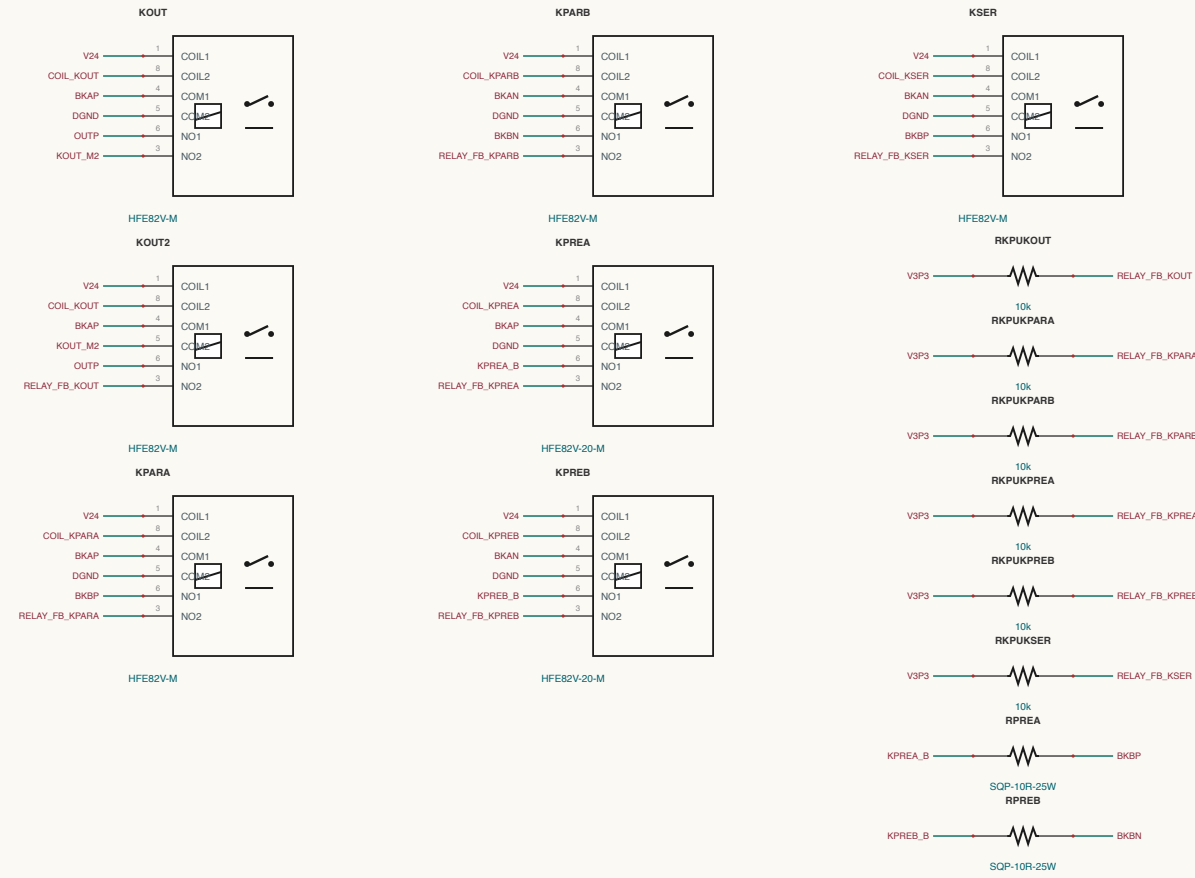


LLC-LESS / LEO-1

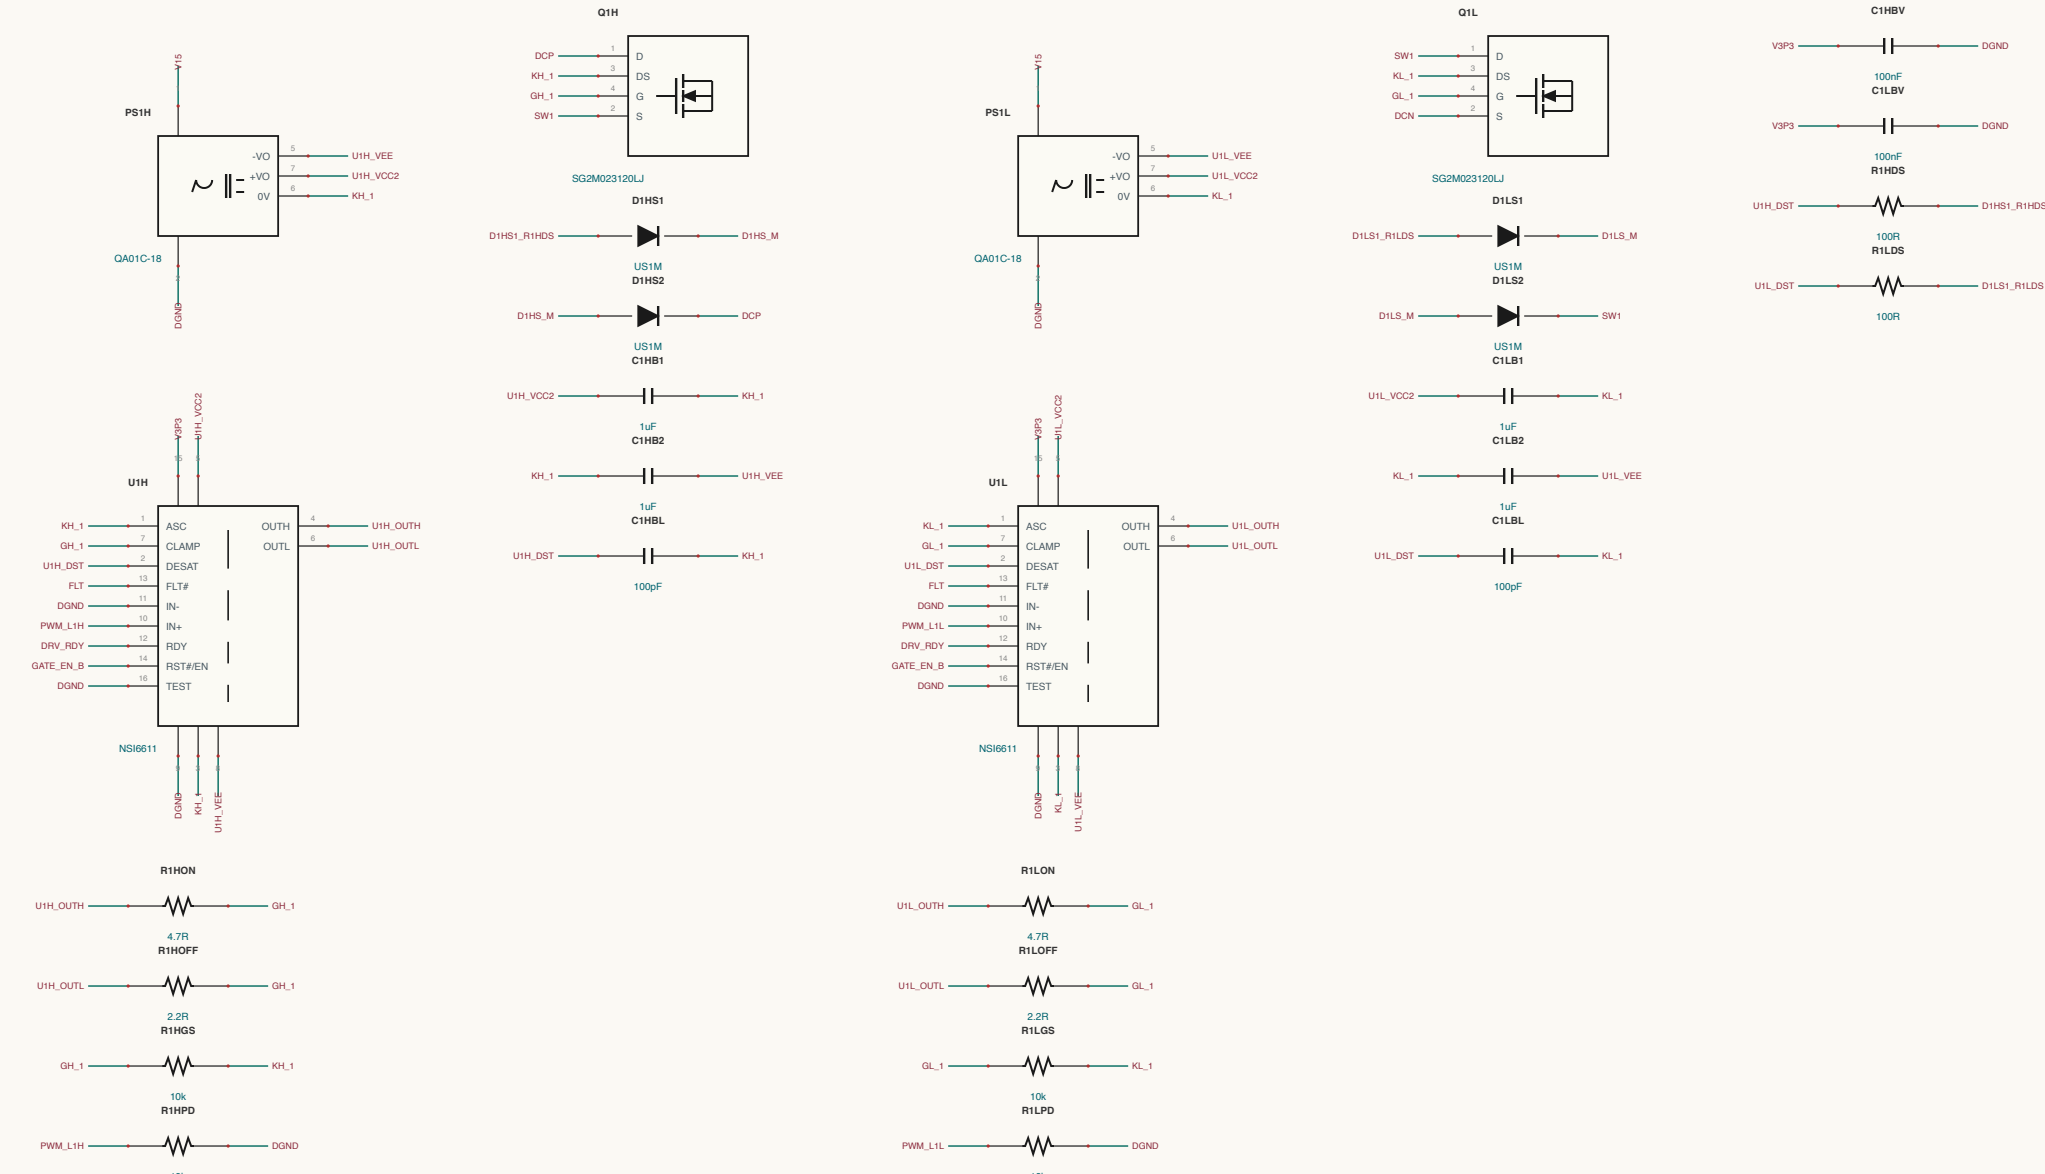


LLC-TANKS / TANK-1

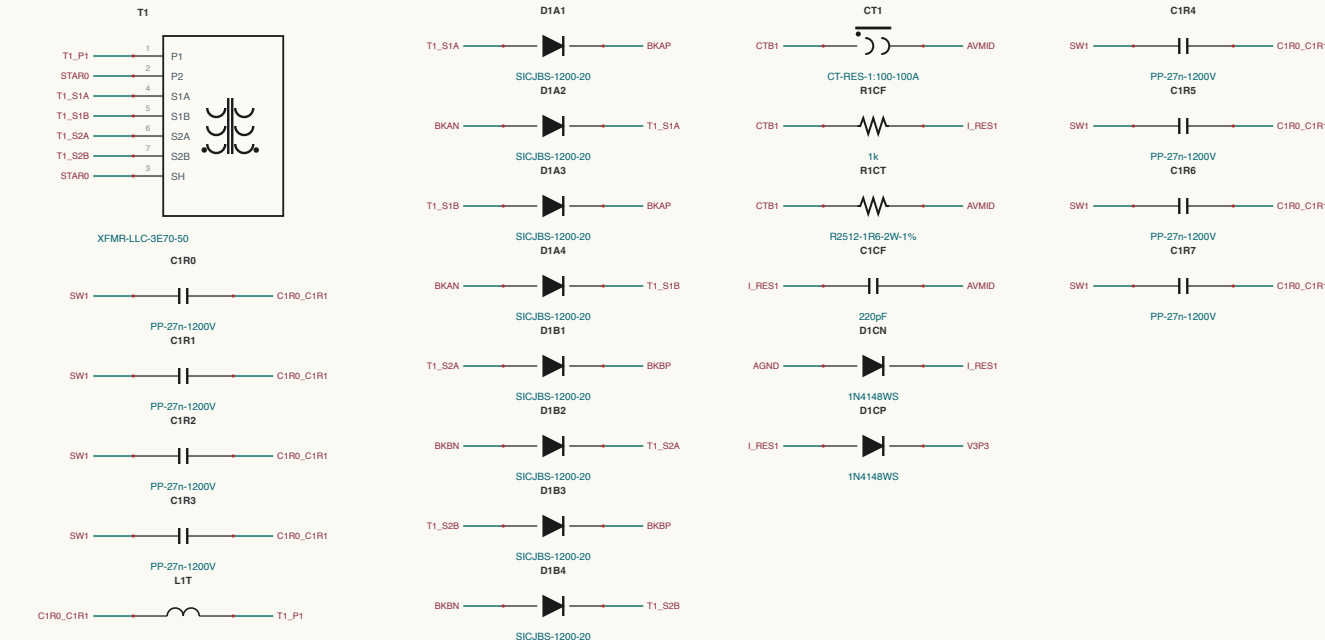


BANKS-SP / BLEEDERS

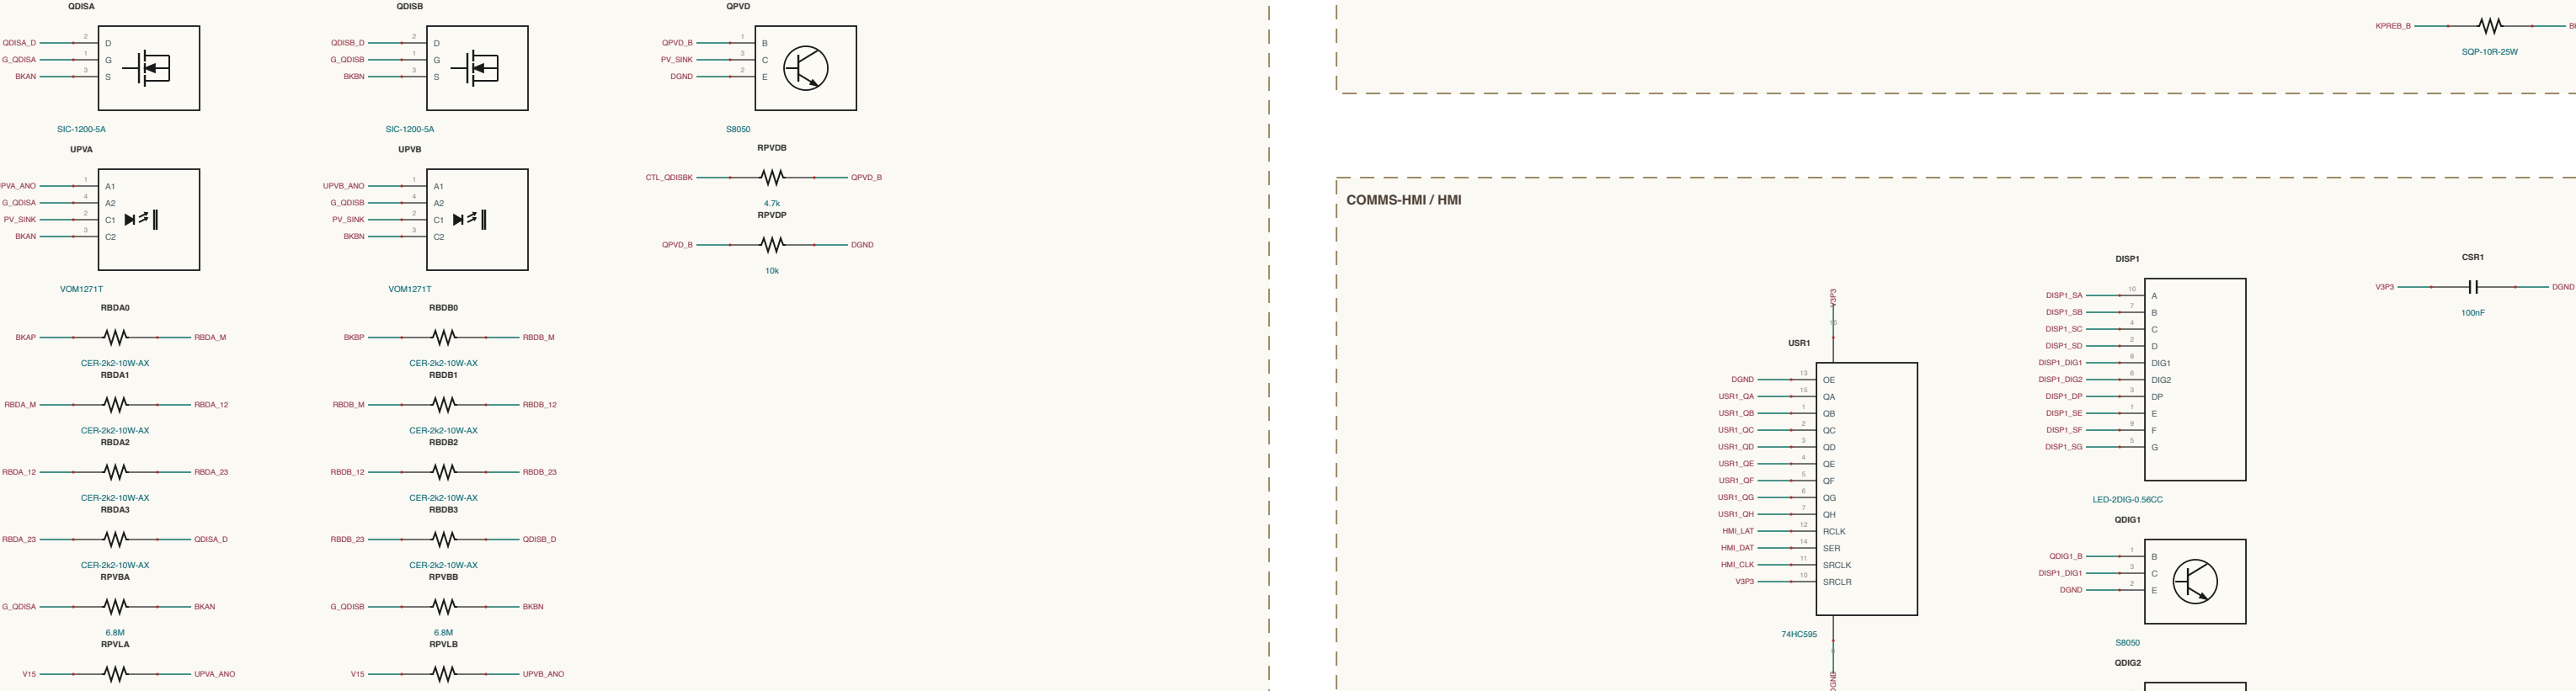


COMMS-HUB / HUB

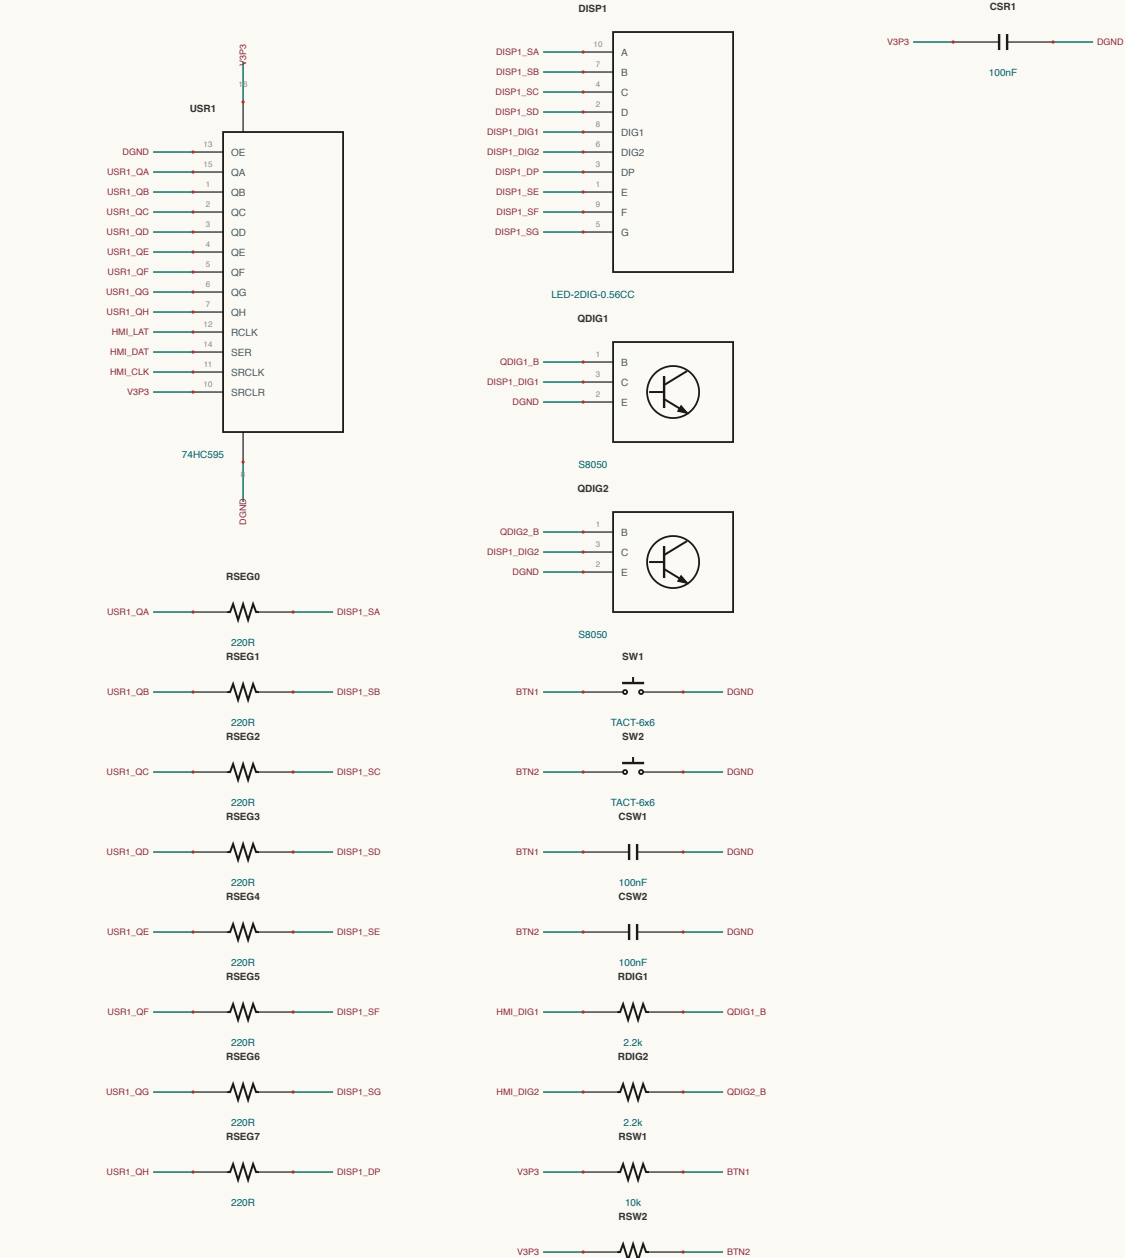


COMMS-HUB / CAN

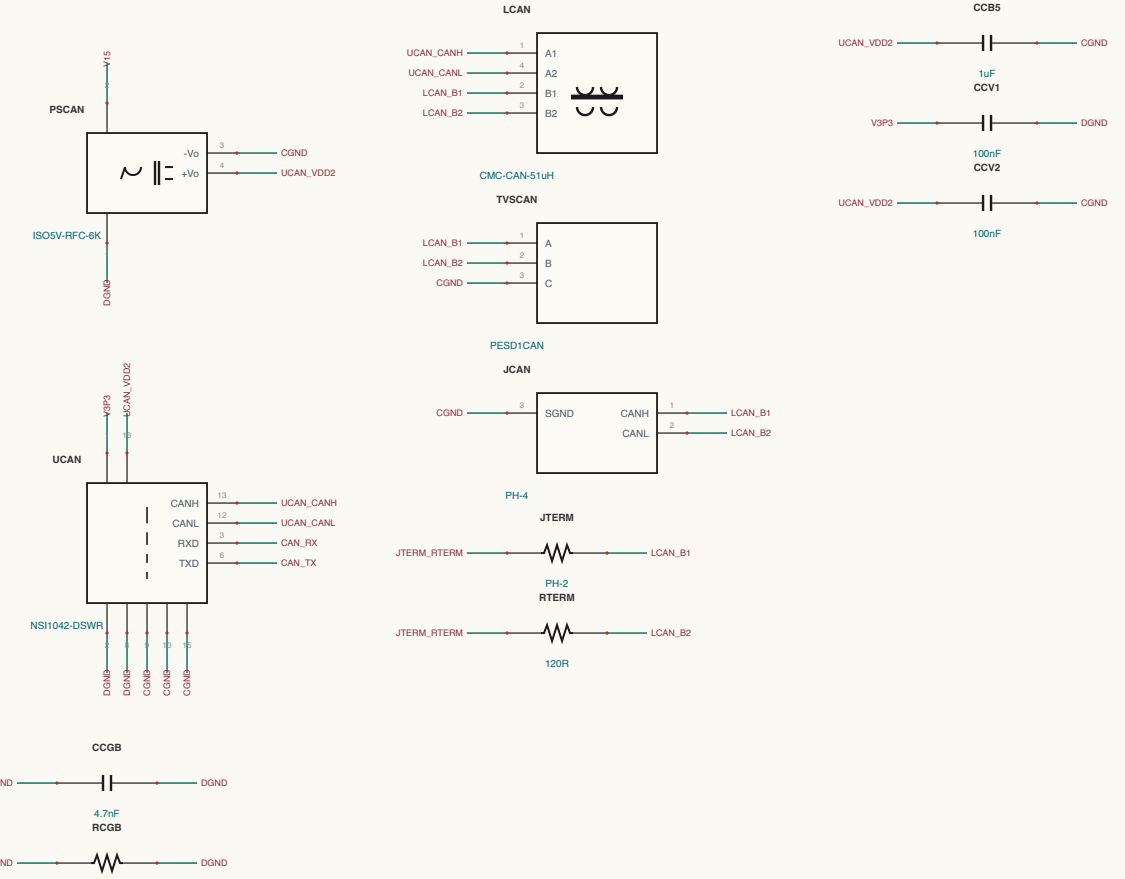


CONTROL / COL-DRIVER

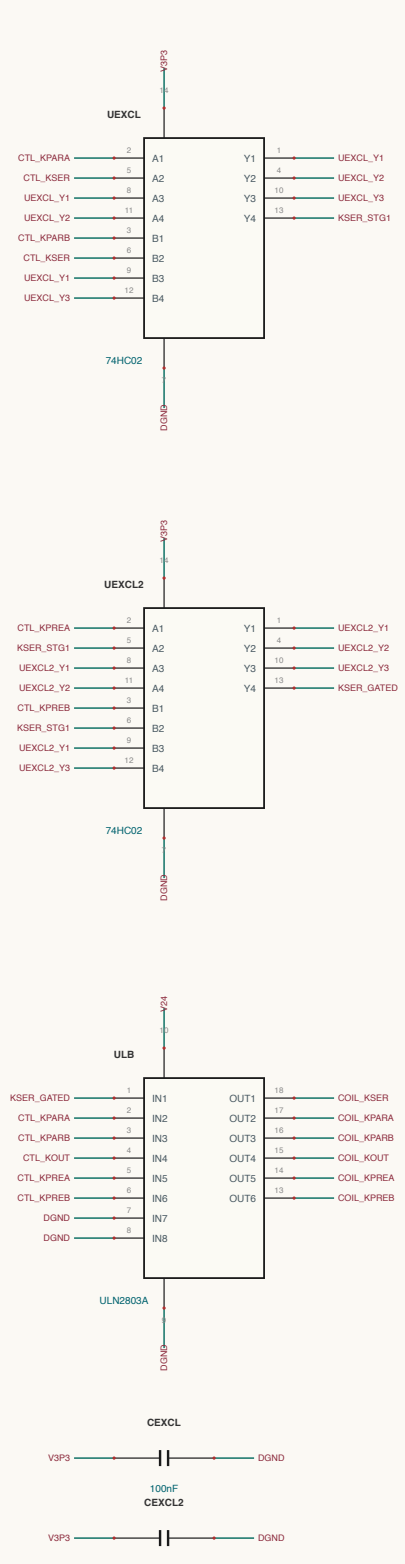


CONTROL / INTERCONNECT

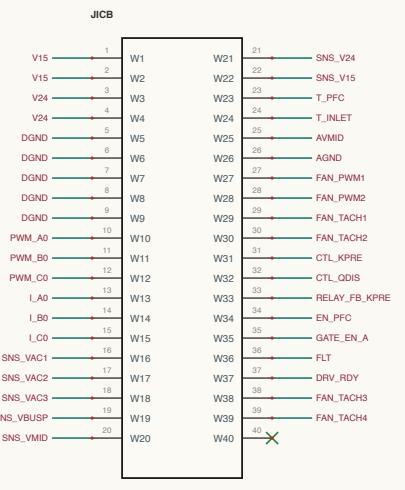


LLC-LESS / LEO-2

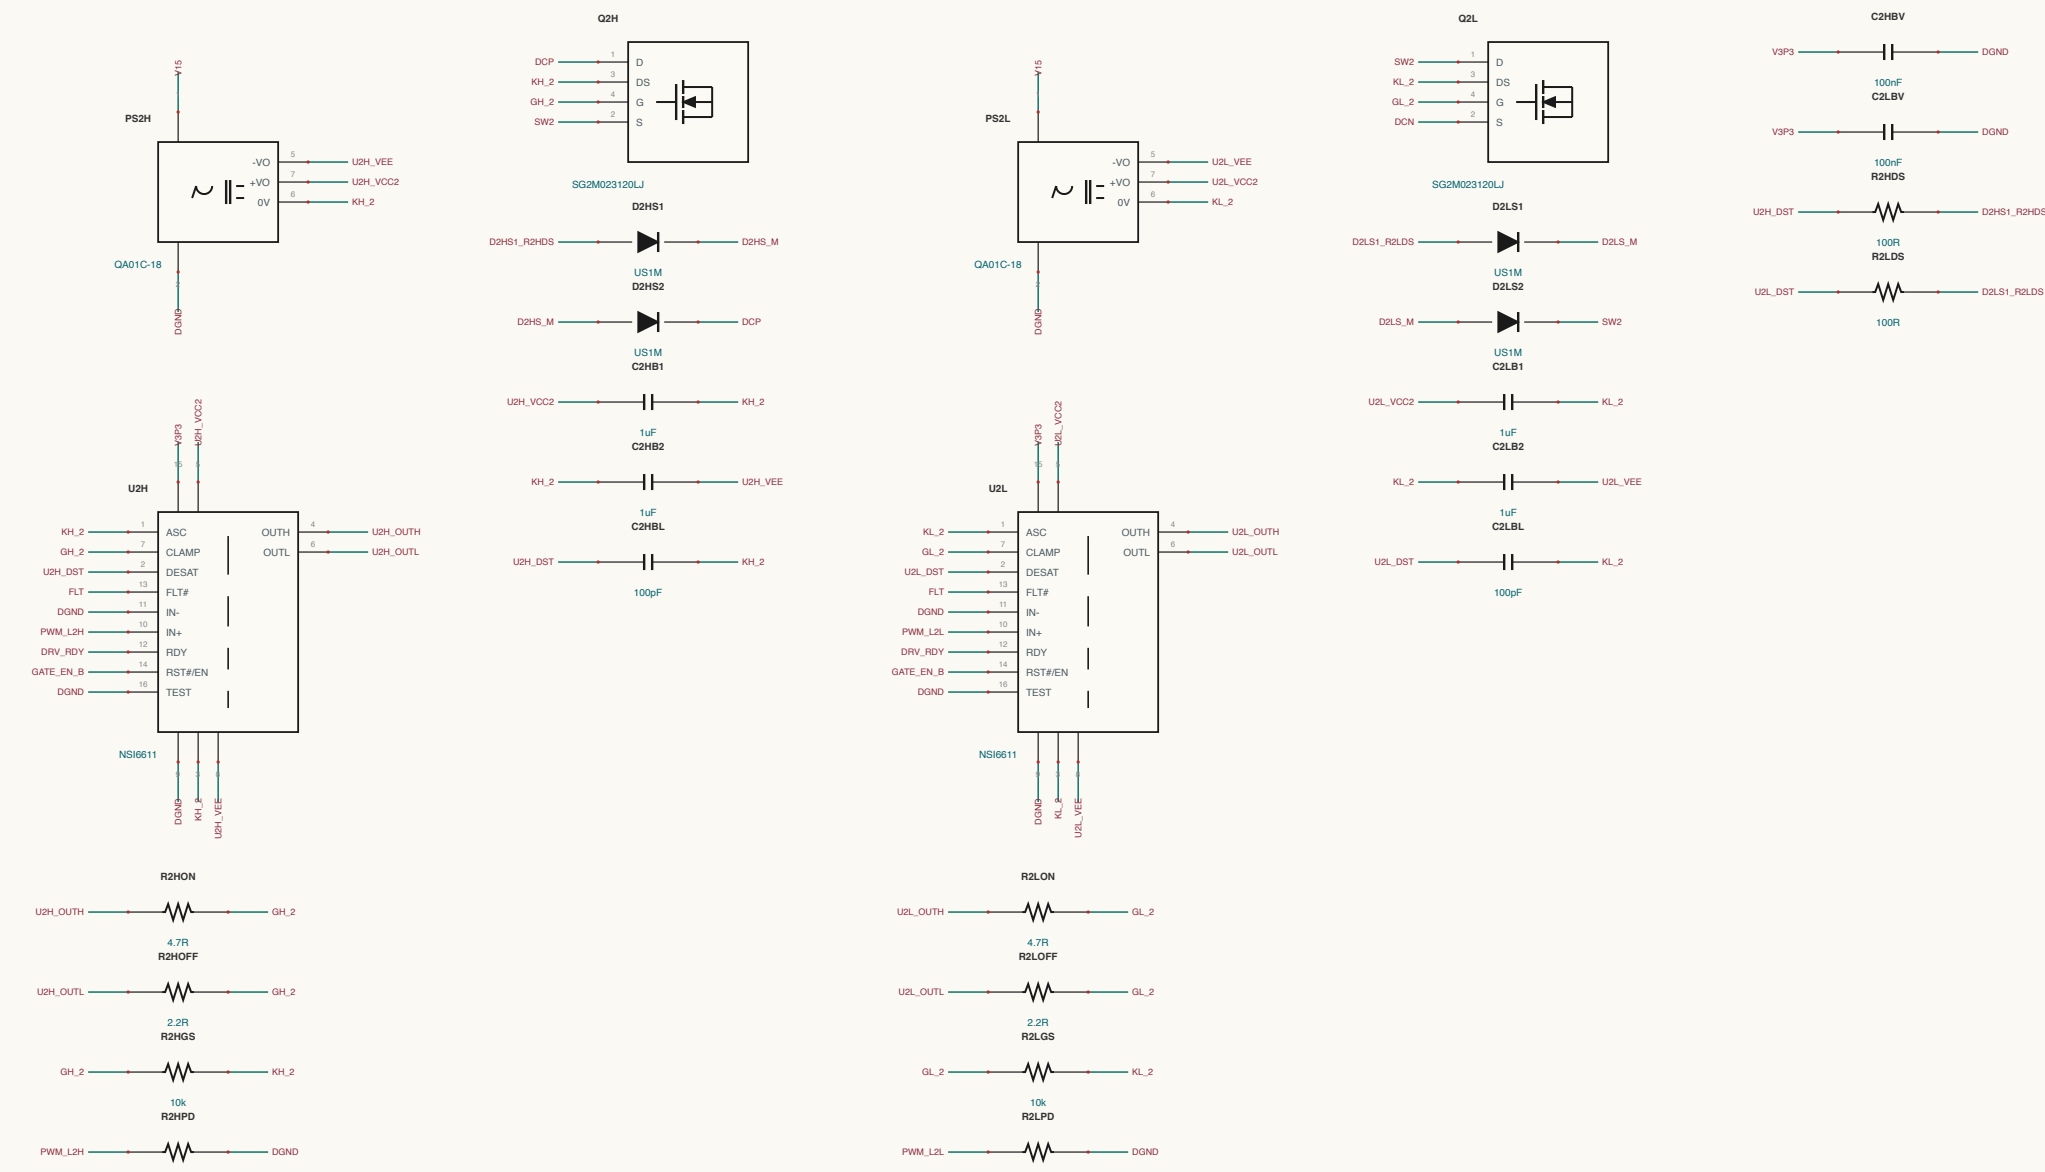


LLC-TANKS / TANK-2

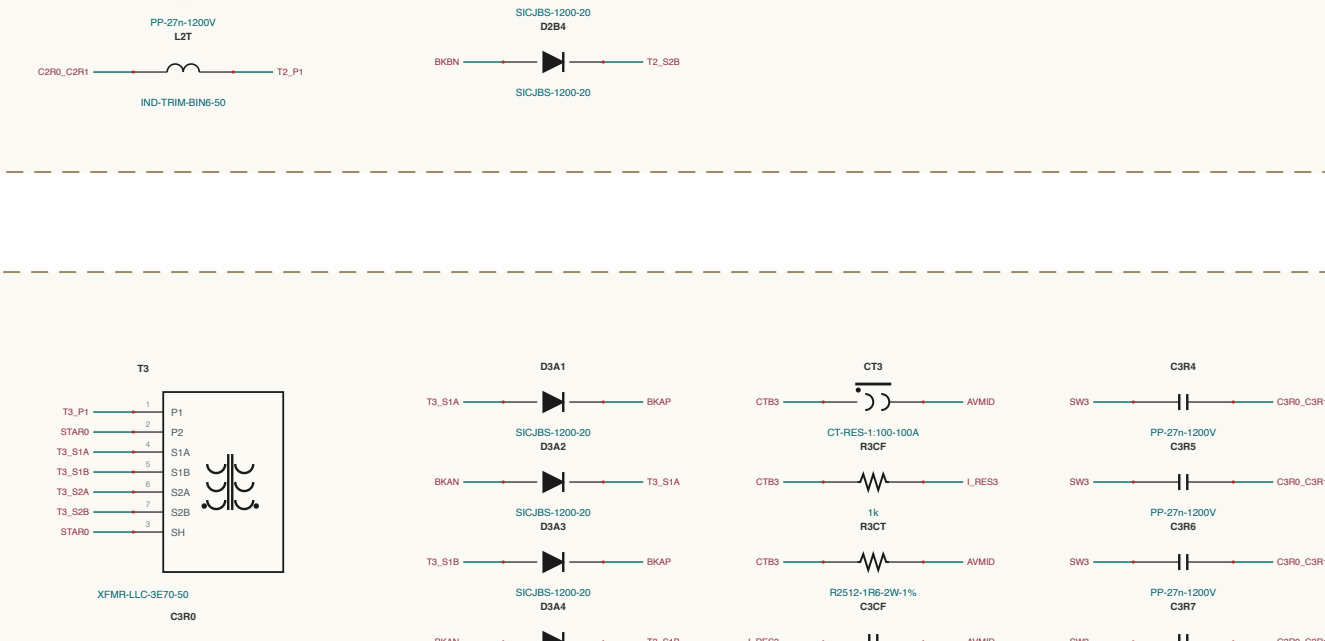


LLC-TANKS / TANK-3

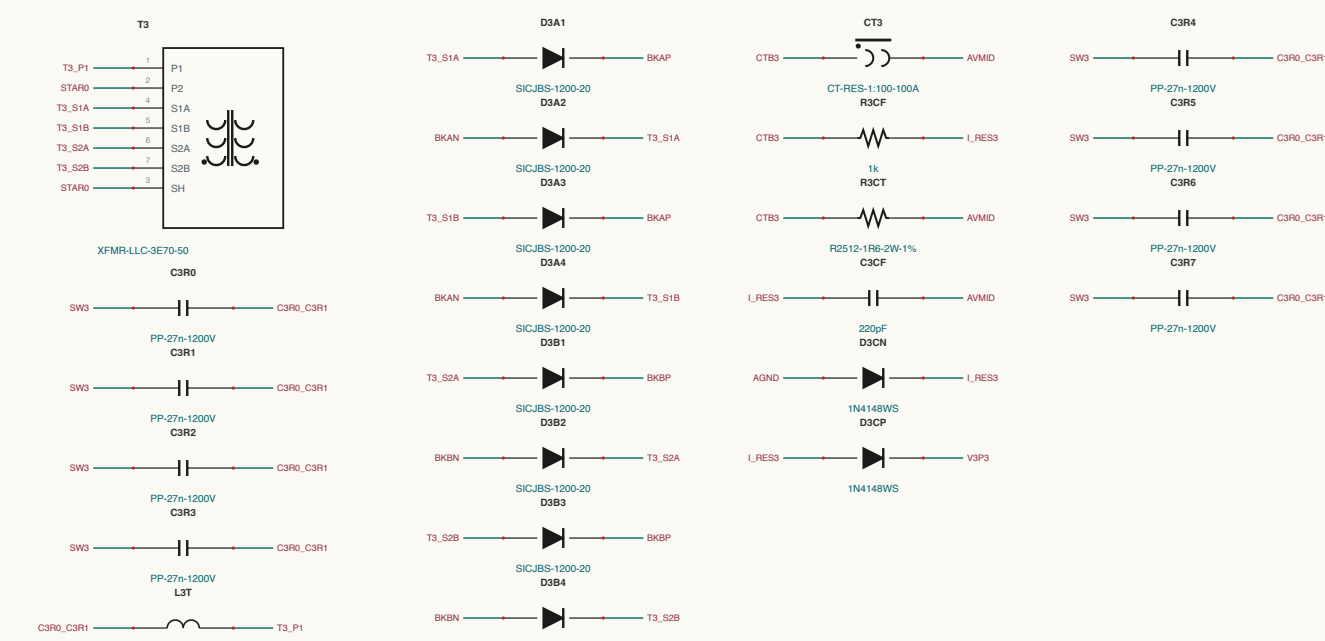


CONTROL / CARD-IP

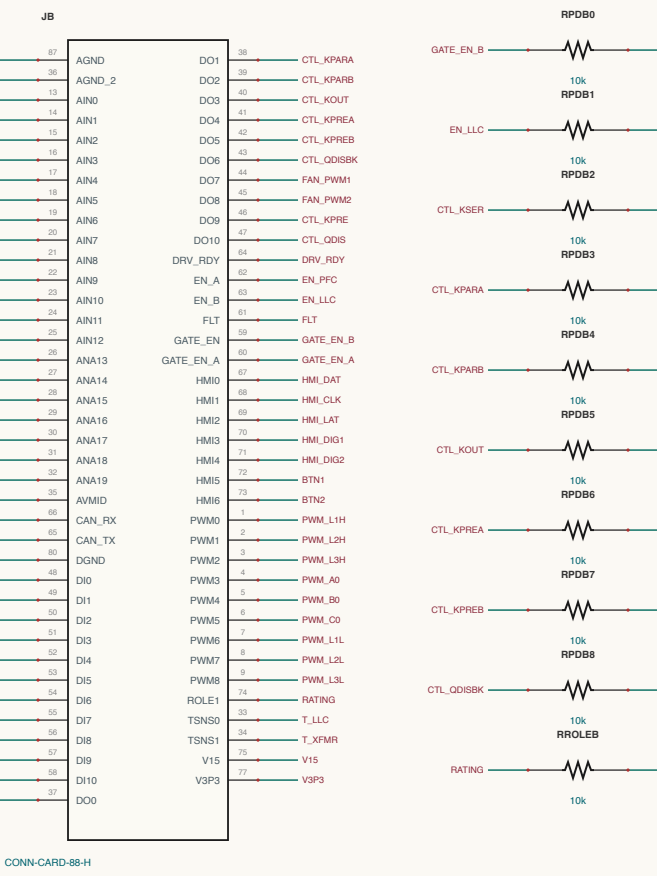


LLC-LESS / BUS-IN




OUTPUT-SENSING / OUTPUT

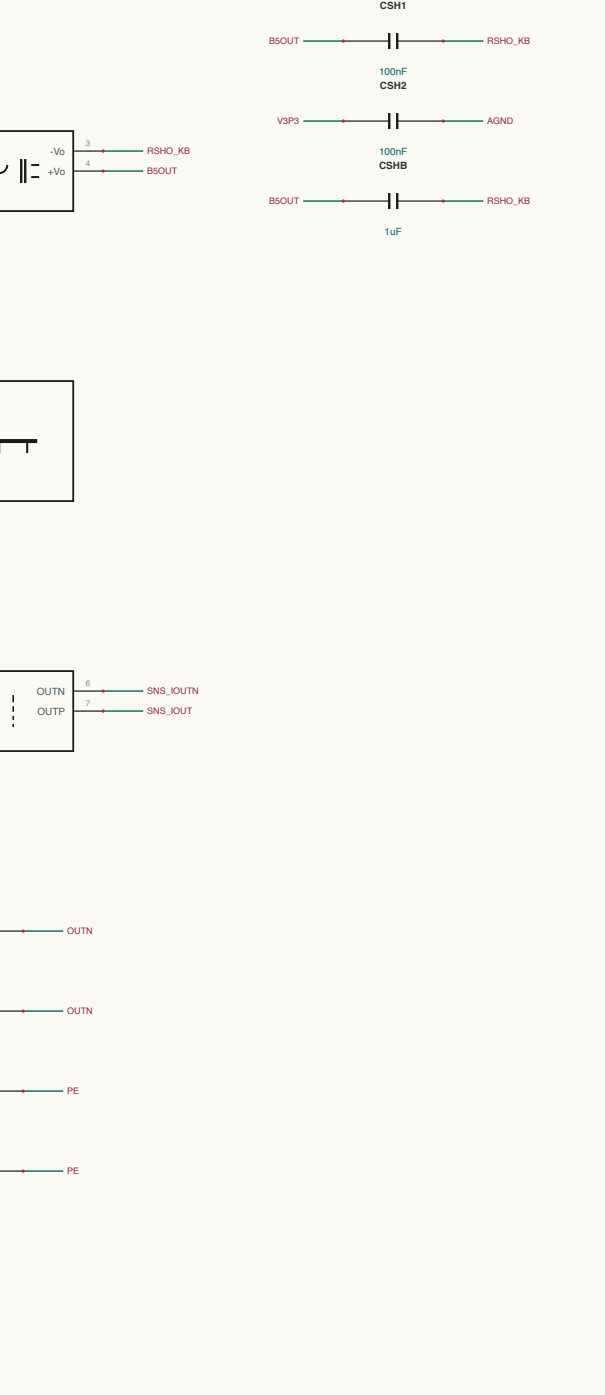

OUTPUT-SENSING / SENSE-VOLTA

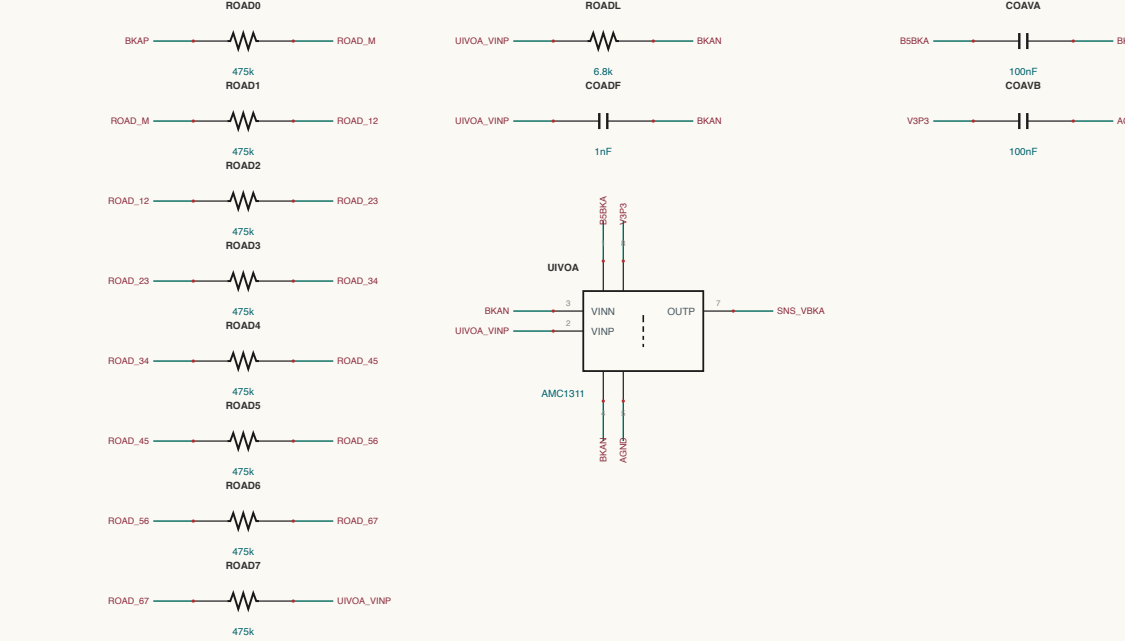

OUTPUT-SENSING / SENSE-VOLTA

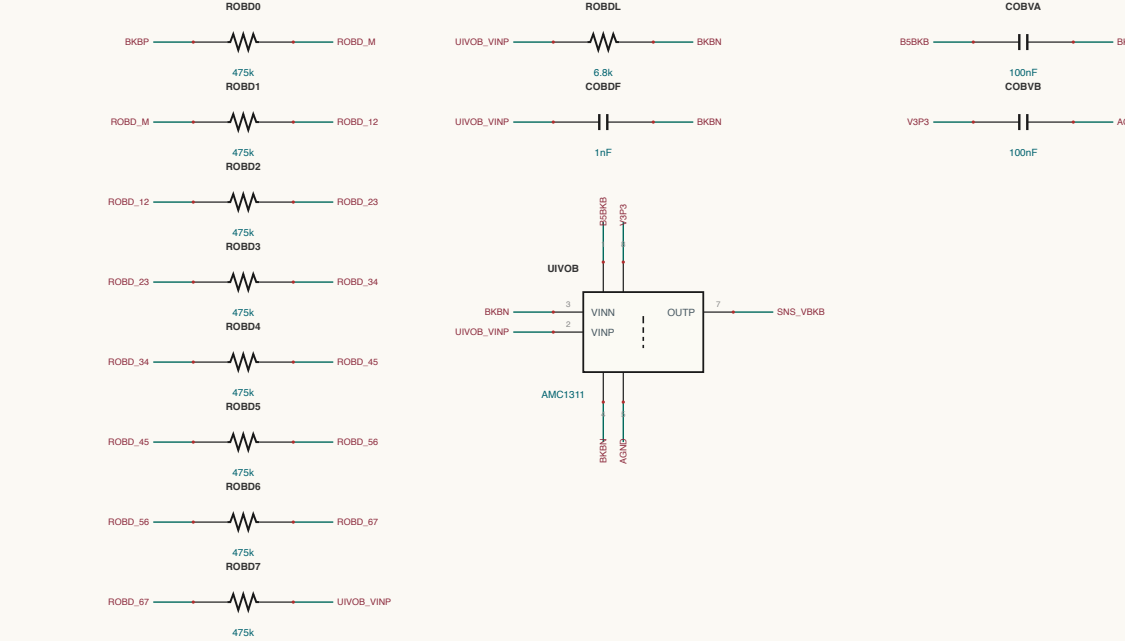


NET NAMING

Internal positions are marked for what they are.
Location: 400k resistors at 100k (e.g. 100k, 100k, 100k).
Resistor: 100k resistors at 100k (e.g. 100k, 100k, 100k).
Resistor: 100k resistors at 100k (e.g. 100k, 100k, 100k).
All others are regular design rules.


MAGNETICS CONSTRUCTION

Identify per design/requirements and design, give the construction rules here.
B171.75: 10 (EMISS) per section, B171.75 (B171.75).
B171.75: 10 (EMISS) per section, B171.75 (B171.75).
B171.75: 10 (EMISS) per section, B171.75 (B171.75).
B171.75: 10 (EMISS) per section, B171.75 (B171.75).


OUTPUT-SENSING / SENSE-VOUT

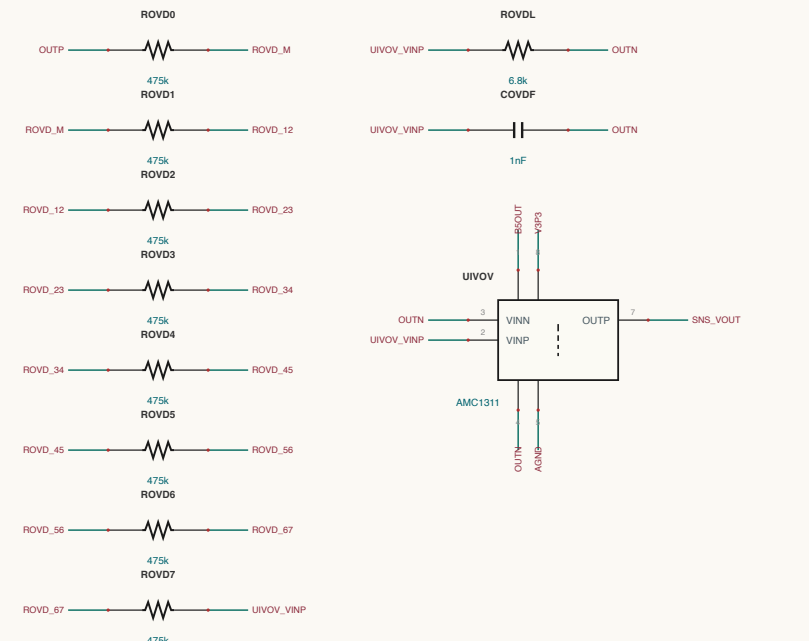

OUTPUT-SENSING / ATC

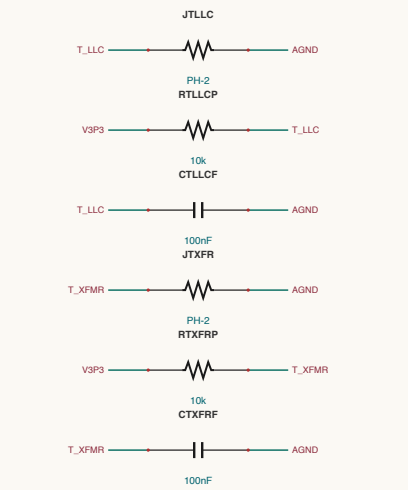


OUTPUT-SENSING / ISO-MAX

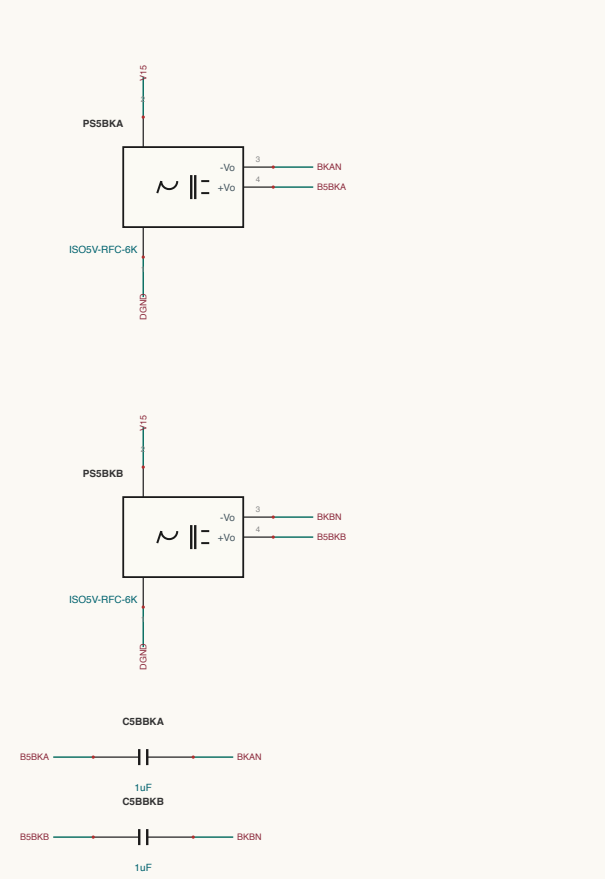


SHEET INDEX

Sheet 1 of 2
OUTPUT-SENSING: 5 modules
BANKS-SP: 4 modules
LLC-LESS: 4 modules
CONTROL: 4 modules
LLC-TANKS: 4 modules
COMMS-HUB: 4 modules
Total: 24 modules (24 modules)


CONTROL / MCU

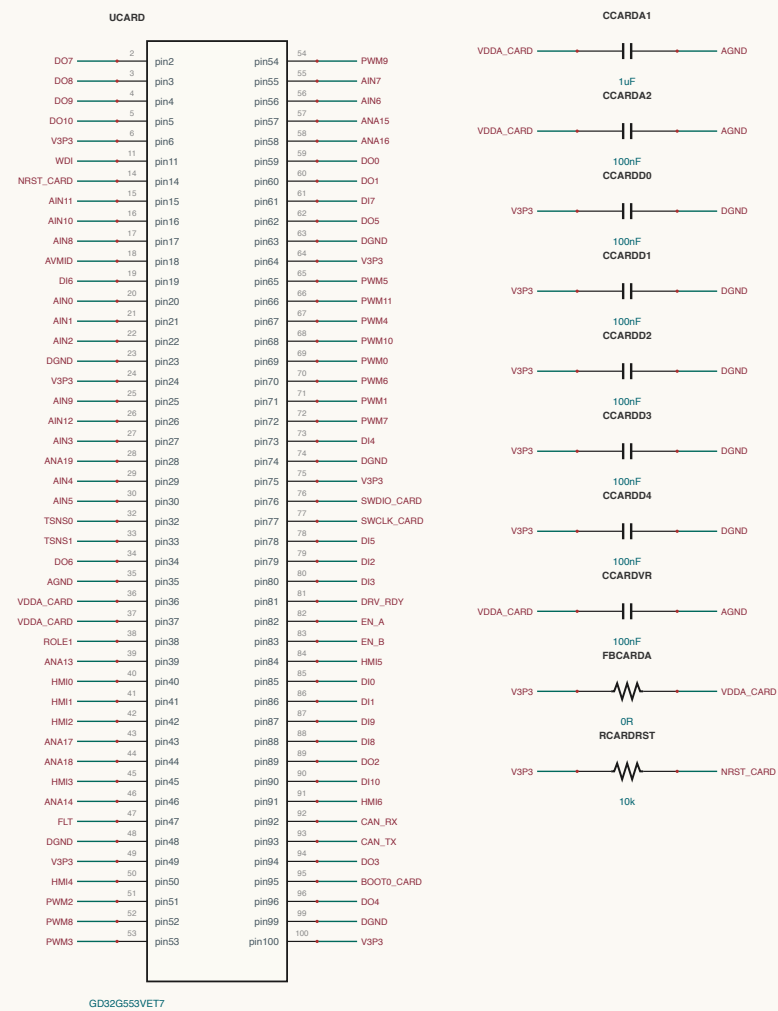


CONTROL / SWD-BOOT

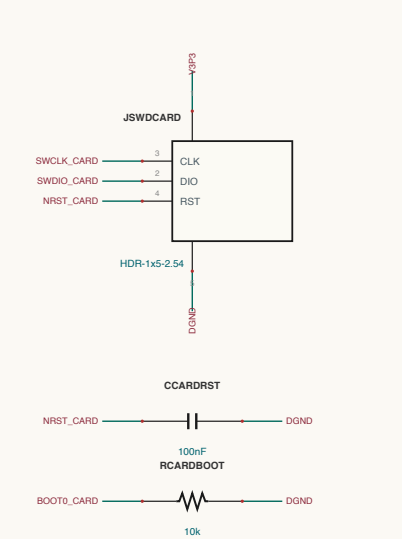

CONTROL / SAFETY

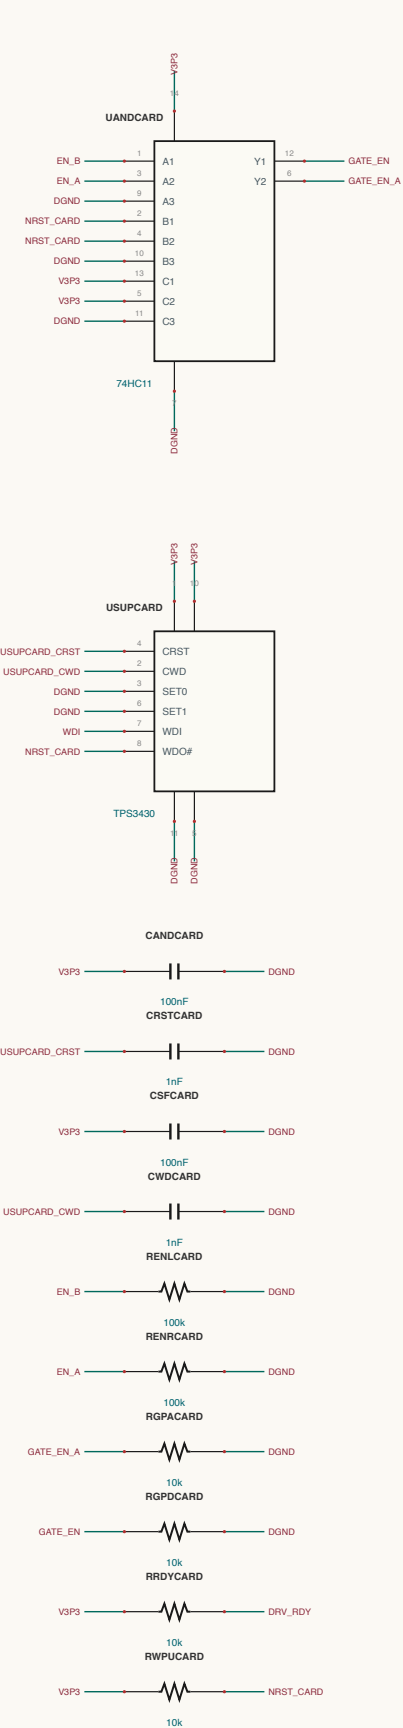


CONTROL / FLT-GROUND




CONTROL / ROLE



CONTROL / BUCK-3V3

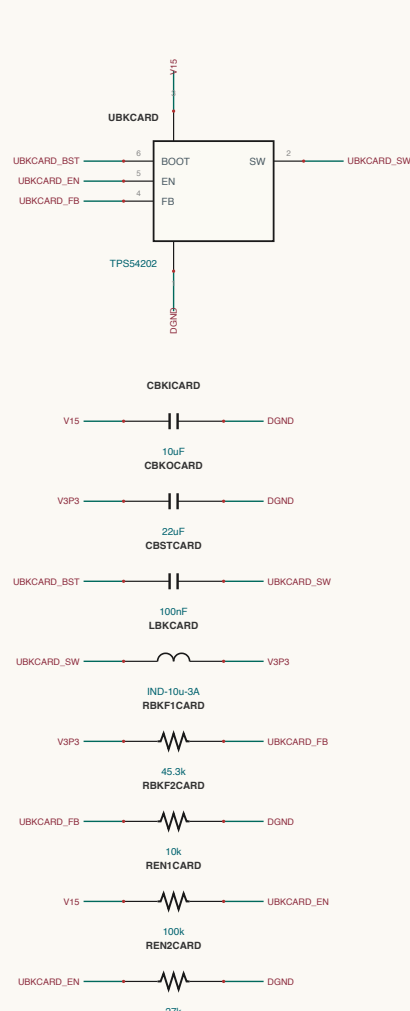

CONTROL / ANALOG-MID

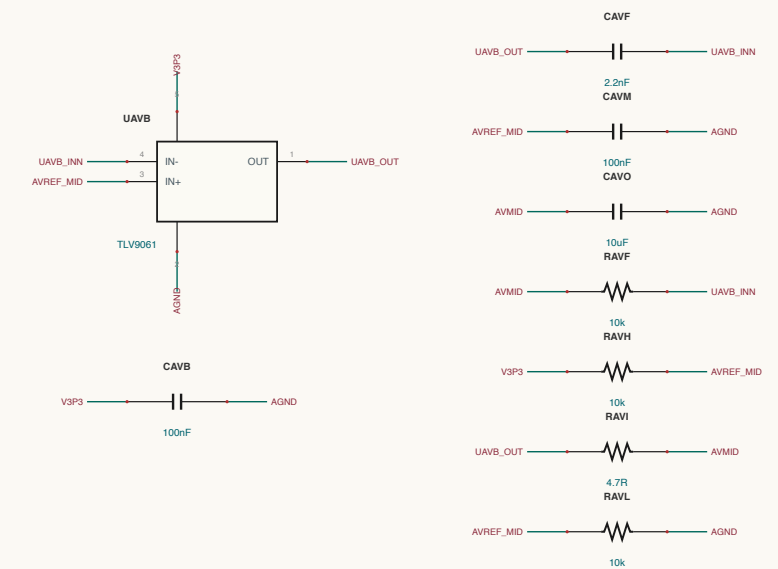

CONTROL / CARD-IF

