
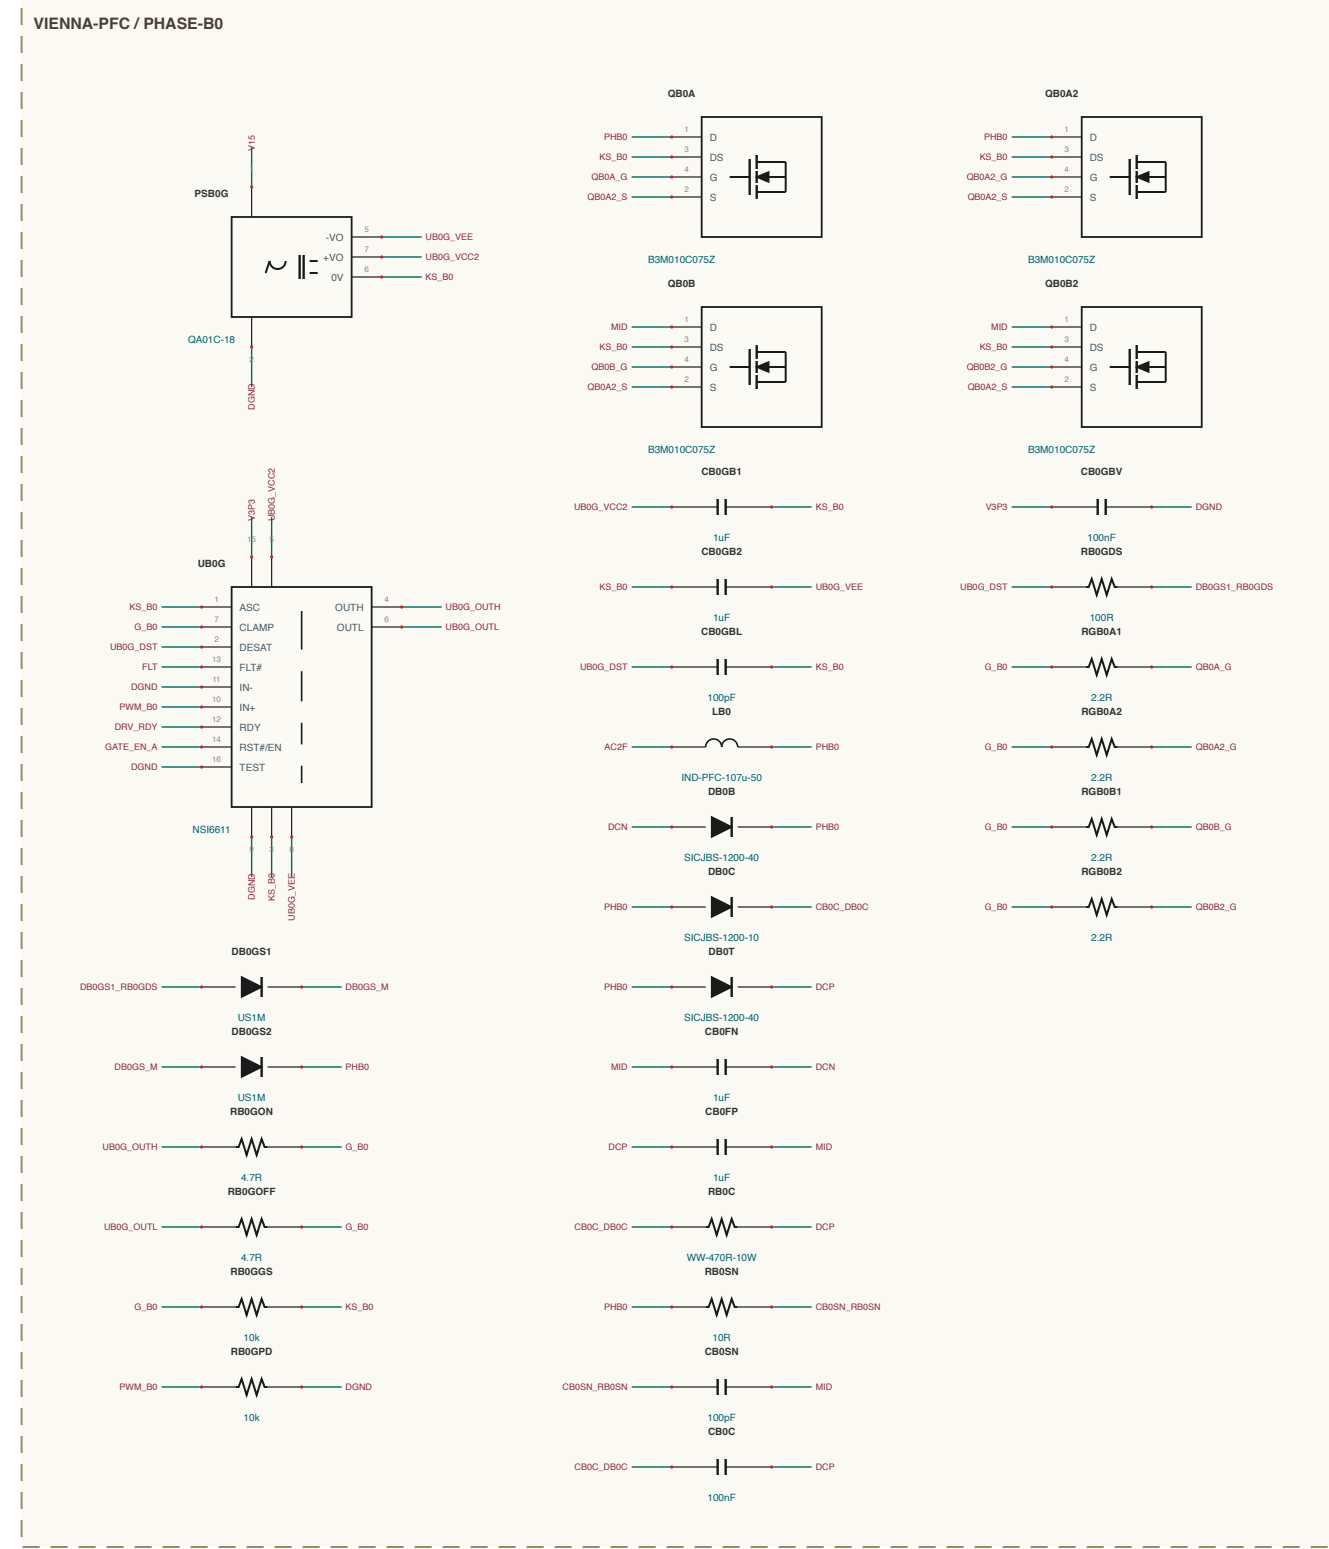
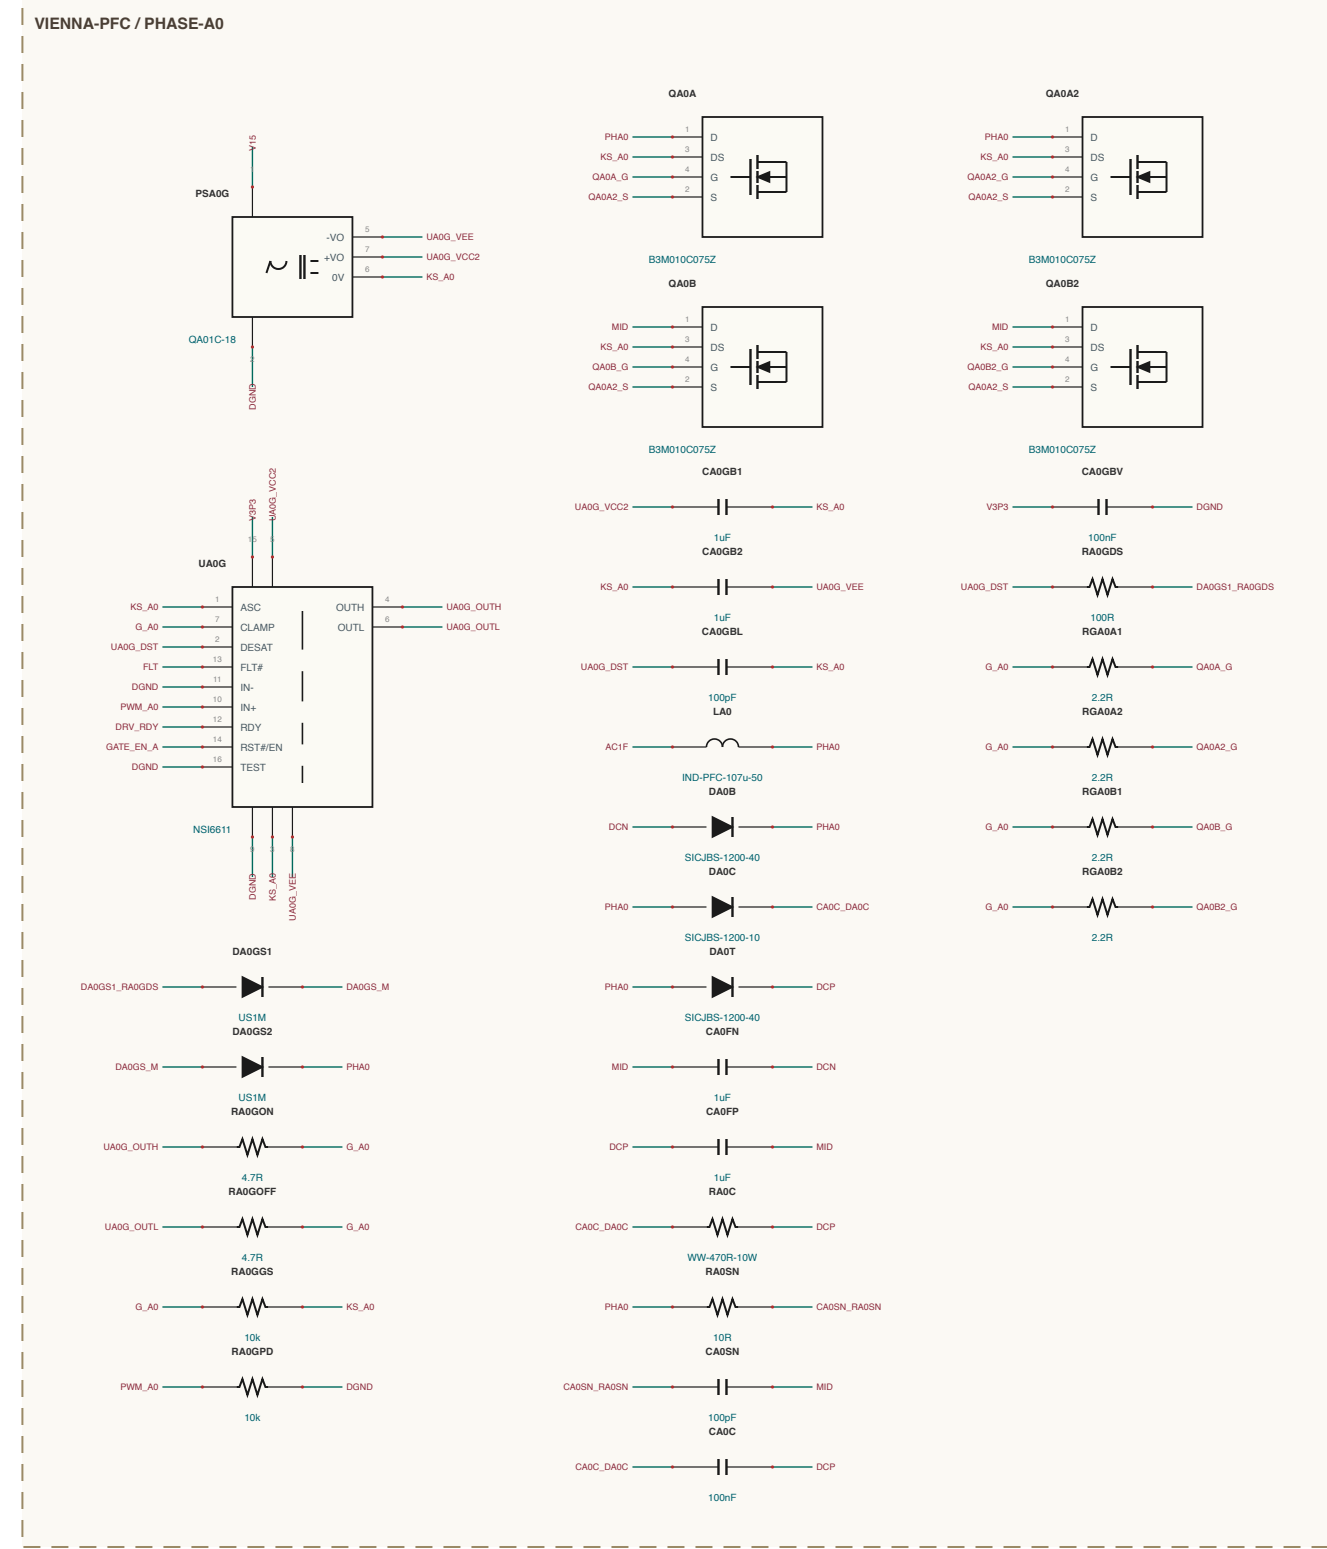
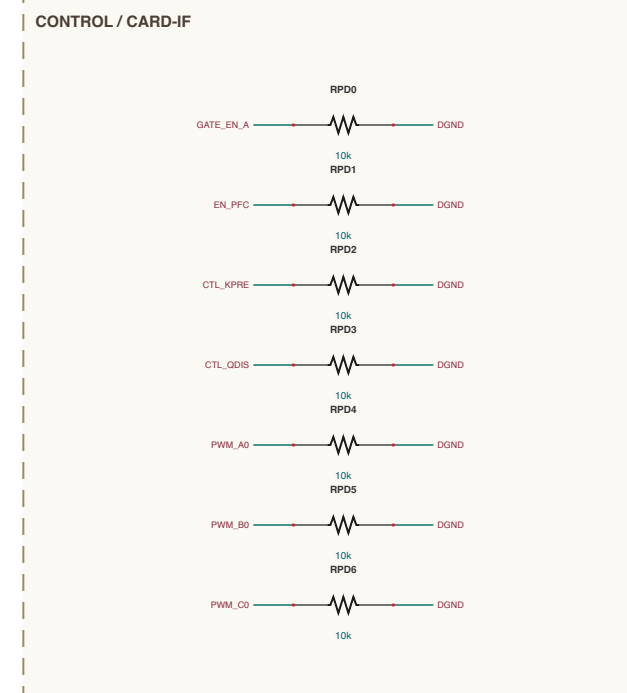
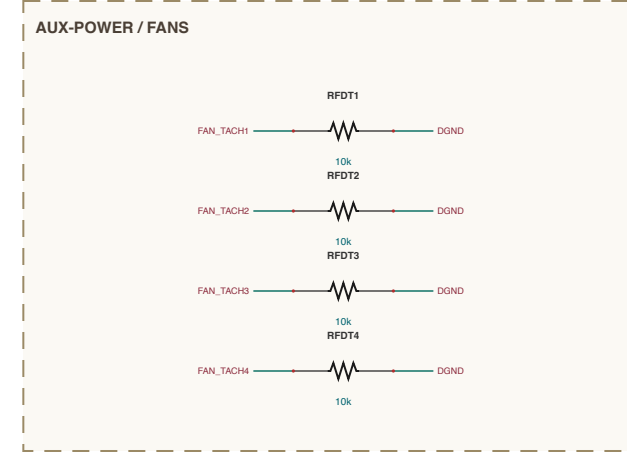
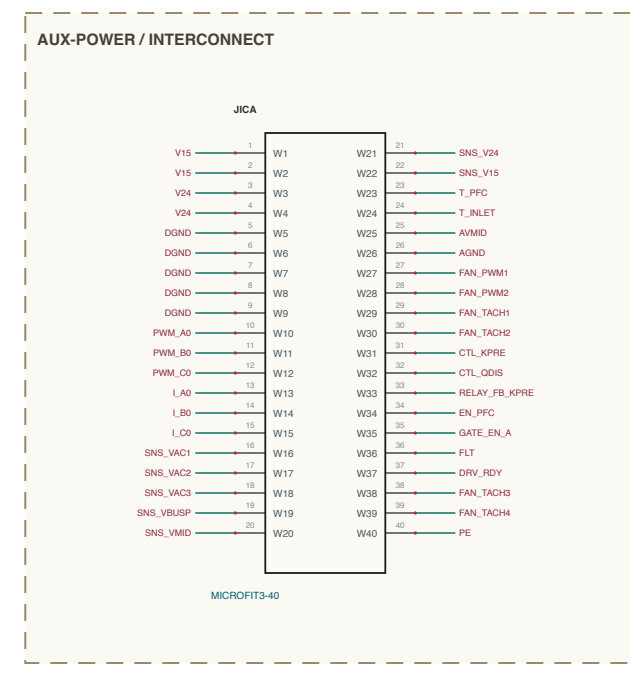
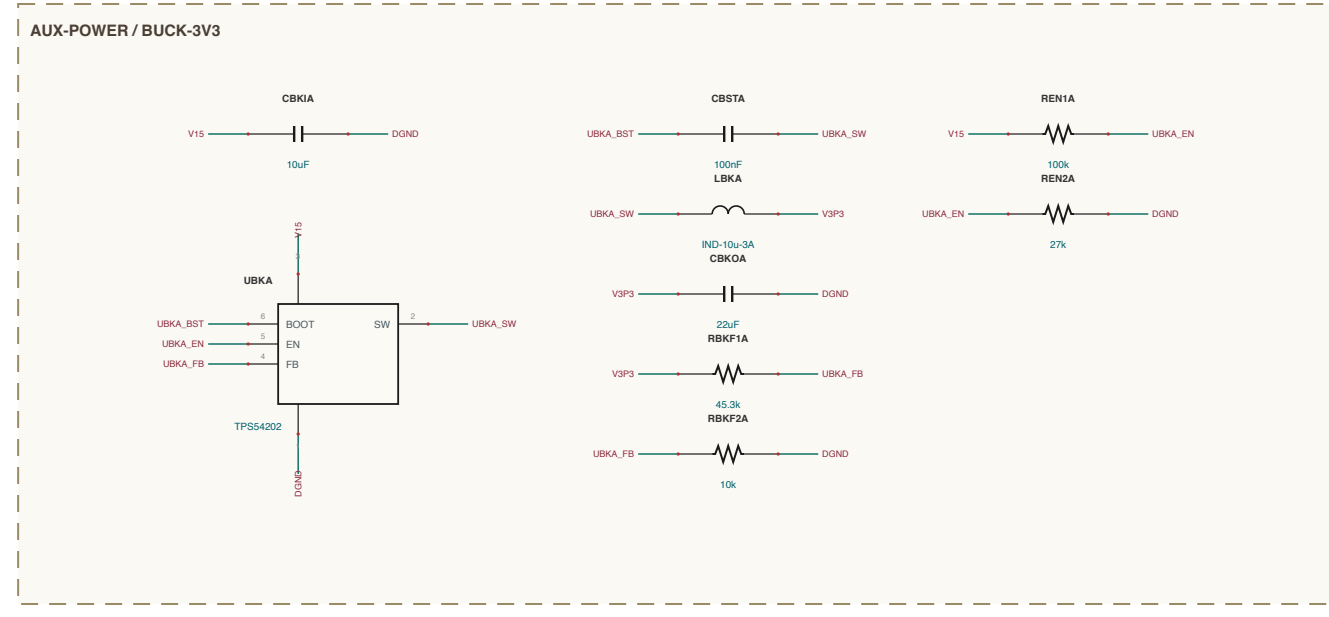
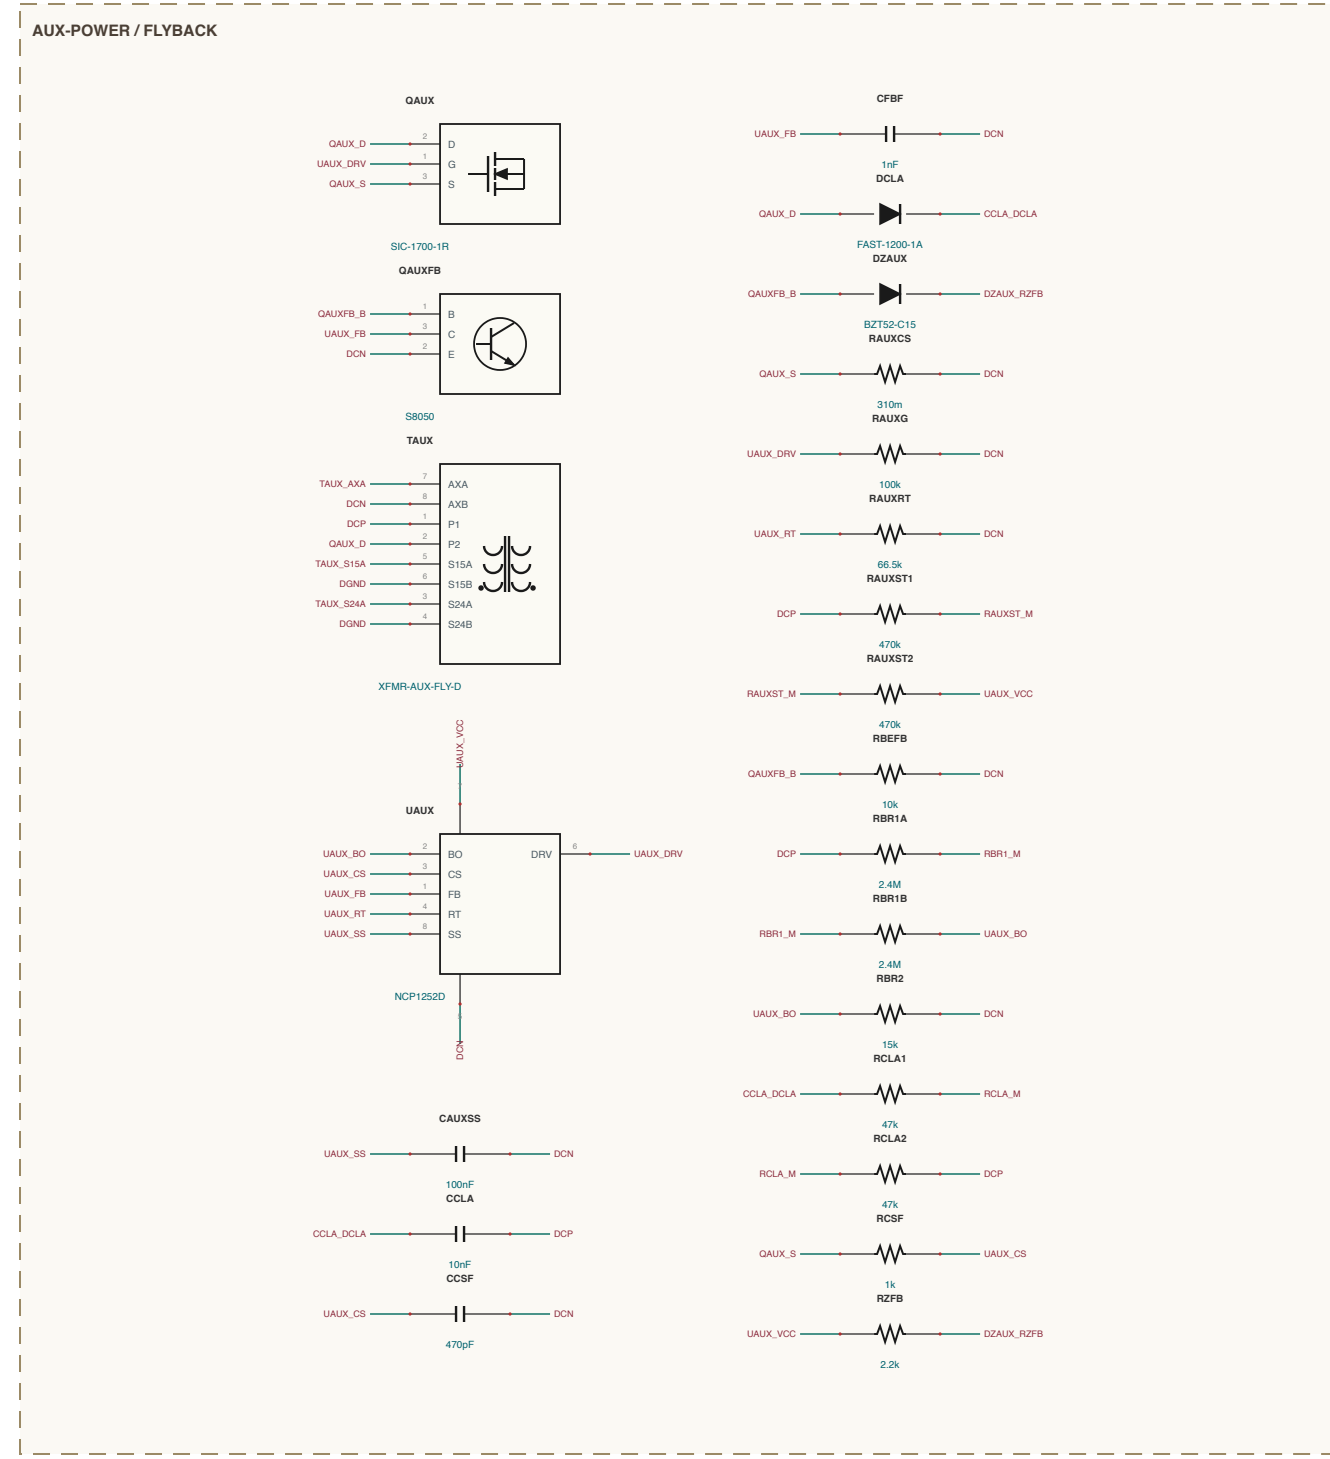
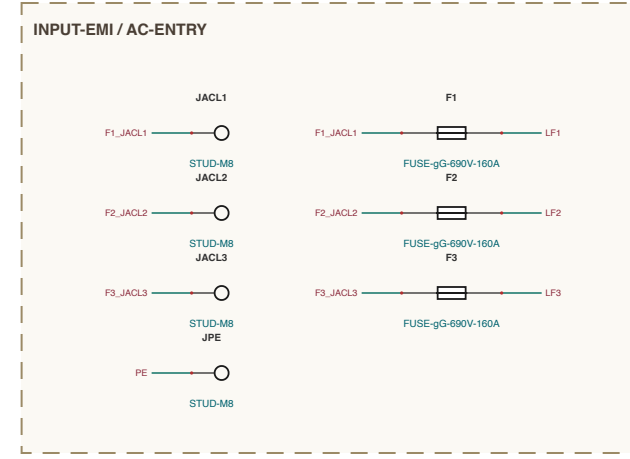
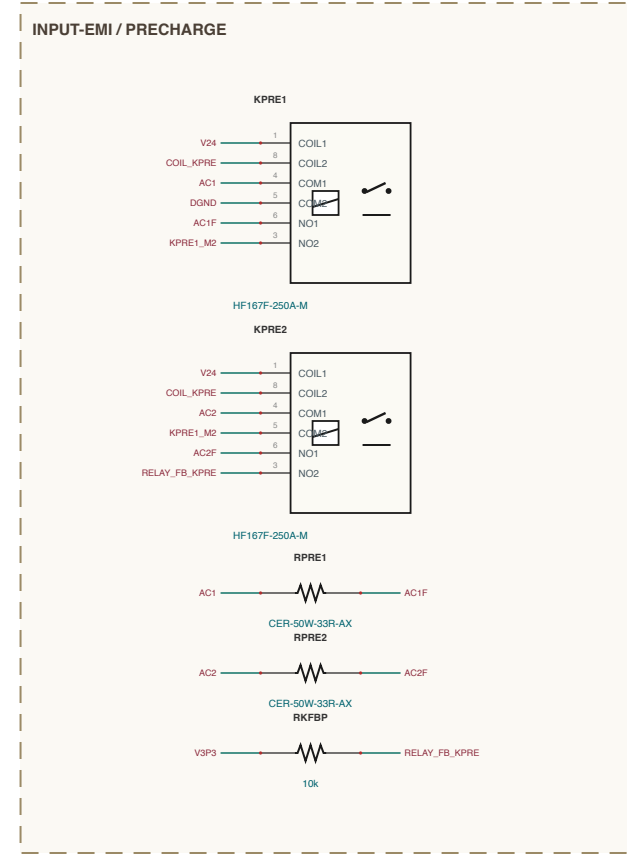
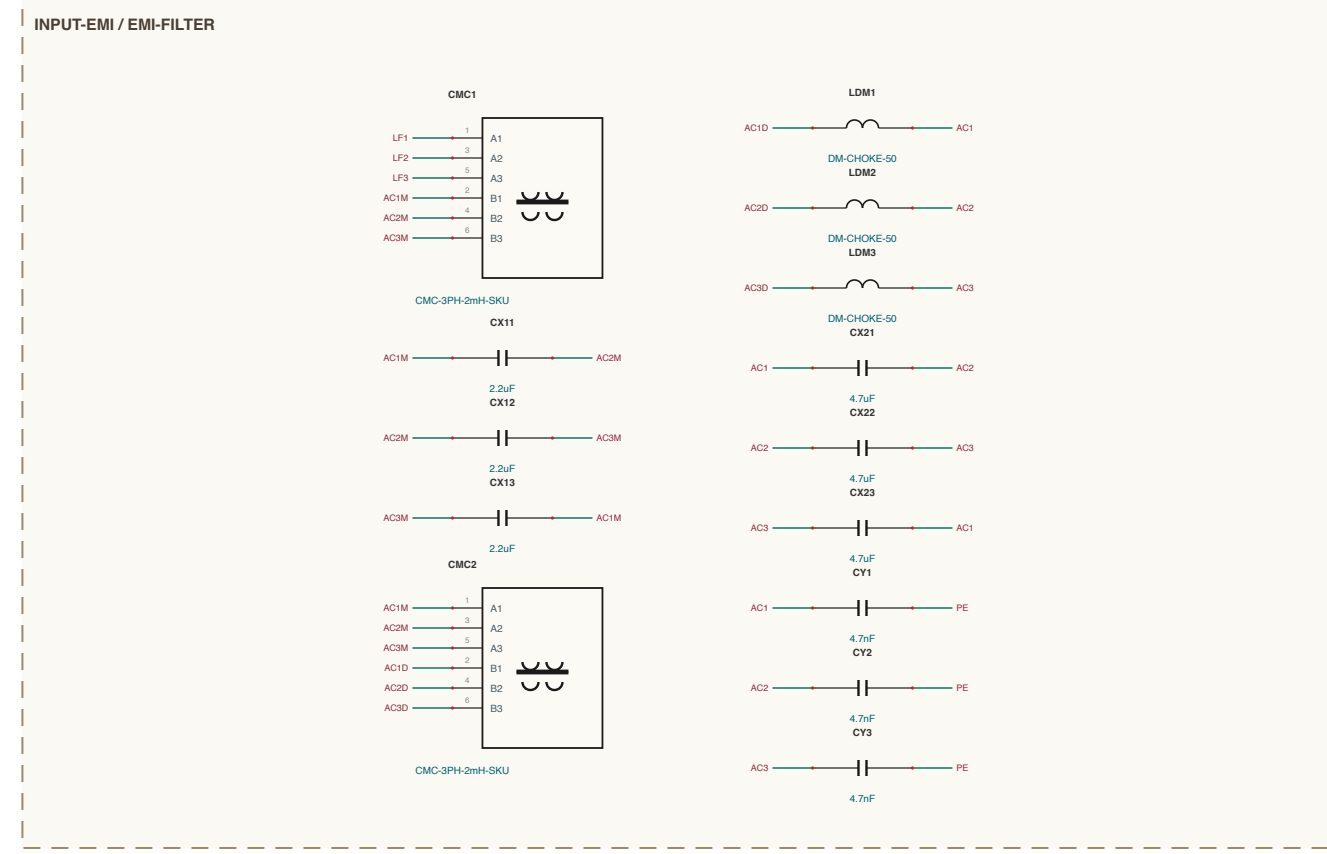
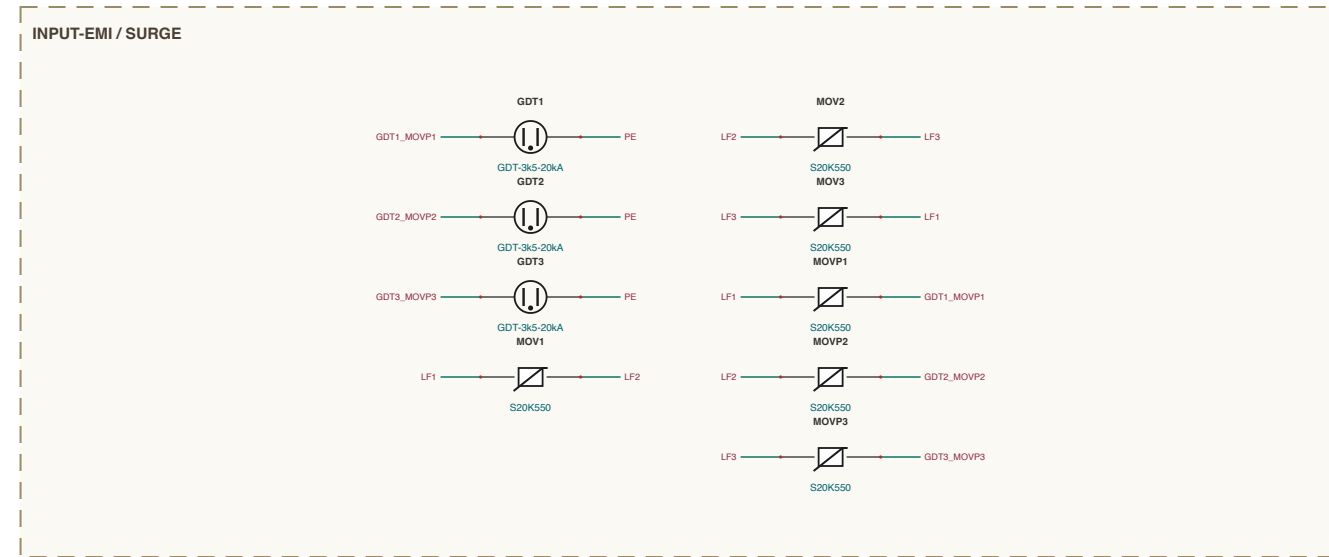
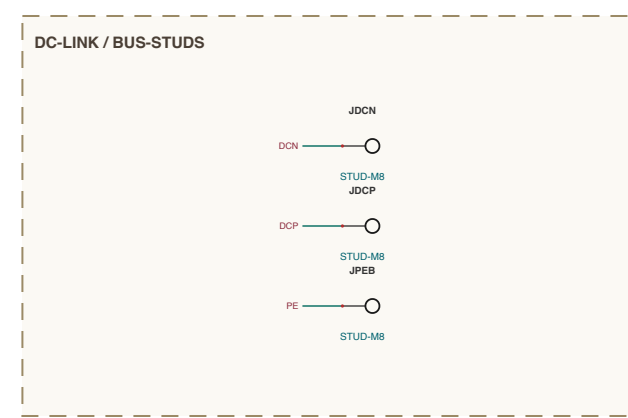
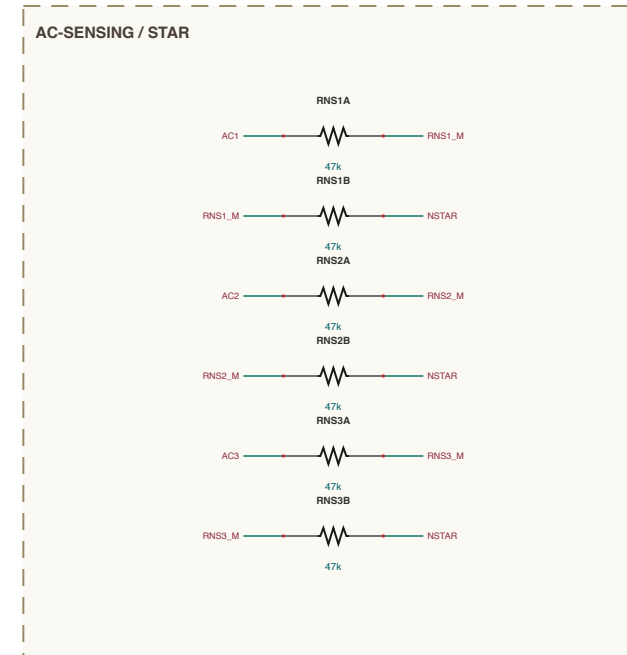
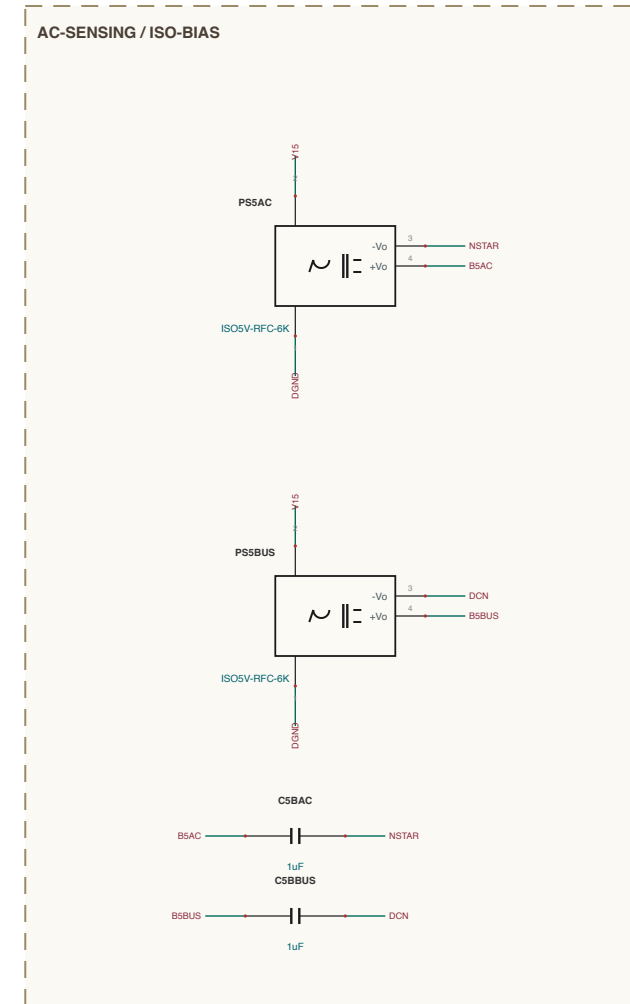
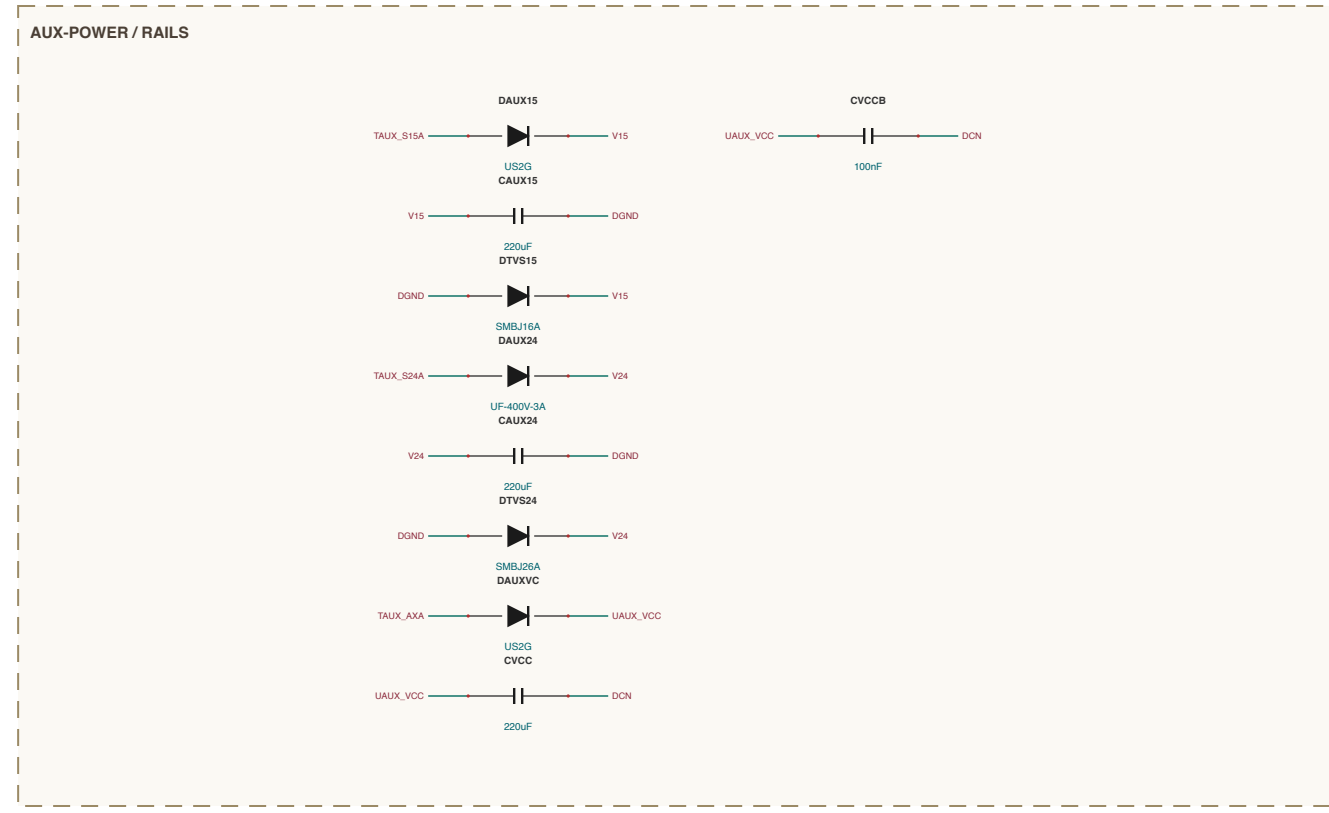
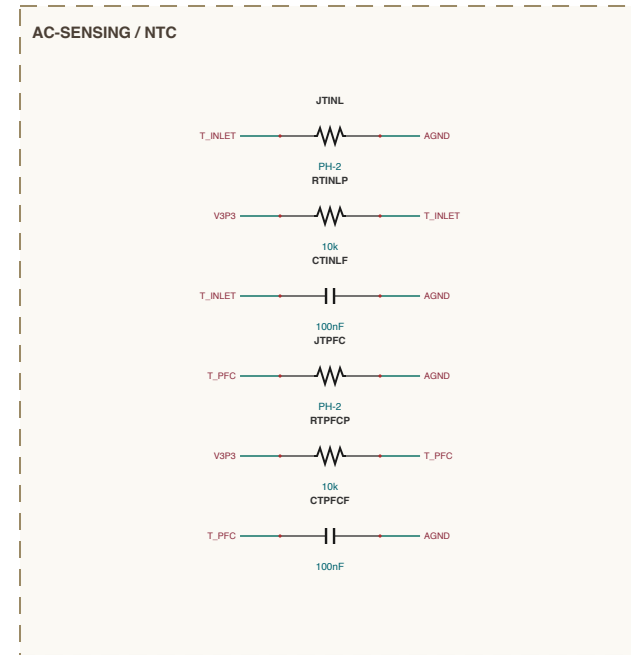
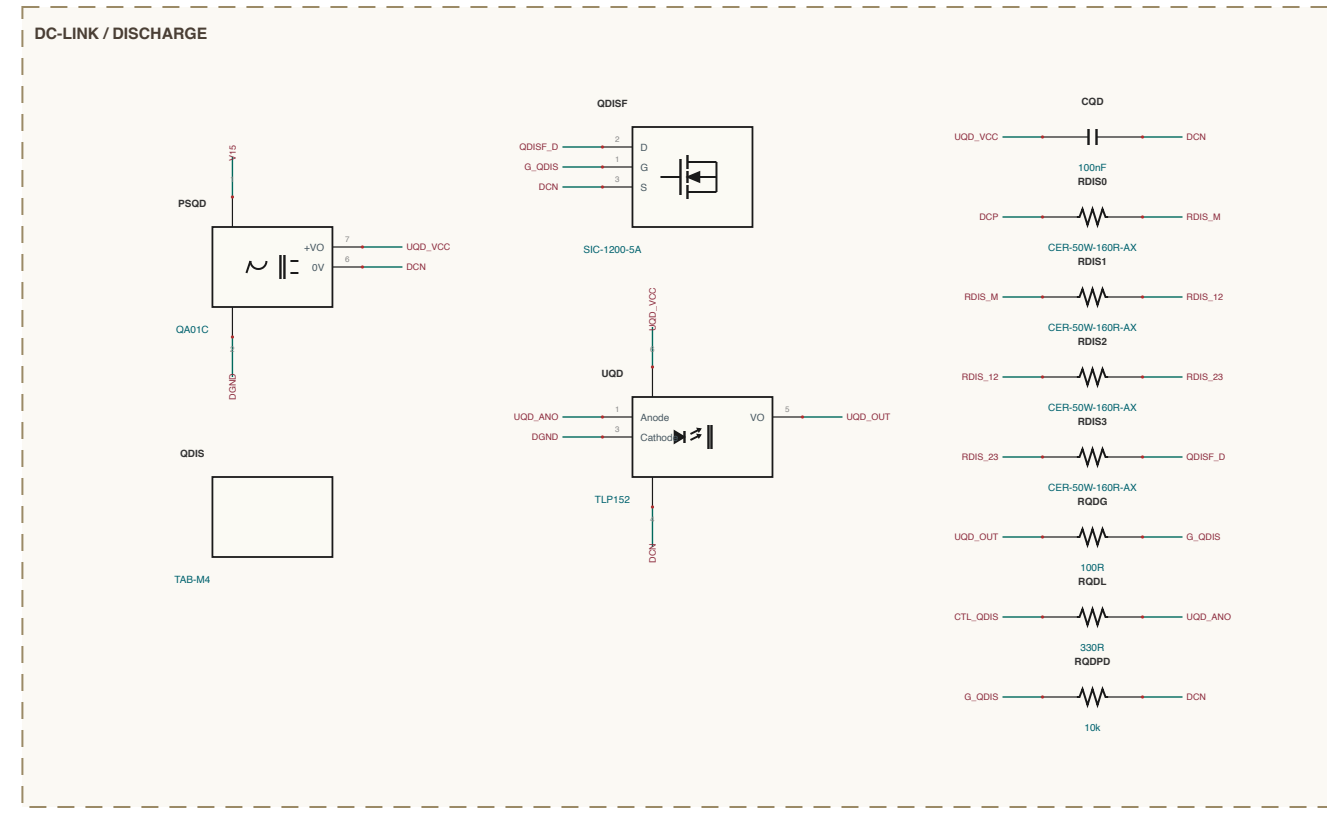
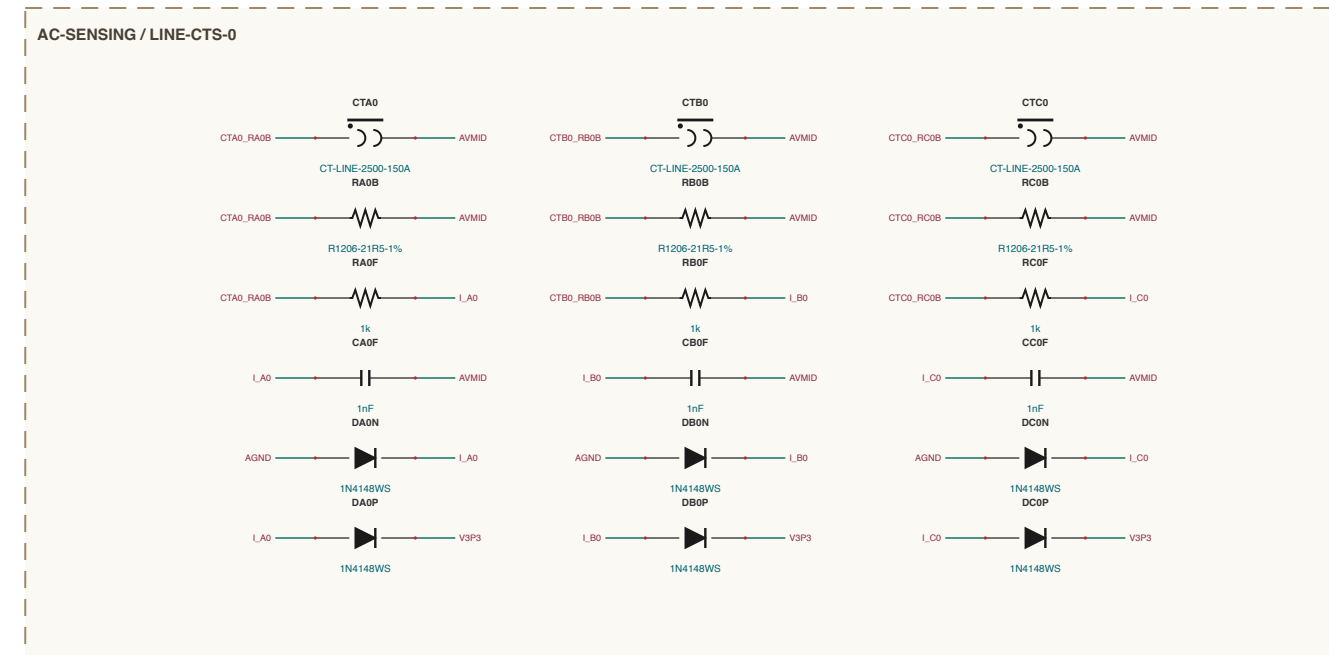
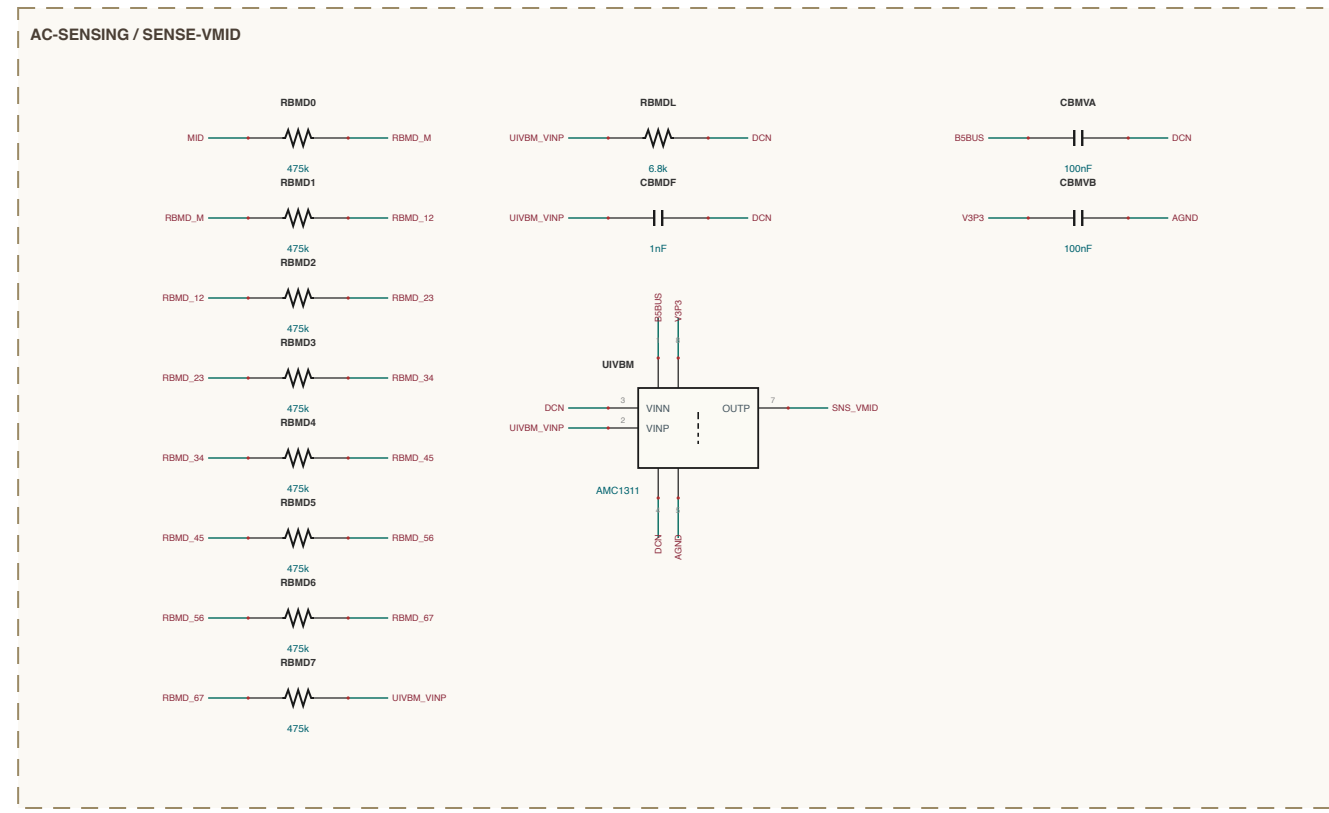
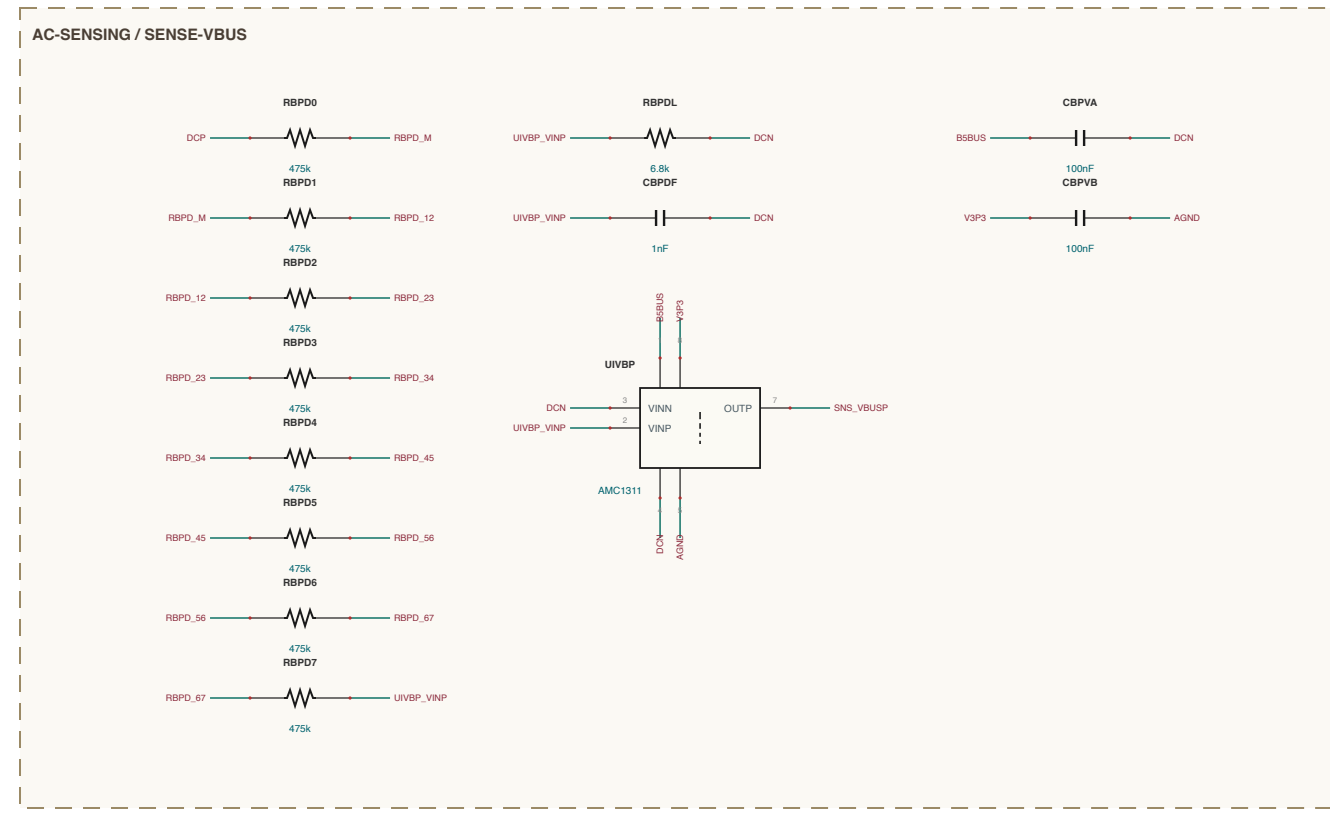
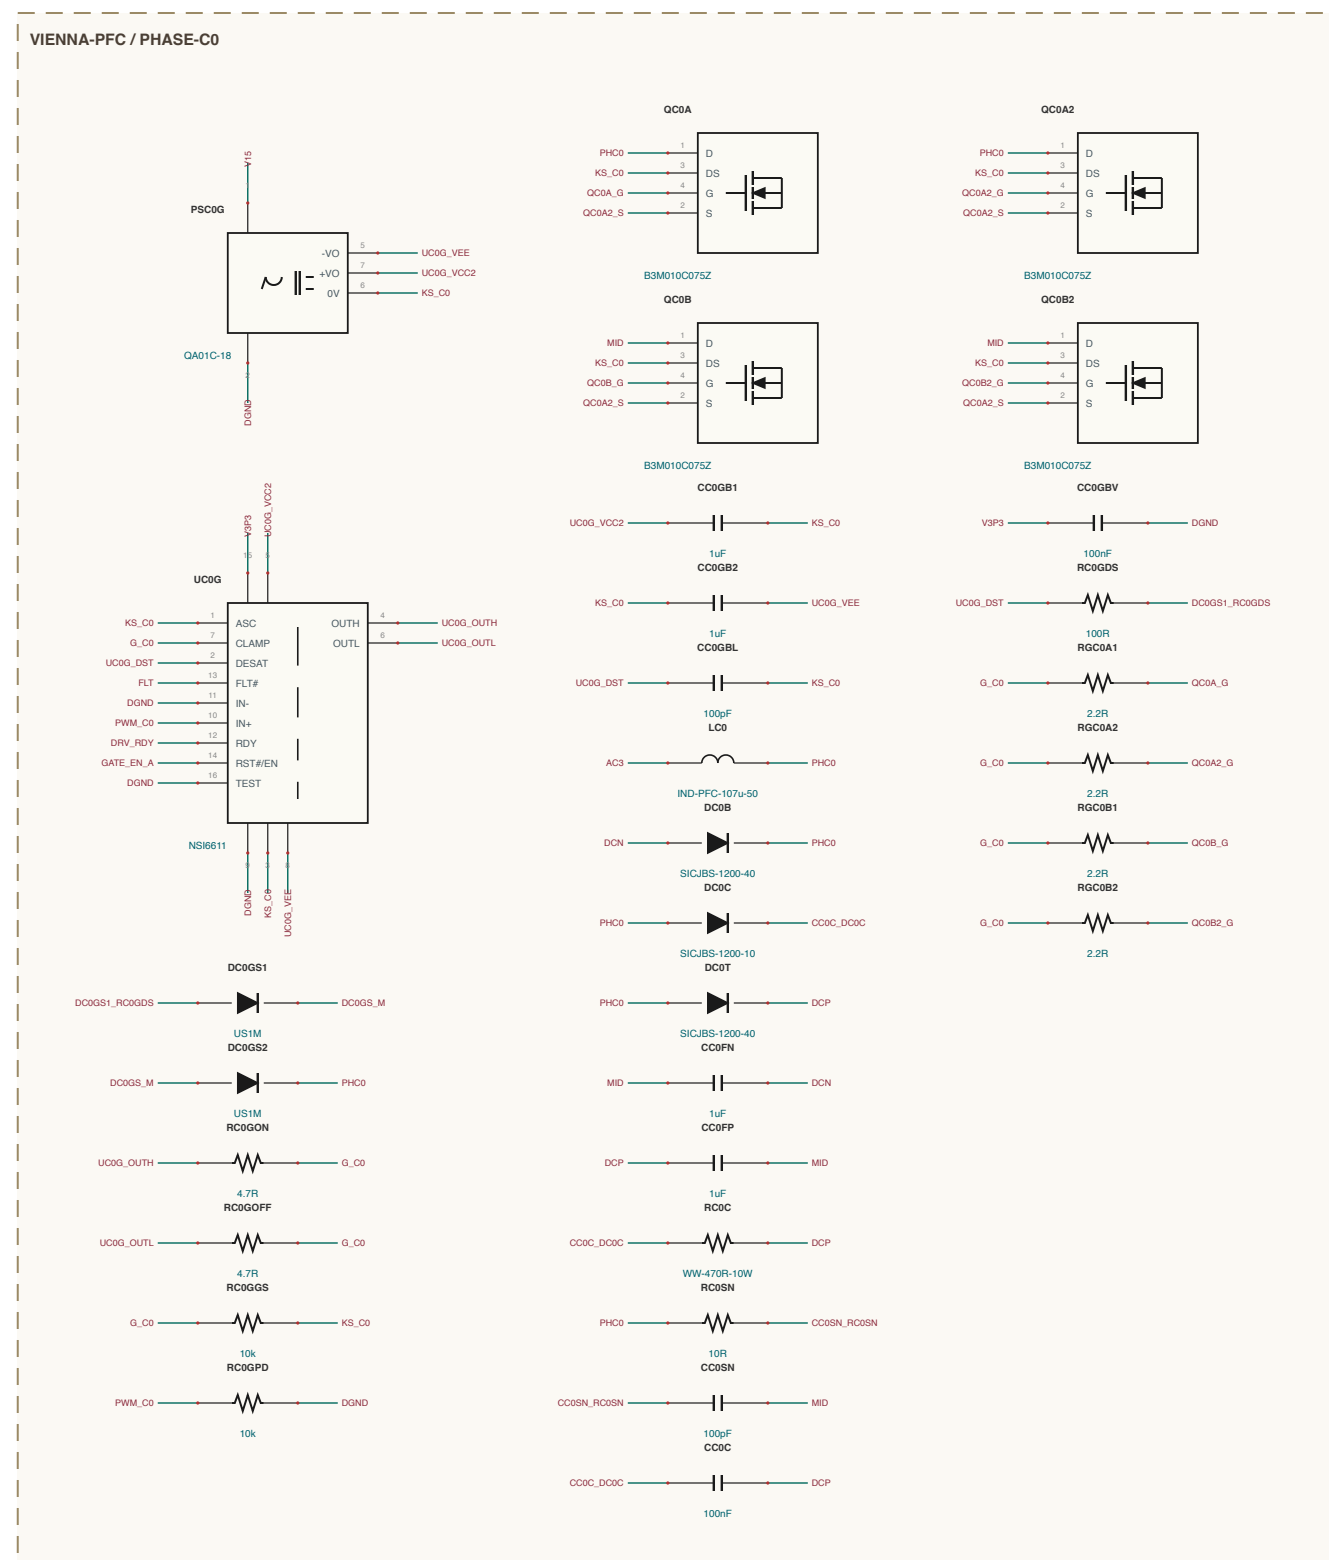
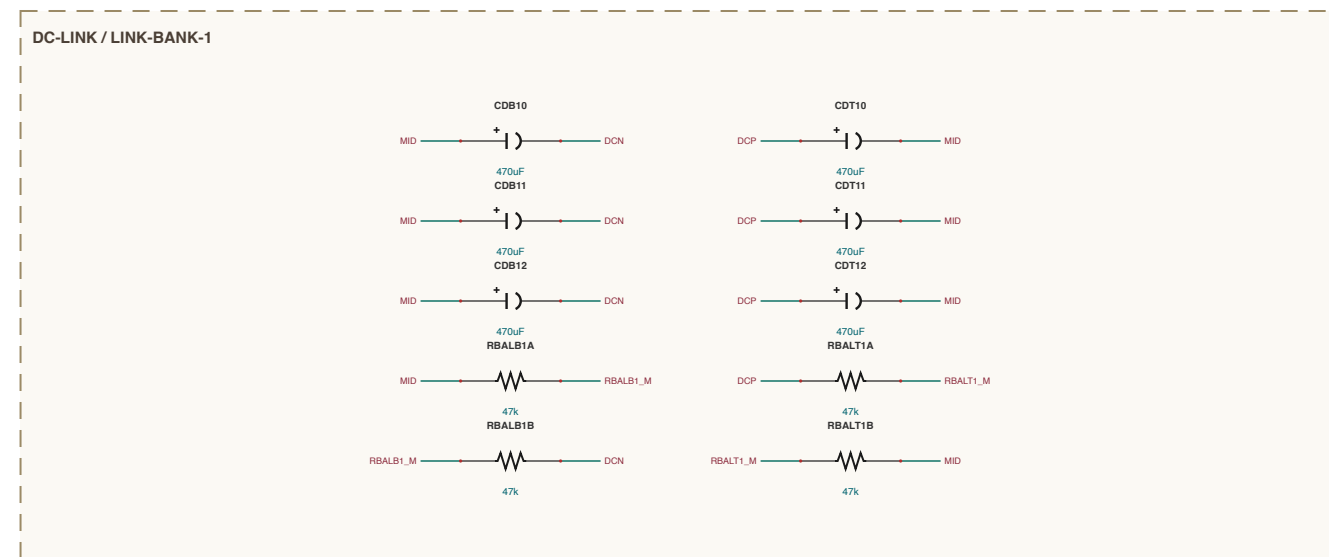
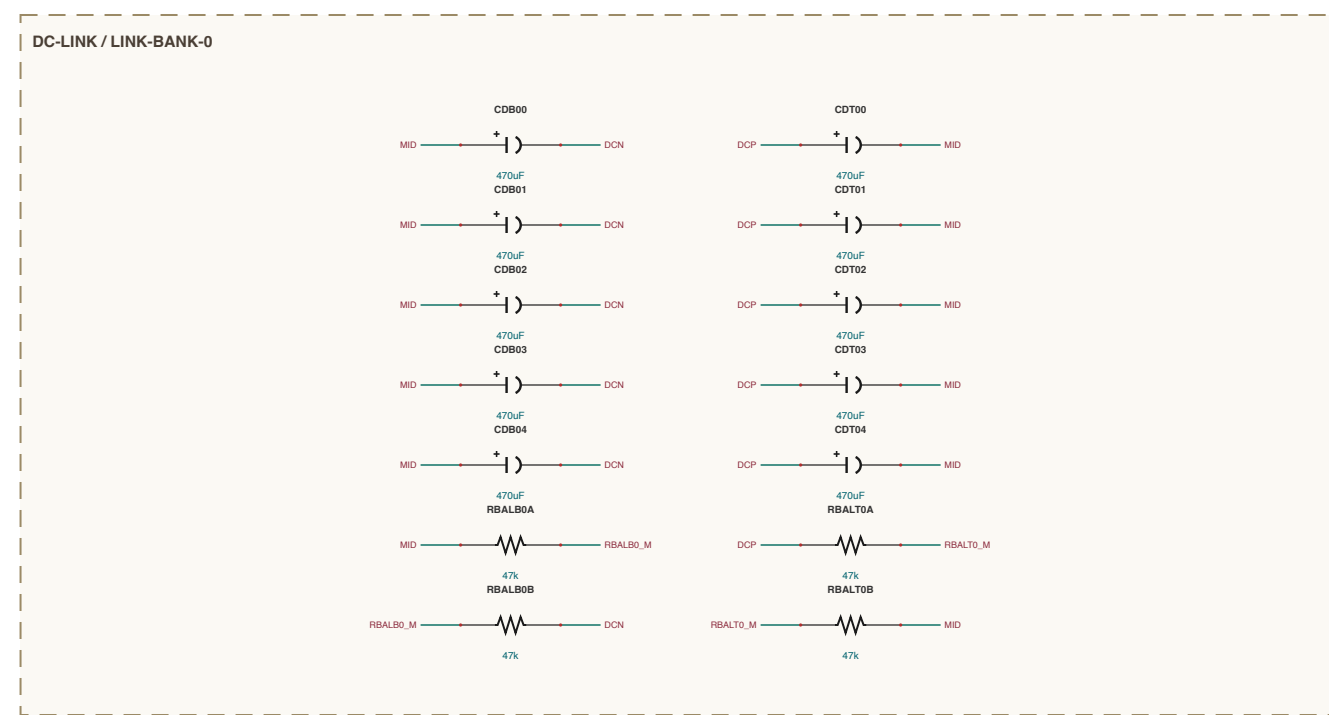
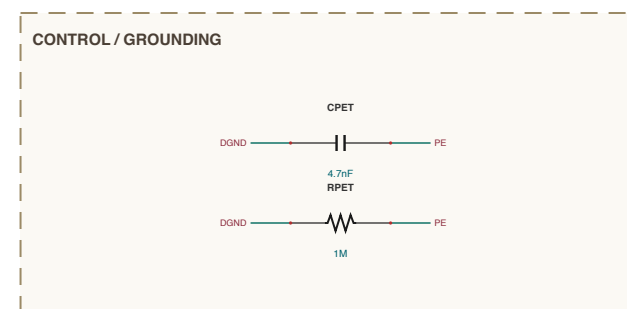
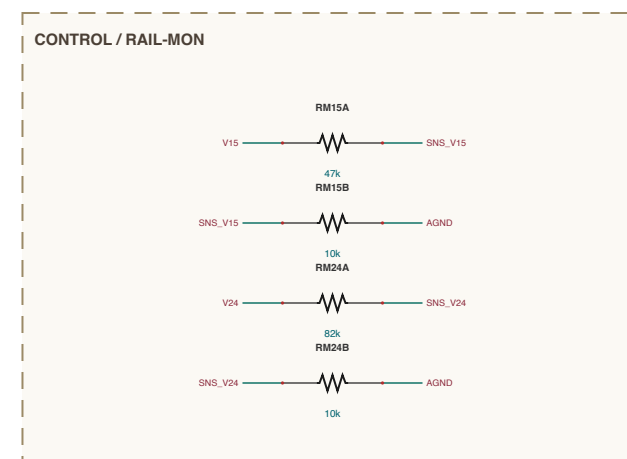
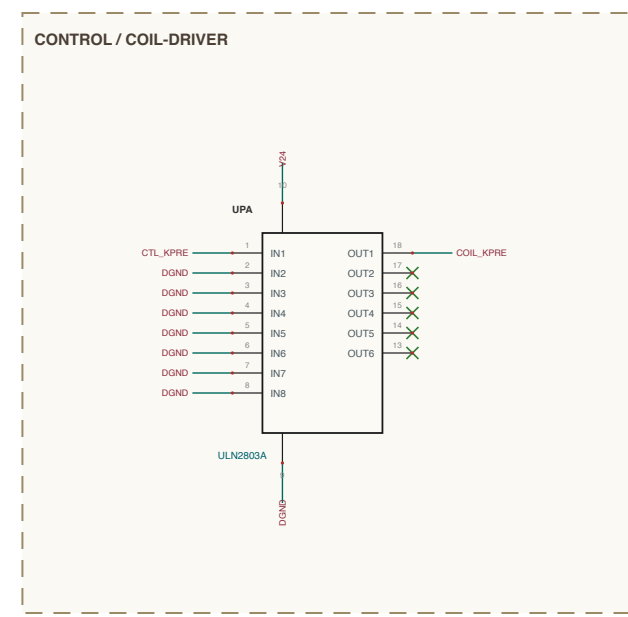
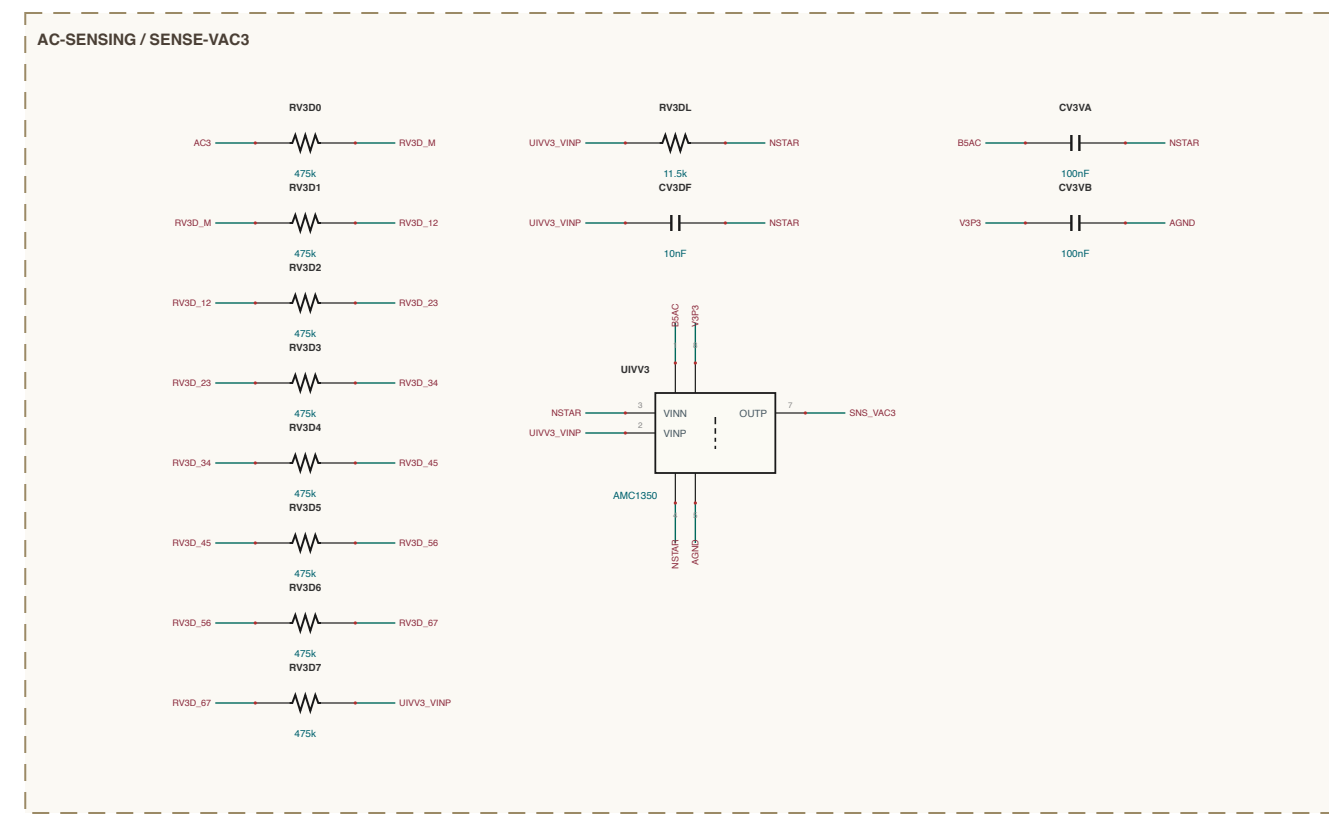
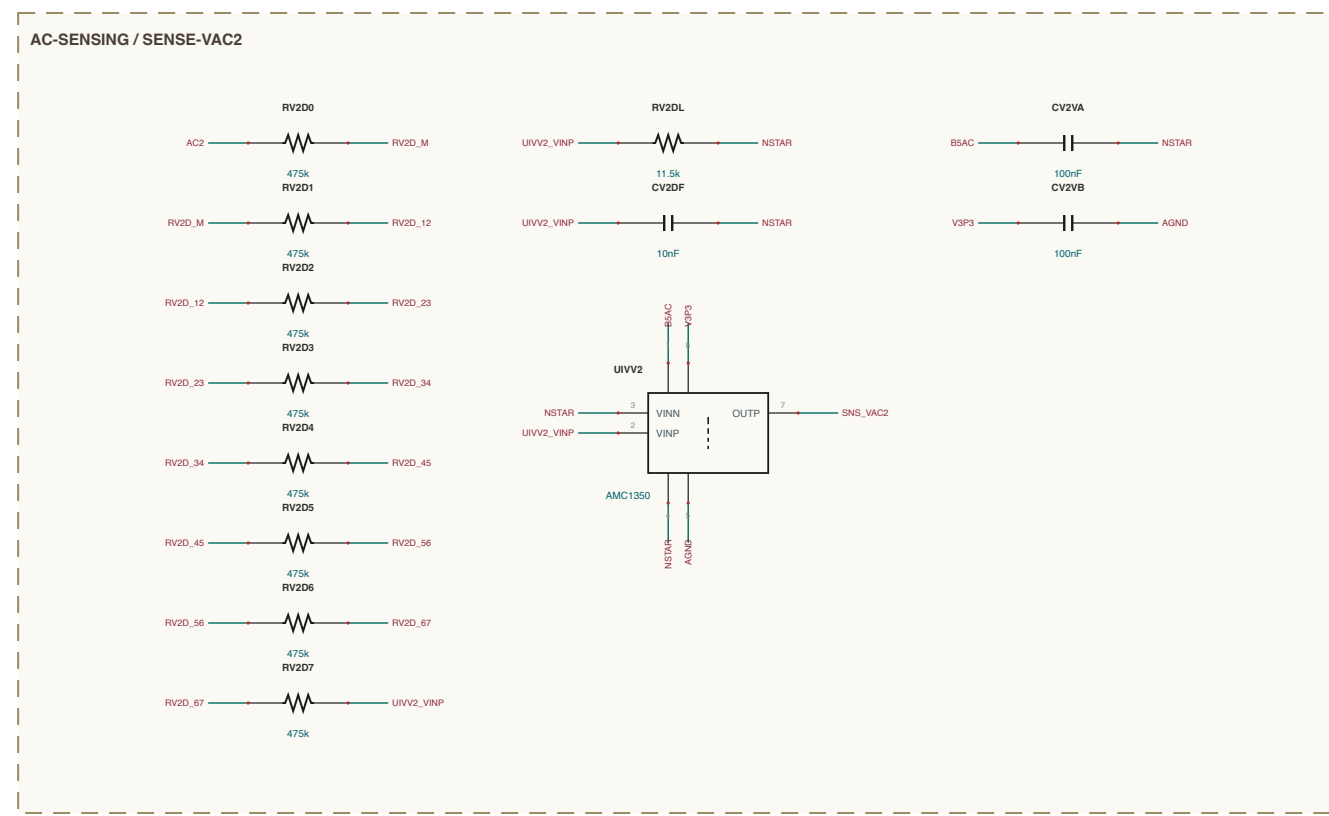


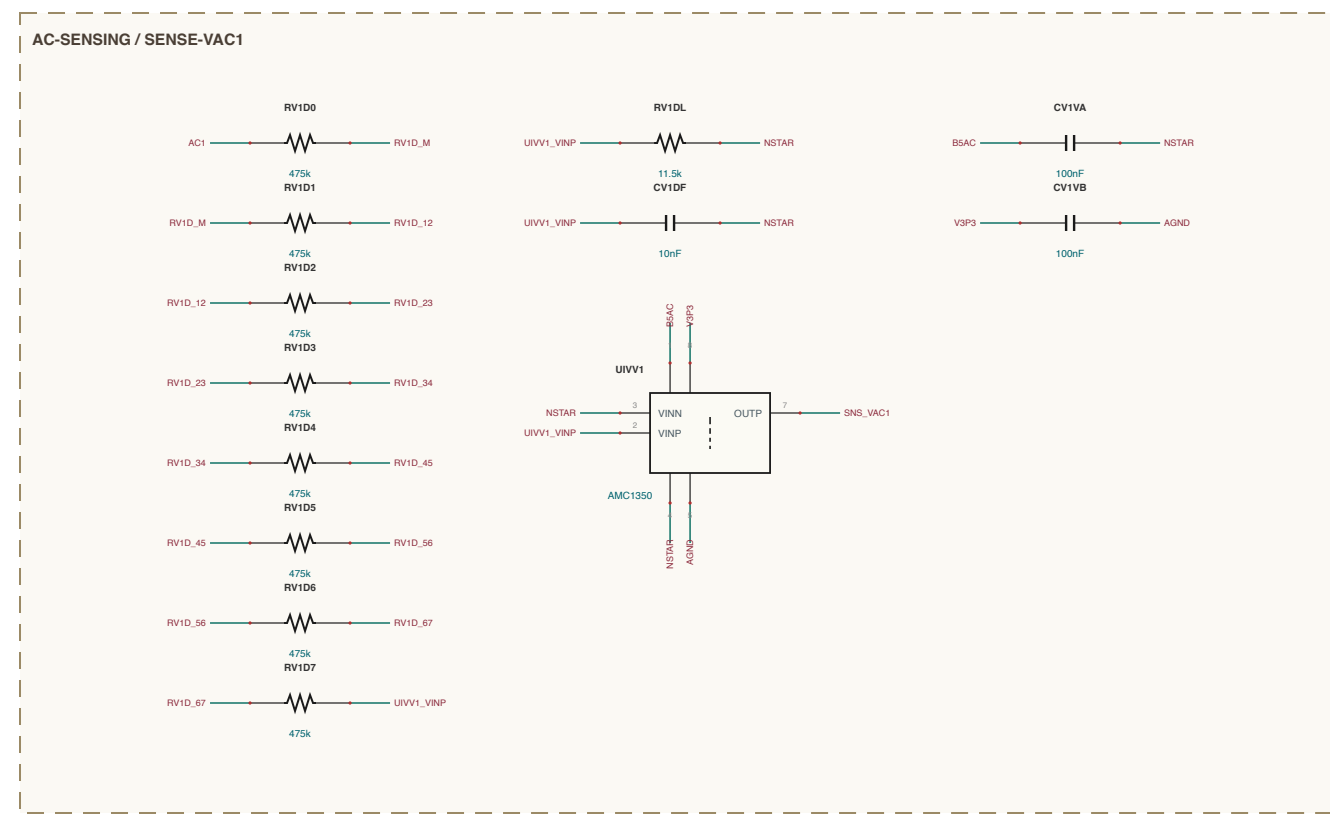

SHEET INDEX	
3	1st to 7 of 2
AC EXISTING	- 8 sections
ALL FLOOR	- 3 sections
CONTROL	- 4 sections
DC LINK	- 4 sections
INVERTER	- 4 sections
VENNA-PPC	- 3 sections
na	0 of 28 sections - 28 components

NET NAMING

Internal functions are named for what they *join*

Example: `WFOFFS` made of `WFO` join e.g. `WFOICA`, `WFOBP`

Problem: *WFO* equivalent of a *work* join e.g. `WFOALTS`, `W`

Problem: *work* join between `Workload` join e.g. `WFOV2`, `JO`

all others are explicit design units

MAGNETICS CONSTRUCTION

Identify your measurements and derive gap, rise, acceptance limits from them)

D1 L&L LOS 5x TDS bsmbar [CATALOGUE], Node# n+1 set trim => L&L 10(N), wSetoff @ 120.5A psi (EIS)
D6 LOENH-02 In TSD bsm, Mid, SE, Area => 12.0psi @ 90A psi (AET, E1 retained load = 1.8) ==>

Total U = trim + measured after Isotape (trim COMPONENTS Isotape segment). Cr at Trim sections